

Product specification

Quick Reference Date


	Antenna module on the system board	
Frequenc Range	2400 ~ 2500MHz	
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)	
Tot. Rad. Pwr. (dBm)	-1.2 (Input pwr - loss pwr)	
Peak EIRP(dBm)	1.2	
Directivity (dBi)	1 (all direction antenna)	
Efficiency (dB)	6 0.2 %	
Gain (dBi)	1.9	
Maximum Power (dBm)	1.7 (XY-plane)	
Minimum Power (dBm)	-4(XY-plane)	
Avg. Power (dBm)	-0.5(XY-plane)	
Input Impendence(ohm)	50	
Polarization Type	V ertical & Horizontal	
V . S .W . R	< 1.4	

Manufacture: SHENZHEN RENYUAN TECHNOLOGY CO.,LTD

Address: Block B, Building 1, South Bank Plaza, Heping Community, Fuhai Street, Bao'an District, Shenzhen. Business Apartment 1118

All the technical data and information contained herein are subject to change without prior notice


Antenna Layout & module on the system board

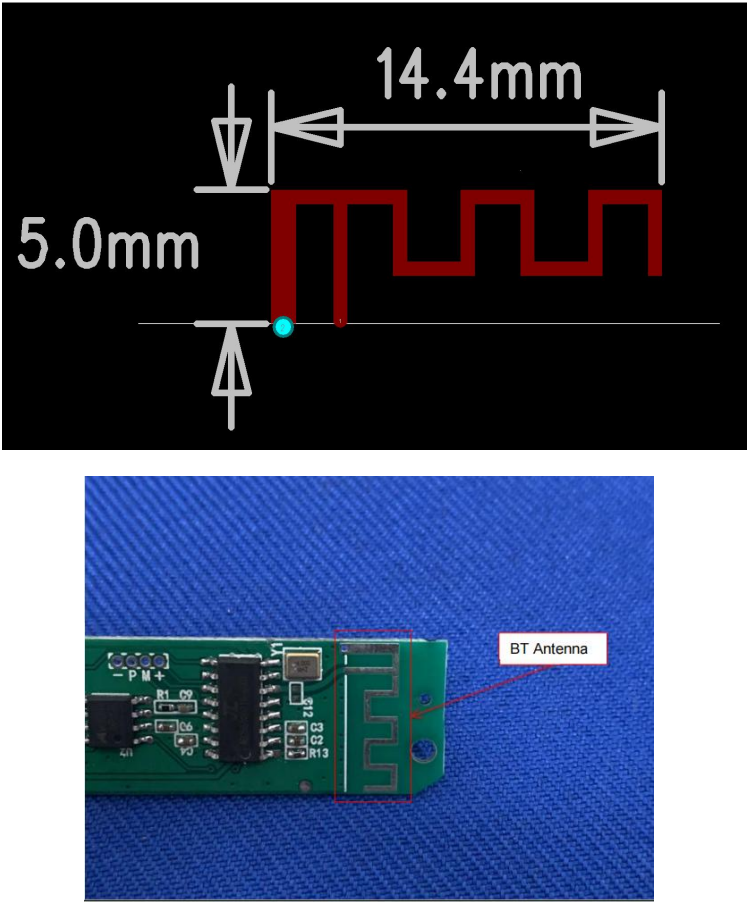


Antenna Gain

Gain Table							
Unit in dBi @2.44GHz	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
Module Board	1.2	-0.5	1.9	-3.6	1.1	-3.0	6 0.2 %

Return Loss

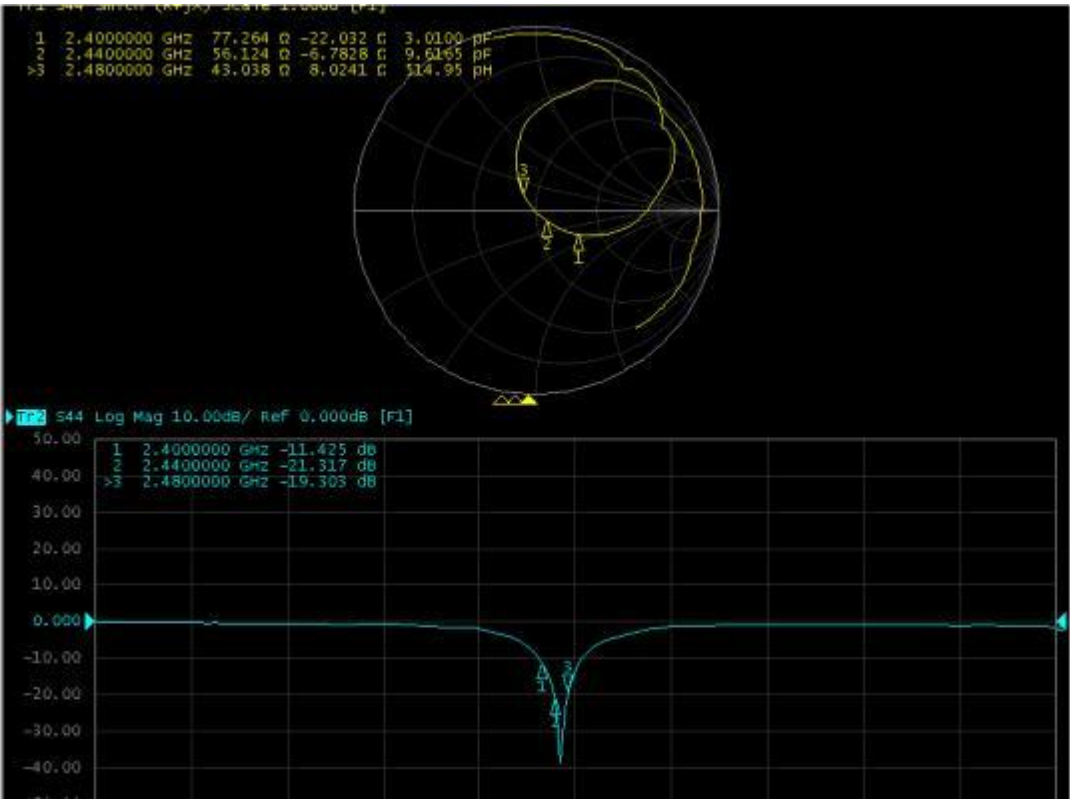

The Environment of Antenna Radiation Pattern

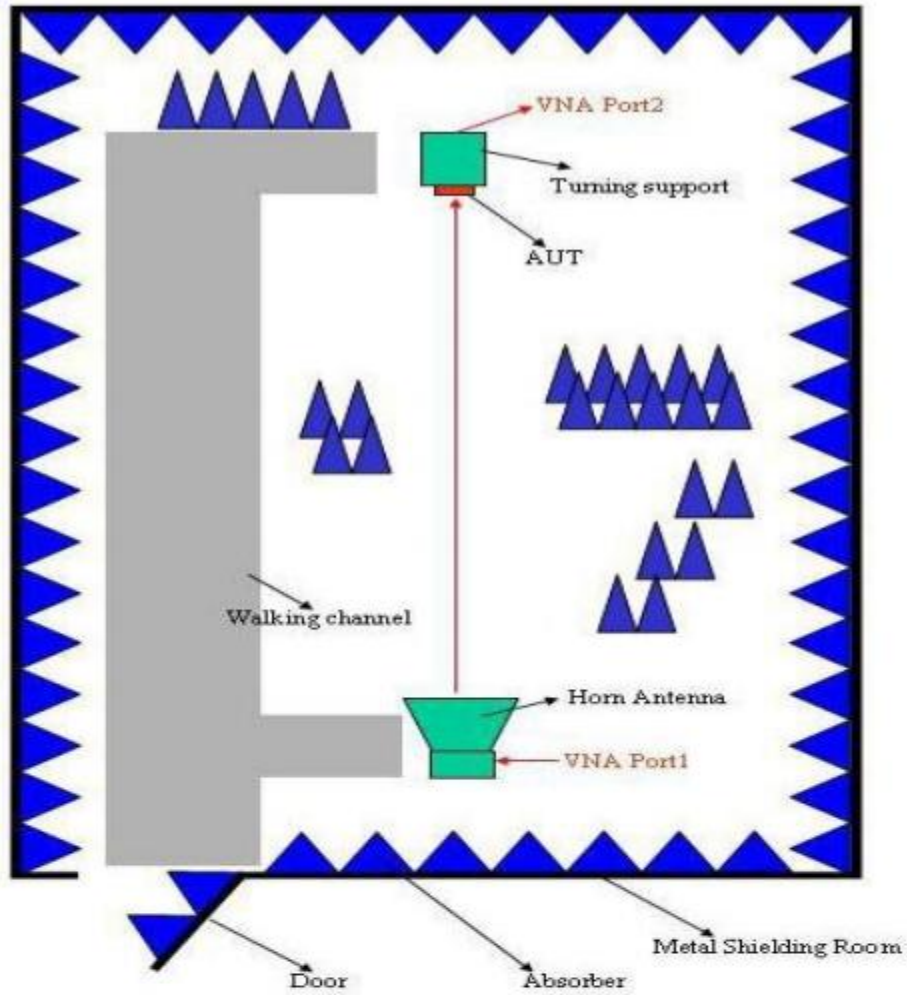

Power (dBi)
2450MHz

