

Page:

Report No.: HKES160700151302

1 of 48

No. 1 Workshop, M-10, Middle section, Science & Technology Park,

Shenzhen, Guangdong, China 518057 Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com

FCC REPORT

Application No:HKES1607001513ITApplicant:Kairos Watches LimitedManufacturer:Kairos Watches Limited

Factory: Shenzhen Kaifa Technology Co. Ltd.

Product Name: Mechanical Smart Watch Hybrid

Model No.(EUT): MSW 115
Add Model No.: SSW 158
Trade Mark: Kairos

FCC ID: 2AJSZ- MSW115SSW158

Standards: 47 CFR Part 15, Subpart C (2015)

Date of Receipt: 2016-08-29

Date of Test: 2016-09-14 to 2016-11-15

Date of Issue: 2016-11-17

Test Result: PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sqs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: HKES160700151302

Page: 2 of 48

2 Version

Revision Record								
Version Chapter Date Modifier Remark								
00		2016-11-17		Original				

Authorized for issue by:		
Tested By	Peter Gene	2016-11-15
	(Peter Geng) /Project Engineer	Date
Checked By	Eric Fu	2016-11-17
	(Eric Fu) /Reviewer	Date



Report No.: HKES160700151302

Page: 3 of 48

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2013	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2013	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
Radiated Spurious Emissions	-		PASS
Restricted bands around fundamental frequency (Radiated Emission) 47 CFR Part 15, Subpart C Section 15.205/15.209		ANSI C63.10 2013	PASS



Report No.: HKES160700151302

Page: 4 of 48

4 Contents

			Page
1	CC	OVER PAGE	1
2	VE	ERSION	2
3		EST SUMMARY	
J			
4	CC	ONTENTS	4
5	GE	ENERAL INFORMATION	5
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	TEST ENVIRONMENT	7
	5.4	DESCRIPTION OF SUPPORT UNITS	7
	5.5	TEST LOCATION	7
	5.6	TEST FACILITY	
	5.7	DEVIATION FROM STANDARDS	
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	5.10	EQUIPMENT LIST	
6	TE	EST RESULTS AND MEASUREMENT DATA	11
	6.1	ANTENNA REQUIREMENT	11
	6.2	CONDUCTED EMISSIONS	12
	6.3	CONDUCTED PEAK OUTPUT POWER	16
	6.4	6DB OCCUPY BANDWIDTH	
	6.5	POWER SPECTRAL DENSITY	
	6.6	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	6.7	SPURIOUS RF CONDUCTED EMISSIONS	
	6.8	RADIATED SPURIOUS EMISSION	
		8.1 Spurious Emissions	
	6.9	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	
7	PH	HOTOGRAPHS - EUT TEST SETUP	47
	7.1	CONDUCTED EMISSION	47
	7.2	RADIATED EMISSION	47
	7.3	RADIATED SPURIOUS EMISSION	48
8	Pŀ	HOTOGRAPHS - FUT CONSTRUCTIONAL DETAILS	48



Report No.: HKES160700151302

Page: 5 of 48

5 General Information

5.1 Client Information

Applicant:	Kairos Watches Limited	
Address of Applicant:	3A, Yee Lim Industrial Building, Stage 2, 8Ka Ting Road, Kwai Chung	
Manufacturer:	Kairos Watches Limited	
Address of Manufacturer:	3A, Yee Lim Industrial Building, Stage 2, 8Ka Ting Road, Kwai Chung.	
Factory:	Shenzhen Kaifa Technology Co. Ltd.	
Address of Factory:	7006 Caitian Rd. Futian Dist. Shenzhen, China, 518035	

5.2 General Description of EUT

Product Name:	Mechanical Smart Watch Hybrid
Model No.:	MSW 115
Trade Mark:	Kairos
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V4.0 dual mode
	This test report is for BLE mode.
Modulation Type:	GFSK
Number of Channel:	40
Antenna Type:	Chip antenna
Antenna Gain:	0.5dBi
Power Supply:	DC 3.7V 160mAh rechargeable battery charged by DC 5V from adapter Model: JX050100-EU INPUT: AC 100-240V, 50-60Hz OUTPUT: DC 5V,1000mA
Test Voltage:	AC120V 60Hz
Cable:	USB LINE: 63cm, shielded.

Remark:

Model No.: MSW 115, SSW 158

Only the model MSW 115 was tested, since the circuitry design, PCB layout, electrical components used, internal wiring and functions were identical for all above models. Only different on model number and color.



Report No.: HKES160700151302

Page: 6 of 48

Operation F	Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency	
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz	
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz	
2	2406MHz	12	2426MHz	22	2446MHz	32	2466MHz	
3	2408MHz	13	2428MHz	23	2448MHz	33	2468MHz	
4	2410MHz	14	2430MHz	24	2450MHz	34	2470MHz	
5	2412MHz	15	2432MHz	25	2452MHz	35	2472MHz	
6	2414MHz	16	2434MHz	26	2454MHz	36	2474MHz	
7	2416MHz	17	2436MHz	27	2456MHz	37	2476MHz	
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz	
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz	

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel (CH0)	2402MHz
The middle channel (CH19)	2440MHz
The highest channel (CH39)	2480MHz



Report No.: HKES160700151302

Page: 7 of 48

5.3 Test Environment

Operating Environment:			
Temperature:	25.0 °C		
Humidity:	55 % RH		
Atmospheric Pressure:	1010 mbar		

5.4 Description of Support Units

The EUT has been tested independent unit.

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

VCCI

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

• FCC - Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.



Report No.: HKES160700151302

Page: 8 of 48

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



Report No.: HKES160700151302

Page: 9 of 48

5.10 Equipment List

	Conducted Emission								
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)			
1	Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2016-05-13	2017-05-13			
2	LISN	Rohde & Schwarz	ENV216	SEM007-01	2016-10-09	2017-10-09			
3	LISN	ETS-LINDGREN	3816/2	SEM007-02	2016-04-25	2017-04-25			
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T8- 02	EMC0120	2016-09-28	2017-09-28			
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T4- 02	EMC0121	2016-09-28	2017-09-28			
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T2- 02	EMC0122	2016-09-28	2017-09-28			
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2016-04-25	2017-04-25			
8	DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2016-10-09	2017-10-09			

	RF connected test									
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)				
1	DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09				
2	Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09				
3	Signal Generator	Rohde & Schwarz	SML03	SEM006-02	2016-04-25	2017-04-25				
4	Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09				



Report No.: HKES160700151302

Page: 10 of 48

	RE in Chamber								
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)			
1	10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2016-05-13	2017-05-13			
2	EMI Test Receiver (9k-3GHz)	Rohde & Schwarz	ESCI	SEM004-01	2016-04-25	2017-04-25			
3	Trilog-Broadband Antenna(30M-1GHz)	Schwarzbeck	VULB9168	SEM003-18	2016-06-29	2019-06-29			
4	Pre-amplifier	Sonoma Instrument Co	310N	SEM005-03	2016-07-06	2017-07-06			
5	Loop Antenna	ETS-Lindgren	6502	SEM003-08	2015-08-14	2018-08-14			

	RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)	
1	3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2016-05-13	2017-05-13	
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEM004-04	2016-04-25	2017-04-25	
3	BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-02	2014-11-15	2017-11-15	
4	Amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2016-10-09	2017-10-09	
5	Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2015-06-14	2018-06-14	
6	Horn Antenna (18-26GHz)	ETS-Lindgren	3160	SEM003-12	2014-11-24	2017-11-24	
7	Horn Antenna (26GHz-40GHz)	A.H.Systems, inc.	SAS-573	SEM003-13	2015-02-12	2018-02-12	
8	Low Noise Amplifier	Black Diamond Series	BDLNA- 0118- 352810	SEM005-05	2016-10-09	2017-10-09	
9	Band filter	Amindeon	Asi 3314	SEM023-01	N/A	N/A	



Report No.: HKES160700151302

Page: 11 of 48

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:



The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0.5dBi.



Report No.: HKES160700151302

Page: 12 of 48

6.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207					
Test Method:	ANSI C63.10: 2013					
Test Frequency Range:	: 150kHz to 30MHz					
Limit:		Limit (c	dBuV)			
	Frequency range (MHz)	Quasi-peak	Average			
	0.15-0.5	66 to 56*	56 to 46*			
	0.5-5	56	46			
	5-30	60	50			
	* Decreases with the logarithm	n of the frequency.				
Test Procedure:	 The mains terminal disturbance voltage test was conducted in a shielded room. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. In order to find the maximum emission, the relative positions of equipment 					
Test Setup:	Shielding Room EUT AC Mains LISN1	AE LISN2 → AC Ma Ground Reference Plane	Test Receiver			
Test Mode:	Transmitting with GFSK modu Charge +Transmitting mode.	llation.				

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sqs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: HKES160700151302

Page: 13 of 48

Instruments Used:	Refer to section 5.10 for details.	
Test Results:	Pass	



Report No.: HKES160700151302


Page: 14 of 48

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

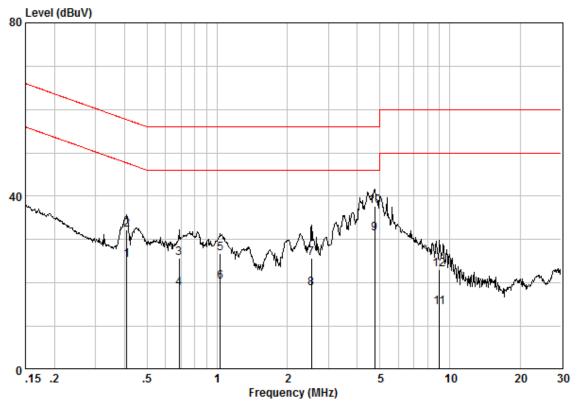

Site : Shielding Room Condition : CE LINE Job No. : 1513IT Test Mode : Charge+TX


		Cable	LISN	Read		Limit	Over	
	Freq	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.40831	0.02	9.60	15.76	25.38	47.68	-22.30	AVERAGE
2	0.40831	0.02	9.60	22.67	32.29	57.68	-25.40	QP
3	0.68626	0.02	9.61	16.17	25.81	56.00	-30.19	QP
4	0.68626	0.02	9.61	9.22	18.85	46.00	-27.15	AVERAGE
5	1.032	0.03	9.63	17.09	26.75	56.00	-29.25	QP
6	1.032	0.03	9.63	10.57	20.23	46.00	-25.77	AVERAGE
7	2.540	0.03	9.62	16.10	25.74	56.00	-30.26	QP
8	2.540	0.03	9.62	9.12	18.77	46.00	-27.23	AVERAGE
9 @	4.746	0.02	9.65	21.83	31.50	46.00	-14.50	AVERAGE
10	4.746	0.02	9.65	28.01	37.68	56.00	-18.32	QP
11	9.011	0.12	9.70	4.51	14.34	50.00	-35.66	AVERAGE
12	9.011	0.12	9.70	13.38	23.20	60.00	-36.80	QP



Report No.: HKES160700151302

Page: 15 of 48

Neutral line:

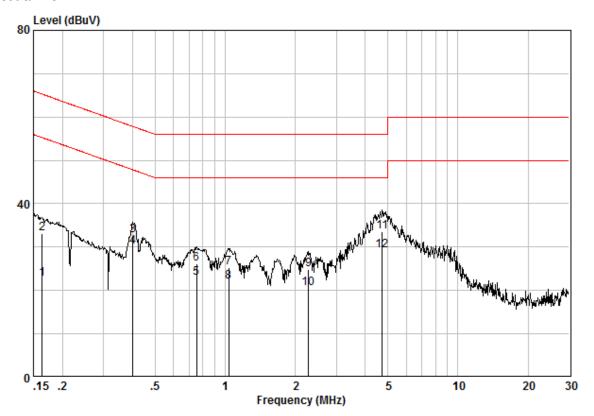

Site : Shielding Room Condition : CE NEUTRAL Job No. : 1513IT Test Mode : Charge+TX

	Freq	Cable Loss	LISN Factor	Read Level		Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.16327	0.02	9.61	12.97	22.60	55.30	-32.69	AVERAGE
2	0.16327	0.02	9.61	23.60	33.23	65.30	-32.07	QP
3	0.40187	0.02	9.62	23.17	32.81	57.81	-25.01	QP
4	0.40187	0.02	9.62	20.47	30.11	47.81	-17.71	AVERAGE
5	0.75493	0.03	9.64	13.13	22.79	46.00	-23.21	AVERAGE
6	0.75493	0.03	9.64	16.51	26.18	56.00	-29.82	QP
7	1.037	0.03	9.65	15.62	25.30	56.00	-30.70	QP
8	1.037	0.03	9.65	12.35	22.03	46.00	-23.97	AVERAGE
9	2.285	0.03	9.67	15.05	24.75	56.00	-31.25	QP
10	2.285	0.03	9.67	10.90	20.59	46.00	-25.41	AVERAGE
11	4.721	0.02	9.71	23.89	33.62	56.00	-22.38	QP
12	4.721	0.02	9.71	19.48	29.21	46.00	-16.79	AVERAGE

Notes:


- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: HKES160700151302

Page: 16 of 48

6.3 Conducted Peak Output Power

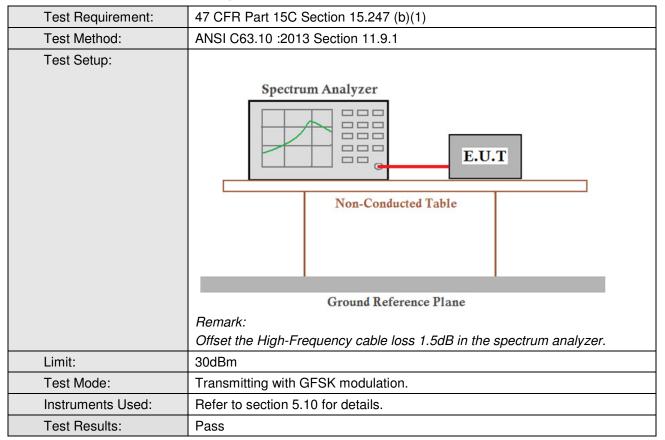

Measurement Data

GFSK mode					
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	-1.81	30.00	Pass		
Middle	-2.56	30.00	Pass		
Highest	-3.16	30.00	Pass		





Report No.: HKES160700151302


Page: 17 of 48

Test plot as follows:

Test mode: GFSK Test channel: Lowest

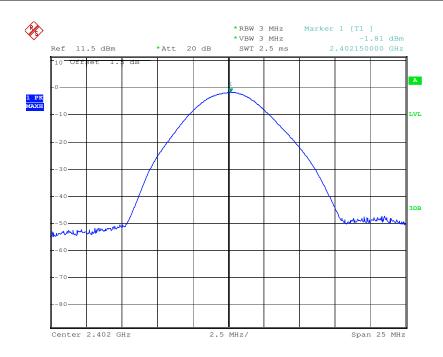



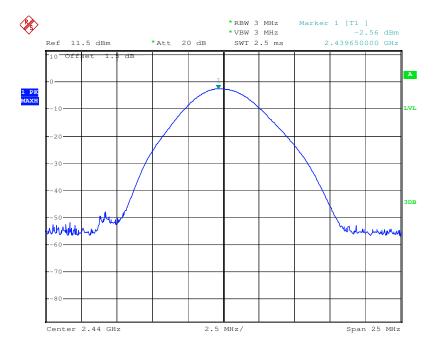




Report No.: HKES160700151302

Page: 18 of 48

Test mode: GFSK Test channel: Highest

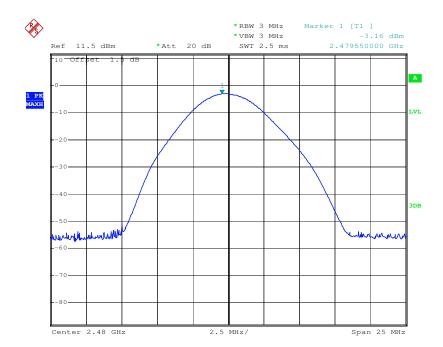




Report No.: HKES160700151302

Page: 19 of 48

6.4 6dB Occupy Bandwidth

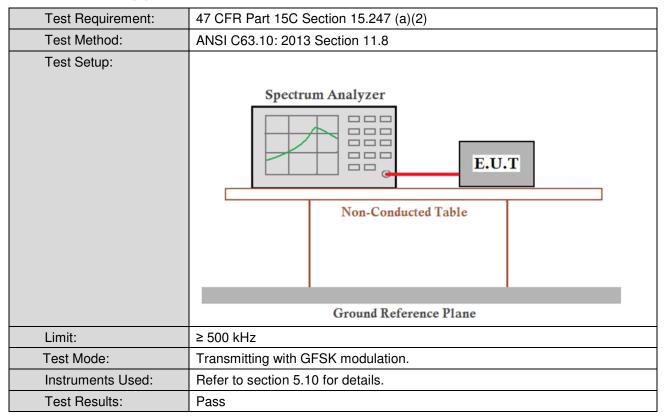

Measurement Data

GFSK mode						
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result			
Lowest	0.702	≥500	Pass			
Middle	0.696	≥500	Pass			
Highest	0.690	≥500	Pass			



Report No.: HKES160700151302


Page: 20 of 48

Test plot as follows:

Test mode: GFSK Test channel: Lowest





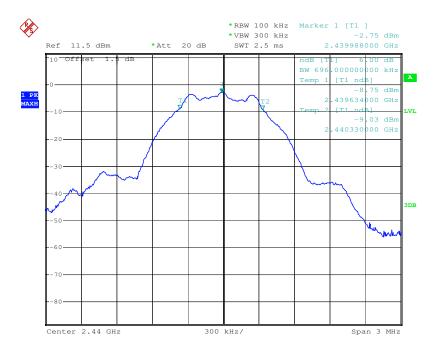




Report No.: HKES160700151302

Page: 21 of 48



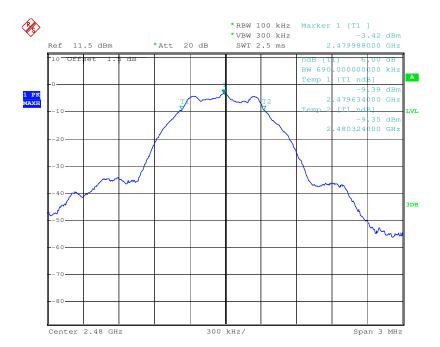




Report No.: HKES160700151302

Page: 22 of 48

6.5 Power Spectral Density

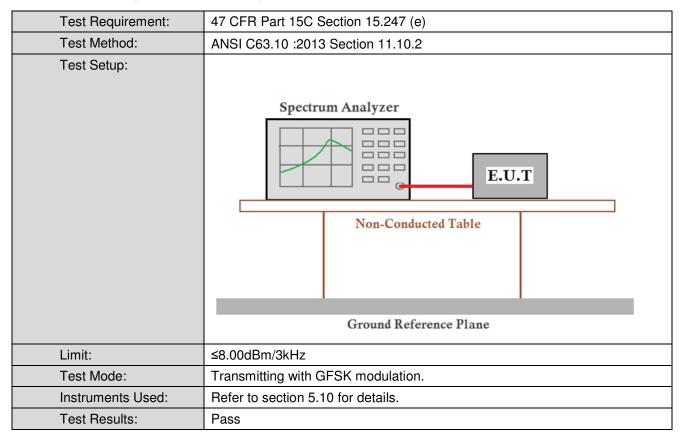

Measurement Data

GFSK mode						
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result			
Lowest	-18.13	≤8.00	Pass			
Middle	-18.74	≤8.00	Pass			
Highest	-19.71	≤8.00	Pass			




Report No.: HKES160700151302


Page: 23 of 48

Test plot as follows:

Test mode: GFSK Test channel: Lowest

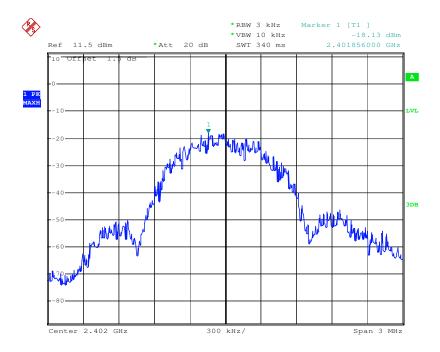



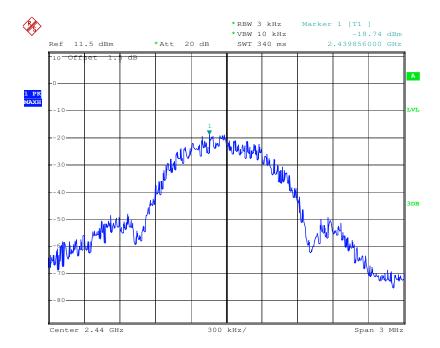




Report No.: HKES160700151302

Page: 24 of 48

Test mode: GFSK Test channel: Highest

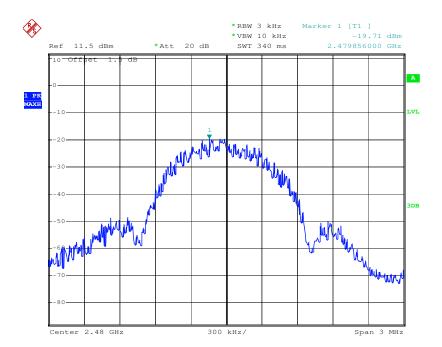




Report No.: HKES160700151302

Page: 25 of 48

6.6 Band-edge for RF Conducted Emissions

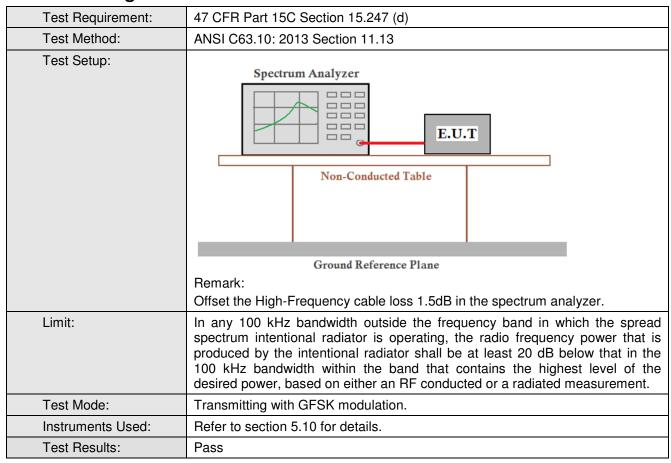




Report No.: HKES160700151302


Page: 26 of 48

Test plot as follows:

Test mode: GFSK Test channel: Lowest

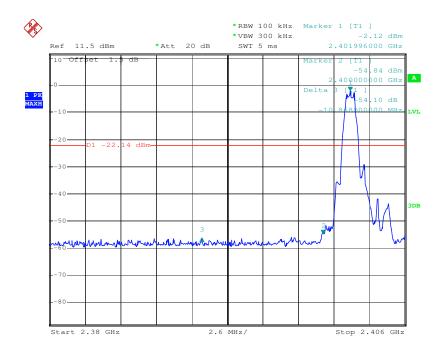



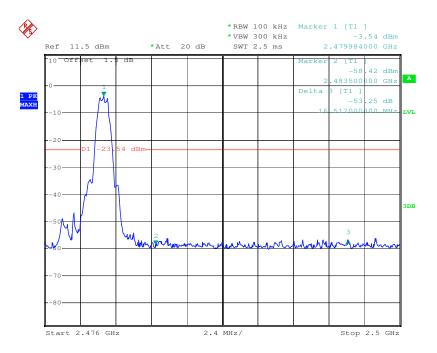



Report No.: HKES160700151302

Page: 27 of 48

6.7 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)			
Test Method:	ANSI C63.10: 2013 Section 11.11			
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table			
	Ground Reference Plane			
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.			
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.			
Test Mode:	Transmitting with GFSK modulation.			
Instruments Used:	Refer to section 5.10 for details.			
Test Results:	Pass			





Report No.: HKES160700151302

Page: 28 of 48

Test plot as follows:

Test mode: GFSK Test channel: Lowest

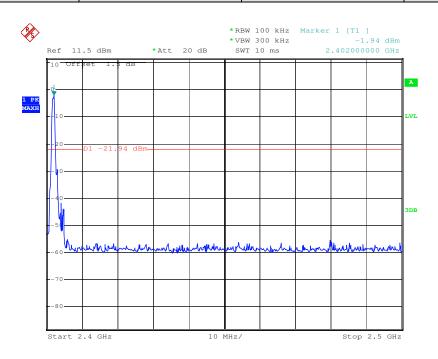


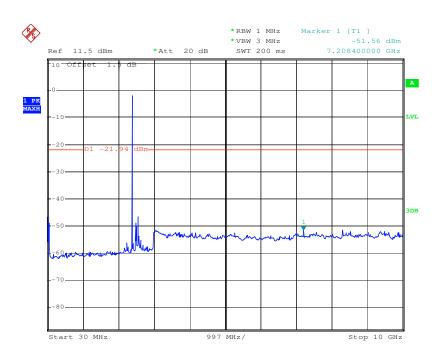




Report No.: HKES160700151302

Page: 29 of 48

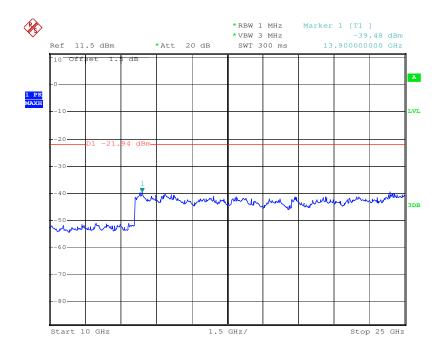




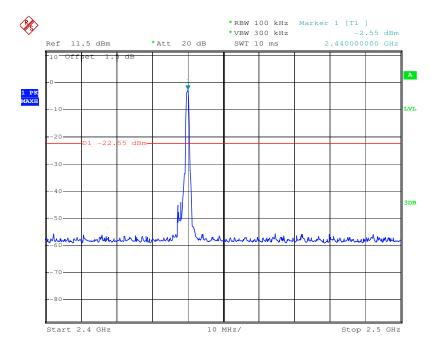




Report No.: HKES160700151302

Page: 30 of 48

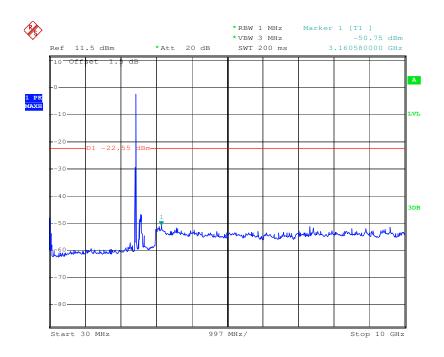

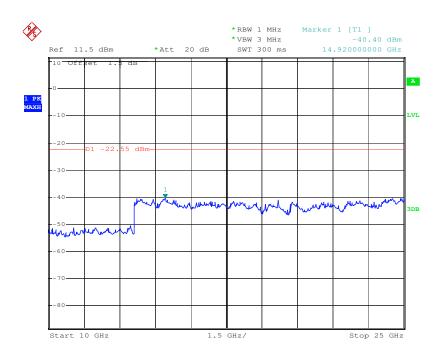





Report No.: HKES160700151302

Page: 31 of 48

Test mode: GFSK Test channel: Highest

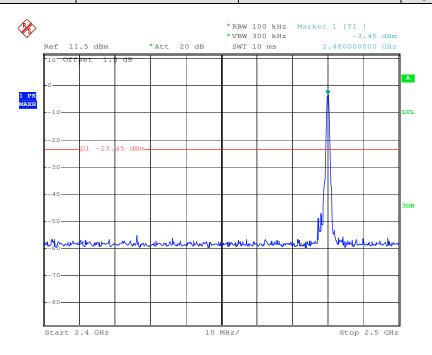


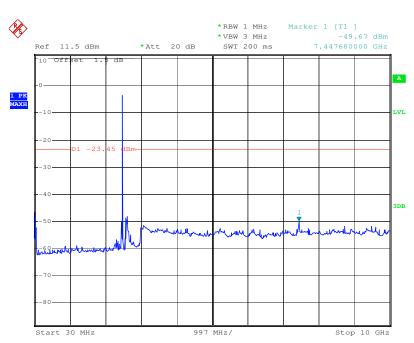



Report No.: HKES160700151302

Page: 32 of 48

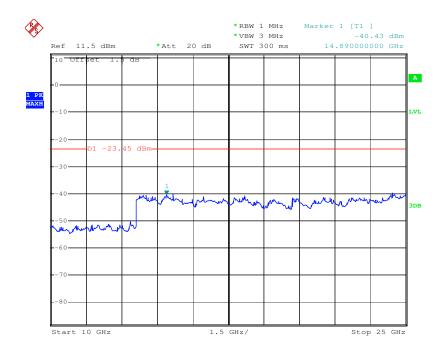

Remark:

Use 100kHz RBW to determine the relative limit in the band 2.4GHz to 2.5GHz, and Use 1MHz RBW to measure spurious emissions in the band 30MHz to 10GHz and 10GHz to 25GHz. The sweep points set to 30001.



Report No.: HKES160700151302

Page: 33 of 48

6.8 Radiated Spurious Emission


Test Requirement:	47 CFR Part 15C Secti	on 1	5.209 and 15	.205		
Test Method:	ANSI C63.10 :2013 Se	ctior	n 11.12			
Test Site:	Below 1GHz:					
	Measurement Distance Above 1GHz:	: 10	m (Semi-Aned	choic Cham	ber)	
	Measurement Distance	: 3n	n (Full-Anecho	oic Chambe	r)	
Receiver Setup:	Frequency		Detector	RBW	VBW	Remark
	0.009MHz-0.090MH	z	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MH	z	Average	10kHz	30kHz	Average
	0.090MHz-0.110MH	z	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MH	Z	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MH	Z	Average	10kHz	30kHz	Average
	0.490MHz -30MHz		Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz		Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz		Peak	1MHz	3MHz	Peak
	Above rariz		Peak	1MHz	10Hz	Average
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	Remark	Measuremen distance (m)
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24	1000/F(kHz)	-	-	30
	1.705MHz-30MHz		30	ı	-	30
	30MHz-88MHz		100	40.0	Quasi-peak	3
	88MHz-216MHz	88MHz-216MHz 150		43.5	Quasi-peak	3
	216MHz-960MHz 200		200	46.0	Quasi-peak	3
	960MHz-1GHz		500	54.0	Quasi-peak	3
	Above 1GHz 500		54.0	Average	3	
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					



Report No.: HKES160700151302

Page: 34 of 48

Test Setup:






Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz




Figure 3. Above 1 GHz

Test Procedure:

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 and 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB

This document is issued by the Company subject to its General Conditions of Service printed overleaf,-available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company is findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's Side responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: HKES160700151302

Page: 35 of 48


	 margin would be re-tested one by one using peak, quasi-peak of average method as specified and then reported in a data sheet. h. Test the EUT in the lowest channel (2402MHz), the middle channel (2440MHz), the Highest channel (2480MHz) i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. j. Repeat above procedures until all frequencies measured was complete. 		
Exploratory Test Mode:	Transmitting with GFSK modulation. Charge + Transmitting mode.		
Final Test Mode:	Transmitting with GFSK modulation. Pretest the EUT at Charge + Transmitting mode For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.		
Instruments Used:	Refer to section 5.10 for details.		
Test Results:	Pass		



Report No.: HKES160700151302

Page: 36 of 48

Radiated Emission below 1GHz					
30MHz~1GHz (QP)					
Test mode: Charge + Transmitting Vertical					

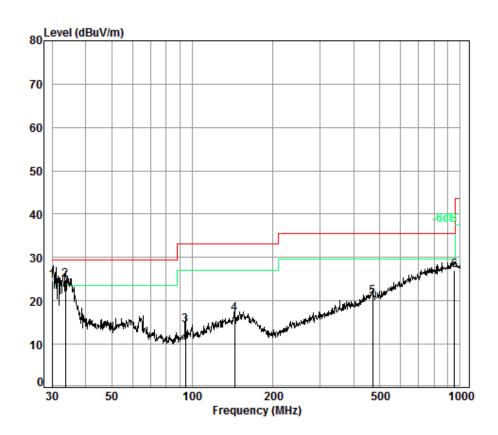

Condition: 10m VERTICAL

Job No. : 1513IT Test Mode: charge+BT


	louc. cha	80.01						
		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.00	6.70	12.47	32.97	38.37	24.57	29.50	-4.93
2 pp	33.68	6.70	12.60	32.98	38.46	24.78	29.50	-4.72
3	94.43	7.20	9.01	32.82	31.07	14.46	33.10	-18.64
4	143.83	7.42	13.01	32.75	29.23	16.91	33.10	-16.19
5	470.52	8.48	16.40	32.60	28.64	20.92	35.60	-14.68
6	952.09	9.58	22.74	32.50	27.24	27.06	35.60	-8.54



Report No.: HKES160700151302

Page: 37 of 48

Test mode:	Charge + Transmitting	Horizontal
------------	-----------------------	------------

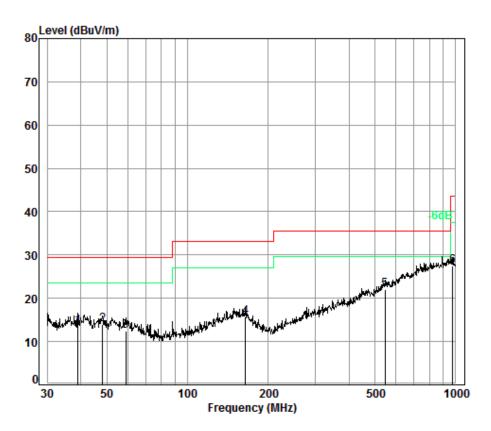

Condition: 10m HORIZONTAL

Job No. : 1513IT Test Mode: charge+BT

	Freq			Preamp Factor				
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	39.02	6.78	13.19	32.98	26.54	13.53	29.50	-15.97
2	48.33	6.87	12.82	33.00	27.20	13.89	29.50	-15.61
3	58.82	7.00	12.09	32.95	26.24	12.38	29.50	-17.12
4	164.91	7.50	12.91	32.73	28.09	15.77	33.10	-17.33
5 pp	545.18	8.76	17.64	32.60	28.31	22.11	35.60	-13.49
6	975.75	9.60	22.81	32.50	27.62	27.53	43.50	-15.97



Report No.: HKES160700151302

Page: 38 of 48

Below 1GHz

The test was performed at a 10m test site. According to below formulate and the test data at 10m test distance,

 $L_3 / L_{10} = D_{10} / D_3$

Note:

 L_3 : Level @ 3m distance. Unit: uV/m; L_{10} : Level @ 10m distance. Unit: uV/m;

D₃: 3m distance. Unit: m D₁₀: 10m distance. Unit: m

The level at 3m test distance is below:

Frequency (MHz)	Level @ 10m (dBuV/m)	Level @ 10m (uV/m)	Level @ 3m (uV/m)	Level @ 3m (dBuV/m)	Limit @ 3m (dBuV/m)	Margin (dB)	Ant. Polarization
30.00	24.57	16.92	56.41	35.03	40.00	-4.97	V
33.68	24.78	17.34	57.79	35.24	40.00	-4.76	V
94.43	14.46	5.28	17.61	24.92	43.50	-18.58	V
143.83	16.91	7.01	23.35	27.37	43.50	-16.13	V
470.52	20.92	11.12	37.06	31.38	46.00	-14.62	V
952.09	27.06	22.54	75.14	37.52	46.00	-8.48	V
39.02	13.53	4.75	15.83	23.99	40.00	-16.01	Н
48.33	13.89	4.95	16.50	24.35	40.00	-15.65	Н
58.82	12.38	4.16	13.86	22.84	40.00	-17.16	Н
164.91	15.77	6.14	20.48	26.23	43.50	-17.27	Н
545.18	22.11	12.75	42.50	32.57	46.00	-13.43	Н
975.75	27.53	23.80	79.32	37.99	54.00	-16.01	Н



Report No.: HKES160700151302

Page: 39 of 48

Transmitter Emission above 1GHz								
Test mode:		GFSK	Tes	t channel:	Lowest	Rema	ark:	Peak
Frequency (MHz)	Antenn factors (dB/m)	Loss	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3847.726	33.19	7.76	38.63	48.40	50.72	74.00	-23.28	Vertical
4804.000	34.16	8.87	39.03	47.39	51.39	74.00	-22.61	Vertical
5853.787	34.61	10.15	39.01	46.26	52.01	74.00	-21.99	Vertical
7206.000	36.42	10.68	38.18	43.84	52.76	74.00	-21.24	Vertical
9608.000	37.52	12.50	36.99	40.48	53.51	74.00	-20.49	Vertical
11791.720	38.39	14.34	38.10	38.72	53.35	74.00	-20.65	Vertical
3836.607	33.16	7.75	38.63	47.12	49.40	74.00	-24.60	Horizontal
4804.000	34.16	8.87	39.03	46.84	50.84	74.00	-23.16	Horizontal
6069.413	34.76	10.47	38.96	45.62	51.89	74.00	-22.11	Horizontal
7206.000	36.42	10.68	38.18	43.47	52.39	74.00	-21.61	Horizontal
9608.000	37.52	12.50	36.99	39.64	52.67	74.00	-21.33	Horizontal
12279.260	38.77	14.33	38.59	38.52	53.03	74.00	-20.97	Horizontal

Test mode:		GFSK	Tes	t channel:	Middle	Rem	ark:	Peak
Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3972.178	33.53	7.80	38.69	46.73	49.37	74.00	-24.63	Vertical
4880.000	34.29	8.97	39.06	45.97	50.17	74.00	-23.83	Vertical
6078.201	34.76	10.46	38.95	45.37	51.64	74.00	-22.36	Vertical
7320.000	36.37	10.72	38.07	43.16	52.18	74.00	-21.82	Vertical
9760.000	37.55	12.58	36.92	39.75	52.96	74.00	-21.04	Vertical
12067.890	38.64	14.50	38.37	38.67	53.44	74.00	-20.56	Vertical
3949.255	33.47	7.79	38.68	48.06	50.64	74.00	-23.36	Horizontal
4880.000	34.29	8.97	39.06	46.94	51.14	74.00	-22.86	Horizontal
6016.949	34.71	10.54	38.99	46.63	52.89	74.00	-21.11	Horizontal
7320.000	36.37	10.72	38.07	44.18	53.20	74.00	-20.80	Horizontal
9760.000	37.55	12.58	36.92	40.18	53.39	74.00	-20.61	Horizontal
12279.260	38.77	14.33	38.59	38.66	53.17	74.00	-20.83	Horizontal



Report No.: HKES160700151302

Page: 40 of 48

Test mode:	(GFSK	Te	st channel:	Highest	Ren	nark:	Peak
Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3754.236	32.94	7.72	38.59	47.10	49.17	74.00	-24.83	Vertical
4960.000	34.43	9.09	39.09	46.24	50.67	74.00	-23.33	Vertical
6184.658	34.85	10.32	38.88	45.66	51.95	74.00	-22.05	Vertical
7440.000	36.32	10.77	37.94	43.85	53.00	74.00	-21.00	Vertical
9920.000	37.58	12.67	36.84	39.38	52.79	74.00	-21.21	Vertical
12137.940	38.68	14.45	38.44	39.22	53.91	74.00	-20.09	Vertical
3819.990	33.12	7.75	38.62	46.82	49.07	74.00	-24.93	Horizontal
4960.000	34.43	9.09	39.09	46.32	50.75	74.00	-23.25	Horizontal
6302.093	34.95	10.17	38.81	45.14	51.45	74.00	-22.55	Horizontal
7440.000	36.32	10.77	37.94	43.39	52.54	74.00	-21.46	Horizontal
9920.000	37.58	12.67	36.84	39.91	53.32	74.00	-20.68	Horizontal
12050.440	38.63	14.52	38.35	39.14	53.94	74.00	-20.06	Horizontal

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 - Final Test Level = Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.




Report No.: HKES160700151302

Page: 41 of 48

6.9 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205					
Test Method:	ANSI C63.10: 2013 Section	11.12				
Test Site:	Below 1GHz: Measurement Distance: 3m (Semi-Anechoic Chamber) Above 1GHz: Measurement Distance: 3m (Full-Anechoic Chamber)					
Limit:	Frequency 30MHz-88MHz 88MHz-216MHz 216MHz-960MHz 960MHz-1GHz Above 1GHz	Limit (dBuV/m @3m) 40.0 43.5 46.0 54.0 54.0 74.0	Remark Quasi-peak Value Quasi-peak Value Quasi-peak Value Quasi-peak Value Average Value Peak Value			
Test Setup:						






Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz

Test Procedure:

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel

This document is issued by the Company subject to its General Conditions of Service printed overleaf,—available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.



Report No.: HKES160700151302

Page: 42 of 48

	 h. Test the EUT in the lowest channel, the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. j. Repeat above procedures until all frequencies measured was complete.
Exploratory Test	Transmitting with GFSK modulation.
Mode:	Charge + Transmitting mode.
Final Test Mode:	Transmitting with GFSK modulation.
	Pretest the EUT at Transmitting mode and Charge + Transmitting mode
	Only the worst case is recorded in the report.
Instruments	Refer to section 5.10 for details.
Used:	
Test Results:	Pass




Report No.: HKES160700151302

Page: 43 of 48

Test plot as follows:

Test channel:	Lowest	Remark:	Peak	Vertical

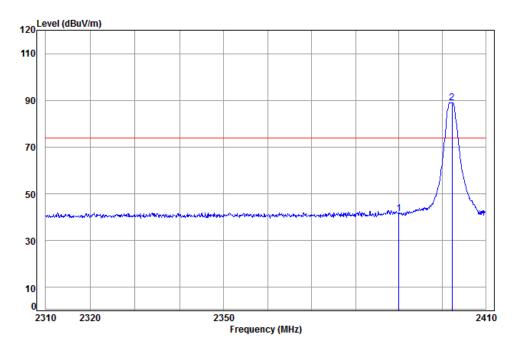

Condition: 3m VERTICAL Job No: : 1513IT

Mode: : 2402 Band edge

: BLE


Cable Ant Preamp Read Limit 0ver Freq Loss Factor Factor Level Level Line Limit MHz dB dB/m dBuV dBuV/m dBuV/m 2390.000 5.34 29.08 38.14 45.30 41.58 74.00 -32.42 5.35 29.11 38.15 92.76 89.07 74.00 15.07 2 pp 2402.250



Report No.: HKES160700151302

Page: 44 of 48

Test channel:	Lowest	Remark:	Peak	Horizontal
---------------	--------	---------	------	------------

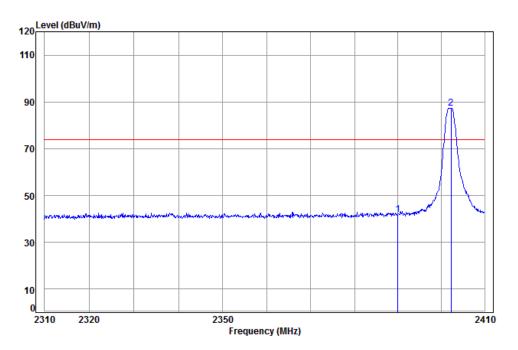

Condition: 3m Horizontal

Job No: : 1513IT

Mode: : 2402 Band edge

: BLE


			Cable	Ant	Preamp	Read		Limit	0ver
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
			40	ub/	40	ubu.	abav,	abar, iii	u.o
1		2390.000	E 3/	20 08	20 1/	AE 60	<i>1</i> 1 06	74 00	32 04
1		2330.000	3.34	25.00	30.14	43.00	41.50	74.00	-32.04
2	pp	2402.250	5.35	29.11	38.15	91.11	87.42	74.00	13.42



Report No.: HKES160700151302

Page: 45 of 48

Test channel:	Highest	Remark:	Peak	Vertical
---------------	---------	---------	------	----------

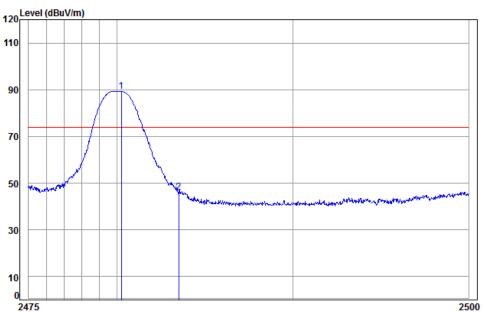

Frequency (MHz)

Condition: 3m VERTICAL
Job No: : 1513IT

Mode: : 2480 Band edge

: BLE

Cable Ant Preamp Read Limit Over
Freq Loss Factor Factor Level Level Line Limit

MHz dB dB/m dB dBuV dBuV/m dBuV/m dBuV/m dB


1 pp 2480.254 5.41 29.34 38.15 92.64 89.24 74.00 15.24
2 2483.500 5.41 29.35 38.15 49.39 46.00 74.00 -28.00



Report No.: HKES160700151302

Page: 46 of 48

Test channel:	Highest	Remark:	Peak	Horizontal
---------------	---------	---------	------	------------

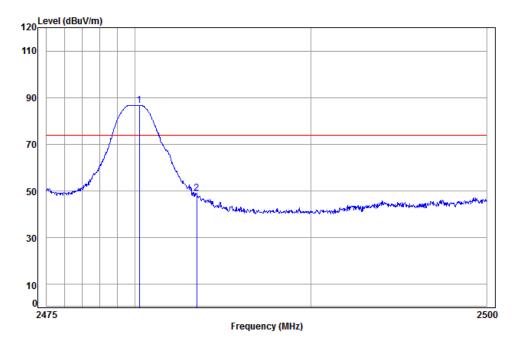

Condition: 3m HORIZONTAL

Job No: : 1513IT

Mode: : 2480 Band edge

: BLE

			Cable	Ant	Preamp	Read		Limit	0ver
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp	2480.254	5.41	29.34	38.15	90.18	86.78	74.00	12.78
2		2483.500	5.41	29.35	38.15	52.39	49.00	74.00	-25.00

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor




Report No.: HKES160700151302

Page: 47 of 48

7 Photographs - EUT Test Setup

Test model No.: MSW 115

7.1 Conducted Emission

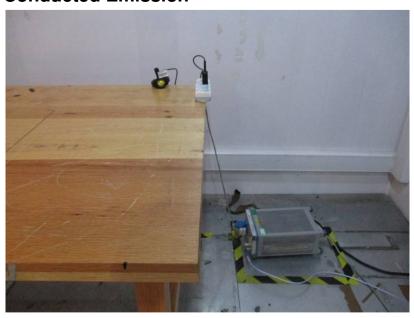

7.2 Radiated Emission






Report No.: HKES160700151302

Page: 48 of 48

7.3 Radiated Spurious Emission

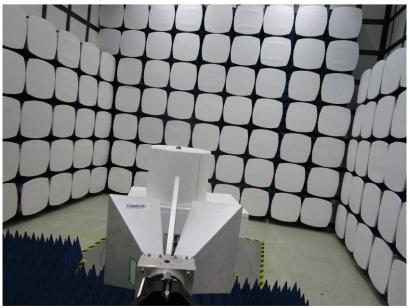

8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for HKES1607001513IT.