
FCC Test Report

Report No.: AGC00688200305FE02

FCC ID : 2AJUUSBP

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION : Smart B-plug

BRAND NAME : MEAZON

MODEL NAME : Smart B-plug

APPLICANT : MEAZON ELECTRONIC SYSTEMS S.A.

DATE OF ISSUE : Jun. 22, 2020

STANDARD(S) : 47 CFR FCC Part 15 Subpart C 15.247

REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jun. 22, 2020	Valid	Initial Release



TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	5
2.GENERAL INFORMATION	6
2.1PRODUCT DESCRIPTION.....	6
2.2TABLE OF CARRIER FREQUENCYS	6
2.3 RELATED SUBMITTAL(S)/GRANT(S)	7
2.4TEST METHODOLOGY	7
2.5 SPECIAL ACCESSORIES	7
2.6 EQUIPMENT MODIFICATIONS	7
3. MEASUREMENT UNCERTAINTY	8
4. DESCRIPTION OF TEST MODES.....	9
5. SYSTEM TEST CONFIGURATION	10
5.1 CONFIGURATION OF TESTED SYSTEM.....	10
5.2 EQUIPMENT USED IN TESTED SYSTEM	10
5.3. SUMMARY OF TEST RESULTS.....	10
6. TEST FACILITY	11
7. PEAK OUTPUT POWER	13
7.1. MEASUREMENT PROCEDURE	13
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	13
7.3. LIMITS AND MEASUREMENT RESULT	14
8. 6 DB BANDWIDTH.....	17
8.1. MEASUREMENT PROCEDURE	17
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	17
8.3. LIMITS AND MEASUREMENT RESULTS	17
9. CONDUCTED SPURIOUS EMISSION	20
9.1. MEASUREMENT PROCEDURE	20
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	20
9.3. MEASUREMENT EQUIPMENT USED	20
9.4. LIMITS AND MEASUREMENT RESULT	20
10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	27



10.1 MEASUREMENT PROCEDURE	27
10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	27
10.3 MEASUREMENT EQUIPMENT USED	27
10.4 LIMITS AND MEASUREMENT RESULT	27
11. RADIATED EMISSION	30
11.1. MEASUREMENT PROCEDURE	30
11.2. TEST SETUP	31
11.3. LIMITS AND MEASUREMENT RESULT	32
11.4. TEST RESULT	32
12. LINE CONDUCTED EMISSION TEST	45
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	45
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	45
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	46
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	46
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	47
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	49
APPENDIX B: PHOTOGRAPHS OF EUT	51




1. VERIFICATION OF COMPLIANCE

Applicant	MEAZON ELECTRONIC SYSTEMS S.A.
Address	N.E.O.PATRON- ATHINON 57, 26442, PATRA, Greece
manufacturer	MEAZON ELECTRONIC SYSTEMS S.A.
Address	N.E.O.PATRON- ATHINON 57, 26442, PATRA, Greece
Factory	MEAZON ELECTRONIC SYSTEMS S.A.
Address	N.E.O.PATRON- ATHINON 57, 26442, PATRA, Greece
Product Designation	Smart B-plug
Brand Name	MEAZON
Test Model	Smart B-plug
Date of test	Mar. 25, 2019 to Jun. 10, 2020 and Jun. 19, 2020
Deviation	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-BLE/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC part 15.247.

Prepared By



Erik Yang
(Project Engineer)

Jun. 19, 2020

Reviewed By



Max Zhang
(Reviewer)

Jun. 22, 2020

Approved By



Forrest Lei
(Authorized Officer)

Jun. 22, 2020



2.GENERAL INFORMATION

2.1PRODUCT DESCRIPTION

The EUT is designed as a “Smart B-plug”. It is designed by way of utilizing the DSSS technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.405 GHz to 2.480GHz
RF Output Power	17.422dBm(Max)
Modulation	DSSS
Number of channels	16 Channel
Antenna Designation	Chip Antenna
Antenna Gain	2.0dBi
Hardware Version	V1
Software Version	0x0001A432
Power Supply	AC 120V

2.2. TABLE OF CARRIER FREQUENCIES

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	11	2405MHZ
	12	2410MHZ
	:	:
	25	2475MHZ
	26	2480MHZ



2.3 RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID: 2AJUUSBP** filing to comply with the FCC part 15.247 requirements.

2.4 TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

2.5 SPECIAL ACCESSORIES

Refer to section 2.2.

2.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.



3. MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the “Guide to the Expression of Uncertainty in measurement” (GUM) published by CISPR and ANSI.

- Uncertainty of Conducted Emission, $U_c = \pm 3.2$ dB
- Uncertainty of Radiated Emission below 1GHz, $U_c = \pm 3.9$ dB
- Uncertainty of Radiated Emission above 1GHz, $U_c = \pm 4.8$ dB



4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	2405MHz TX
2	2440MHz TX
3	2475MHz TX
4	2480MHz TX

Note:

1. Only the result of the worst case was recorded in the report, if no other cases.
2. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
4. The EUT enters test modes by pressing keys of EUT.



5. SYSTEM TEST CONFIGURATION

5.1 CONFIGURATION OF TESTED SYSTEM

Configure :



5.2 EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Smart B-plug	Smart B-plug	2AJUUSBP	EUT

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
FCC Part 15.247	Peak Output Power	Compliant
FCC Part 15.247	6 dB Bandwidth	Compliant
FCC Part 15.247	Conducted Spurious Emission and Band Edges	Compliant
FCC Part 15.247	Maximum Conducted Output Power Density	Compliant
FCC Part 15.209	Radiated Emission	Compliant
FCC Part 15.207	Conducted Emission	Compliant



6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

TEST EQUIPMENT OF CONDUCTED EMISSION TEST(Mar. 25, 2019 to Jun. 10, 2020)

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun. 12, 2019	Jun. 11, 2020
LISN	R&S	ESH2-Z5	100086	Aug. 26, 2019	Aug. 25, 2020
Test software	R&S	ES-K1(Ver.V1.71)	N/A	N/A	N/A

TEST EQUIPMENT OF RADIATED EMISSION TEST(Mar. 25, 2019 to Jun. 10, 2020)

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun. 12, 2019	Jun. 11, 2020
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 12, 2019	Dec. 11, 2020
2.4GHz Fliter	EM Electronics	2400-2500MHz	N/A	Mar. 23, 2020	Mar. 22, 2021
Attenuator	ZHINAN	E-002	N/A	Sep. 09, 2019	Sep. 08, 2020
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep. 09, 2019	Sep. 08, 2021
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Jun. 14, 2018	Jun. 13, 2020
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May 17, 2019	May 16, 2021
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Oct. 15, 2019	Oct. 16, 2020
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 09, 2019	Jan. 08, 2021
Test software	FARA	EZ-EMC (Ver RA-03A)	N/A	N/A	N/A



TEST EQUIPMENT OF RADIATED EMISSION TEST(Jun. 19, 2020)

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	May 15, 2020	May 14, 2022
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 12, 2019	Dec. 11, 2020
2.4GHz Fliter	EM Electronics	2400-2500MHz	N/A	Mar. 23, 2020	Mar, 22, 2021
Attenuator	ZHINAN	E-002	N/A	Sep. 09, 2019	Sep. 08, 2020
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep. 09, 2019	Sep. 08, 2021
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	May 22, 2020	May 21, 2022
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May 17, 2019	May 16, 2021
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Oct. 15, 2019	Oct. 16, 2020
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 09, 2019	Jan. 08, 2021



7. PEAK OUTPUT POWER

7.1. MEASUREMENT PROCEDURE


For peak power test:

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. $RBW \geq DTS \text{ bandwidth}$
3. $VBW \geq 3 * RBW$.
4. $SPAN \geq VBW$.
5. Sweep: Auto.
6. Detector function: Peak.
7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


PEAK POWER TEST SETUP

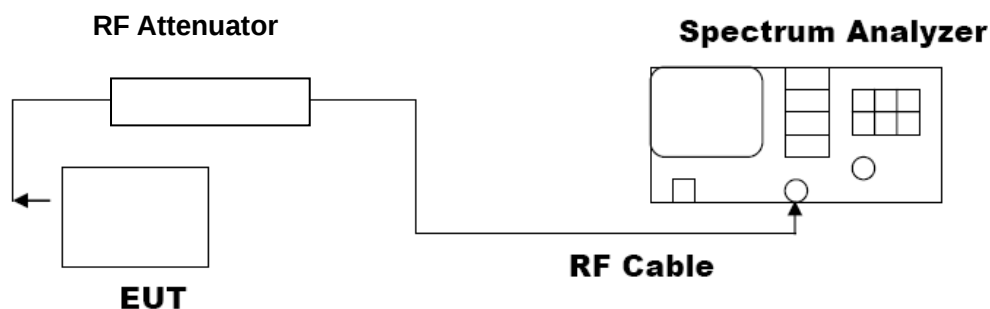


7.3. LIMITS AND MEASUREMENT RESULT

PEAK OUTPUT POWER MEASUREMENT RESULT FOR DSSS MODULATION			
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.405	17.136	30	Pass
2.440	17.422	30	Pass
2.475	16.754	30	Pass
2.480	-1.136	30	Pass


CH11

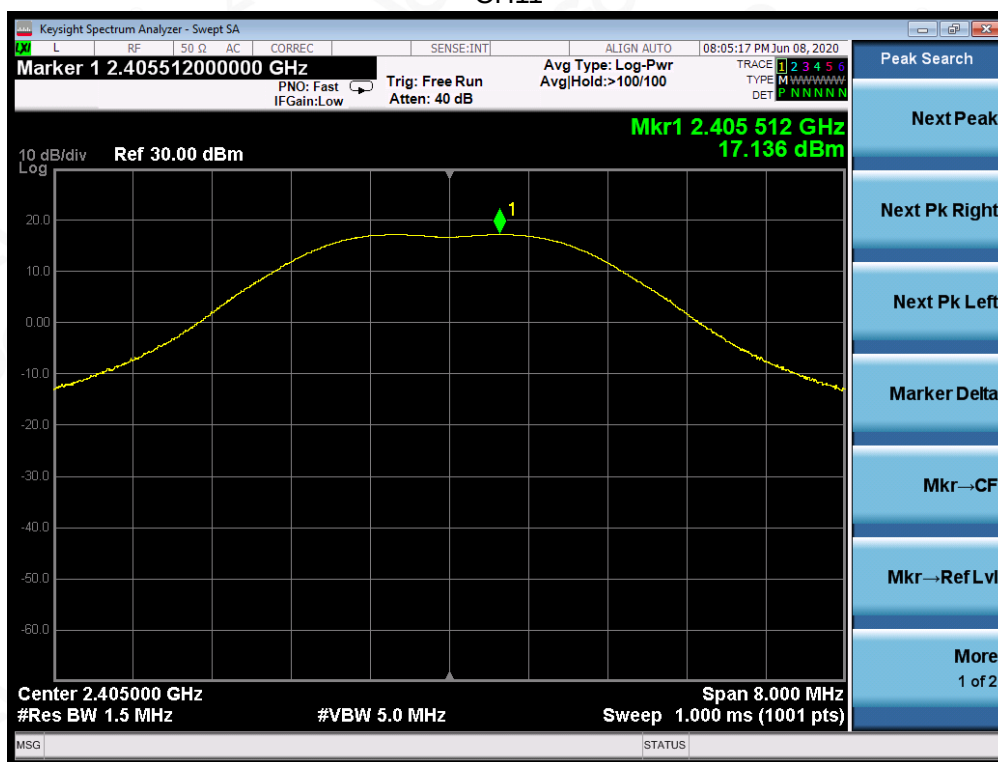


CH18

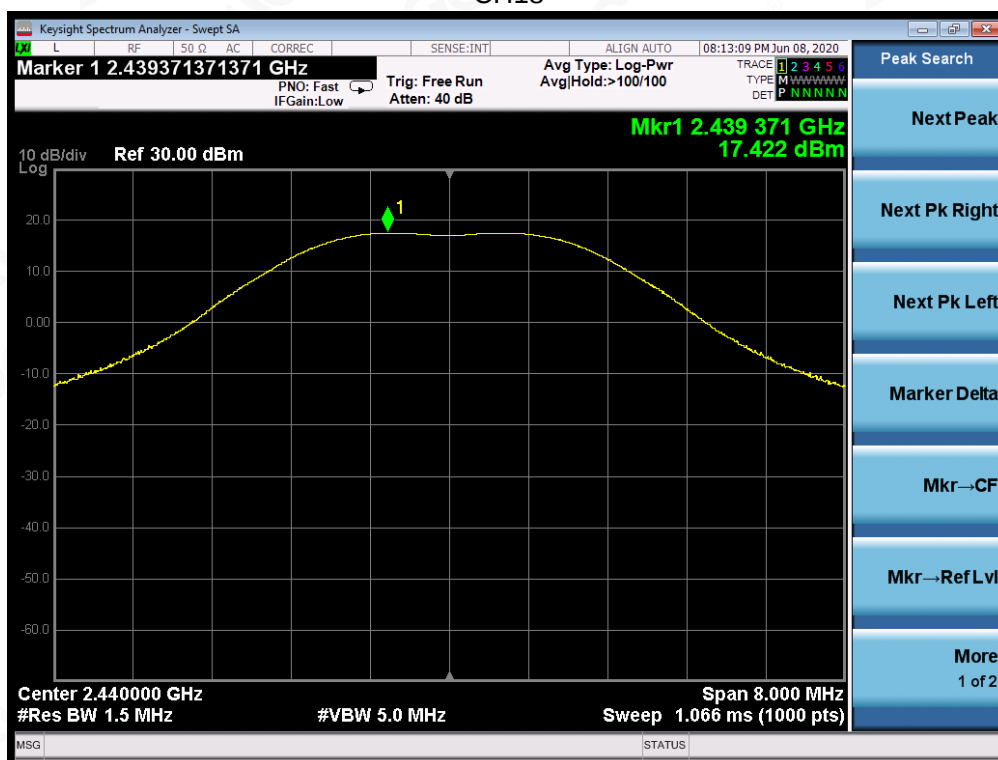

CH25

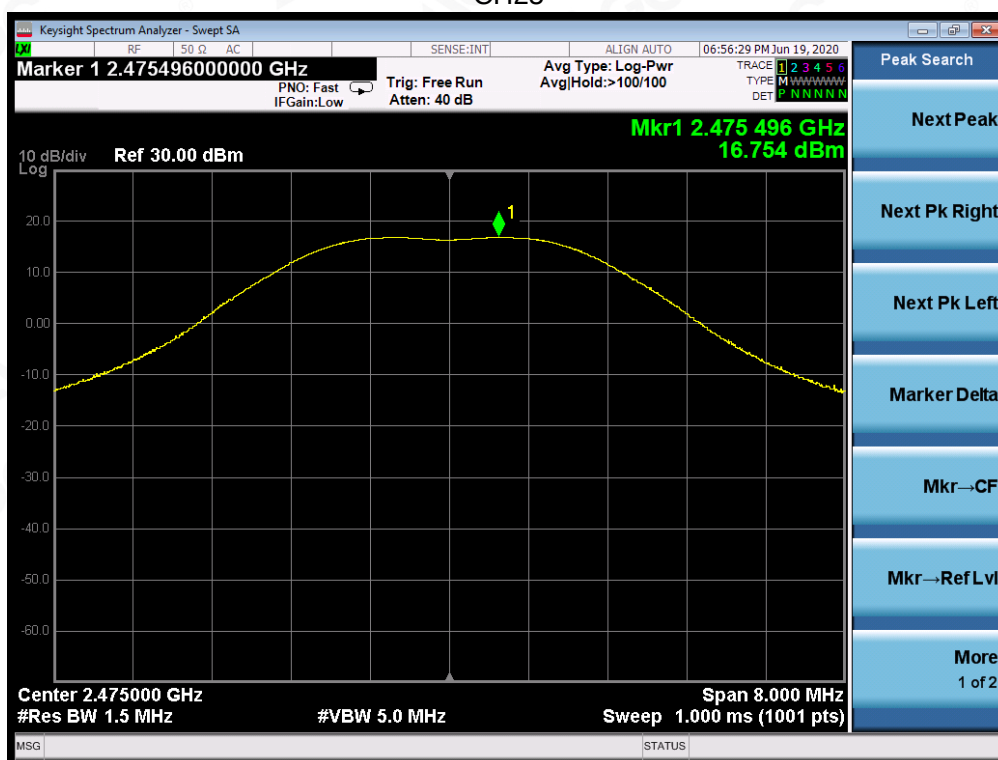

CH26

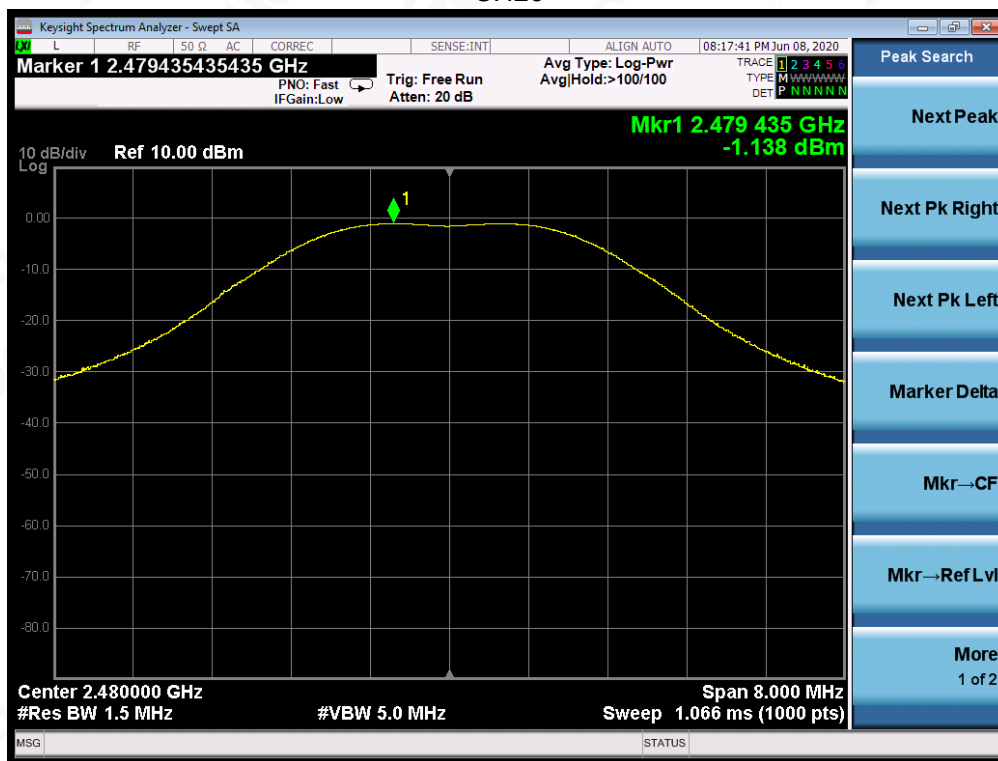

8. 6 DB BANDWIDTH

8.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW $\geq 3 \times$ RBW.
4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to RSS-247 requirements.


8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 7.2.


8.3. LIMITS AND MEASUREMENT RESULTS

LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Applicable Limits		
	Frequency(GHz)	Test Data (MHz)	Criteria
>500KHZ	2.405	1.633	PASS
	2.440	1.831	PASS
	2.475	1.810	PASS
	2.480	1.623	PASS


TEST PLOT OF BANDWIDTH FOR CH11

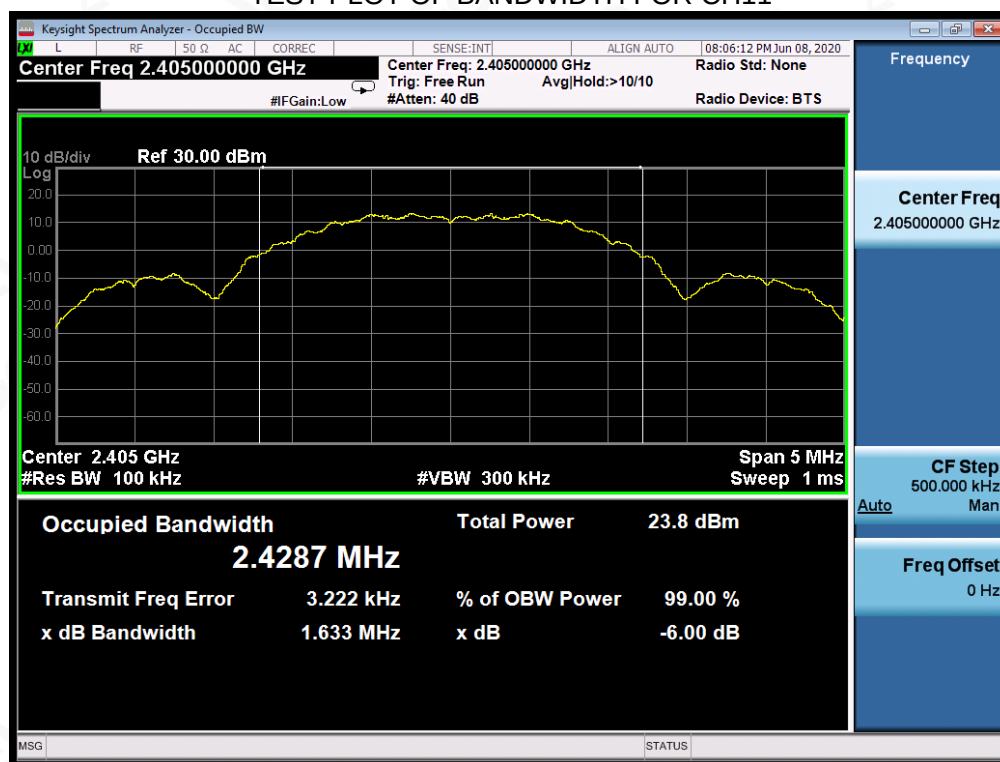


TEST PLOT OF BANDWIDTH FORCH18

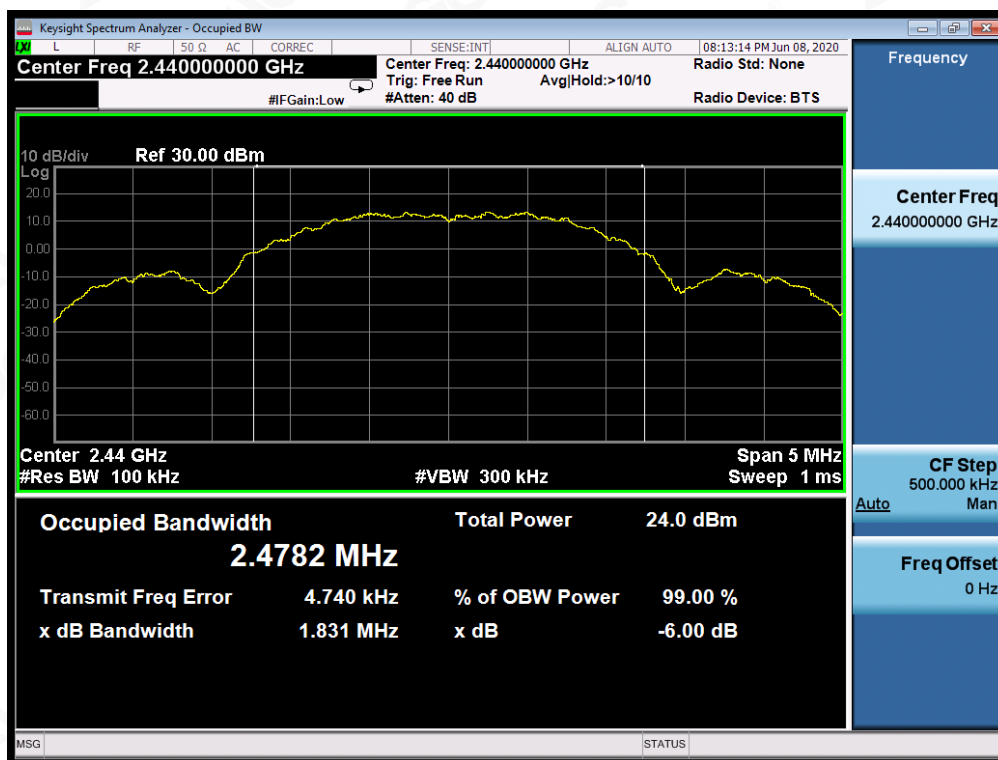

TEST PLOT OF BANDWIDTH FOR CH25

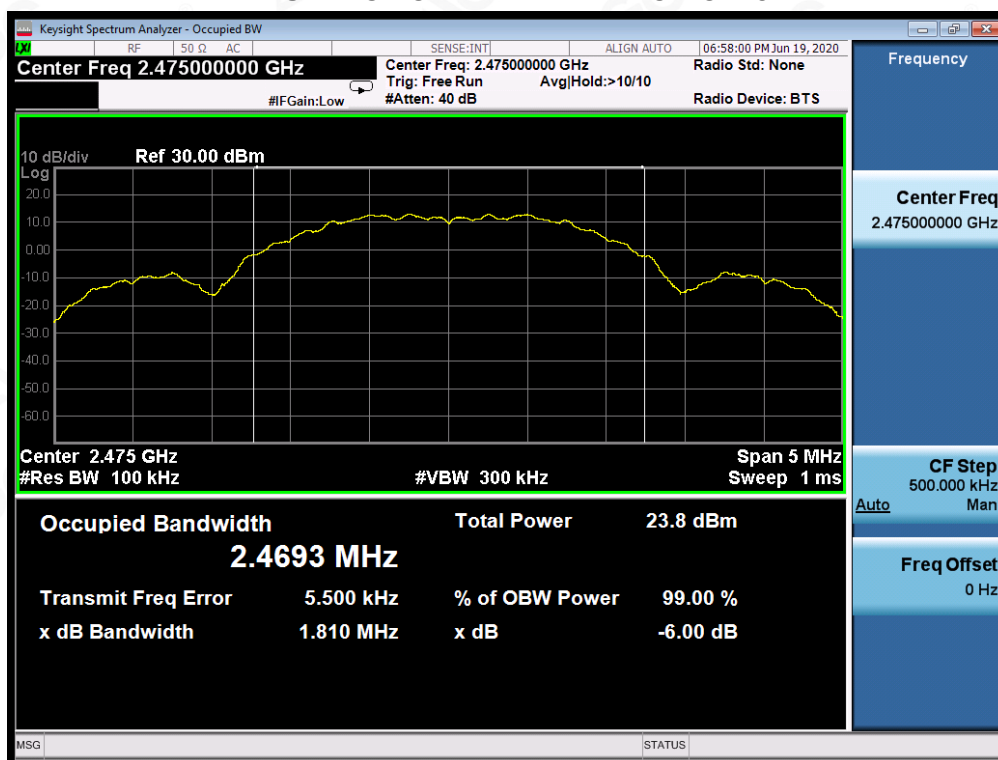

TEST PLOT OF BANDWIDTH FOR CH26

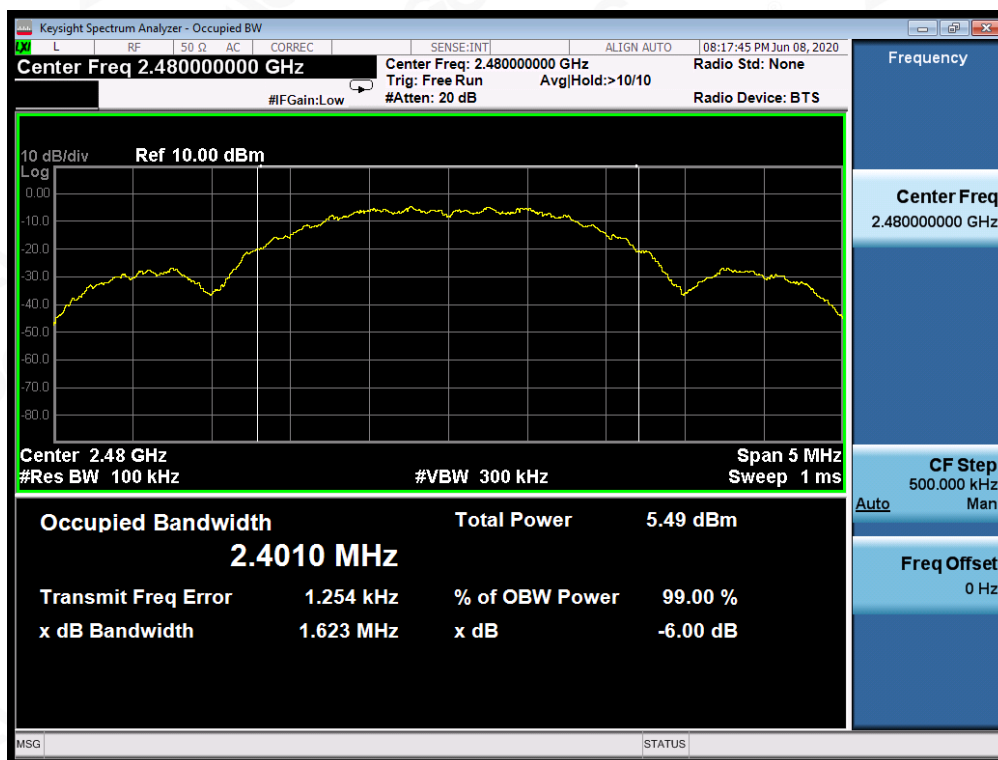

9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to RSS-247 requirements.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 7.2.

9.3. MEASUREMENT EQUIPMENT USED


The same as described in section 6.

9.4. LIMITS AND MEASUREMENT RESULT


LIMITS AND MEASUREMENT RESULT		
Applicable Limits	Measurement Result	
	Test Data	Criteria
In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.	At least -20dBc than the reference level	PASS




TEST RESULT FOR ENTIRE FREQUENCY RANGE DSSS MODULATION IN CH11

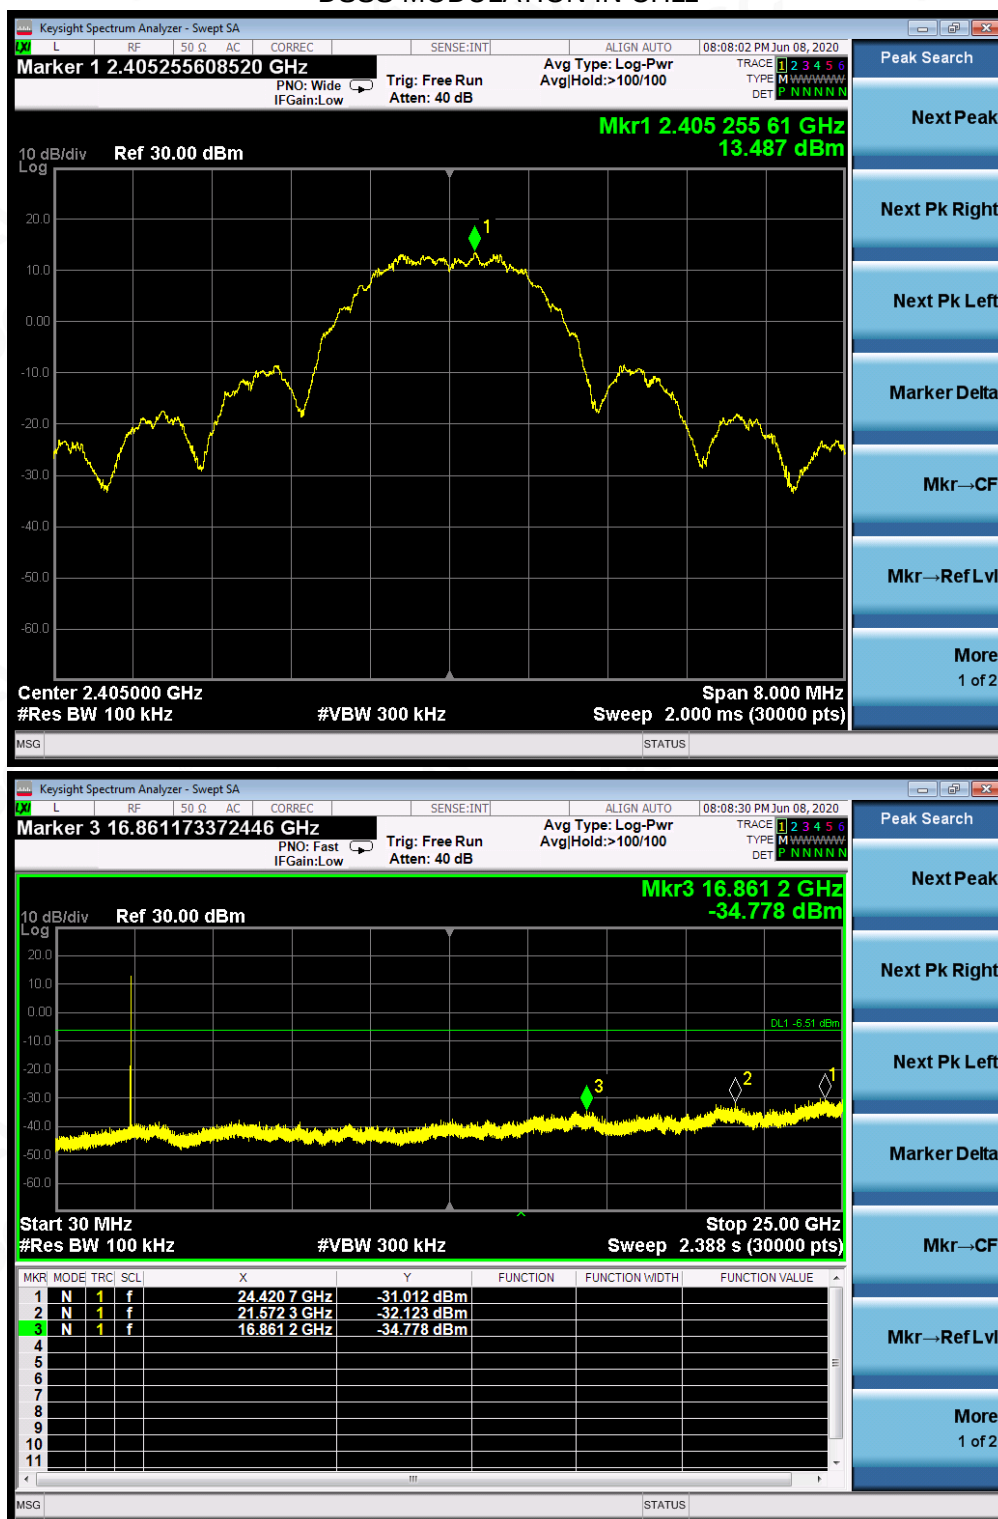


DSSS MODULATION IN CH18

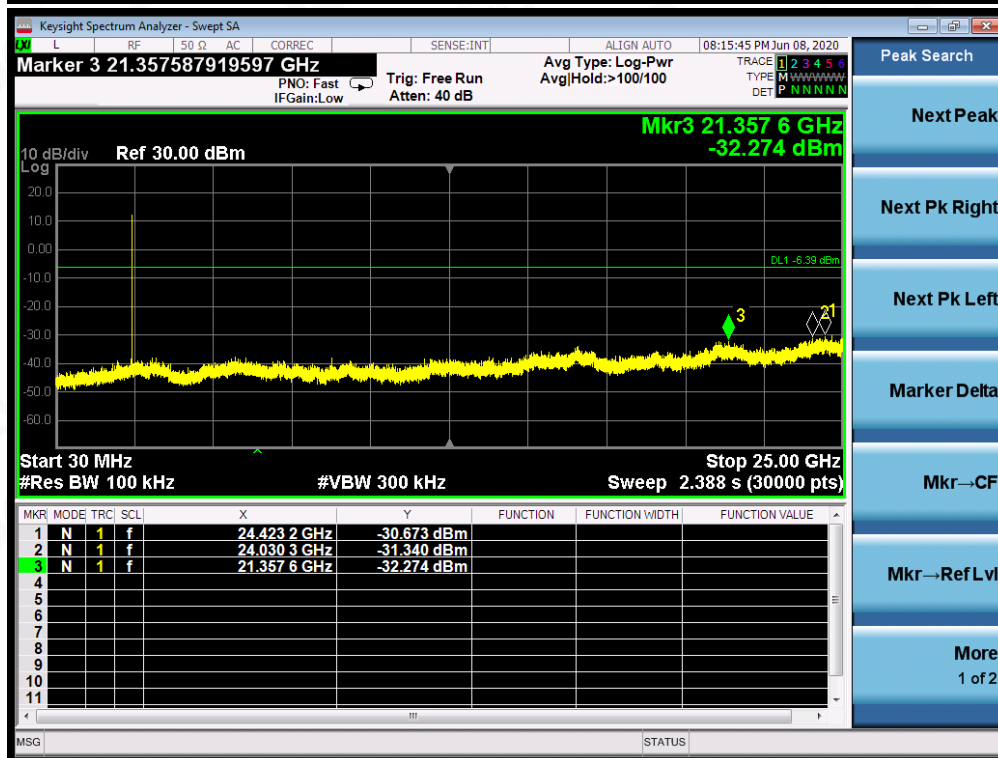

DSSS MODULATION IN CH25

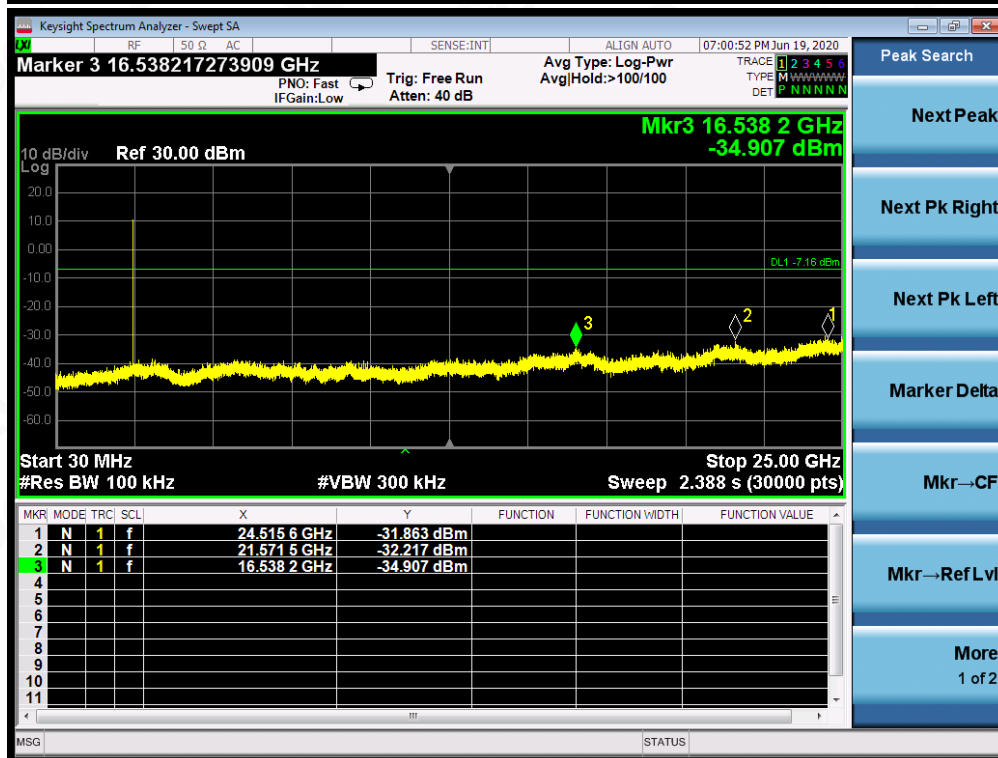

DSSS MODULATION IN CH26

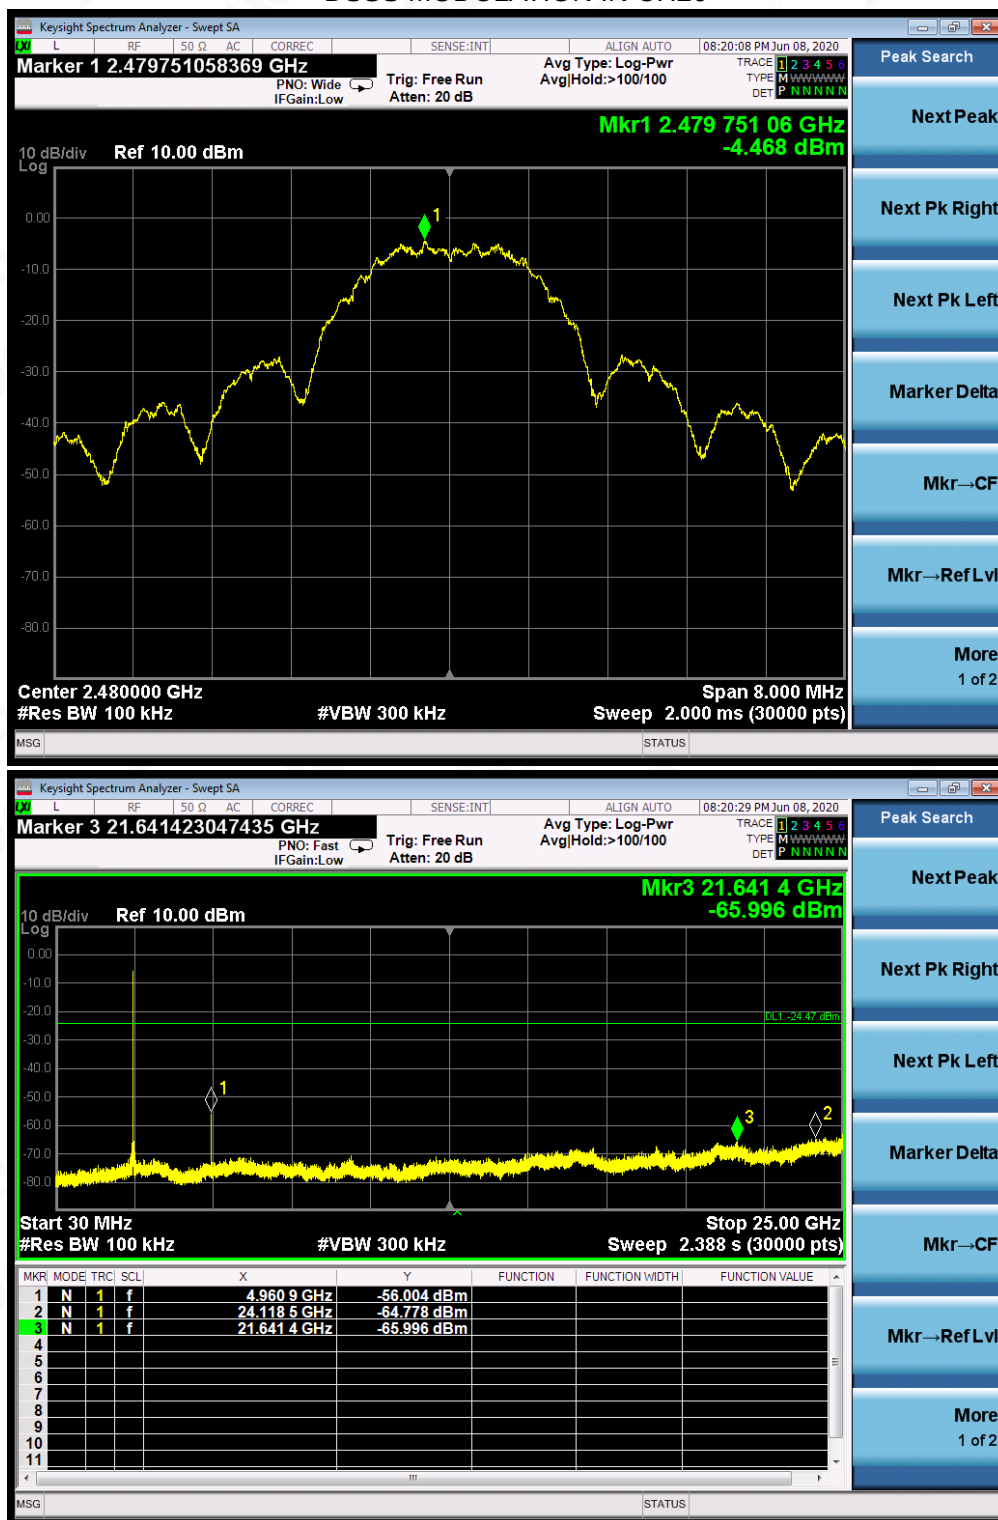


Note: The peak emissions without marker on the above plots are fundamental wave and need not to compare with the limit.



TEST RESULT FOR BAND EDGE DSSS MODULATION IN CH11



DSSS MODULATION IN CH25

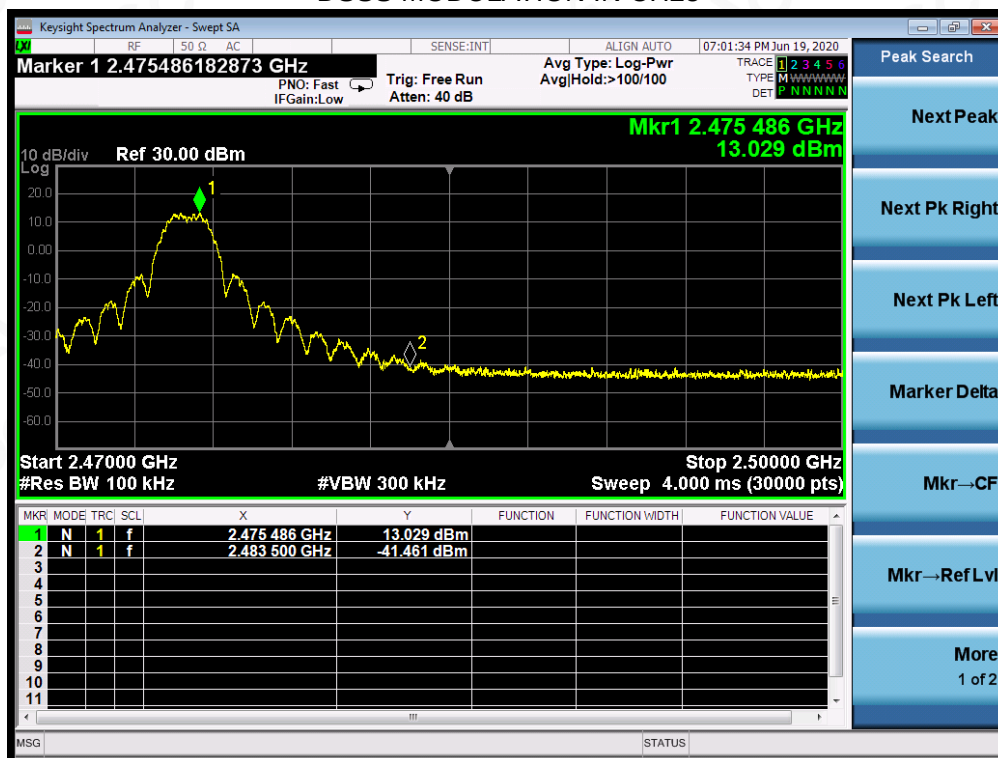

DSSS MODULATION IN CH26



10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

10.1 MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the KDB 558074 item 10.2 was used in this testing.

10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer To Section 7.2.

10.3 MEASUREMENT EQUIPMENT USED

Refer To Section 6.


10.4 LIMITS AND MEASUREMENT RESULT

Channel No.	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
2405MHz	3.840	8	Pass
2440MHz	4.159	8	Pass
2475MHz	3.681	8	Pass
2480MHz	-14.120	8	Pass

TEST PLOT OF SPECTRAL DENSITY FOR CH11




TEST PLOT OF SPECTRAL DENSITY FOR CH18

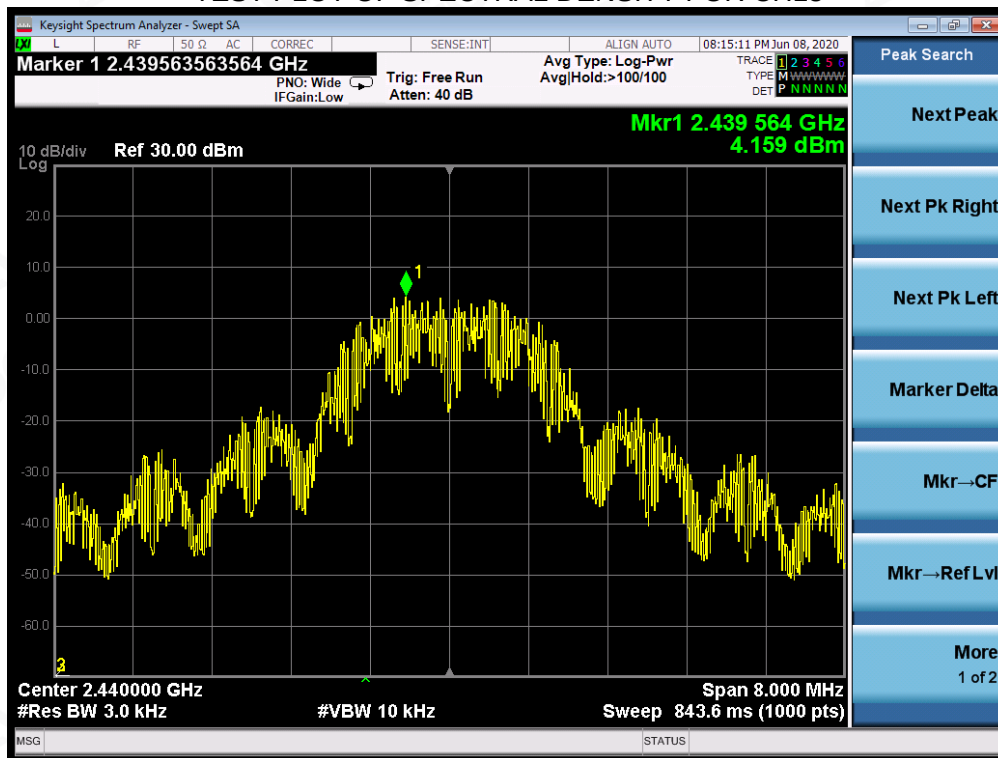

TEST PLOT OF SPECTRAL DENSITY FOR CH25



TEST PLOT OF SPECTRAL DENSITY FOR CH26

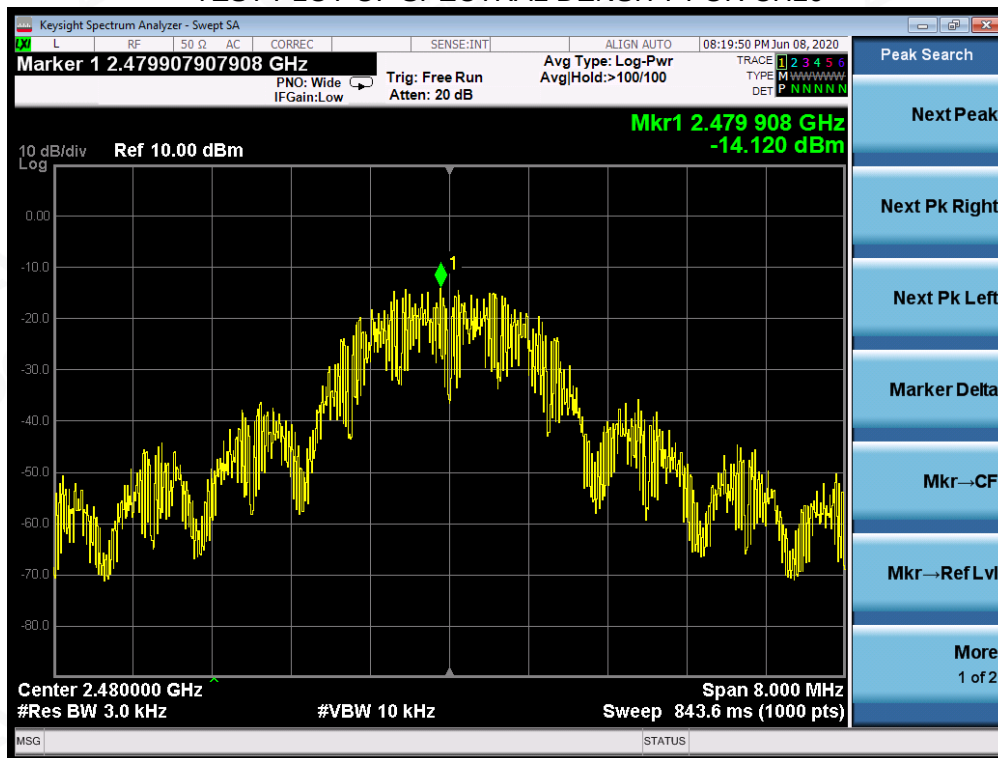

11. RADIATED EMISSION


11.1. MEASUREMENT PROCEDURE

1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.




11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

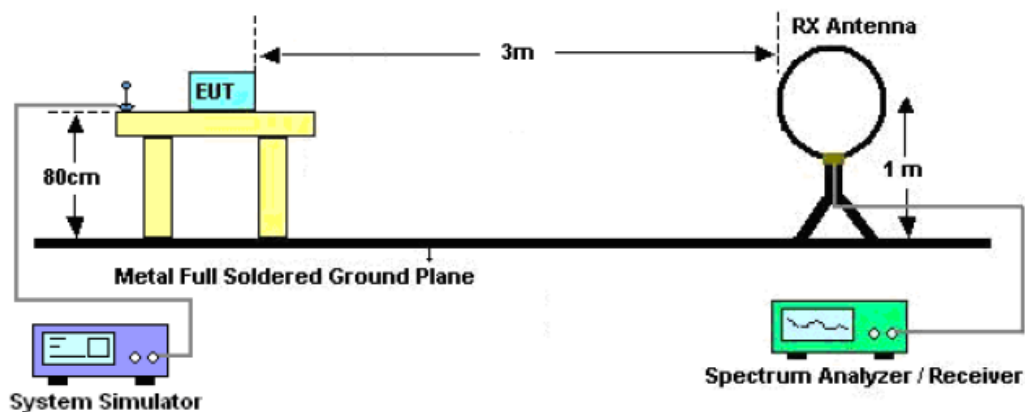

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

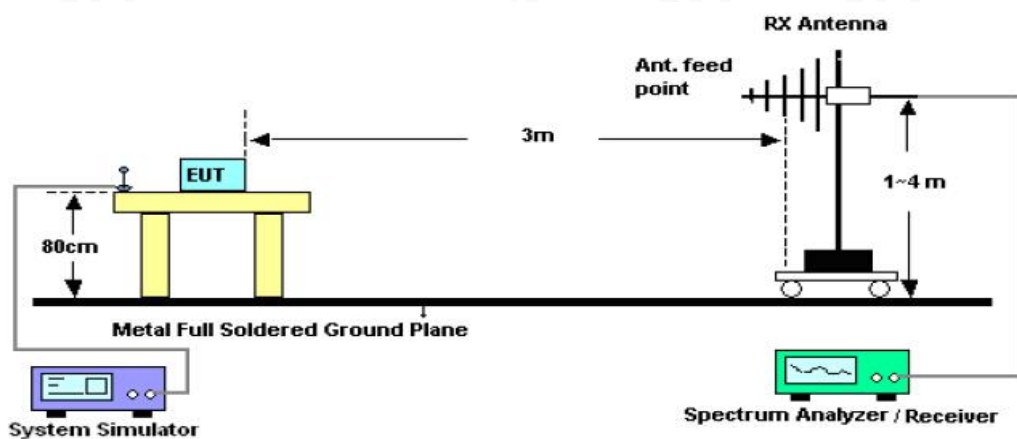

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

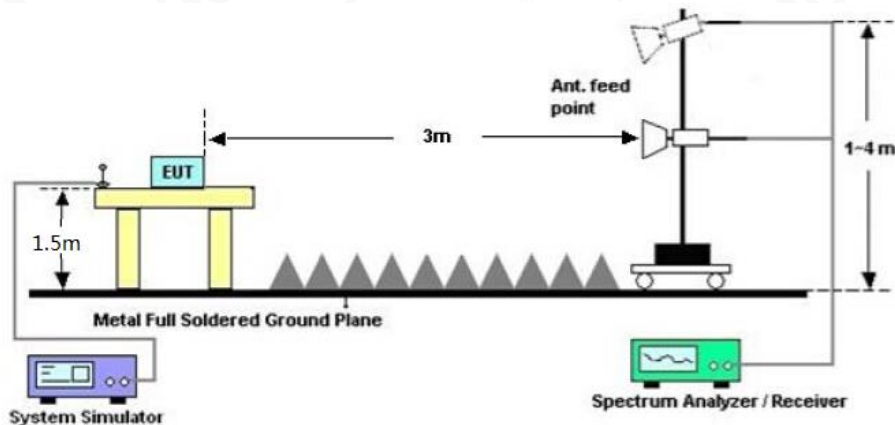

11.3. LIMITS AND MEASUREMENT RESULT

RSS-GEN Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested For restricted band radiated emission,
the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT


RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.




RADIATED EMISSION BELOW 1GHZ

EUT:	Smart B-plug	Model Name. :	Smart B-plug
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 1	Polarization :	Horizontal

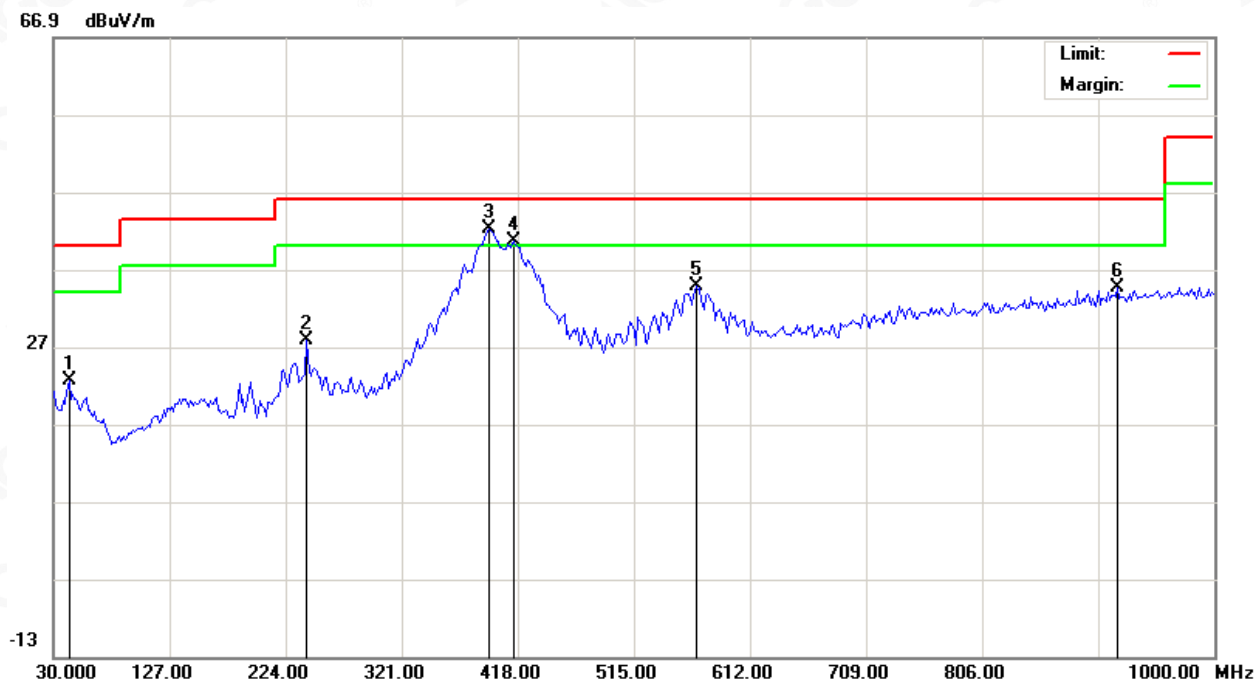

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		42.9333	2.69	19.98	22.67	40.00	-17.33	peak			
2		241.7833	9.26	18.63	27.89	46.00	-18.11	peak			
3	*	393.7500	19.51	22.76	42.27	46.00	-3.73	peak			
4	!	414.7667	17.31	23.28	40.59	46.00	-5.41	peak			
5		566.7333	8.43	26.30	34.73	46.00	-11.27	peak			
6		919.1667	2.66	31.86	34.52	46.00	-11.48	peak			

EUT:	Smart B-plug	Model Name. :	Smart B-plug
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 1	Polarization :	Vertical

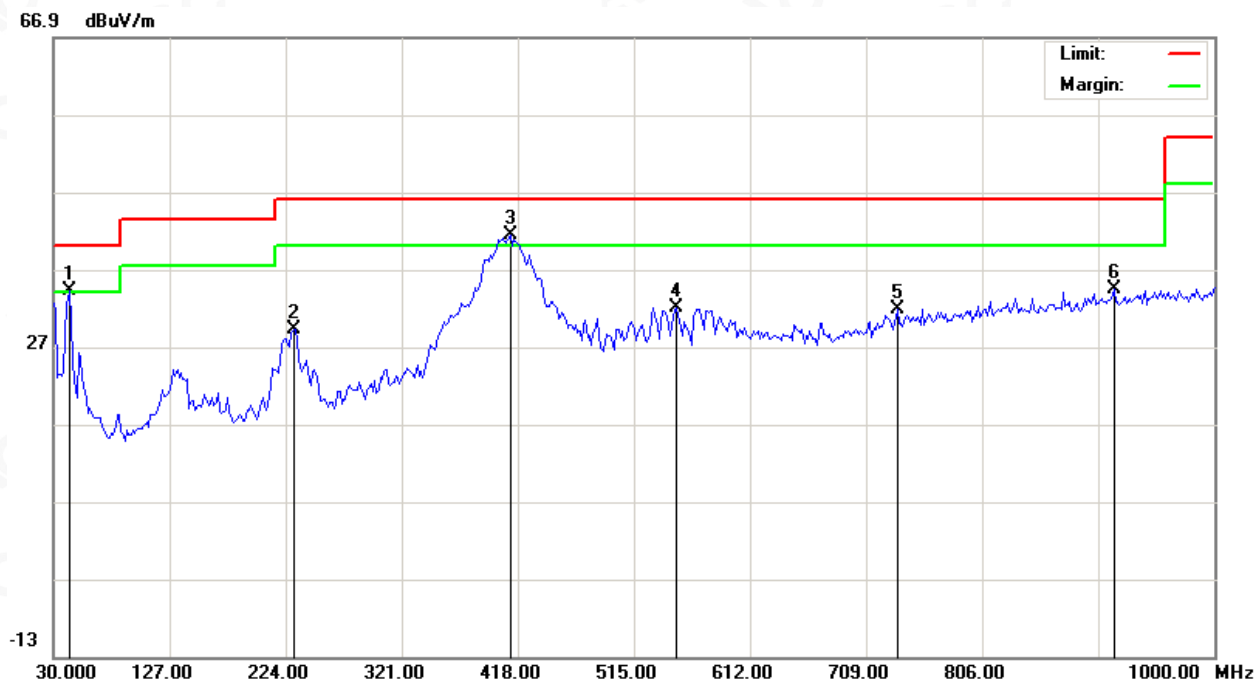

No.	Mk	Freq. MHz	Reading dBuV	Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	!	42.9333	14.23	19.98	34.21	40.00	-5.79	peak			
2		230.4667	11.29	17.98	29.27	46.00	-16.73	peak			
3	*	411.5333	18.19	23.21	41.40	46.00	-4.60	peak			
4		550.5667	6.09	25.98	32.07	46.00	-13.93	peak			
5		734.8667	2.81	28.94	31.75	46.00	-14.25	peak			
6		915.9333	2.49	31.84	34.33	46.00	-11.67	peak			

RESULT: PASS

Note:

- Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.
- All test modes had been tested. The mode 1 is the worst case and recorded in the report.



RADIATED EMISSION ABOVE 1GHZ

EUT:	Smart B-plug	Model Name. :	Smart B-plug
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 1	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
4810.03	48.34	3.76	52.10	74.00	-21.90	peak
4810.03	41.27	3.76	45.03	54.00	-8.97	AVG
7215.045	42.92	8.17	51.09	74.00	-22.91	peak
7215.045	34.16	8.17	42.33	54.00	-11.67	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT:	Smart B-plug	Model Name. :	Smart B-plug
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 1	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
4810.03	47.53	3.76	51.29	74.00	-22.71	peak
4810.03	40.71	3.76	44.47	54.00	-9.53	AVG
7215.045	41.66	8.17	49.83	74.00	-24.17	peak
7215.045	33.45	8.17	41.62	54.00	-12.38	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



EUT:	Smart B-plug	Model Name. :	Smart B-plug
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 2	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4880.03	47.31	3.78	51.09	74.00	-22.91	peak
4880.03	40.28	3.78	44.06	54.00	-9.94	AVG
7320.045	42.25	8.23	50.48	74.00	-23.52	peak
7320.045	34.68	8.23	42.91	54.00	-11.09	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT:	Smart B-plug	Model Name. :	Smart B-plug
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 2	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4880.03	48.51	3.78	52.29	74.00	-21.71	peak
4880.03	40.14	3.78	43.92	54.00	-10.08	AVG
7320.045	42.59	8.23	50.82	74.00	-23.18	peak
7320.045	33.83	8.23	42.06	54.00	-11.94	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



EUT:	Smart B-plug	Model Name. :	Smart B-plug
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 3	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
4950.03	48.26	3.81	52.07	74.00	-21.93	peak
4950.03	40.75	3.81	44.56	54.00	-9.44	AVG
7425.045	42.33	8.27	50.60	74.00	-23.40	peak
7425.045	33.49	8.27	41.76	54.00	-12.24	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT:	Smart B-plug	Model Name. :	Smart B-plug
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 3	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
4950.03	47.86	3.81	51.67	74.00	-22.33	peak
4950.03	39.42	3.81	43.23	54.00	-10.77	AVG
7425.045	41.78	8.27	50.05	74.00	-23.95	peak
7425.045	32.56	8.27	40.83	54.00	-13.17	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



EUT:	Smart B-plug	Model Name. :	Smart B-plug
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 4	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
4960.03	47.34	3.81	51.15	74.00	-22.85	peak
4960.03	40.13	3.81	43.94	54.00	-10.06	AVG
7440.045	41.84	8.27	50.11	74.00	-23.89	peak
7440.045	32.96	8.27	41.23	54.00	-12.77	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT:	Smart B-plug	Model Name. :	Smart B-plug
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 4	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
4960.03	46.31	3.81	50.12	74.00	-23.88	peak
4960.03	39.27	3.81	43.08	54.00	-10.92	AVG
7440.045	41.56	8.27	49.83	74.00	-24.17	peak
7440.045	31.99	8.27	40.26	54.00	-13.74	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Note: Other emissions from 8G to 25 GHz are considered as ambient noise. No recording in the test report.
Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.
The “Factor” value can be calculated automatically by software of measurement system.



TEST RESULT FOR RESTRICTED BANDS REQUIREMENTS

EUT	Smart B-plug	Model Name	Smart B-plug
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

PK



AV



RESULT: PASS



EUT	Smart B-plug	Model Name	Smart B-plug
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

PK



AV



RESULT: PASS



EUT	Smart B-plug	Model Name	Smart B-plug
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

PK



AV



RESULT: PASS



EUT	Smart B-plug	Model Name	Smart B-plug
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

PK




AV




EUT	Smart B-plug	Model Name	Smart B-plug
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Horizontal

PK

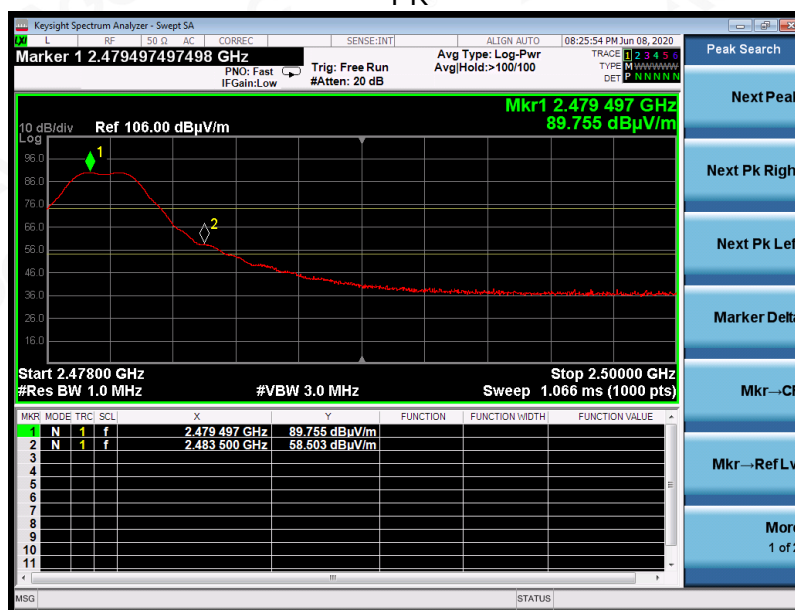

AV

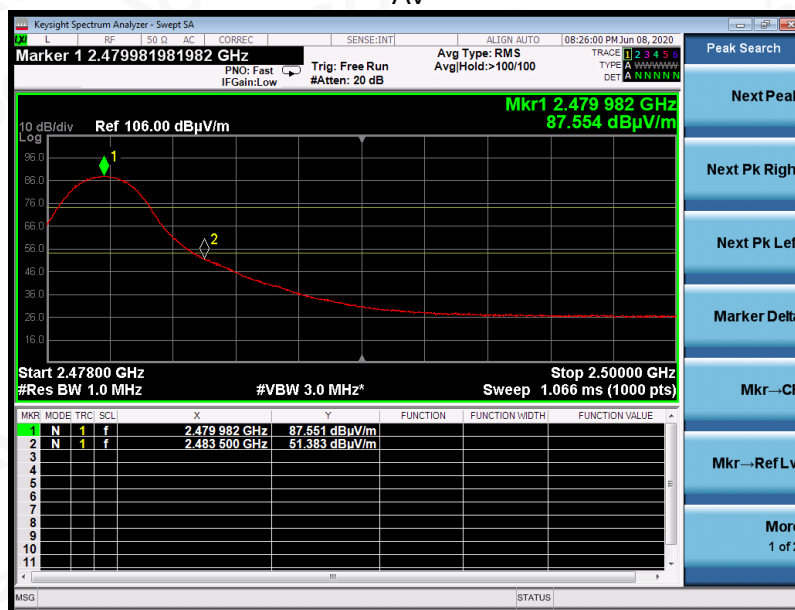


RESULT: PASS




EUT	Smart B-plug	Model Name	Smart B-plug
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Vertical

PK

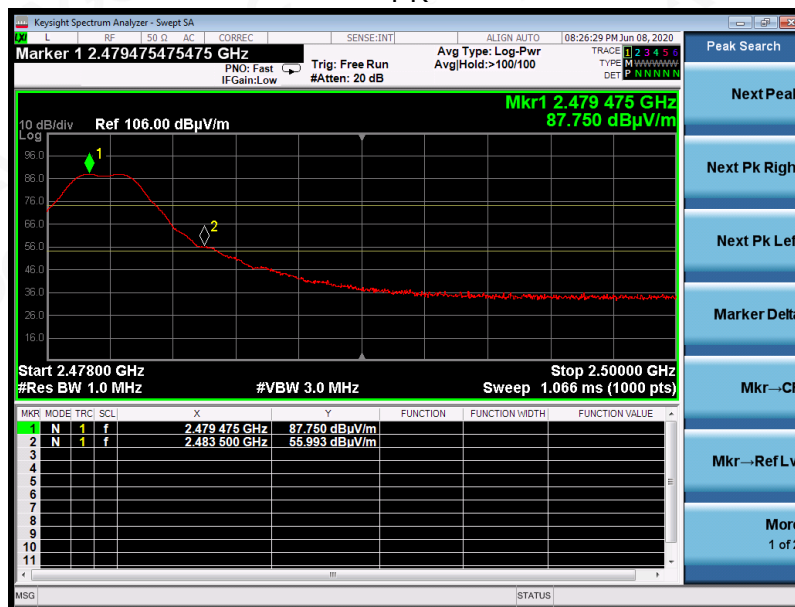

AV

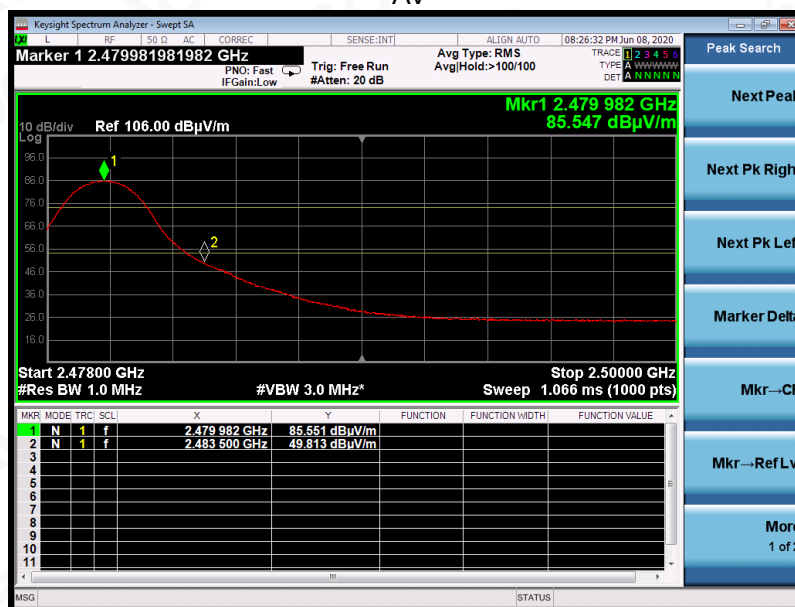

RESULT: PASS

Note: The factor had been edited in the “Input Correction” of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB(μV) to represent the Amplitude. Use the F dB(μV/m) to represent the Field Strength. So A=F.



12. LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

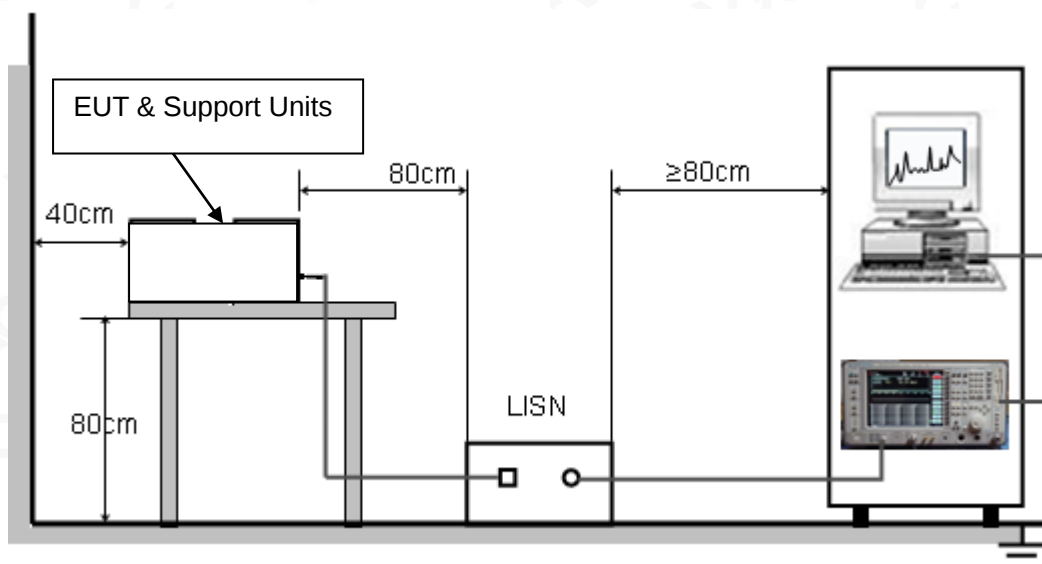

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received AC120V/60Hz power from a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.



12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

LINE CONDUCTED EMISSION TEST-L

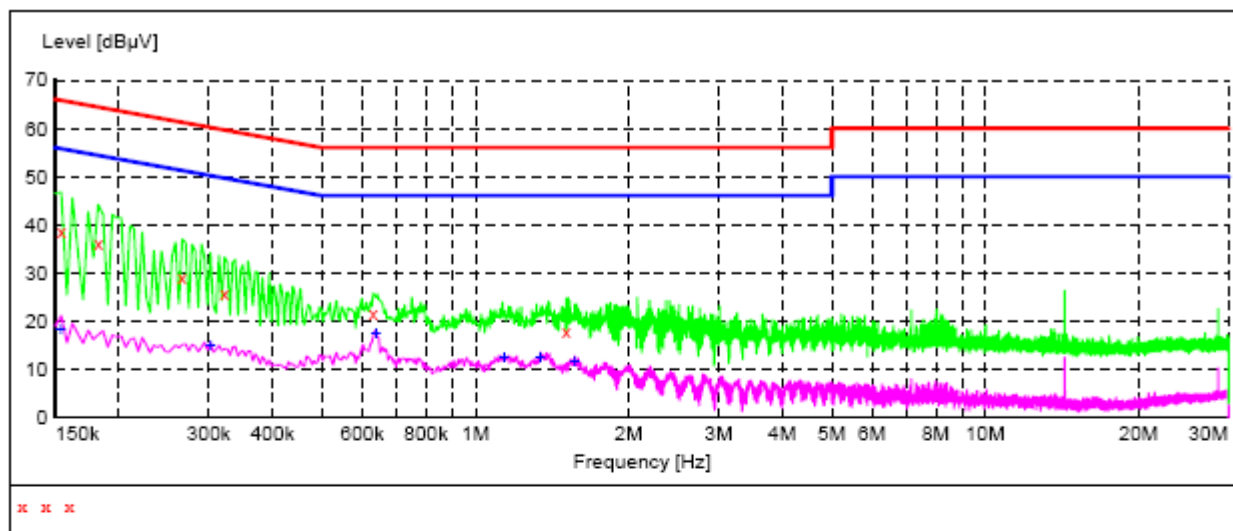


MEASUREMENT RESULT

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line
0.154000	38.60	11.3	66	27.2	QP	L1
0.182000	36.10	11.3	64	28.3	QP	L1
0.266000	29.00	11.3	61	32.2	QP	L1
0.322000	25.70	11.3	60	34.0	QP	L1
0.630000	21.50	11.3	56	34.5	QP	L1
1.506000	18.00	11.3	56	38.0	QP	L1

MEASUREMENT RESULT

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line
0.154000	18.30	11.3	56	37.5	AV	L1
0.302000	14.80	11.3	50	35.4	AV	L1
0.638000	17.60	11.3	46	28.4	AV	L1
1.138000	12.60	11.3	46	33.4	AV	L1
1.342000	12.30	11.3	46	33.7	AV	L1
1.566000	11.50	11.3	46	34.5	AV	L1

LINE CONDUCTED EMISSION TEST-N

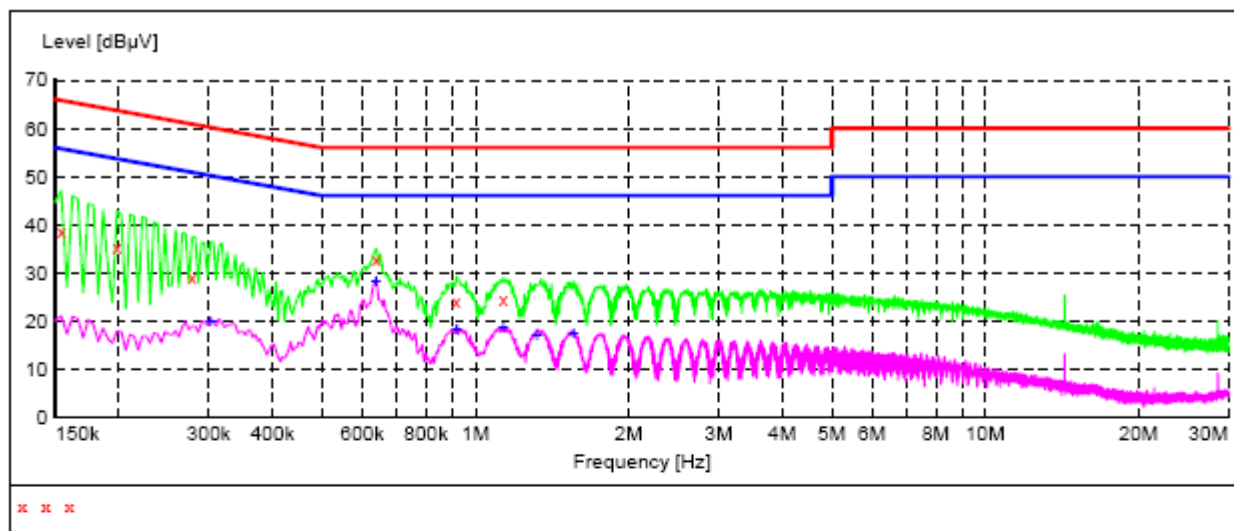

MEASUREMENT RESULT

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line
0.154000	38.40	11.3	66	27.4	QP	N
0.198000	35.30	11.3	64	28.4	QP	N
0.278000	28.90	11.3	61	32.0	QP	N
0.638000	32.80	11.3	56	23.2	QP	N
0.918000	24.10	11.3	56	31.9	QP	N
1.134000	24.40	11.3	56	31.6	QP	N

MEASUREMENT RESULT

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line
0.302000	20.00	11.3	50	30.2	AV	N
0.638000	28.10	11.3	46	17.9	AV	N
0.918000	18.10	11.3	46	27.9	AV	N
1.134000	18.80	11.3	46	27.2	AV	N
1.322000	16.80	11.3	46	29.2	AV	N
1.562000	17.60	11.3	46	28.4	AV	N

RESULT: PASS

Note: All the test modes had been tested, the mode 1 was the worst case. Only the data of the worst case would be record in this test report.

