

RF EVALUATION TEST REPORT

Applicant..... : Foto Electric Supply Co., INC.

Address..... : 1 Rewe St. Brooklyn, New York 11211 United States

Manufacturer..... : Foto Electric Supply Co., INC.

Address..... : 1 Rewe St. Brooklyn, New York 11211 United States

Factory..... : Foto Electric Supply Co., INC.

Address..... : 1 Rewe St. Brooklyn, New York 11211 United States

Product Name..... : Wireless Charging Speaker With Digital Alarm Clock

Brand Name..... : Chargeworx, COBY

Model No. : KH1017WH, CX5280WH (For model difference refer to section 2.)

FCC ID..... : 2AJVKSP001


Measurement Standard..... : 47 CFR PART 2, Section 2.1091

Receipt Date of Samples..... : July 05, 2025

Date of Tested..... : July 05, 2025 to July 23, 2025

Date of Report..... : August 25, 2025

This report shows that above equipment is technically compliant with the requirements of the standards above. All test results in this report apply only to the tested sample(s). Without prior written approval of Dongguan Nore Testing Center Co., Ltd, this report shall not be reproduced except in full.



Prepared by

Alina Guo / Project Engineer



Iori Fan / Authorized Signatory

Table of Contents

1. General Description of EUT	4
2. Test Facility and Location	6
3. Test Modes Detail	7
4. Configuration of EUT.....	7
5. Modification of EUT.....	7
6. Description of Support Device.....	8
7. Deviations and Abnormalities from Standard Conditions	8
8. Applicable Standards and References.....	8
9. Measurement Uncertainty	9
10. Maximum Permissible Exposure.....	10
11. Test Equipment List.....	14
12. Test Photos	15

Revision History

1. General Description of EUT

Product Information	
Product Name:	Wireless Charging Speaker With Digital Alarm Clock
Main Model Name:	KH1017WH
Additional Model Name:	CX5280WH
Model difference:	Both of models have the same circuit schematic, structure, PCB Layout and critical components. The differences are model number and brand name due to trading purpose.
S/N:	2507-4733
Brand Name:	Chargeworx, COBY
Hardware Version:	Not Stated
Software Version:	Not Stated
Rating:	DC 5V 3A or DC 9V 2A come from adapter DC 3.7V come from internal li-ion battery
Typical Arrangement:	Tabletop
I/O Port:	Refer to the user manual
Accessories Information	
Adapter:	N/A
Cable:	USB line: 0.8m, unshielded, detachable
Other:	N/A
Additional Information	
Note:	According to the model differences and manufacturer's requirements, all tests were performed on model KH1017WH.
Remark:	All the information above are provided by the manufacturer. More detailed feature of the EUT please refers to the user manual.

Technical Specification

Technical Specification	
Frequency Range:	110.5-205KHz
Modulation Type:	FSK
Antenna Type:	Coil antenna
Output power for coil:	5W, 7.5W, 10W, 15W
Remark:	This product only supports wireless charging technology.

2. Test Facility and Location


Test Site	:	Dongguan Nore Testing Center Co., Ltd. (Dongguan NTC Co., Ltd.)
Accreditations and Authorizations	:	<p>The Laboratory has been assessed and proved to be in compliance with CNAS/CL01</p> <p>Listed by CNAS, August 13, 2018</p> <p>The Certificate Registration Number is L5795.</p> <p>The Certificate is valid until August 13, 2030</p> <p>The Laboratory has been assessed and proved to be in compliance with ISO17025</p> <p>Listed by A2LA, November 01, 2017</p> <p>The Certificate Registration Number is 4429.01</p> <p>The Certificate is valid until December 31, 2025</p> <p>Listed by FCC, November 06, 2017</p> <p>Test Firm Registration Number: 907417</p> <p>Listed by Industry Canada, June 08, 2017</p> <p>The Certificate Registration Number. Is 46405-9743A</p>
Test Site Location	:	Building D, Gaosheng Science and Technology Park, Hongtu Road, Nancheng District, Dongguan City, Guangdong Province, China

3. Test Modes Detail

Mode		Modulation
1	Wireless Charging 5W (Full Load)	FSK
2	Wireless Charging 5W (Half Load)	FSK
3	Wireless Charging 5W (Empty Load)	FSK
4	Wireless Charging 7.5W (Full Load)	FSK
5	Wireless Charging 7.5W (Half Load)	FSK
6	Wireless Charging 7.5W (Empty Load)	FSK
7	Wireless Charging 10W (Full Load)	FSK
8	Wireless Charging 10W (Half Load)	FSK
9	Wireless Charging 10W (Empty Load)	FSK
10	Wireless Charging 15W (Full Load)	FSK
11	Wireless Charging 15W (Half Load)	FSK
12	Wireless Charging 15W (Empty Load)	FSK

Not: Only the worst case was recorded in the report.

4. Configuration of EUT

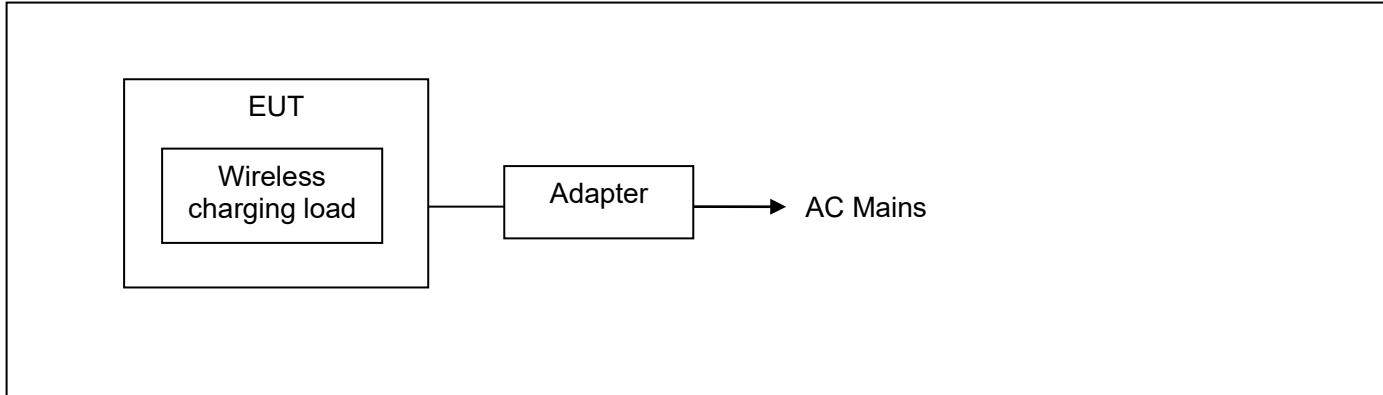

5. Modification of EUT

No modifications are made to the EUT during all test items.

6. Description of Support Device

The EUT has tested as an independent unit together with other necessary accessories or support units. The following support units or accessories used to form a representative test configuration during the tests.

No.	Equipment	Brand	M/N	S/N	Cable Specification	Remarks
1.	Wireless Charging Load	Consumer Electronics	2S	---	---	Provided by the Lab.
2.	AC/DC Adapter	VESEL	CW1204000EU	---	AC 100-240V 50/60Hz 1.2A MAX; DC 12.0V 4.0A 48.0W	Provided by the Manufacturer.

7. Deviations and Abnormalities from Standard Conditions

No additions, deviations and exclusions from the standard.

8. Applicable Standards and References

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

Test Standards:

47 CFR Part 1, 1.1307(b) and 1.1310

KDB 680106 D01v04

9. Measurement Uncertainty

No.	Test Item	Uncertainty	Remarks
1.	Magnetic Field Emissions	±0.15 dB	---
2.	Electric Field Emissions	±0.36 dB	---

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

10. Maximum Permissible Exposure

LIMIT

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,00	/	/	1.0	30

F=frequency in MHz


*=Plane-wave equivalent power density

RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz: 614V/m,1.63A/m).

Per KDB 680106 D01v04, RF exposure evaluation at 15cm surrounding the device and 20cm above the top surface. Emission between 50 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 1.63/A/m and aggregate H-field strengths from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.


BLOCK DIAGRAM OF TEST SETUP

For Mobile:

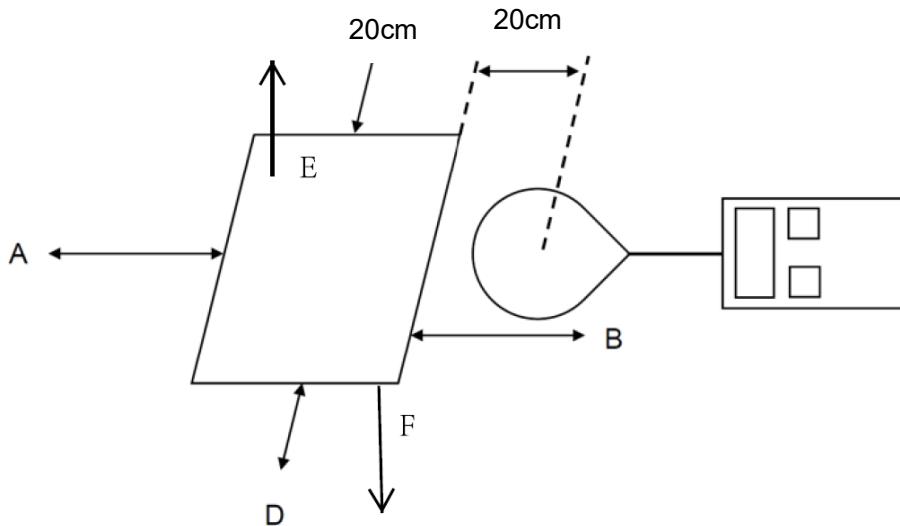

Note: The distance of the points A/B/C/D/E and F(if necessary) is 20cm.

For Portable:

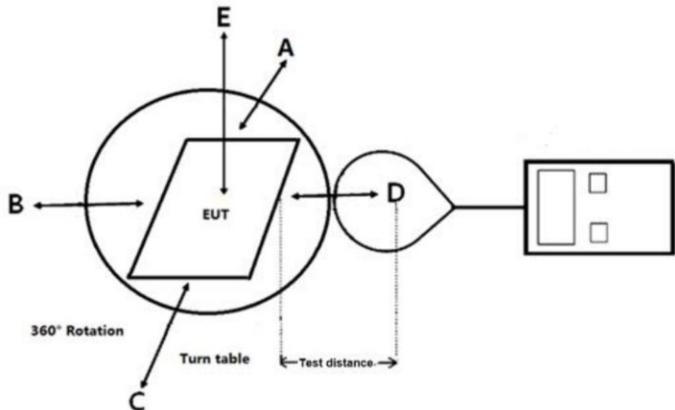

Note: The distance of the points A/B/C/D/E is 2 4 6 8 10 15 20cm.

TEST PROCEDURES

For mobile exposure conditions:

- a. The RF exposure test was performed in anechoic chamber;
- b. E and H-field measurements should be made with the center of the probe at a distance of 20cm surrounding the EUT of the primary/client pair.
- c. The highest emission level was recorded and compared with limit.
- d. The EUT was measured according to the dictates of KDB 680106 D01v04.

For portable exposure conditions:

- a. The RF exposure test was performed in anechoic chamber;
- b. E and H-field measurements should be made with the probe at 0cm for all sides of the EUT.
- c. The highest emission level was recorded and compared with limit.

For portable exposure conditions:

Perform H-field measurements for each edge/top surface of the host/client pair at every 2cm, starting from as close as possible out to 20cm.

TEST RESULTS

PASS

Please refer to the following pages of the worst case.


15W, Test Mode 10			
Test Distance (cm)	Test Position	Mobile Measure Result (A/m)	Limit (A/m)
20	Side A	0.18	1.63
	Side B	0.18	1.63
	Side C	0.18	1.63
	Side D	0.18	1.63
	Side E	0.24	1.63

11. Test Equipment List


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Magnetic field probe 100cm ²	Narda	ETL-400 Probe 1Hz-400KHz (r=6.2cm)	O-0167	June 28, 2025	1 Year
2.	E-Field Probe	Narda	EP-601	611WX70729	Mar. 23, 2025	1 Year

12. Test Photos


Side A: Test distance 20cm

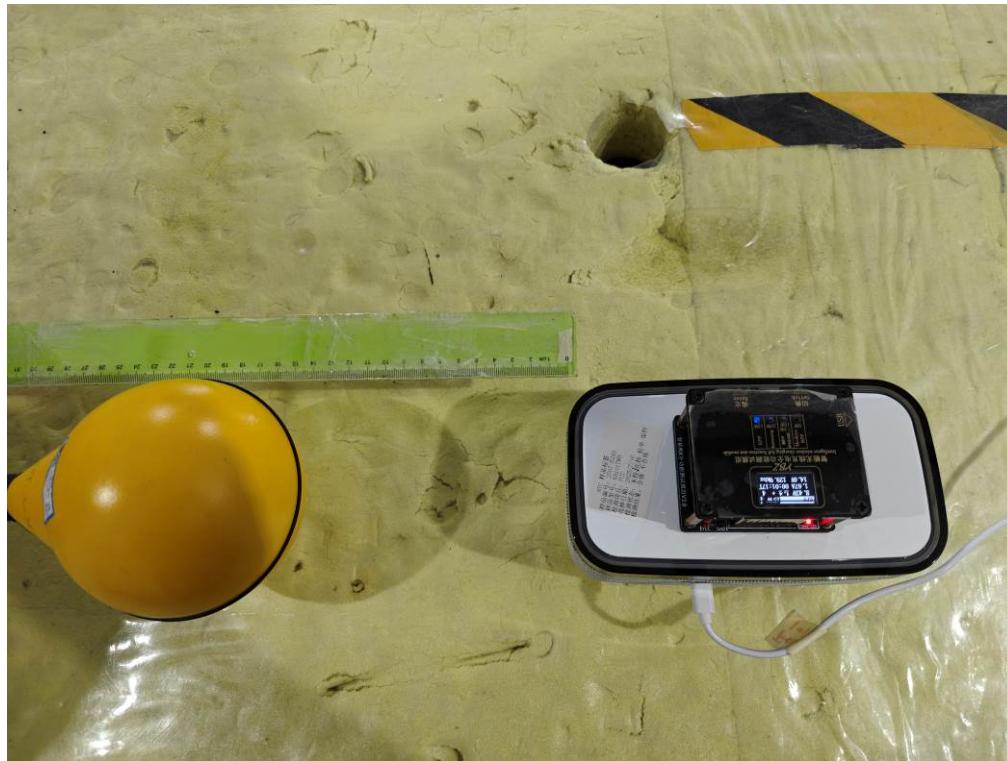


Side B: Test distance 20cm

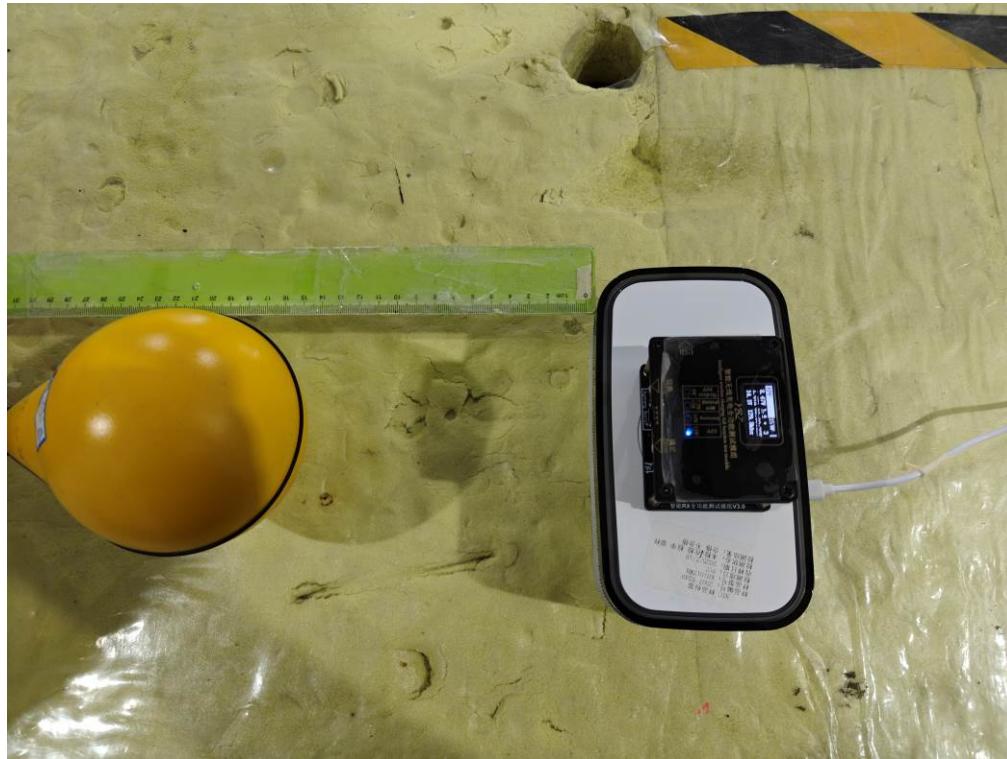


Side C: Test distance 20cm

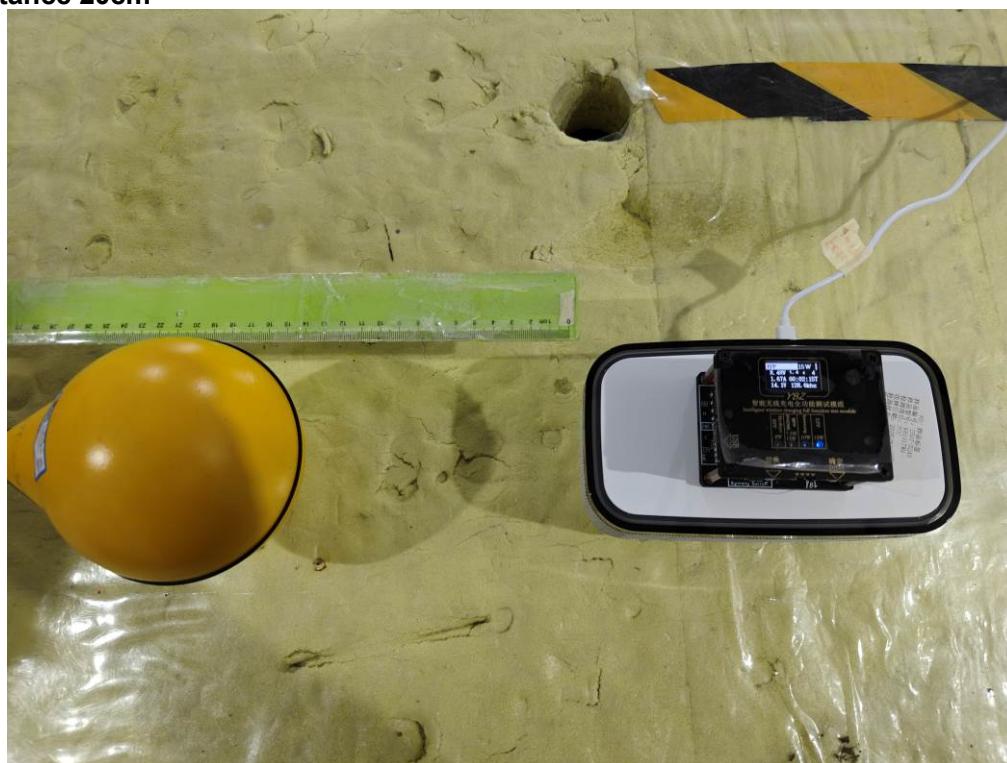

Side D: Test distance 20cm

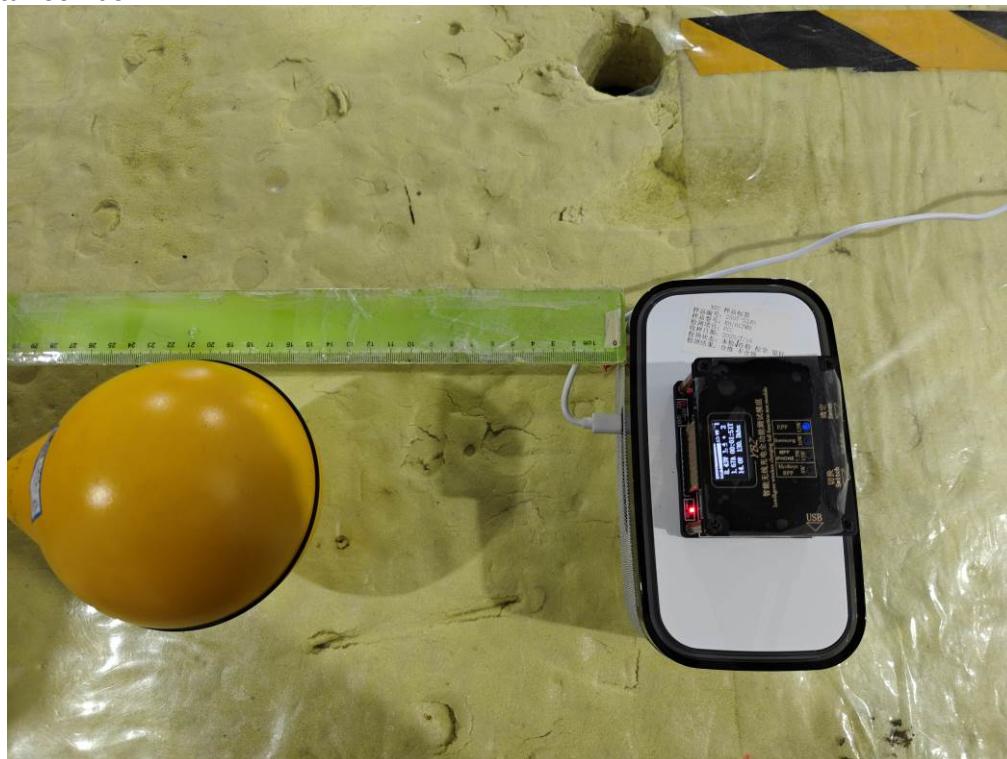

Side E: Test distance 20cm

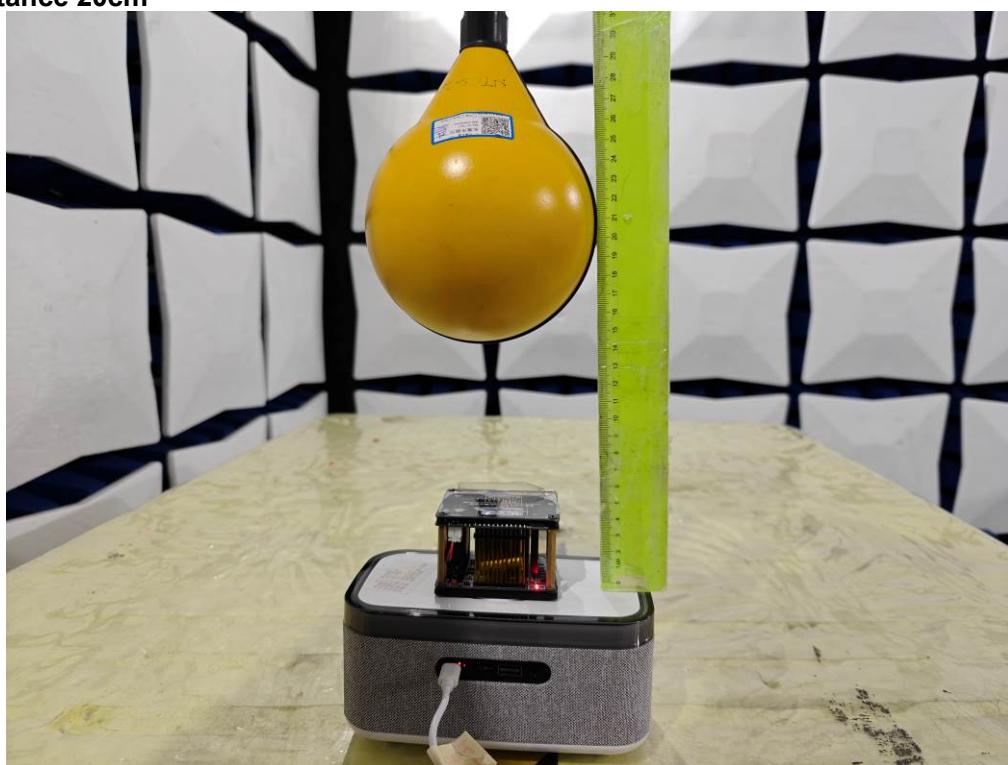

---End---