

## TEST REPORT

BNetzA-CAB-02/21-102

Test report no.: 1-2594/21-01-04

### Testing laboratory

**CTC advanced GmbH**

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <https://www.ctcadvanced.com>

e-mail: [mail@ctcadvanced.com](mailto:mail@ctcadvanced.com)

**Accredited Testing Laboratory:**

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate starting with the registration number: D-PL-12076-01.

### Applicant

**Continental Automotive GmbH**

Heinrich-Hertz-Str. 45

78052 Villingen-Schwenningen / GERMANY

Phone: +49 7721 94 72-0

Contact: Marion Grüner

e-mail: [Marion.Gruener@continental-corporation.com](mailto:Marion.Gruener@continental-corporation.com)

### Manufacturer

**Continental Automotive GmbH**

Heinrich-Hertz-Str. 45

78052 Villingen-Schwenningen / GERMANY

### Test standard/s

FCC - Title 47 CFR Part 15      FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

RSS - 210 Issue 10      Spectrum Management and Telecommunications Radio Standards  
Specification - Licence-Exempt Radio Apparatus: Category I Equipment

For further applied test standards please refer to section 3 of this test report.

### Test Item

**Kind of test item:**      Access and Connected Car Module with Remote Cloud Key

**Model name:**      ACCM201-US4G-1B

**FCC ID:**      2AJW5ACCM

**IC:**      21979-ACCM

**Frequency:**      312.0MHz to 318.0MHz, 431.9MHz to 435.9MHz,  
868.1MHz to 868.5MHz, 902.375MHz to 927.675MHz

**Technology tested:**      proprietary

**Antenna:**      Integrated antenna

**Power supply:**      9 V to 18 V DC by battery

**Temperature range:**      -20°C to +55°C

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### Test report authorized:



Christoph Schneider  
Lab Manager  
Radio Communications

### Test performed:



Hans-Joachim Wolsdorfer  
Lab Manager  
Radio Communications

## 1 Table of contents

|      |                                                             |     |
|------|-------------------------------------------------------------|-----|
| 1    | Table of contents .....                                     | 2   |
| 2    | General information .....                                   | 3   |
| 2.1  | Notes and disclaimer .....                                  | 3   |
| 2.2  | Application details .....                                   | 3   |
| 2.3  | Test laboratories sub-contracted .....                      | 3   |
| 3    | Test standard/s, references and accreditations .....        | 4   |
| 4    | Reporting statements of conformity – decision rule .....    | 5   |
| 5    | Test environment .....                                      | 6   |
| 6    | Test item.....                                              | 6   |
| 6.1  | General description .....                                   | 6   |
| 6.2  | Additional information .....                                | 6   |
| 7    | Description of the test setup.....                          | 7   |
| 7.1  | Shielded semi anechoic chamber .....                        | 8   |
| 7.2  | Shielded fully anechoic chamber.....                        | 10  |
| 7.3  | Conducted measurements .....                                | 12  |
| 8    | Sequence of testing .....                                   | 13  |
| 8.1  | Sequence of testing radiated spurious 9 kHz to 30 MHz ..... | 13  |
| 8.2  | Sequence of testing radiated spurious 30 MHz to 1 GHz ..... | 14  |
| 8.3  | Sequence of testing radiated spurious 1 GHz to 18 GHz ..... | 15  |
| 9    | Measurement uncertainty .....                               | 16  |
| 10   | Summary of measurement results .....                        | 17  |
| 10.1 | Additional comments .....                                   | 17  |
| 11   | Measurement results .....                                   | 18  |
| 11.1 | Timing of the transmitter.....                              | 18  |
| 11.2 | Switch off time .....                                       | 23  |
| 11.3 | Emission bandwidth .....                                    | 33  |
| 11.4 | Field strength of the fundamental.....                      | 51  |
| 11.5 | Field strength of the harmonics and spurious .....          | 53  |
| 12   | Observations .....                                          | 104 |
| 13   | Test bin file tables.....                                   | 105 |
| 14   | Glossary .....                                              | 106 |
| 15   | Document history.....                                       | 107 |
| 16   | Accreditation Certificate – D-PL-12076-01-04.....           | 107 |
| 17   | Accreditation Certificate – D-PL-12076-01-05.....           | 108 |

## 2 General information

### 2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CTC advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTC advanced GmbH.

The testing service provided by CTC advanced GmbH has been rendered under the current "General Terms and Conditions for CTC advanced GmbH".

CTC advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CTC advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CTC advanced GmbH test report include or imply any product or service warranties from CTC advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CTC advanced GmbH.

All rights and remedies regarding vendor's products and services for which CTC advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by CTC advanced GmbH. In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### 2.2 Application details

|                                    |            |
|------------------------------------|------------|
| Date of receipt of order:          | 2021-06-01 |
| Date of receipt of test item:      | 2021-08-11 |
| Start of test:*                    | 2021-08-11 |
| End of test:*                      | 2021-11-12 |
| Person(s) present during the test: | -/-        |

\*Date of each measurement, if not shown in the plot, can be requested. Dates are stored in the measurement software.

### 2.3 Test laboratories sub-contracted

None

### 3 Test standard/s, references and accreditations

| Test standard                     | Date          | Description                                                                                                                          |
|-----------------------------------|---------------|--------------------------------------------------------------------------------------------------------------------------------------|
| FCC - Title 47 CFR Part 15        |               | FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices                                      |
| RSS - 210 Issue 10                | December 2019 | Spectrum Management and Telecommunications Radio Standards Specification - Licence-Exempt Radio Apparatus: Category I Equipment      |
| RSS - Gen Issue 5 incl. Amendment | March 2019    | Spectrum Management and Telecommunications Radio Standards Specification<br>- General Requirements for Compliance of Radio Apparatus |

| Guidance         | Version | Description                                                                                                                                                         |
|------------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ANSI C63.4-2014  | -/-     | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |
| ANSI C63.10-2013 | -/-     | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices                                                                      |

| Accreditation    | Description                                                                                                                                                                                                                                                                                                                             |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| D-PL-12076-01-04 | Telecommunication and EMC Canada<br><a href="https://www.dakks.de/as/ast/d/D-PL-12076-01-04e.pdf">https://www.dakks.de/as/ast/d/D-PL-12076-01-04e.pdf</a>     |
| D-PL-12076-01-05 | Telecommunication FCC requirements<br><a href="https://www.dakks.de/as/ast/d/D-PL-12076-01-05e.pdf">https://www.dakks.de/as/ast/d/D-PL-12076-01-05e.pdf</a>   |

ISED Testing Laboratory Recognized Listing Number: DE0001

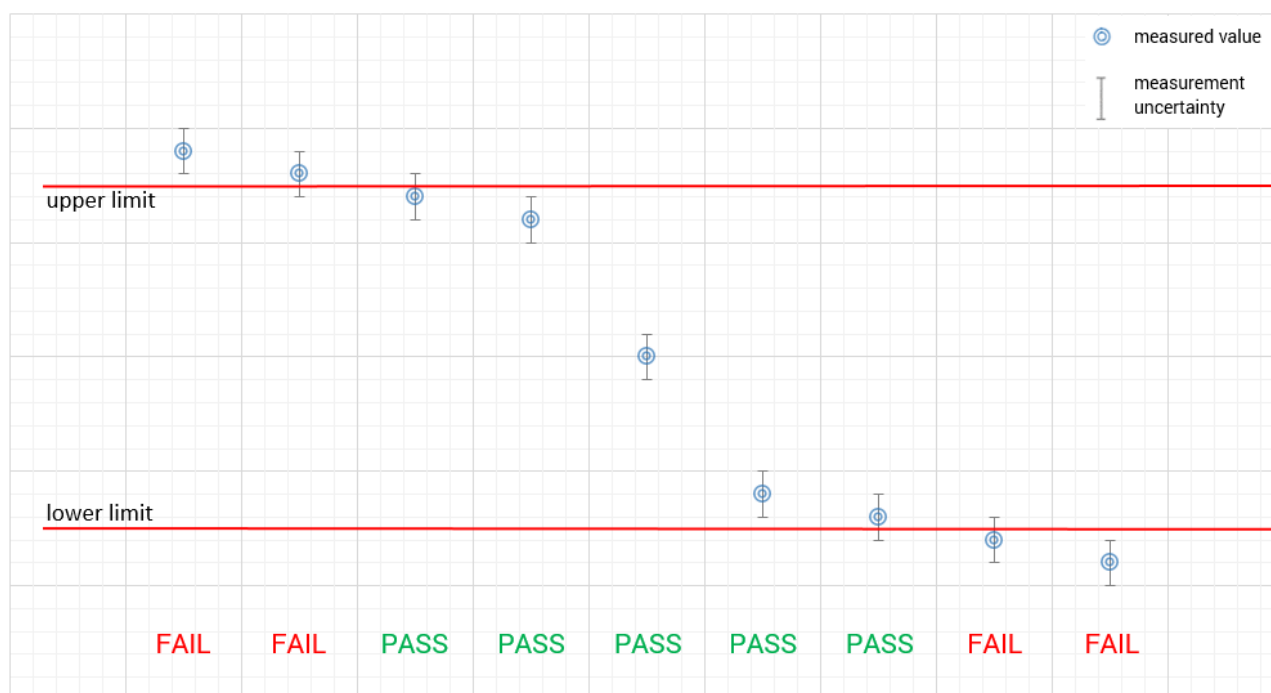
FCC designation number: DE0002

#### 4 Reporting statements of conformity – decision rule

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3.

The measurement uncertainty is mentioned in this test report, see chapter 9, but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong."

measured value, measurement uncertainty, verdict



## 5 Test environment

|                             |                                                          |                                                                                                                     |
|-----------------------------|----------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| Temperature :               | T <sub>nom</sub><br>T <sub>max</sub><br>T <sub>min</sub> | +22 °C during room temperature tests<br>+55 °C during high temperature tests<br>-20 °C during low temperature tests |
| Relative humidity content : |                                                          | 55 %                                                                                                                |
| Barometric pressure :       |                                                          | 1021 hpa                                                                                                            |
| Power supply :              | V <sub>nom</sub><br>V <sub>max</sub><br>V <sub>min</sub> | 12 V DC by battery<br>18 V<br>9 V                                                                                   |

## 6 Test item

### 6.1 General description

|                              |                                                                                               |                      |
|------------------------------|-----------------------------------------------------------------------------------------------|----------------------|
| Kind of test item :          | Access and Connected Car Module with Remote Cloud Key                                         |                      |
| Model name :                 | ACCM201-US4G-1B                                                                               |                      |
| HMN :                        | -/-                                                                                           |                      |
| PMN :                        | ACCM +                                                                                        |                      |
| HVIN :                       | ACCM +                                                                                        |                      |
| FVIN :                       | -/-                                                                                           |                      |
| S/N serial number :          | Rad.                                                                                          | ACCMb74fc589a882b6ab |
|                              | Cond.                                                                                         | ACCMb74fc589a882b6ab |
| Hardware status :            | ACCM 6.0.11                                                                                   |                      |
| Software status :            | -/-                                                                                           |                      |
| Firmware status :            | -/-                                                                                           |                      |
| Frequency band :             | 312.0MHz to 318.0MHz, 431.9MHz to 435.9MHz,<br>868.1MHz to 868.5MHz, 902.375MHz to 927.675MHz |                      |
| Type of radio transmission : | modulated carrier                                                                             |                      |
| Use of frequency spectrum :  |                                                                                               |                      |
| Type of modulation :         | ASK, FSK                                                                                      |                      |
| Number of channels :         | 12                                                                                            |                      |
| Antenna :                    | Integrated antenna                                                                            |                      |
| Power supply :               | 9 V to 18 V DC by battery                                                                     |                      |
| Temperature range :          | -20°C to +55°C                                                                                |                      |

### 6.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report:      1-2594/21-01-01\_AnnexA  
                                                                                                  1-2594/21-01-01\_AnnexB  
                                                                                                  1-2594/21-01-01\_AnnexD

## 7 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

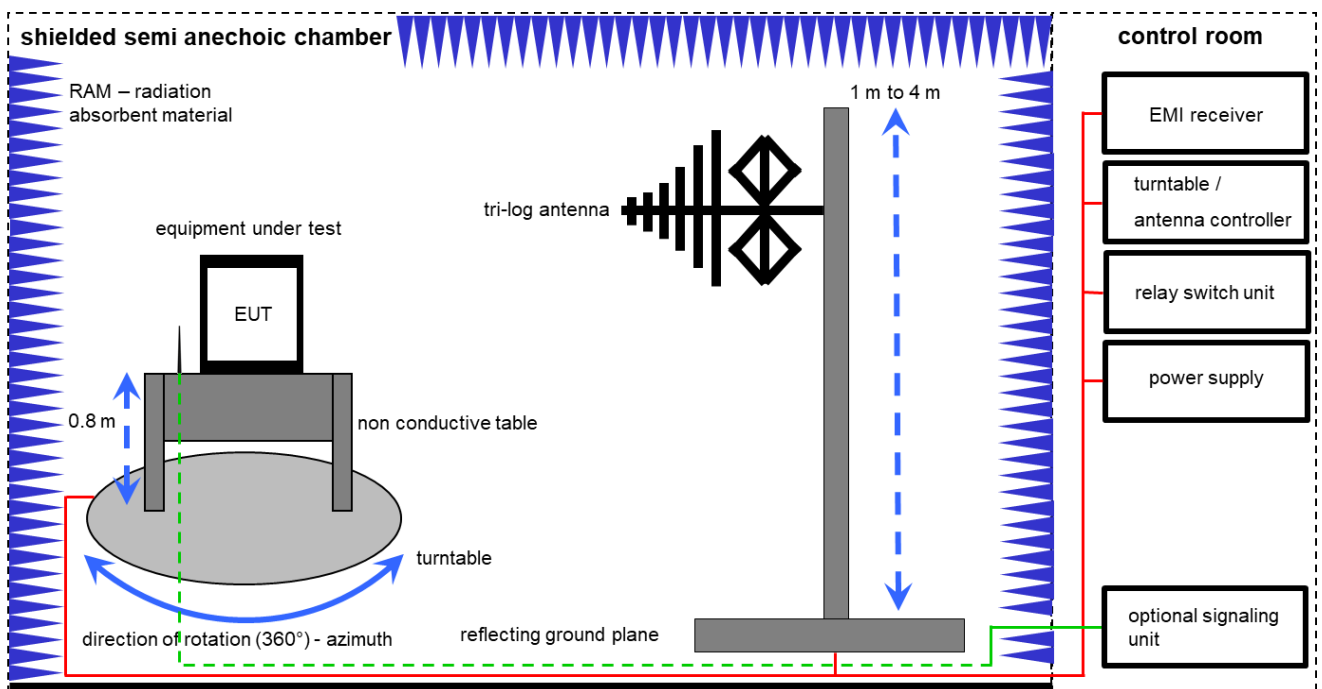
Each block diagram listed can contain several test setup configurations. All devices belonging to a test setup are identified with the same letter syntax. For example: Column Setup and all devices with an A.

### **Agenda:** Kind of Calibration

|       |                                            |     |                                                      |
|-------|--------------------------------------------|-----|------------------------------------------------------|
| k     | calibration / calibrated                   | EK  | limited calibration                                  |
| ne    | not required (k, ev, izw, zw not required) | zw  | cyclical maintenance (external cyclical maintenance) |
| ev    | periodic self verification                 | izw | internal cyclical maintenance                        |
| Ve    | long-term stability recognized             | g   | blocked for accredited testing                       |
| vlkl! | Attention: extended calibration interval   |     |                                                      |
| NK!   | Attention: not calibrated                  | *)  | next calibration ordered / currently in progress     |

## 7.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 30 MHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform to specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.



Measurement distance: tri-log antenna 10 meter

EMC32 software version: 10.59.00

$$FS = UR + CL + AF$$

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)

### Example calculation:

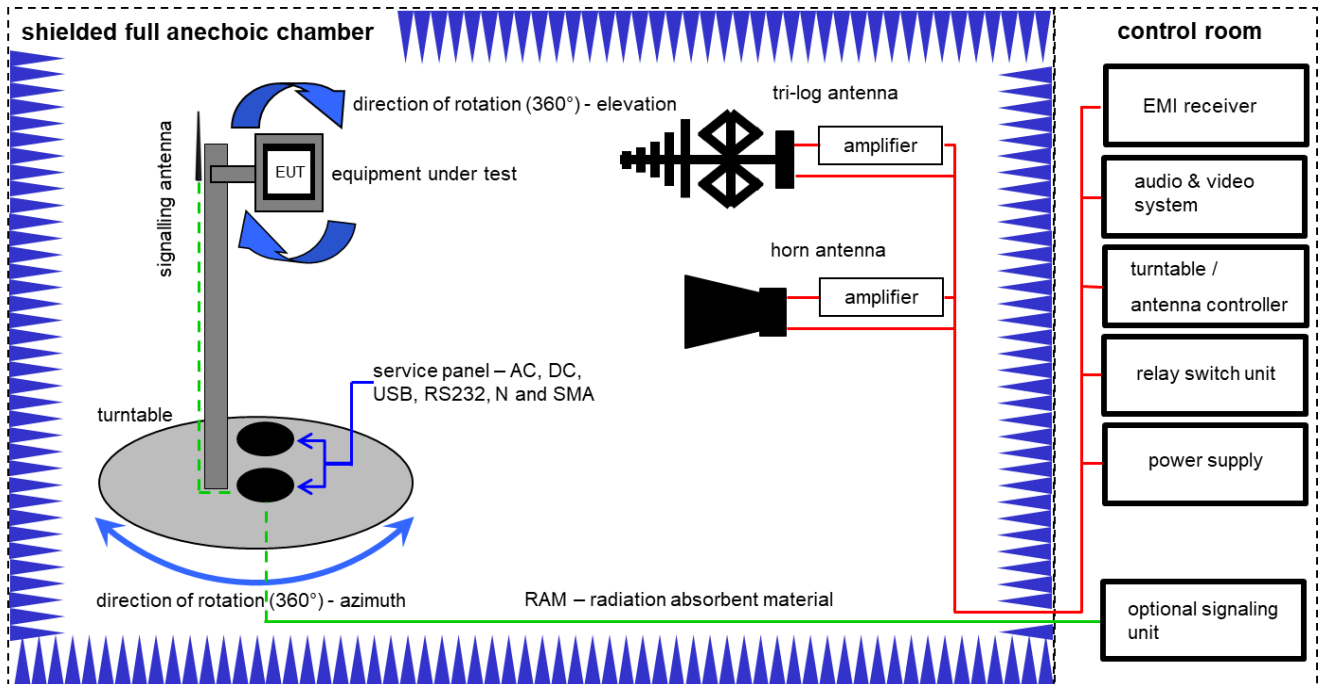
$$FS \text{ [dB}\mu\text{V/m]} = 12.35 \text{ [dB}\mu\text{V/m]} + 1.90 \text{ [dB]} + 16.80 \text{ [dB/m]} = 31.05 \text{ [dB}\mu\text{V/m]} \text{ (35.69 } \mu\text{V/m)}$$



**Equipment table:**

| No. | Setup | Equipment                                    | Type         | Manufacturer                  | Serial No. | INV. No.  | Kind of Calibration | Last Calibration | Next Calibration |
|-----|-------|----------------------------------------------|--------------|-------------------------------|------------|-----------|---------------------|------------------|------------------|
| 1   | A     | Switch-Unit                                  | 3488A        | HP                            | 2719A14505 | 300000368 | ev                  | -/-              | -/-              |
| 2   | A     | DC power supply, 60Vdc, 50A, 1200 W          | 6032A        | HP                            | 2920A04466 | 300000580 | ne                  | -/-              | -/-              |
| 3   | A     | Semi anechoic chamber                        | 3000023      | MWB AG                        |            | 300000551 | ne                  | -/-              | -/-              |
| 4   | A     | Antenna Tower                                | Model 2175   | ETS-Lindgren                  | 64762      | 300003745 | izw                 | -/-              | -/-              |
| 5   | A     | Positioning Controller                       | Model 2090   | ETS-Lindgren                  | 64672      | 300003746 | izw                 | -/-              | -/-              |
| 6   | A     | Turntable Interface-Box                      | Model 105637 | ETS-Lindgren                  | 44583      | 300003747 | izw                 | -/-              | -/-              |
| 7   | A     | TRILOG Broadband Test-Antenna 30 MHz - 3 GHz | VULB9163     | Schwarzbeck Mess - Elektronik | 295        | 300003787 | vIKI!               | 21.04.2021       | 20.04.2023       |
| 8   | A     | Turntable                                    | 2089-4.0     | EMCO                          |            | 300004394 | ne                  | -/-              | -/-              |
| 9   | A     | PC                                           | TecLine      | F+W                           |            | 300004388 | ne                  | -/-              | -/-              |
| 10  | A     | EMI Test Receiver                            | ESR3         | Rohde & Schwarz               | 102587     | 300005771 | k                   | 10.12.2020       | 09.12.2021       |

## 7.2 Shielded fully anechoic chamber



Measurement distance: tri-log antenna and horn antenna 3 meter

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)

Example calculation:

$$FS \text{ [dB}\mu\text{V/m]} = 40.0 \text{ [dB}\mu\text{V/m]} + (-35.8) \text{ [dB]} + 32.9 \text{ [dB/m]} = 37.1 \text{ [dB}\mu\text{V/m]} \text{ (71.61 } \mu\text{V/m)}$$

$$OP = AV + D - G + CA$$

(OP-radiated output power; AV-analyzer value; D-free field attenuation of measurement distance; G-antenna gain+amplifier gain; CA-loss signal path)

Example calculation:

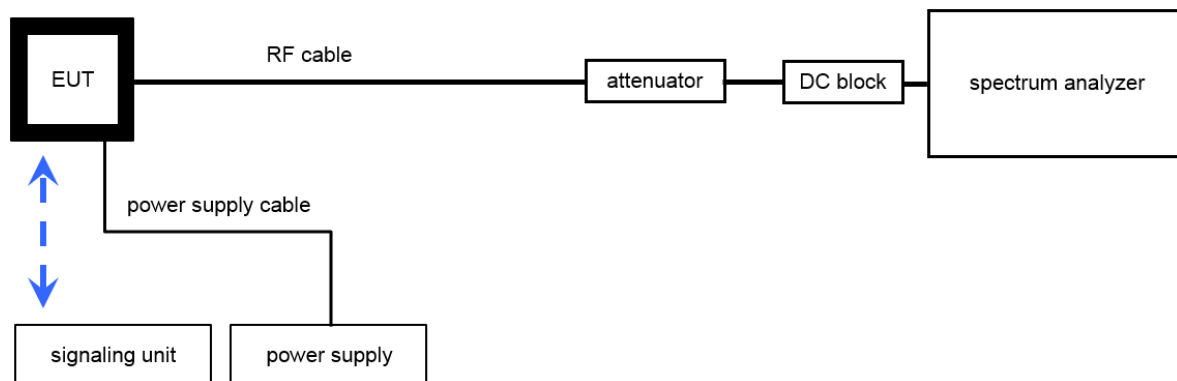
$$OP \text{ [dBm]} = -65.0 \text{ [dBm]} + 50 \text{ [dB]} - 20 \text{ [dBi]} + 5 \text{ [dB]} = -30 \text{ [dBm]} \text{ (1 } \mu\text{W)}$$

**Equipment table:**

| No. | Setup | Equipment                                      | Type               | Manufacturer         | Serial No. | INV. No.  | Kind of Calibration | Last Calibration | Next Calibration |
|-----|-------|------------------------------------------------|--------------------|----------------------|------------|-----------|---------------------|------------------|------------------|
| 1   | A,B   | DC power supply, 60Vdc, 50A, 1200 W            | 6032A              | HP                   | 2818A03450 | 300001040 | vKI!                | 09.12.2020       | 08.12.2023       |
| 2   | A     | Active Loop Antenna 9 kHz to 30 MHz            | 6502               | EMCO                 | 2210       | 300001015 | vKI!                | 13.06.2019       | 12.06.2022       |
| 3   | A,B   | Anechoic chamber                               | FAC 3/5m           | MWB / TDK            | 87400/02   | 300000996 | ev                  | -/-              | -/-              |
| 4   | B     | Double-Ridged Waveguide Horn Antenna 1-18.0GHz | 3115               | EMCO                 | 9107-3697  | 300001605 | vKI!                | 12.03.2021       | 11.03.2023       |
| 5   | A,B   | Switch / Control Unit                          | 3488A              | HP                   | *          | 300000199 | ne                  | -/-              | -/-              |
| 6   | A,B   | EMI Test Receiver 20Hz- 26,5GHz                | ESU26              | R&S                  | 100037     | 300003555 | k                   | 11.12.2020       | 10.12.2021       |
| 7   | B     | Highpass Filter                                | WHK1.1/15G-10SS    | Wainwright           | 3          | 300003255 | ev                  | -/-              | -/-              |
| 8   | B     | Broadband Amplifier 0.5-18 GHz                 | CBLU5184540        | CERNEX               | 22049      | 300004481 | ev                  | -/-              | -/-              |
| 9   | A,B   | 4U RF Switch Platform                          | L4491A             | Agilent Technologies | MY50000037 | 300004509 | ne                  | -/-              | -/-              |
| 10  | A,B   | NEXIO EMV-Software                             | BAT EMC V3.20.0.26 | EMCO                 |            | 300004682 | ne                  | -/-              | -/-              |
| 11  | A,B   | PC                                             | ExOne              | F+W                  |            | 300004703 | ne                  | -/-              | -/-              |

### 7.3 Conducted measurements

#### Conducted measurements normal conditions



$$OP = AV + CA$$

(OP-output power; AV-analyzer value; CA-loss signal path)

#### Example calculation:

$$OP \text{ [dBm]} = 6.0 \text{ [dBm]} + 11.7 \text{ [dB]} = 17.7 \text{ [dBm]} \text{ (58.88 mW)}$$

#### Equipment table:

| No. | Setup | Equipment       | Type    | Manufacturer     | Serial No. | INV. No.  | Kind of Calibration | Last Calibration | Next Calibration |
|-----|-------|-----------------|---------|------------------|------------|-----------|---------------------|------------------|------------------|
| 1   | A     | RF Cable BNC    | RG58    | Huber & Suhner   | -/-        | 400001209 | ne                  | -/-              | -/-              |
| 2   | A     | Power Supply    | HMP2020 | Rohde & Schwarz  | 101961     | 300006102 | k                   | 04.08.2020       | 03.08.2022       |
| 3   | A     | Signal analyzer | FSW26   | Rohde&Schwarz    | 101455     | 300004528 | k                   | 25.02.2021       | 24.02.2022       |
| 4   | A     | Loop Antenna    | -/-     | ZEG TS Steinfurt | -/-        | 400001208 | ne                  | -/-              | -/-              |

## 8 Sequence of testing

### 8.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

#### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, it is placed on a table with 0.8 m height.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

#### Premeasurement\*

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

#### Final measurement

- Identified emissions during the pre-measurement are maximized by the software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated about its vertical axis for maximum response at each azimuth about the EUT. (For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT)
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

<sup>\*)</sup>Note: The sequence will be repeated three times with different EUT orientations.

## 8.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position  $\pm 45^\circ$  and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

### 8.3 Sequence of testing radiated spurious 1 GHz to 18 GHz

#### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

#### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

#### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

## 9 Measurement uncertainty

| Measurement uncertainty                            |             |
|----------------------------------------------------|-------------|
| Test case                                          | Uncertainty |
| Occupied bandwidth                                 | ± used RBW  |
| Field strength of the fundamental                  | ± 3 dB      |
| Field strength of the harmonics and spurious       | ± 3 dB      |
| Receiver spurious emissions and cabinet radiations | ± 3 dB      |
| Conducted limits                                   | ± 2.6 dB    |



## 10 Summary of measurement results

|                                     |                                                                                                                          |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> | No deviations from the technical specifications were ascertained                                                         |
| <input type="checkbox"/>            | There were deviations from the technical specifications ascertained                                                      |
| <input type="checkbox"/>            | This test report is only a partial test report.<br>The content and verdict of the performed test cases are listed below. |

| TC Identifier | Description                                          | Verdict    | Date       | Remark |
|---------------|------------------------------------------------------|------------|------------|--------|
| RF-Testing    | CFR Part 15<br>RSS 210, Issue 10<br>RSS-Gen, Issue 5 | See table! | 2021-12-10 | -/-    |

| Test specification clause                | Test case                                                   | Temperature conditions | Power source voltages | C                                   | NC                       | NA                                  | NP                       | Remark |
|------------------------------------------|-------------------------------------------------------------|------------------------|-----------------------|-------------------------------------|--------------------------|-------------------------------------|--------------------------|--------|
| § 15.35 (c)<br>RSS-Gen, Issue 5          | Timing of the transmitter<br>(Duty cycle correction factor) | Nominal                | Nominal               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> | -/-    |
| § 15.231 (a) (1)<br>RSS-210 Issue 10     | Switch off time                                             | Nominal                | Nominal               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> | -/-    |
| § 15.231 (b) (3) (c)<br>RSS-210 Issue 10 | Emission bandwidth                                          | Nominal                | Nominal               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> | -/-    |
| § 15.231 (b)<br>RSS-210 Issue 10         | Fieldstrength of Fundamental                                | Nominal                | Nominal               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> | -/-    |
| § 15.209<br>RSS-210 Issue 10             | Fieldstrength of harmonics and spurious                     | Nominal                | Nominal               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> | -/-    |
| § 15.209<br>RSS-Gen, Issue 5             | Receiver spurious emissions (radiated)                      | Nominal                | Nominal               | <input type="checkbox"/>            | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | -/-    |

**Note:** C = Compliant; NC = Not compliant; NA = Not applicable; NP = Not performed

### 10.1 Additional comments

Reference documents: Customer Questionnaire1\_ACCM\_kvde\_20210421.docx

Special test software: ACCM+ RCK test.exe (transmitter timing set in testsoftware)

Configuration descriptions: test-bin file table (see page 107)

## 11 Measurement results

### 11.1 Timing of the transmitter

#### Measurement:

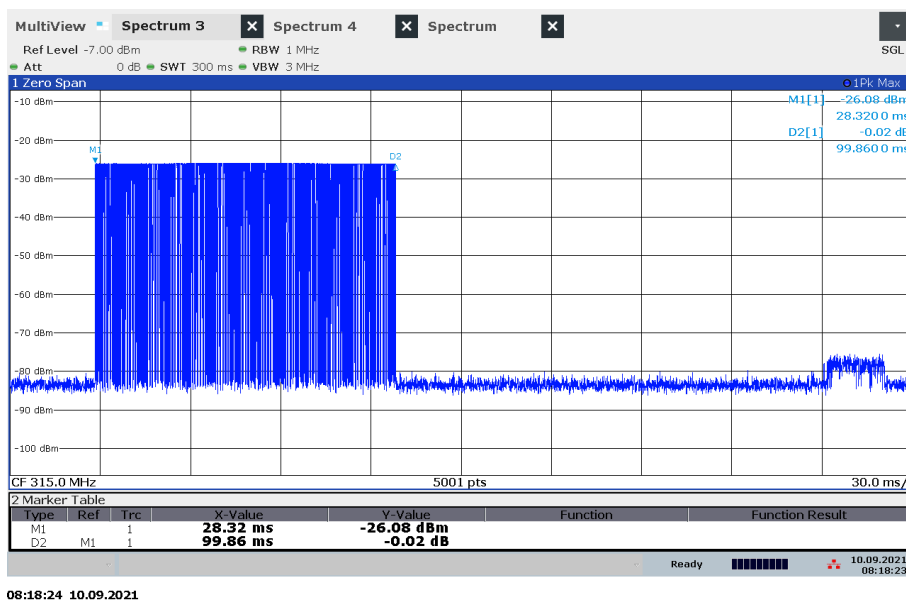
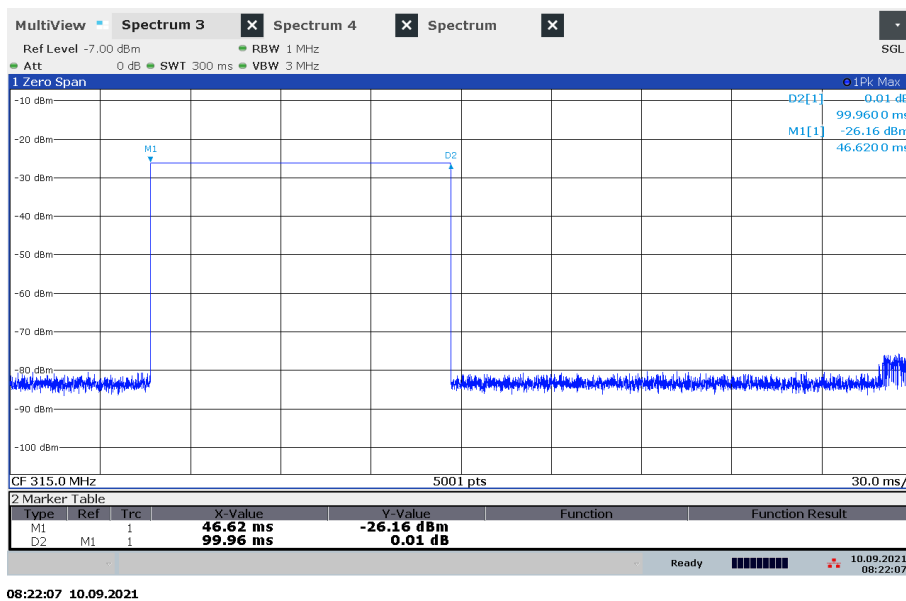
| Measurement parameter |                            |
|-----------------------|----------------------------|
| Detector:             | Peak                       |
| Sweep time:           | Depends on the pulse train |
| Resolution bandwidth: | 1 MHz                      |
| Video bandwidth:      | 3 MHz                      |
| Span:                 | Zero                       |
| Trace-Mode:           | Single sweep               |
| Test setup            | 7.3 A                      |

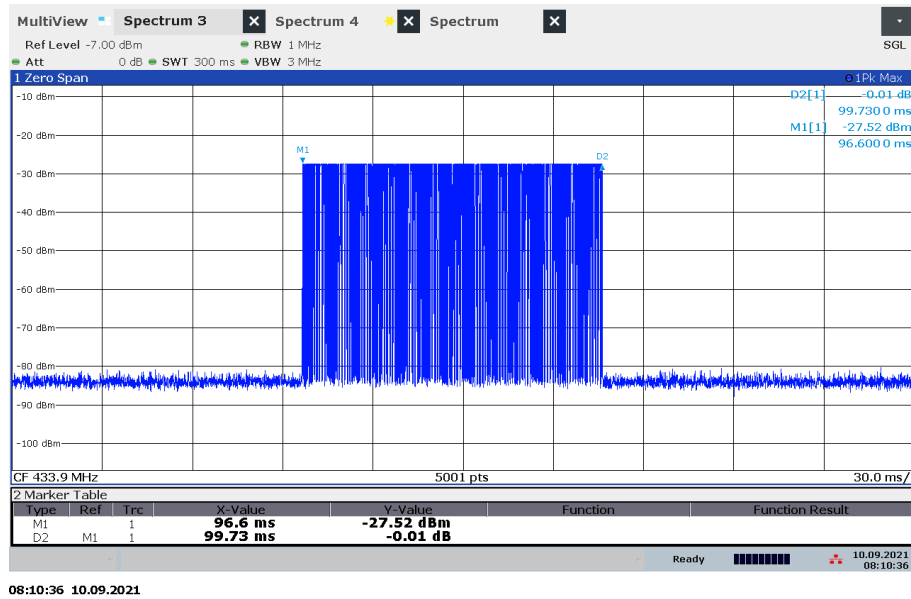
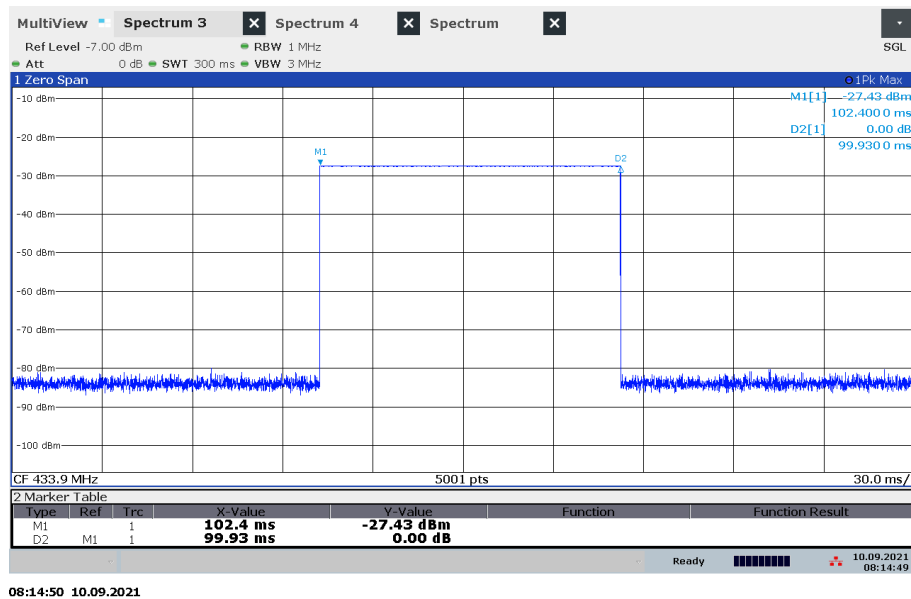
#### Limits:

| FCC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | IC |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| (c) Unless otherwise specified, e.g. Section 15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification. |    |

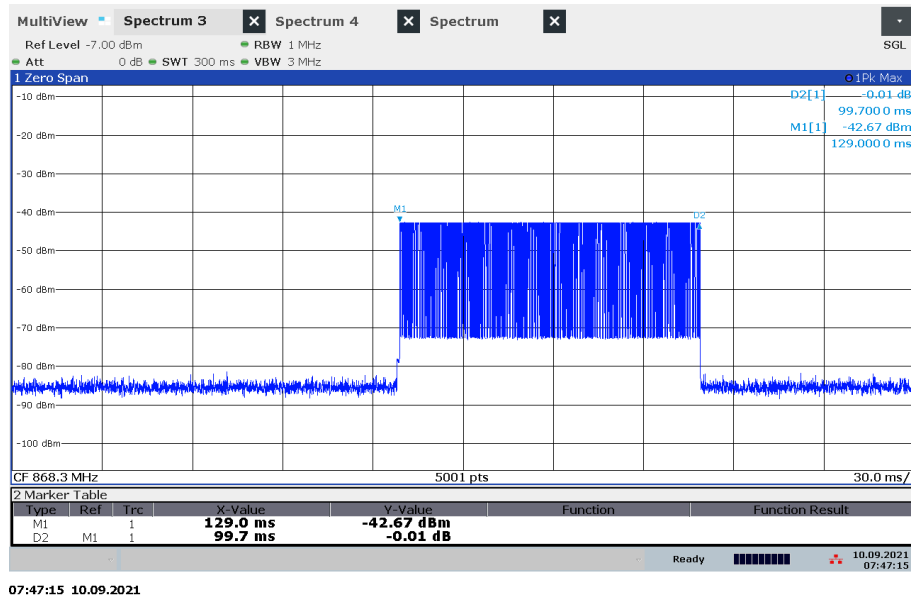
#### Results:

| maximum frame length |            |                        |
|----------------------|------------|------------------------|
| frequency            | modulation | max. frame length / ms |
| 315.0 MHz            | ASK        | 99.86                  |
|                      | FSK        | 99.96                  |
| 433.9 MHz            | ASK        | 99.73                  |
|                      | FSK        | 102.4                  |
| 868.3 MHz            | ASK        | 99.7                   |
|                      | FSK        | 99.4                   |
| 915.0 MHz            | ASK        | 100.04                 |
|                      | FSK        | 99.8                   |

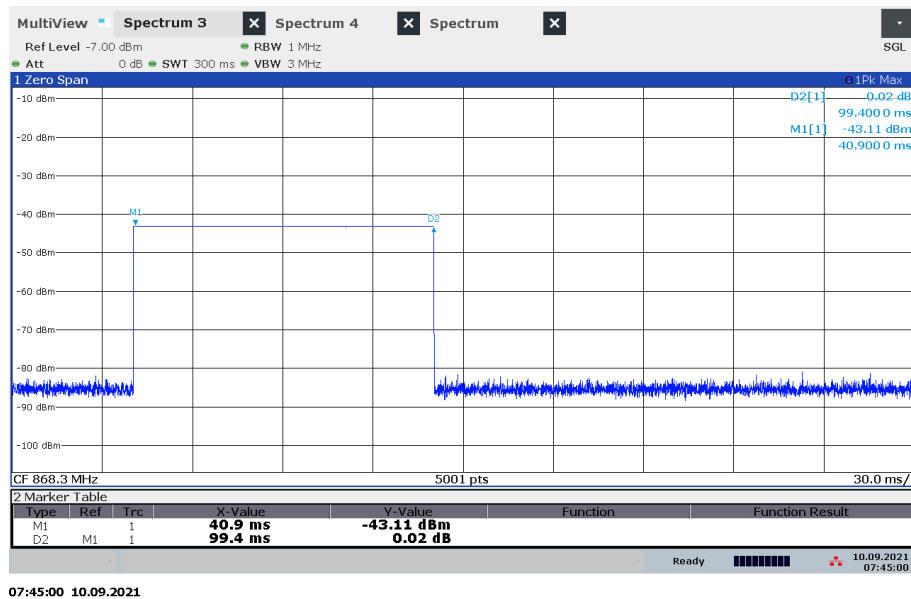
**Plot 1: 315 MHz ASK max. frame length****Plot 2: 315 MHz FSK max. frame length**

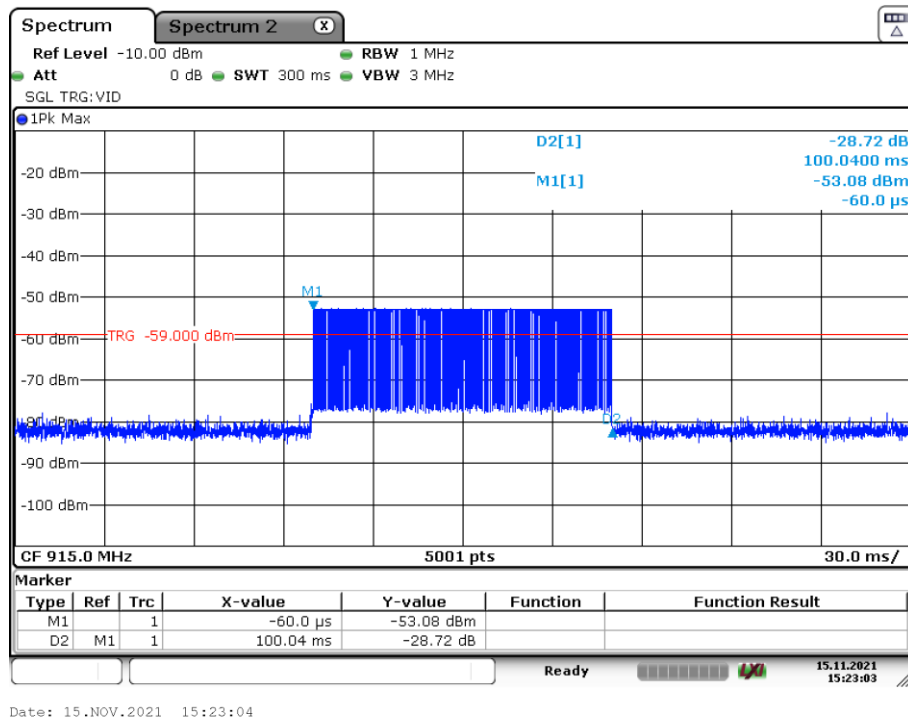
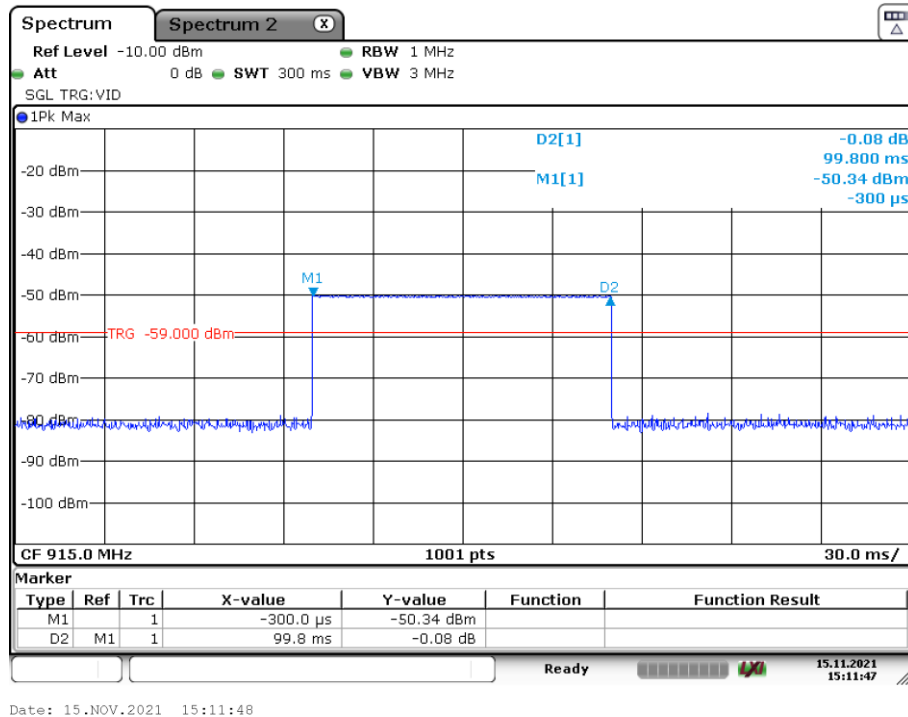
**Plot 3: 433.9 MHz ASK max. frame length****Plot 4: 433.9 MHz FSK max. frame length**

Plot 5: 868.3 MHz ASK max. frame length



Plot 6: 868.3 MHz FSK max. frame length



**Plot 7: 915.0 MHz ASK max. frame length****Plot 8: 915.0 MHz FSK max. frame length**

## 11.2 Switch off time

### Measurement:

| Measurement parameter   |               |
|-------------------------|---------------|
| Detector:               | Peak          |
| Sweep time:             | 6 s / 11 s    |
| Resolution bandwidth:   | 1 MHz         |
| Video bandwidth:        | 3 MHz         |
| Span:                   | Zero          |
| Trace-Mode:             | Single sweep  |
| Test setup              | 7.3 A         |
| Measurement uncertainty | see chapter 9 |

### Limits:

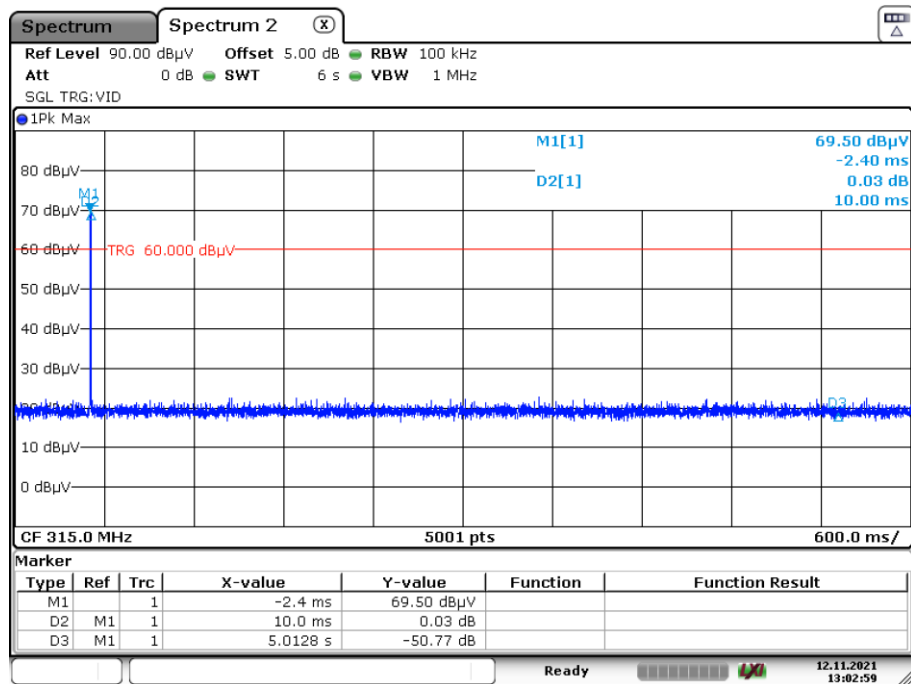
| FCC                                                                                                                                                        | IC |
|------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released. |    |

*In addition, devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.*

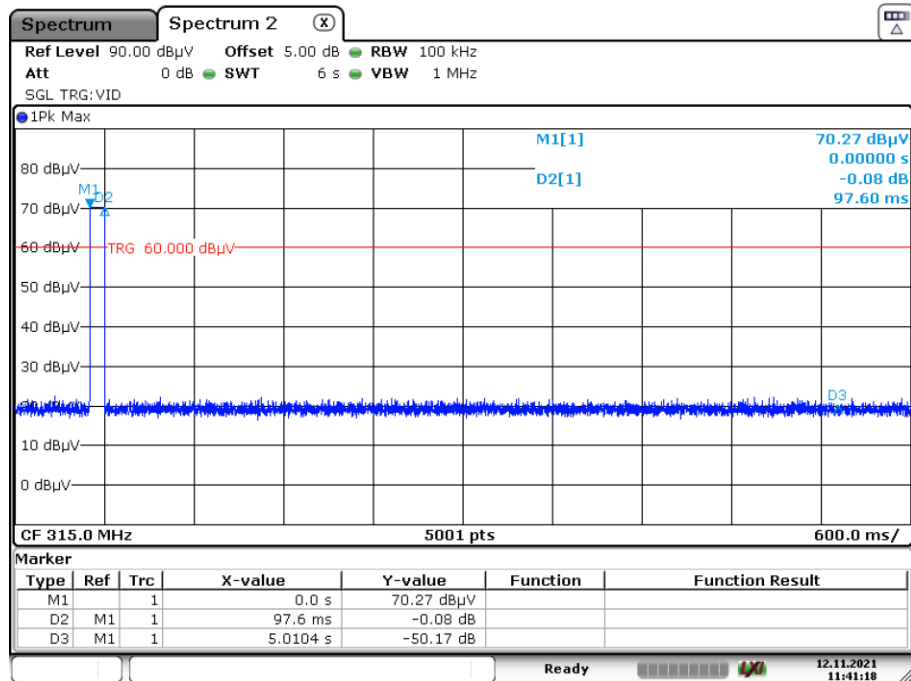
### Results:

The EUT automatically ceases transmission within 5000 ms after activation

| transmitter ceasing time after activation (limit < 5 sec.) |            |              |
|------------------------------------------------------------|------------|--------------|
| frequency                                                  | duty cycle | ceasing time |
| 315.0 MHz                                                  | 10 ms      | 10 ms        |
|                                                            | 100 ms     | 97.6 ms      |
| 433.9 MHz                                                  | 10 ms      | 10 ms        |
|                                                            | 100 ms     | 100 ms       |
| 868.3 MHz                                                  | 10 ms      | 10 ms        |
|                                                            | 100 ms     | 100 ms       |
| 915.0 MHz                                                  | 10 ms      | 10 ms        |
|                                                            | 100 ms     | 100 ms       |

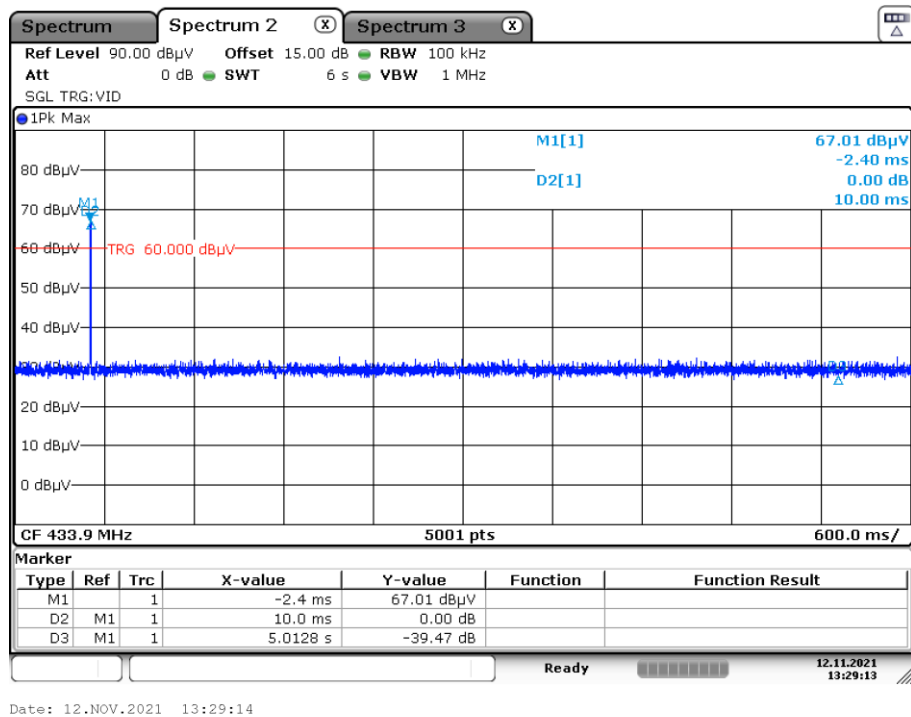
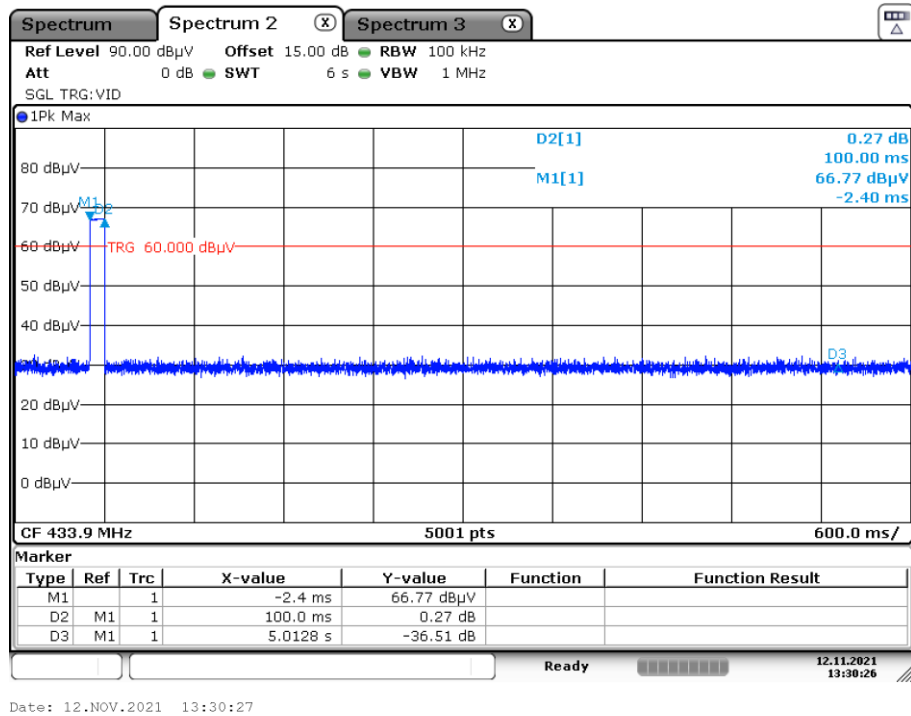
**Plot 1: TX on time 315 MHz low duty cycle**

Date: 12.NOV.2021 13:03:00

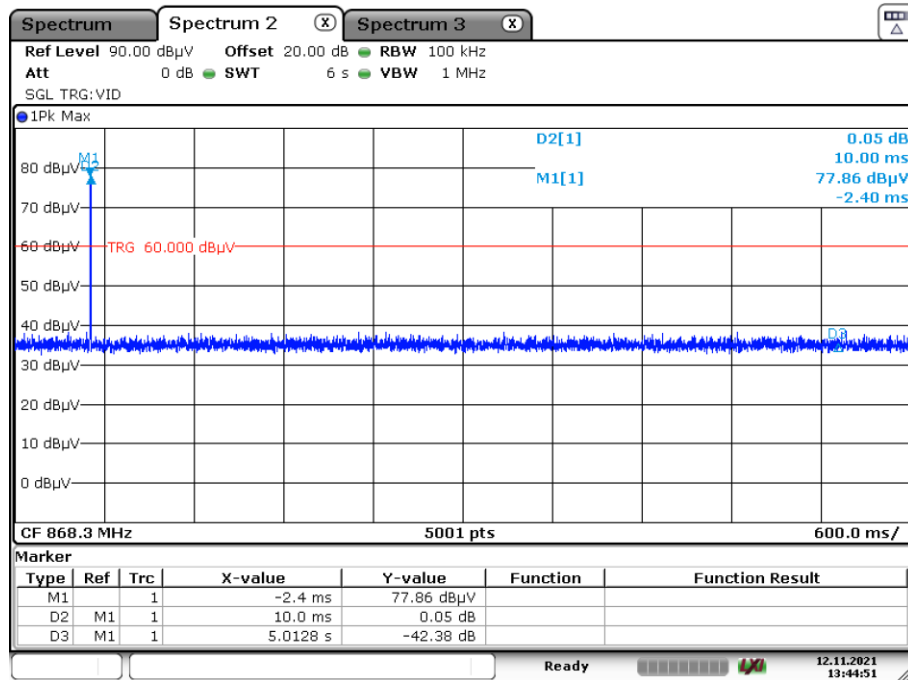
**Plot 2: TX on time 315 MHz high duty cycle**

Date: 12.NOV.2021 11:41:19



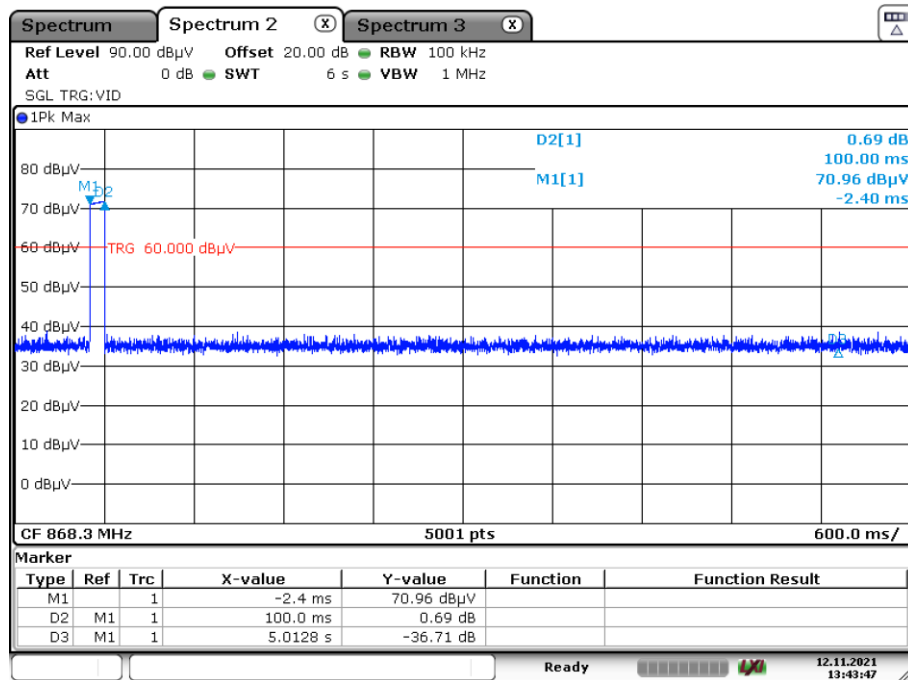
**Plot 3: TX on time 433 MHz low duty cycle****Plot 4: TX on time 433 MHz high duty cycle**

Plot 5: TX on time 868.3 MHz low duty cycle

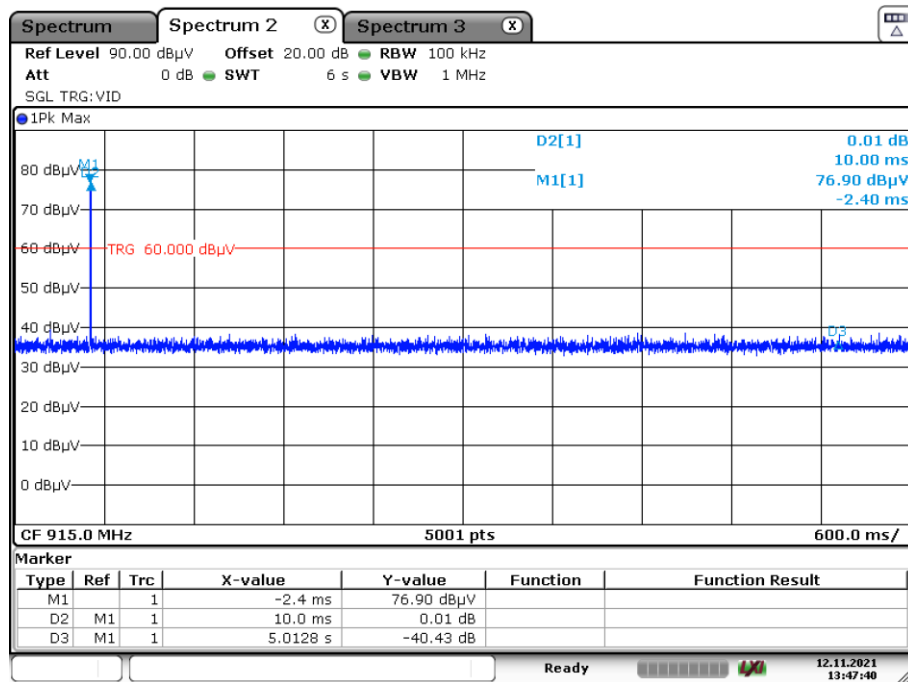


Date: 12.NOV.2021 13:44:51

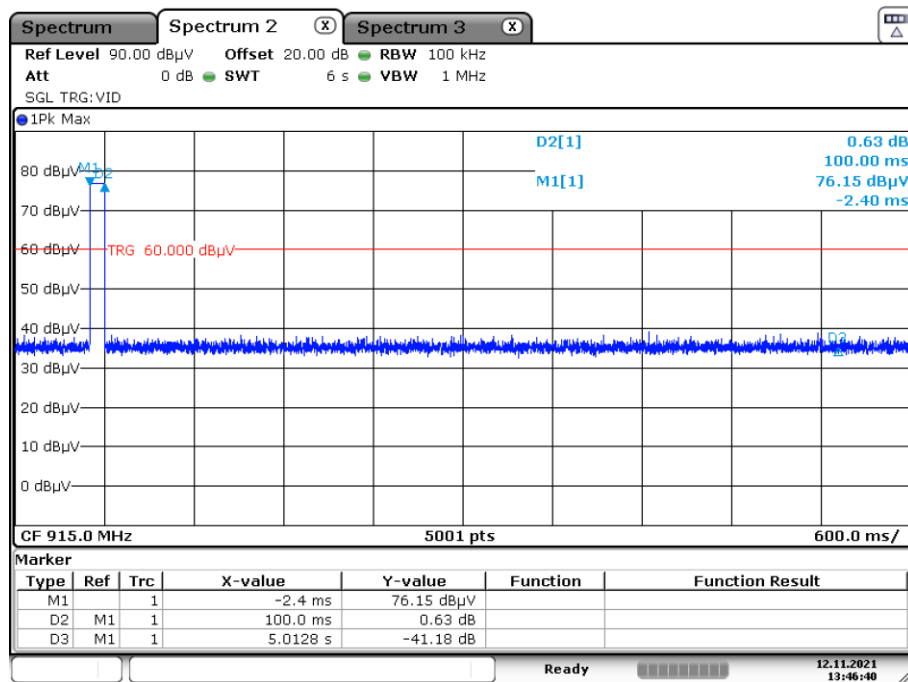
Plot 6: TX on time 868.3 MHz high duty cycle



Date: 12.NOV.2021 13:43:48

**Plot 7: TX on time 915 MHz low duty cycle**

Date: 12.NOV.2021 13:47:40

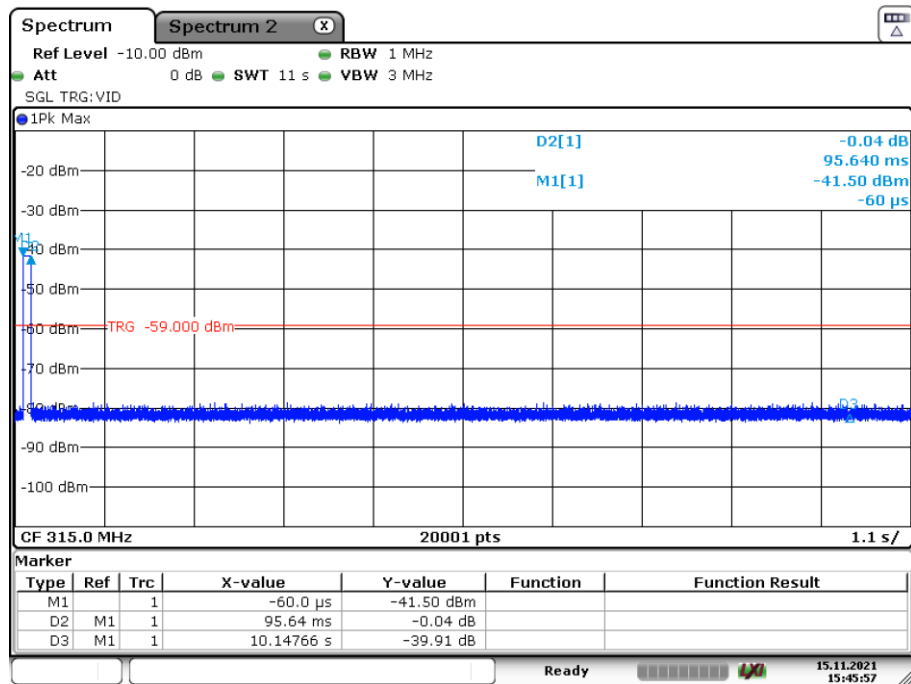
**Plot 8: TX on time 915 MHz high duty cycle**

Date: 12.NOV.2021 13:46:41

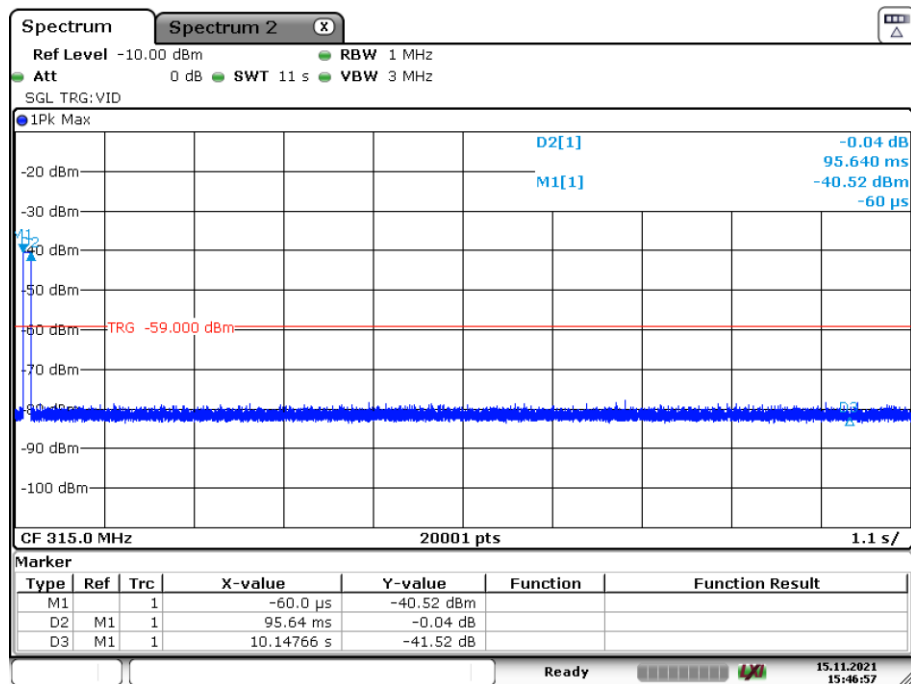
**Results:**

silent period between two transmissions > 10 seconds, see following plots

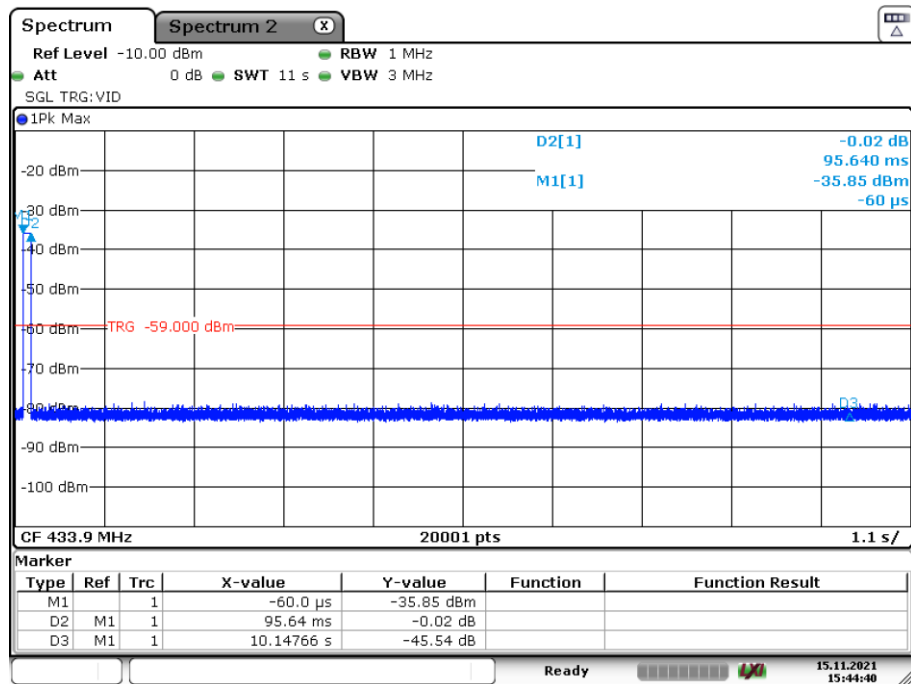
| silent period between two transmissions (limit > 10 sec.) |            |               |
|-----------------------------------------------------------|------------|---------------|
| frequency                                                 | modulation | silent period |
| 315.0 MHz                                                 | ASK        | > 10 sec.     |
|                                                           | FSK        | > 10 sec.     |
| 433.9 MHz                                                 | ASK        | > 10 sec.     |
|                                                           | FSK        | > 10 sec.     |
| 868.3 MHz                                                 | ASK        | > 10 sec.     |
|                                                           | FSK        | > 10 sec.     |
| 915.0 MHz                                                 | ASK        | > 10 sec.     |
|                                                           | FSK        | > 10 sec.     |

**Plot 1: silent time 315 MHz ASK modulation**


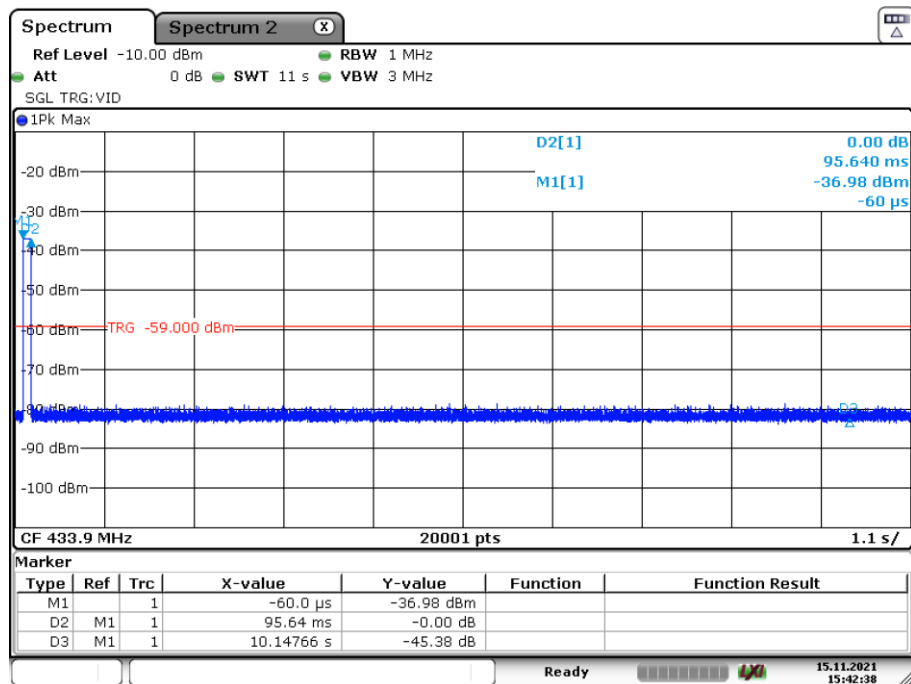
Date: 15.NOV.2021 15:45:57

**Plot 2: silent time 315 MHz FSK modulation**


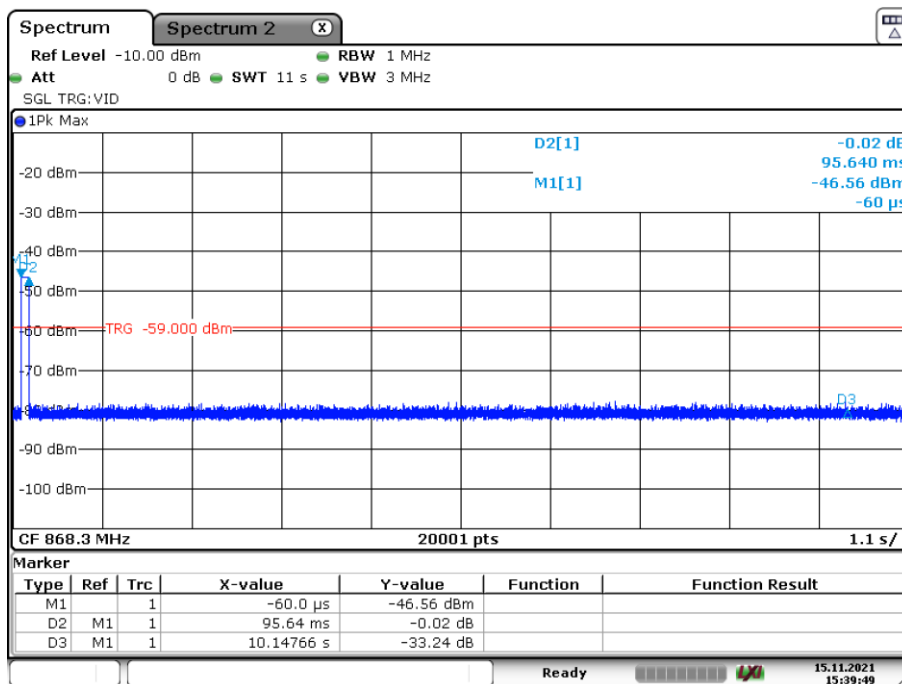
Date: 15.NOV.2021 15:46:57

**Plot 3: silent time 433.9 MHz ASK modulation**

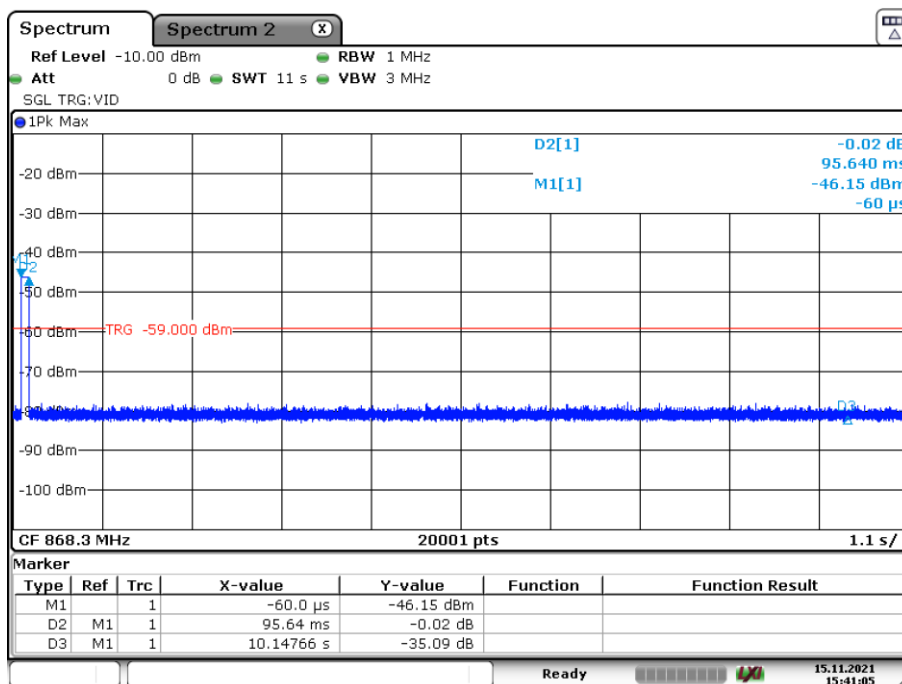
Date: 15.NOV.2021 15:44:40

**Plot 4: silent time 433.9 MHz FSK modulation**

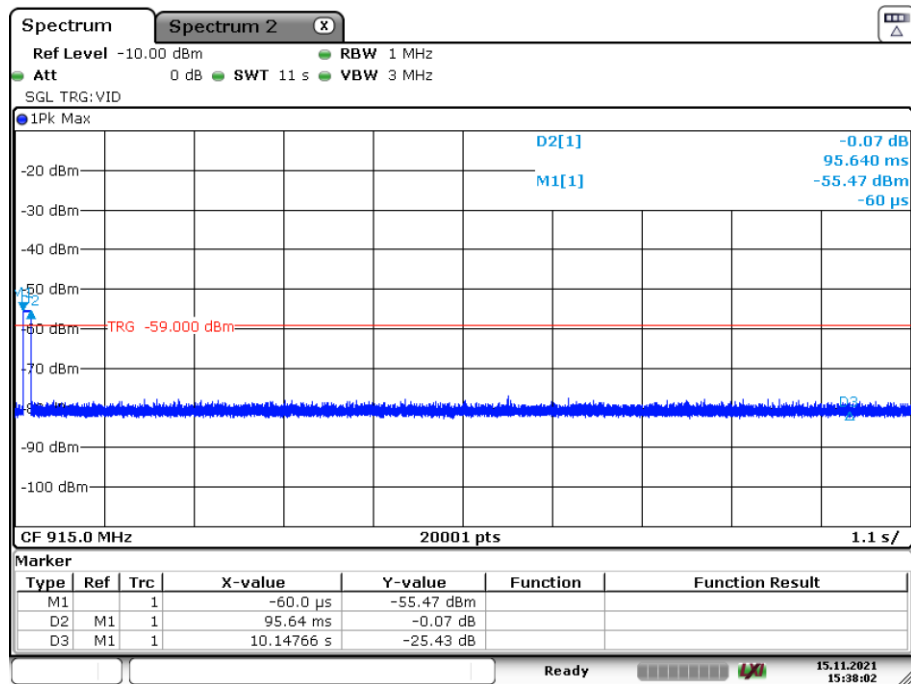
Date: 15.NOV.2021 15:42:38

**Plot 5: silent time 868.3 MHz ASK modulation**

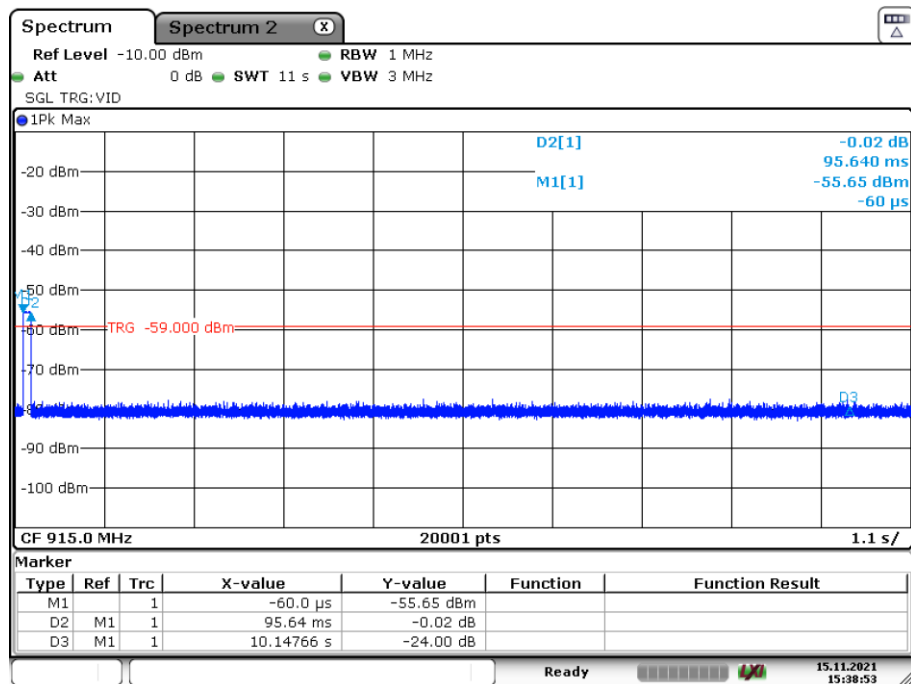
Date: 15.NOV.2021 15:39:50

**Plot 6: silent time 868.3 MHz FSK modulation**

Date: 15.NOV.2021 15:41:05

**Plot 7: silent time 915.0 MHz ASK modulation**

Date: 15.NOV.2021 15:38:03

**Plot 8: silent time 915.0 MHz FSK modulation**

Date: 15.NOV.2021 15:38:54



### 11.3 Emission bandwidth

#### Measurement:

Measurement of the 99 % bandwidth of the modulated signal

| Measurement parameter |                     |
|-----------------------|---------------------|
| Detector:             | Peak                |
| Sweep time:           | see plots           |
| Resolution bandwidth: | 1% to 5% of the OBW |
| Video bandwidth:      | 3 x RBW             |
| Span:                 | 500 kHz             |
| Trace-Mode:           | Max. hold           |

#### Limits:

| FCC                                                                                                                            | IC |
|--------------------------------------------------------------------------------------------------------------------------------|----|
| The OBW shall not be wider than 0.25% of the centre frequency in the frequency range 70 MHz to 900 MHz and 0.50% above 900 MHz |    |

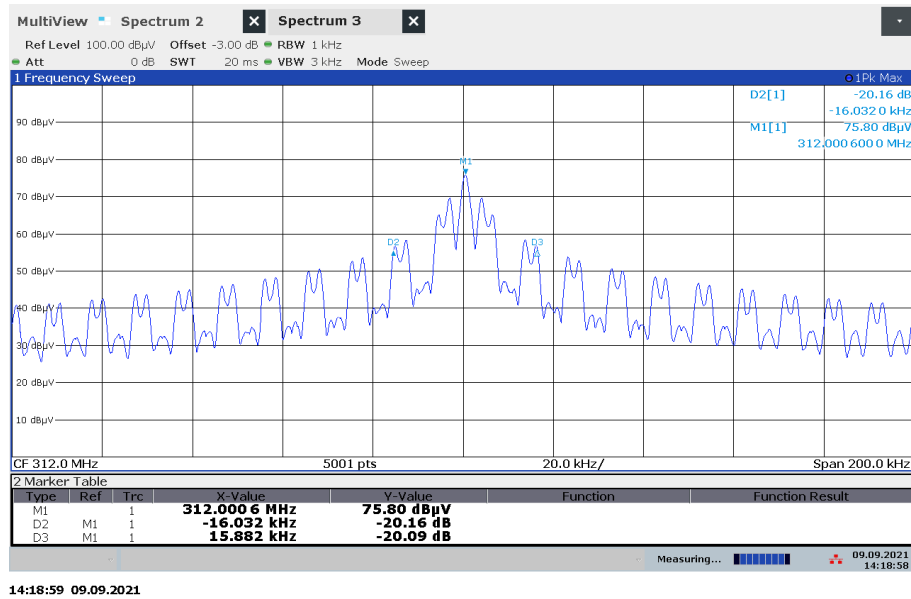
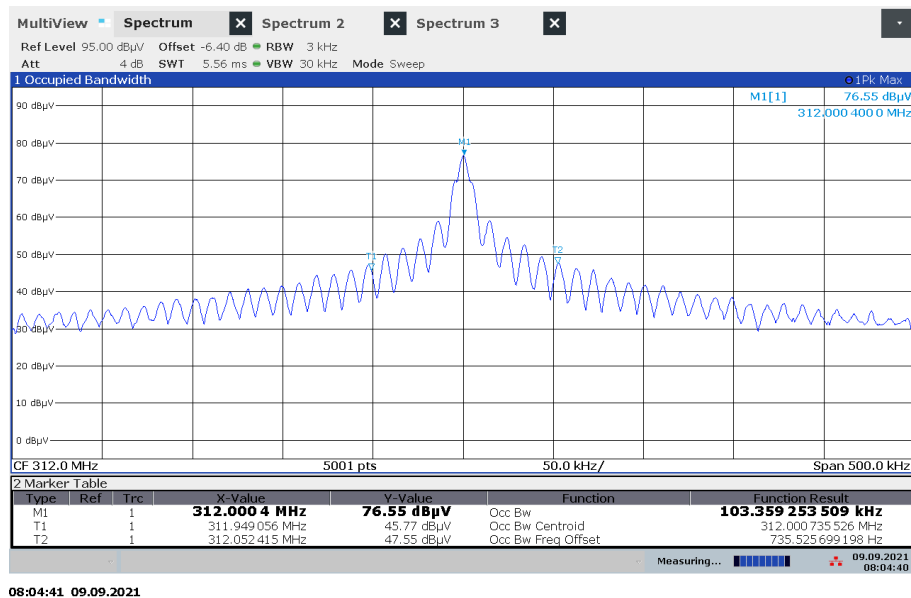
**Result:**

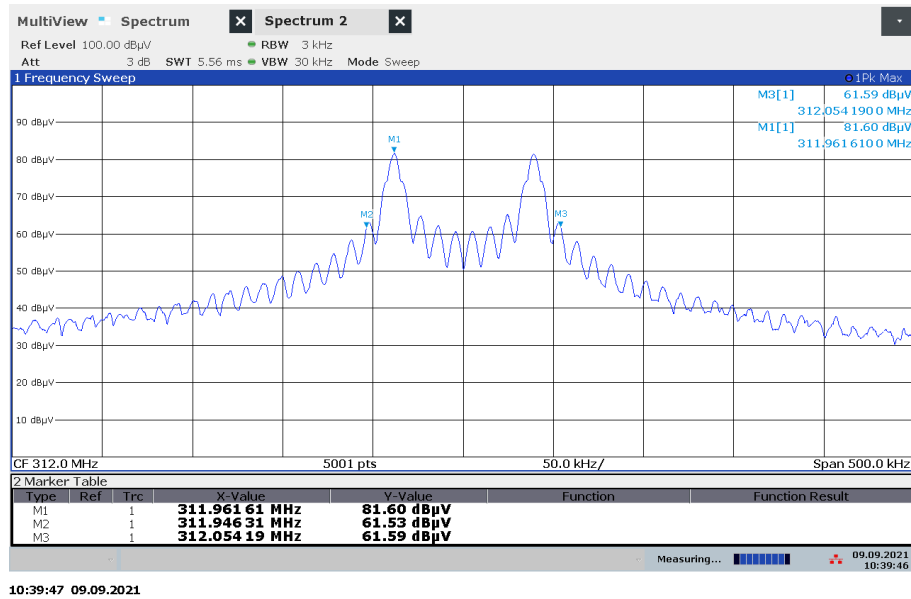
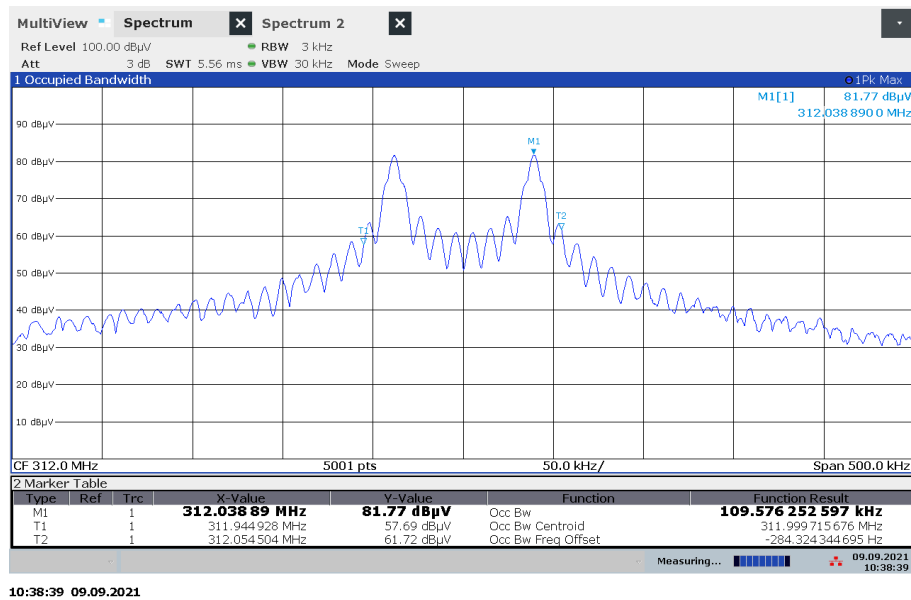
- **ASK modulation**

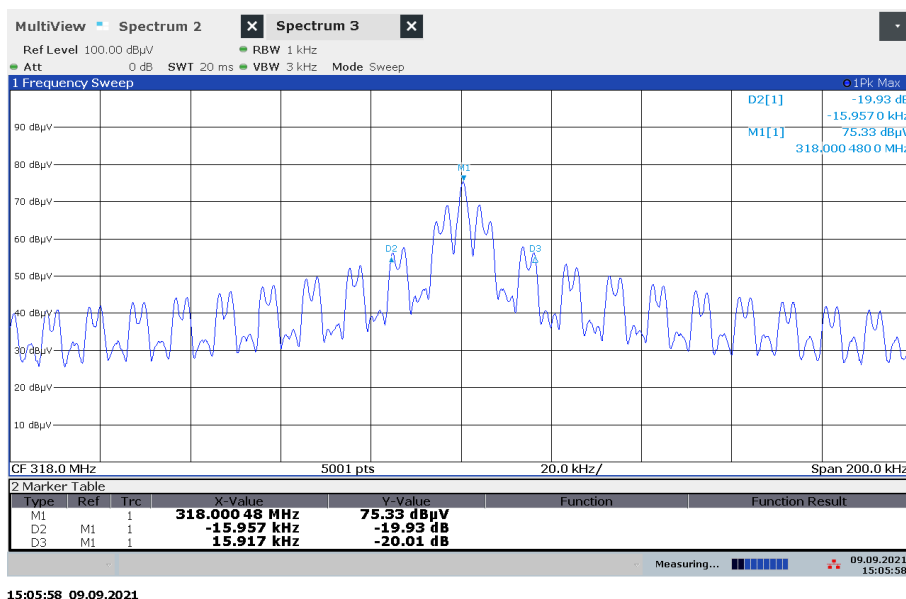
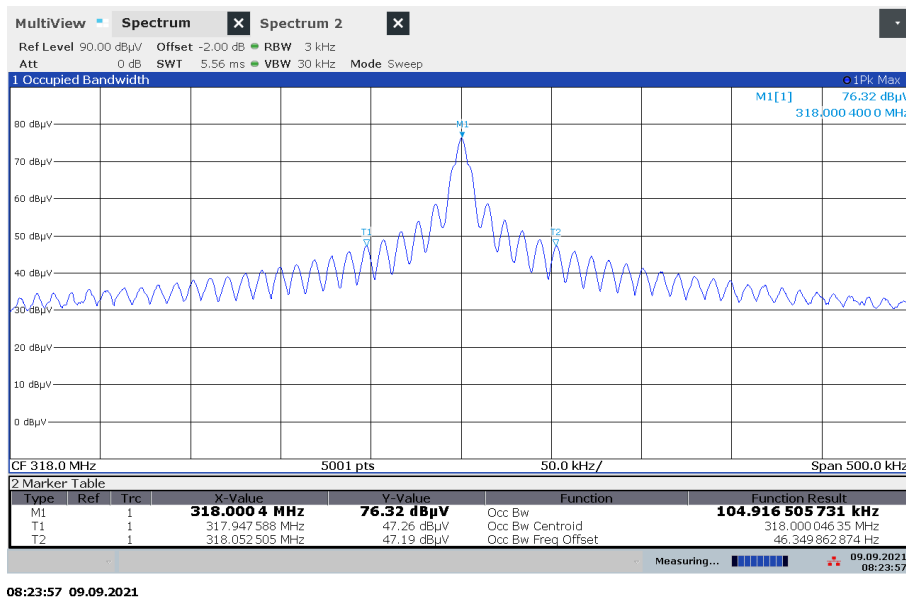
| Center Frequency<br>(MHz) | ASK modulation                         |         |                 |
|---------------------------|----------------------------------------|---------|-----------------|
|                           | Signal bandwidth / kHz                 |         |                 |
|                           | OBW 99% limit<br>20 dB-bandwidth limit | OBW 99% | 20 dB-bandwidth |
| 312.0                     | 780.0                                  | 103.359 | 31.910          |
| 318.0                     | 795.0                                  | 104.916 | 31.870          |
| 431.9                     | 1079.75                                | 108.872 | 31.990          |
| 435.9                     | 1089.75                                | 107.538 | 31.960          |
| 868.3                     | 2170.75                                | 115.291 | 31.870          |
| 902.0                     | 4510.00                                | 117.362 | 31.830          |
| 915.0                     | 4575.00                                | 125.626 | 31.790          |
| 928.0                     | 4640.00                                | 125.500 | 31.910          |

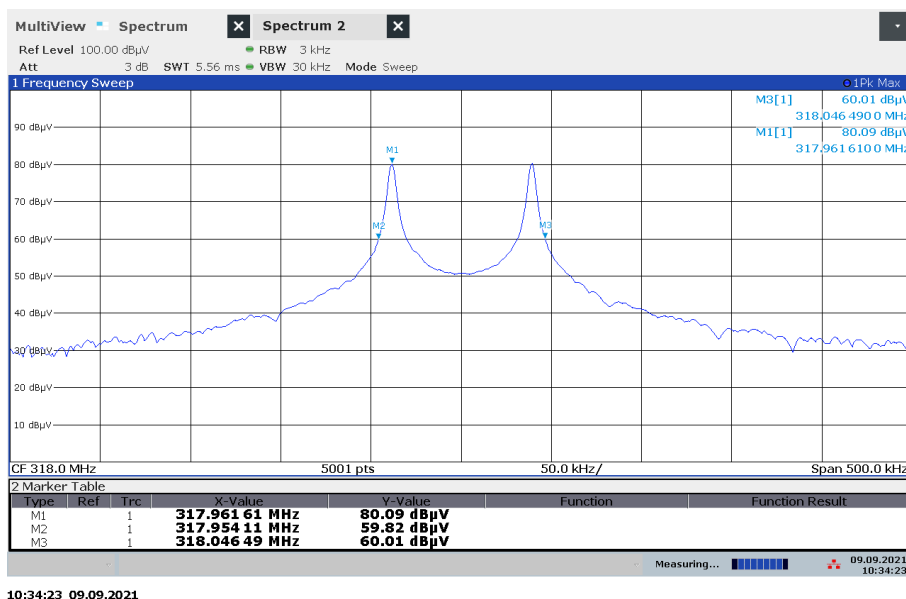
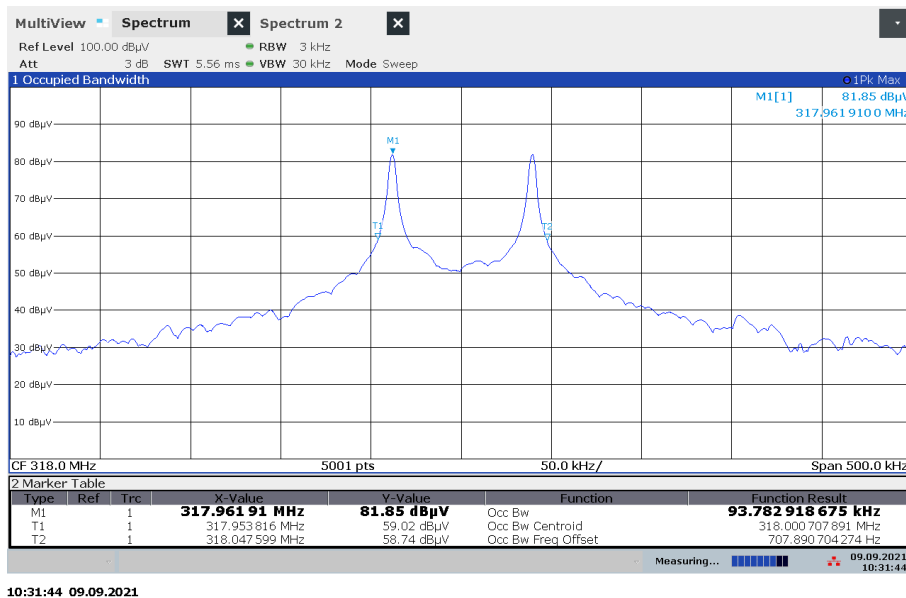
- **FSK modulation**

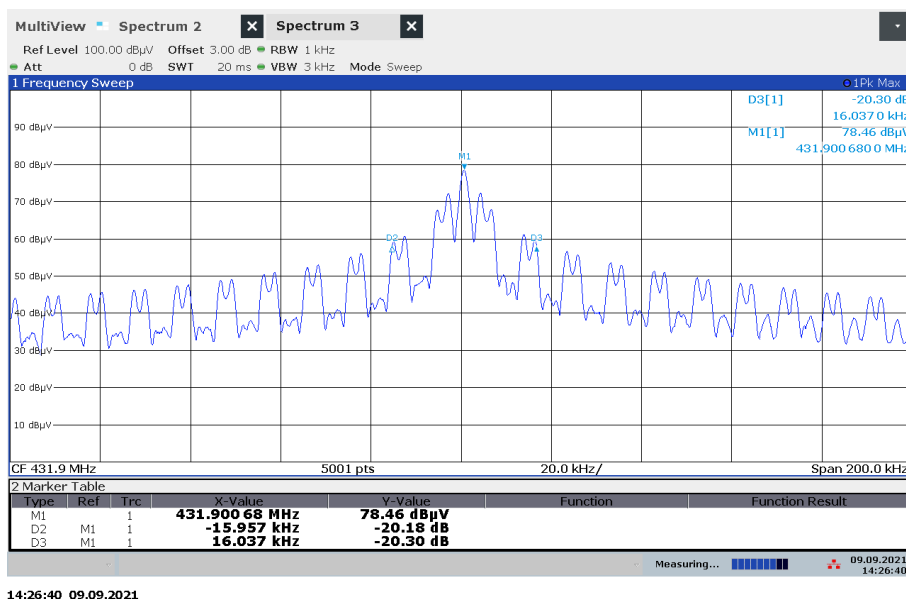
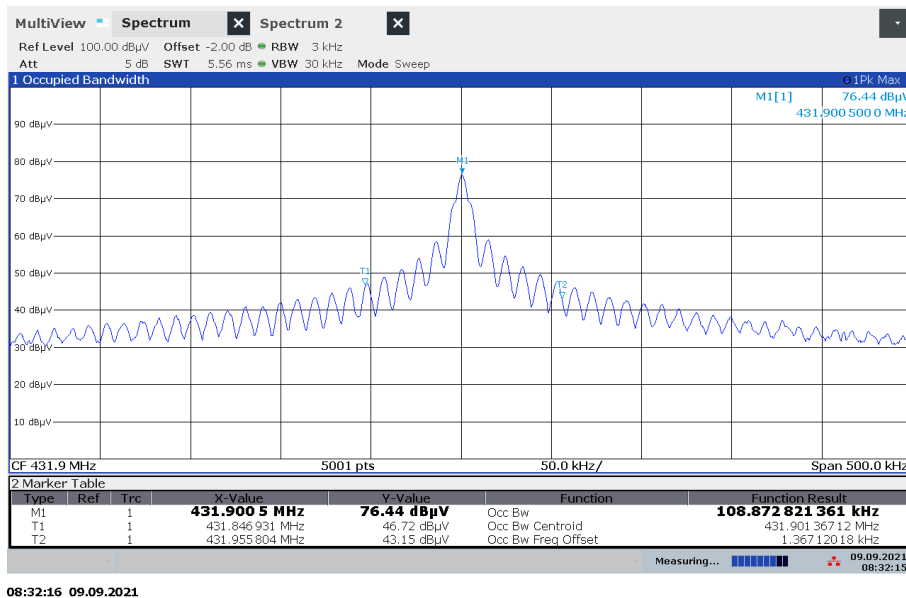
| Center Frequency<br>(MHz) | FSK modulation                         |         |                 |
|---------------------------|----------------------------------------|---------|-----------------|
|                           | Signal bandwidth / kHz                 |         |                 |
|                           | OBW 99% limit<br>20 dB-bandwidth limit | OBW 99% | 20 dB-bandwidth |
| 312.0                     | 780.0                                  | 109.576 | 107.880         |
| 318.0                     | 795.0                                  | 93.782  | 92.380          |
| 431.9                     | 1079.75                                | 100.237 | 93.180          |
| 435.9                     | 1089.75                                | 115.769 | 94.480          |
| 868.3                     | 2170.75                                | 122.514 | 101.480         |
| 902.0                     | 4510.00                                | 125.955 | 108.480         |
| 915.0                     | 4575.00                                | 126.159 | 108.780         |
| 928.0                     | 4640.00                                | 108.667 | 92.880          |

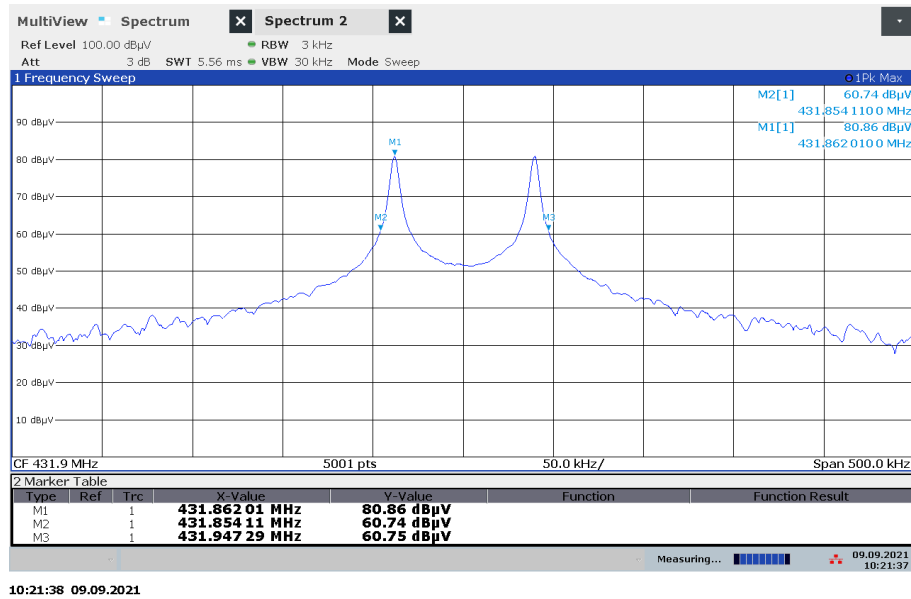
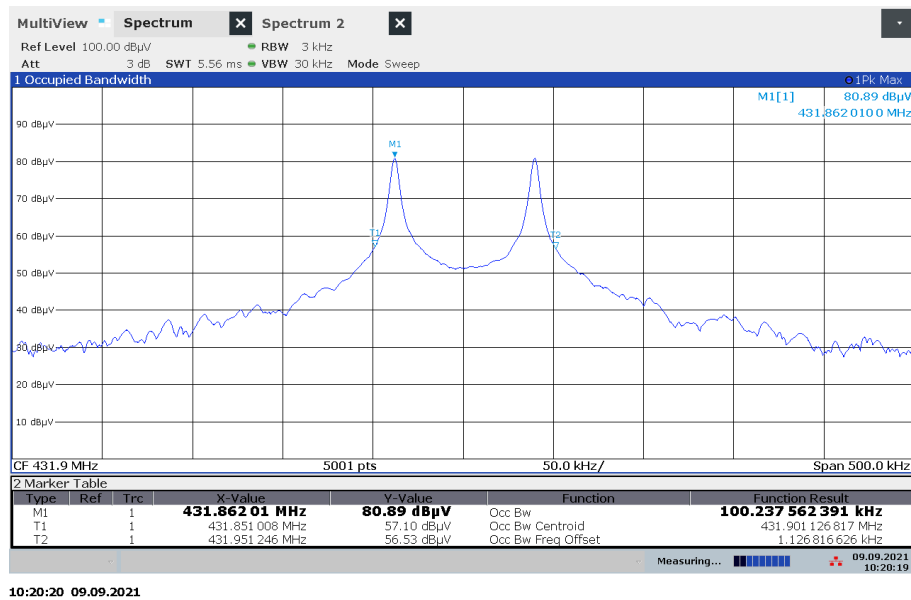
**Plot 1: Emissions bandwidth – 312.0 MHz ASK****Plot 2: 99 % emission bandwidth – 312.0 MHz ASK**

**Plot 3: Emissions bandwidth – 312.0 MHz FSK****Plot 4: 99 % emission bandwidth – 312.0 MHz FSK**

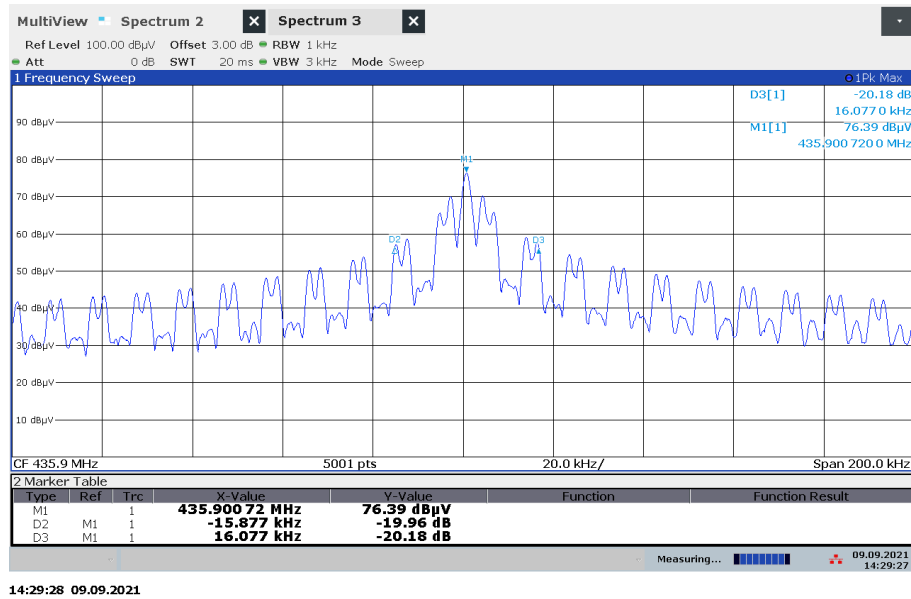
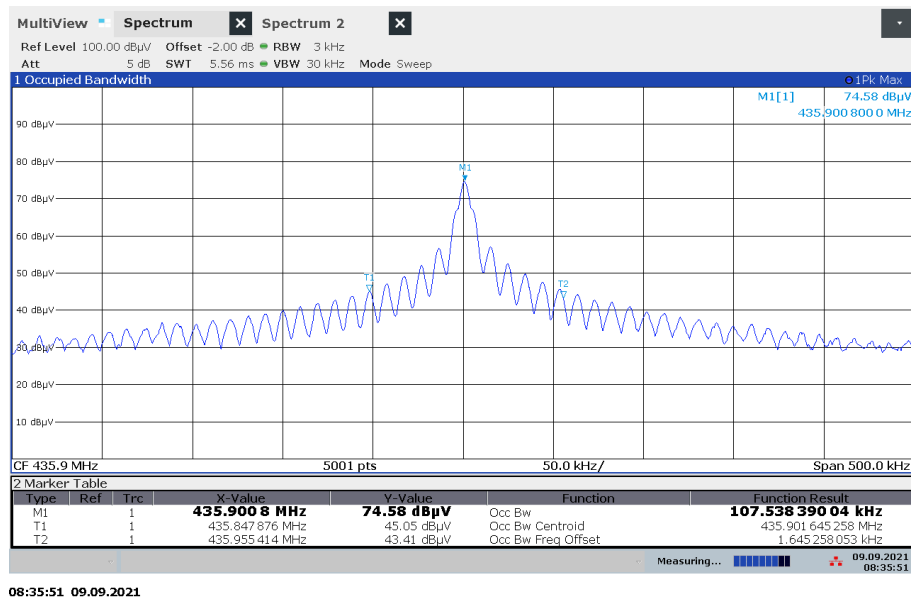
**Plot 1: Emissions bandwidth – 318.0 MHz ASK****Plot 2: 99 % emission bandwidth – 318.0 MHz ASK**

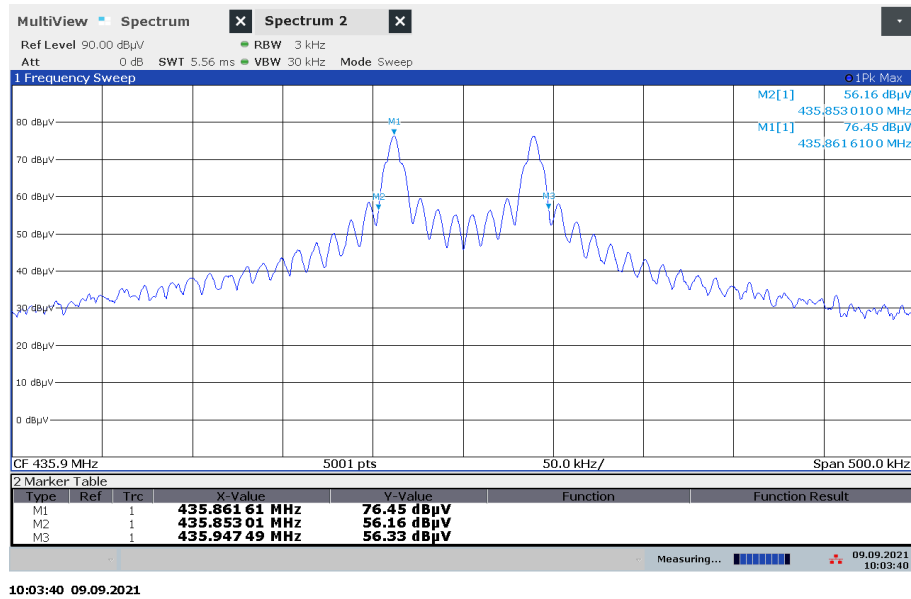
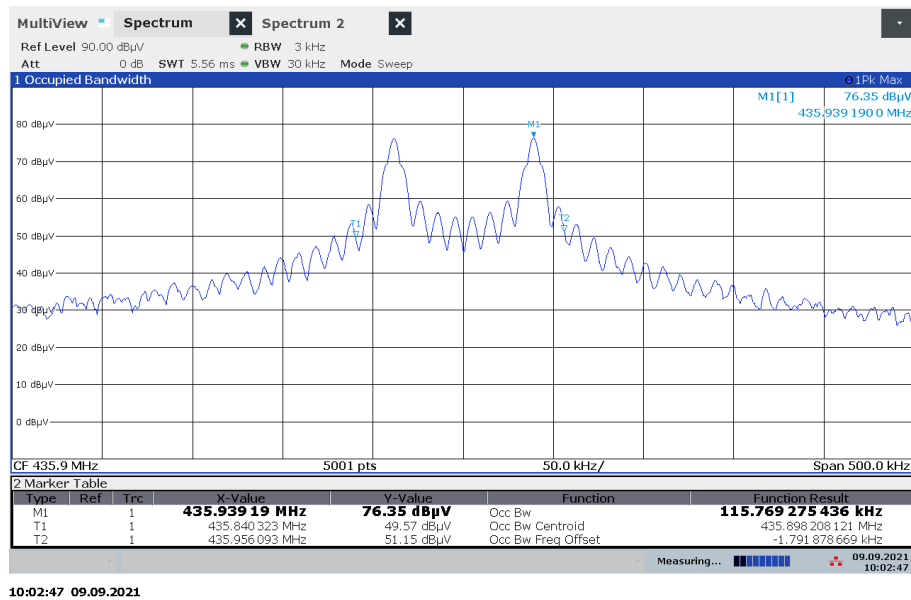
**Plot 3: Emissions bandwidth – 318.0 MHz FSK****Plot 4: 99 % emission bandwidth – 318.0 MHz FSK**

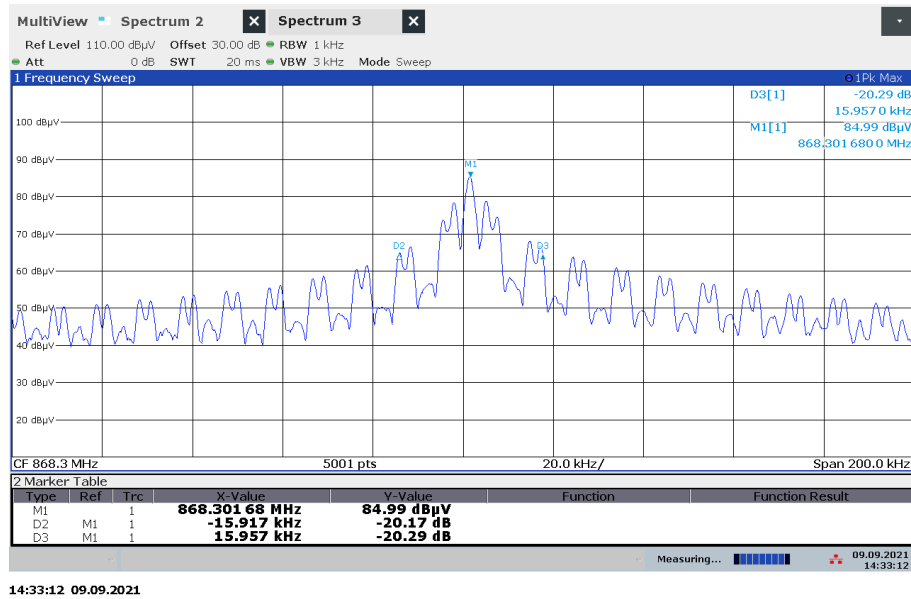
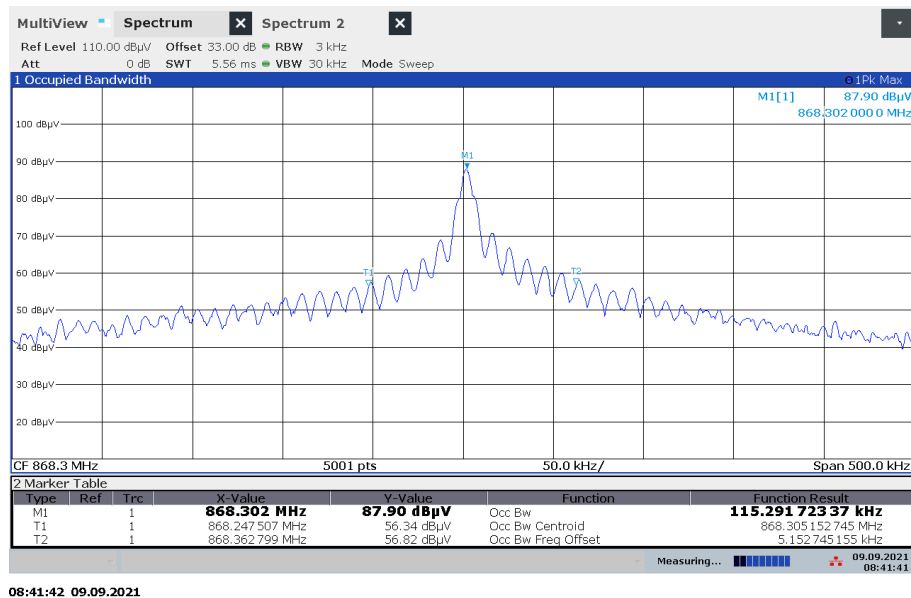
**Plot 1: Emissions bandwidth – 431.9 MHz ASK****Plot 2: 99 % emission bandwidth – 431.9 MHz ASK**

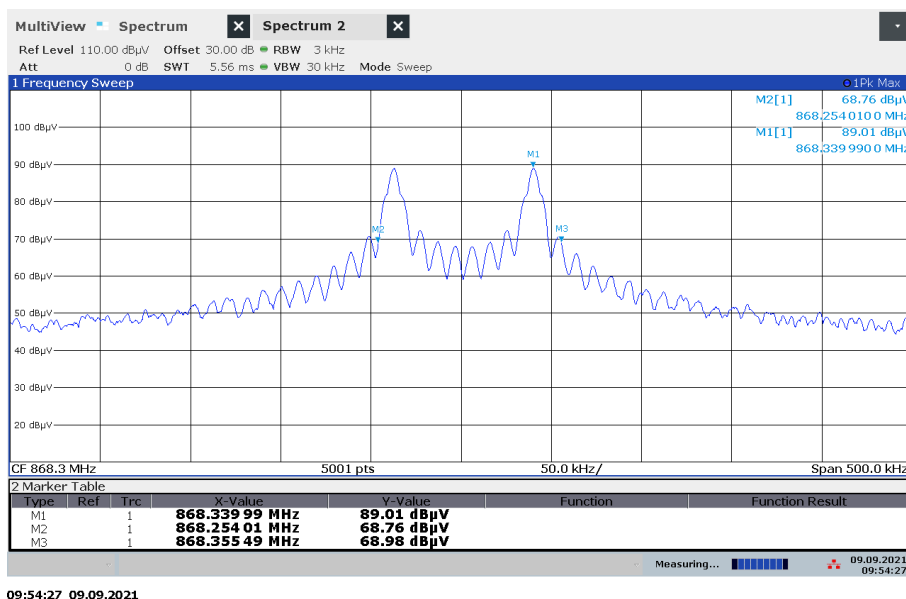
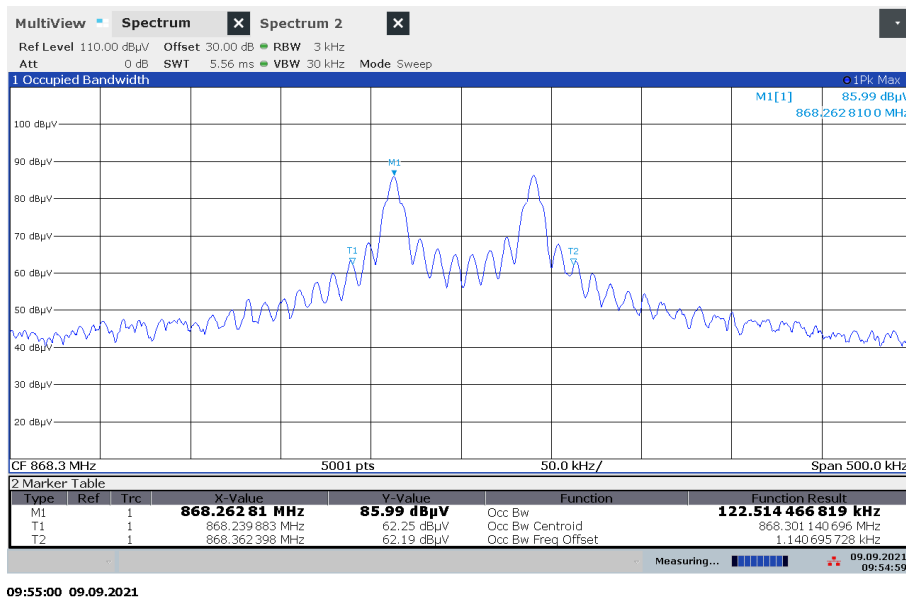
**Plot 3: Emissions bandwidth – 431.9 MHz FSK****Plot 4: 99 % emission bandwidth – 431.9 MHz FSK**

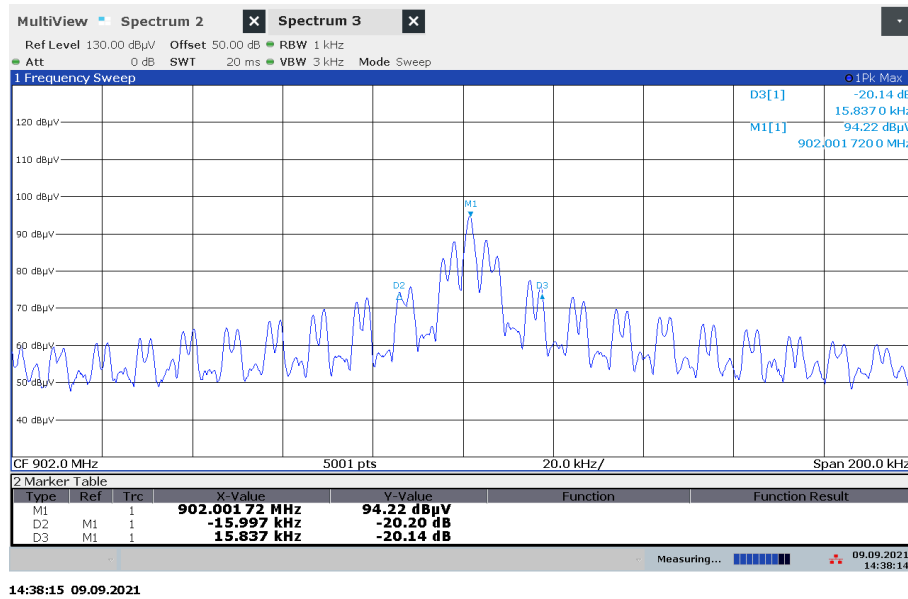
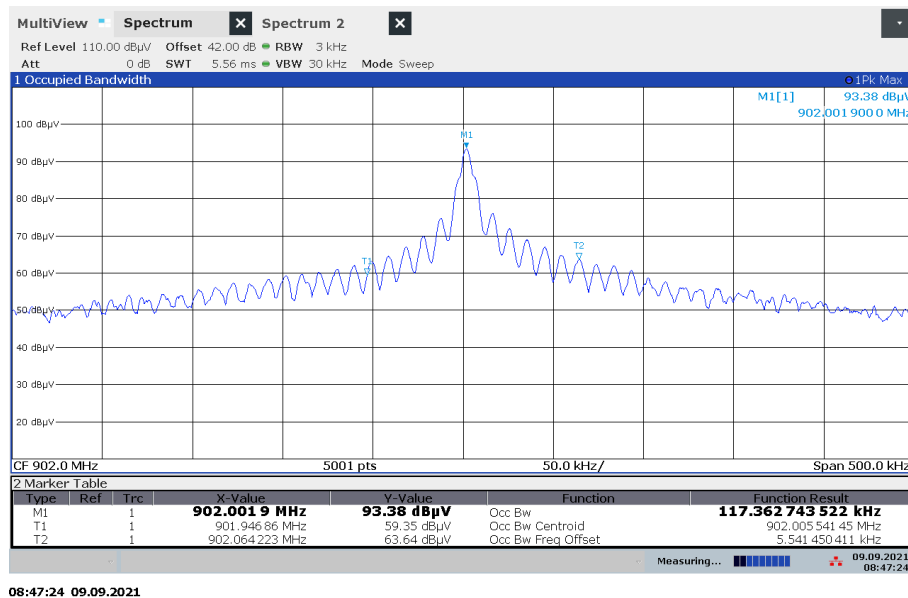


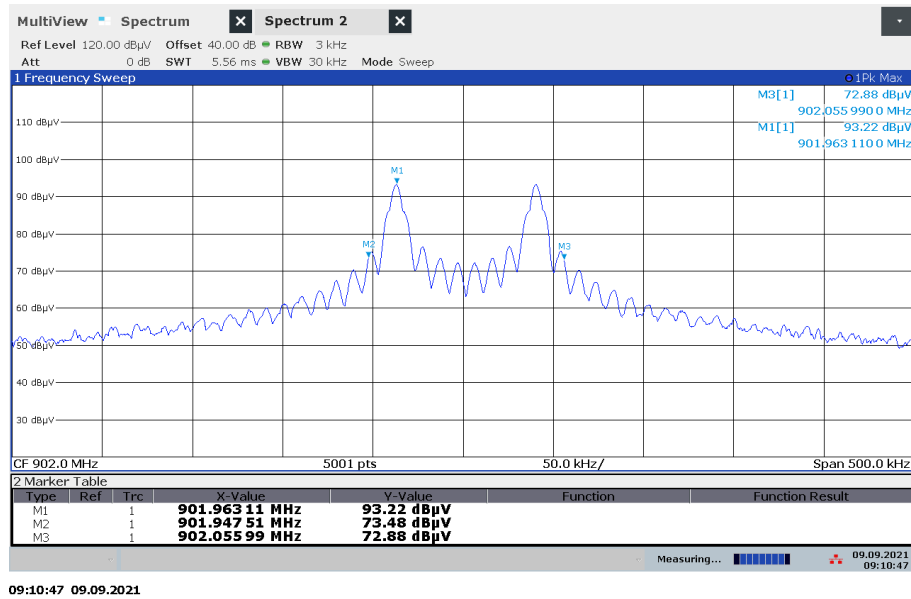
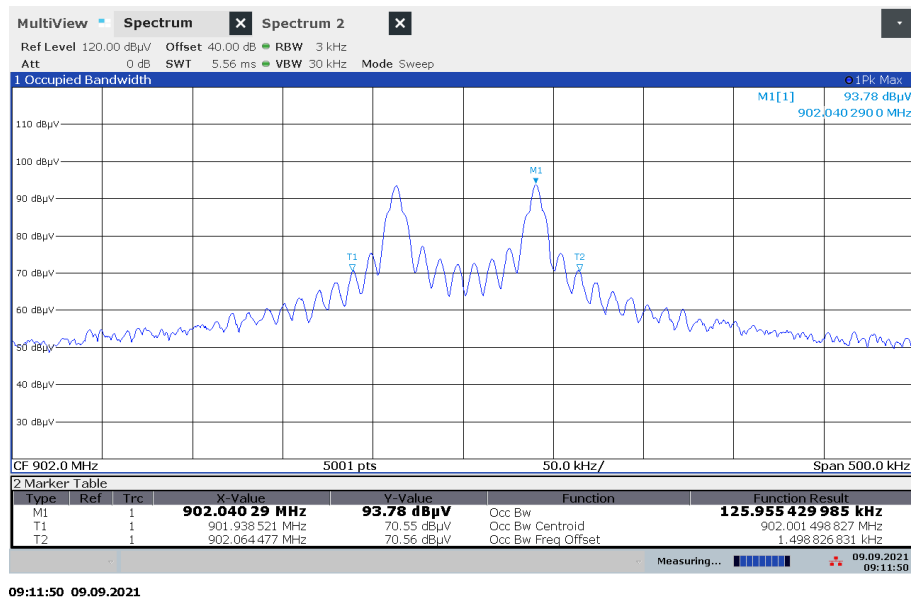
**Plot 1: Emissions bandwidth – 435.9 MHz ASK****Plot 2: 99 % emission bandwidth – 435.9 MHz ASK**

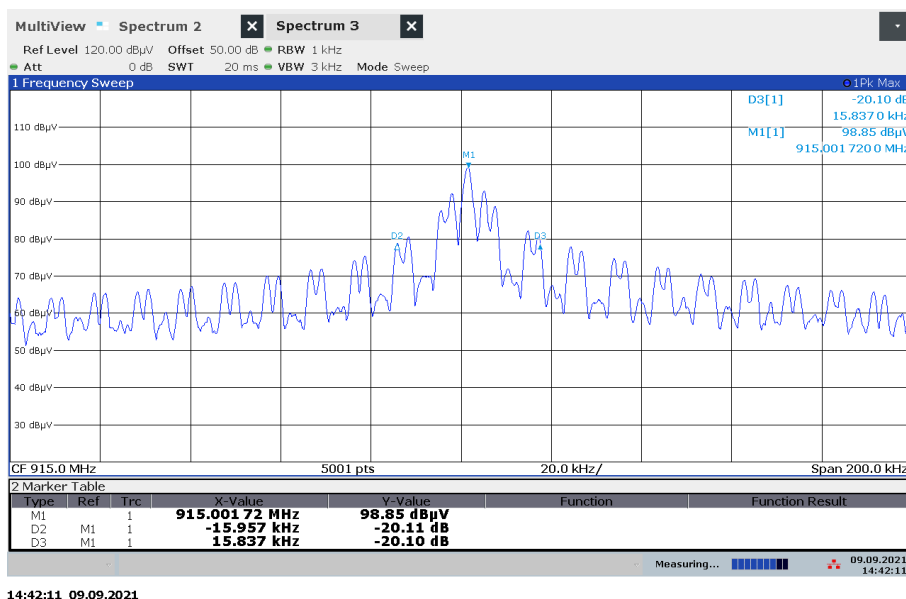
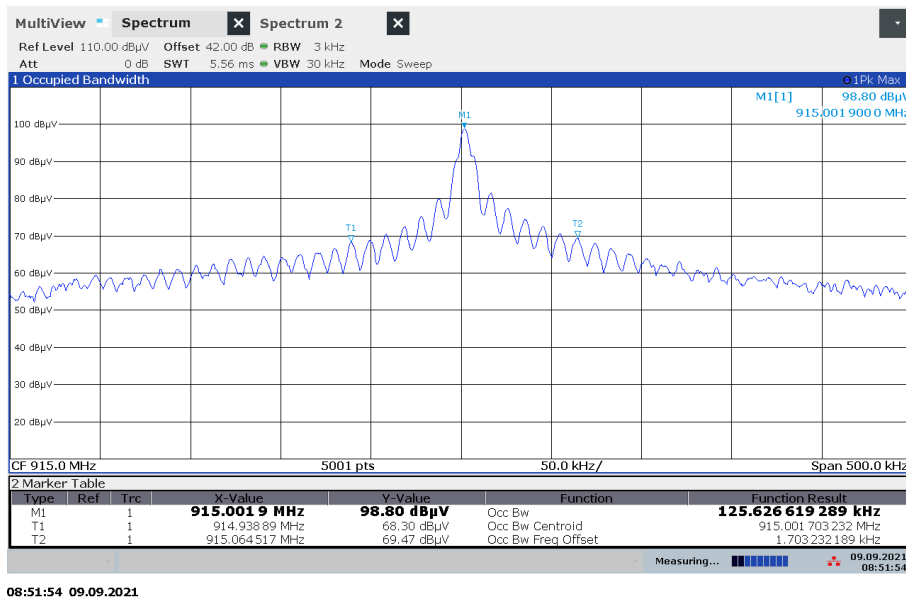
**Plot 3: Emissions bandwidth – 435.9 MHz FSK****Plot 4: 99 % emission bandwidth – 435.9 MHz FSK**

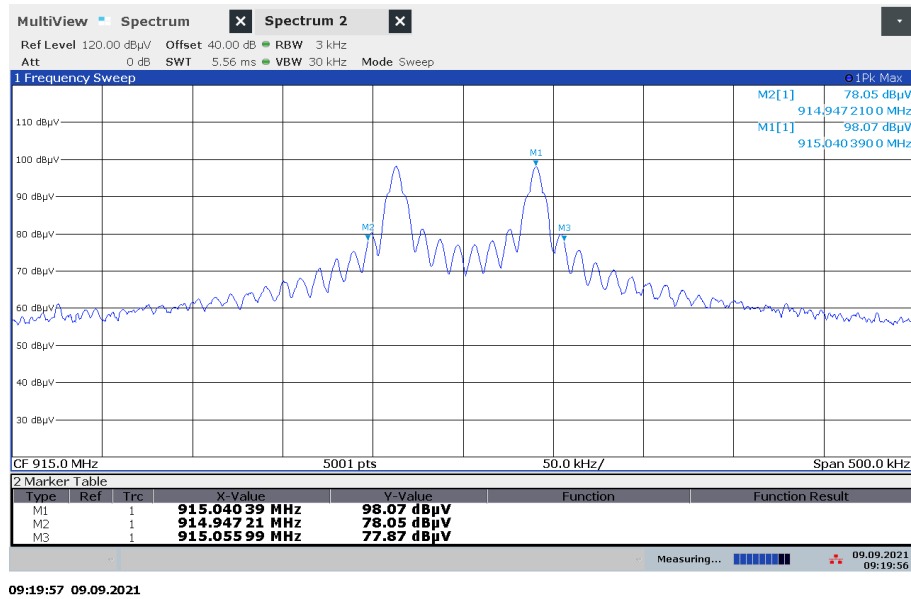
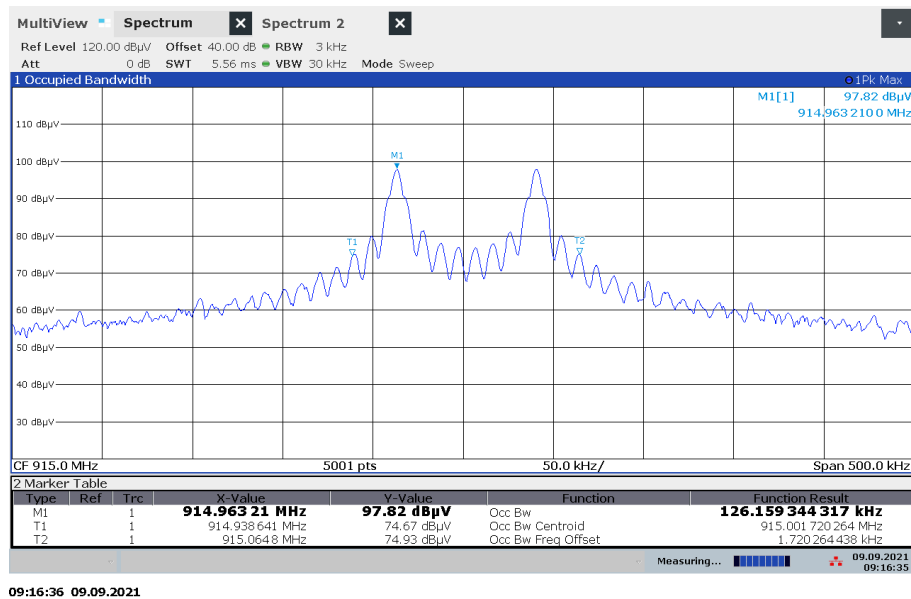
**Plot 1: Emissions bandwidth – 868.3 MHz ASK****Plot 2: 99 % emission bandwidth – 868.3 MHz ASK**

**Plot 3: Emissions bandwidth – 868.3 MHz FSK****Plot 4: 99 % emission bandwidth – 868.3 MHz FSK**

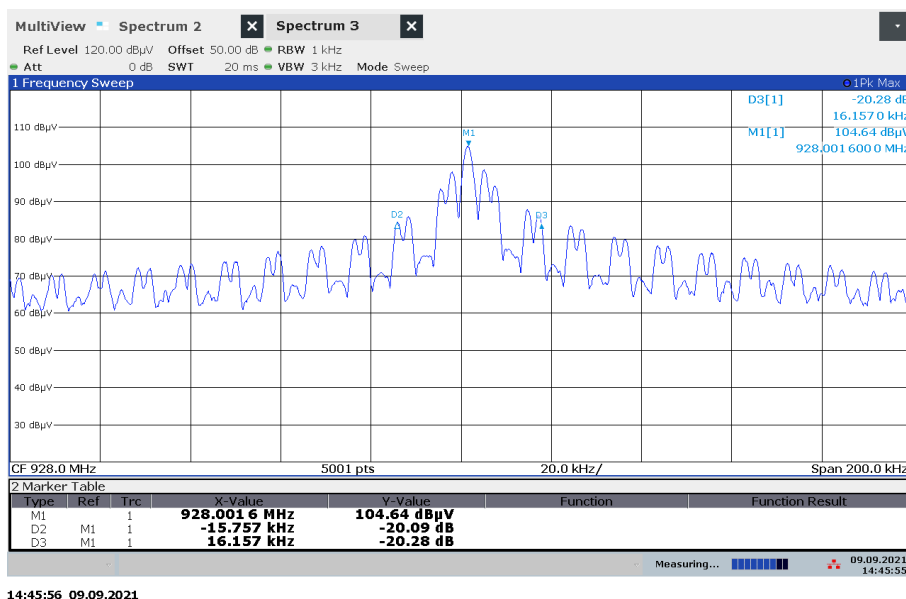
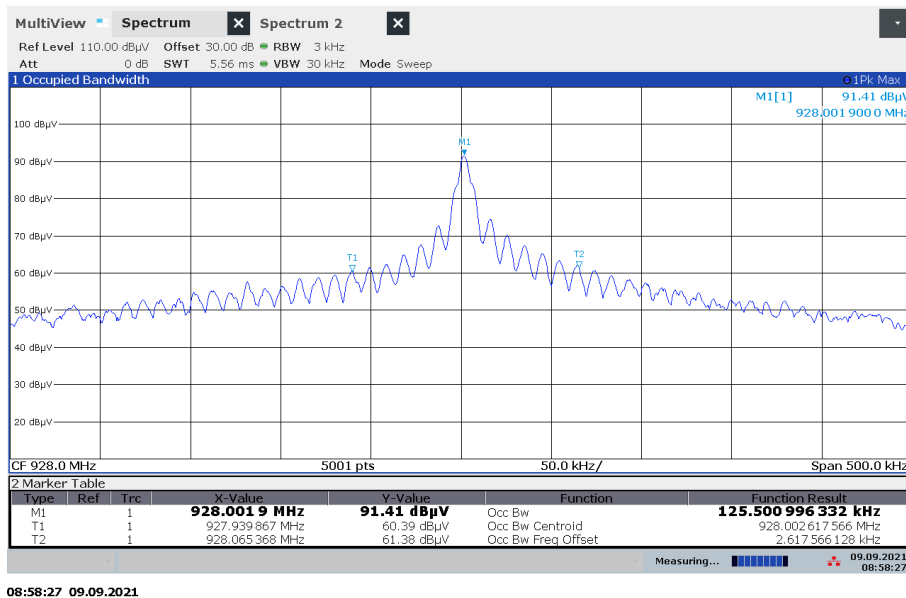
**Plot 1: Emissions bandwidth – 902.0 MHz ASK****Plot 2: 99 % emission bandwidth – 902.0 MHz ASK**

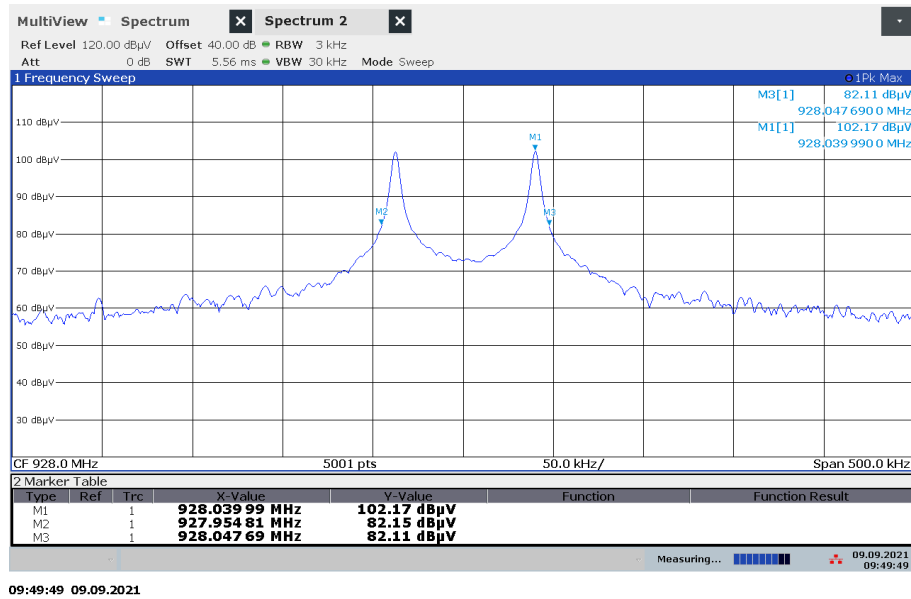
**Plot 3: Emissions bandwidth – 902.0 MHz FSK****Plot 4: 99 % emission bandwidth – 902.0 MHz FSK**

**Plot 1: Emissions bandwidth – 915.0 MHz ASK****Plot 2: 99 % emission bandwidth – 915.0 MHz ASK**

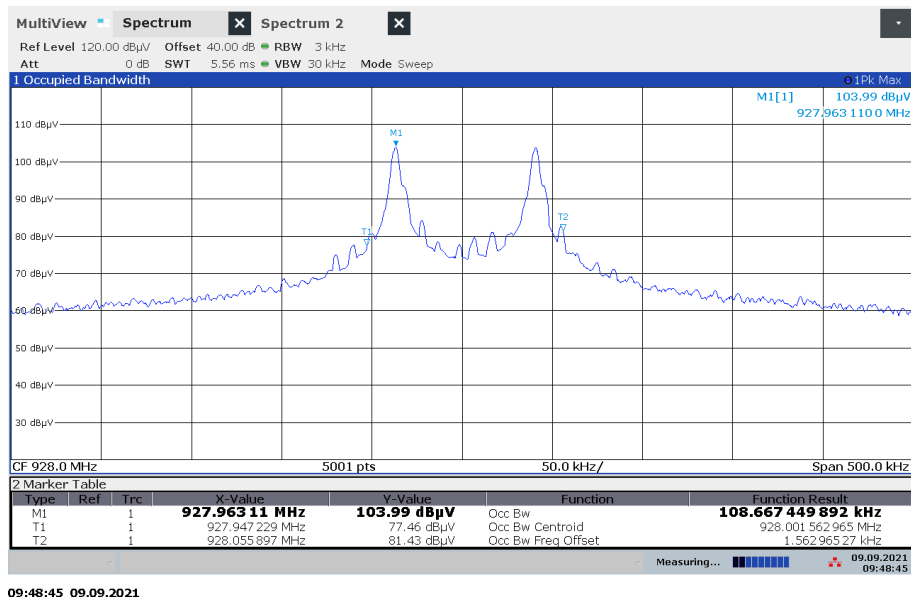
**Plot 3: Emissions bandwidth – 915.0 MHz FSK****Plot 4: 99 % emission bandwidth – 915.0 MHz FSK**



**Plot 1: Emissions bandwidth – 928.0 MHz ASK****Plot 2: 99 % emission bandwidth – 928.0 MHz ASK**

**Plot 3: Emissions bandwidth – 928.0 MHz FSK**

09:49:49 09.09.2021

**Plot 4: 99 % emission bandwidth – 928.0 MHz FSK**

09:48:45 09.09.2021

**Verdict: compliant**

## 11.4 Field strength of the fundamental

### Measurement:

| Measurement parameter   |                                     |
|-------------------------|-------------------------------------|
| Detector:               | Peak / pulse averaging / quasi peak |
| Sweep time:             | Auto                                |
| Resolution bandwidth:   | 120 kHz                             |
| Video bandwidth:        | 3 x RBW                             |
| Span:                   | zero                                |
| Trace-Mode:             | Max. hold                           |
| Test setup              | 7.1 A                               |
| Measurement uncertainty | see chapter 9                       |

### Limits:

| FCC                                                                                                                                                                     |                                      | IC                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|--------------------------|
| Field strength of the fundamental.                                                                                                                                      |                                      |                          |
| In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under this Section shall not exceed the following: |                                      |                          |
| Fundamental Frequency (MHz)                                                                                                                                             | Field strength of Fundamental (μV/m) | Measurement distance (m) |
| 40.66 – 40.70                                                                                                                                                           | 2,250                                | 3                        |
| 70-130                                                                                                                                                                  | 1,250                                | 3                        |
| 130-174                                                                                                                                                                 | 1,250 to 3,750                       | 3                        |
| 174-260                                                                                                                                                                 | 3,750                                | 3                        |
| 260-470                                                                                                                                                                 | 3,750 to 12,500                      | 3                        |
| Above 470                                                                                                                                                               | 12,500                               | 3                        |

Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows:

- for the band 130-174 MHz,  $\mu\text{V/m}$  at 3 meters =  $56.81818(F) - 6136.3636$ ;
- for the band 260-470 MHz,  $\mu\text{V/m}$  at 3 meters =  $41.6667(F) - 7083.3333$ .

**Result:**

| TEST CONDITIONS  |               | MAXIMUM POWER (dBµV/m at 3 m distance) * |         |
|------------------|---------------|------------------------------------------|---------|
| frequency / mode | limit average | peak                                     | average |
| 312.0 MHz ASK    | 75.44 dBµV/m  | 71.51                                    | 69.27   |
| 312.0 MHz FSK    | 75.44 dBµV/m  | 71.64                                    | 69.30   |
| 318.0 MHz ASK    | 75.80 dBµV/m  | 75.55                                    | 73.25   |
| 318.0 MHz FSK    | 75.80 dBµV/m  | 74.50                                    | 72.33   |
| 431.9 MHz ASK    | 80.75 dBµV/m  | 77.80                                    | 76.08   |
| 431.9 MHz FSK    | 80.75 dBµV/m  | 76.63                                    | 74.51   |
| 435.9 MHz ASK    | 80.89 dBµV/m  | 77.63                                    | 76.03   |
| 435.9 MHz FSK    | 80.89 dBµV/m  | 76.63                                    | 74.51   |
| 868.3 MHz ASK    | 81.93 dBµV/m  | 81.17                                    | 79.50   |
| 868.3 MHz FSK    | 81.93 dBµV/m  | 79.65                                    | 78.05   |
| 902.0 MHz ASK    | 81.93 dBµV/m  | 76.24                                    | 73.89   |
| 902.0 MHz FSK    | 81.93 dBµV/m  | 75.13                                    | 72.85   |
| 915.0 MHz ASK    | 81.93 dBµV/m  | 77.36                                    | 75.57   |
| 915.0 MHz FSK    | 81.93 dBµV/m  | 75.59                                    | 73.26   |
| 928.0 MHz ASK    | 81.93 dBµV/m  | 79.77                                    | 77.25   |
| 928.0 MHz FSK    | 81.93 dBµV/m  | 79.60                                    | 77.29   |

\* Calculated from 10 meter to 3 meter with 10.46 dB

## 11.5 Field strength of the harmonics and spurious

### Measurement:

| Measurement parameter   |                             |
|-------------------------|-----------------------------|
| Detector:               | Peak / average / quasi peak |
| Sweep time:             | Auto                        |
| Resolution bandwidth:   | 200 Hz / 9 kHz / 120 kHz    |
| Video bandwidth:        | 3 x RBW                     |
| Span:                   | See plots                   |
| Trace-Mode:             | Max. hold                   |
| Test setup              | 7.1 A, 7.2 A                |
| Measurement uncertainty | see chapter 9               |

### Limits: Part 15.231

In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under this Section shall not exceed the following:

| FCC                         |                                                | IC                       |
|-----------------------------|------------------------------------------------|--------------------------|
| FCC Part 15.231             |                                                |                          |
| Fundamental Frequency (MHz) | Field strength of spurious ( $\mu\text{V/m}$ ) | Measurement distance (m) |
| 40.66 – 40.70               | 225                                            | 3                        |
| 70-130                      | 125                                            | 3                        |
| 130-174                     | 125 to 375                                     | 3                        |
| 174-260                     | 375                                            | 3                        |
| 260-470                     | 375 to 1,250                                   | 3                        |
| Above 470                   | 1,250                                          | 3                        |

Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in Section 15.209, whichever limit permits a higher field strength.

| FCC             |                                    | IC                       |
|-----------------|------------------------------------|--------------------------|
| FCC Part 15.209 |                                    |                          |
| Frequency (MHz) | Field strength ( $\mu\text{V/m}$ ) | Measurement distance (m) |
| 0.009 – 0.490   | 2400/F(kHz)                        | 300                      |
| 0.490 – 1.705   | 24000/F(kHz)                       | 30                       |
| 1.705 – 30      | 30                                 | 30                       |
| 30 – 88         | 100                                | 3                        |
| 88 – 216        | 150                                | 3                        |
| 216 – 960       | 200                                | 3                        |
| above 960       | 500                                | 3                        |

**Results:**

Spurious emissions within the restricted bands (Part 15.205 & 15.209)

| Fundamental Frequency | Spurious Frequency | Detector | Limit max. allowed [dBµV/m] | Amplitude of emission [dBµV/m] |
|-----------------------|--------------------|----------|-----------------------------|--------------------------------|
| 312 MHz (ASK)         | 1560.0 MHz         | Peak     | 74                          | 36.86                          |
|                       |                    | AVG      | 54                          | 25.16                          |
| 431.9 MHz (FSK)       | 4319.22 MHz        | Peak     | 74                          | 50.06                          |
|                       |                    | AVG      | 54                          | 44.89                          |
|                       | 4750.40 MHz        | Peak     | 74                          | 51.19                          |
|                       |                    | AVG      | 54                          | 45.60                          |
| 435.9 MHz (FSK)       | 1418.32 MHz        | Peak     | 74                          | 46.03                          |
|                       |                    | AVG      | 54                          | 30.12                          |
| 868.1 MHz (FSK)       | 1412.72 MHz        | Peak     | 74                          | 46.21                          |
|                       |                    | AVG      | 54                          | 31.10                          |
| 902.0 MHz (ASK)       | 3607.73 MHz        | Peak     | 74                          | 49.96                          |
|                       |                    | AVG      | 54                          | 45.50                          |
| 928.0 MHz (FSK)       | 8351.80 MHz        | Peak     | 74                          | 51.98                          |
|                       |                    | AVG      | 54                          | 48.04                          |

For emissions below 1 GHz, see table below the plots.

**Results:** Spurious emissions outside the restricted bands (Part15.231)

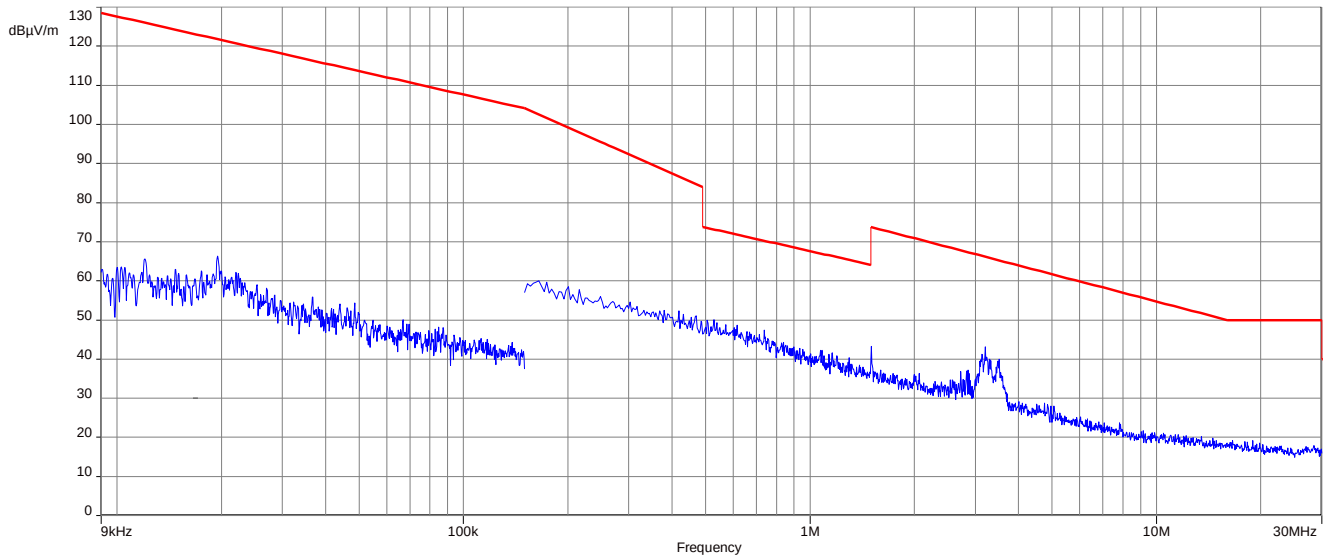
| Fundamental Frequency | Spurious Frequency | Detector | Limit max. allowed [dBµV/m] | Amplitude of emission [dBµV/m] |
|-----------------------|--------------------|----------|-----------------------------|--------------------------------|
| 312 MHz (ASK)         | 1247.94 MHz        | Peak     | -/-                         | 49.99                          |
|                       |                    | AVG      | 62                          | 48.45                          |
| 431.9 MHz (FSK)       | 1295.82 MHz        | Peak     | -/-                         | 58.56                          |
|                       |                    | AVG      | 62                          | 57.92                          |
|                       | 1727.44 MHz        | Peak     | -/-                         | 51.30                          |
|                       |                    | AVG      | 62                          | 49.85                          |
| 435.9 MHz (FSK)       | 1743.82 MHz        | Peak     | -/-                         | 51.04                          |
|                       |                    | AVG      | 62                          | 49.54                          |
| 868.3 MHz (FSK)       | 1716.38 MHz        | Peak     | -/-                         | 37.83                          |
|                       |                    | AVG      | 62                          | 25.71                          |
| 868.5 MHz (ASK)       | 1737.10 MHz        | Peak     | -/-                         | 59.98                          |
|                       |                    | AVG      | 62                          | 59.47                          |
|                       | 9553.9 MHz         | Peak     | -/-                         | 61.69                          |
|                       |                    | AVG      | 62                          | 59.22                          |

For emissions below 1 GHz, see table below the plots.

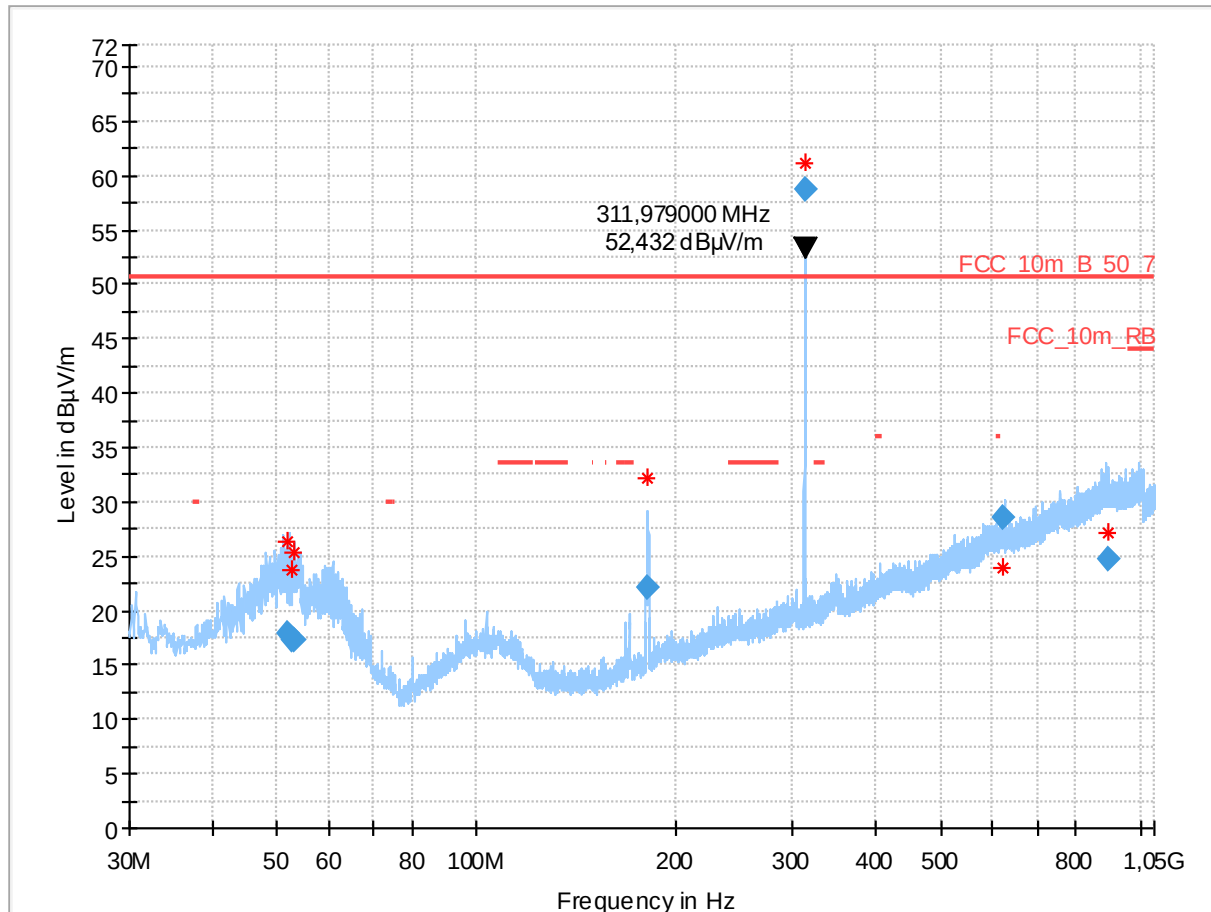
**Plots:**

- TX 312.0MHz

**Plot 1:** TX@312MHz, ASK, 9 kHz to 30 MHz



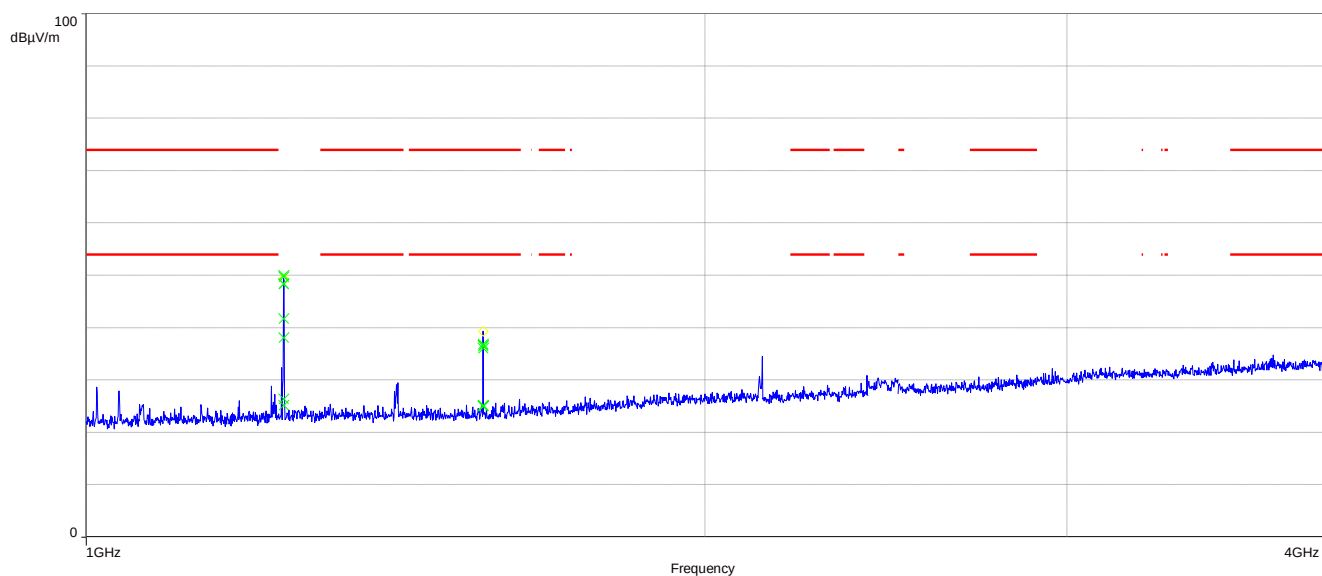


**Plot 2:** TX@312MHz, ASK, 30 MHz to 1000 MHz, vertical & horizontal polarisation**Final\_Result:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 51.767          | 17.85              | 50.7           | 32.9        | 1000            | 120.0           | 98.0        | V   | 68            | 15           |
| 52.816          | 17.21              | 50.7           | 33.5        | 1000            | 120.0           | 98.0        | V   | 104           | 15           |
| 53.275          | 17.21              | 50.7           | 33.5        | 1000            | 120.0           | 170.0       | V   | 95            | 15           |
| 181.401         | 22.21              | 50.7           | 28.5        | 1000            | 120.0           | 170.0       | V   | 292           | 11           |
| 312.002         | wanted signal      |                |             |                 |                 |             |     |               |              |
| 623.084         | 28.64              | 50.7           | 22.1        | 1000            | 120.0           | 170.0       | H   | 157           | 22           |
| 891.498         | 24.71              | 50.7           | 26.0        | 1000            | 120.0           | 170.0       | H   | -22           | 25           |

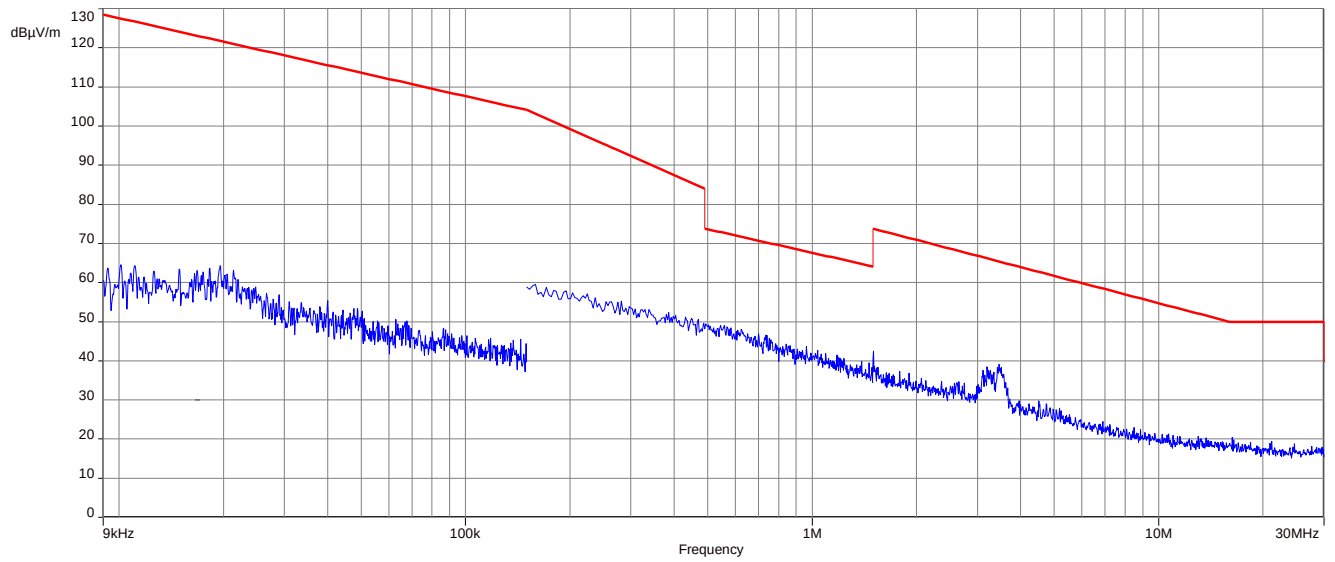
In addition to the limit according to Part 15.209 shown in the plot, the limit according to Part 15.231 also applies!

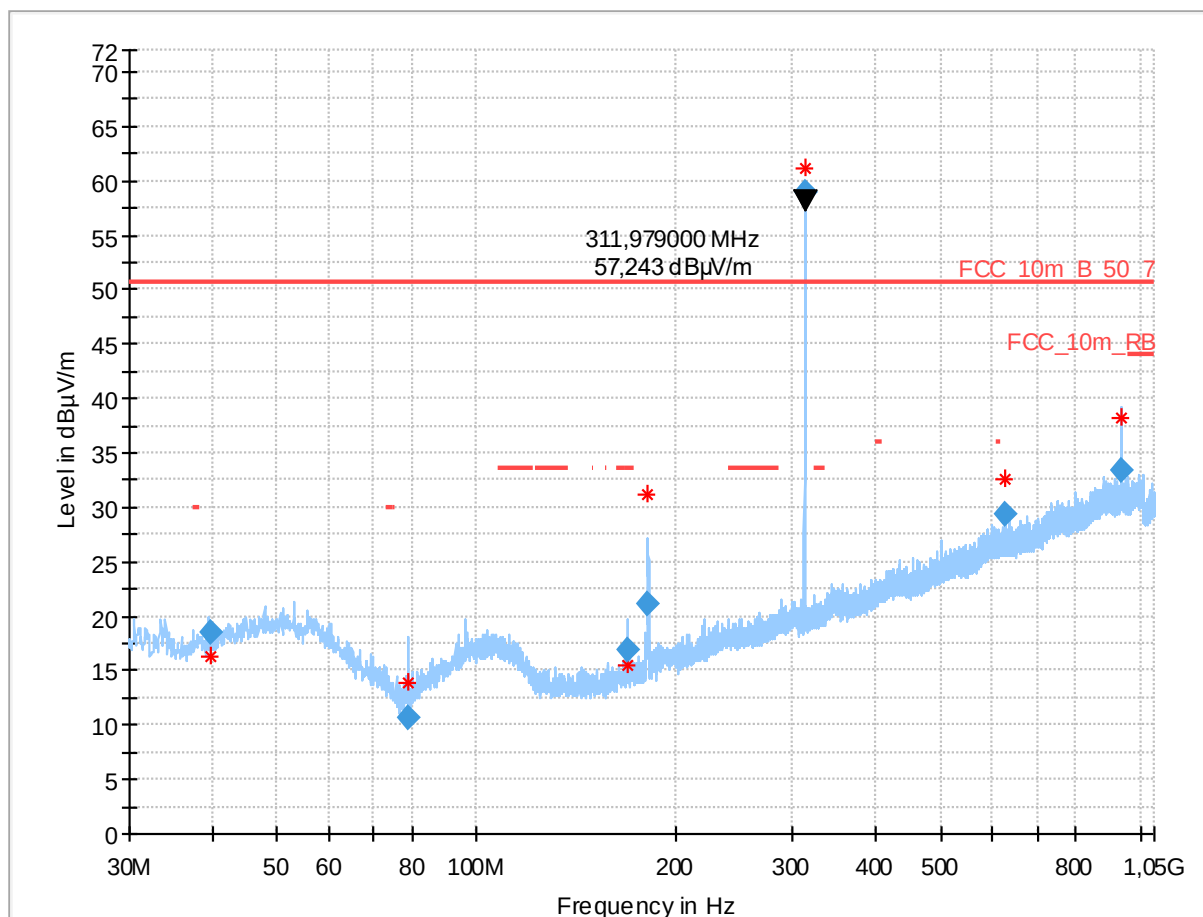
**Plot 3:** TX@312MHz, ASK, 1000 MHz to 6000 MHz, vertical & horizontal polarisation



- TX 312.0MHz

**Plot 1:** TX@312MHz, FSK, 9 kHz to 30 MHz

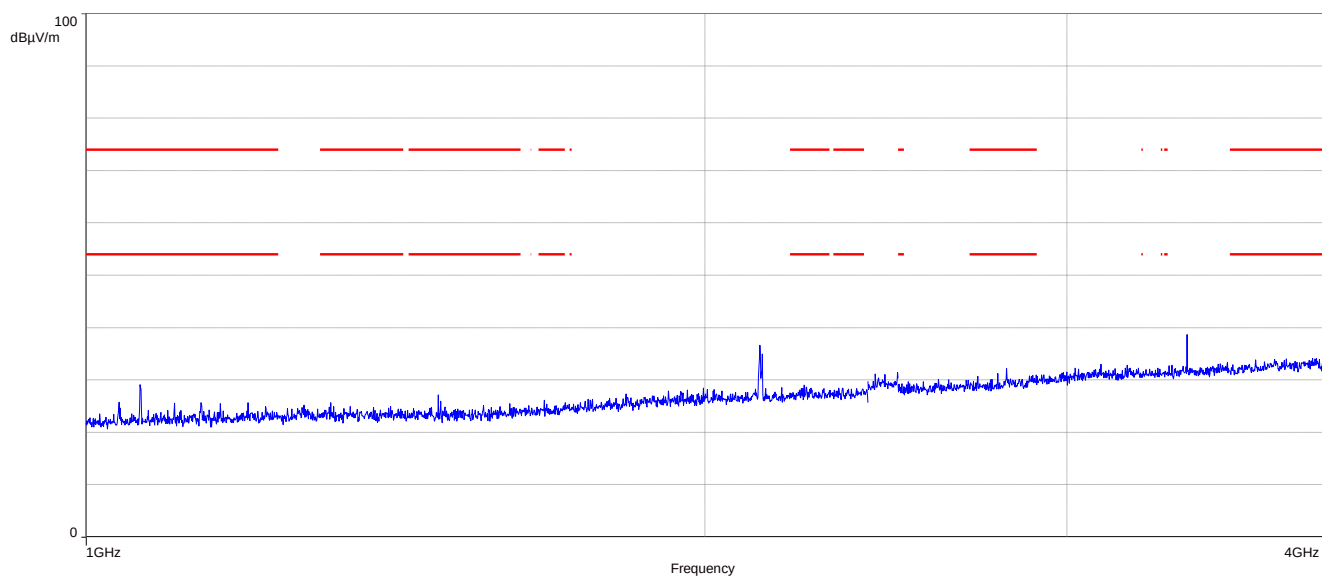


**Plot 2:** TX@312MHz, FSK, 30 MHz to 1000 MHz, vertical & horizontal polarisation**Final\_Result:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 39.679          | 18.52              | 50.7           | 32.2        | 1000            | 120.0           | 170.0       | V   | 247           | 14           |
| 78.767          | 10.74              | 50.7           | 40.0        | 1000            | 120.0           | 170.0       | V   | 192           | 8            |
| 169.081         | 16.83              | 50.7           | 33.9        | 1000            | 120.0           | 170.0       | V   | 276           | 11           |
| 181.396         | 21.20              | 50.7           | 29.5        | 1000            | 120.0           | 121.0       | V   | 292           | 11           |
| 312.071         | wanted signal      |                |             |                 |                 |             |     |               |              |
| 623.922         | 29.46              | 50.7           | 21.2        | 1000            | 120.0           | 170.0       | V   | 105           | 22           |
| 935.910         | 33.35              | 50.7           | 17.4        | 1000            | 120.0           | 120.0       | H   | 165           | 26           |

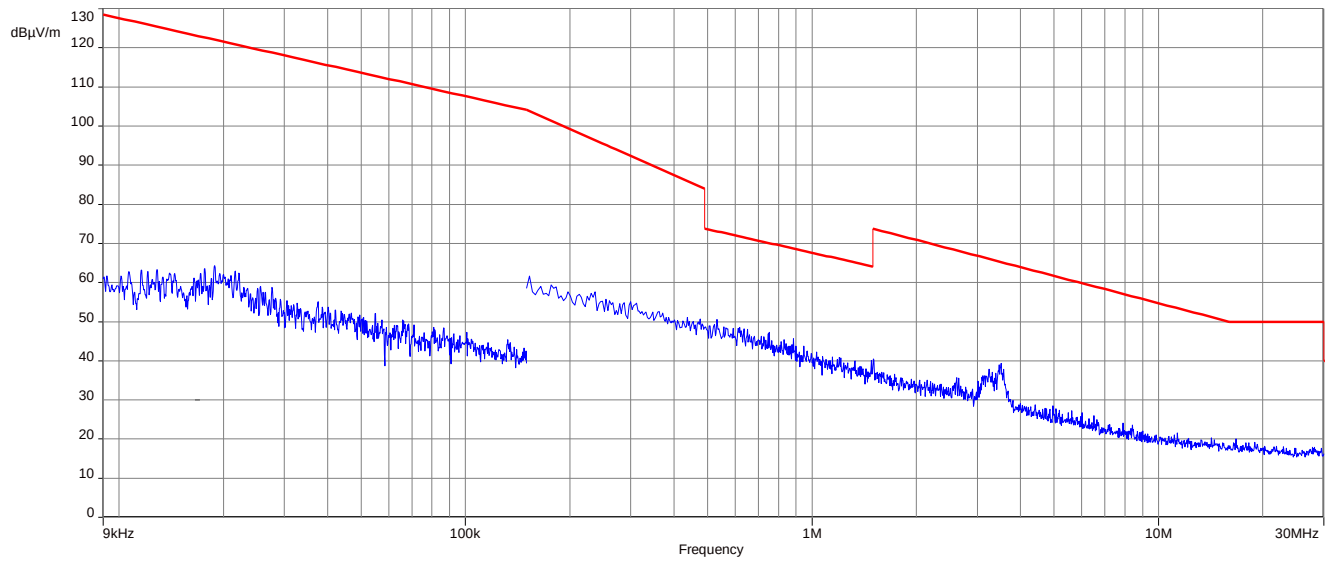
In addition to the limit according to Part 15.209 shown in the plot, the limit according to Part 15.231 also applies!

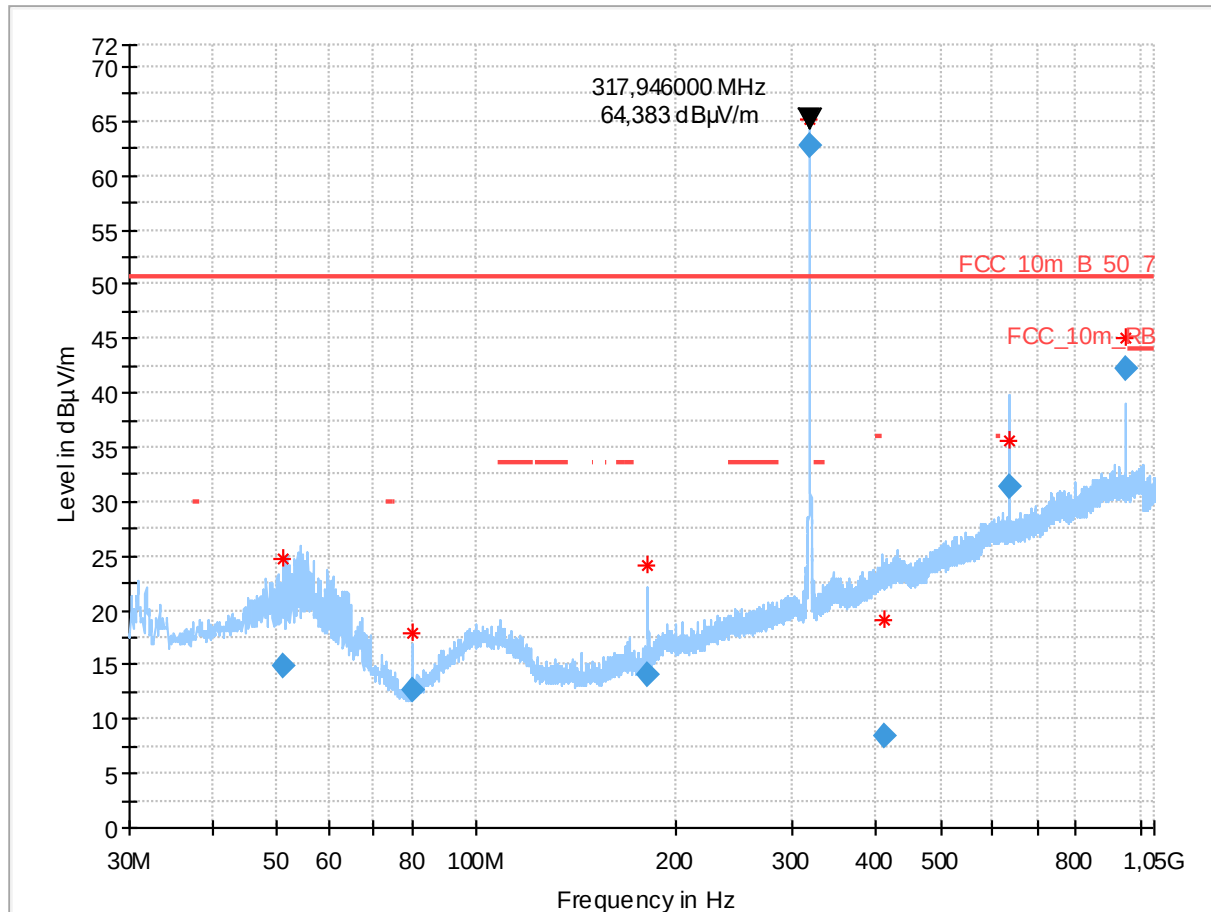
**Plot 3:** TX@312MHz, FSK, 1000 MHz to 6000 MHz, vertical & horizontal polarisation



- TX 318.0MHz

**Plot 1:** TX@318MHz, ASK, 9 kHz to 30 MHz

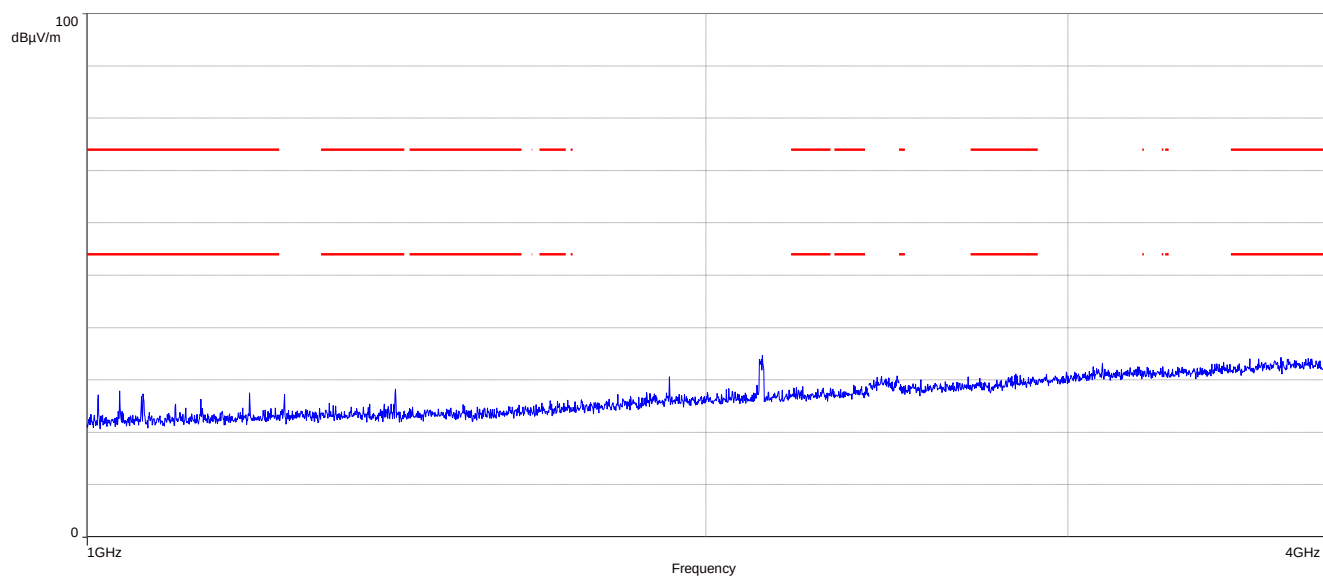


**Plot 2:** TX@318MHz, ASK, 30 MHz to 1000 MHz, vertical & horizontal polarisation**Final\_Result:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 51.230          | 14.90              | 50.7           | 35.8        | 1000            | 120.0           | 203.0       | V   | 194           | 15           |
| 79.997          | 12.68              | 50.7           | 38.0        | 1000            | 120.0           | 328.0       | V   | 110           | 8            |
| 180.870         | 14.05              | 50.7           | 36.7        | 1000            | 120.0           | 200.0       | V   | 339           | 11           |
| 318.004         | wanted signal      |                |             |                 |                 |             |     |               |              |
| 410.306         | 8.37               | 50.7           | 42.3        | 1000            | 120.0           | 242.0       | H   | 184           | 18           |
| 635.944         | 31.33              | 50.7           | 19.4        | 1000            | 120.0           | 262.0       | V   | 203           | 22           |
| 954.002         | 42.14              | 50.7           | 8.6         | 1000            | 120.0           | 200.0       | V   | 166           | 25           |

In addition to the limit according to Part 15.209 shown in the plot, the limit according to Part 15.231 also applies!

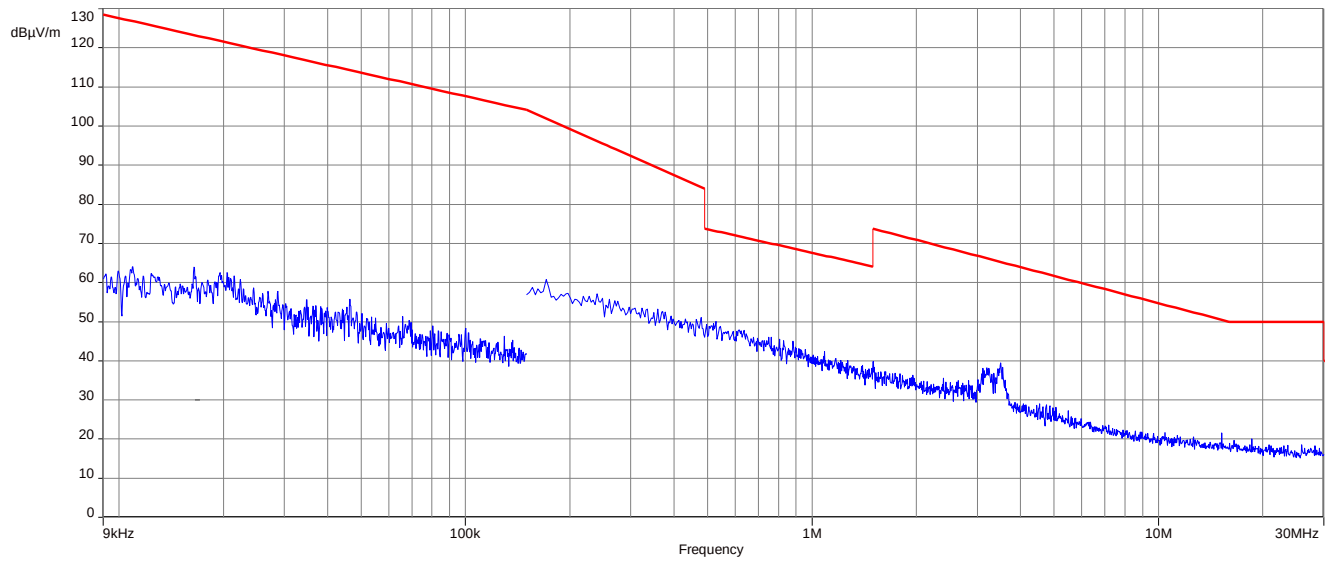
**Plot 3:** TX@318MHz, ASK, 1000 MHz to 6000 MHz, vertical & horizontal polarisation

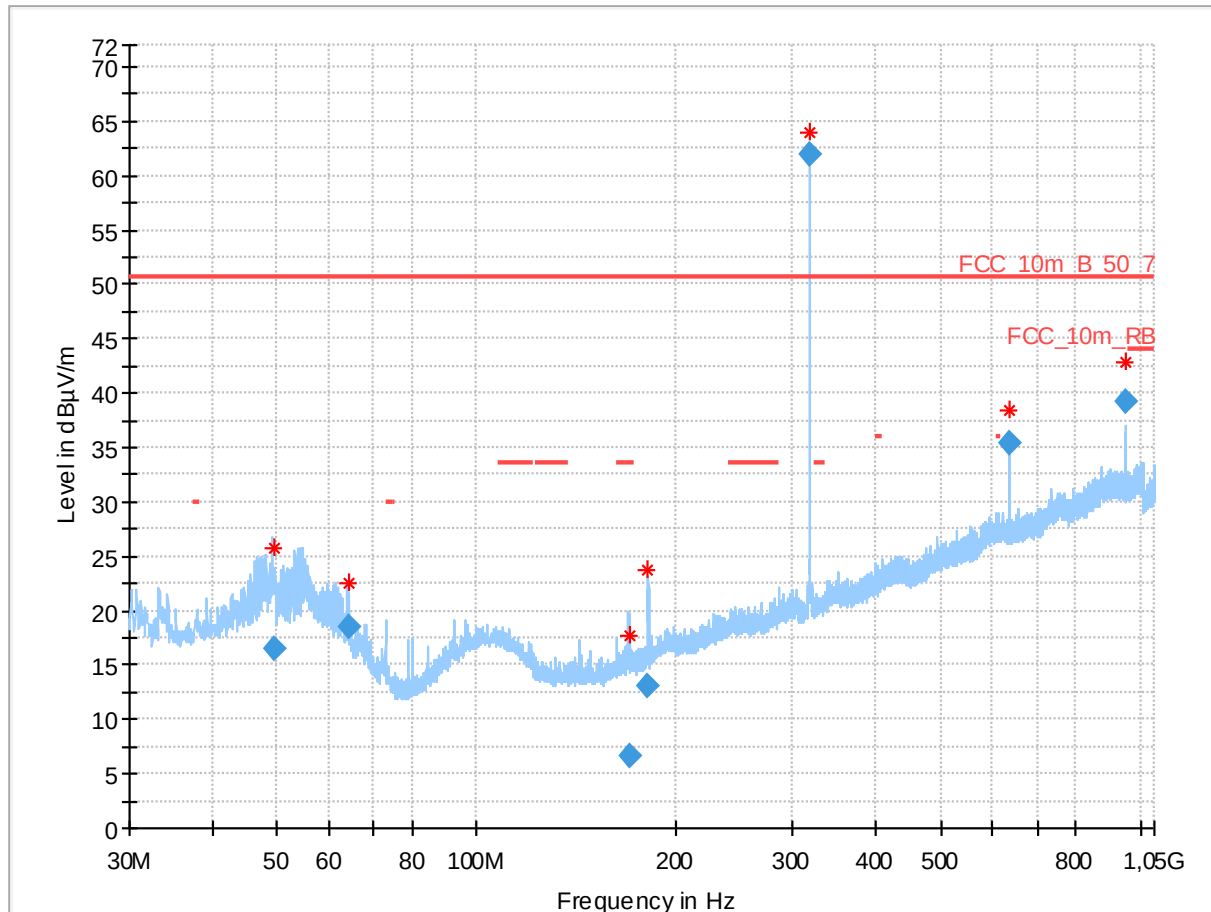




- TX 318.0MHz

**Plot 1:** TX@318MHz, FSK, 9 kHz to 30 MHz

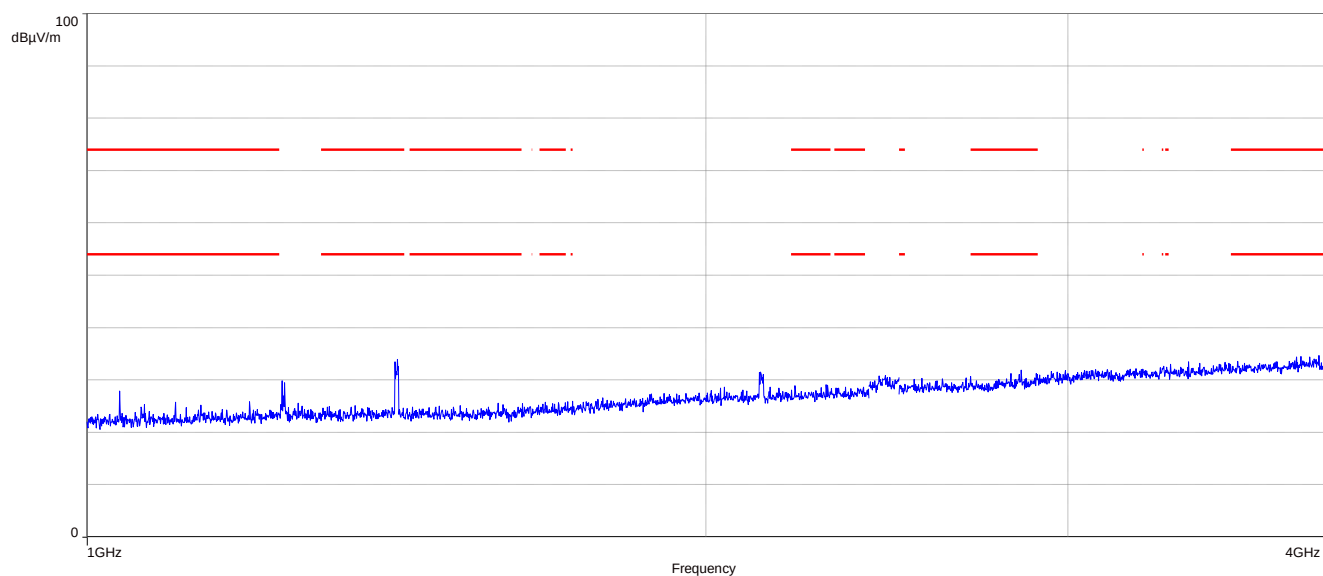


**Plot 2:** TX@318MHz, FSK, 30 MHz to 1000 MHz, vertical & horizontal polarisation**Final\_Result:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 49.758          | 16.56              | 50.7           | 34.1        | 1000            | 120.0           | 100.0       | V   | 110           | 15           |
| 64.029          | 18.42              | 50.7           | 32.3        | 1000            | 120.0           | 255.0       | V   | 164           | 13           |
| 169.559         | 6.73               | 50.7           | 44.0        | 1000            | 120.0           | 200.0       | V   | 180           | 11           |
| 181.448         | 13.06              | 50.7           | 37.6        | 1000            | 120.0           | 120.0       | V   | 12            | 11           |
| 317.966         | wanted signal      |                |             |                 |                 |             |     |               |              |
| 636.079         | 35.37              | 50.7           | 15.3        | 1000            | 120.0           | 268.0       | V   | 225           | 22           |
| 953.846         | 39.24              | 50.7           | 11.5        | 1000            | 120.0           | 200.0       | V   | 181           | 25           |

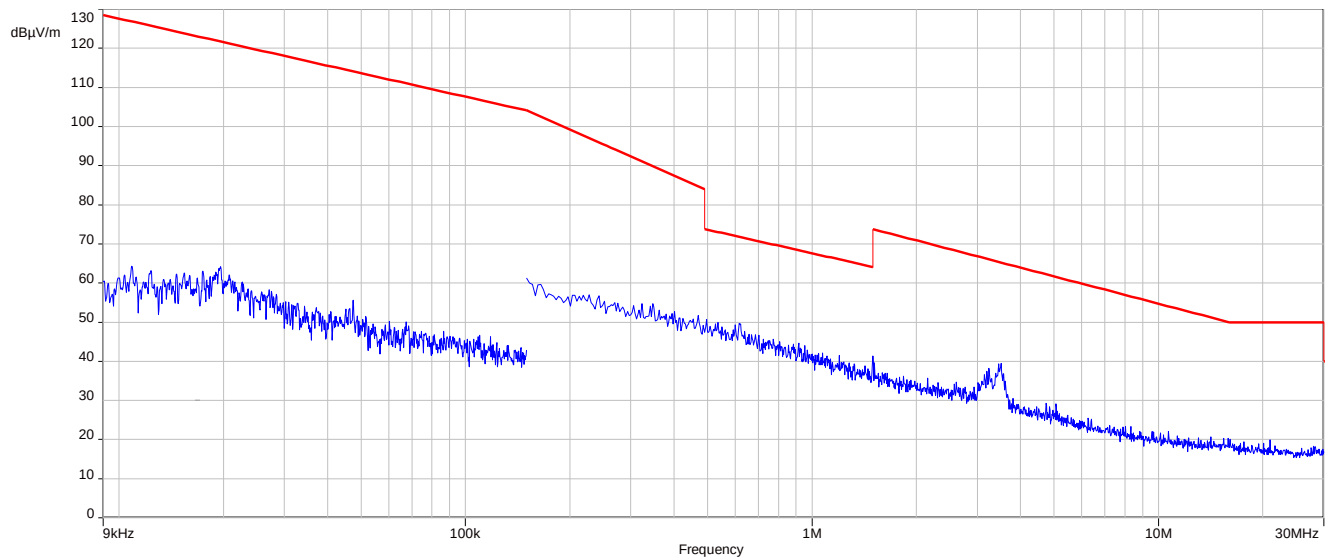
In addition to the limit according to Part 15.209 shown in the plot, the limit according to Part 15.231 also applies!

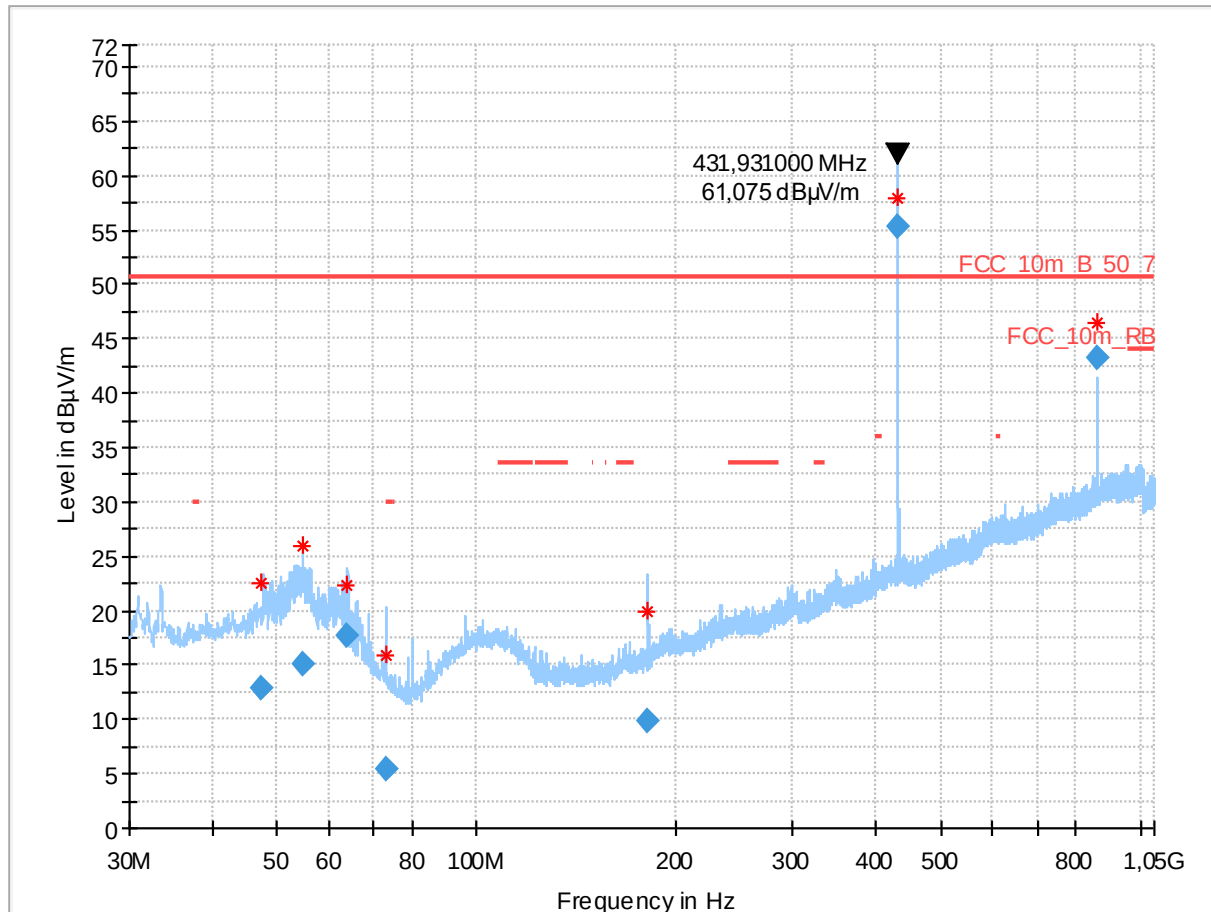
**Plot 3:** TX@318MHz, FSK, 1000 MHz to 6000 MHz, vertical & horizontal polarisation



- TX 431.9MHz

**Plot 1:** TX@431.9MHz, ASK, 9 kHz to 30 MHz

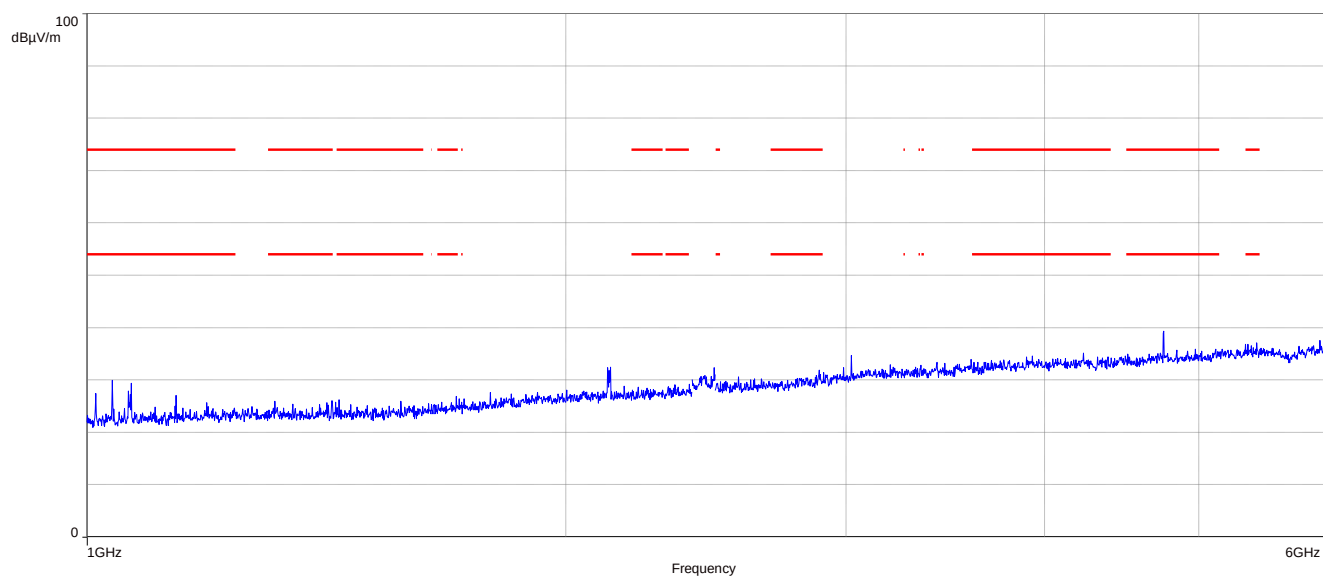


**Plot 2:** TX@431.9MHz, ASK, 30 MHz to 1000 MHz, vertical & horizontal polarisation**Final\_Result:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 47.264          | 12.85              | 50.7           | 37.9        | 1000            | 120.0           | 208.0       | V   | 90            | 15           |
| 54.728          | 15.02              | 50.7           | 35.7        | 1000            | 120.0           | 307.0       | V   | 25            | 15           |
| 63.988          | 17.64              | 50.7           | 33.1        | 1000            | 120.0           | 291.0       | V   | -45           | 13           |
| 73.184          | 5.40               | 50.7           | 45.3        | 1000            | 120.0           | 400.0       | V   | 112           | 9            |
| 181.292         | 9.80               | 50.7           | 40.9        | 1000            | 120.0           | 200.0       | V   | 167           | 11           |
| 431.849         | wanted signal      |                |             |                 |                 |             |     |               |              |
| 863.818         | 43.26              | 50.7           | 7.4         | 1000            | 120.0           | 203.0       | V   | 90            | 25           |

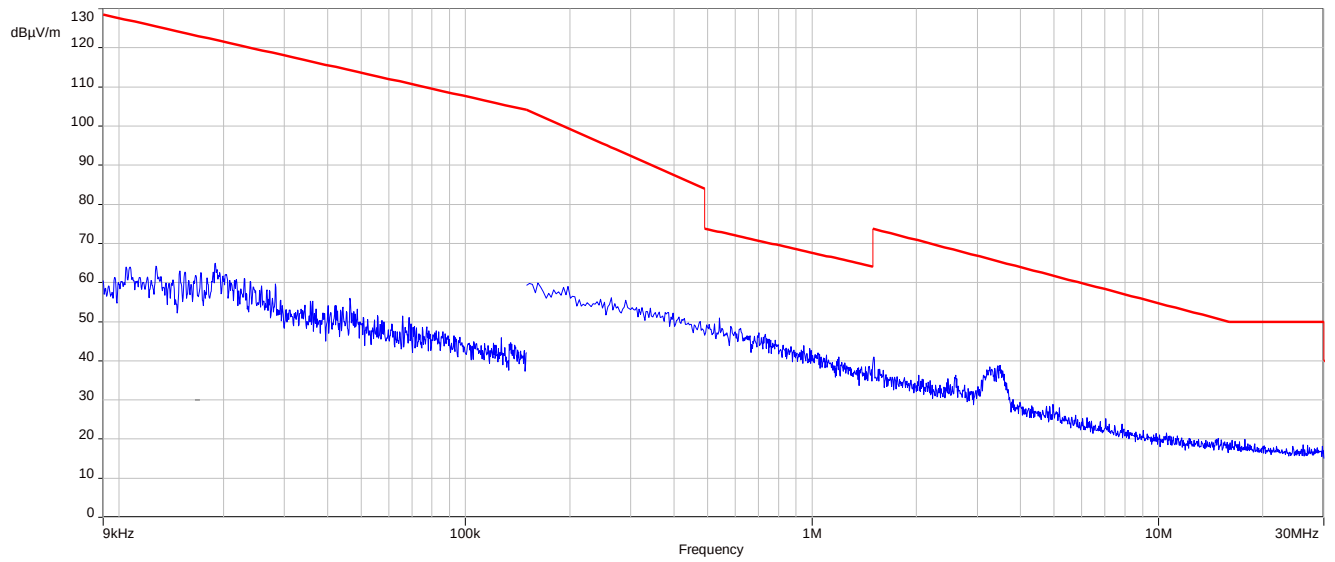
In addition to the limit according to Part 15.209 shown in the plot, the limit according to Part 15.231 also applies!

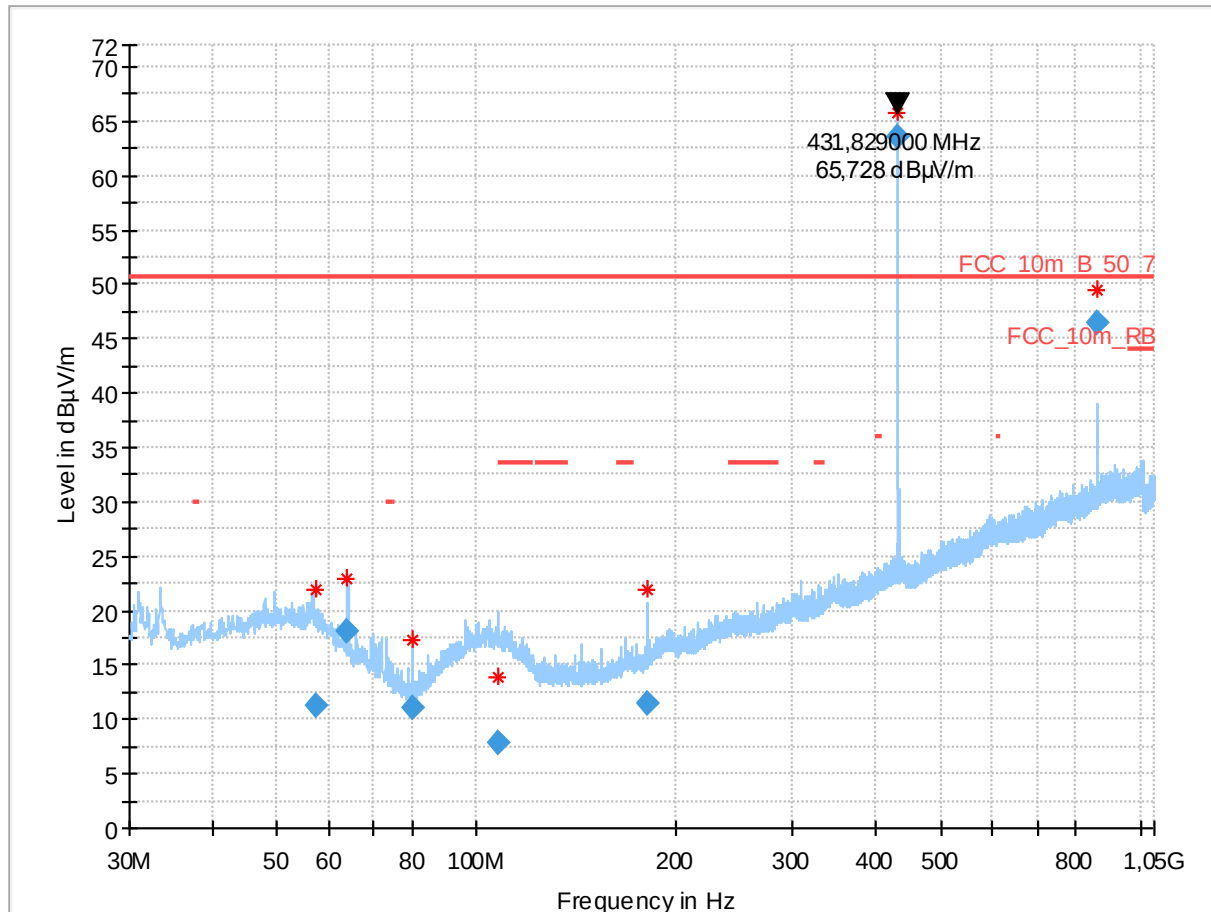
**Plot 3:** TX@431.9MHz, ASK, 1000 MHz to 6000 MHz, vertical & horizontal polarisation



- TX 431.9MHz

**Plot 1:** TX@431.9MHz, FSK, 9 kHz to 30 MHz



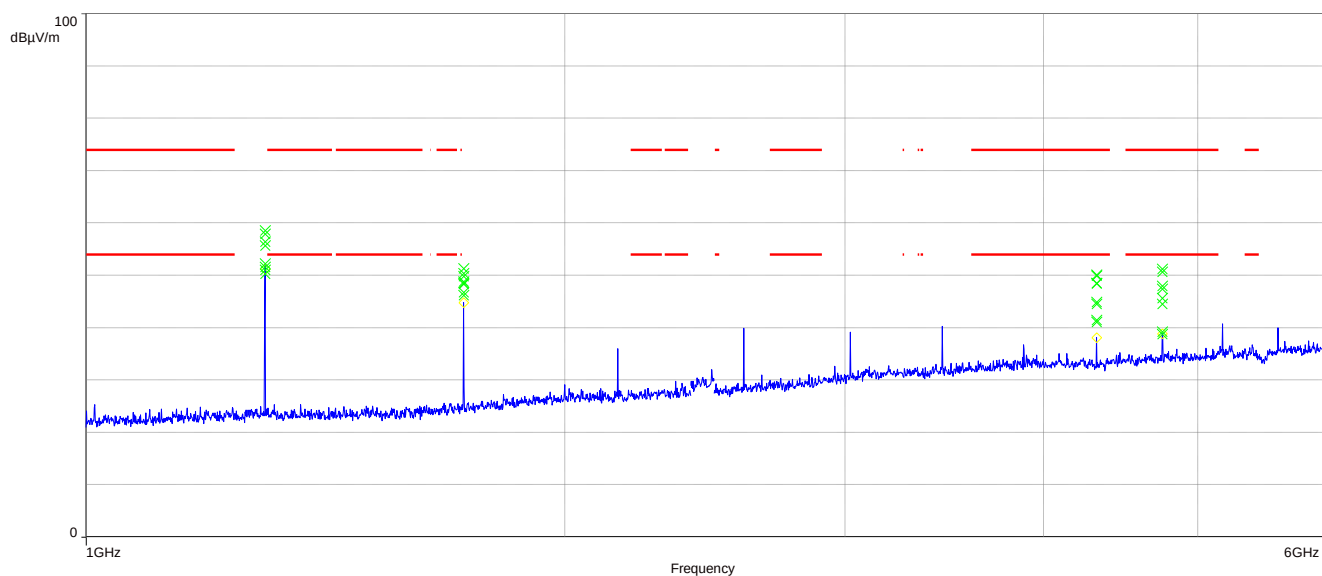
**Plot 2:** TX@431.9MHz, FSK, 30 MHz to 1000 MHz, vertical & horizontal polarisation**Final\_Result:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 57.167          | 11.33              | 50.7           | 39.4        | 1000            | 120.0           | 200.0       | V   | 343           | 16           |
| 63.982          | 18.19              | 50.7           | 32.5        | 1000            | 120.0           | 246.0       | V   | 135           | 13           |
| 80.000          | 11.07              | 50.7           | 39.6        | 1000            | 120.0           | 206.0       | V   | 90            | 8            |
| 107.965         | 7.93               | 50.7           | 42.8        | 1000            | 120.0           | 200.0       | V   | 11            | 14           |
| 180.940         | 11.40              | 50.7           | 39.3        | 1000            | 120.0           | 200.0       | V   | 218           | 11           |
| 431.859         | wanted signal      |                |             |                 |                 |             |     |               |              |
| 863.722         | 46.55              | 50.7           | 4.2         | 1000            | 120.0           | 203.0       | V   | 118           | 25           |

In addition to the limit according to Part 15.209 shown in the plot, the limit according to Part 15.231 also applies!

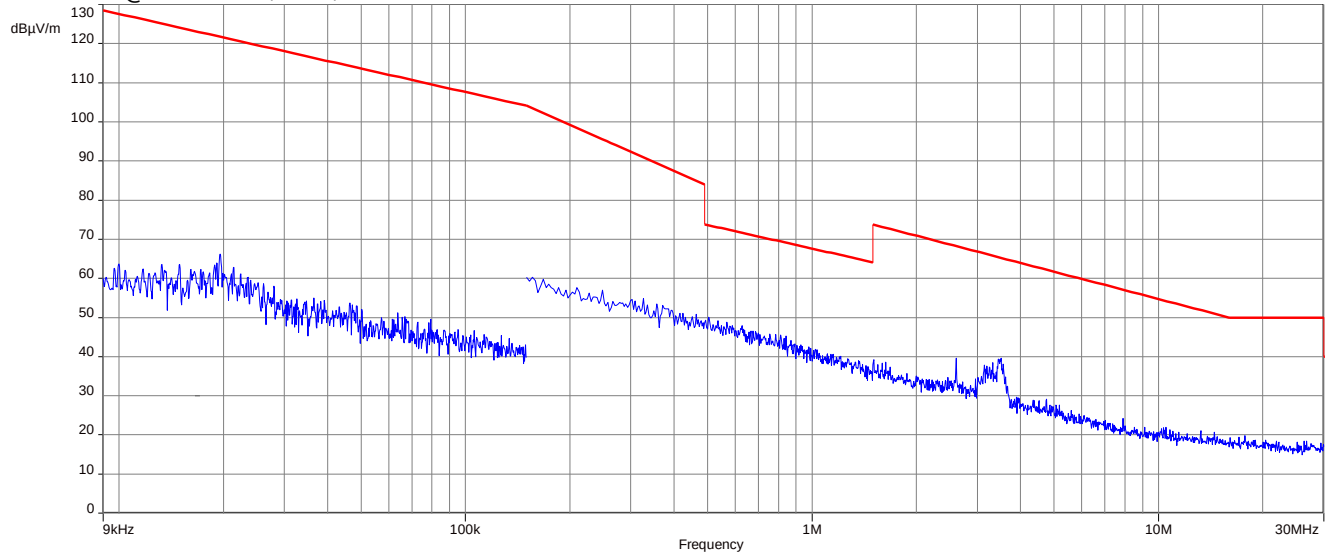


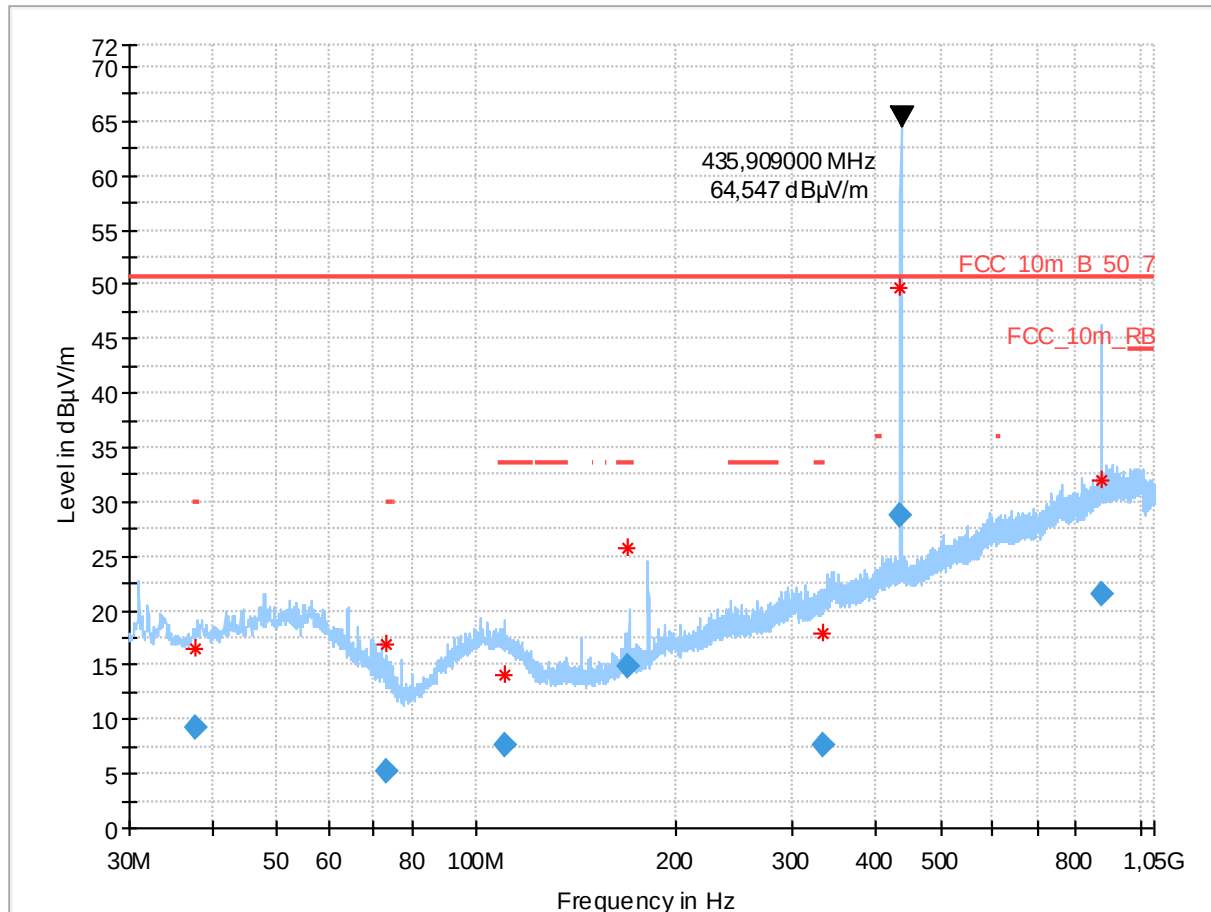
**Plot 3:** TX@431.9MHz, FSK, 1000 MHz to 6000 MHz, vertical & horizontal polarisation



- TX 435.9MHz

**Plot 1:** TX@435.9MHz, ASK, 9 kHz to 30 MHz

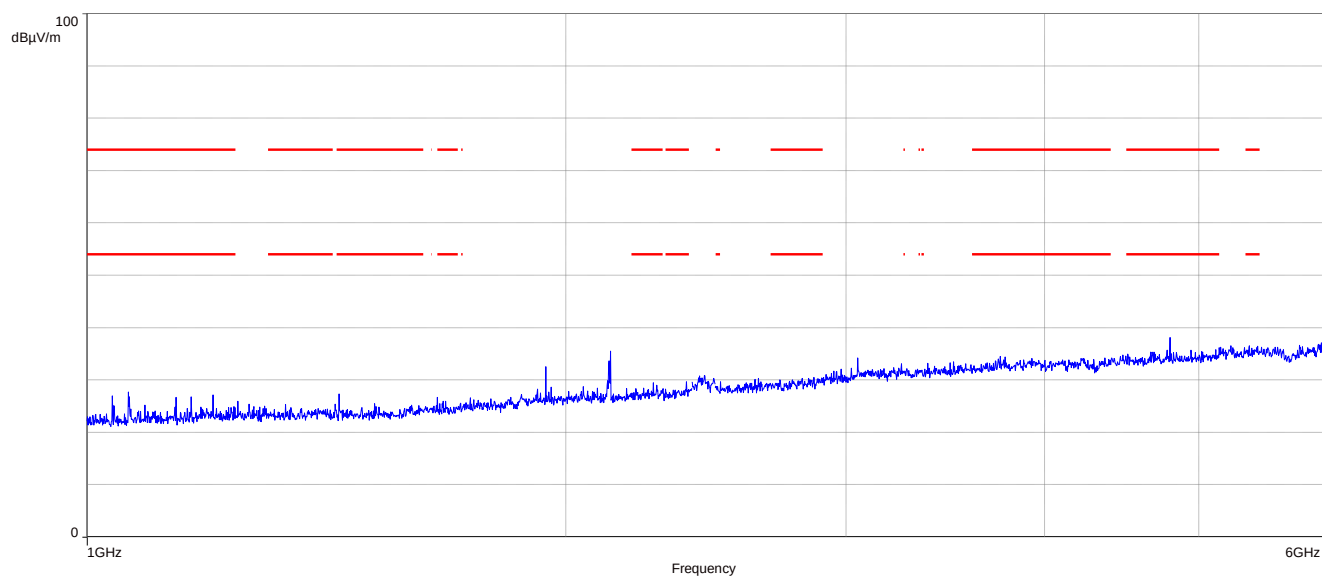


**Plot 2:** TX@435.9MHz, ASK, 30 MHz to 1000 MHz, vertical & horizontal polarisation**Final\_Result:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 37.820          | 9.33               | 50.7           | 41.4        | 1000            | 120.0           | 190.0       | V   | 0             | 14           |
| 72.997          | 5.23               | 50.7           | 45.5        | 1000            | 120.0           | 400.0       | V   | 299           | 9            |
| 110.512         | 7.61               | 50.7           | 43.1        | 1000            | 120.0           | 200.0       | V   | 0             | 13           |
| 169.541         | 14.80              | 50.7           | 35.9        | 1000            | 120.0           | 135.0       | V   | 136           | 11           |
| 332.019         | 7.64               | 50.7           | 43.1        | 1000            | 120.0           | 400.0       | V   | 9             | 16           |
| 435.690         | wanted signal      |                |             |                 |                 |             |     |               |              |
| 871.968         | 21.45              | 50.7           | 29.3        | 1000            | 120.0           | 111.0       | H   | 253           | 25           |

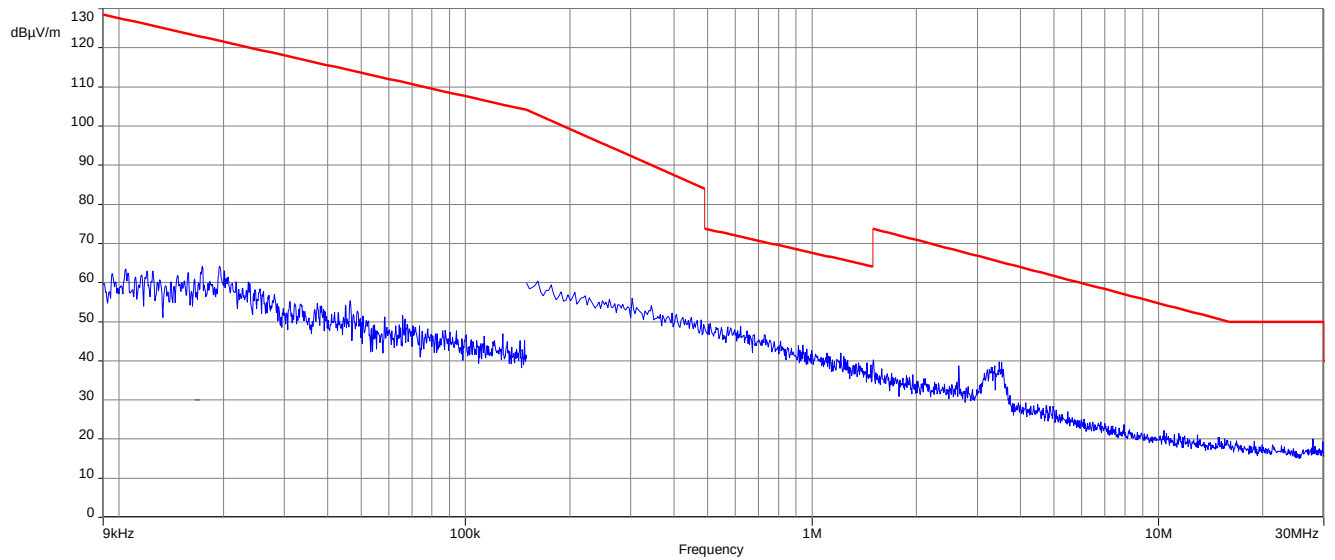
In addition to the limit according to Part 15.209 shown in the plot, the limit according to Part 15.231 also applies!

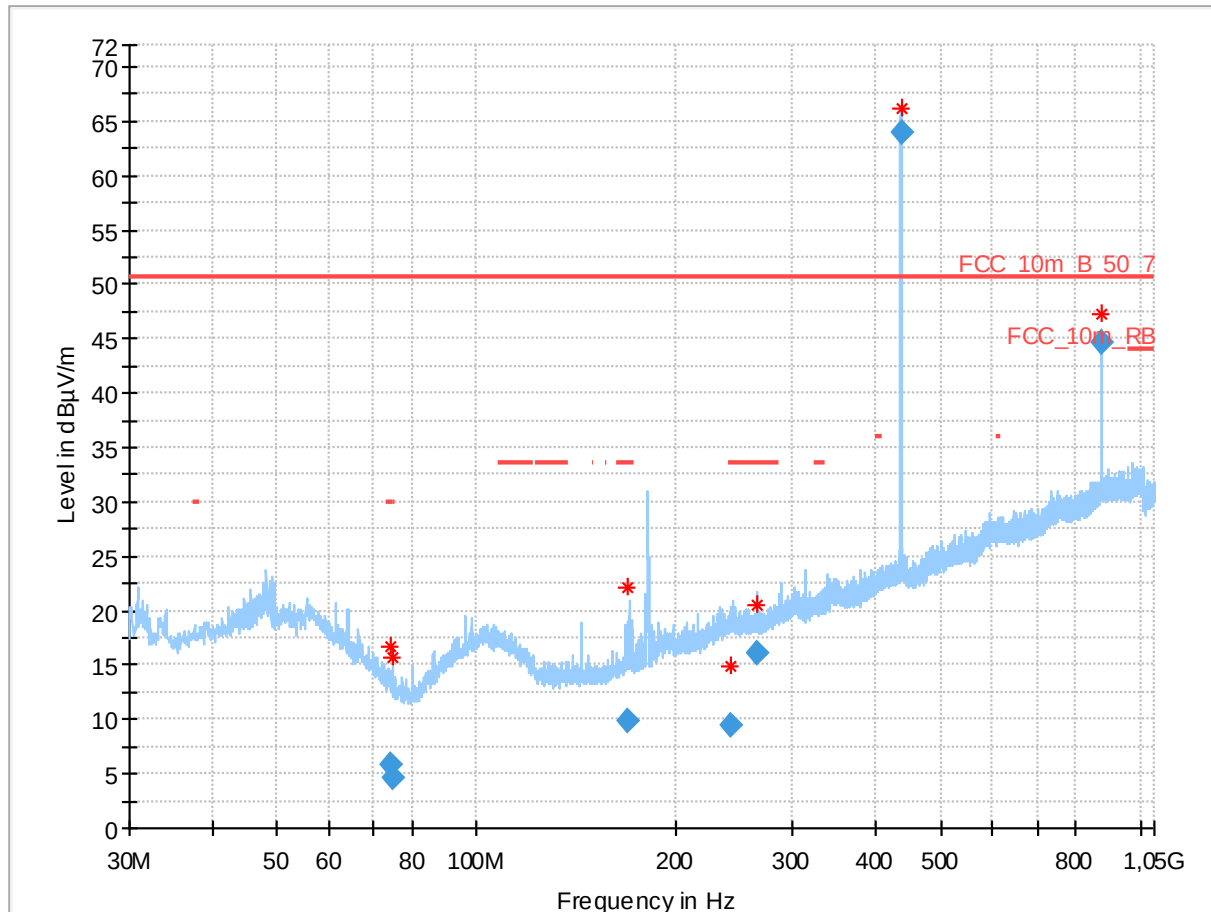
**Plot 3:** TX@435.9MHz, ASK, 1000 MHz to 6000 MHz, vertical & horizontal polarisation



- TX 435.9MHz

**Plot 1:** TX@435.9MHz, FSK, 9 kHz to 30 MHz

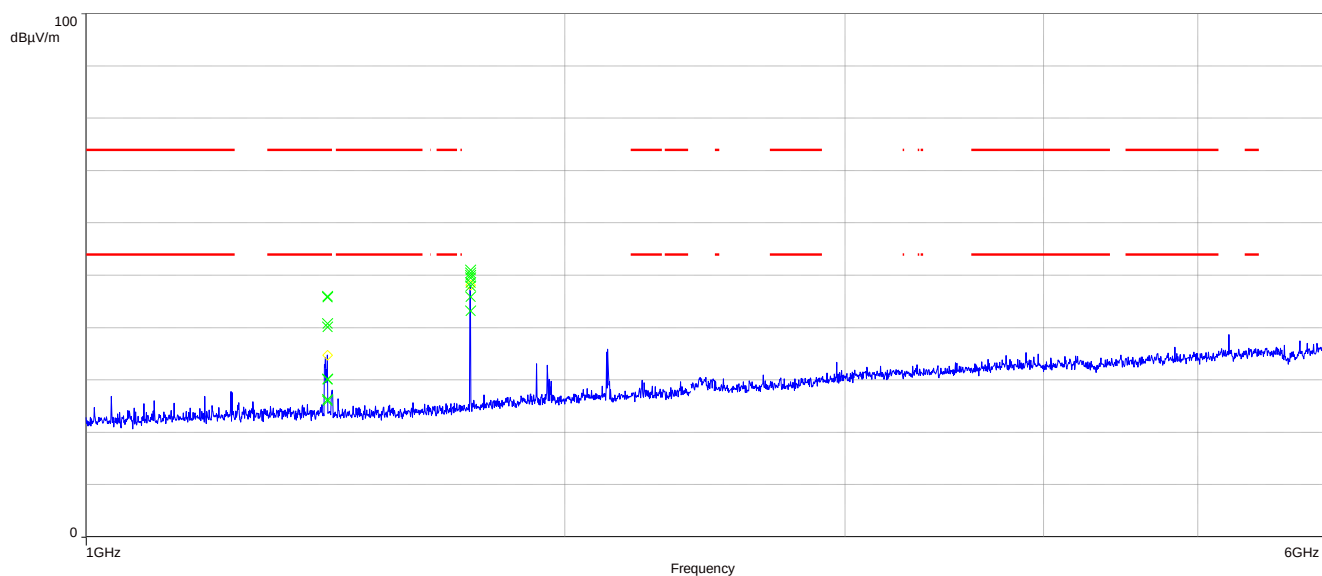


**Plot 2:** TX@435.9MHz, FSK, 30 MHz to 1000 MHz, vertical & horizontal polarisation**Final\_Result:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 74.228          | 5.74               | 50.7           | 45.0        | 1000            | 120.0           | 400.0       | V   | 0             | 9            |
| 74.751          | 4.69               | 50.7           | 46.0        | 1000            | 120.0           | 400.0       | V   | 137           | 9            |
| 169.510         | 9.82               | 50.7           | 40.9        | 1000            | 120.0           | 109.0       | V   | 161           | 11           |
| 242.461         | 9.43               | 50.7           | 41.3        | 1000            | 120.0           | 289.0       | V   | 83            | 14           |
| 264.014         | 16.05              | 50.7           | 34.7        | 1000            | 120.0           | 200.0       | V   | 196           | 14           |
| 435.863         | wanted signal      |                |             |                 |                 |             |     |               |              |
| 871.730         | 44.56              | 50.7           | 6.1         | 1000            | 120.0           | 307.0       | H   | 243           | 25           |

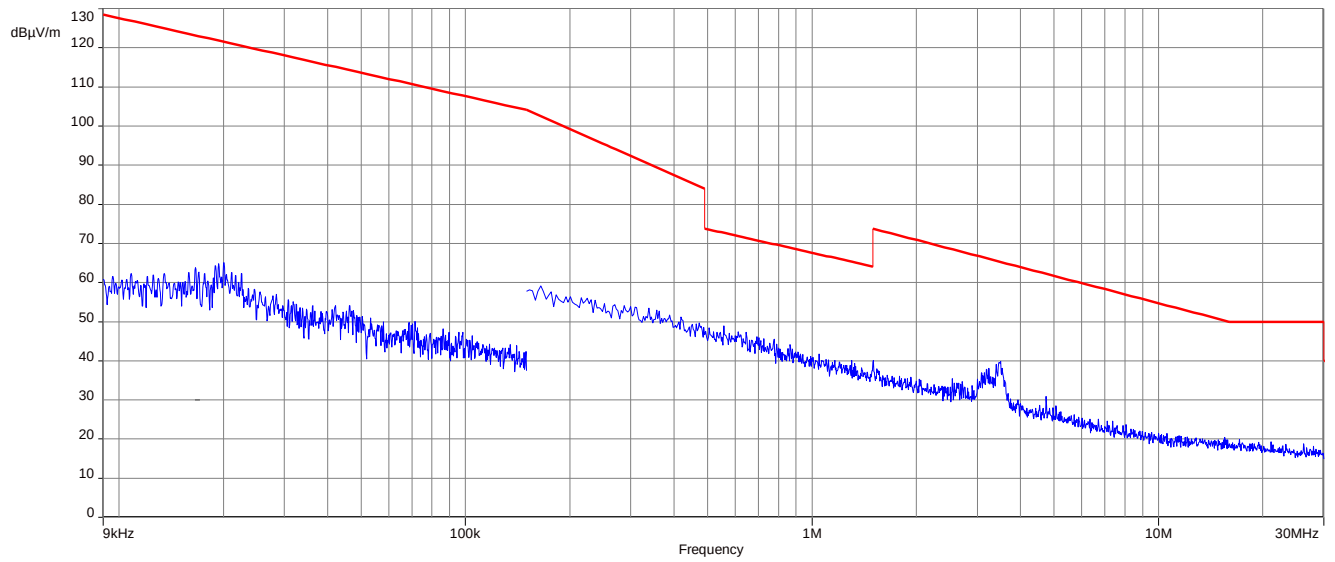
In addition to the limit according to Part 15.209 shown in the plot, the limit according to Part 15.231 also applies!

**Plot 3:** TX@435.9MHz, FSK, 1000 MHz to 6000 MHz, vertical & horizontal polarisation

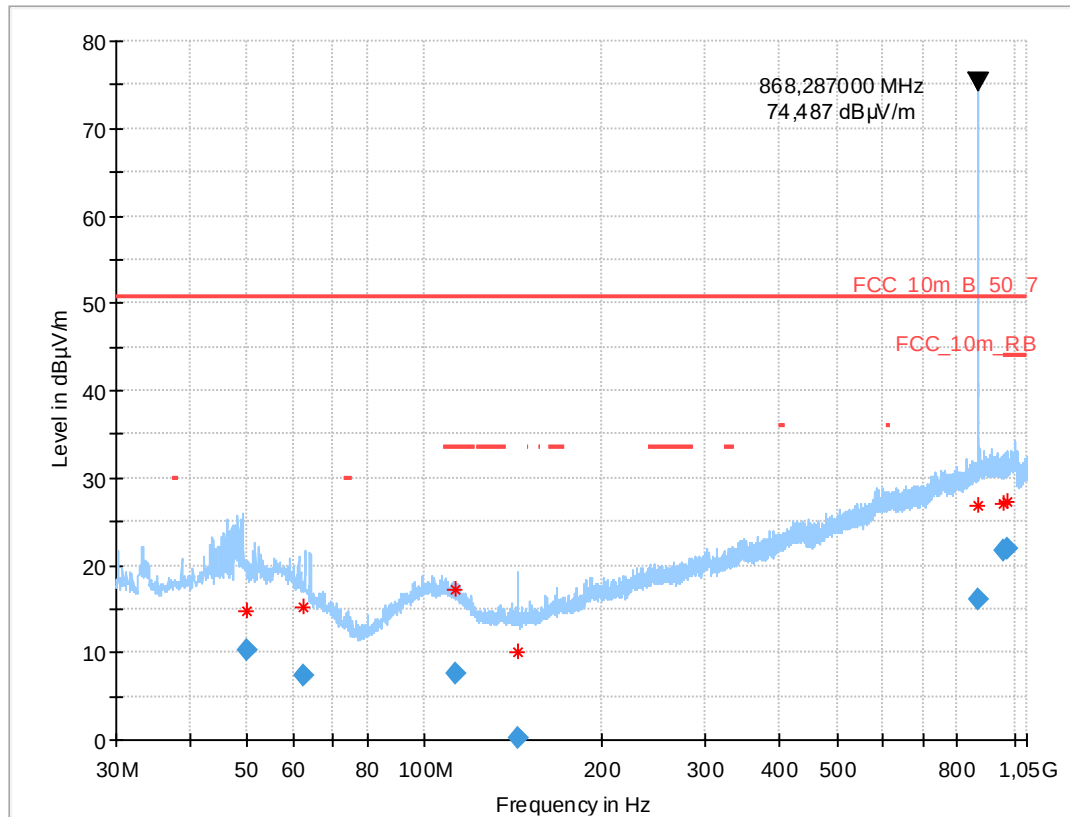


- TX 868.3MHz

**Plot 1:** TX@868.3MHz, ASK, 9 kHz to 30 MHz



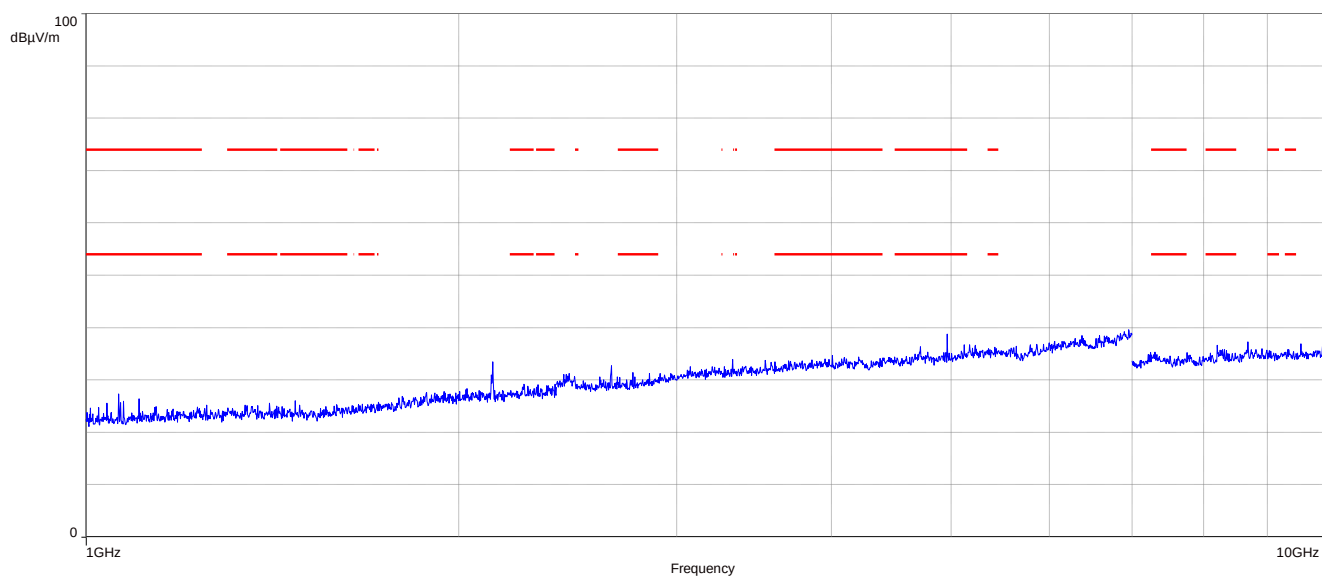


**Plot 2:** TX@868.3MHz, ASK, 30 MHz to 1000 MHz, vertical & horizontal polarisation**Final\_Result:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 49.784          | 10.23              | 50.7           | 40.5        | 1000            | 120.0           | 104.0       | V   | 22            | 15           |
| 62.109          | 7.40               | 50.7           | 43.3        | 1000            | 120.0           | 200.0       | V   | 225           | 13           |
| 112.659         | 7.50               | 50.7           | 43.2        | 1000            | 120.0           | 194.0       | H   | 60            | 13           |
| 143.977         | 0.23               | 50.7           | 50.5        | 1000            | 120.0           | 200.0       | V   | -37           | 10           |
| 868.010         | wanted signal      |                |             |                 |                 |             |     |               |              |
| 961.943         | 21.61              | 50.7           | 29.1        | 1000            | 120.0           | 112.0       | V   | -45           | 25           |
| 974.155         | 21.94              | 50.7           | 28.8        | 1000            | 120.0           | 400.0       | H   | 135           | 26           |

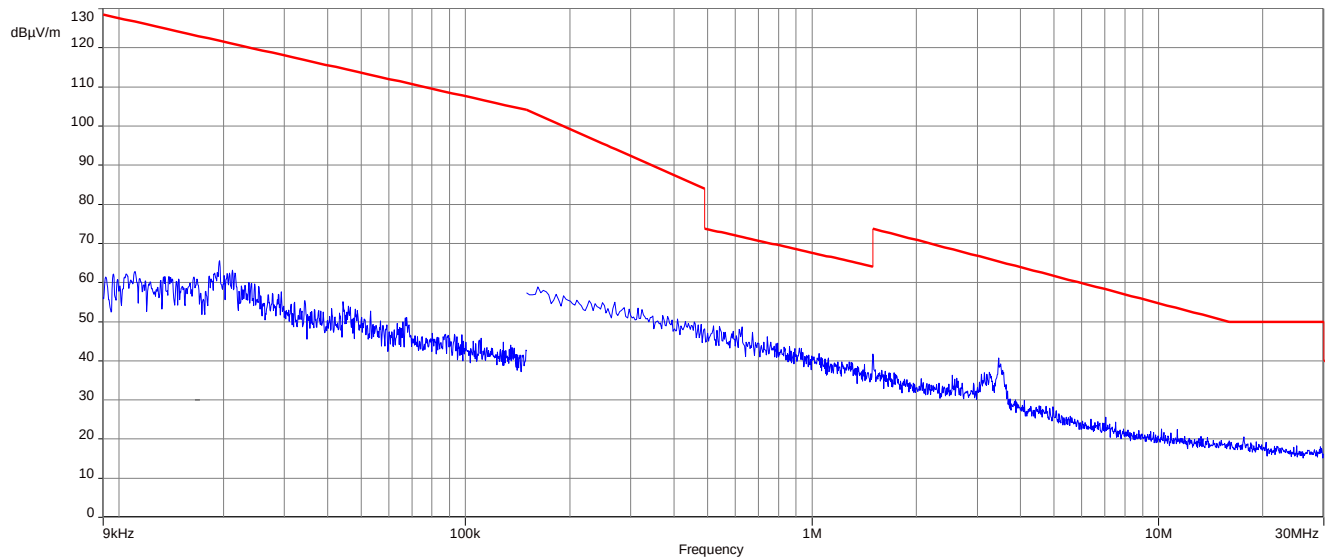
In addition to the limit according to Part 15.209 shown in the plot, the limit according to Part 15.231 also applies!

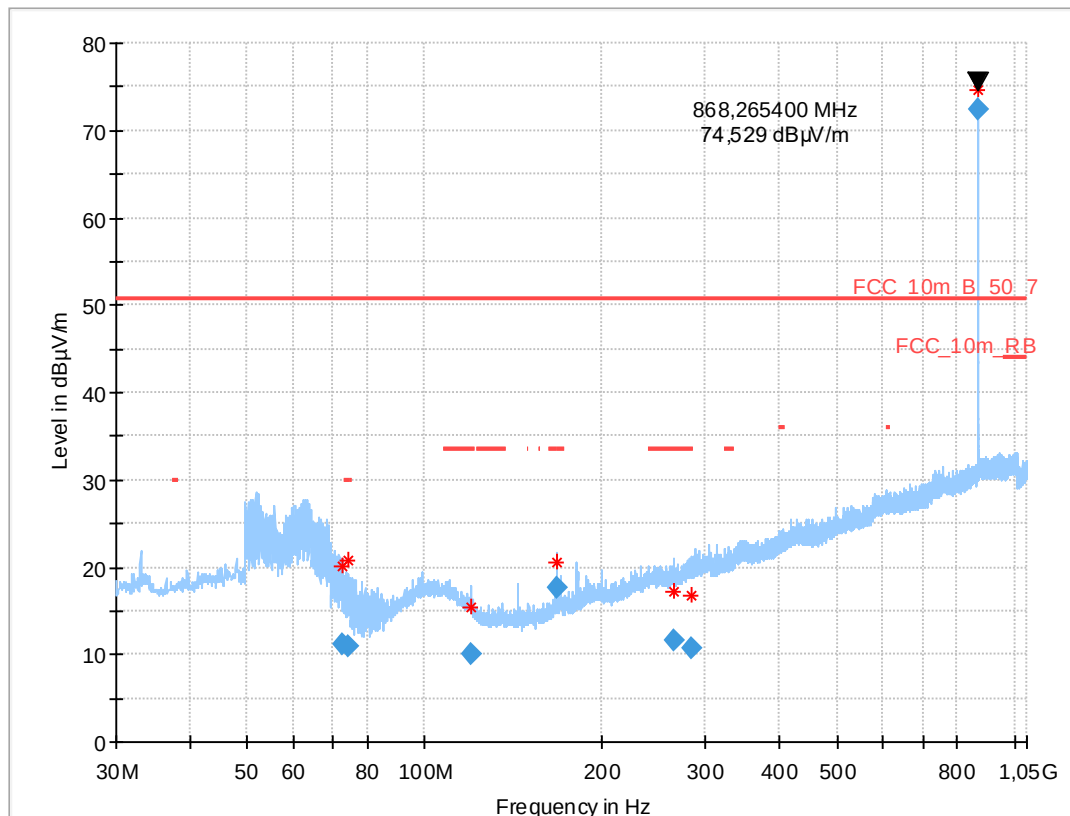
**Plot 3:** TX@868.3MHz, ASK, 1000 MHz to 6000 MHz, vertical & horizontal polarisation



- TX 868.3MHz

**Plot 1:** TX@868.3MHz, FSK, 9 kHz to 30 MHz

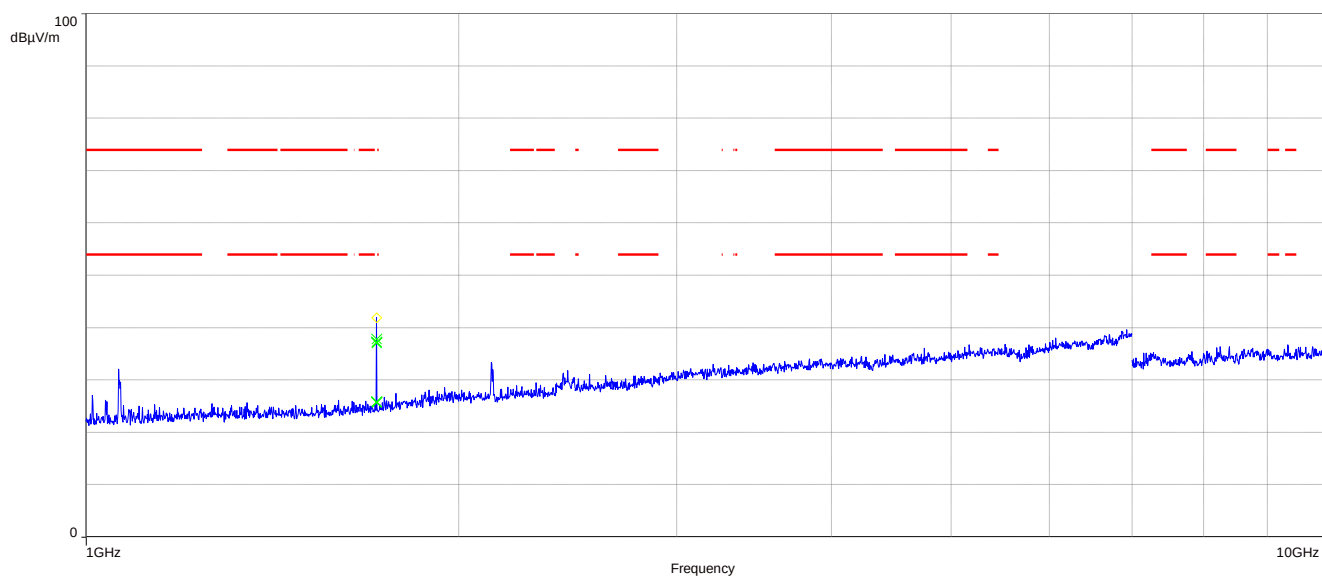


**Plot 2:** TX@868.3MHz, FSK, 30 MHz to 1000 MHz, vertical & horizontal polarisation**Final\_Result:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 72.786          | 11.20              | 50.7           | 39.5        | 1000            | 120.0           | 186.0       | V   | 205           | 10           |
| 74.247          | 11.03              | 50.7           | 39.7        | 1000            | 120.0           | 200.0       | V   | 180           | 9            |
| 119.997         | 10.14              | 50.7           | 40.6        | 1000            | 120.0           | 135.0       | V   | 90            | 11           |
| 168.001         | 17.74              | 50.7           | 33.0        | 1000            | 120.0           | 106.0       | V   | 193           | 11           |
| 264.002         | 11.73              | 50.7           | 39.0        | 1000            | 120.0           | 118.0       | V   | 180           | 14           |
| 283.909         | 10.62              | 50.7           | 40.1        | 1000            | 120.0           | 200.0       | V   | 22            | 15           |
| 868.265         | wanted signal      |                |             |                 |                 |             |     |               |              |

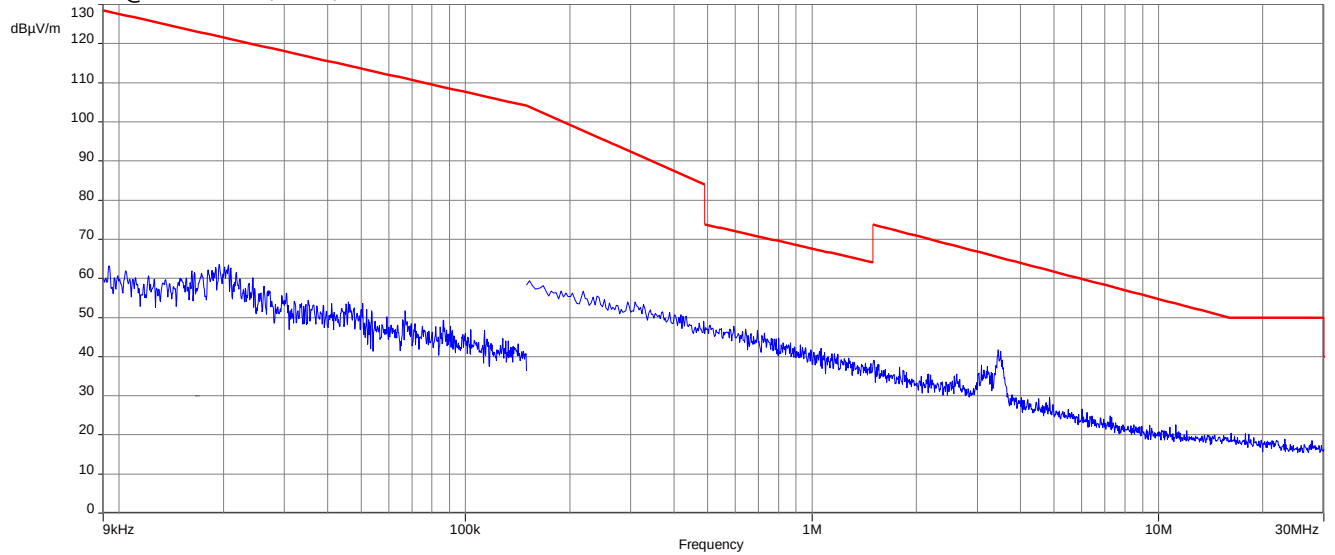
In addition to the limit according to Part 15.209 shown in the plot, the limit according to Part 15.231 also applies!

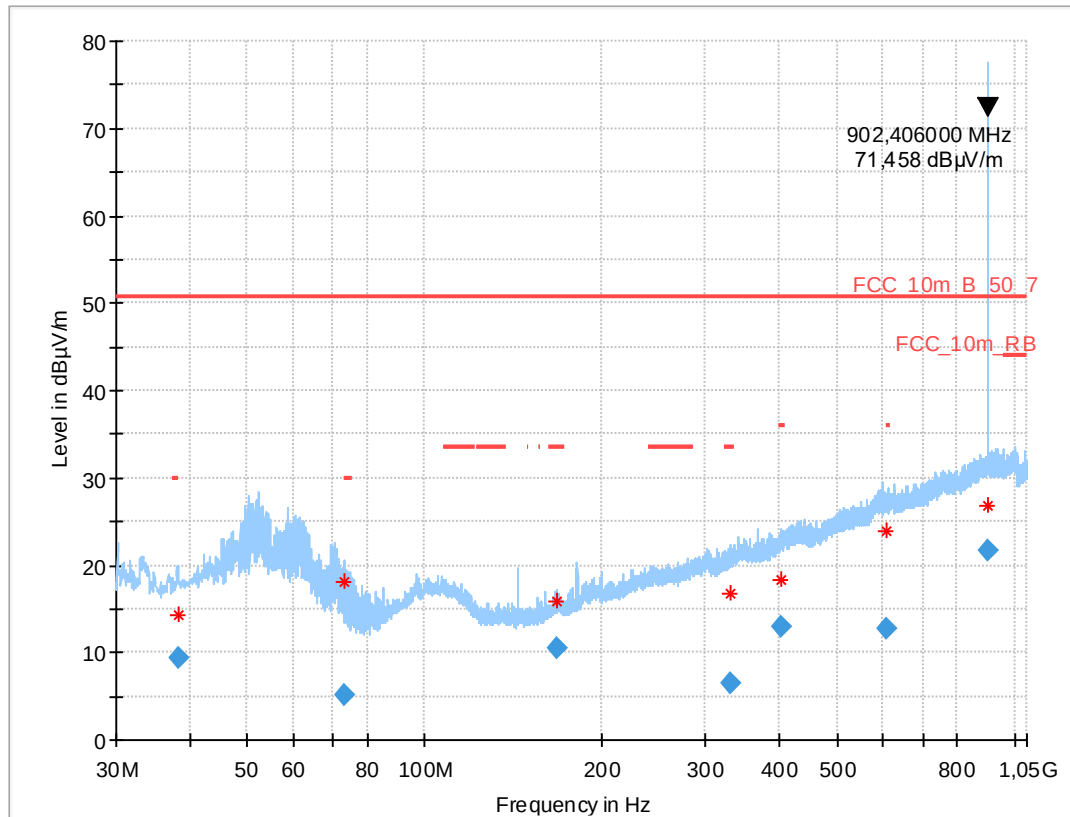
**Plot 3:** TX@868.3MHz, FSK, 1000 MHz to 6000 MHz, vertical & horizontal polarisation



- TX 902.0MHz

**Plot 1:** TX@902.0MHz, ASK, 9 kHz to 30 MHz

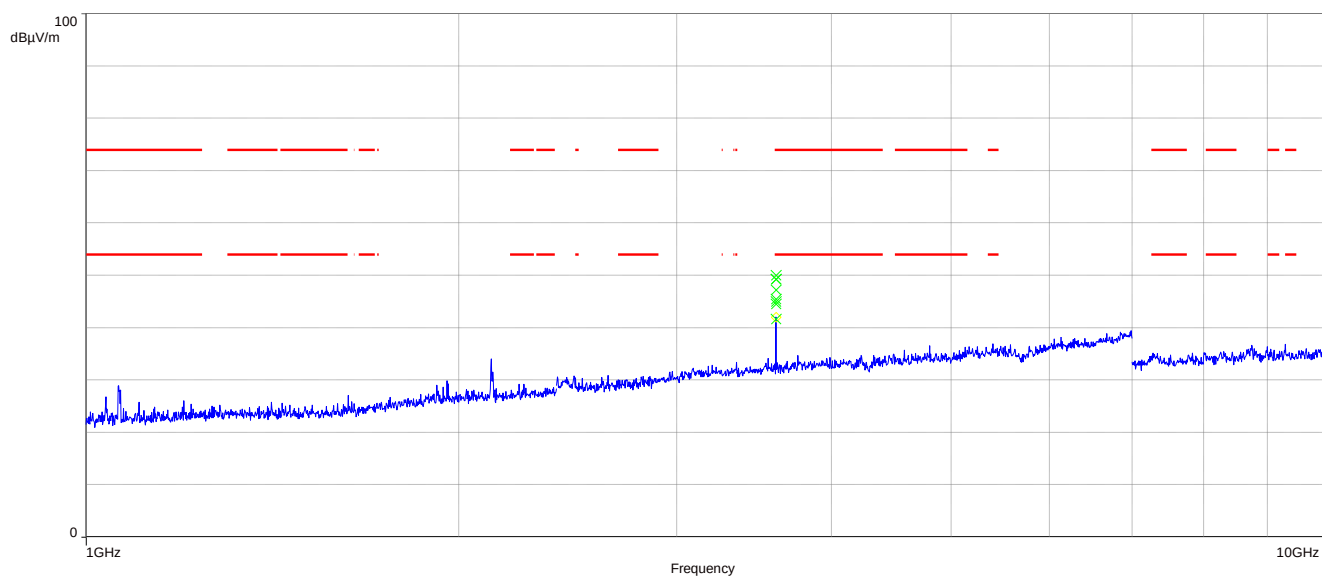


**Plot 2:** TX@902.0MHz, ASK, 30 MHz to 1000 MHz, vertical & horizontal polarisation**Final\_Result:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 38.179          | 9.41               | 50.7           | 41.3        | 1000            | 120.0           | 203.0       | V   | 90            | 14           |
| 73.026          | 5.13               | 50.7           | 45.6        | 1000            | 120.0           | 382.0       | V   | 315           | 9            |
| 168.011         | 10.52              | 50.7           | 40.2        | 1000            | 120.0           | 116.0       | V   | 266           | 11           |
| 330.953         | 6.45               | 50.7           | 44.3        | 1000            | 120.0           | 200.0       | V   | 11            | 16           |
| 401.193         | 13.00              | 50.7           | 37.7        | 1000            | 120.0           | 196.0       | H   | -45           | 18           |
| 609.158         | 12.82              | 50.7           | 37.9        | 1000            | 120.0           | 325.0       | H   | -45           | 22           |
| 902.552         | wanted signal      |                |             |                 |                 |             |     |               |              |

In addition to the limit according to Part 15.209 shown in the plot, the limit according to Part 15.231 also applies!

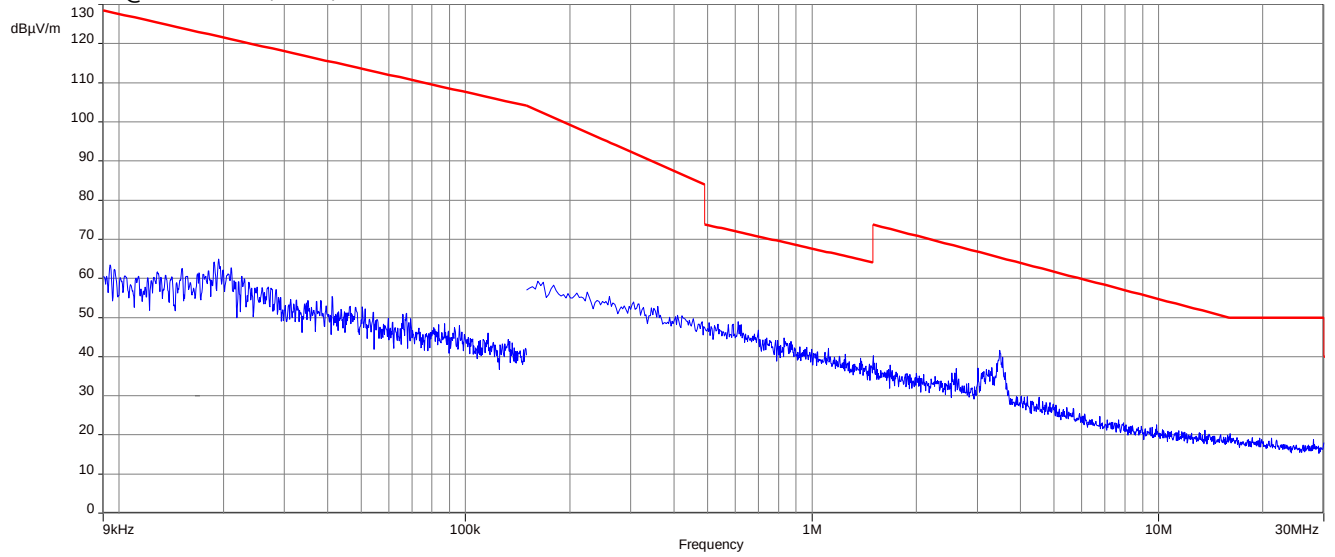
**Plot 3:** TX@902.0MHz, ASK, 1000 MHz to 6000 MHz, vertical & horizontal polarisation

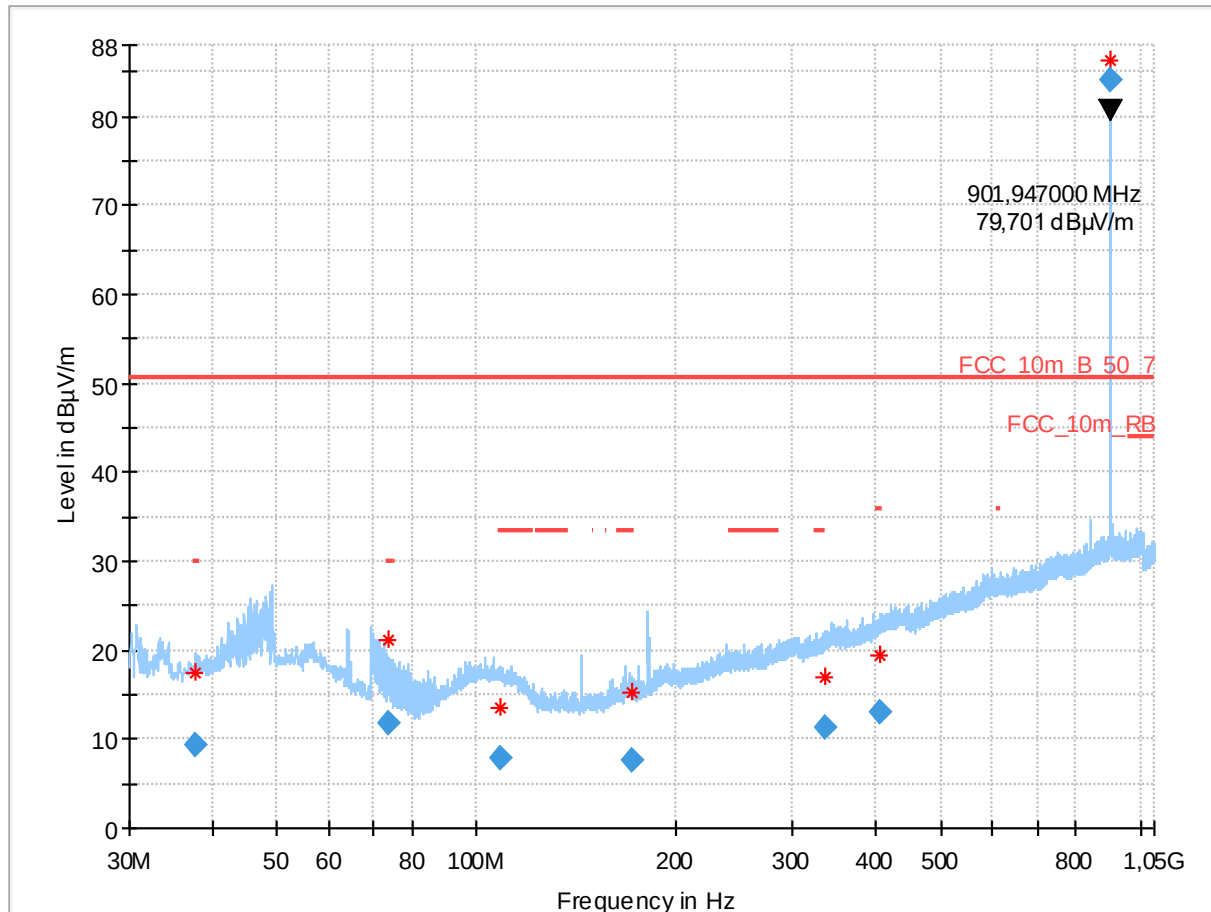




- TX 902.0MHz

**Plot 1:** TX@902.0MHz, FSK, 9 kHz to 30 MHz

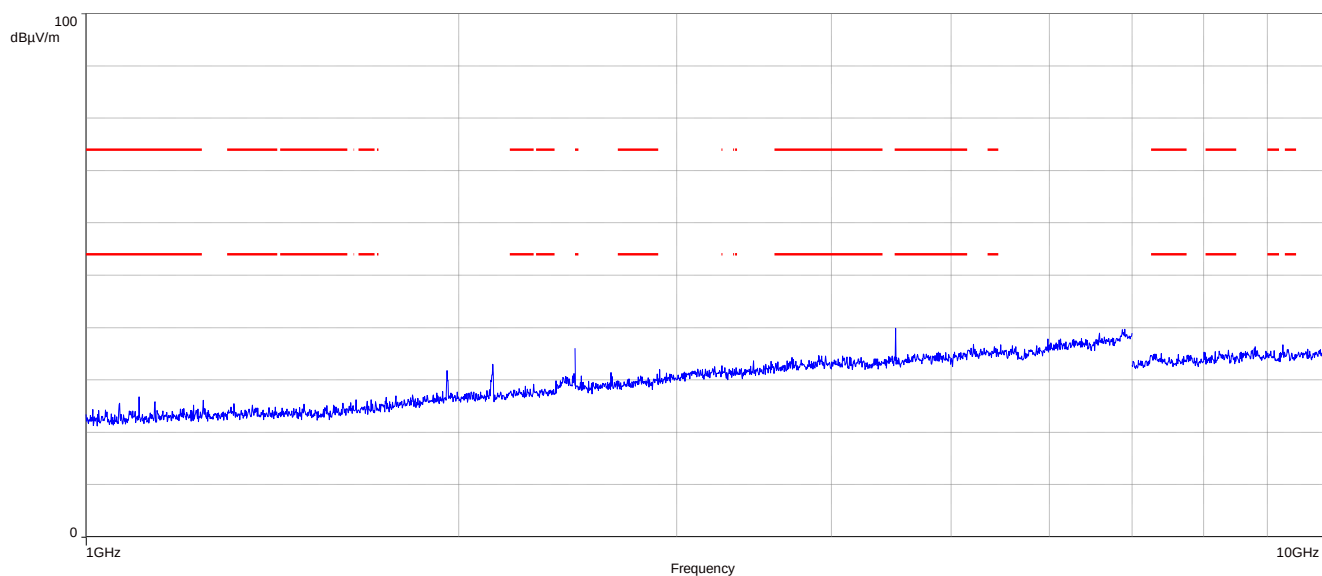


**Plot 2:** TX@902.0MHz, FSK, 30 MHz to 1000 MHz, vertical & horizontal polarisation**Final\_Result:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 37.777          | 9.39               | 50.7           | 41.3        | 1000            | 120.0           | 200.0       | V   | 170           | 14           |
| 73.733          | 11.88              | 50.7           | 38.8        | 1000            | 120.0           | 400.0       | V   | 122           | 9            |
| 108.684         | 7.90               | 50.7           | 42.8        | 1000            | 120.0           | 357.0       | H   | 225           | 13           |
| 171.237         | 7.72               | 50.7           | 43.0        | 1000            | 120.0           | 221.0       | V   | 243           | 11           |
| 333.926         | 11.41              | 50.7           | 39.3        | 1000            | 120.0           | 200.0       | V   | -45           | 16           |
| 405.305         | 13.14              | 50.7           | 37.6        | 1000            | 120.0           | 400.0       | V   | 45            | 18           |
| 902.044         | wanted signal      |                |             |                 |                 |             |     |               |              |

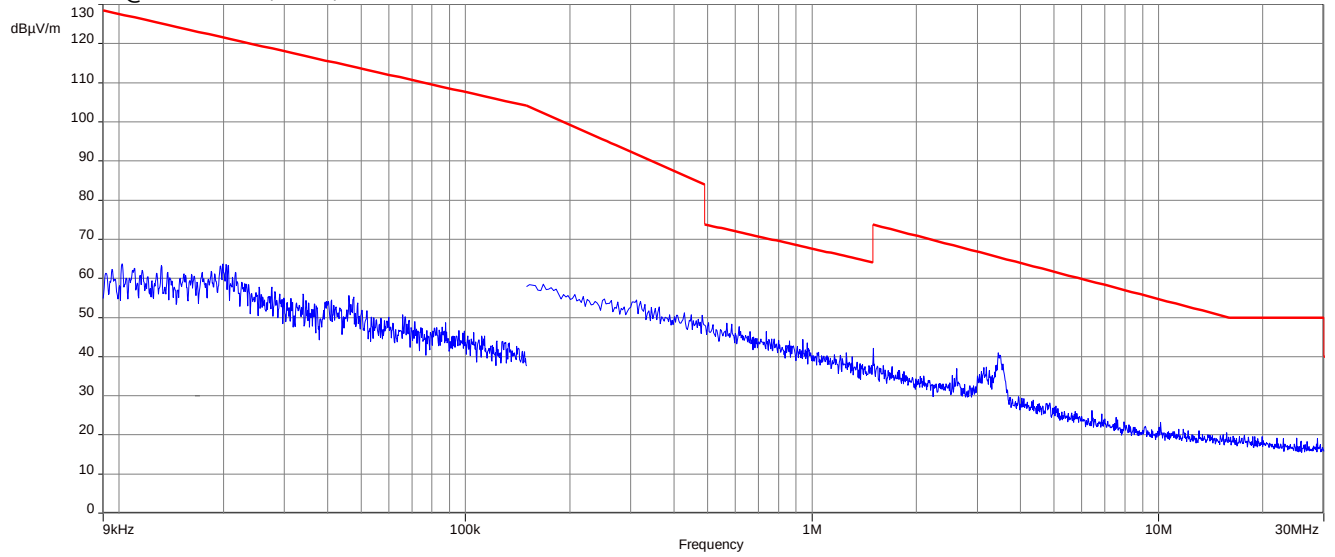
In addition to the limit according to Part 15.209 shown in the plot, the limit according to Part 15.231 also applies!

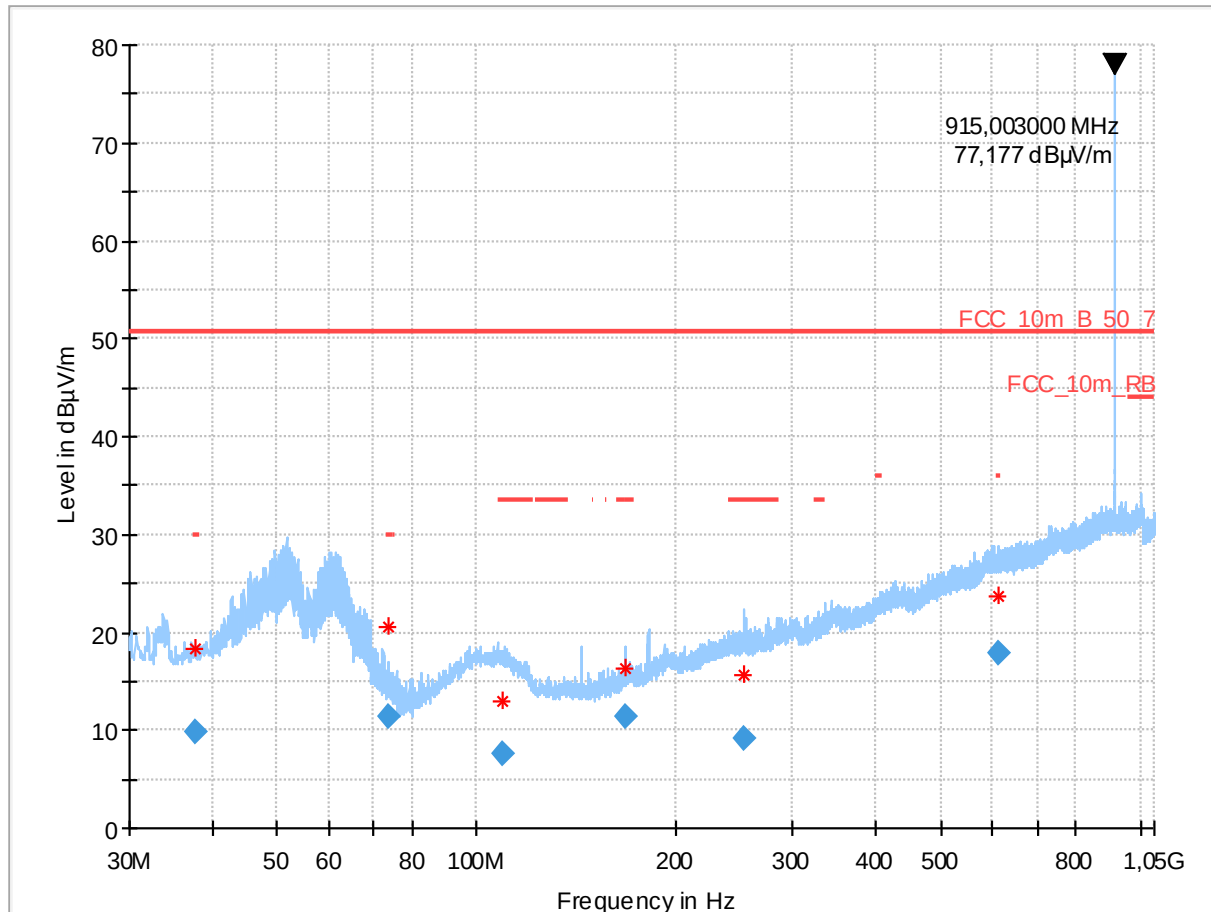
**Plot 3:** TX@902.0MHz, FSK, 1000 MHz to 6000 MHz, vertical & horizontal polarisation



- TX 915.0MHz

**Plot 1:** TX@915.0MHz, ASK, 9 kHz to 30 MHz

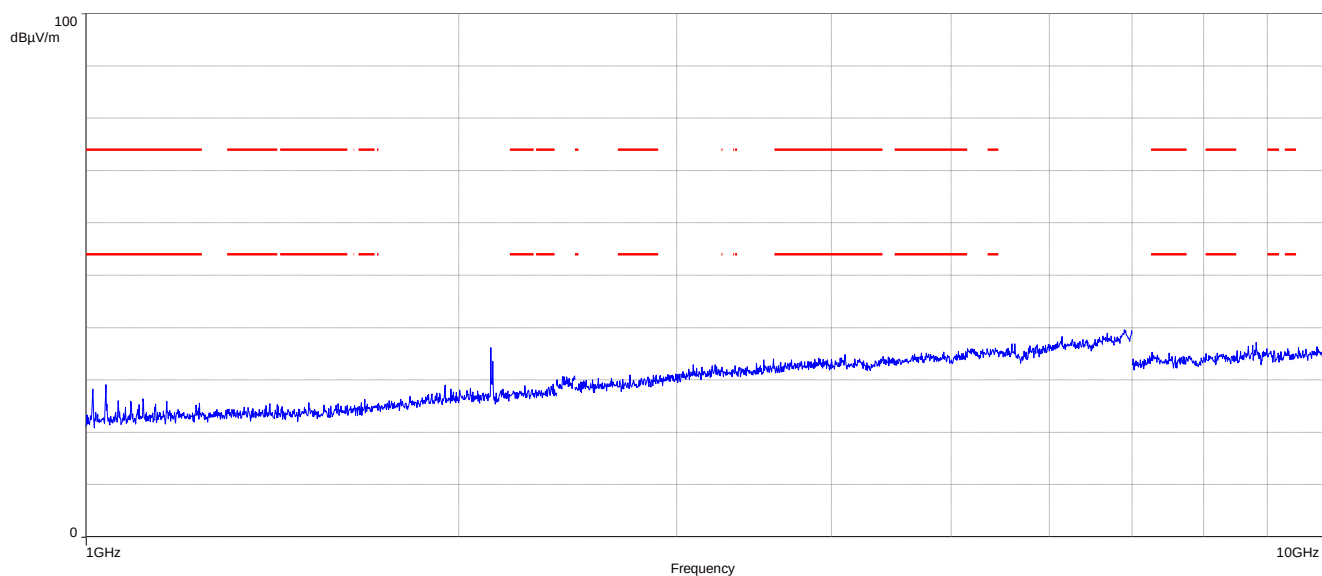


**Plot 2:** TX@915.0MHz, ASK, 30 MHz to 1000 MHz, vertical & horizontal polarisation**Final\_Result:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 37.762          | 9.73               | 50.7           | 41.0        | 1000            | 120.0           | 123.0       | V   | 225           | 14           |
| 73.766          | 11.32              | 50.7           | 39.4        | 1000            | 120.0           | 200.0       | V   | 90            | 9            |
| 109.784         | 7.58               | 50.7           | 43.1        | 1000            | 120.0           | 209.0       | H   | 135           | 13           |
| 168.006         | 11.40              | 50.7           | 39.3        | 1000            | 120.0           | 111.0       | V   | 180           | 11           |
| 252.640         | 9.21               | 50.7           | 41.5        | 1000            | 120.0           | 376.0       | V   | 32            | 14           |
| 610.873         | 17.82              | 50.7           | 32.9        | 1000            | 120.0           | 400.0       | V   | 193           | 22           |
| 915.002         | wanted signal      |                |             |                 |                 |             |     |               |              |

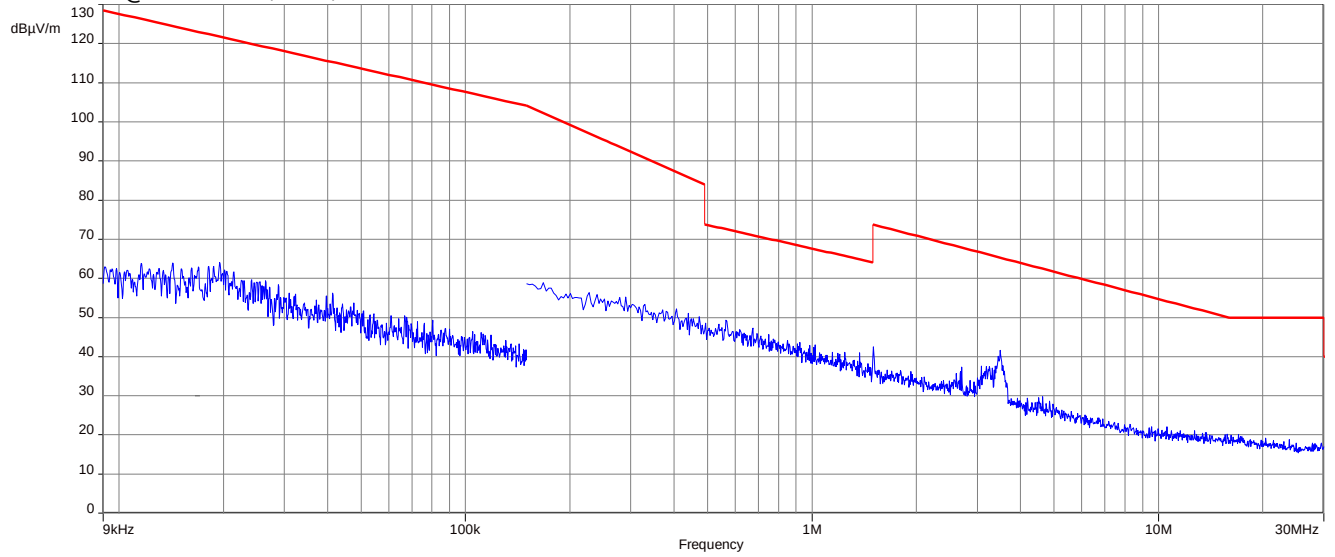
In addition to the limit according to Part 15.209 shown in the plot, the limit according to Part 15.231 also applies!

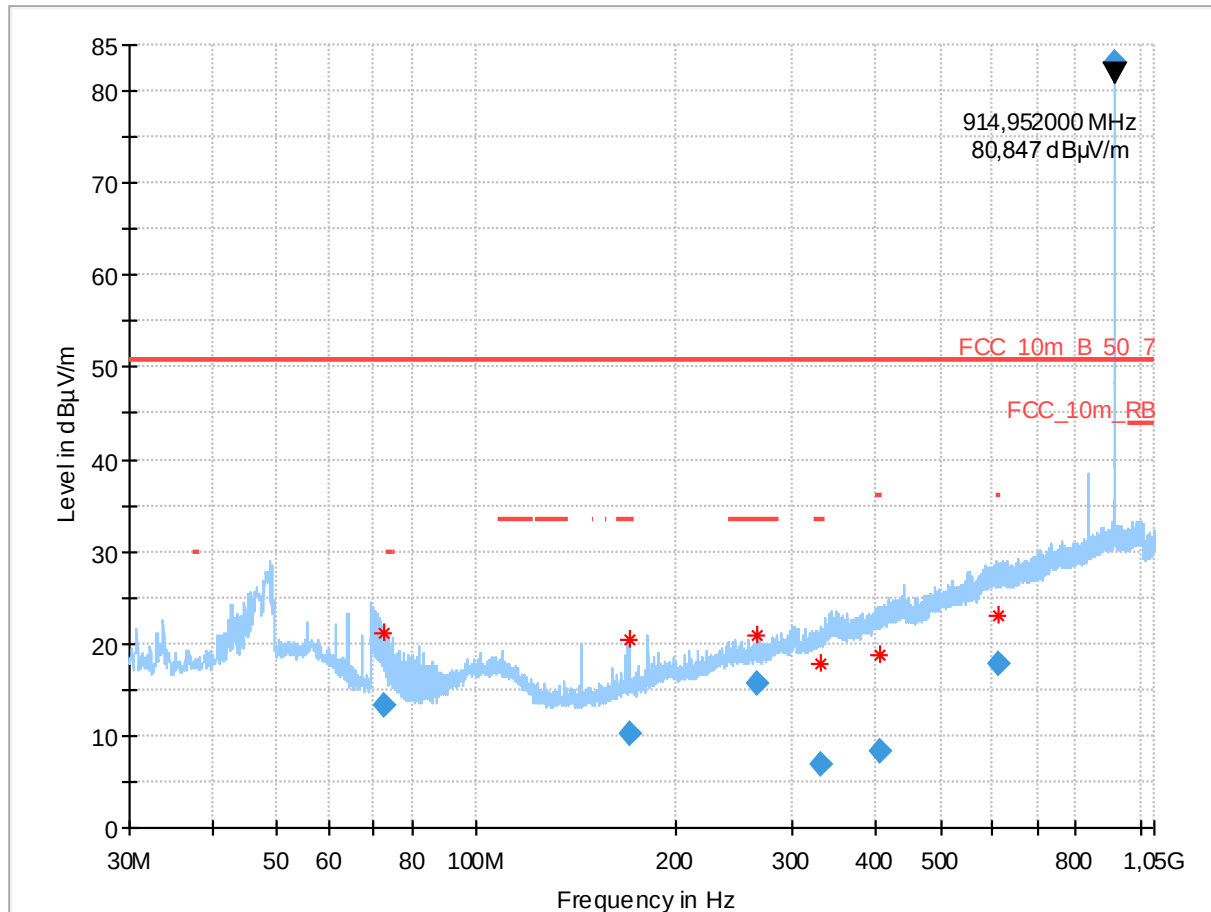
**Plot 3:** TX@915.0MHz, ASK, 1000 MHz to 6000 MHz, vertical & horizontal polarisation



- TX 915.0MHz

**Plot 1:** TX@915.0MHz, FSK, 9 kHz to 30 MHz



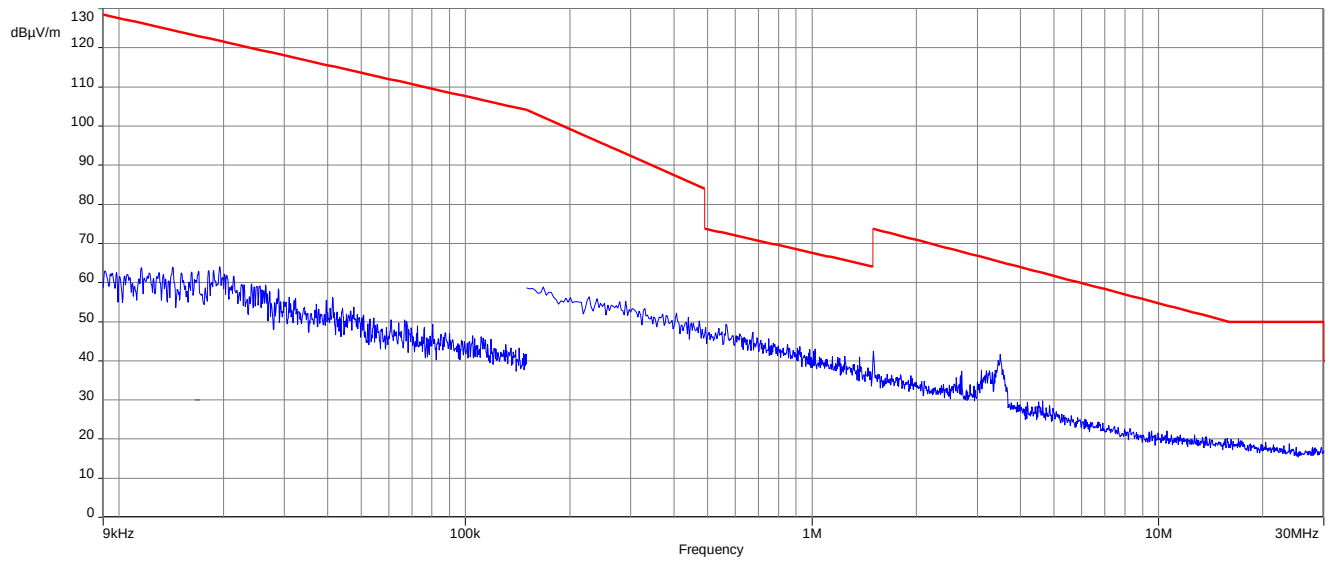
**Plot 2:** TX@915.0MHz, FSK, 30 MHz to 1000 MHz, vertical & horizontal polarisation**Final\_Result:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 72.704          | 13.24              | 50.7           | 37.5        | 1000            | 120.0           | 400.0       | V   | 77            | 10           |
| 169.901         | 10.12              | 50.7           | 40.6        | 1000            | 120.0           | 121.0       | V   | 140           | 11           |
| 264.014         | 15.64              | 50.7           | 35.1        | 1000            | 120.0           | 400.0       | V   | -9            | 14           |
| 329.867         | 6.79               | 50.7           | 43.9        | 1000            | 120.0           | 322.0       | V   | 112           | 16           |
| 405.904         | 8.23               | 50.7           | 42.5        | 1000            | 120.0           | 400.0       | V   | 0             | 18           |
| 611.201         | 17.79              | 50.7           | 32.9        | 1000            | 120.0           | 400.0       | V   | 180           | 22           |
| 914.962         | wanted signal      |                |             |                 |                 |             |     |               |              |

In addition to the limit according to Part 15.209 shown in the plot, the limit according to Part 15.231 also applies!

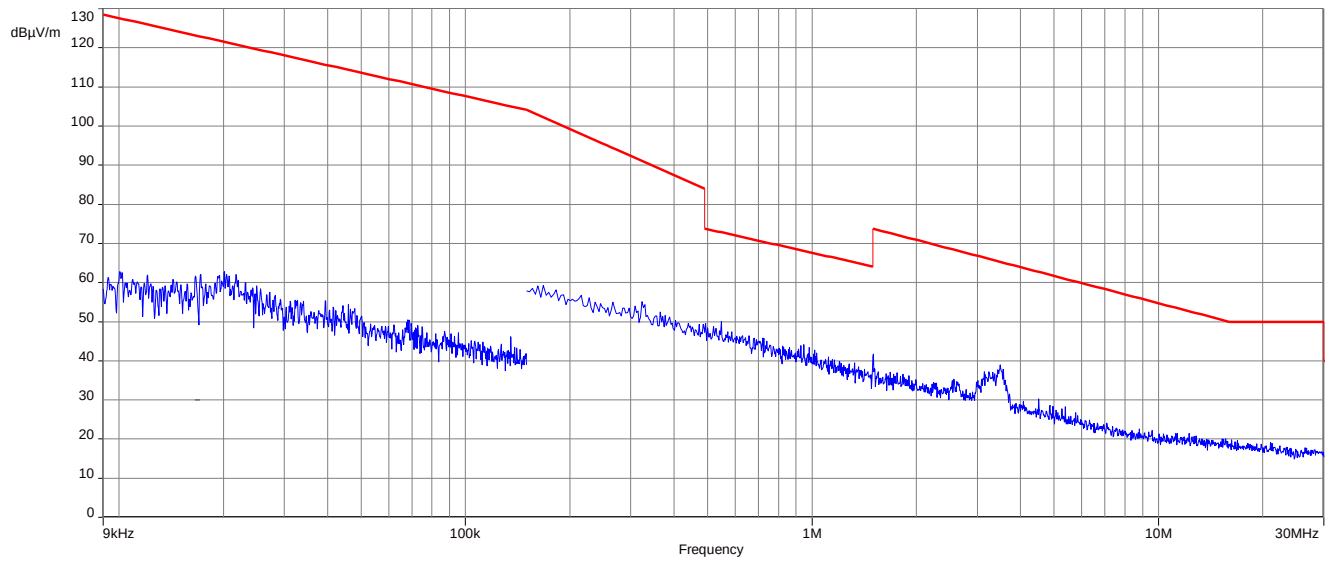


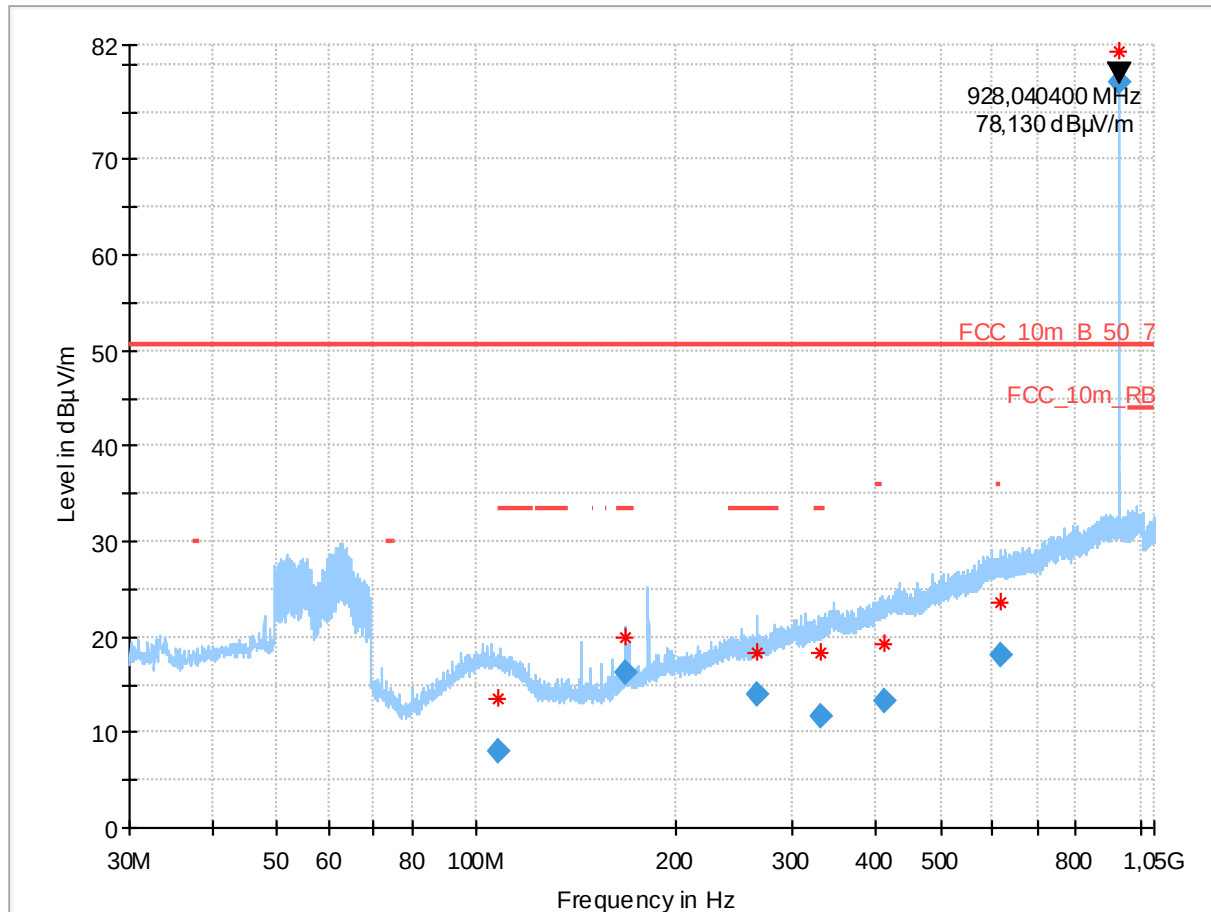
**Plot 3:** TX@915.0MHz, FSK, 1000 MHz to 6000 MHz, vertical & horizontal polarisation



- TX 928.0MHz

**Plot 1:** TX@928.0MHz, ASK, 9 kHz to 30 MHz

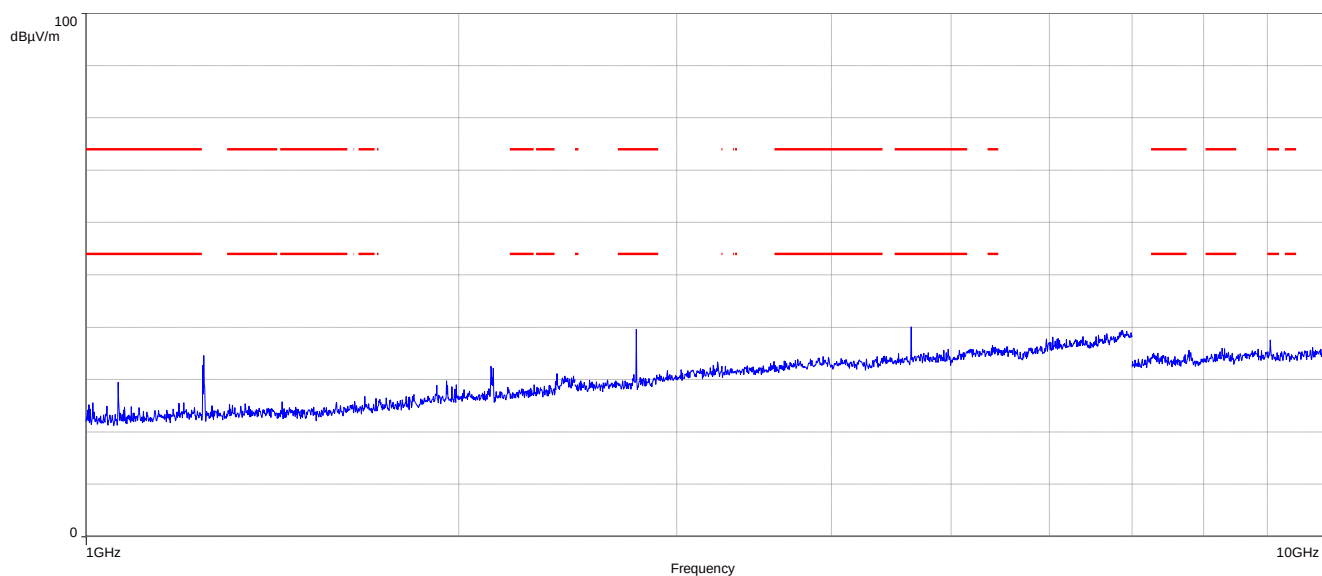


**Plot 2:** TX@928.0MHz, ASK, 30 MHz to 1000 MHz, vertical & horizontal polarisation**Final\_Result:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 108.149         | 8.08               | 50.7           | 42.6        | 1000            | 120.0           | 128.0       | V   | 135           | 14           |
| 167.984         | 16.15              | 50.7           | 34.6        | 1000            | 120.0           | 150.0       | V   | 253           | 11           |
| 264.006         | 13.88              | 50.7           | 36.8        | 1000            | 120.0           | 400.0       | V   | 90            | 14           |
| 330.277         | 11.75              | 50.7           | 39.0        | 1000            | 120.0           | 200.0       | V   | 33            | 16           |
| 410.133         | 13.33              | 50.7           | 37.4        | 1000            | 120.0           | 215.0       | H   | 180           | 18           |
| 614.637         | 18.06              | 50.7           | 32.6        | 1000            | 120.0           | 200.0       | H   | 180           | 22           |
| 928.040         | wanted signal      |                |             |                 |                 |             |     |               |              |

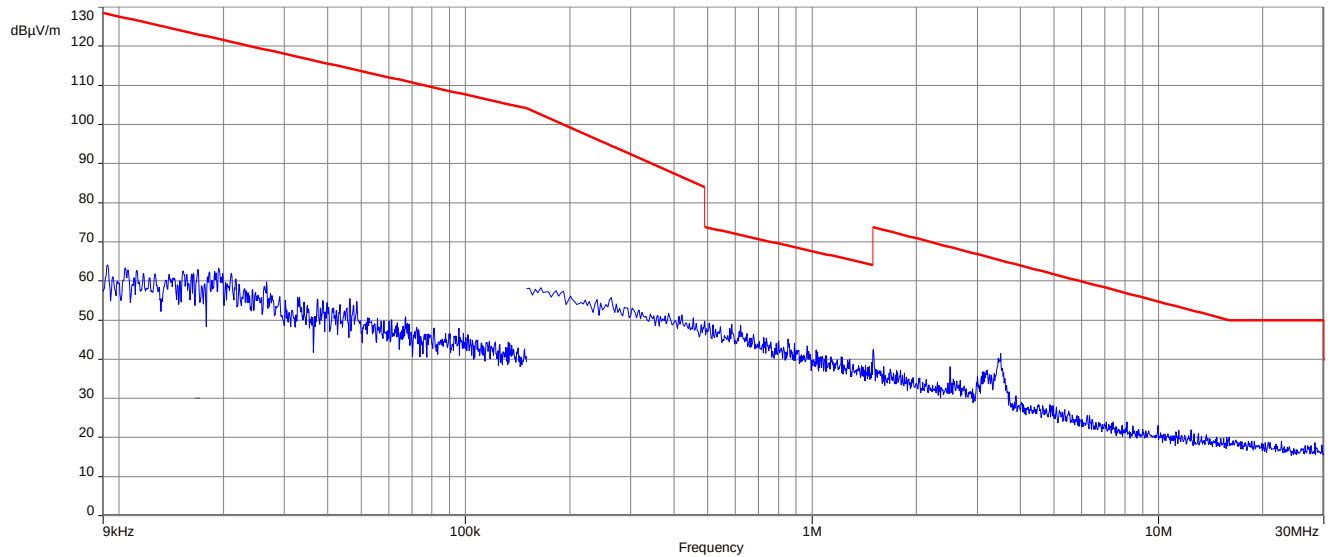
In addition to the limit according to Part 15.209 shown in the plot, the limit according to Part 15.231 also applies!

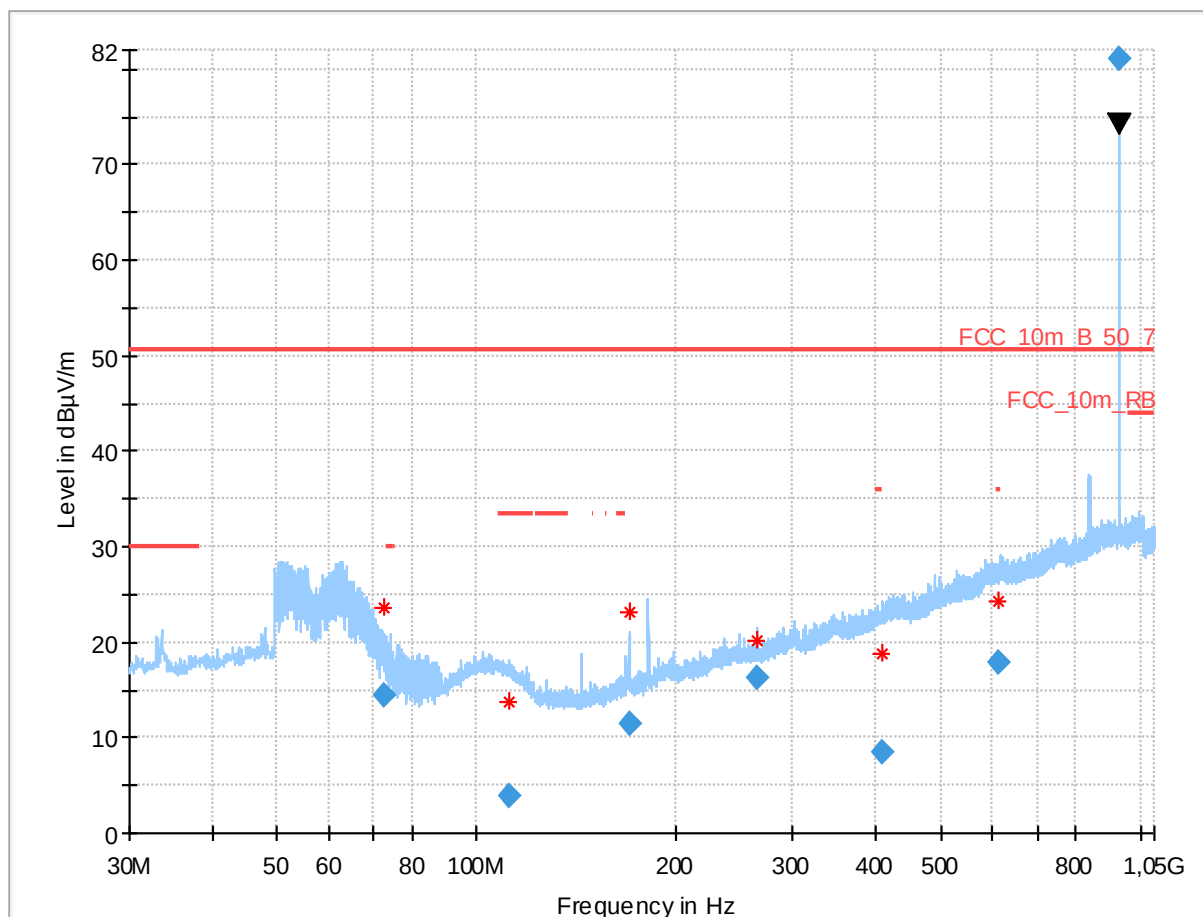
**Plot 3:** TX@928.0MHz, ASK, 1000 MHz to 6000 MHz, vertical & horizontal polarisation



- TX 928.0MHz

**Plot 1:** TX@928.0MHz, FSK, 9 kHz to 30 MHz

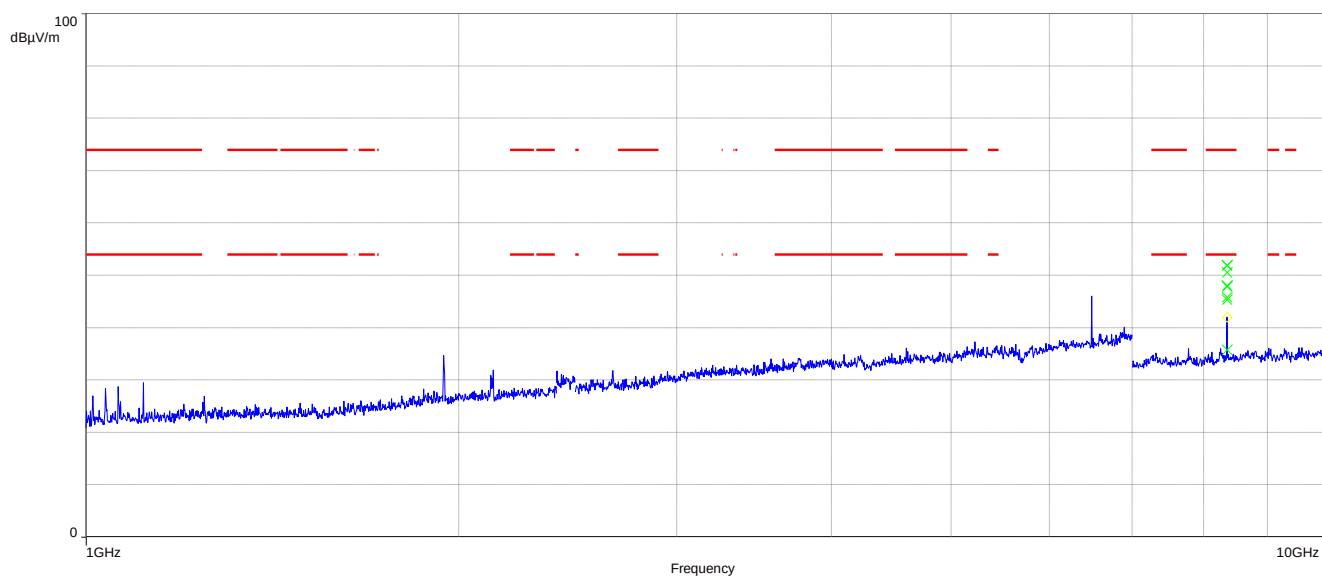


**Plot 2:** TX@928.0MHz, FSK, 30 MHz to 1000 MHz, vertical & horizontal polarisation**Final\_Result:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 72.726          | 14.38              | 50.7           | 36.3        | 1000            | 120.0           | 400.0       | V   | 215           | 10           |
| 112.012         | 3.85               | 50.7           | 46.9        | 1000            | 120.0           | 281.0       | V   | 48            | 13           |
| 170.219         | 11.49              | 50.7           | 39.2        | 1000            | 120.0           | 159.0       | V   | 208           | 11           |
| 263.998         | 16.17              | 50.7           | 34.5        | 1000            | 120.0           | 308.0       | V   | 180           | 14           |
| 409.784         | 8.38               | 50.7           | 42.3        | 1000            | 120.0           | 200.0       | H   | 225           | 18           |
| 613.712         | 17.91              | 50.7           | 32.8        | 1000            | 120.0           | 330.0       | V   | 188           | 22           |
| 928.041         | wanted signal      |                |             |                 |                 |             |     |               |              |

In addition to the limit according to Part 15.209 shown in the plot, the limit according to Part 15.231 also applies!

**Plot 3:** TX@928.0MHz, FSK, 1000 MHz to 6000 MHz, vertical & horizontal polarisation



## 12 Observations

No observations except those reported with the single test cases have been made.



### 13 Test bin file tables

| bin files ASK modulation                  |
|-------------------------------------------|
| FCC_CM_ASK_100ms_9.6KHz_312.0MHz_0x77.bin |
| FCC_CM_ASK_100ms_9.6KHz_315.0MHz_0x77.bin |
| FCC_CM_ASK_100ms_9.6KHz_318.0MHz_0x77.bin |
| FCC_CM_ASK_100ms_9.6KHz_431.9MHz_0x77.bin |
| FCC_CM_ASK_100ms_9.6KHz_435.9MHz_0x77.bin |
| FCC_CM_ASK_100ms_9.6KHz_868.3MHz_0x63.bin |
| FCC_CM_ASK_100ms_9.6KHz_902.0MHz_0x57.bin |
| FCC_CM_ASK_100ms_9.6KHz_915.0MHz_0x58.bin |
| FCC_CM_ASK_100ms_9.6KHz_928.0MHz_0x54.bin |

| bin files FSK modulation                  |
|-------------------------------------------|
| FCC_CM_FSK_100ms_9.6KHz_312.0MHz_0x77.bin |
| FCC_CM_FSK_100ms_9.6KHz_315.0MHz_0x77.bin |
| FCC_CM_FSK_100ms_9.6KHz_318.0MHz_0x77.bin |
| FCC_CM_FSK_100ms_9.6KHz_431.9MHz_0x77.bin |
| FCC_CM_FSK_100ms_9.6KHz_435.9MHz_0x77.bin |
| FCC_CM_FSK_100ms_9.6KHz_868.3MHz_0x63.bin |
| FCC_CM_FSK_100ms_9.6KHz_902.0MHz_0x57.bin |
| FCC_CM_FSK_100ms_9.6KHz_915.0MHz_0x58.bin |
| FCC_CM_FSK_100ms_9.6KHz_928.0MHz_0x54.bin |

|                                          |
|------------------------------------------|
| FCC_CM_FSK_10ms_9.6KHz_315.0MHz_0x77.bin |
| FCC_CM_FSK_10ms_9.6KHz_433.2MHz_0x77.bin |
| FCC_CM_FSK_10ms_9.6KHz_868.3MHz_0x6f.bin |
| FCC_CM_FSK_10ms_9.6KHz_915.0MHz_0x6f.bin |

## 14 Glossary

|                        |                                                    |
|------------------------|----------------------------------------------------|
| <b>EUT</b>             | Equipment under test                               |
| <b>DUT</b>             | Device under test                                  |
| <b>UUT</b>             | Unit under test                                    |
| <b>GUE</b>             | GNSS User Equipment                                |
| <b>ETSI</b>            | European Telecommunications Standards Institute    |
| <b>EN</b>              | European Standard                                  |
| <b>FCC</b>             | Federal Communications Commission                  |
| <b>FCC ID</b>          | Company Identifier at FCC                          |
| <b>IC</b>              | Industry Canada                                    |
| <b>PMN</b>             | Product marketing name                             |
| <b>HMN</b>             | Host marketing name                                |
| <b>HVIN</b>            | Hardware version identification number             |
| <b>FVIN</b>            | Firmware version identification number             |
| <b>EMC</b>             | Electromagnetic Compatibility                      |
| <b>HW</b>              | Hardware                                           |
| <b>SW</b>              | Software                                           |
| <b>Inv. No.</b>        | Inventory number                                   |
| <b>S/N or SN</b>       | Serial number                                      |
| <b>C</b>               | Compliant                                          |
| <b>NC</b>              | Not compliant                                      |
| <b>NA</b>              | Not applicable                                     |
| <b>NP</b>              | Not performed                                      |
| <b>PP</b>              | Positive peak                                      |
| <b>QP</b>              | Quasi peak                                         |
| <b>AVG</b>             | Average                                            |
| <b>OC</b>              | Operating channel                                  |
| <b>OCW</b>             | Operating channel bandwidth                        |
| <b>OBW</b>             | Occupied bandwidth                                 |
| <b>OOB</b>             | Out of band                                        |
| <b>DFS</b>             | Dynamic frequency selection                        |
| <b>CAC</b>             | Channel availability check                         |
| <b>OP</b>              | Occupancy period                                   |
| <b>NOP</b>             | Non occupancy period                               |
| <b>DC</b>              | Duty cycle                                         |
| <b>PER</b>             | Packet error rate                                  |
| <b>CW</b>              | Clean wave                                         |
| <b>MC</b>              | Modulated carrier                                  |
| <b>WLAN</b>            | Wireless local area network                        |
| <b>RLAN</b>            | Radio local area network                           |
| <b>DSSS</b>            | Dynamic sequence spread spectrum                   |
| <b>OFDM</b>            | Orthogonal frequency division multiplexing         |
| <b>FHSS</b>            | Frequency hopping spread spectrum                  |
| <b>GNSS</b>            | Global Navigation Satellite System                 |
| <b>C/N<sub>0</sub></b> | Carrier to noise-density ratio, expressed in dB-Hz |

## 15 Document history

| Version | Applied changes | Date of release |
|---------|-----------------|-----------------|
| -/-     | Initial release | 2021-12-10      |

## 16 Accreditation Certificate – D-PL-12076-01-04

| first page                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | last page                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV<br/>Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition</p> <p><b>Accreditation</b> </p> <p>The Deutsche Akkreditierungsstelle GmbH attests that the testing laboratory</p> <p><b>CTC advanced GmbH</b><br/>Untertürkheimer Straße 6-10, 66117 Saarbrücken</p> <p>is competent under the terms of DIN EN ISO/IEC 17025:2018 to carry out tests in the following fields:</p> <p>Telecommunication (TC) and Electromagnetic Compatibility (EMC) for Canadian Standards</p> <p>The accreditation certificate shall only apply in connection with the notice of accreditation of 09.06.2020 with the accreditation number D-PL-12076-01. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 07 pages.</p> <p>Registration number of the certificate: D-PL-12076-01-04</p> <p>Frankfurt am Main, 09.06.2020</p> <p>by order: Dipl.-Ing. (FH) Ralf Egner<br/>Head of Division</p> <p><small>The certificate together with its annex reflects the status at the time of the date of issue. The current status of the scope of accreditation can be found in the database of accredited bodies of Deutsche Akkreditierungsstelle GmbH.<br/><a href="https://www.dakks.de/en/content/accredited-bodies-dakks">https://www.dakks.de/en/content/accredited-bodies-dakks</a><br/>See notes overleaf.</small></p> | <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Office Berlin<br/>Spittelmarkt 10<br/>10117 Berlin</p> <p>Office Frankfurt am Main<br/>Europa-Allee 52<br/>60327 Frankfurt am Main</p> <p>Office Braunschweig<br/>Bundesallee 100<br/>38116 Braunschweig</p> <p>The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAKKS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf.</p> <p>No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAKKS.</p> <p>The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 30). DAKKS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations.</p> <p>The up-to-date state of membership can be retrieved from the following websites:<br/>EA: <a href="http://www.european-accreditation.org">www.european-accreditation.org</a><br/>ILAC: <a href="http://www.ilac.org">www.ilac.org</a><br/>IAF: <a href="http://www.iaf.nu">www.iaf.nu</a></p> |

**Note: The current certificate annex is published on the websites (link see below).**

<https://www.dakks.de/files/data/as/pdf/D-PL-12076-01-04.pdf>

or

[https://ctcadvanced.com/app/uploads/2020/06/D-PL-12076-01-04\\_Canada\\_TCEMC.pdf](https://ctcadvanced.com/app/uploads/2020/06/D-PL-12076-01-04_Canada_TCEMC.pdf)

**17 Accreditation Certificate – D-PL-12076-01-05**

| first page                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | last page                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV<br/>Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition</p> <p><b>Accreditation</b> </p> <p>The Deutsche Akkreditierungsstelle GmbH attests that the testing laboratory<br/><b>CTC advanced GmbH</b><br/>Untertürkheimer Straße 6-10, 66117 Saarbrücken<br/>is competent under the terms of DIN EN ISO/IEC 17025:2018 to carry out tests in the following fields:<br/><b>Telecommunication (FCC Requirements)</b></p> <p>The accreditation certificate shall only apply in connection with the notice of accreditation of 09.06.2020 with the accreditation number D-PL-12076-01. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 05 pages.</p> <p>Registration number of the certificate: <b>D-PL-12076-01-05</b></p> <p>Frankfurt am Main, 09.06.2020 <br/>by order/ Dipl.-Ing. (FH) Stefan Eigner<br/>Head of Division</p> <p><small>The certificate together with its annex reflects the status at the time of the date of issue. The current status of the scope of accreditation can be found in the database of accredited bodies of Deutsche Akkreditierungsstelle GmbH.<br/><a href="https://www.dakks.de/en/content/accredited-bodies-dakks">https://www.dakks.de/en/content/accredited-bodies-dakks</a><br/>See notes on final.</small></p> | <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Office Berlin<br/>Spittelmarkt 10<br/>10117 Berlin</p> <p>Office Frankfurt am Main<br/>Europa-Allee 52<br/>60327 Frankfurt am Main</p> <p>Office Braunschweig<br/>Bundessallee 100<br/>38116 Braunschweig</p> <p>The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAKKS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf.</p> <p>No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAKKS.</p> <p>The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 30). DAKKS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations.</p> <p>The up-to-date state of membership can be retrieved from the following websites:<br/>EA: <a href="http://www.european-accreditation.org">www.european-accreditation.org</a><br/>ILAC: <a href="http://www.ilac.org">www.ilac.org</a><br/>IAF: <a href="http://www.iaf.nu">www.iaf.nu</a></p> |

**Note: The current certificate annex is published on the websites (link see below).**

<https://www.dakks.de/files/data/as/pdf/D-PL-12076-01-05.pdf>

or

[https://ctcadvanced.com/app/uploads/2020/06/D-PL-12076-01-05\\_TCB\\_USA.pdf](https://ctcadvanced.com/app/uploads/2020/06/D-PL-12076-01-05_TCB_USA.pdf)

##### END OF TEST REPORT #####