



**FCC 47 CFR PART 15 SUBPART C**

**CERTIFICATION TEST REPORT**

**FOR**

**Wireless Charger**

**MODEL NUMBER: BEX4755-XX**

**REPORT NUMBER: 11436518I**

**FCC ID: 2AJX5-BEX4755**

**ISSUE DATE: November 6, 2016**

*Prepared for*  
**Byrne Electrical Specialists Inc.**  
**320 Byrne Industrial Dr.**  
**Rockford, MI 49341**  
**USA**

*Prepared by*  
**UL LLC**  
**333 Pfingsten Rd.**  
**Northbrook, IL 60062**  
**TEL: (847) 272-8800**



NVLAP Lab code: 100414-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--		Initial Issue	

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>5</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....	5
4.2. <i>SAMPLE CALCULATION</i> .....	5
4.3. <i>MEASUREMENT UNCERTAINTY</i> .....	5
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>6</b>
5.1. <i>DESCRIPTION OF EUT</i> .....	6
5.2. <i>MAXIMUM OUTPUT POWER</i> .....	6
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> .....	6
5.4. <i>TEST CONFIGURATIONS</i> .....	6
5.5. <i>MODE(S) OF OPERATION</i> .....	6
5.6. <i>SOFTWARE AND FIRMWARE</i> .....	6
5.7. <i>WORST-CASE CONFIGURATION AND MODE</i> .....	6
5.8. <i>MODIFICATIONS</i> .....	6
5.9. <i>DESCRIPTION OF TEST SETUP</i> .....	7
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>9</b>
<b>7. RADIATED EMISSION TEST RESULTS.....</b>	<b>10</b>
7.1. <i>LIMITS AND PROCEDURE</i> .....	10
<b>8. AC MAINS LINE CONDUCTED EMISSIONS.....</b>	<b>18</b>
<b>9. SETUP PHOTOS.....</b>	<b>23</b>

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** Byrne Electrical Specialists Inc.  
320 Byrne Industrial Dr.  
Rockford, MI 49341  
USA

**EUT DESCRIPTION:** Wireless Charger

**MODEL:** BEX4755-XX

**SERIAL NUMBER:** non-serialized

**DATE TESTED:** September 26, 2016 – November 6, 2016

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	Pass

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL LLC based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL LLC By:



---

Bob DeLisi  
WiSE Principal Engineer  
UL LLC

Tested By:



---

Bart Mucha  
WiSE Staff Engineer  
UL LLC

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 333 Pfingsten Road, Northbrook, IL 60062 USA.

UL NBK is accredited by NVLAP, Laboratory Code 100414-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/>

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

#### Sample Calculations

Radiated Field Strength and Conducted Emissions data contained within this report is calculated on the following basis:

Field Strength (dBuV/m) = Meter Reading (dBuV) + AF (dB/m) - Gain (dB) + Cable Loss (dB)

Conducted Voltage (dBuV) = Meter Reading (dBuV) + Cable Loss (dB) + LISN IL (dB)

Conducted Current (dBuA) = Meter Reading (dBuV) + Cable Loss (dB) - Transducer Factor (dBohms)

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test	Range	Equipment	Uncertainty k=2
Conducted Emissions	9k-150kHz	LISN	3.84dB
Conducted Emissions	150k-30MHz	LISN	3.65dB
Radiated Emissions	9k-30MHz	H-Field Loop	3.15dB
Radiated Emissions	30-200MHz	Bicon 10m Horz	4.48dB
Radiated Emissions	30-200MHz	Bicon 10m Vert	4.49dB
Radiated Emissions	200-1000MHz	LogP 10m Horz	3.79dB
Radiated Emissions	200-1000MHz	LogP 10m Vert	3.84dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a Wireless Qi Charger with single charging coil and single USB 5V output (maximum 1A). Device is installed in single orientation only as part of a desk / table.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak radiated output level as follows:

Frequency Range (MHz)	Mode	Output Field Strength dBuV/m	Measurement Distance (meters)
0.110 - 0.205	Charging	84.24	3.00

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an coil antenna

### 5.4. TEST CONFIGURATIONS

The following configurations were investigated:

EUT Configuration	Description
1	EUT with wireless load (receiving coil with resistors and maximum power) and with USB loads (1A each).
2	EUT without loads

### 5.5. MODE(S) OF OPERATION

Mode	Description
1	EUT putting out full maximum power to wireless loads and resistors on USB ports
2	EUT powered but not charging (no loads)

### 5.6. SOFTWARE AND FIRMWARE

None

### 5.7. WORST-CASE CONFIGURATION AND MODE

EUT was tested with receiving coil terminated into resistors providing maximum load.

### 5.8. MODIFICATIONS

No modifications were made during testing.

**5.9. DESCRIPTION OF TEST SETUP**

**SUPPORT EQUIPMENT**

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Qi Loads	Byrne Electrical Specialists.	None	none	none
Resistive Loads - 50Hm resistor	-	-	-	-


**I/O CABLES**

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC Input	1	-	3-wire	1.5m	none
2	AC Outputs	1	-	-	-	none
3	USB Outputs	1	SUB	USB	-	Terminated with resistors

**TEST SETUP**

The EUT was installed in a typical configuration. Refer to the following diagram.

**SETUP DIAGRAM FOR TESTS**

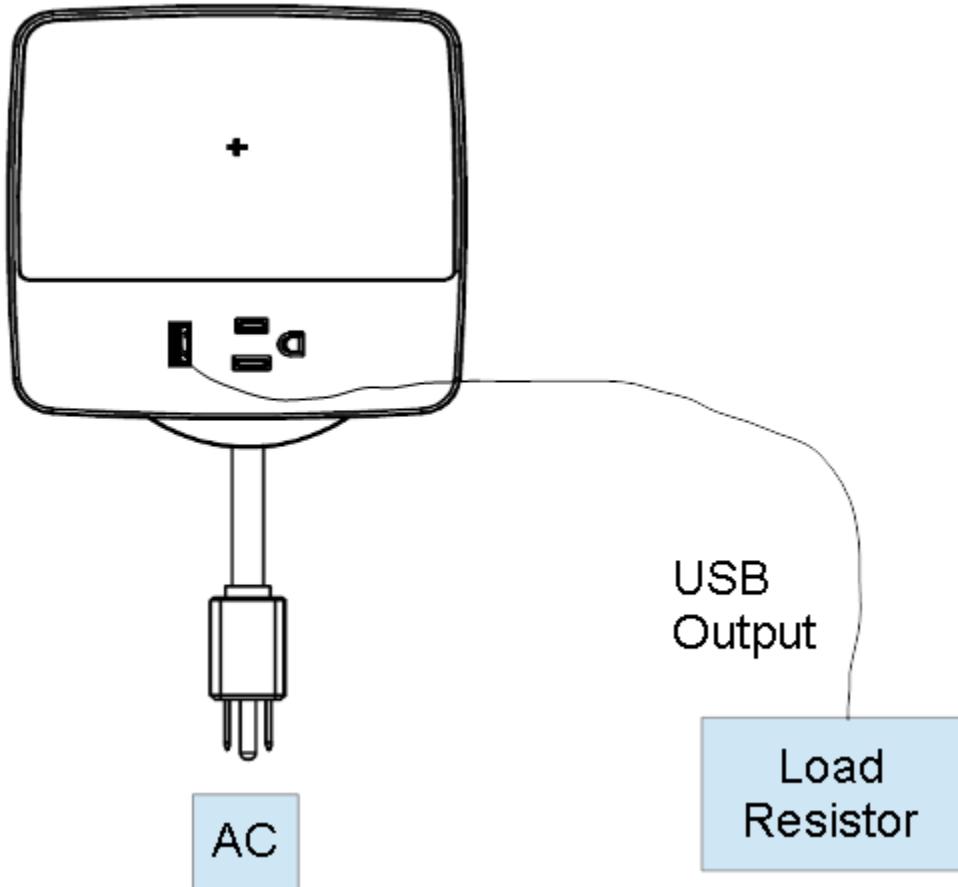

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List					
Description	Manufacturer	Model	Eqp. No.	Cal Date	Cal Due
Radiated Software	UL	UL EMC		Ver 9.5, July 22, 2014	
Conducted Software	UL	UL EMC		Ver 9.5, May 17 2012	
EMI Test Receiver	Rohde & Schwarz	ESCI	EMC4328	20151118	20161118
Bicon Antenna	Chase	VBA6106A	EMC4078	20151228	20161231
Log-P Antenna	Chase	UPA6109	EMC4313	20160122	20170131
Loop Antenna	EMCO	6502/1	EMC4026	20160722	20170731
EMI Test Receiver	Rohde & Schwarz	ESR	EMC4377	20160426	20170426
Transient Limiter	Electro-Metrics	EM7600-2	EMC4224	N/A	N/A
HighPass Filter	Solar Electronics	2803-150	885551	N/A	N/A
Attenuator	HP	8494B	2831A00838	N/A	N/A
LISN - L1	Solar	8602-50-TS-50-N	EMC4052	20160216	20170228
LISN - L2	Solar	8602-50-TS-50-N	EMC4064	20160216	20170228

## 7. RADIATED EMISSION TEST RESULTS

### 7.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.209 (a)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (m)	Limit dBuV/m
0.009–0.490	2400/F(kHz)	300	128.5 – 93.8 @3m
0.490–1.705	24000/F(kHz)	30	73.8 – 63.0 @ 3m
1.705–30.0	30	30	69.5 – 69.5 @ 3m
30–88	100	3	40.0 @ 3m
88 to 216	150	3	43.5 @ 3m
216 to 960	200	3	46.0 @ 3m
Above 960 MHz	500	3	54.0 @ 3m
Note: The lower limit shall apply at the transition frequency.			

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz measurements. The antenna to EUT distance is 3 meters.

For measurements below 1 GHz the resolution bandwidth is set to 120 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements for the 30-1000 MHz range, 9 kHz for peak detection measurements or 9 kHz for quasi-peak detection measurements for the 0.15-30 MHz range and 200 Hz for peak detection measurements or 200 Hz for quasi-peak detection measurements for the 9 to 150 kHz range. Peak detection is used unless otherwise noted as quasi-peak.

The spectrum from 9kHz to 1 GHz is investigated with the transmitter constantly transmitting into a fixed load to ensure maximum current draw from the charger.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. Measurements are made with the antenna positioned at 0° and 90° in vertical polarization and in a horizontal polarization to the ground plane.

Although measurements were made on a test site other than an open area site, comparisions between an open area site and the chamber have been made to show that measurements in the chamber correlate to those on an open area site.


#### RESULTS

**TX FUNDAMENTAL AND SPURIOUS EMISSIONS 0.009kHz TO 30 MHz Charging Mode**


**Antenna Parallel to EUT**

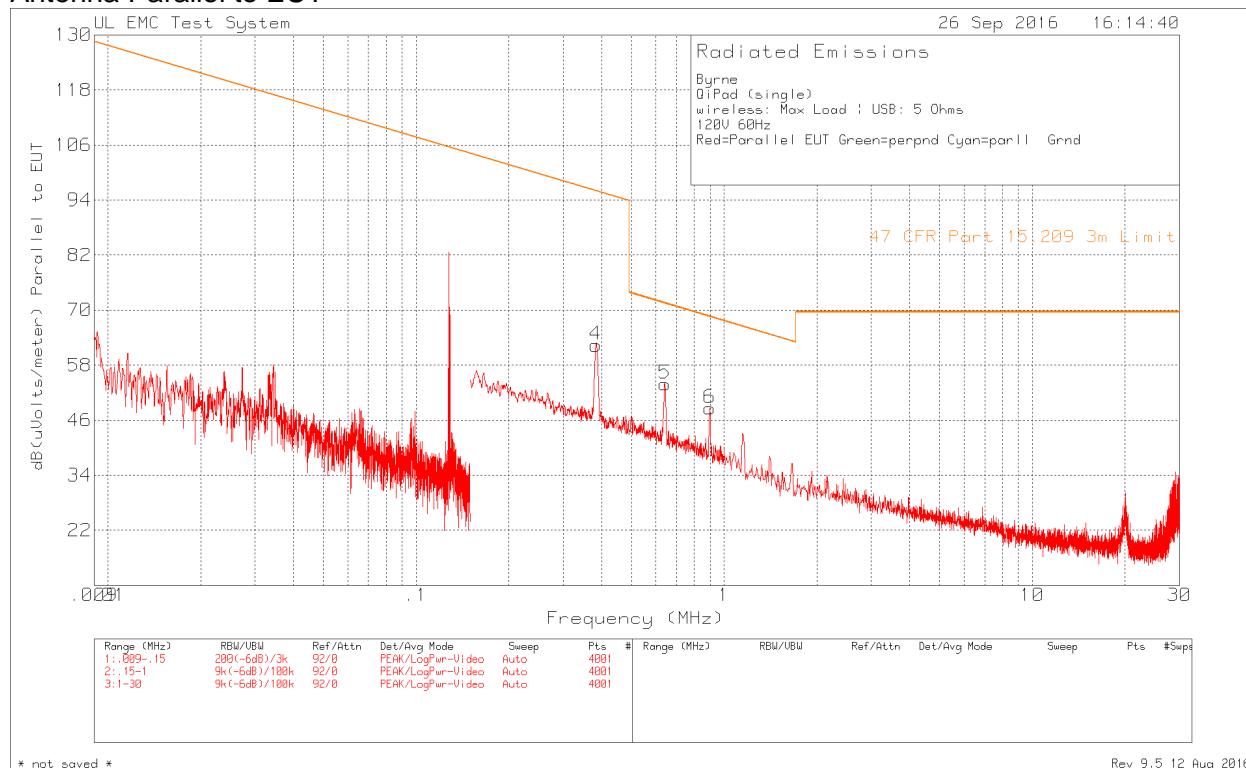

**Antenna Parallel to Ground**

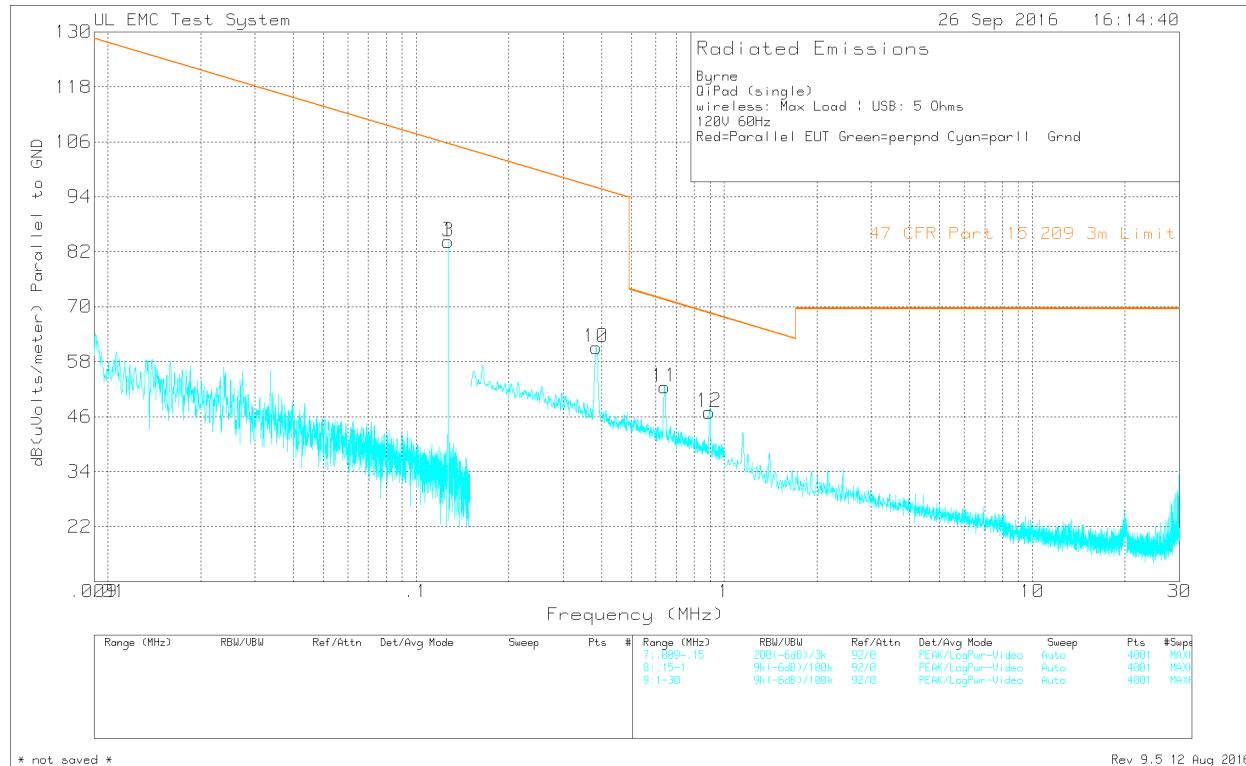

Antenna Perpendicular to EUT

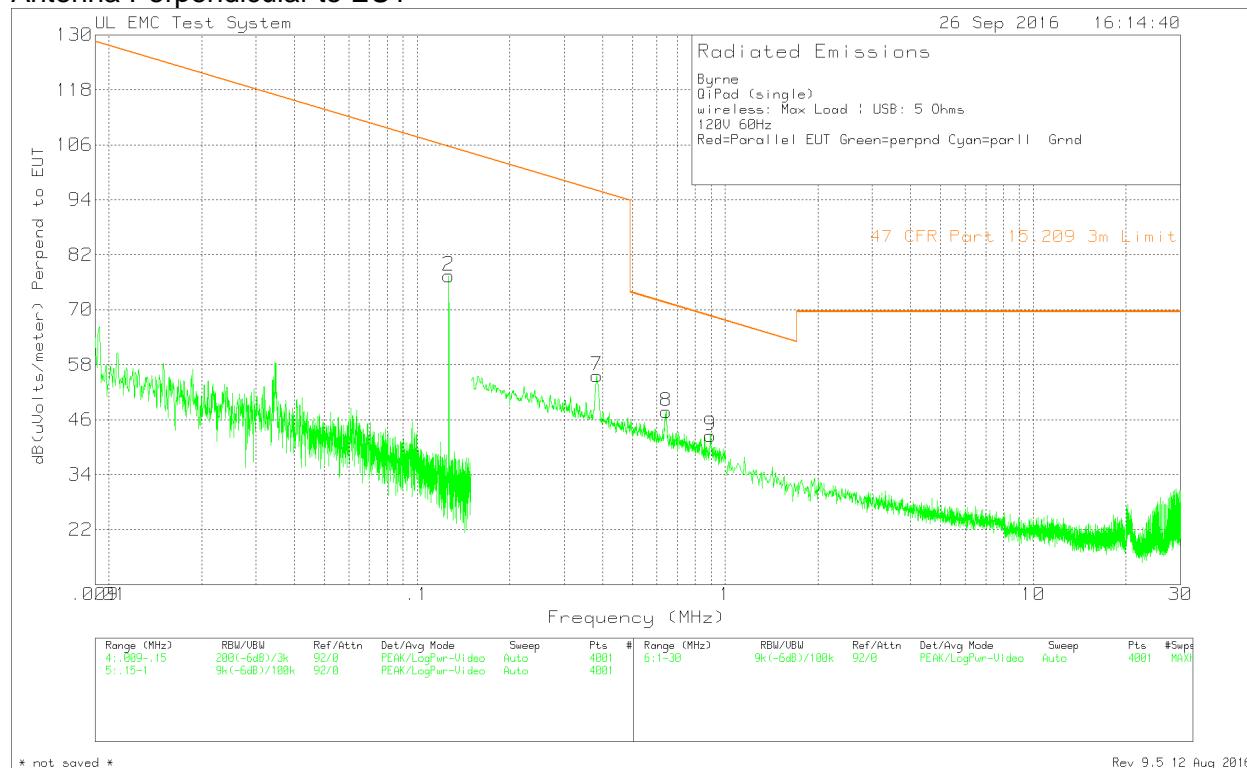

Byrne  
QiPad (single)  
wireless: Max Load | USB: 5 Ohms  
120V 60Hz  
Red=Parallel EUT Green=perpnd Cyan=parll Grnd


Trace Markers

Test No.	Frequency (MHz)	Meter Reading	Transducer Factor (dB)	Gain/Loss Factor (dB)	Corrected Reading dB(uVolts/meter)	Limit:1
<hr/>						
Parallel to EUT						
4 .38302	51.07dBuV Pk	11.3	0	62.37	95.94	
	Azimuth:0-360	Height:101		Margin (dB)	-33.57	
5 .64182	42.5dBuV Pk	11.4	0	53.9	71.46	
	Azimuth:0-360	Height:101		Margin (dB)	-17.56	
6 .89752	37.13dBuV Pk	11.4	.1	48.63	68.54	
	Azimuth:0-360	Height:101		Margin (dB)	-19.91	
Perpend to EUT						
2 .12657	66.03dBuV Pk	11.4	0	77.43	105.55	
	Azimuth:0-360	Height:101		Margin (dB)	-28.12	
7 .38302	44.31dBuV Pk	11.3	0	55.61	95.94	
	Azimuth:0-360	Height:101		Margin (dB)	-40.33	
8 .6431	36.34dBuV Pk	11.4	0	47.74	71.44	
	Azimuth:0-360	Height:101		Margin (dB)	-23.7	
9 .89486	31.06dBuV Pk	11.4	.1	42.56	68.57	
	Azimuth:0-360	Height:101		Margin (dB)	-26.01	
Parallel to GND						
1 .12702	72.84dBuV Pk	11.4	0	84.24	105.52	
	Azimuth:0-360	Height:101		Margin (dB)	-21.28	
3 .12702	72.84dBuV Pk	11.4	0	84.24	105.52	
	Azimuth:0-360	Height:101		Margin (dB)	-21.28	
10 .38419	49.79dBuV Pk	11.3	0	61.09	95.91	
	Azimuth:0-360	Height:101		Margin (dB)	-34.82	
11 .64075	41.09dBuV Pk	11.4	0	52.49	71.47	
	Azimuth:0-360	Height:101		Margin (dB)	-18.98	
12 .89294	35.48dBuV Pk	11.4	.1	46.98	68.59	
	Azimuth:0-360	Height:101		Margin (dB)	-21.61	



LIMIT 1: 47 CFR Part 15.209 3m Limit  
Pk - Peak detector

### RESTRICTED BANDEdge EMISSIOS

Bandedge measurements were conducted using radiated field strength and 20dBc points. Attempt was made to move the device up and down and around the charging pad. This caused the impedance of the load to change and maximum range of frequencies was used. Special Attention was paid to 110kHz.

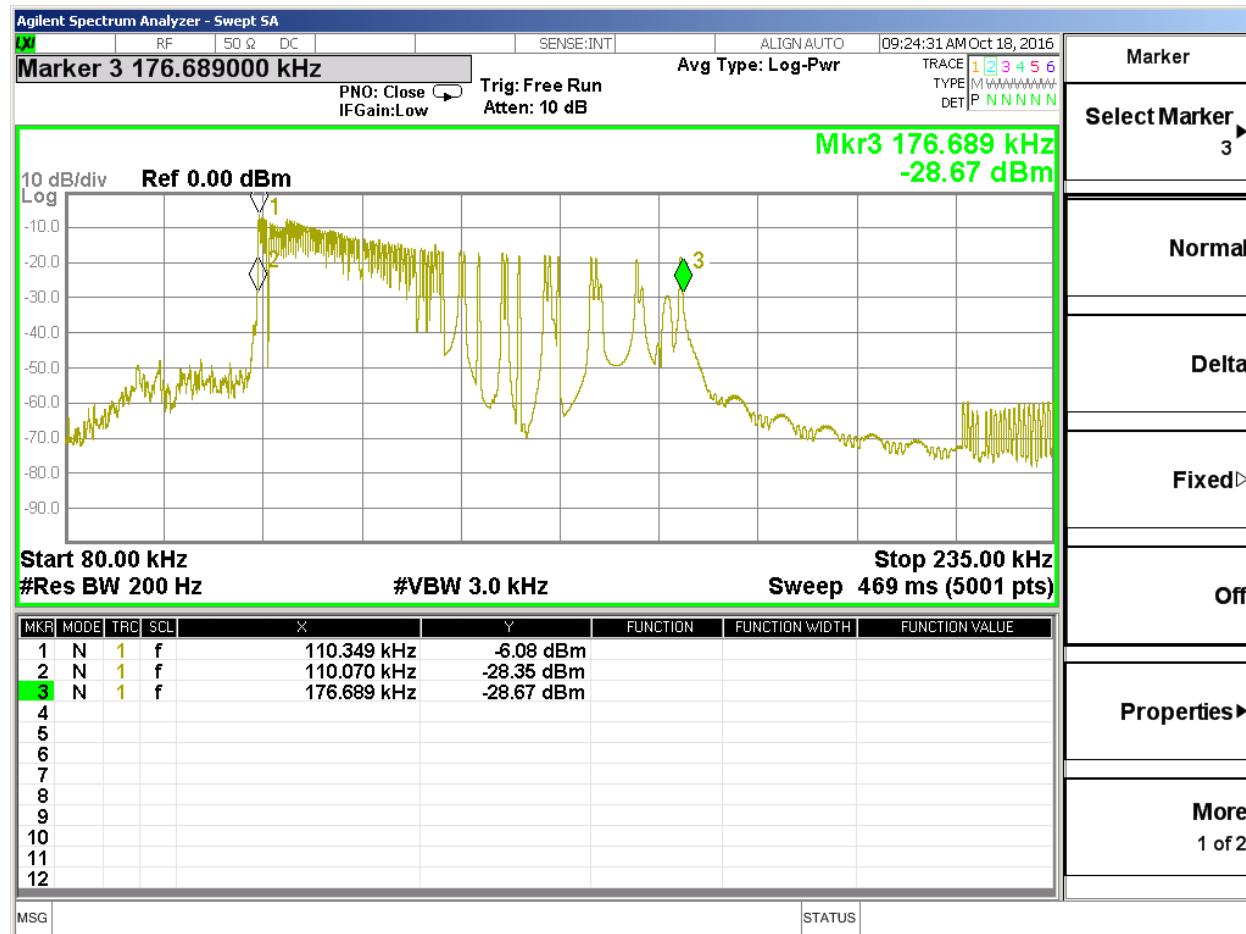

**TX SPURIOUS EMISSIONS 30MHz TO 1GHz Charging Mode**

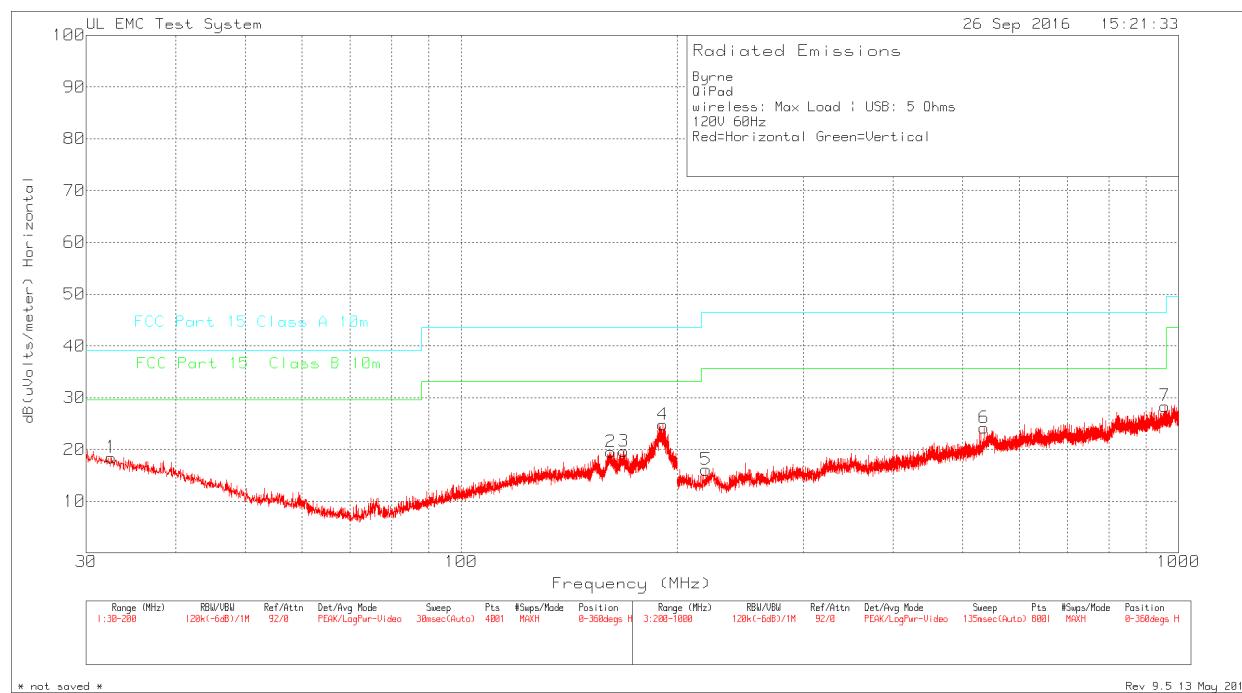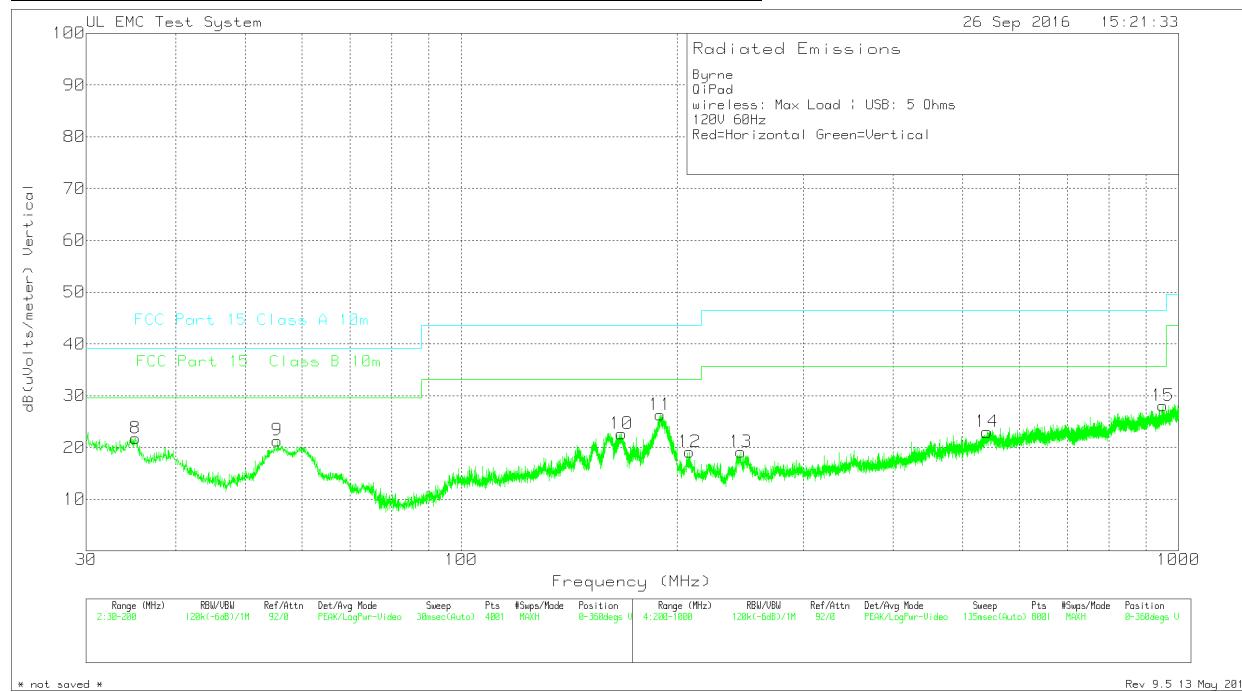

Byrne  
QiPad  
wireless: Max Load | USB: 5 Ohms  
120V 60Hz  
Red=Horizontal Green=Vertical

Trace Markers



Test No.	Frequency (MHz)	Meter Reading	Transducer Factor (dB)	Gain/Loss Factor (dB)	Corrected Reading dB(uVolts/meter)	Limit:1	2
<hr/>							
1	32.55	31.34dBuV Pk	17.1	-30	18.44	39.08	29.55
		Azimuth:0-360	Height:101	Horz	Margin (dB)	-20.64	-11.11
2	161.495	34.02dBuV Pk	15	-29.5	19.52	43.52	33.07
		Azimuth:0-360	Height:398	Horz	Margin (dB)	-24	-13.55
3	168.5075	34.17dBuV Pk	14.9	-29.4	19.67	43.52	33.07
		Azimuth:0-360	Height:249	Horz	Margin (dB)	-23.85	-13.4
4	190.9475	37.71dBuV Pk	16	-28.9	24.81	43.52	33.07
		Azimuth:0-360	Height:398	Horz	Margin (dB)	-18.71	-8.26
8	35.1425	35.5dBuV Pk	16.2	-29.9	21.8	39.08	29.55
		Azimuth:0-360	Height:101	Vert	Margin (dB)	-17.28	-7.75
9	55.415	42.95dBuV Pk	8.4	-30	21.35	39.08	29.55
		Azimuth:0-360	Height:251	Vert	Margin (dB)	-17.73	-8.2
10	167.275	37.18dBuV Pk	14.9	-29.4	22.68	43.52	33.07
		Azimuth:0-360	Height:101	Vert	Margin (dB)	-20.84	-10.39
11	189.375	39.3dBuV Pk	16	-29	26.3	43.52	33.07
		Azimuth:0-360	Height:101	Vert	Margin (dB)	-17.22	-6.77
5	219.4	34.29dBuV Pk	11.2	-29.4	16.09	46.44	35.57
		Azimuth:0-360	Height:299	Horz	Margin (dB)	-30.35	-19.48
6	535.5	32.77dBuV Pk	19.1	-27.7	24.17	46.44	35.57
		Azimuth:0-360	Height:199	Horz	Margin (dB)	-22.27	-11.4
7	957.5	32.09dBuV Pk	23.6	-27.3	28.39	46.44	35.57
		Azimuth:0-360	Height:99	Horz	Margin (dB)	-18.05	-7.18
12	208.2	37.25dBuV Pk	11.4	-29.5	19.15	43.52	33.07
		Azimuth:0-360	Height:99	Vert	Margin (dB)	-24.37	-13.92
13	245.4	36.71dBuV Pk	11.7	-29.3	19.11	46.44	35.57
		Azimuth:0-360	Height:99	Vert	Margin (dB)	-27.33	-16.46
14	540.7	30.9dBuV Pk	19.8	-27.7	23	46.44	35.57
		Azimuth:0-360	Height:99	Vert	Margin (dB)	-23.44	-12.57
15	950.4	31.93dBuV Pk	23.5	-27.4	28.03	46.44	35.57
		Azimuth:0-360	Height:399	Vert	Margin (dB)	-18.41	-7.54

LIMIT 1: FCC Part 15 Class A 10m

LIMIT 2: FCC Part 15 Class B 10m

Pk - Peak detector

**DIGITAL RADIATED EMISSIONS 30 MHz TO 1GHZ Charging Mode**

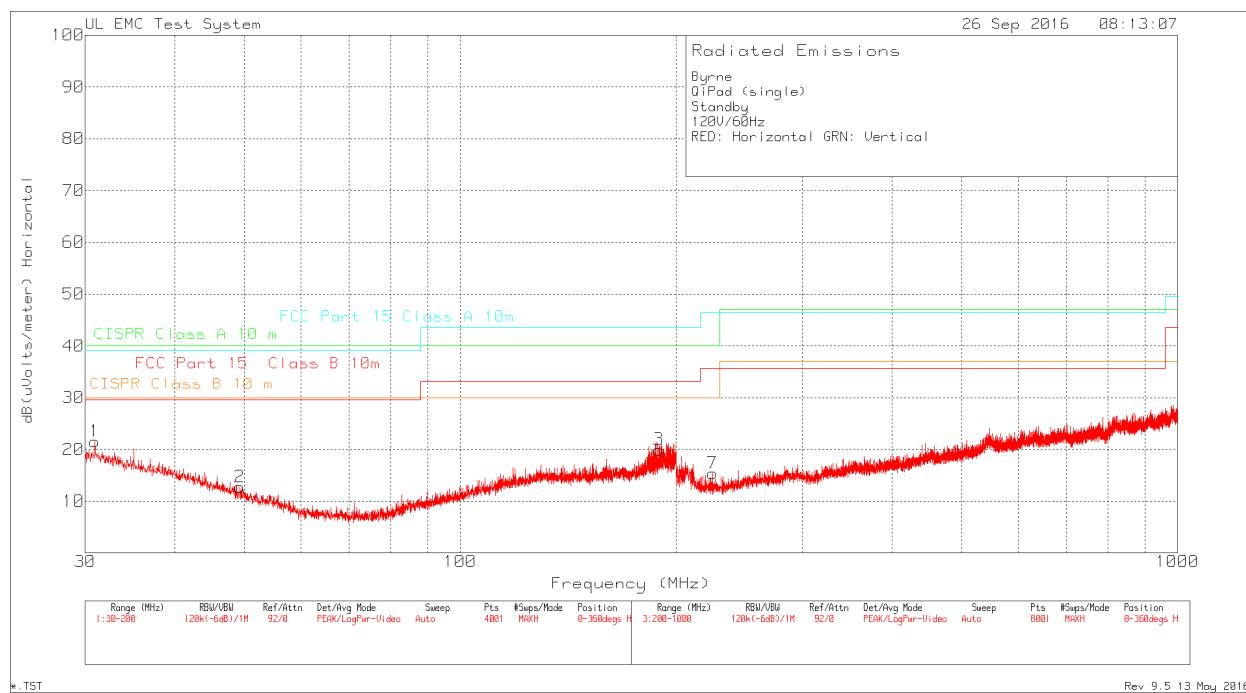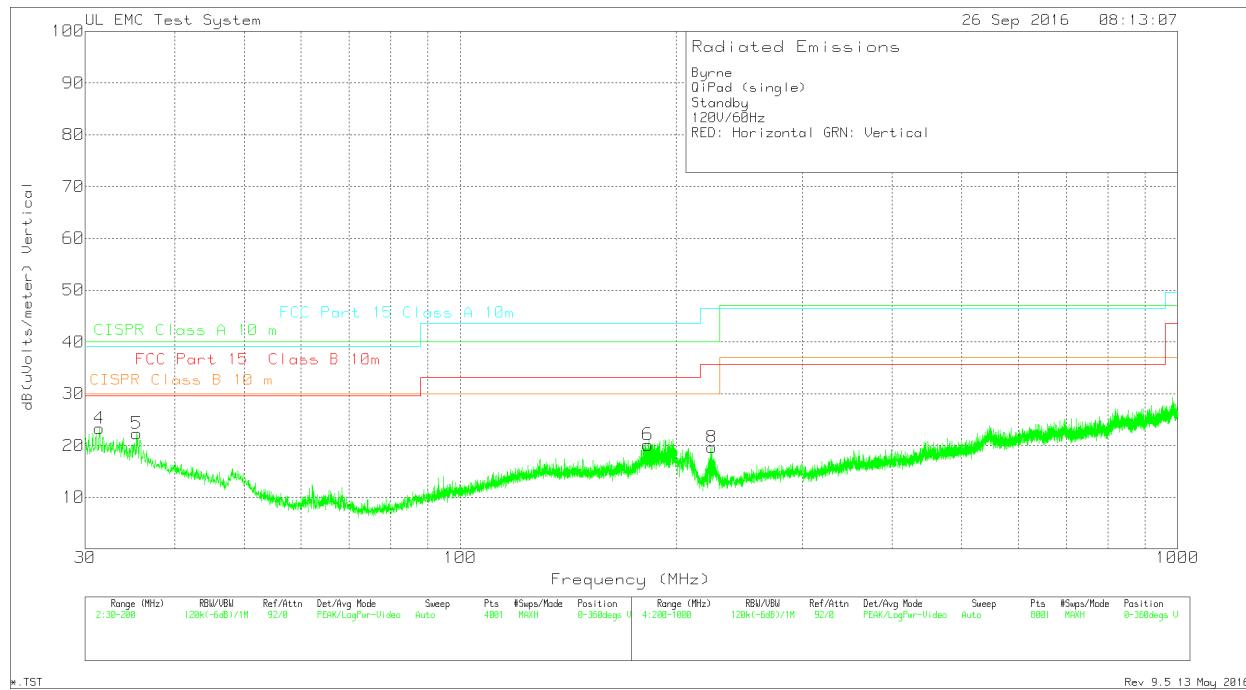

\* no emissions within 6dB from the limit, measurements not needed.

## 8. AC MAINS LINE CONDUCTED EMISSIONS

### LIMITS

§15.207 (a)

Frequency of emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\* Decreases with the logarithm of the frequency.



### TEST PROCEDURE

ANSI C63.10

### RESULTS

No non-compliance noted:

**Line Conducted Emissions – Charging Mode**

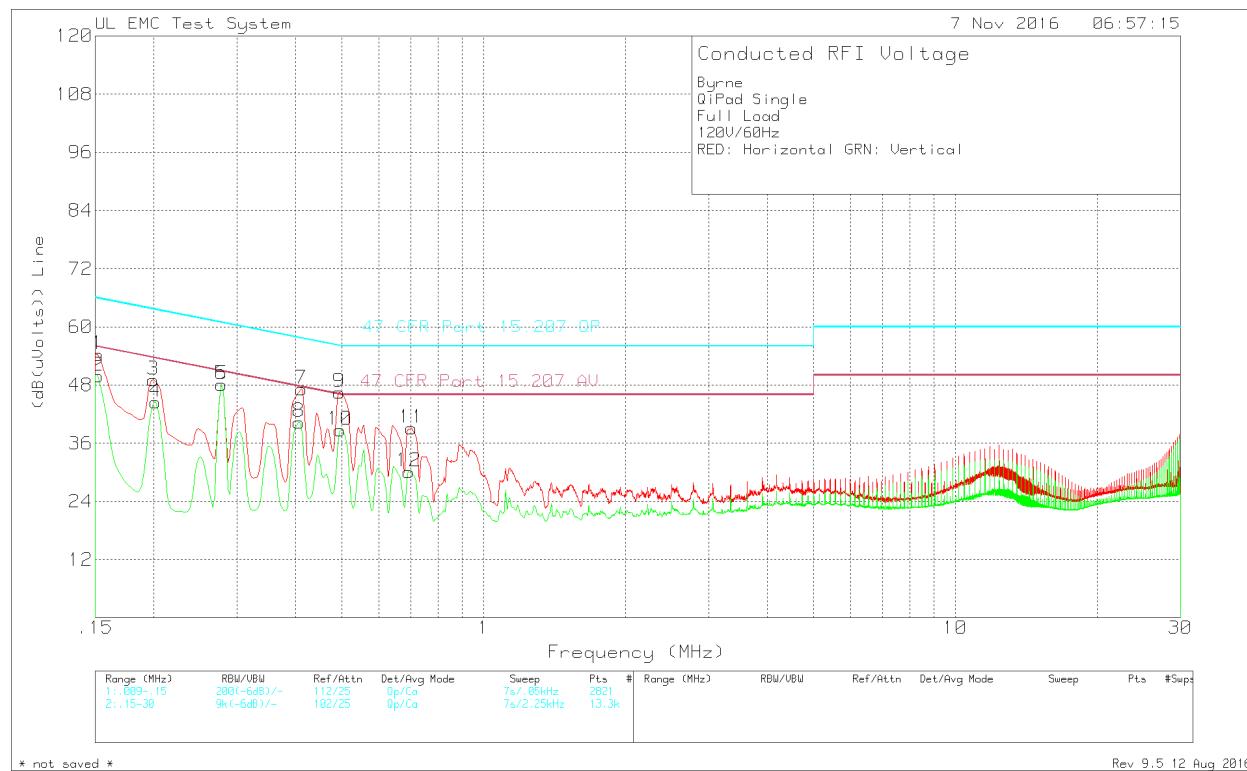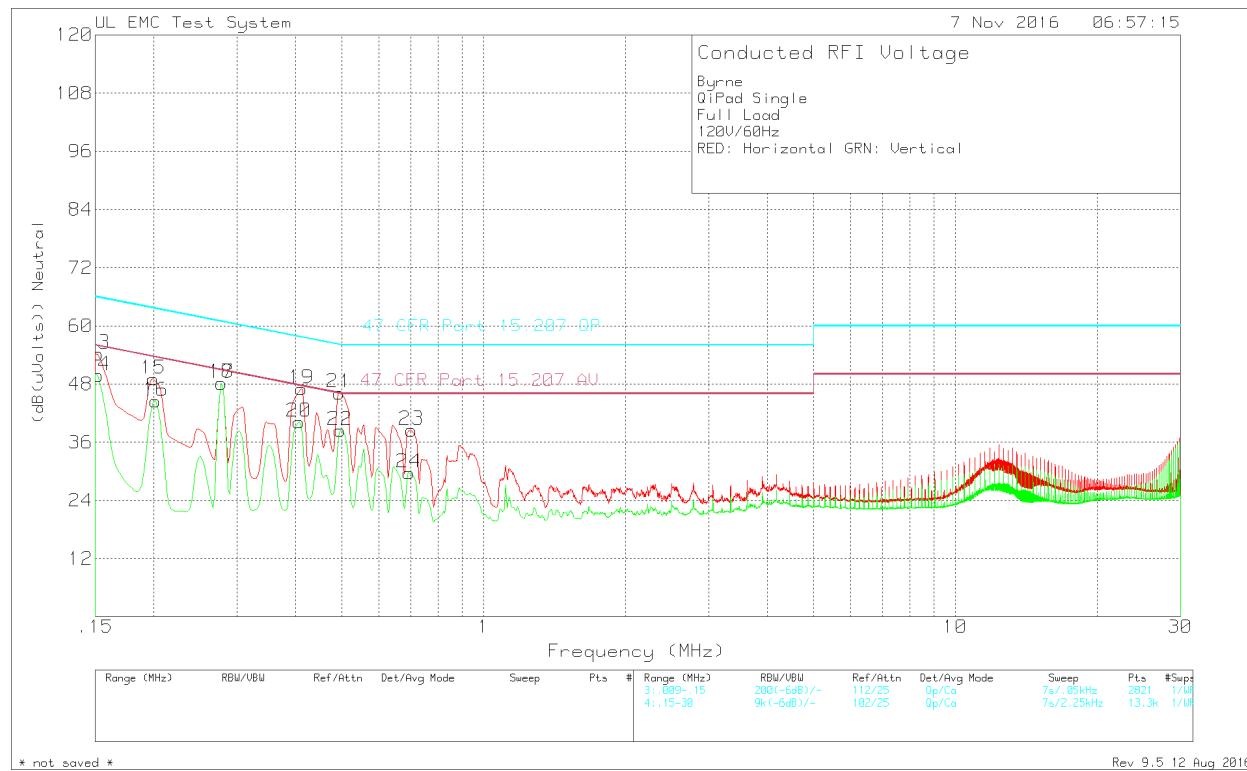

Byrne  
QiPad Single  
Full Load  
120V/60Hz  
RED: Horizontal GRN: Vertical



Trace Markers

Test No.	Frequency (MHz)	Meter Reading	Transducer Factor (dB)	Gain/Loss Factor (dB)	Corrected Reading (dB(uVolts))	Limit:1	2
<hr/>							
Line							
1 .15225	43.89dBuV	Qp	.1	10.3	54.29	65.88	55.88
					Margin (dB)	-11.59	-1.59
2 .15225	39.44dBuV	Ca	.1	10.3	49.84	65.88	55.88
					Margin (dB)	-16.04	-6.04
3 .1995	38.66dBuV	Qp	.1	10.3	49.06	63.63	53.63
					Margin (dB)	-14.57	-4.57
4 .20175	34.17dBuV	Ca	0	10.3	44.47	63.54	53.54
					Margin (dB)	-19.07	-9.07
5 .27825	37.83dBuV	Qp	0	10.3	48.13	60.87	50.87
					Margin (dB)	-12.74	-2.74
6 .27825	37.82dBuV	Ca	0	10.3	48.12	60.87	50.87
					Margin (dB)	-12.75	-2.75
7 .411	36.91dBuV	Qp	0	10.3	47.21	57.63	47.63
					Margin (dB)	-10.42	-.42
8 .4065	30.07dBuV	Ca	0	10.3	40.37	57.72	47.72
					Margin (dB)	-17.35	-7.35
9 .49425	36.18dBuV	Qp	0	10.3	46.48	56.1	46.1
					Margin (dB)	-9.62	.38
10 .4965	28.44dBuV	Ca	0	10.3	38.74	56.06	46.06
					Margin (dB)	-17.32	-7.32
11 .7035	28.78dBuV	Qp	0	10.3	39.08	56	46
					Margin (dB)	-16.92	-6.92
12 .6945	19.84dBuV	Ca	0	10.3	30.14	56	46
					Margin (dB)	-25.86	-15.86
<hr/>							
Neutral							
13 .15225	43.83dBuV	Qp	.1	10.3	54.23	65.88	55.88
					Margin (dB)	-11.65	-1.65
14 .15225	39.44dBuV	Ca	.1	10.3	49.8	65.88	55.88
					Margin (dB)	-16.08	-6.08
15 .1995	38.62dBuV	Qp	.1	10.3	49.02	63.63	53.63
					Margin (dB)	-14.61	-4.61
16 .20175	34.18dBuV	Ca	0	10.3	44.48	63.54	53.54
					Margin (dB)	-19.06	-9.06
17 .27825	37.88dBuV	Qp	0	10.3	48.18	60.87	50.87
					Margin (dB)	-12.69	-2.69
18 .27825	37.88dBuV	Ca	0	10.3	48.18	60.87	50.87
					Margin (dB)	-12.69	-2.69
19 .411	36.74dBuV	Qp	0	10.3	47.04	57.63	47.63
					Margin (dB)	-10.59	-.59
20 .4065	29.91dBuV	Ca	0	10.3	40.21	57.72	47.72
					Margin (dB)	-17.51	-7.51
21 .49425	35.89dBuV	Qp	0	10.3	46.19	56.1	46.1
					Margin (dB)	-9.91	.09
22 .4965	28.16dBuV	Ca	0	10.3	38.46	56.06	46.06
					Margin (dB)	-17.6	-7.6
23 .7035	28.21dBuV	Qp	0	10.3	38.51	56	46
					Margin (dB)	-17.49	-7.49
24 .6945	19.43dBuV	Ca	0	10.3	29.73	56	46
					Margin (dB)	-26.27	-16.27

LIMIT 1: 47 CFR Part 15.207 QP  
LIMIT 2: 47 CFR Part 15.207 AV

Qp - Quasi-Peak detector  
Ca - CISPR Average detection

## Line Conducted Emissions – Standby Mode

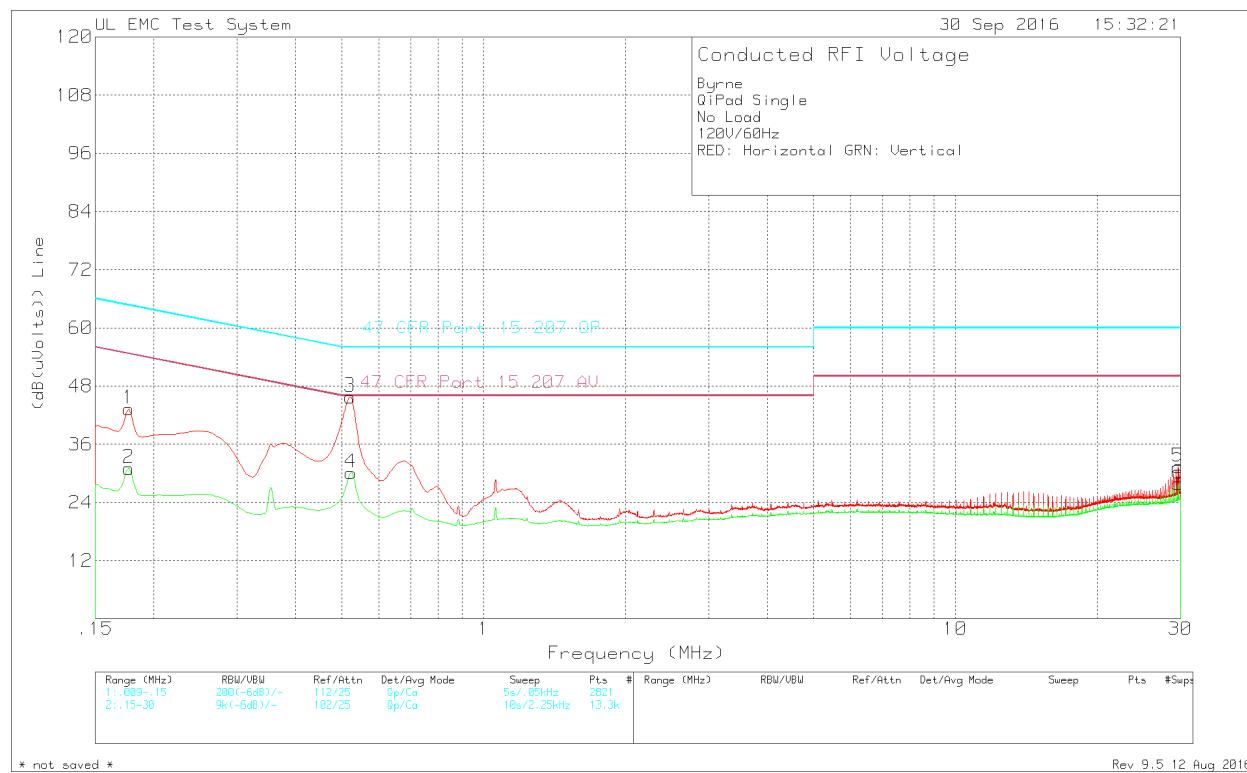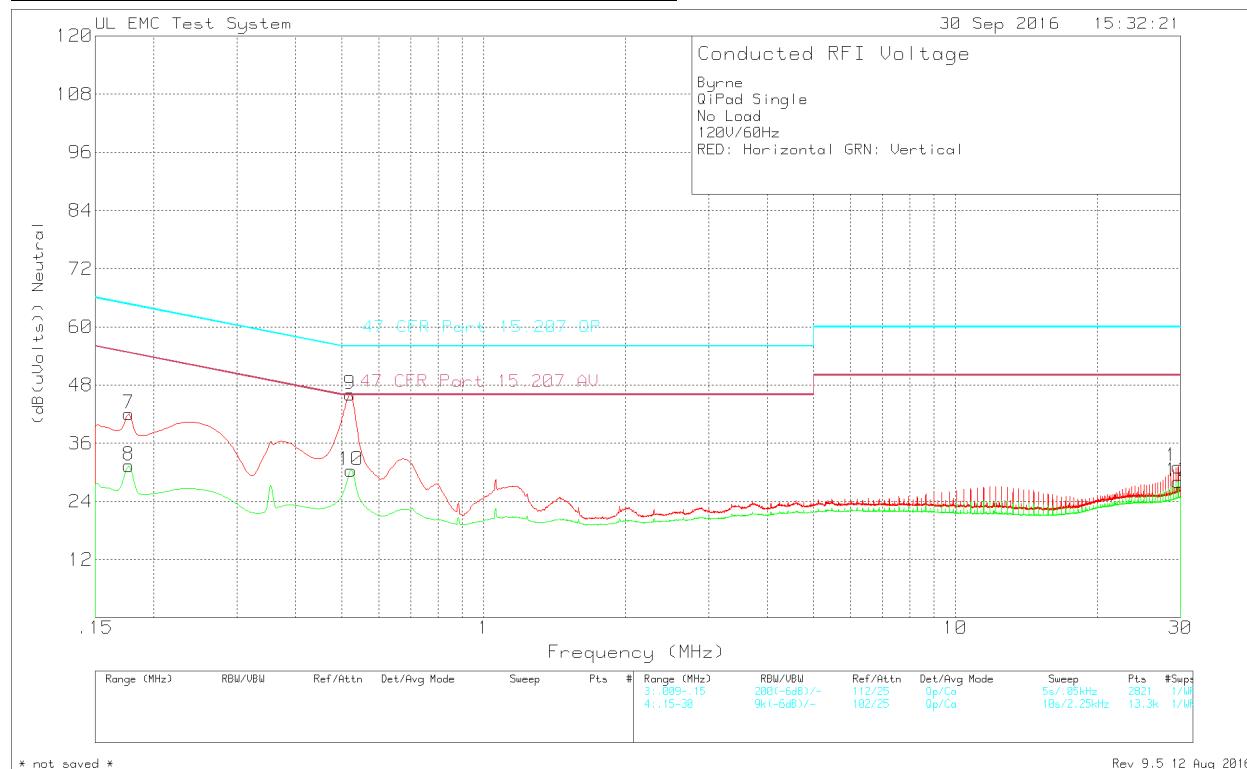

Byrne  
QiPad Single  
No Load  
120V/60Hz  
RED: Horizontal GRN: Vertical

Trace Markers


Test No.	Frequency (MHz)	Meter Reading	Transducer Factor (dB)	Gain/Loss Factor (dB)	Corrected Reading (dB(uVolts))	Limit:1	2
<hr/>							
Line							
1 .177	32.87dBuV	Qp	.1	10.3	43.27	64.63	54.63
					Margin (dB)	-21.36	-11.36
2 .177	20.62dBuV	Ca	.1	10.3	31.02	64.63	54.63
					Margin (dB)	-33.61	-23.61
3 .52125	35.47dBuV	Qp	0	10.3	45.77	56	46
					Margin (dB)	-10.23	-.23
4 .5235	19.8dBuV	Ca	0	10.3	30.1	56	46
					Margin (dB)	-25.9	-15.9
5 29.68125	19.2dBuV	Qp	-.1	12.2	31.3	60	50
					Margin (dB)	-28.7	-18.7
6 29.68125	15.81dBuV	Ca	-.1	12.2	27.91	60	50
					Margin (dB)	-32.09	-22.09
<hr/>							
Neutral							
7 .177	31.71dBuV	Qp	.1	10.3	42.11	64.63	54.63
					Margin (dB)	-22.52	-12.52
8 .177	21dBuV	Ca	.1	10.3	31.4	64.63	54.63
					Margin (dB)	-33.23	-23.23
9 .52125	35.77dBuV	Qp	0	10.3	46.07	56	46
					Margin (dB)	-9.93	.07
10 .5235	20.05dBuV	Ca	0	10.3	30.35	56	46
					Margin (dB)	-25.65	-15.65
11 29.6835	18.95dBuV	Qp	-.1	12.3	31.15	60	50
					Margin (dB)	-28.85	-18.85
12 29.6835	15.91dBuV	Ca	-.1	12.3	28.11	60	50
					Margin (dB)	-31.89	-21.89

LIMIT 1: 47 CFR Part 15.207 QP  
LIMIT 2: 47 CFR Part 15.207 AV


Qp - Quasi-Peak detector  
Ca - CISPR Average detection

## 9. SETUP PHOTOS

### RADIATED EMISSION Above 30 MHz

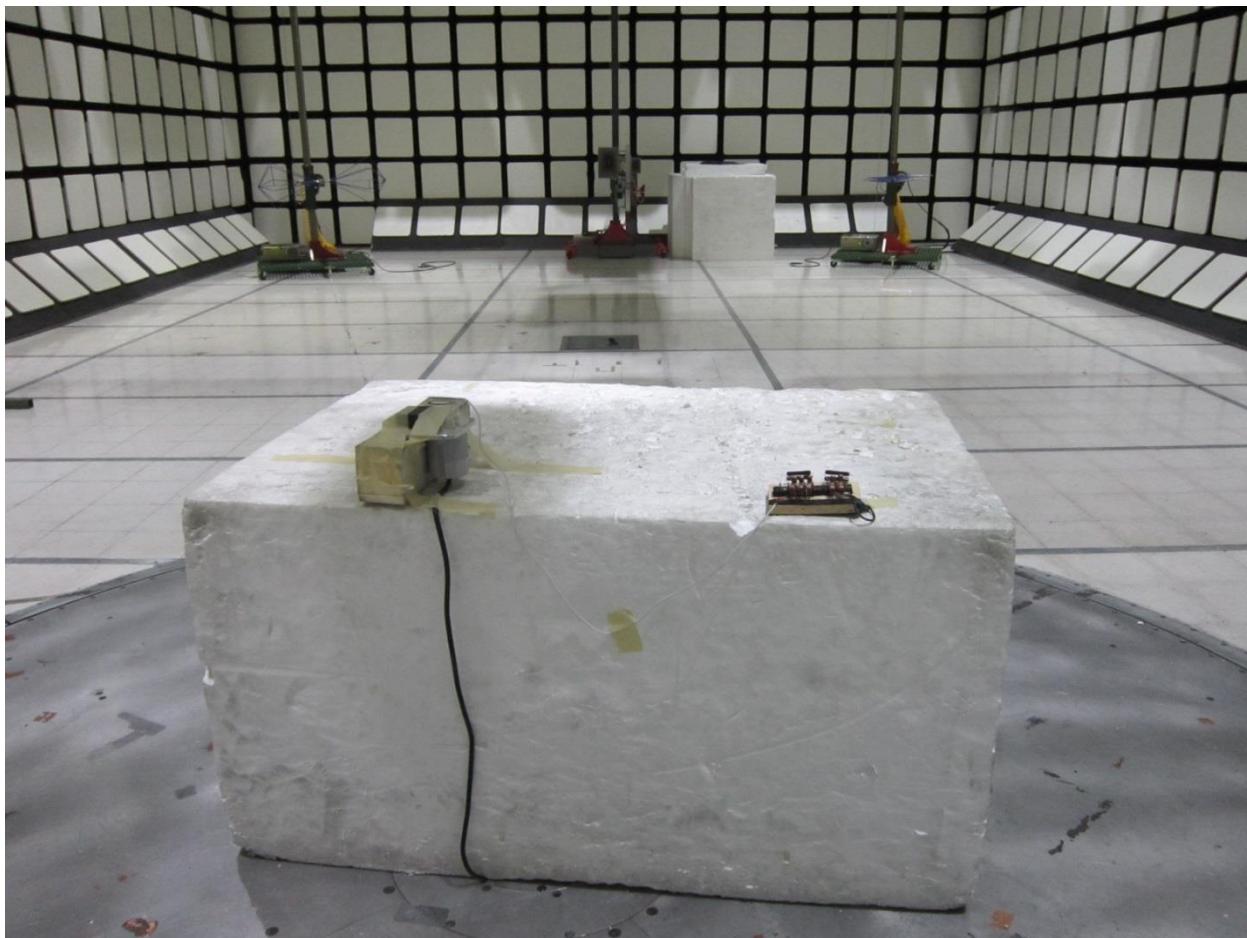

**Radiated Emissions Below 30MHz**

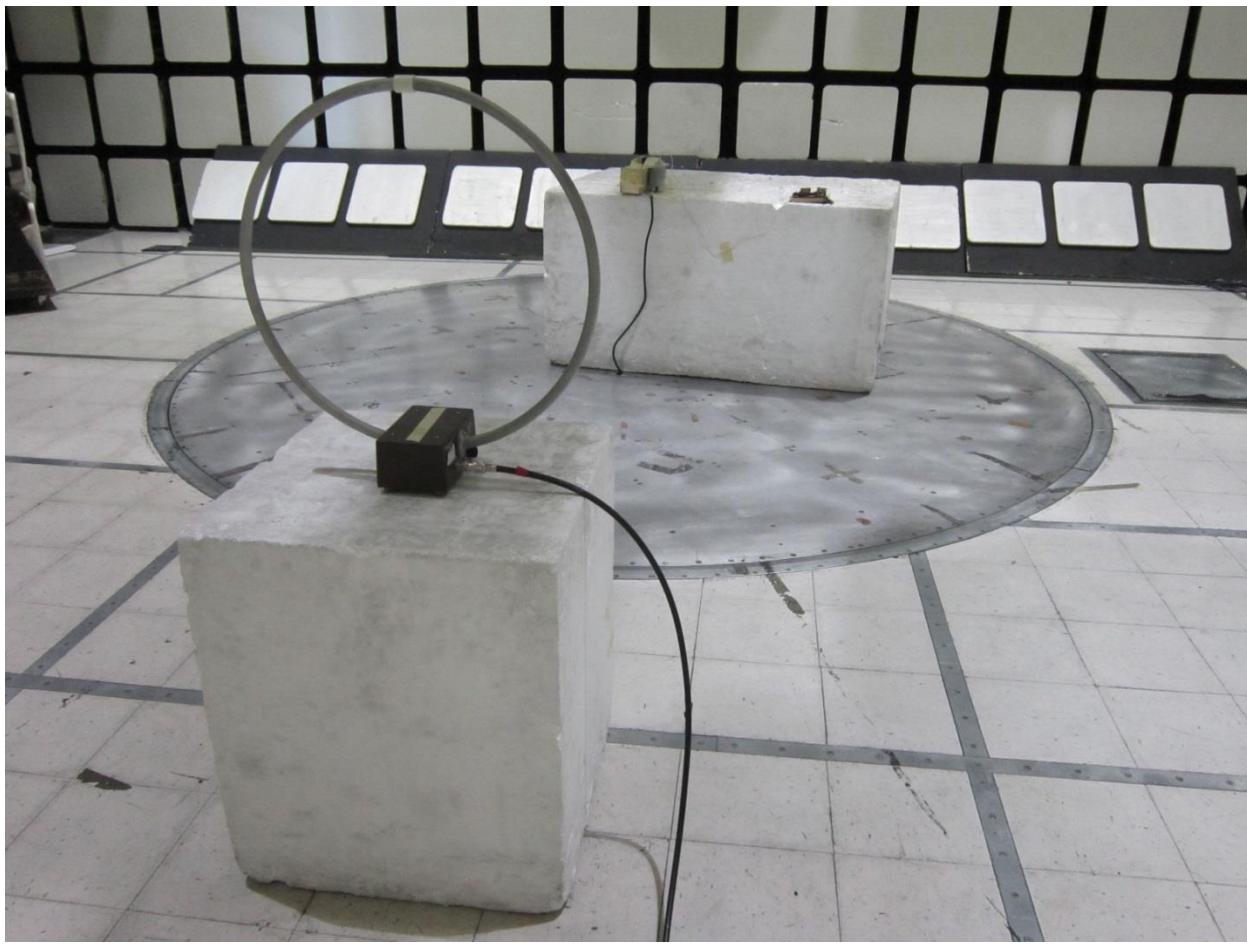

**Line Conducted Emissions**



**END OF REPORT**