

CoreLinc Wireless Remote - FCC / IC Product Labels

Transmitter



S37248-1


ENGINEERING CONTROLLED
MANUFACTURER: Yes

CHANGE DETAIL: A.03: CORRECTED TYPO.

N.A.



N.B.

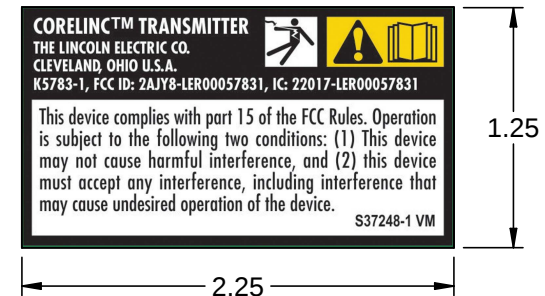

MATERIAL: E2866-1

ALL LETTERING AND PICTORIALS TO BE AS SHOWN AND COLOR "W" ON A COLOR "B" BACKGROUND
UNLESS OTHERWISE SPECIFIED.

NOTES:

N.A. LETTERING IN THIS AREA TO BE COLOR "B" ON A COLOR "W" BACKGROUND.

N.B. VENDOR'S IDENTIFICATION MARK AS REQUIRED BY CSA.

THE FOLLOWING COLOR TO MATCH PANTONE MATCHING SYSTEM (PMS)747XR:
COLOR "Y" - SAFETY YELLOW #109C

ALL OTHER COLORS TO CONFORM TO L.E. SPEC E2975:
COLOR "B" - BLACK
COLOR "W" - WHITE

VENDOR TO SUPPLY DECALS WITH CUTOUTS PER CUTOUT PATTERN.

PROPRIETARY & CONFIDENTIAL: THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OWNED BY LINCOLN GLOBAL, INC. AND MAY NOT BE DUPLICATED, COMMUNICATED TO OTHER PARTIES OR USED FOR ANY PURPOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF LINCOLN GLOBAL, INC.

MANUFACTURING TOLERANCE PER E2056 UNLESS OTHERWISE SPECIFIED TOLERANCE: ON 2 PLACE DECIMALS IS ± .02 in. (± 0.5 mm) ON 3 PLACE DECIMALS IS ± .002 in. (± 0.05 mm) ON ALL ANGLES IS ± .5 OF A DEGREE MATERIAL TOLERANCE ("t") TO AGREE WITH PUBLISHED STANDARDS.	CONTROL: CLEVELAND	SCALE: 1:1	EQUIPMENT TYPE: CORELINC WIRELESS REMOTE				PAGE <u>1</u> OF <u>1</u>	
	DRAWN BY: josantiago	IF PRINTED @ A4 SIZE	SUBJECT: TRANSMITTER DECAL				DOCUMENT NUMBER:	DOCUMENT REVISION:
	ENGINEER: JAS	UNITS: INCH	MATERIAL DISPOSITION: SCRAP	APPROVAL DATE: 1/13/2025	PROJECT NUMBER: 5096684	REFERENCE: NA	S37248-1	A.03
	APPROVED: JAS							
DO NOT SCALE THIS DRAWING								

SOLID EDGE

Insight

PURCHASE SPECIFICATION

CHANGE DETAIL: Added notes N.B. and N.C.
ENGINEERING CONTROLLED MANUFACTURER: Yes

DECAL (LABEL) MATERIAL

The decals are to be permanent pressure sensitive adhesive back laminate.

Material:

- A. 4 mil thick white soft vinyl. All artwork is to be on this material.
- B. 1 mil clear UV resistant polyester over-laminate.

Any decal manufactured from the above material specification is to have its shipping container, packing list, and invoice identified with the Lincoln Electric Spec. No.

Product change notification:

The manufacturer must provide advance notice of any change to the decal construction, for approval by the Lincoln Electric Co.

Notes:

- N.A. Print method can be analog or “KI” digital or “ElectroInk” digital. If printed digitally, “KI” must be used if the decal includes the colors red or orange and is attached to an external surface of the product.
- N.B. The decal must be certified for outdoor use on the following surfaces: bare aluminum, stainless steel, polyurethane powder paint, acrylic paint, polyethylene terephthalate (PET), polycarbonate (PC), polybutylene (PBT), and acrylonitrile butadiene styrene (ABS).
Note: alloys PET/PC and PBT/PC are covered by the separate testing of PET, PC and PBT.
- N.C. The decal construction must be certified by UL and/or CSA as a Marking and Labeling System compliant to both US and Canadian Standards (U.L. R/C Category PGDQ, CSA Class 7921)

Reference: Visual Marking Systems model No.: “VMS-LU-200-344”

PROPRIETARY & CONFIDENTIAL. This document contains proprietary information owned by Lincoln Global, Inc. and may not be duplicated, communicated to other parties or used for any purpose without the express written permission of Lincoln Global, Inc.
EXTERNAL SPECIFICATIONS AND STANDARDS: Vendor to abide by latest revision date regardless of any revision date specified.

SUBJECT: Decal (Label) Material					DOCUMENT NUMBER:	DOCUMENT REVISION:
DRAWN BY: FEI	ENGINEER: R. Lesak	MATERIAL DISPOSITION: NA	E2866-1		C	
APPROVED: DAD	APPROVAL DATE: 1-29-2016	PROJECT NUMBER: CRM51505	Page 1 of 1			