

TEST REPORT

Report No.: SHE23060106-02DE

Date: 2023-12-08

Page 1 of 38

Applicant : SIMCom Wireless Solutions Limited
Address of Applicant : SIMCom Headquarters Building, Building 3, No.289
Linhong Road, Changning District, Shanghai, China

Product Name : LTE Wireless Data Module
Brand Name : SIMCom
Model Name : SIM8918NA
Sample Acquisition Method : Sent by Client
Sample No. : E23060106-02#03

FCC ID : 2AJYU-8XRA002
ISED Number : 23761-8XRA002

Standards : FCC CFR47 Part 15, Subpart C
RSS-Gen (Issue 5, Amd.2-Feb 2021)
RSS-247 (Issue 3, August 2023)

Date of Receipt : 2023-09-06
Date of Test : 2023-09-06~ 2023-12-07
Date of Issue : 2023-12-08

Remark:

This report details the results of the testing carried out on one sample, the results contained in this report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

Prepared by:



(Erik Yang)

Reviewed by:



(Jennifer Zhou)

Approved by:



(Authorized signatory: Echo Mu)

TEST REPORT

Report No.: SHE23060106-02DE Date: 2023-12-08 Page 2 of 38

Contents

- 1 GENERAL INFORMATION 3**
 - 1.1 TESTING LABORATORY 3
 - 1.2 DETAILS OF APPLICATION 3
 - 1.3 DETAILS OF EUT 3
 - 1.4 TEST METHODOLOGY 4
 - 1.5 TEST SUMMARY 5
- 2 TEST CONDITION 6**
 - 2.1 ENVIRONMENTAL CONDITIONS 6
 - 2.2 EQUIPMENT LIST 6
 - 2.3 MEASUREMENT UNCERTAINTY 7
- 3 TEST SET-UP AND OPERATION MODES 8**
 - 3.1 DETAILS OF TEST MODE 8
 - 3.2 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT 8
 - 3.3 SUPPORT SOFTWARE 8
 - 3.4 TEST SETUP DIAGRAM 9
- 4 TEST RESULTS 11**
 - 4.1 TRANSMITTER REQUIREMENT & TEST SUITES 11
 - 4.1.1 *Antenna Requirement* 11
 - 4.1.2 *Maximum peak conducted output power and E.I.R.P* 12
 - 4.1.3 *6dB Bandwidth and 99% Bandwidth* 15
 - 4.1.4 *Maximum conducted output power spectral density* 19
 - 4.1.5 *Conducted Spurious Emission & Authorized-band band-edge* 21
 - 4.1.6 *Radiated Emission* 28
 - 4.1.7 *Band Edge (Restricted-band band-edge)* 29
 - 4.2 MAINS EMISSIONS 30
 - 4.2.1 *Conducted Emission on AC Mains* 30
- 5 APPENDIXES 33**
 - 5.1 PHOTOGRAPHS OF THE SAMPLE 33
 - 5.2 SET-UP FOR CONDUCTED EMISSIONS 37
 - 5.3 SET-UP FOR CONDUCTED RF TEST AT ANTENNA PORT 37
 - 5.4 SET-UP FOR SPURIOUS EMISSIONS BELOW 1GHZ 38
 - 5.5 SET-UP FOR SPURIOUS EMISSIONS ABOVE 1GHZ 38

TEST REPORT

Report No.: SHE23060106-02DE

Date: 2023-12-08

Page 3 of 38

1 General Information

1.1 Testing Laboratory

ISED CAB identifier #	CN0081
Company Name	ICAS Testing Technology Service (Shanghai) Co., Ltd.
Address	No.1298 Pingan Road, Minhang District, Shanghai, China
Telephone	0086 21-51682999
Fax	0086 21-54711112
Homepage	www.icasiso.com

1.2 Details of Application

Applicant Company Name	SIMCom Wireless Solutions Limited
Address	SIMCom Headquarters Building, Building 3, No.289 Linhong Road, Changning District, Shanghai,China
Contact Person	Yongsheng Li
Telephone	+86 21 3252 3134
Email	yongsheng.li@simcom.com
Manufacturer Company Name	SIMCom Wireless Solutions Limited
Address	SIMCom Headquarters Building, Building 3, No.289 Linhong Road, Changning District, Shanghai,China
Factory Company Name	SIMCom Wireless Solutions Limited
Address	SIMCom Headquarters Building, Building 3, No.289 Linhong Road, Changning District, Shanghai,China

1.3 Details of EUT

Product Name	LTE Wireless Data Module
Brand Name	SIMCom
Test Model Name	SIM8918NA
FCC ID	2AJYU-8XRA002
ISED Number	23761-8XRA002
Mode of Operation	Bluetooth BLE Version 5.0
Frequency Range	2402MHz ~ 2480MHz
Number of Channels	40 (at intervals of 2 MHz)
Modulation Type	BLE ☒ GFSK 1Mbps ☐ GFSK 2Mbps
Max RF Output Power	6.74dBm
Antenna Type	External Antenna
Antenna Gain	4.01dBi
Extreme Temperature Range	-35℃ ~ +75℃
Test Voltage	DC 3.9V

TEST REPORT

Report No.: SHE23060106-02DE

Date: 2023-12-08

Page 4 of 38

Hardware Version	8XR000-SIM8918_V1.03
Software Version	SIM8918B01V01
RF power setting in TEST SW	QRCT_Power level setting_Default

Note:

1. The above information was declared by the manufacture.
2. For more details, please refer to the User's manual of the EUT.

Channel List

Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2.402GHz	14	2.430GHz	28	2.458GHz
1	2.404GHz	15	2.432GHz	29	2.460GHz
2	2.406GHz	16	2.434GHz	30	2.462GHz
3	2.408GHz	17	2.436GHz	31	2.464GHz
4	2.410GHz	18	2.438GHz	32	2.466GHz
5	2.412GHz	19	2.440GHz	33	2.468GHz
6	2.414GHz	20	2.442GHz	34	2.470GHz
7	2.416GHz	21	2.444GHz	35	2.472GHz
8	2.418GHz	22	2.446GHz	36	2.474GHz
9	2.420GHz	23	2.448GHz	37	2.476GHz
10	2.422GHz	24	2.450GHz	38	2.478GHz
11	2.424GHz	25	2.452GHz	39	2.480GHz
12	2.426GHz	26	2.454GHz		
13	2.428GHz	27	2.456GHz		

1.4 Test Methodology

47 CFR Part 15, Subpart C	Telecommunication-Radio Frequency Devices-Intentional Radiators
KDB Publication 558074 D01 v05r02	15.247 Meas Guidance.
ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
RSS-Gen (Issue 5, Amd.2-Feb 2021)	General Requirements for Compliance of Radio Apparatus
RSS-247 (Issue 3, August 2023)	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

Note(s):

All test items were verified and recorded according to the standards and without any addition/deviation/exclusion during the test.

TEST REPORT

Report No.: SHE23060106-02DE

Date: 2023-12-08

Page 5 of 38

1.5 Test Summary

Test Item	FCC Rules	ISED Rules	Result
Antenna Requirement	FCC Part 15.247(b)(4), Part 15.203	RSS-247 5.4(f) RSS-GEN 6.8	PASS
Maximum peak conducted output power and E.I.R.P	FCC Part 15.247(b)(3)	RSS-247 5.4(d)	PASS
6dB Bandwidth and 99% Bandwidth	FCC Part 15.247(a)(2)	RSS-247 5.2(a) RSS-Gen 6.7	PASS
Maximum conducted output power spectral density	FCC Part 15.247(e)	RSS-247 5.2(b)	PASS
Conducted Spurious Emission & Authorized-band band-edge	FCC Part 15.247(d)	RSS-247 5.5	PASS
Radiated Emission	FCC Part 15.247(d), 15.205, 15.209	RSS-GEN 8.9	PASS
Band Edge (Restricted-band band-edge)	FCC Part 15.247(d), 15.205, 15.209	RSS-GEN 8.10	PASS
Conducted Emission on AC Mains	FCC Part 15.207(a)	RSS-Gen 8.8	PASS

TEST REPORT

Report No.: SHE23060106-02DE

Date: 2023-12-08

Page 6 of 38

2 Test Condition

2.1 Environmental conditions

Temperature (°C)	18-25
Humidity (%RH)	40-65
Barometric Pressure (mbar)	960-1060

2.2 Equipment List

Name of Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	Keysight	N9020B	MY59260184	2023-07-27	2024-07-26
Spectrum Analyzer	Rohde & Schwarz	FSV40N	101450	2023-06-08	2024-06-07
Signal Generator	Rohde & Schwarz	SMR27	100184	2023-07-27	2024-07-26
EMI Test Receiver	Rohde & Schwarz	ESPI3	100173	2023-06-08	2024-06-07
EMI Test Receiver	Rohde & Schwarz	ESR 7	101911	2023-06-08	2024-06-07
V-network	SCHWARZBECK	NSLK 8127	8127-902	2023-06-07	2024-06-06
Attenuator	SCHWARZBECK	VTSD 9561-FN	/	2023-06-06	2024-06-05
Broadband Antenna	SCHWARZBECK	VULB9163	9163-1037	2023-03-22	2025-03-21
Horn Antenna-18G	SCHWARZBECK	BBHA9120D	9120D-1775	2023-06-13	2025-06-12
Loop Antenna	SCHWARZBECK	FMZB 1513	/	2023-06-09	2024-06-08
Horn Antenna-40G	YINGLIAN	LB-180400-KF	N/A	2023-06-18	2025-06-17
Broadband Preamplifier	SCHWARZBECK	BBV 9718	346	2023-06-08	2024-06-07
EMC chamber 9*6*6 (L*W*H)	CHANGNING	966	N/A	2023-06-09	2024-06-08
Shielded Enclosure 8*5*4 (L*W*H)	CHANGNING	854	N/A	2023-06-09	2025-06-08
Test Software	BL	BL410_E	Version:1.0.0.117	N/A	N/A
Test Software	BL	BL410_R	Version:2.1.1.409	N/A	N/A

TEST REPORT

Report No.: SHE23060106-02DE

Date: 2023-12-08

Page 7 of 38

2.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the “Guide to the Expression of Uncertainty in measurement” (GUM) published by CISPR and ANSI. The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95.45%.

Parameter		Uncertainty
Antenna Port Conducted Emission	< 1GHz	± 1.5 dB
	> 1GHz	± 1.5 dB
Radiated Emission	9KHz – 30MHz	± 3.42 dB
	30 MHz – 1GHz	± 5.00 dB
	> 1GHz	± 4.88 dB
Conducted Emission on AC Mains	150kHz-30MHz	± 2.68 dB
Occupied Channel Bandwidth		± 5 %
Maximum Conducted Output Power and E.I.R.P		± 0.64 dB
Maximum Conducted Output Power Spectral Density		± 1.18 dB

TEST REPORT

Report No.: SHE23060106-02DE

Date: 2023-12-08

Page 8 of 38

3 Test Set-up and Operation Modes

3.1 Details of Test Mode

Using test software was control EUT work in continuous transmitting mode. Select test channel as below:

Channel	Frequency
The lowest channel(CH00)	2402MHz
The middle channel(CH19)	2440MHz
The Highest channel(CH39)	2480MHz

The basic operation modes are:

- A. On
 - 1. BLE mode
 - a. Transmitting
 - i. Low Channel
 - ii. Middle Channel
 - iii. High Channel
 - b. Receiving
 - 2. Normal working with Bluetooth on
- B. Standby
- C. Off

3.2 Special Accessories and Auxiliary Equipment

Description	Manufacturer	Model Name	Serial No.
Laptop	Lenovo	TP00083A	N/A
SWITCHING POWER SUPPLY	N/A	P-050B-050200EU	N/A
EVB Debug Board 1	N/A	Smart Module-EVB_V1.03	N/A
EVB Debug Board 2	N/A	8918-TE_V1.02	N/A
USB Cable	N/A	N/A	1.00m Unshielded


3.3 Support Software

Description	Manufacturer	Software Name
Software	Qualcomm	QRCT Version 4.0.00166.0

TEST REPORT


3.4 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

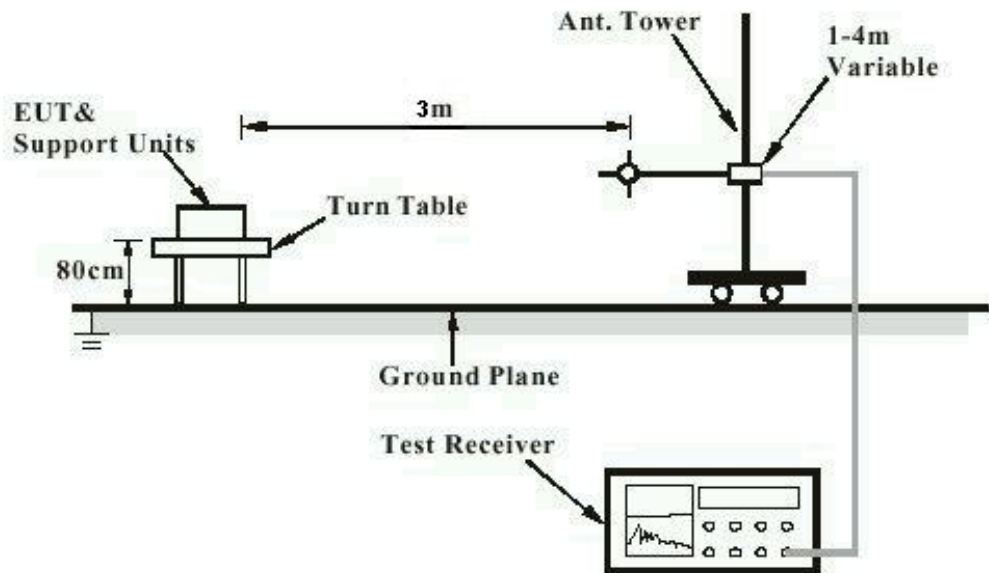

Note: Measurements above 1GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Equipment Configuration for Conduction Measurement

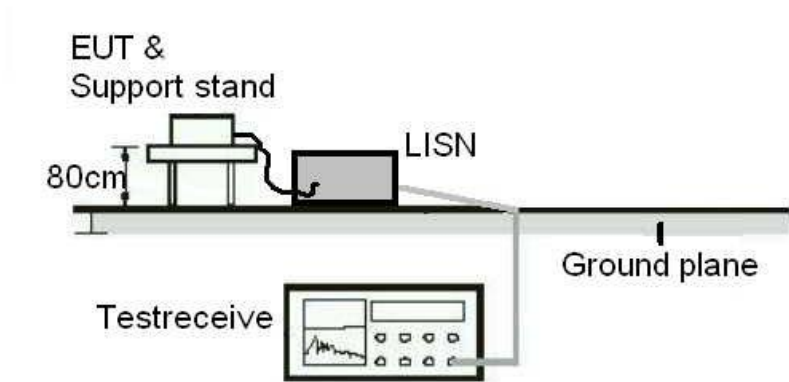


TEST REPORT

Report No.: SHE23060106-02DE

Date: 2023-12-08

Page 10 of 38

Diagram of Measurement Equipment Configuration for Transmitter Test

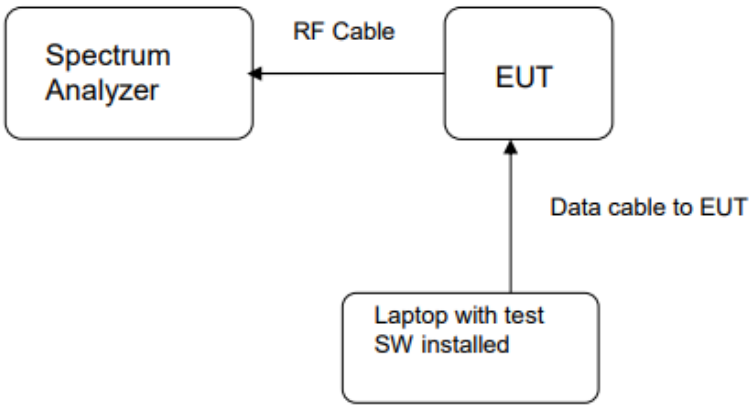

TEST REPORT

Report No.: SHE23060106-02DE

Date: 2023-12-08

Page 11 of 38

4 Test Results

4.1 Transmitter Requirement & Test Suites

4.1.1 Antenna Requirement

RESULT:

PASS

Test standard : FCC Part 15.247(b)(4), Part 15.203
RSS-247 5.4(f), RSS-GEN 6.8

Requirement : The use of approved antennas only with directional
gains that do not exceed 6dBi

According to the manufacturer declaration, the EUT has an antenna with a directional gain of 4.01dBi. The antenna is an external antenna with no possibility of replacement with a non-approved antenna by the end-user.

The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Therefore, the EUT is considered to comply with this provision.

TEST REPORT

Report No.: SHE23060106-02DE

Date: 2023-12-08

Page 12 of 38

4.1.2 Maximum peak conducted output power and E.I.R.P

RESULT:

PASS

Test standard : FCC Part 15.247(b)(3), RSS-247 5.4(d)
Requirement : ANSI C63.10-2013 clause 11.9.1.1,
KDB 558074 D01 v05r02, Clause 8.3.1
Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High
Operation Mode : A.1.a
Ambient temperature : 24.9°C
Relative humidity : 56%

Table 1: Maximum peak conducted output power

Test Mode	Test Channel (MHz)	Maximum peak conducted output power		Limit (W)
		(dBm)	(mW)	
BLE	2402	5.98	3.96	< 1
	2440	6.74	4.72	
	2480	6.63	4.60	

Table 2: E.I.R.P

Test Mode	Test Channel (MHz)	E.I.R.P		Limit (W)
		(dBm)	(mW)	
BLE	2402	9.99	9.98	< 4
	2440	10.75	11.89	
	2480	10.64	11.59	

Note: The antenna gain is 4.01dBi

TEST REPORT

Report No.: SHE23060106-02DE

Date: 2023-12-08

Page 13 of 38

Figure 1: Peak Output Power, 2402MHz



Figure 2: Peak Output Power, 2440MHz



TEST REPORT

Report No.: SHE23060106-02DE

Date: 2023-12-08

Page 14 of 38

Figure 3: Peak Output Power, 2480MHz



TEST REPORT

Report No.: SHE23060106-02DE

Date: 2023-12-08

Page 15 of 38

4.1.3 6dB Bandwidth and 99% Bandwidth

RESULT:

PASS

Test standard

: FCC Part 15.247(a)(2), RSS-247 5.2(a)
RSS-Gen 6.7

Requirement

: ANSI C63.10-2013 clause 11.8.1,
KDB 558074 D01 v05r02, Clause 8.2

Kind of test site

: Shielded room

Test setup

Test Channel

: Low/Middle/High

Operation Mode

: A.1.a

Ambient temperature

: 21.3°C

Relative humidity

: 42%

Table 3: 6dB Bandwidth and 99% Bandwidth

Test Mode	Test Channel (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	6dB Bandwidth Limit
BLE	2402	0.6998	1.0459	≥0.5 MHz
	2440	0.6765	1.0402	
	2480	0.6594	1.0352	

TEST REPORT

Report No.: SHE23060106-02DE Date: 2023-12-08 Page 16 of 38

Figure 4: 6dB Bandwidth, 2402MHz



99% Bandwidth, 2402MHz



TEST REPORT

Report No.: SHE23060106-02DE

Date: 2023-12-08

Page 17 of 38

Figure 5: 6dB Bandwidth, 2440MHz



99% Bandwidth, 2440MHz



TEST REPORT

Report No.: SHE23060106-02DE Date: 2023-12-08 Page 18 of 38

Figure 6: 6dB Bandwidth, 2480MHz



99% Bandwidth, 2480MHz



TEST REPORT

Report No.: SHE23060106-02DE

Date: 2023-12-08

Page 19 of 38

4.1.4 Maximum conducted output power spectral density

RESULT:

PASS

Test standard : FCC Part 15.247(e), RSS-247 5.2(b)

Requirement : ANSI C63.10-2013 clause 11.10.2,
KDB 558074 D01 v05r02, Clause 8.4

Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High

Operation Mode : A.1.a


Ambient temperature : 21.3°C

Relative humidity : 42%

Table 4: Maximum conducted output power spectral density

Test Mode	Test Channel (MHz)	Measured Result (dBm/3kHz)	Limit (dBm/3kHz)
BLE	2402	-9.64	8
	2440	-8.55	
	2480	-8.61	

Figure 7: Power Spectral Density, 2402MHz

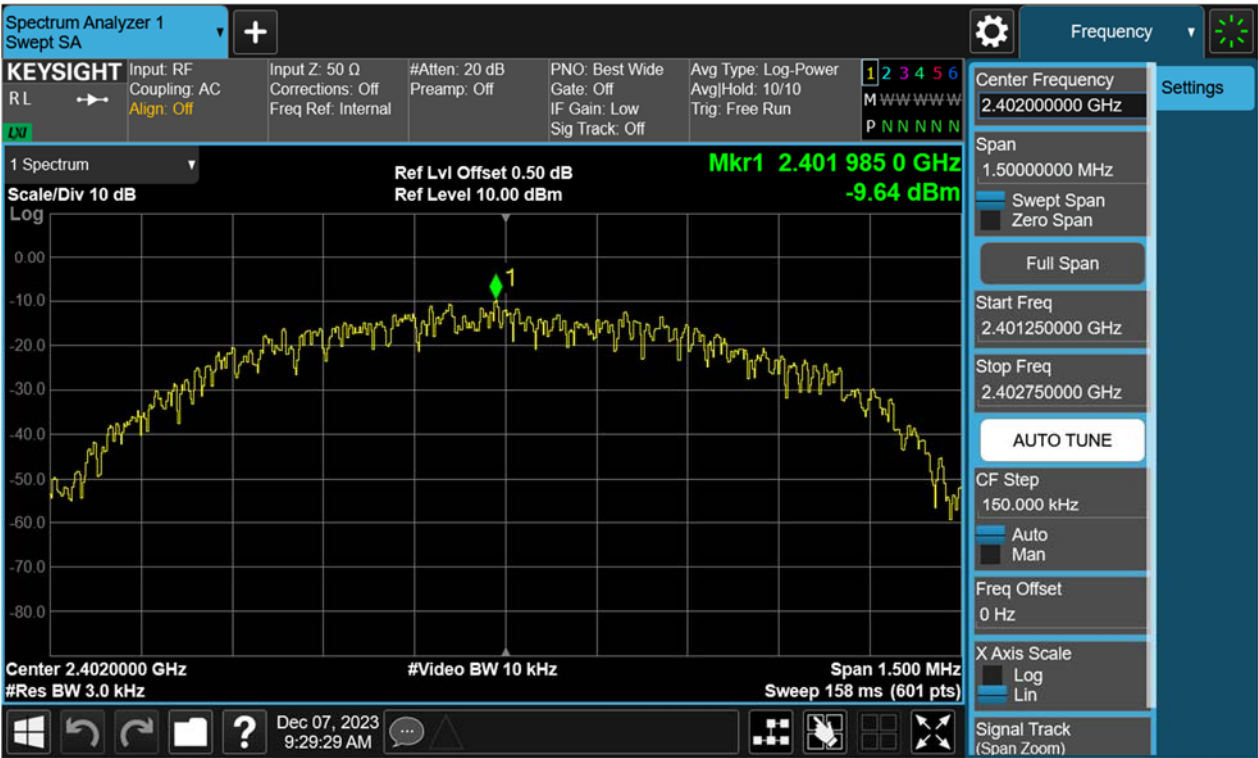

TEST REPORT

Report No.: SHE23060106-02DE Date: 2023-12-08 Page 20 of 38

Figure 8: Power Spectral Density, 2440MHz

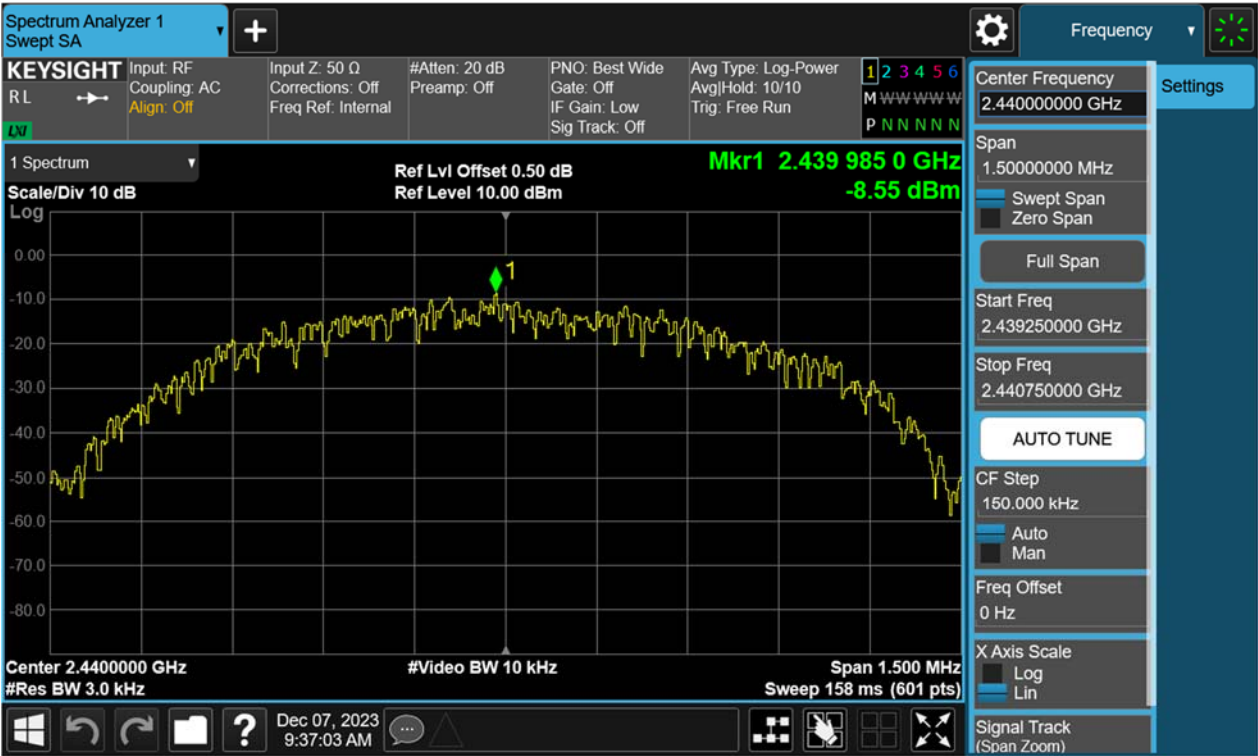


Figure 9: Power Spectral Density, 2480MHz



TEST REPORT

Report No.: SHE23060106-02DE Date: 2023-12-08 Page 21 of 38

4.1.5 Conducted Spurious Emission & Authorized-band band-edge

RESULT: PASS

Test standard	: FCC Part 15.247(d), RSS-247 5.5
Requirement	: ANSI C63.10-2013, Clause 11.11.1(a) KDB 558074 D01 v05r02, Clause 8.5
Kind of test site	: Shielded room

Test setup

Test Channel	: Low/Middle/High for spurious, Low/High for Band Edge
Operation Mode	: A.1.a
Ambient temperature	: 21.3°C
Relative humidity	: 42%

For details refer to following test plot.


TEST REPORT

Report No.: SHE23060106-02DE


Date: 2023-12-08

Page 22 of 38

Figure 10: Conducted Spurious Emission & Authorized-band band-edge, 2402MHz, BLE Carrier Level

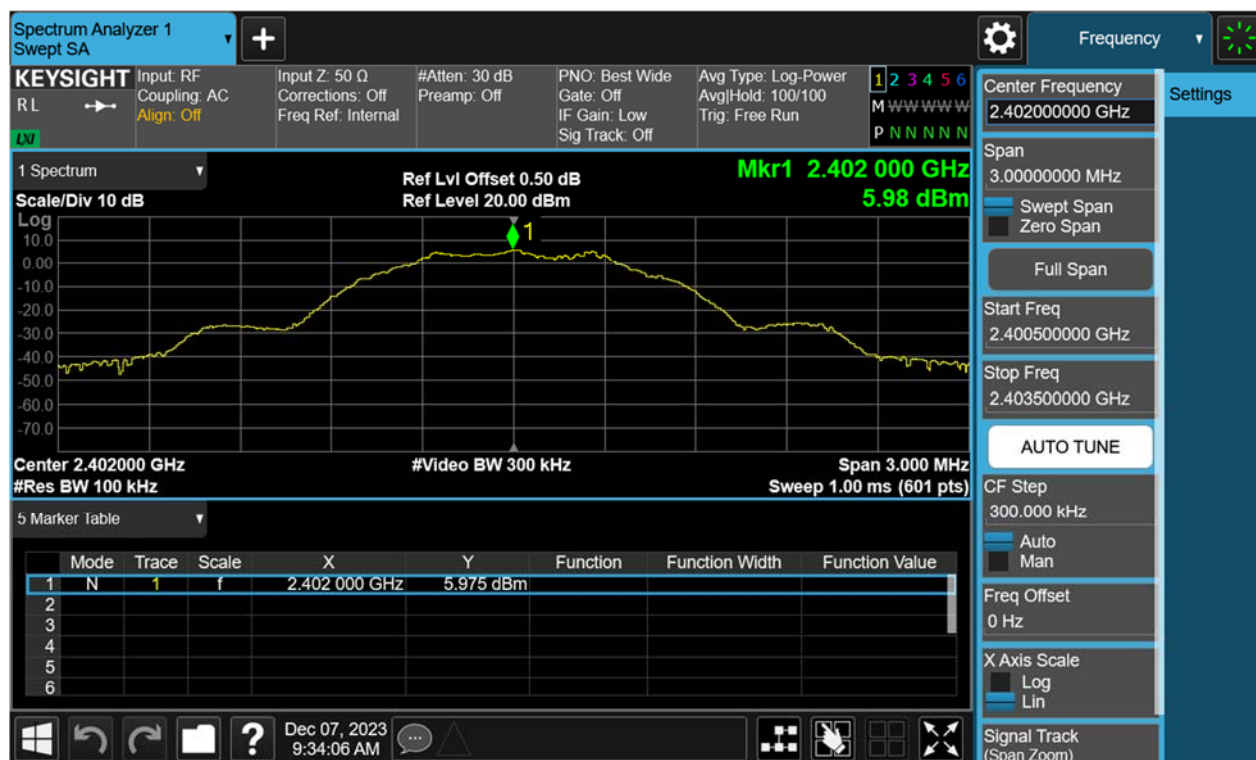

Band Edge

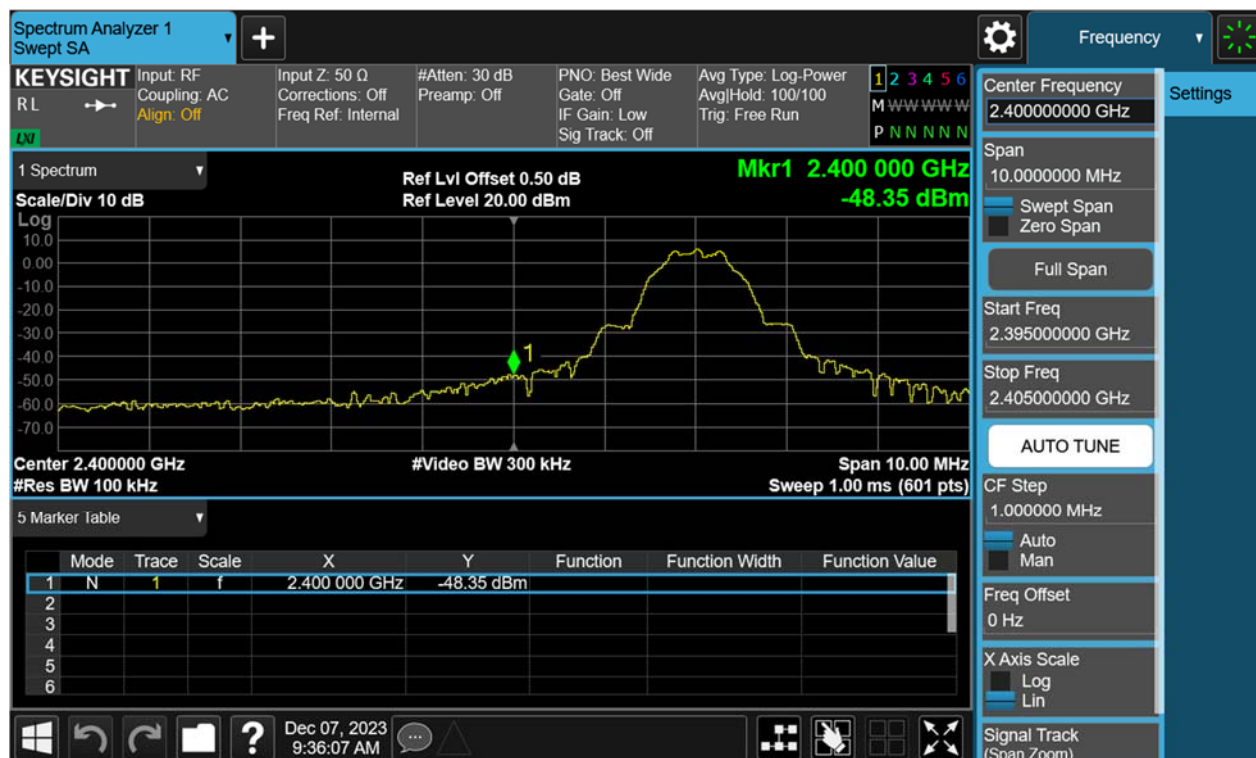



TEST REPORT

Report No.: SHE23060106-02DE

Date: 2023-12-08

Page 23 of 38

Conducted spurious emissions 30MHz-25GHz

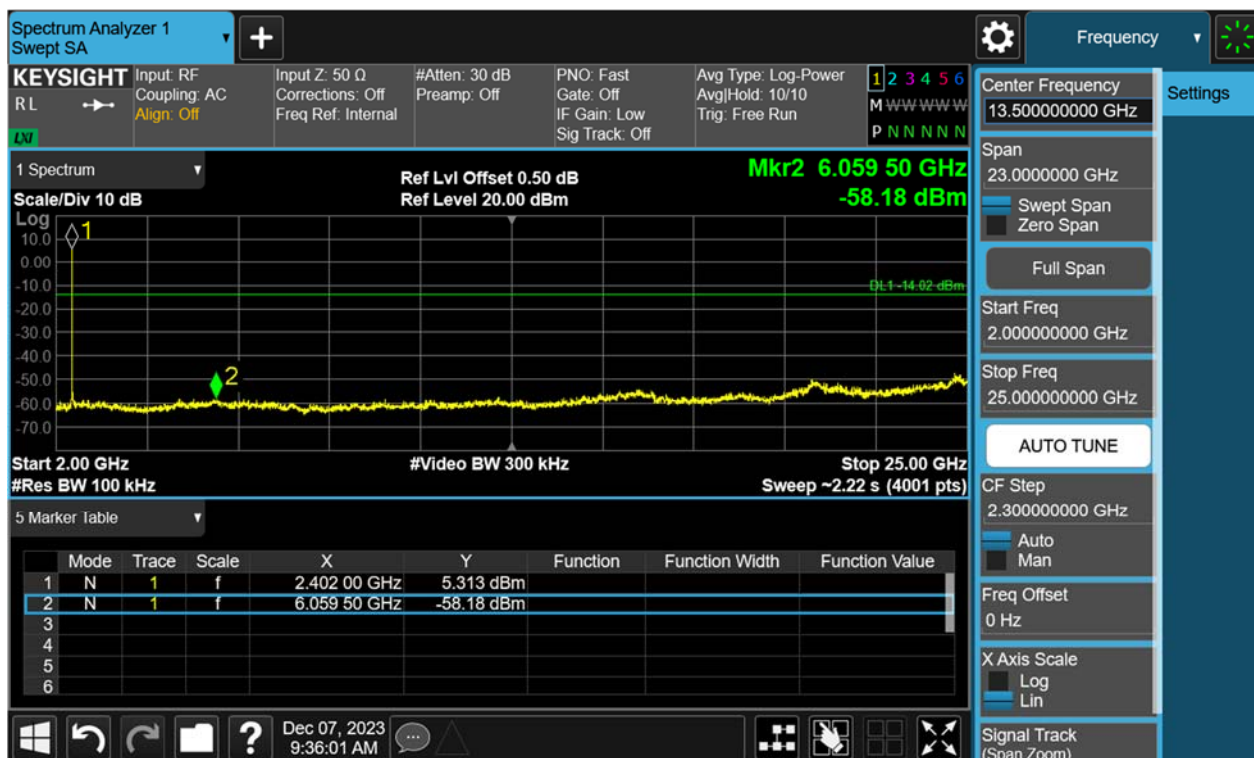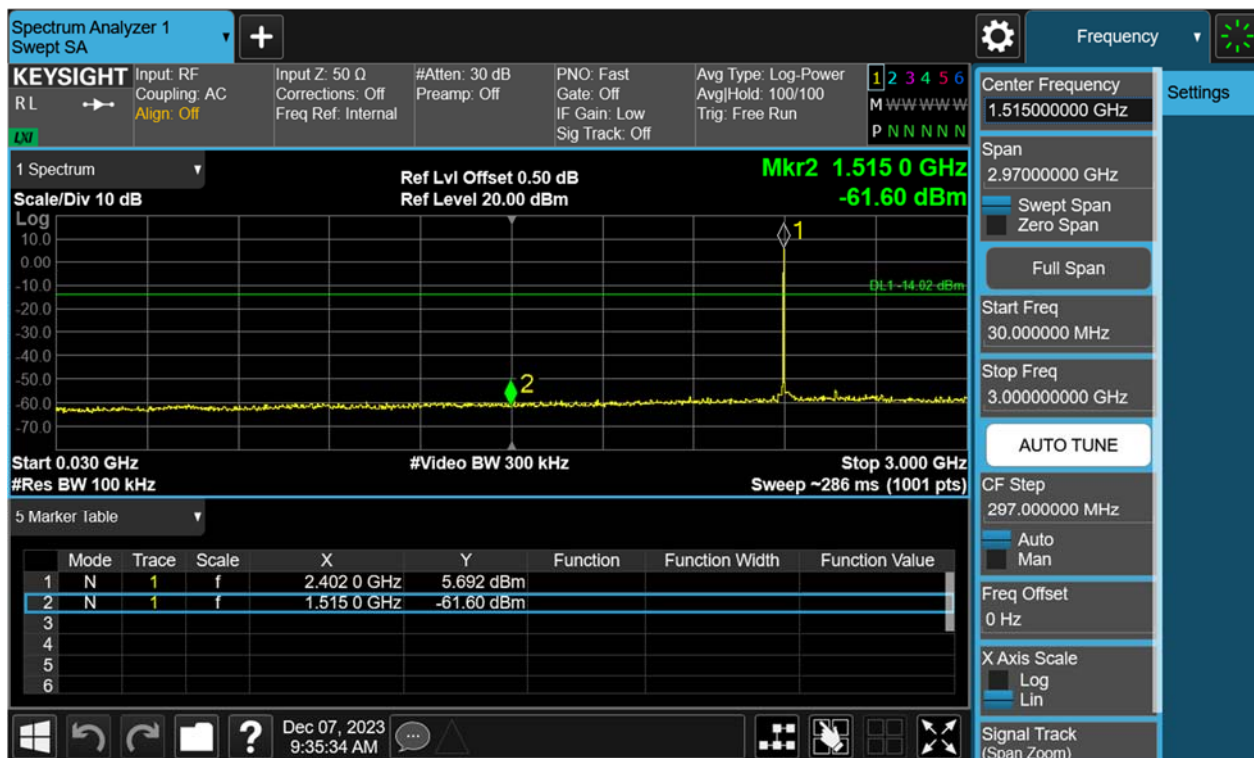


TEST REPORT

Report No.: SHE23060106-02DE


Date: 2023-12-08

Page 24 of 38

Figure 11: Conducted Spurious Emission & Authorized-band band-edge, 2440MHz, BLE Carrier Level

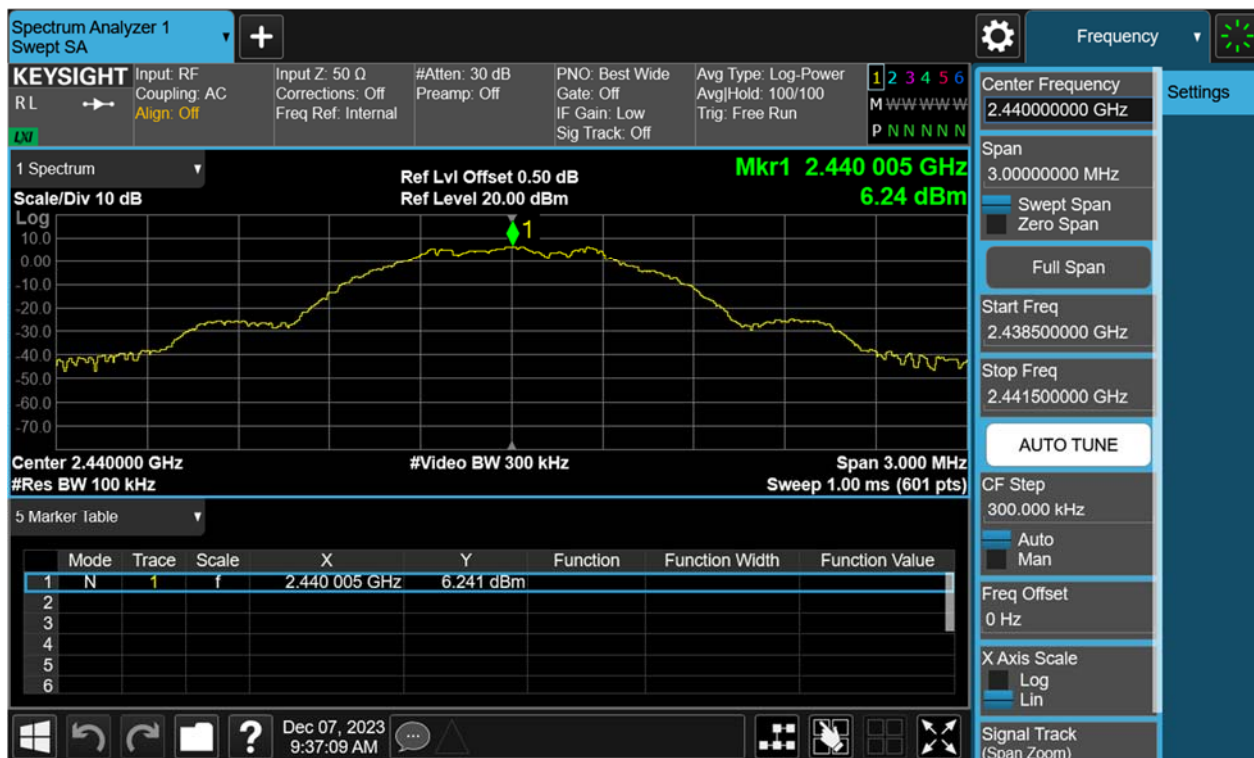

Conducted spurious emissions 30MHz-25GHz

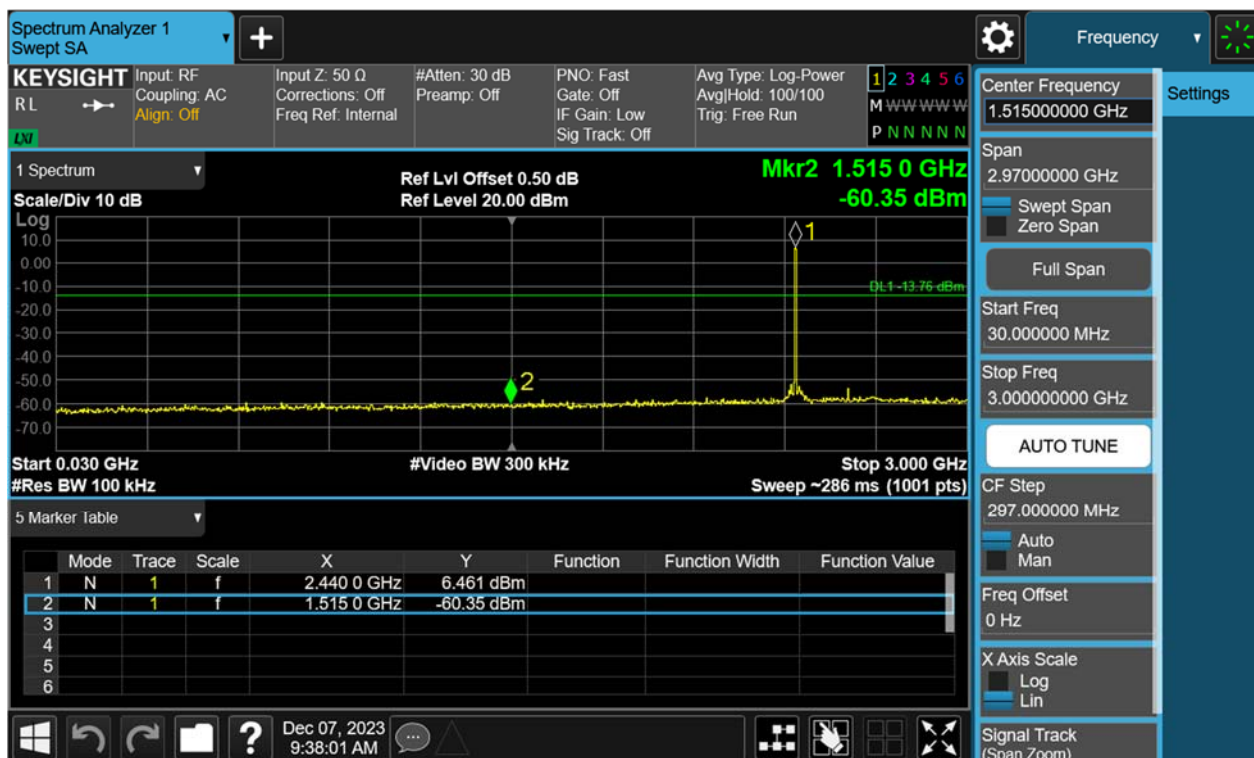

TEST REPORT

Report No.: SHE23060106-02DE

Date: 2023-12-08

Page 25 of 38


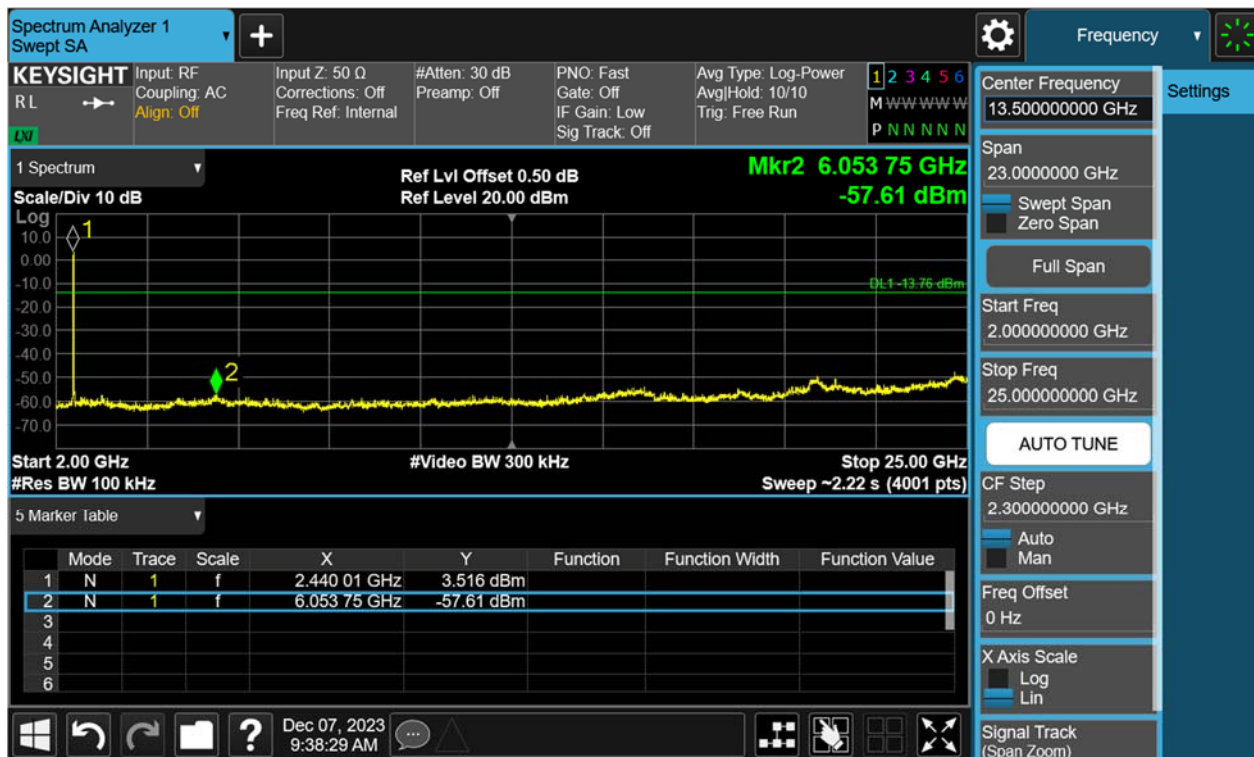


Figure 12: Conducted Spurious Emission & Authorized-band band-edge, 2480MHz, BLE Carrier Level

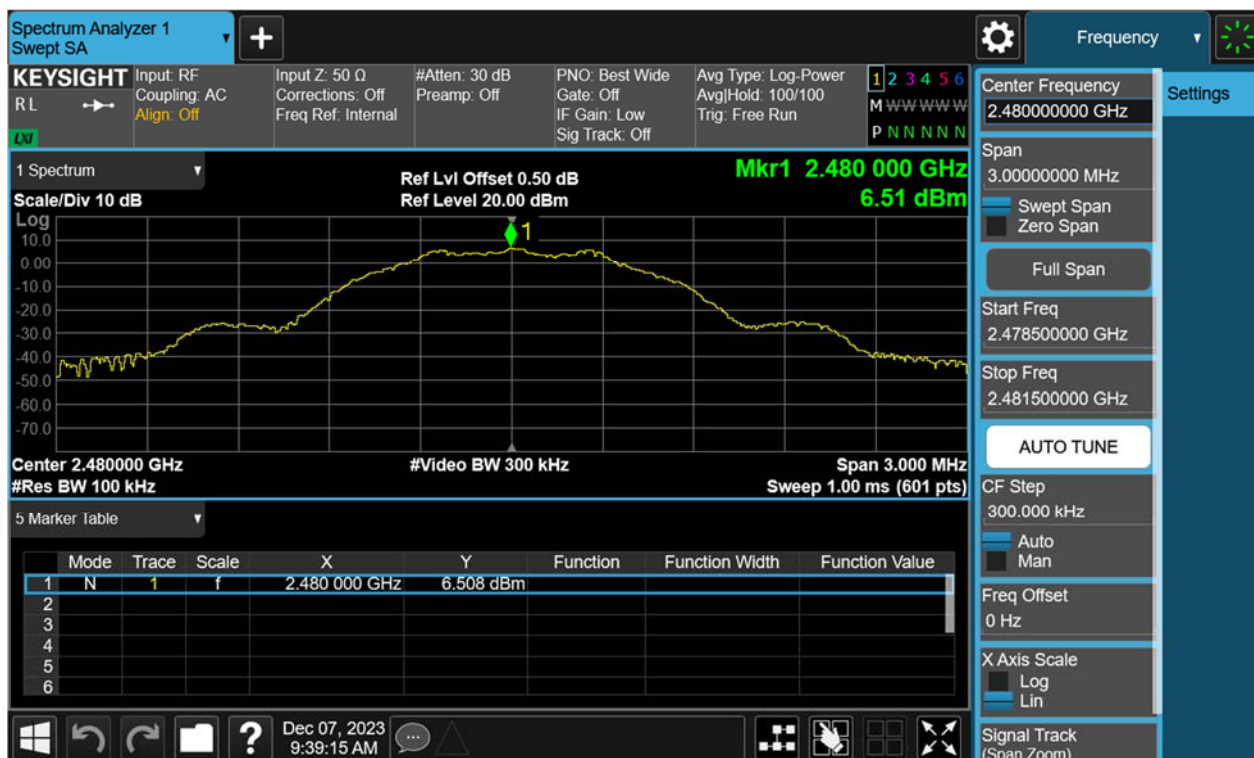

TEST REPORT

Report No.: SHE23060106-02DE


Date: 2023-12-08

Page 26 of 38

Band Edge



Conducted spurious emissions 30MHz-25GHz

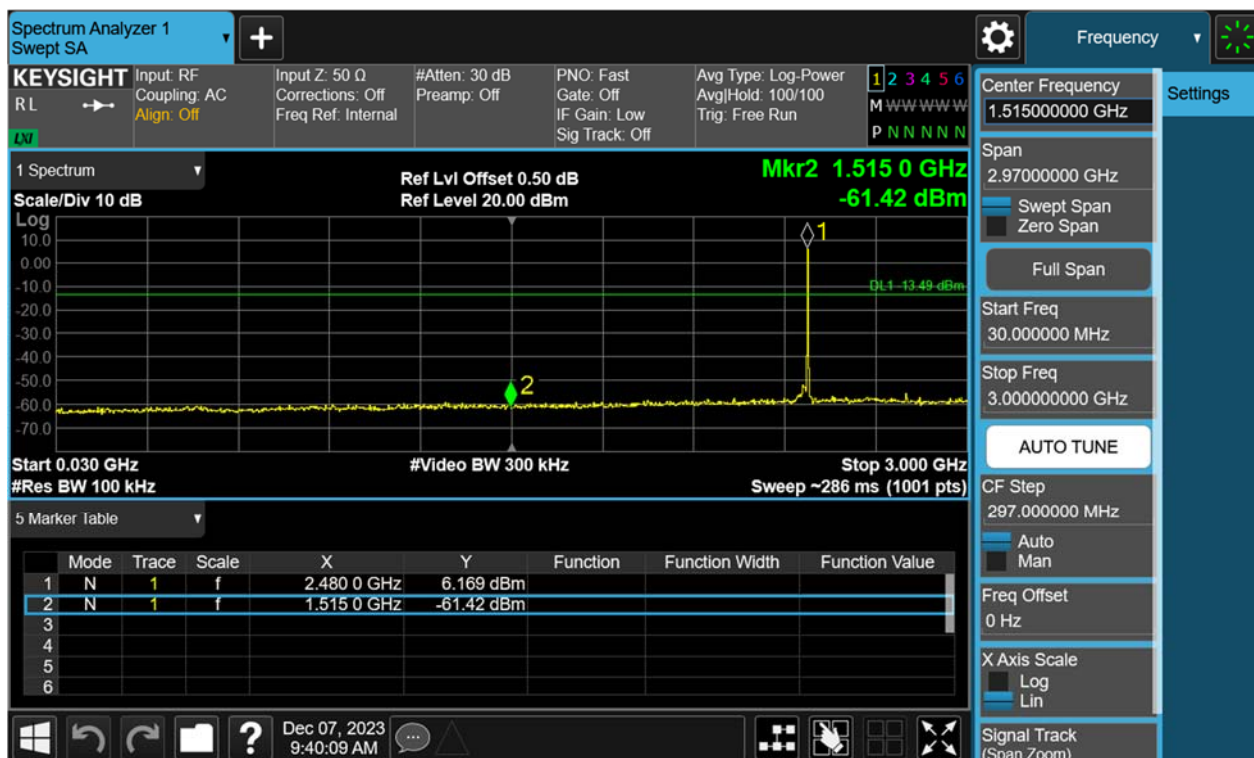


TEST REPORT

Report No.: SHE23060106-02DE

Date: 2023-12-08

Page 27 of 38

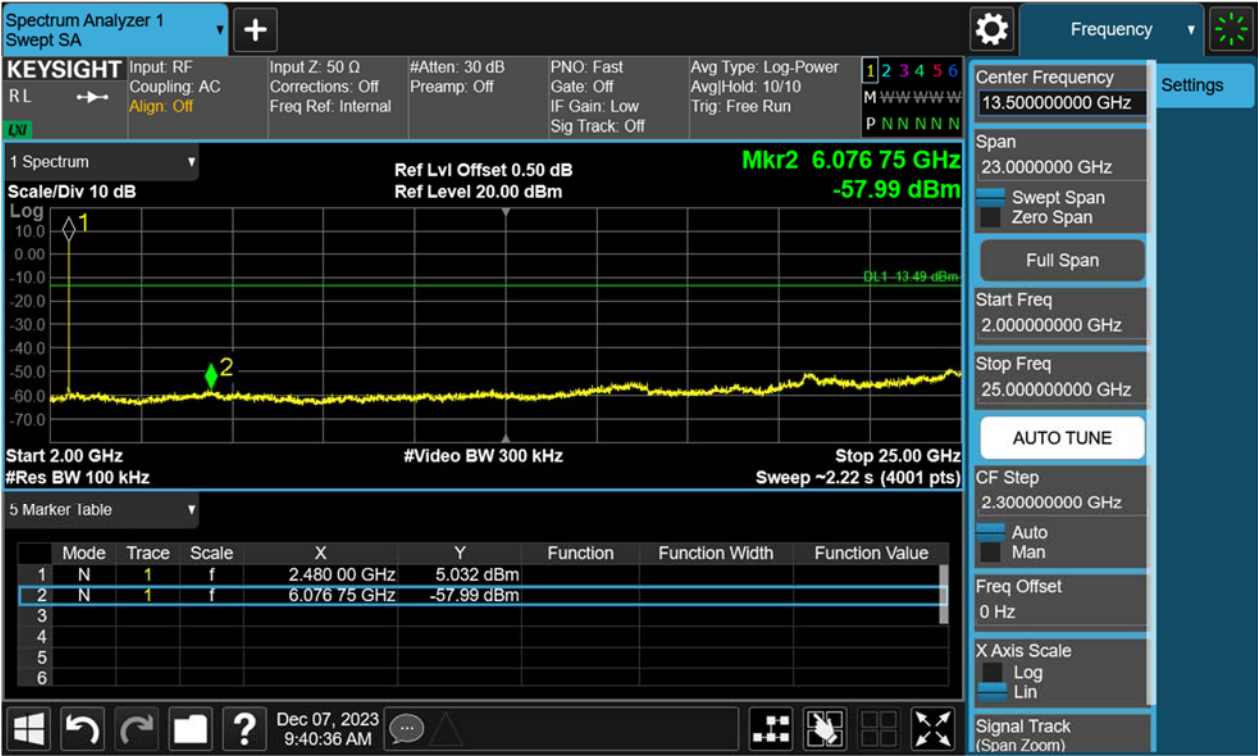

TEST REPORT

Report No.: SHE23060106-02DE

Date: 2023-12-08

Page 28 of 38

4.1.6 Radiated Emission

RESULT:

PASS

Test standard	: FCC Part 15.247(d), 15.205, 15.209 RSS-GEN 8.9
Requirement	: ANSI C63.10-2013 clause 11.12, KDB 558074 D01 v05r02, Clause 8.6
Kind of test site	: 3m Semi-Anechoic Chamber

Test setup

Test Channel	: Low/Middle/High
Operation Mode	: A
Ambient temperature	: 25.1°C
Relative humidity	: 52%

Notes

Test plots please refer to the annex document "SHE23060106-02DE DATA BLE-TX EXHIBIT A".

1. For 9 kHz ~ 30 MHz, the amplitude of spurious emissions that are attenuated by more than 20dB below the permissible. The value has no need to be reported. In addition, During 30MHz to 1GHz test frequency range, only the worst mode data was reported in this report.
2. The spurious above 18GHz is noise only and 20dB below the limit. The value has no need to be reported.
3. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

TEST REPORT

Report No.: SHE23060106-02DE

Date: 2023-12-08

Page 29 of 38

4.1.7 Band Edge (Restricted-band band-edge)

RESULT:

PASS

Test standard	: FCC Part 15.247(d), 15.205, 15.209 RSS-GEN 8.10
Requirement	: ANSI C63.10-2013 clause 11.13, KDB 558074 D01 v05r02, Clause 8.7
Kind of test site	: 3m Semi-Anechoic Chamber

Test setup

Test Channel	: Low/Middle/High
Operation Mode	: A.1
Ambient temperature	: 25.1°C
Relative humidity	: 52%

Notes

Test plots please refer to the annex document "SHE23060106-02DE DATA BLE-TX EXHIBIT A".

TEST REPORT

Report No.: SHE23060106-02DE Date: 2023-12-08 Page 30 of 38

4.2 Mains Emissions

4.2.1 Conducted Emission on AC Mains

RESULT: **PASS**

Test standard	: FCC Part 15.207(a), RSS-Gen 8.8
Requirement	: ANSI C63.10-2013, Clause 6.2
Kind of test site	: Shielded room

Test setup

Input Voltage	: which received AC 120V, 60Hz Power
Operation Mode	: A.1.a
Earthing	: Disconnected to GND
Ambient temperature	: 21°C
Relative humidity	: 50%

For details refer to following test plot.

TEST REPORT


Report No.: SHE23060106-02DE

Date: 2023-12-08

Page 31 of 38

Note: The all configurations were tested respectively, but only the worst data (at middle channel) shown here.

Figure 13: Conducted Emission on AC Mains, L Phase

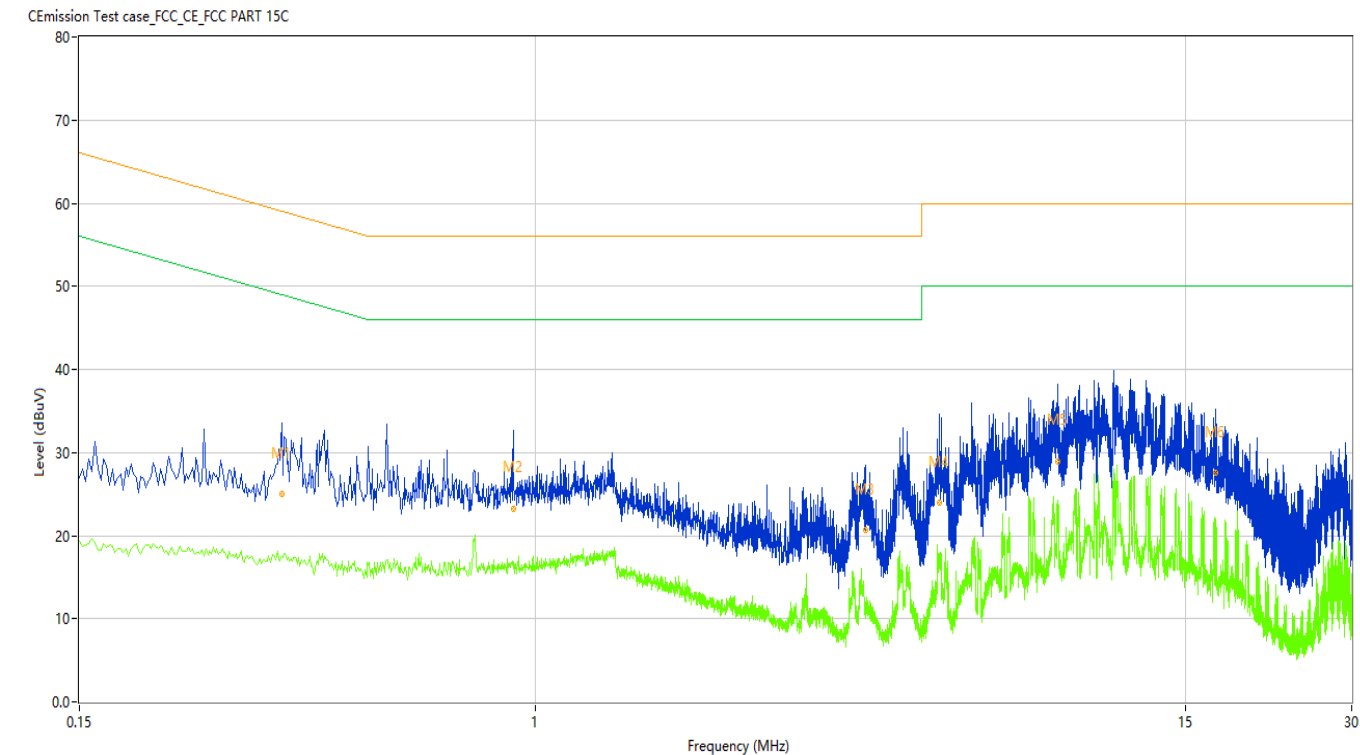

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.348	37.02	9.96	59.01	21.99	Peak	L	Pass
1*	0.348	24.95	9.96	59.01	34.06	QP	L	Pass
1**	0.348	17.50	9.96	49.01	31.51	AV	L	Pass
2	0.914	33.62	9.94	56.00	22.38	Peak	L	Pass
2*	0.914	23.22	9.94	56.00	32.78	QP	L	Pass
2**	0.914	16.78	9.94	46.00	29.22	AV	L	Pass
3	3.966	30.76	9.82	56.00	25.24	Peak	L	Pass
3*	3.966	20.68	9.82	56.00	35.32	QP	L	Pass
3**	3.966	11.93	9.82	46.00	34.07	AV	L	Pass
4	5.380	34.63	9.81	60.00	25.37	Peak	L	Pass
4*	5.380	23.98	9.81	60.00	36.02	QP	L	Pass
4**	5.380	17.77	9.81	50.00	32.23	AV	L	Pass
5	8.840	38.49	9.72	60.00	21.51	Peak	L	Pass
5*	8.840	28.91	9.72	60.00	31.09	QP	L	Pass
5**	8.840	22.36	9.72	50.00	27.64	AV	L	Pass
6	17.014	35.76	9.46	60.00	24.24	Peak	L	Pass
6*	17.014	27.52	9.46	60.00	32.48	QP	L	Pass
6**	17.014	19.39	9.46	50.00	30.61	AV	L	Pass


TEST REPORT

Report No.: SHE23060106-02DE

Date: 2023-12-08

Page 32 of 38

Figure 14: Conducted Emission on AC Mains, N Phase

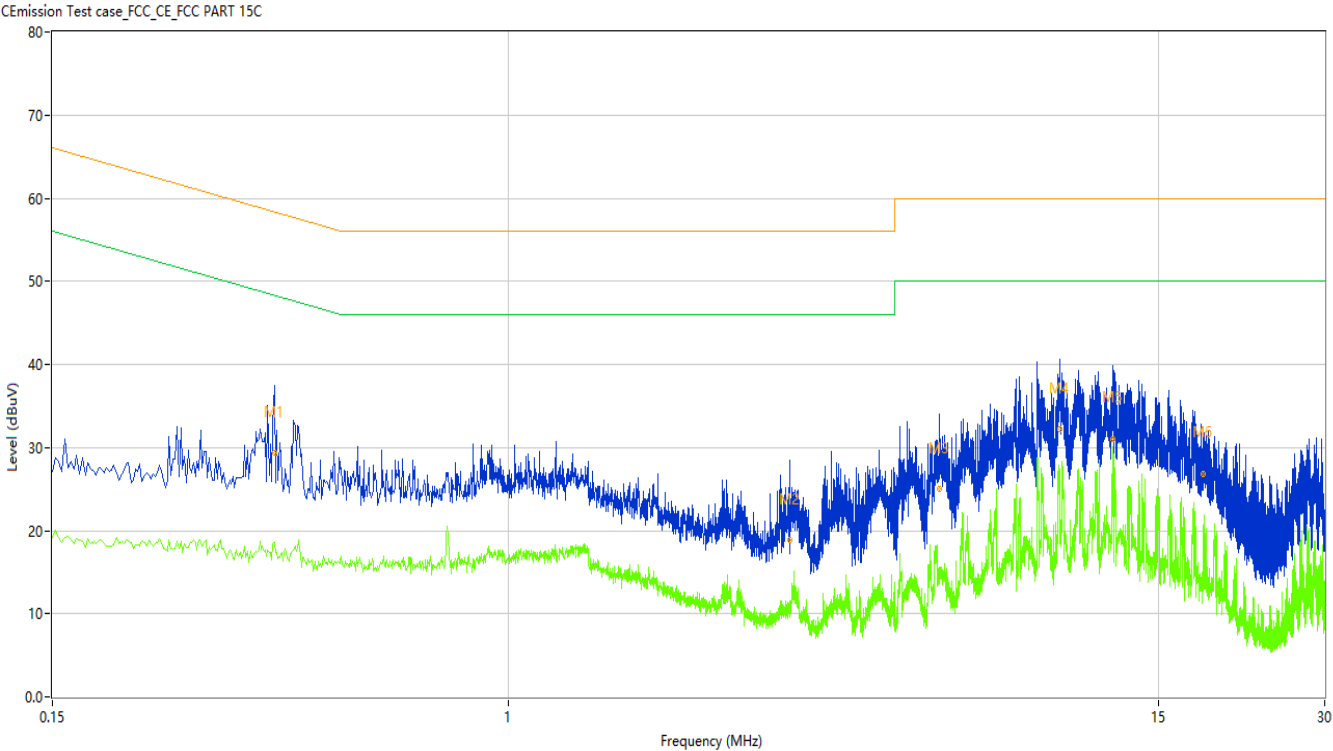

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.378	41.85	10.06	58.32	16.47	Peak	N	Pass
1*	0.378	29.41	10.06	58.32	28.91	QP	N	Pass
1**	0.378	18.65	10.06	48.32	29.67	AV	N	Pass
2	3.228	28.70	9.90	56.00	27.30	Peak	N	Pass
2*	3.228	18.82	9.90	56.00	37.18	QP	N	Pass
2**	3.228	11.17	9.90	46.00	34.83	AV	N	Pass
3	6.022	36.17	9.79	60.00	23.83	Peak	N	Pass
3*	6.022	24.99	9.79	60.00	35.01	QP	N	Pass
3**	6.022	14.54	9.79	50.00	35.46	AV	N	Pass
4	9.958	41.34	9.75	60.00	18.66	Peak	N	Pass
4*	9.958	32.18	9.75	60.00	27.82	QP	N	Pass
4**	9.958	27.41	9.75	50.00	22.59	AV	N	Pass
5	12.424	38.92	9.69	60.00	21.08	Peak	N	Pass
5*	12.424	30.96	9.69	60.00	29.04	QP	N	Pass
5**	12.424	28.76	9.69	50.00	21.24	AV	N	Pass
6	18.114	34.60	9.50	60.00	25.40	Peak	N	Pass
6*	18.114	26.84	9.50	60.00	33.16	QP	N	Pass
6**	18.114	20.19	9.50	50.00	29.81	AV	N	Pass

TEST REPORT


Report No.: SHE23060106-02DE

Date: 2023-12-08


Page 33 of 38

5 Appendixes

5.1 Photographs of the Sample

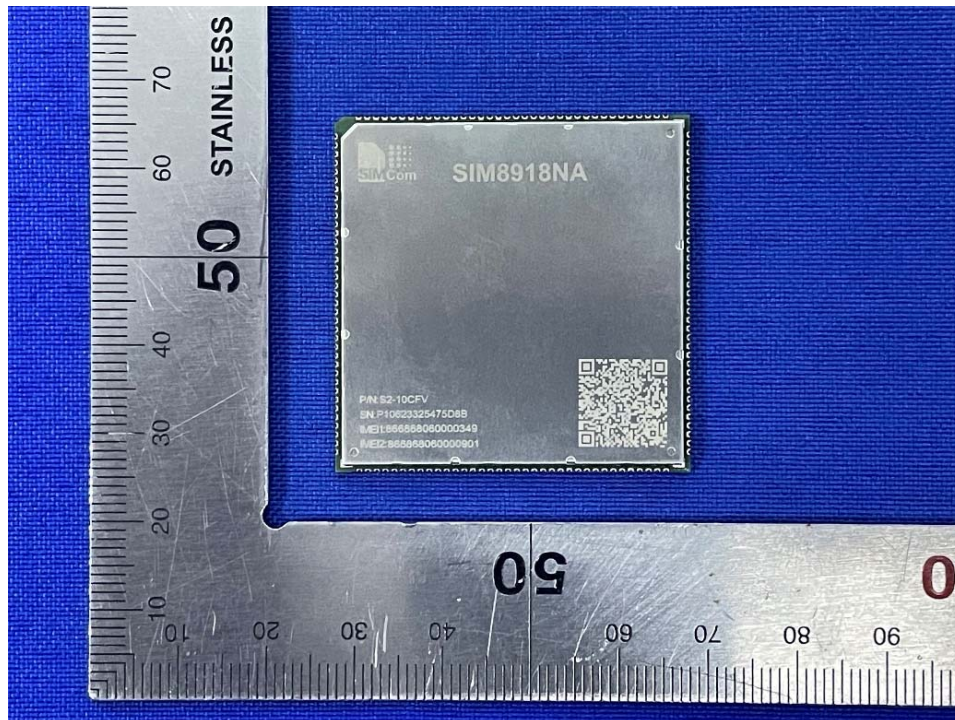

Front of the sample

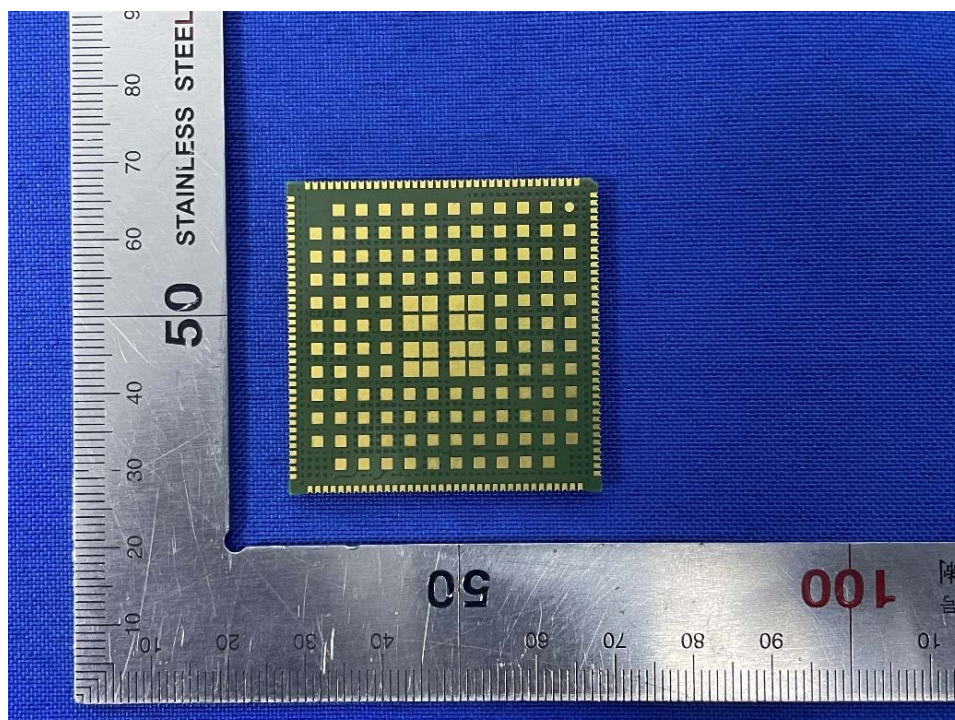

Rear of the sample

TEST REPORT


Report No.:

SHE23060106-02DE


Date:

2023-12-08

Page 34 of 38

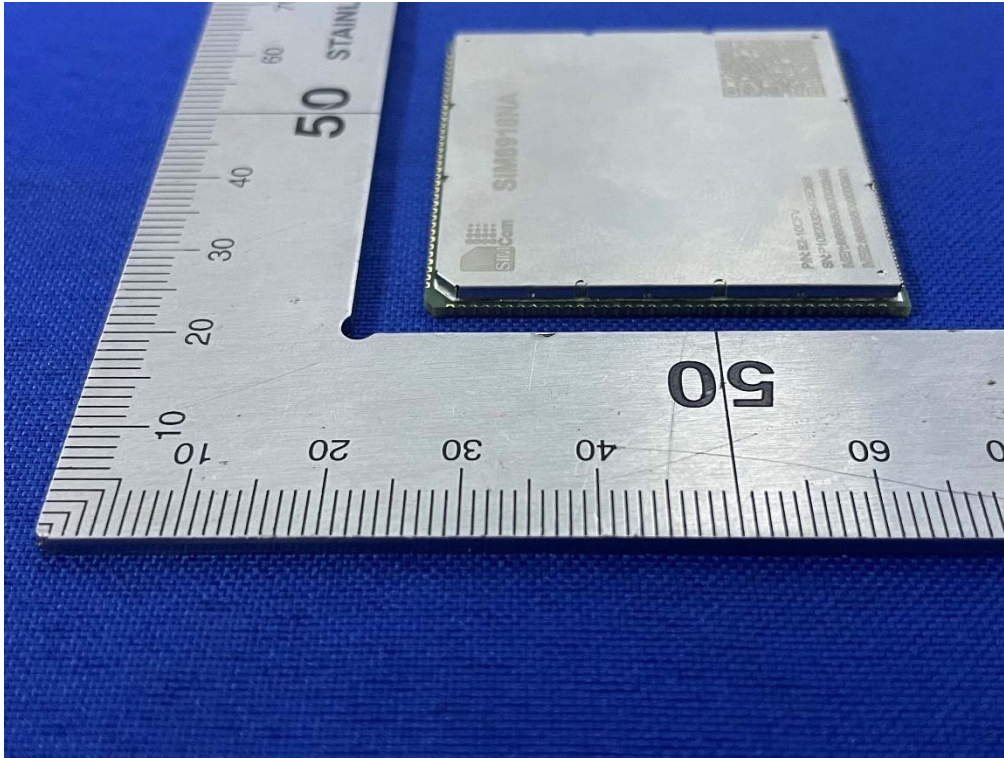


Left of the sample

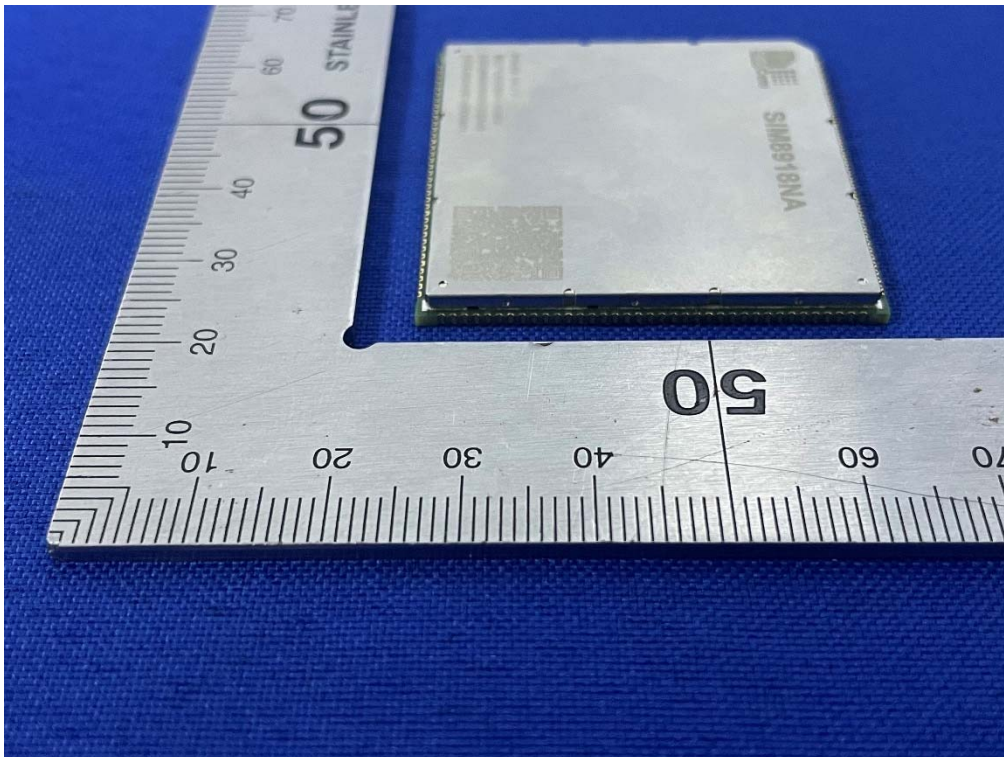


Right of the sample

TEST REPORT

Report No.: SHE23060106-02DE Date: 2023-12-08 Page 35 of 38

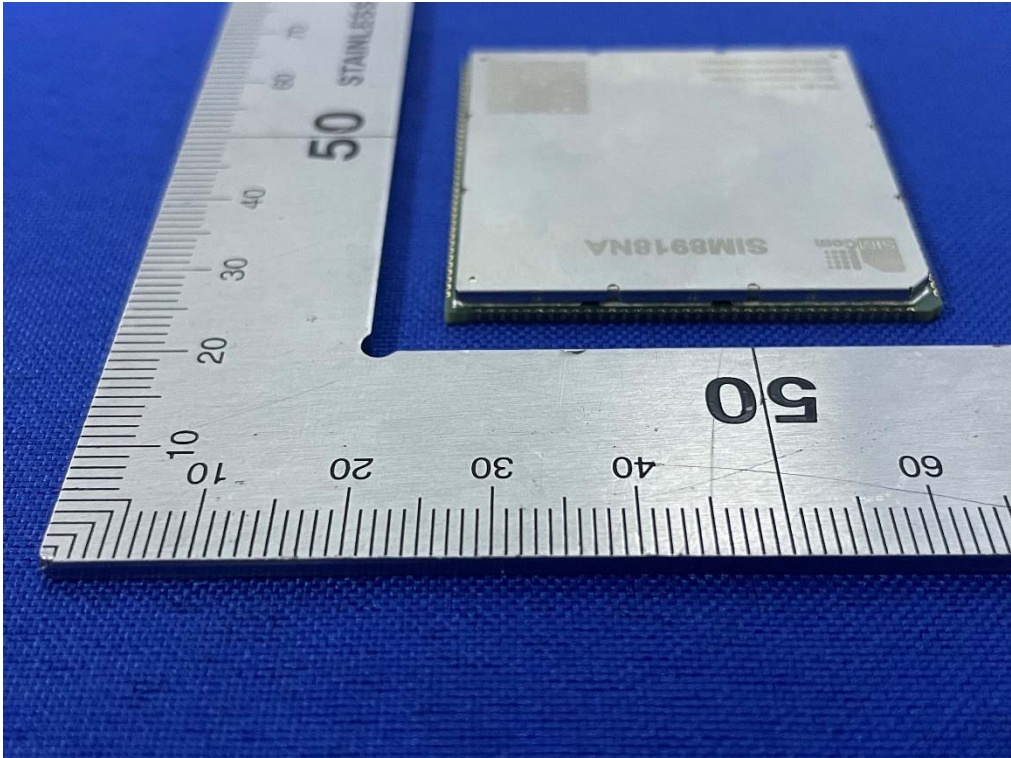


Top of the sample

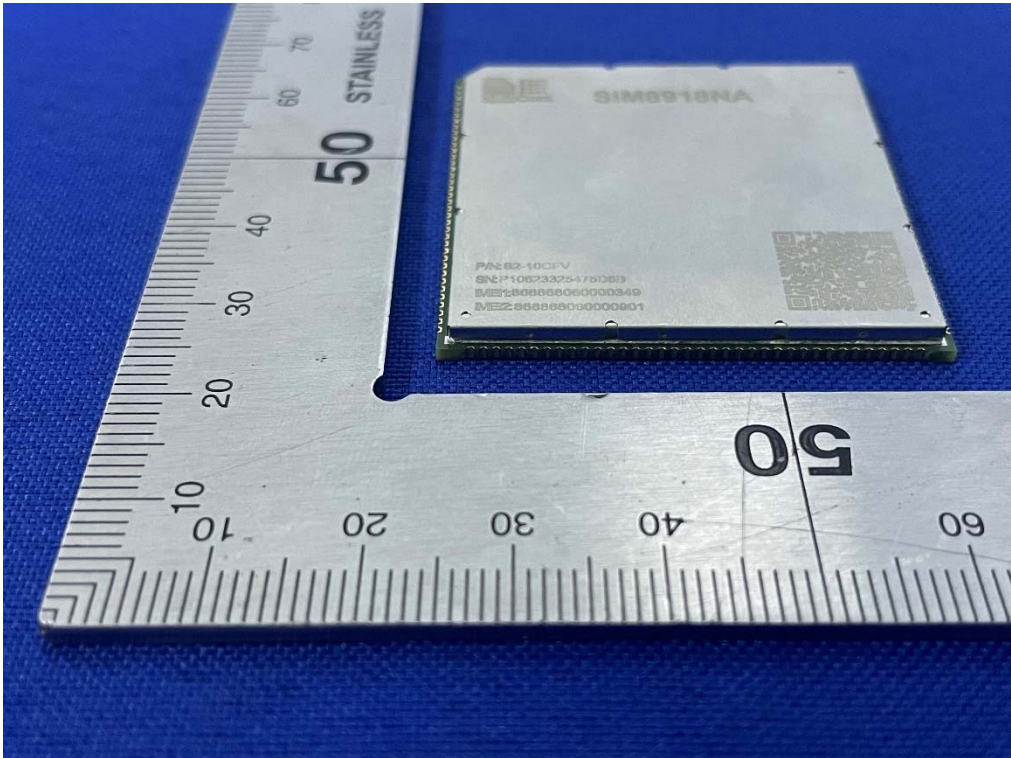


Bottom of the sample

TEST REPORT

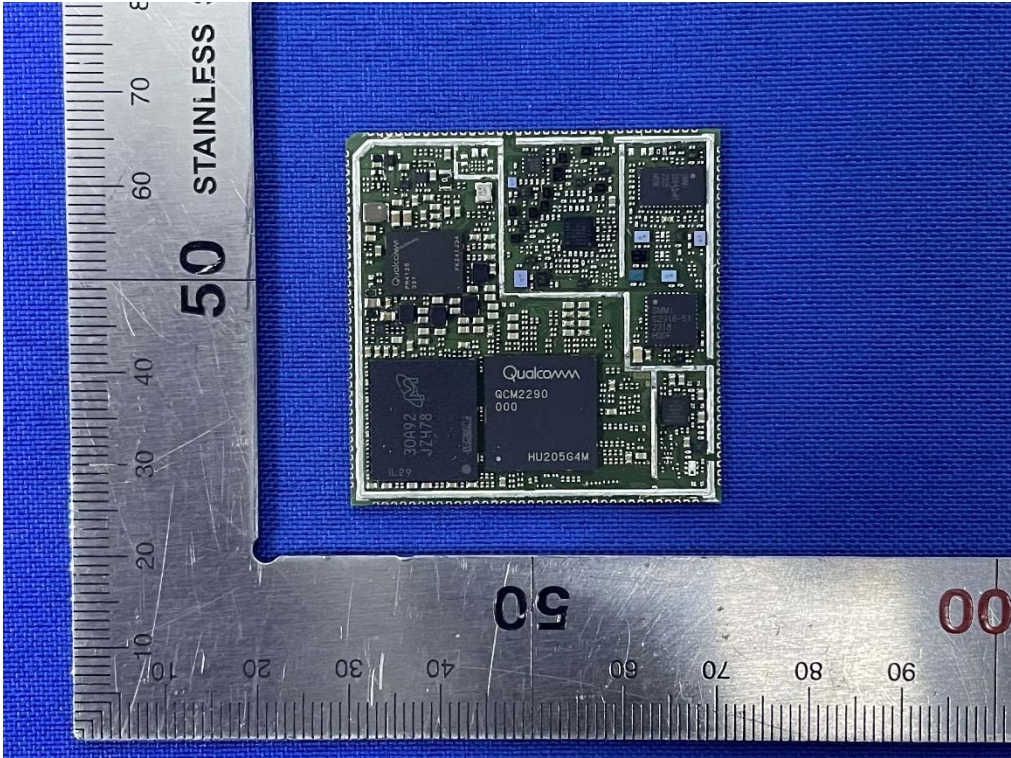

Internal-1 of the sample

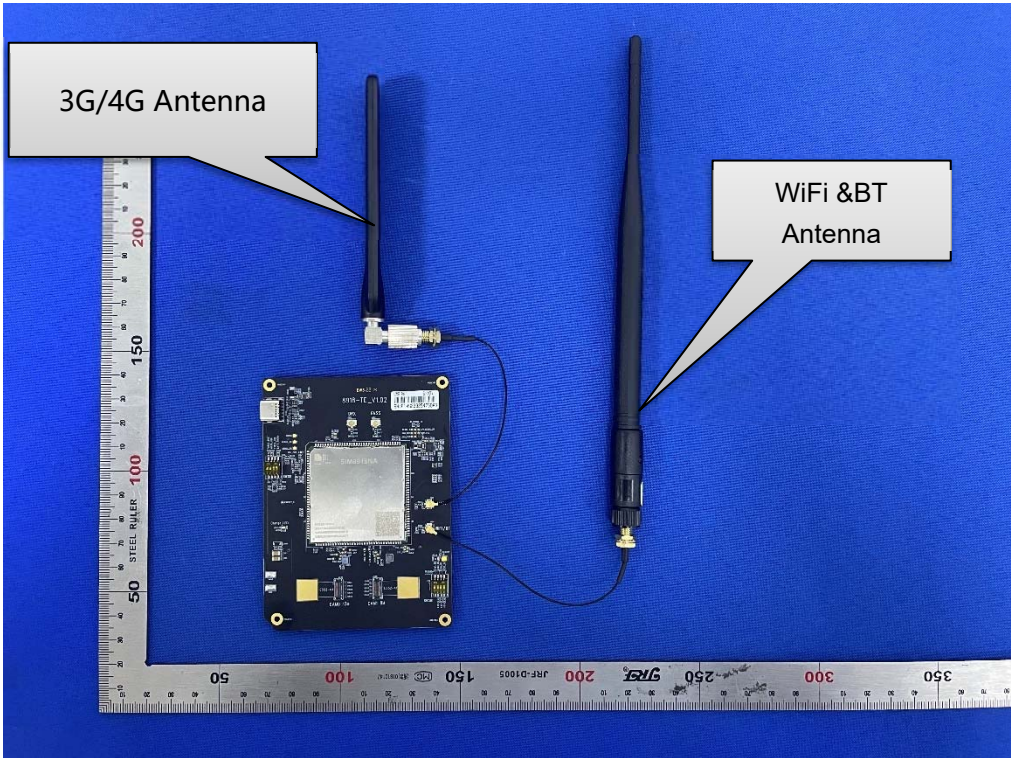

Antenna Photo


TEST REPORT

Report No.: SHE23060106-02DE


Date: 2023-12-08

Page 37 of 38

5.2 Set-up for Conducted Emissions

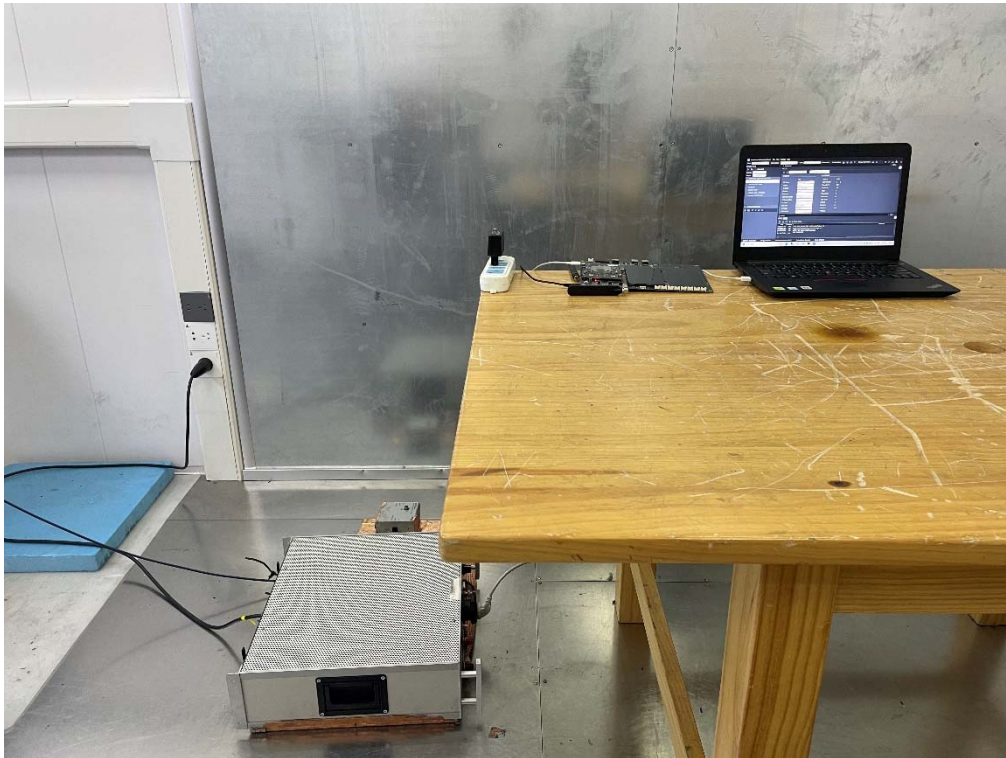

5.3 Set-up for Conducted RF test at Antenna Port

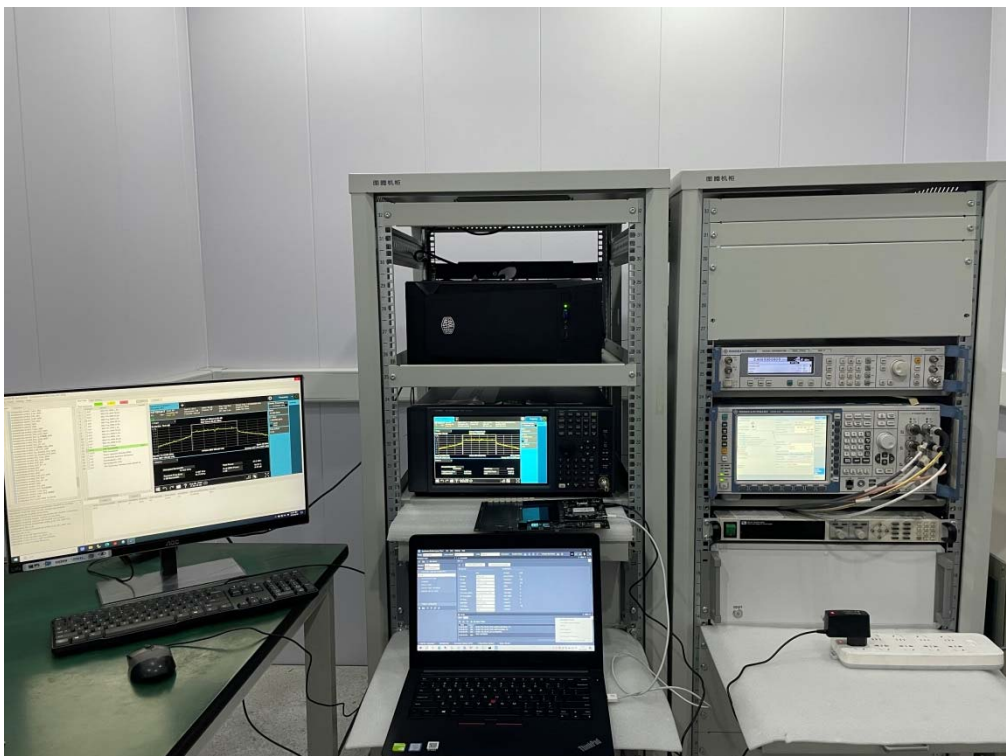


TEST REPORT

Report No.: SHE23060106-02DE


Date: 2023-12-08

Page 38 of 38

5.4 Set-up for Spurious Emissions below 1GHz

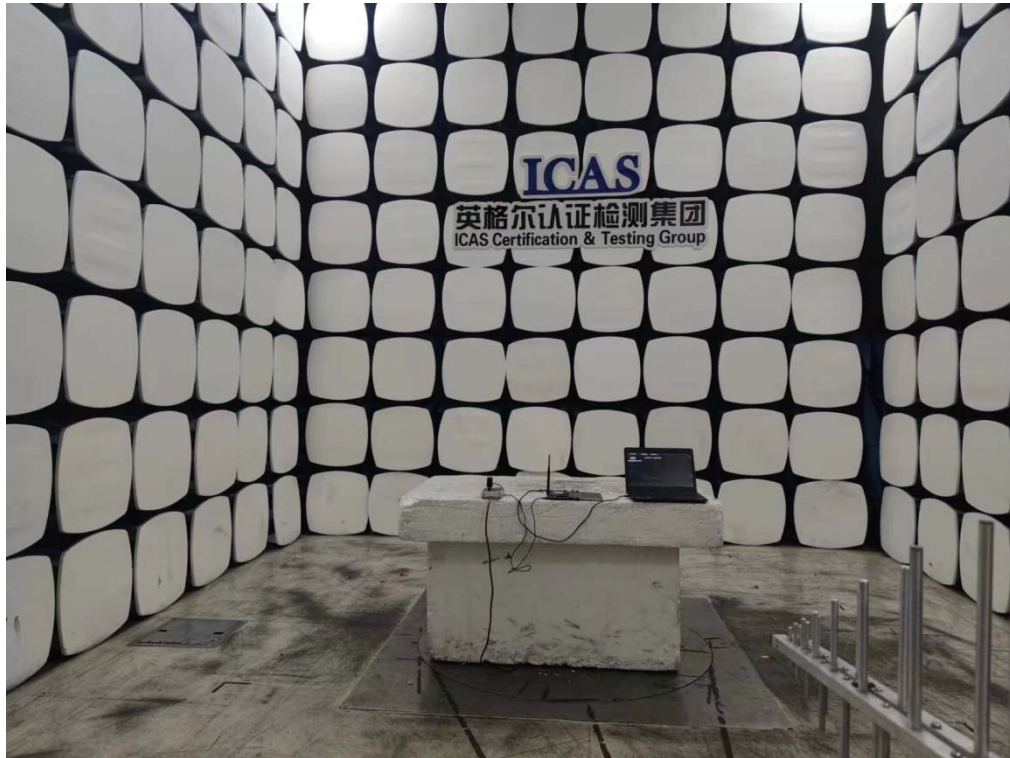

5.5 Set-up for Spurious Emissions above 1GHz

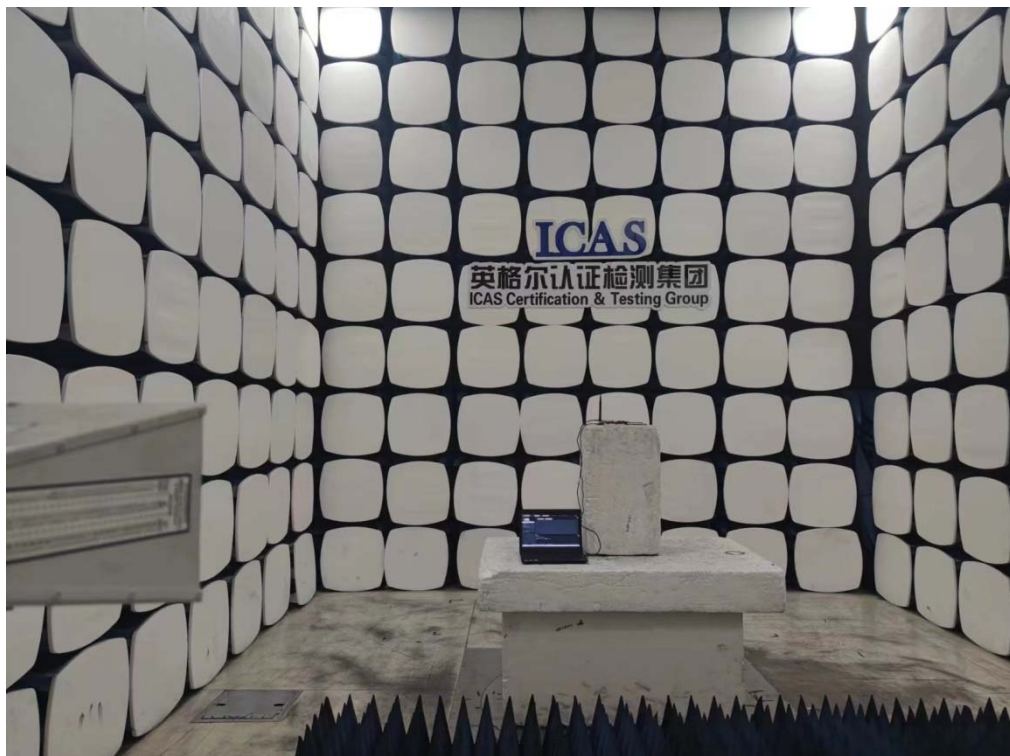

End of the report