

**FCC 47 CFR PART 15 SUBPART C
INDUSTRY CANADA RSS-247 ISSUE 2 February 2017**

For

Smart Camera

MODEL No.:CAMERA-S15F

FCC ID: 2AJZ4-S15F

IC: 23777-S15F

Trade Mark: N/A

REPORT NO:ES180412010W-1

ISSUE DATE: January 16, 2019

Prepared for

**Hangzhou Konke Information Technology Co., Ltd.
28F Huafeng international mansion, No.200 Xinye Road Jianggan
District, Hangzhou, China**

Prepared by

**EMTEK(SHENZHEN) CO., LTD.
Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China
TEL: 86-755-26954280
FAX: 86-755-26954282**

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION	4
2	EUT TECHNICAL DESCRIPTION	5
3	SUMMARY OF TEST RESULT	6
4	TEST METHODOLOGY	7
4.1	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
4.2	MEASUREMENT EQUIPMENT USED	7
4.3	DESCRIPTION OF TEST MODES	8
5	FACILITIES AND ACCREDITATIONS	9
5.1	FACILITIES	9
5.2	LABORATORY ACCREDITATIONS AND LISTINGS	9
6	TEST SYSTEM UNCERTAINTY	10
7	SETUP OF EQUIPMENT UNDER TEST	11
7.1	RADIO FREQUENCY TEST SETUP 1	11
7.2	RADIO FREQUENCY TEST SETUP 2	11
7.3	CONDUCTED EMISSION TEST SETUP	12
7.4	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM	13
7.5	SUPPORT EQUIPMENT	13
8	TEST REQUIREMENTS	14
8.1	DTS(6DB)BANDWIDTH	14
8.2	99% OCCUPIED BANDWIDTH	21
8.3	MAXIMUM PEAK CONDUCTED OUTPUT POWER	29
8.4	MAXIMUM POWER SPECTRAL DENSITY	31
8.5	UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS	38
8.6	RADIATED SPURIOUS EMISSION	43
8.7	CONDUCTED EMISSIONS TEST	67
8.8	ANTENNA APPLICATION	70

Modified History

Rev.	Summary	Date of Rev.	Report No.
V1.0	Original Report	/	ES180412010W01 ES180412010W02
V1.1	Change the applicant Change the product name , model number, trademark Update standard	2019-01-16	ES180412010W-1

1 TEST RESULT CERTIFICATION

Applicant: Hangzhou Konke Information Technology Co., Ltd.
28F Huafeng international mansion, No.200 Xinye Road Jianggan District, Hangzhou, China

Manufacturer: Hangzhou Konke Information Technology Co., Ltd.
28F Huafeng international mansion, No.200 Xinye Road Jianggan District, Hangzhou, China

EUT Description: Smart Camera

Model Number: CAMERA-S15F

Trade Mark: N/A

File Number: ES180412010W-1

Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2 2018, Subpart J FCC 47 CFR Part 15 2018, Subpart C IC RSS-GEN, Issue 5 April. 2018 IC RSS-247 Issue 2, Feb. 2017	PASS

The above equipment was tested by EMTEK(SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2, Part 15.247, IC RSS-247, Issue 2 and IC RSS-GEN, Issue 5

The test results of this report relate only to the tested sample identified in this report

Date of Test : April 12, 2018 to May 17, 2018

Prepared by : Yaping Shen
YapingShen /Tester

Reviewer : Joe Xia
Joe Xia/ Supervisor

Approve & Authorized Signer : Lisa Wang
Lisa Wang/Manager



2 EUT TECHNICAL DESCRIPTION

Characteristics	Description
IEEE 802.11 WLAN Mode Supported	☒ 802.11b ☒ 802.11g ☒ 802.11n(20MHz channel bandwidth) ☒ 802.11n(40MHz channel bandwidth)
Data Rate	WIFI: 802.11 b:1,2,5.5,11Mbps; 802.11 g:6,9,12,18,24,36,48,54Mbps; 802.11n(HT20):MCS0-MCS7; 802.11n(HT40): MCS0-MCS7;
Modulation	WIFI: DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
Operating Frequency Range	WIFI: 2412-2462MHz for 802.11b/g/n(HT20); 2422-2452MHz for 802.11n(HT40);
Number of Channels	WIFI: 11 channels for 802.11b/g n(HT20); 7 channels for 802.11n(HT40)
Transmit Power Max	WIFI: 14.50dBm for 802.11b; 17.49dBm for 802.11g; 17.65dBm for 802.11/n(HT20); 17.26dBm for 802.11/n(HT40);
Antenna Type	Metal antenna
Antenna Gain	2.6 dBi
Power supply	☒ DC 5V from Adapter
Adapter information	Model: S005BPV0500100 Input: 100-240V~ 50/60Hz 150mA Output: DC 5V 1000mA
Temperature Range	-10 °C ~50 °C

3 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.247(a)(2)	DTS (6dB) Bandwidth	PASS	
15.247(b)(3)	Maximum Peak Conducted Output Power	PASS	
15.247(e)	Maximum Power Spectral Density Level	PASS	
15.247(d)	Unwanted Emission Into Non-Restricted Frequency Bands	PASS	
15.247(d) 15.209	Unwanted Emission Into Restricted Frequency Bands (conducted)	PASS	
15.247(d) 15.209	Radiated Spurious Emission	PASS	
15.207	Conducted Emission Test	PASS	
15.247(b)	Antenna Application	PASS	
	NOTE1: N/A (Not Applicable) NOTE2: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.		

IC Part Clause	Test Parameter	Verdict	Remark
RSS-247.5.2(a)	DTS (6dB) Bandwidth	PASS	
RSS-Gen.6.6	99% Occupied Bandwidth	PASS	
RSS-247.5.4(d)	Maximum Peak Conducted Output Power	PASS	
RSS-247.5.4(d)	Equivalent Isotropically Radiated Power	PASS	
RSS-247.5.2(b)	Maximum Power Spectral Density Level	PASS	
RSS-247.5.5	Unwanted Spurious Emissions	PASS	
RSS-Gen.6.13	Radiated Emissions	PASS	
RSS-Gen 8.8	Conducted Emission	PASS	
RSS-Gen.6.7 RSS-247.5.4	Antenna Application	PASS	
	NOTE1: N/A (Not Applicable) NOTE2: According to OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.		

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2AJZ4-S15F filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

This submittal(s) (test report) is intended for IC: 23777-S15F filing to comply with IC RSS-247 Issue 2 and IC RSS-GEN, Issue 5

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

FCC KDB 558074 D01 DTS Meas Guidance v05

IC RSS-Gen , ISSUE 5 April 2018

IC RSS-247 , ISSUE 2 February 2017

4.2 MEASUREMENT EQUIPMENT USED

4.2.1 Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LASTCAL.	DUE CAL.
Test Receiver	Rohde & Schwarz	ESCI	26115-010-0027	May 20, 2017	May 19, 2018
L.I.S.N.	Rohde & Schwarz	ENV216	101161	May 20, 2017	May 19, 2018
50ΩCoaxial Switch	Anritsu	MP59B	6100175589	May 21, 2017	May 20, 2018

4.2.2 Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	May 21, 2017	May 20, 2018
Pre-Amplifier	HP	8447F	2944A07999	May 20, 2017	May 19, 2018
Bilog Antenna	Schwarzbeck	VULB9163	142	May 20, 2017	May 19, 2018
Loop Antenna	ARA	PLA-1030/B	1029	May 20, 2017	May 19, 2018
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	May 21, 2017	May 20, 2018
Horn Antenna	Schwarzbeck	BBHA 9120	D143	May 20, 2017	May 19, 2018
Cable	Schwarzbeck	AK9513	ACRX1	May 21, 2017	May 20, 2018
Cable	Rosenberger	N/A	FP2RX2	May 21, 2017	May 20, 2018
Cable	Schwarzbeck	AK9513	CRPX1	May 21, 2017	May 20, 2018
Cable	Schwarzbeck	AK9513	CRRX2	May 21, 2017	May 20, 2018

4.2.3 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LASTCAL.	DUE CAL.
Spectrum Analyzer	Agilent	E4407B	88156318	May 21, 2017	May 20, 2018
Signal Analyzer	Agilent	N9010A	My53470879	May 21, 2017	May 20, 2018
Power meter	Anritsu	ML2495A	0824006	May 21, 2017	May 20, 2018
Power sensor	Anritsu	MA2411B	0738172	May 21, 2017	May 20, 2018

Remark: Each piece of equipment is scheduled for calibration once a year.

4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b:1 Mbps;802.11g: 6 Mbps;802.11n(HT20): MCS0; 802.11(HT40): MCS0) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

☒ Frequency and Channel list for 802.11 b/g/n(HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

☒ Frequency and Channel list for 802.11 n (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	8	2447
4	2427	6	2437	9	2452
		7	2442		

☒ Test Frequency and Channel for 802.11 b/g/n (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462

☒ Test Frequency and channel for 802.11 n (HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452

5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

- EMC Lab.
- : Accredited by CNAS, 2016.10.24
The certificate is valid until 2022.10.28
The Laboratory has been assessed and proved to be in compliance with CNAS-CL01: 2006(identical to ISO/IEC17025: 2005)
The Certificate Registration Number is L229
 - : Accredited by TUV Rheinland Shenzhen, 2016.5.19
The Laboratory has been assessed according to the requirements ISO/IEC 17025.
 - : Accredited by FCC, August 03, 2017
Designation Number: CN1204
Test Firm Registration Number: 882943
 - : Accredited by Industry Canada, November 24, 2015
The Certificate Registration Number is 4480A.

6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^{\circ}\text{C}$
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%

7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP 1

The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.


30MHz-1GHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


Above 1GHz:

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

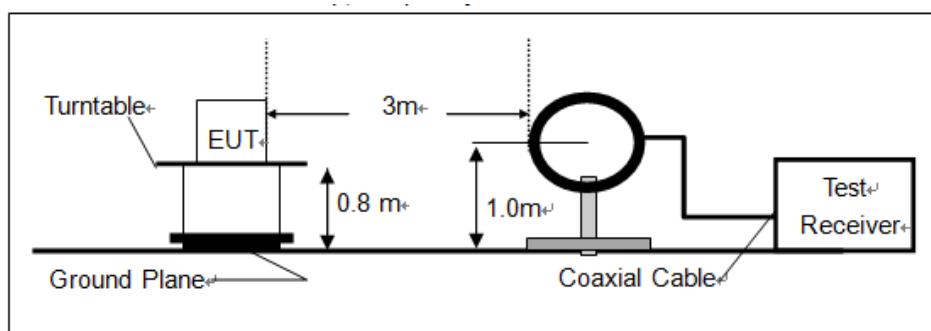

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

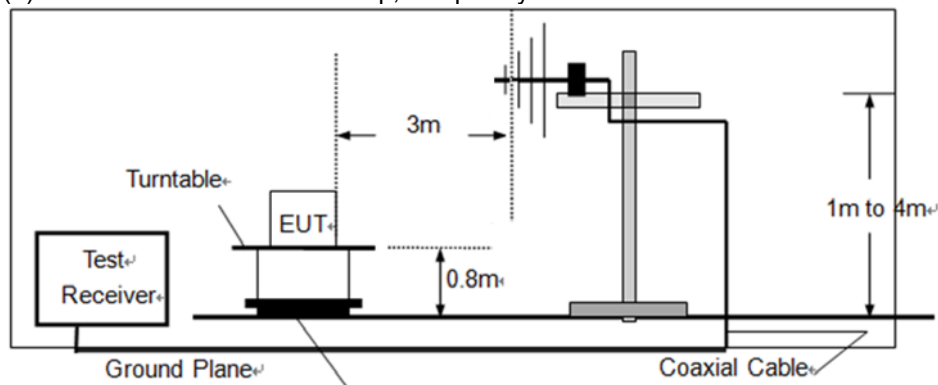

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

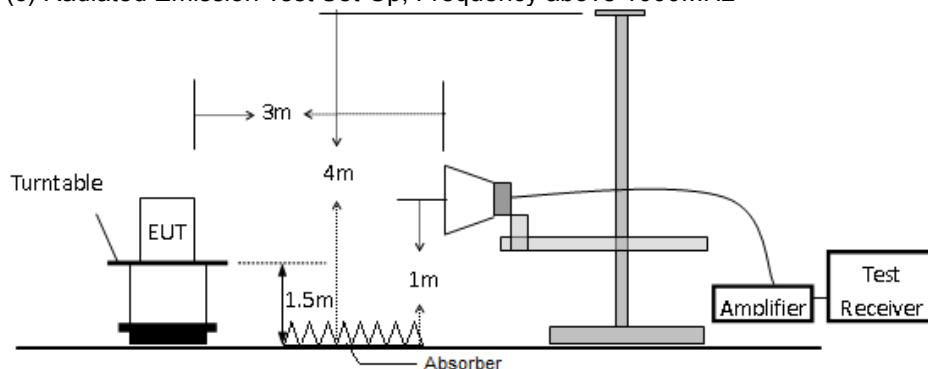


7.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

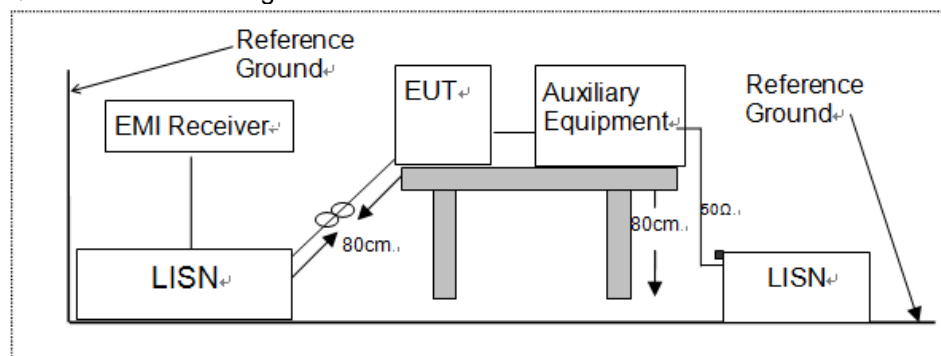

7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

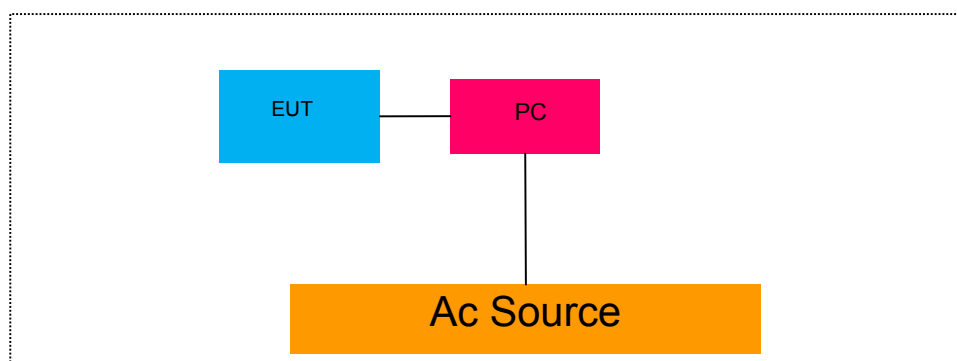

7.5 SUPPORT EQUIPMENT

Item	Equipment	Mfr/Brand	Model/Type No.	Note
1.	iPhone	Apple	A1526	N/A
2.	Mobile phone	Oneplus 3T	ONEPLUS A3010	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

8 TEST REQUIREMENTS

8.1 DTS(6DB)BANDWIDTH

8.1.1 Applicable Standard

According to FCC Part15.247(a)(2) and KDB558074 DTS 01 Meas. Guidance v05
According to IC RSS-247.5.2(a)

8.1.2 Conformance Limit

The minimum -6 dB bandwidth shall be at least 500 kHz.

8.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.1.4 Test Procedure

The EUT was operating in IEEE 802.11b/g/n mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 100 kHz.

Set the video bandwidth (VBW) =300kHz.

Set Span=2 times OBW

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measure and record the results in the test report.


8.1.5 Test Results

Temperature :	26°C	Test Date :	April 18, 2018
Humidity :	60 %	Test By:	King Kong

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Bandwidth (MHz)	Limit (kHz)	Verdict
802.11b	1	2412	9.074	>500	PASS
	6	2437	9.048	>500	PASS
	11	2462	9.045	>500	PASS
802.11g	1	2412	16.55	>500	PASS
	6	2437	16.51	>500	PASS
	11	2462	16.56	>500	PASS
802.11n (HT20)	1	2412	17.75	>500	PASS
	6	2437	17.75	>500	PASS
	11	2462	17.67	>500	PASS
802.11n (HT40)	3	2422	36.46	>500	PASS
	6	2437	36.43	>500	PASS
	9	2452	36.42	>500	PASS


Test Model

DTS (6dB) Bandwidth
802.11b
Channel 1: 2412MHz

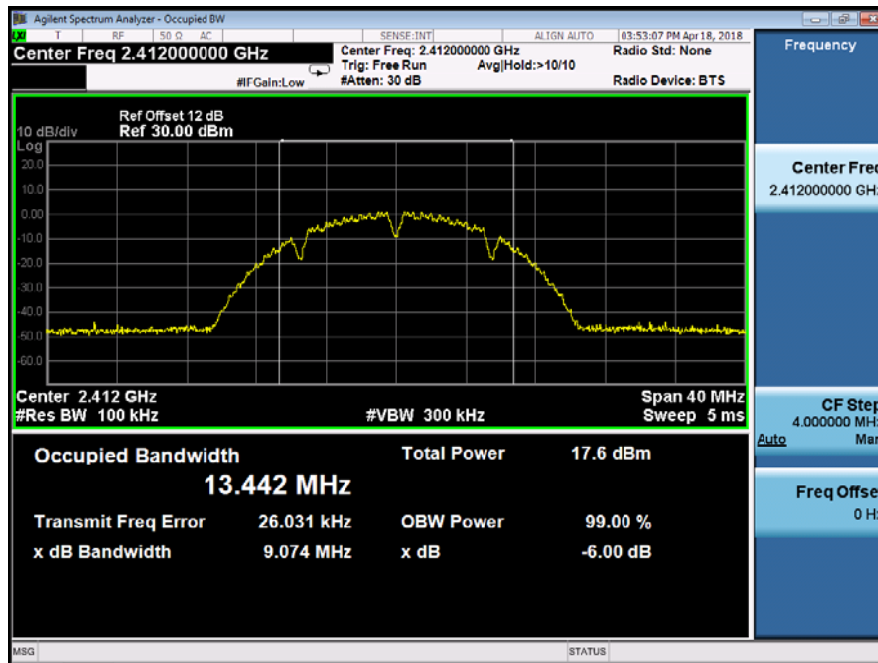


Test Model

DTS (6dB) Bandwidth
802.11b
Channel 6: 2437MHz

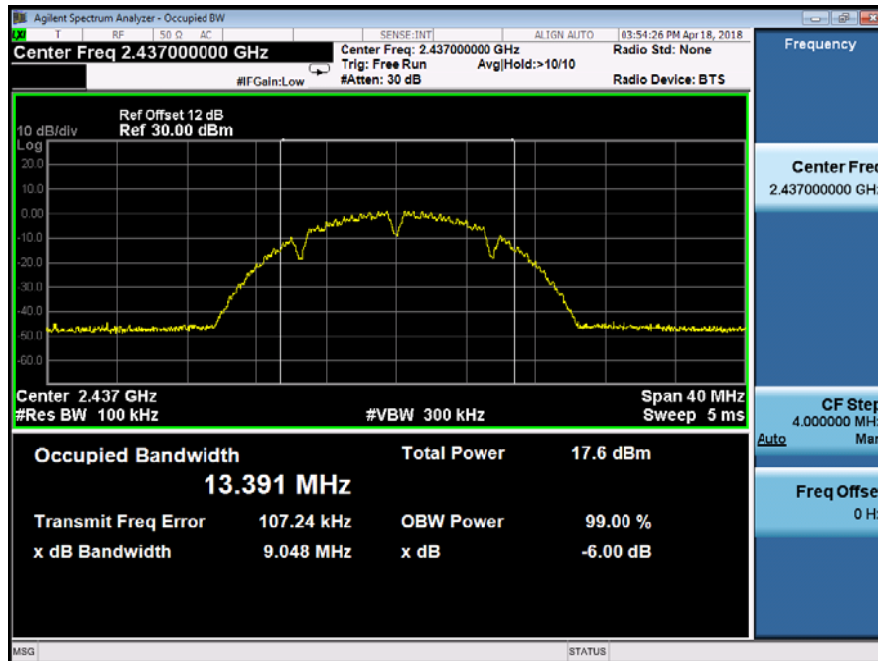


Test Model

DTS (6dB) Bandwidth
802.11b
Channel 11: 2462MHz

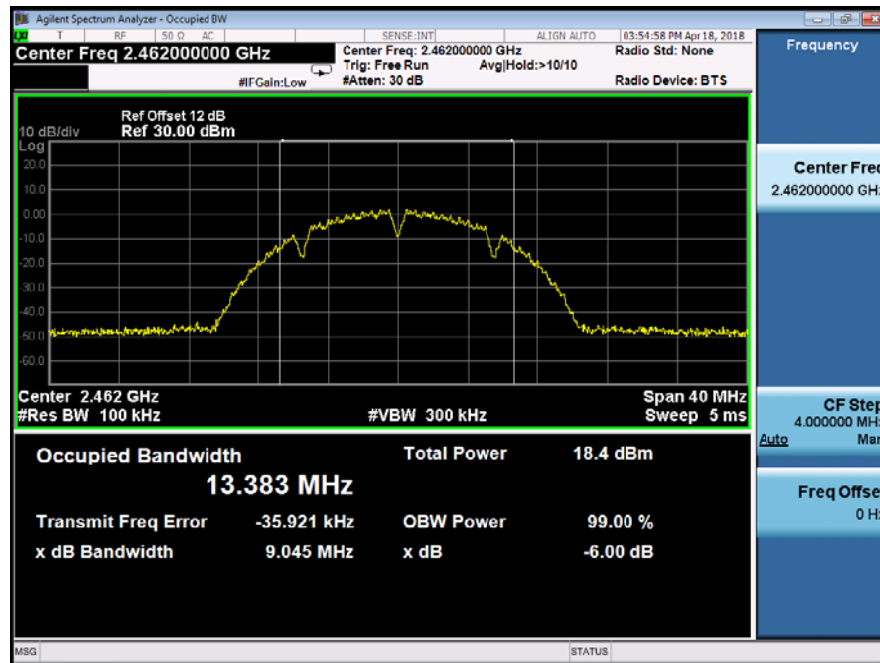


Test Model

DTS (6dB) Bandwidth
802.11g
Channel 1: 2412MHz

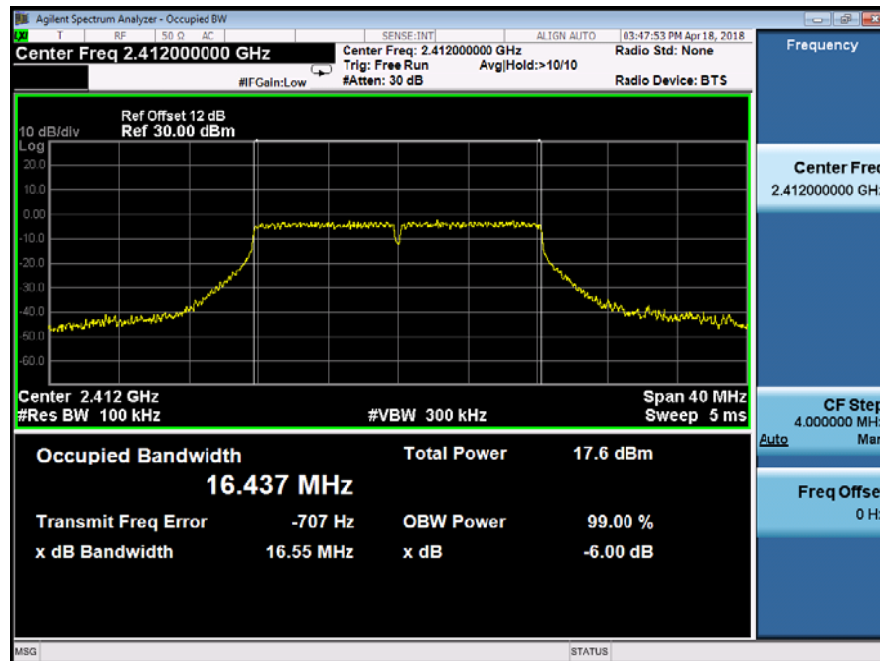


Test Model

DTS (6dB) Bandwidth
802.11g
Channel 6: 2437MHz

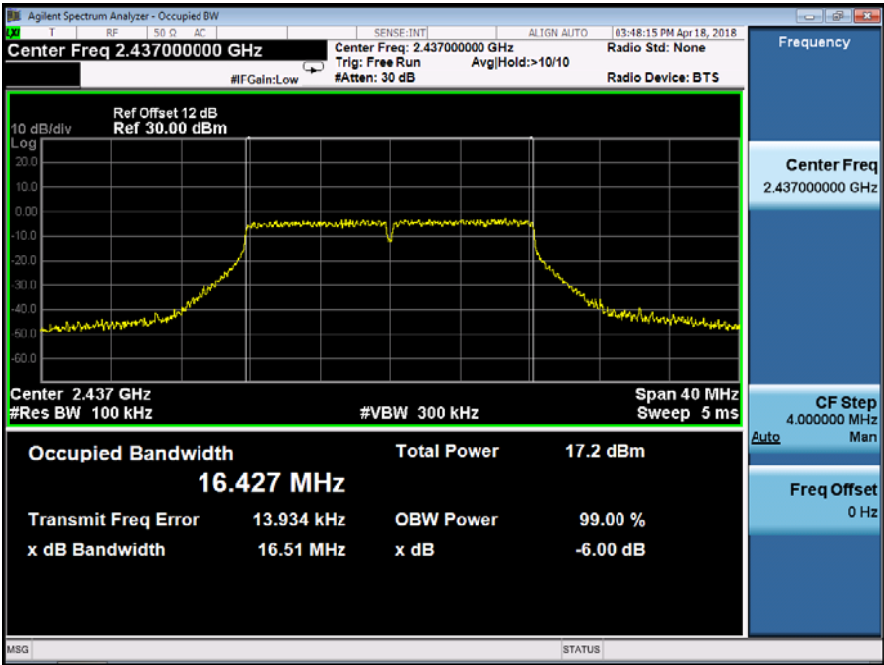


Test Model

DTS (6dB) Bandwidth
802.11g
Channel 11: 2462MHz

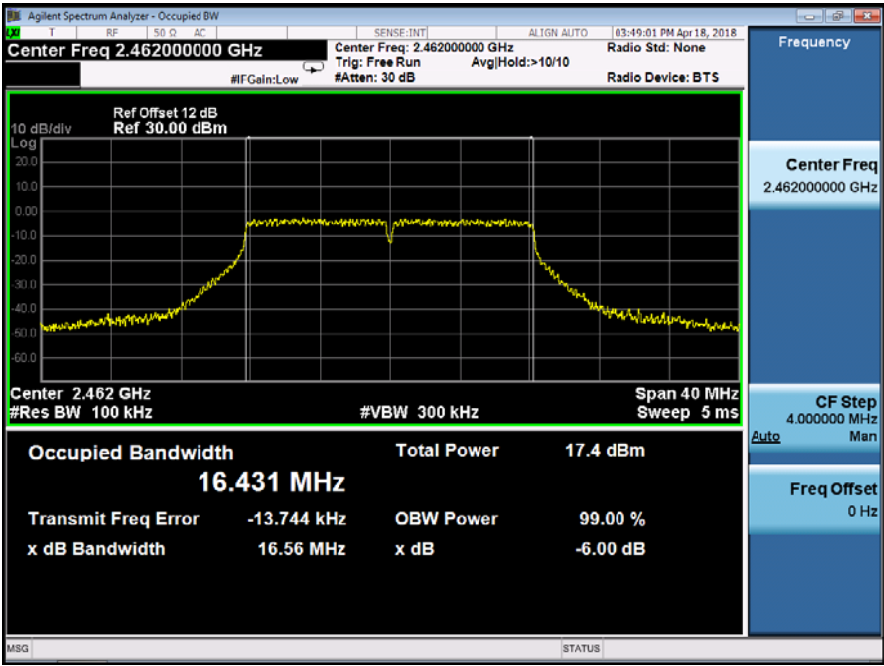


Test Model

DTS (6dB) Bandwidth
802.11n (HT20)
Channel 1: 2412MHz

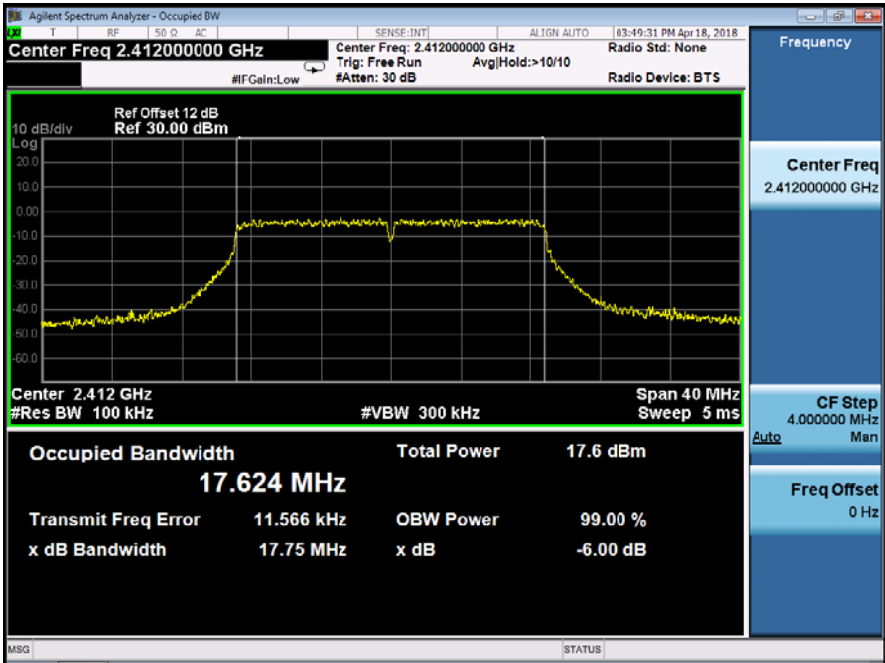


Test Model

DTS (6dB) Bandwidth
802.11n (HT20)
Channel 6: 2437MHz

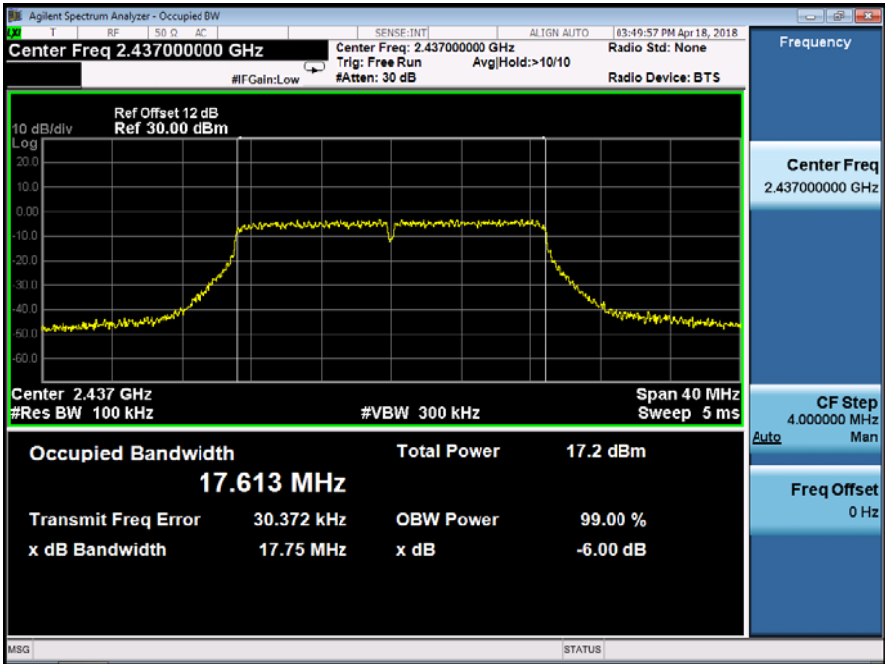


Test Model

DTS (6dB) Bandwidth
802.11n (HT20)
Channel 11: 2462MHz

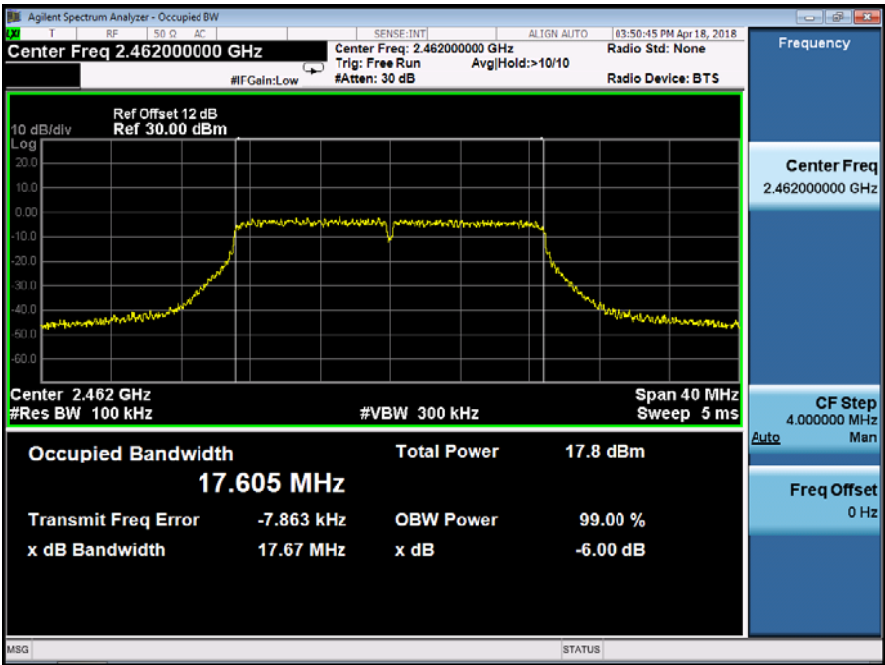


Test Model

DTS (6dB) Bandwidth
802.11n (HT40)
Channel 3: 2422MHz

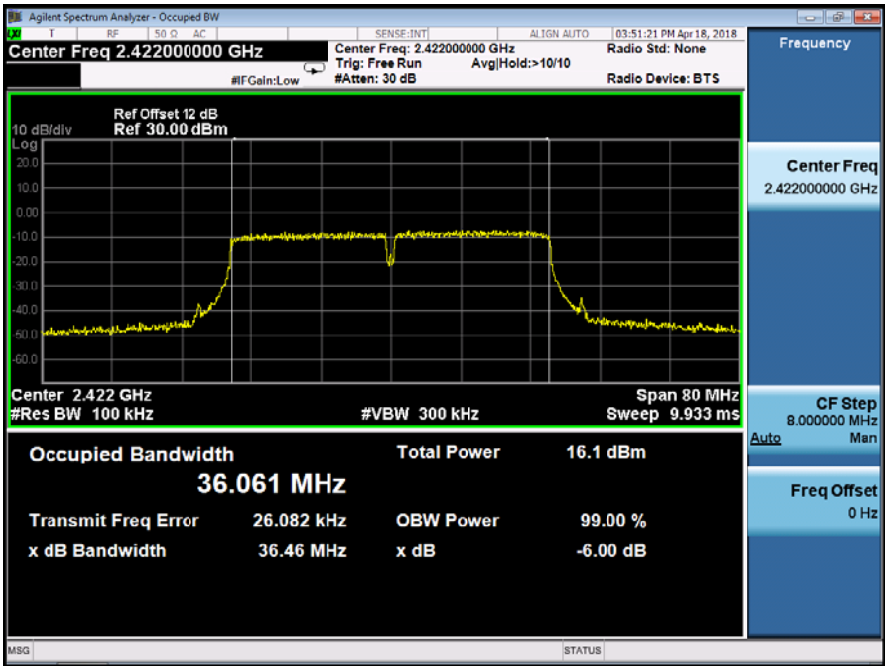


Test Model

DTS (6dB) Bandwidth
802.11n (HT40)
Channel 6: 2437MHz

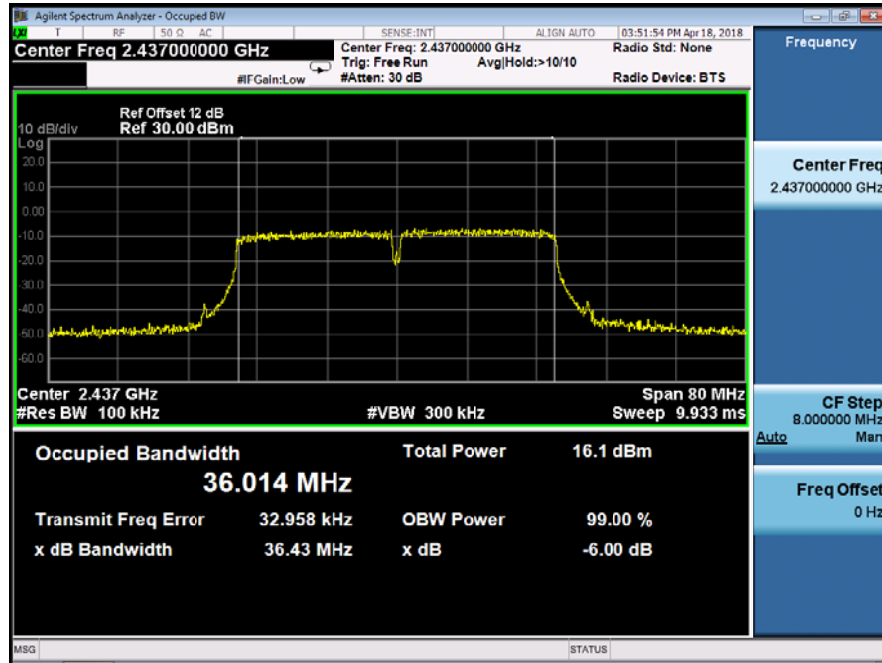

Test Model

DTS (6dB) Bandwidth
802.11n (HT40)
Channel 9: 2452MHz

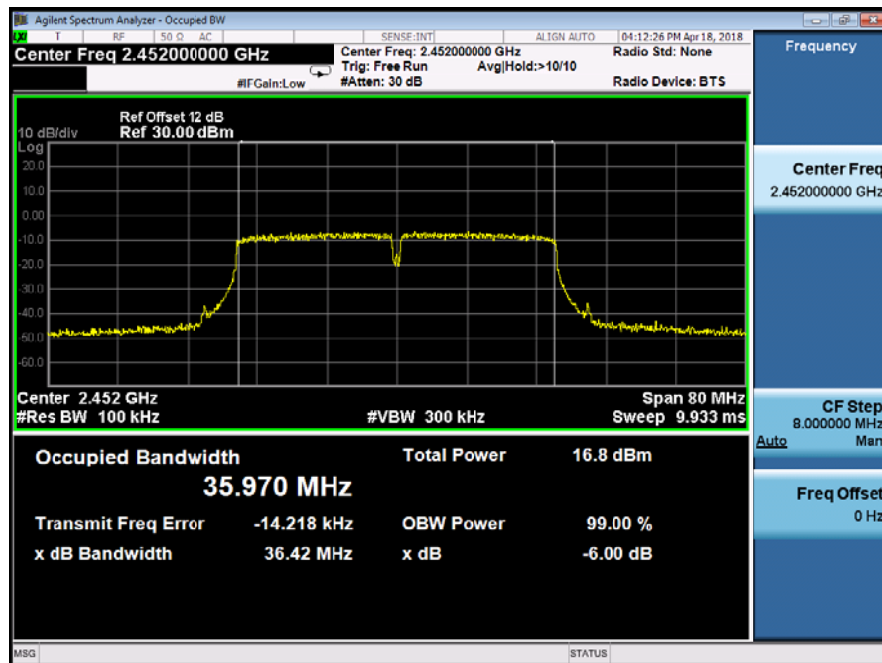

8.2 99% OCCUPIED BANDWIDTH

8.2.1 Applicable Standard

According to IC RSS-Gen 6.6

8.2.2 Conformance Limit

No limit requirement.

8.2.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.2.4 Test Procedure

The EUT was operating in Bluetooth transmitter mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 1-5% of 99% occupied bandwidth.

Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.

Set Span= approximately 2 to 3 times the 20 dB bandwidth

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the markerdelta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

Measure and record the results in the test report.

8.2.5 Test Results


Temperature :	28°C	Test Date:	April 18, 2018
Humidity :	65 %	Test By:	King Kong

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Bandwidth (MHz)	Verdict
☒802.11b	1	2412	13.410	PASS
	6	2437	13.360	PASS
	11	2462	13.351	PASS
☒802.11g	1	2412	16.715	PASS
	6	2437	16.697	PASS
	11	2462	16.669	PASS
☒802.11n (HT20)	1	2412	17.773	PASS
	6	2437	17.738	PASS
	11	2462	17.756	PASS
☒802.11n (HT40)	3	2422	36.050	PASS
	6	2437	36.021	PASS
	9	2452	35.977	PASS

Test Model 99% Occupied Bandwidth
802.11b
Channel 1: 2412MHz




Test Model 99% Occupied Bandwidth
802.11b
Channel 6: 2437MHz

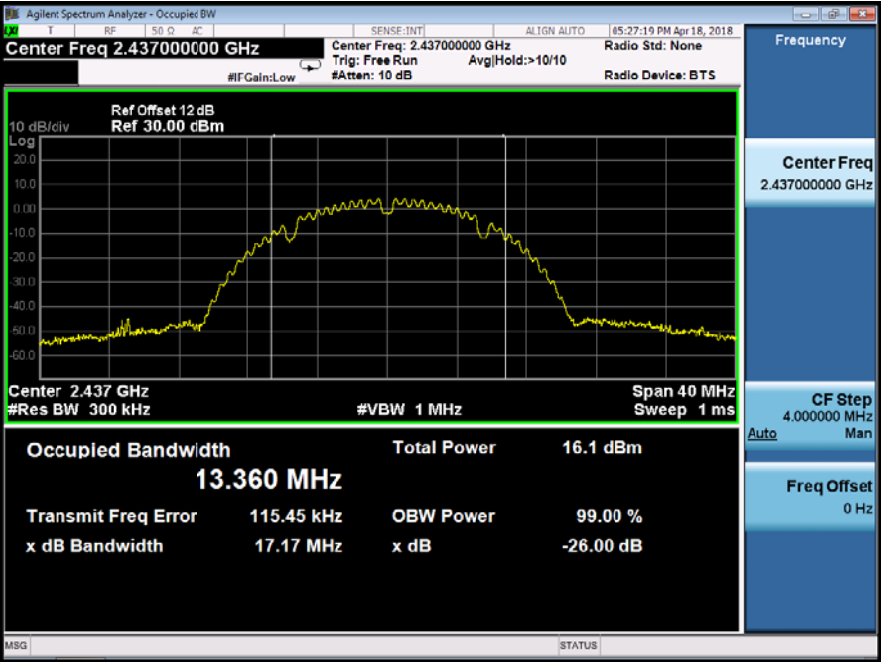


Test Model


99% Occupied Bandwidth
802.11b
Channel 11: 2462MHz

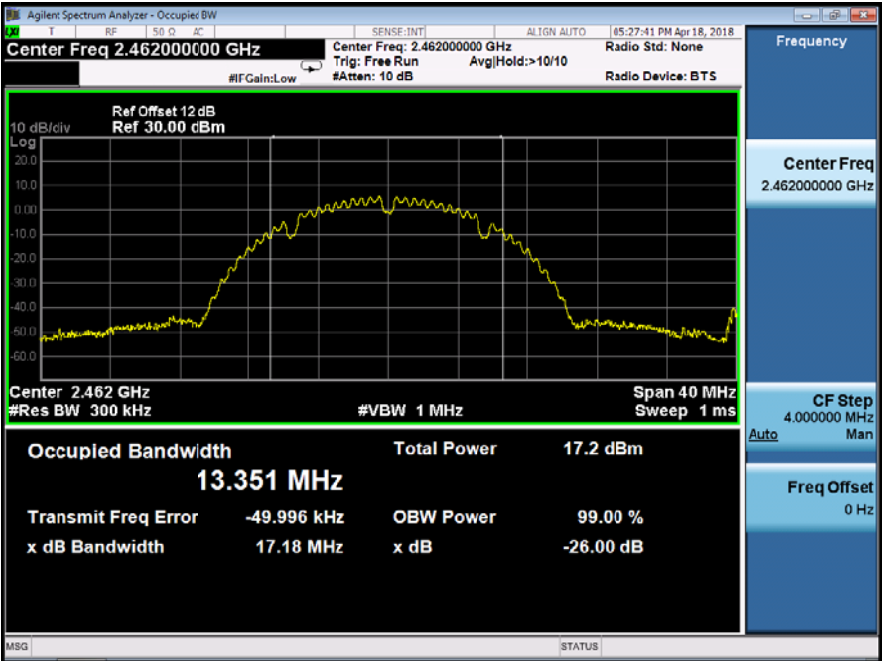


Test Model 99% Occupied Bandwidth
802.11g
Channel 1: 2412MHz

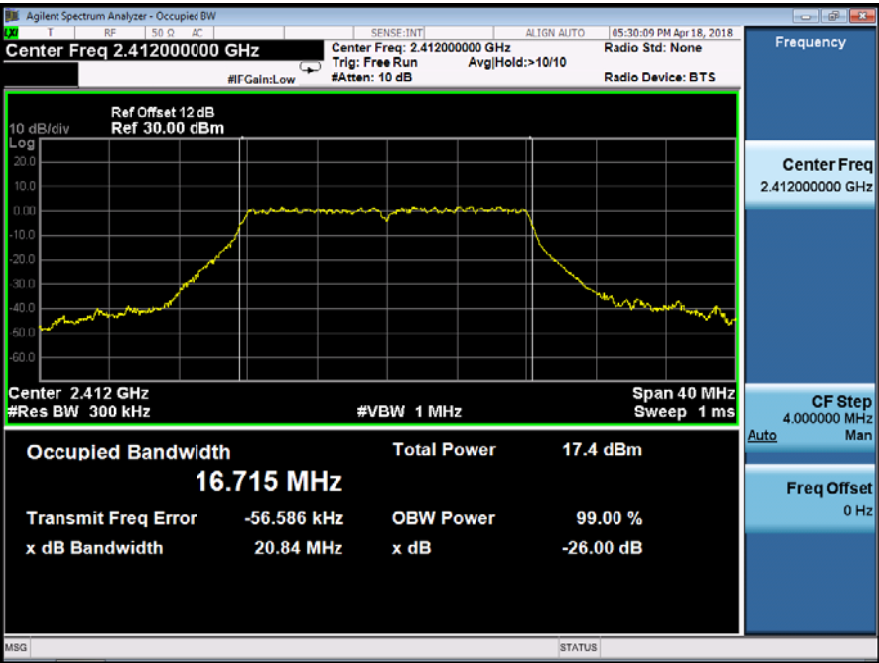


Test Model 99% Occupied Bandwidth
802.11g
Channel 6: 2437MHz

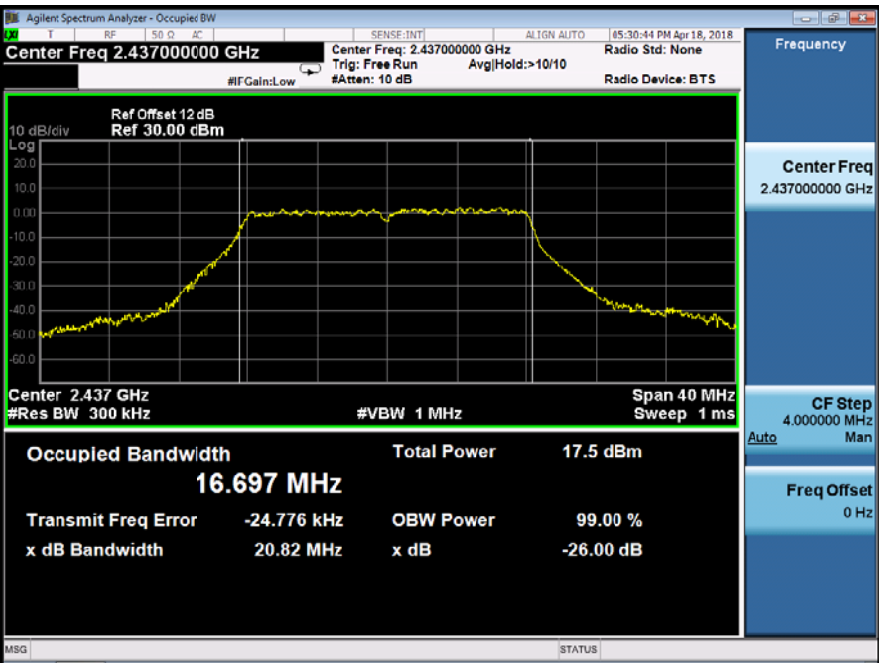


Test Model 99% Occupied Bandwidth
802.11g
Channel 11: 2462MHz

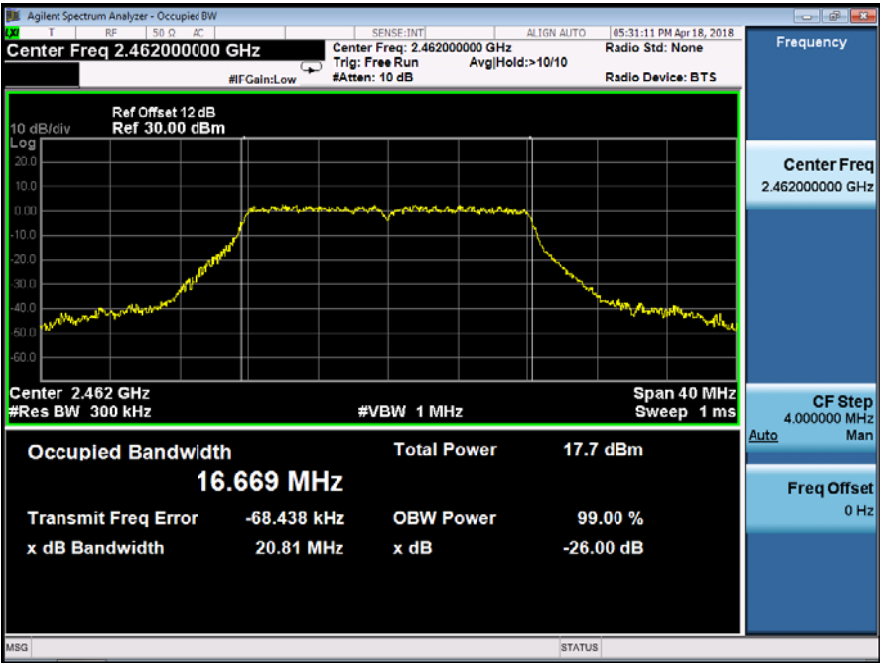


Test Model 99% Occupied Bandwidth
802.11n (HT20)
Channel 1: 2412MHz

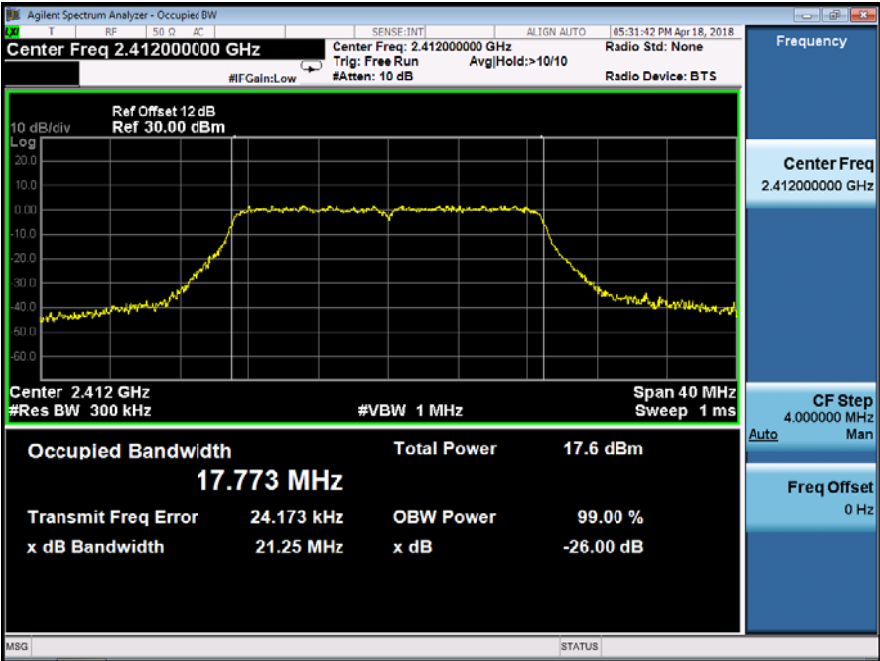


Test Model 99% Occupied Bandwidth
802.11n (HT20)
Channel 6: 2437MHz

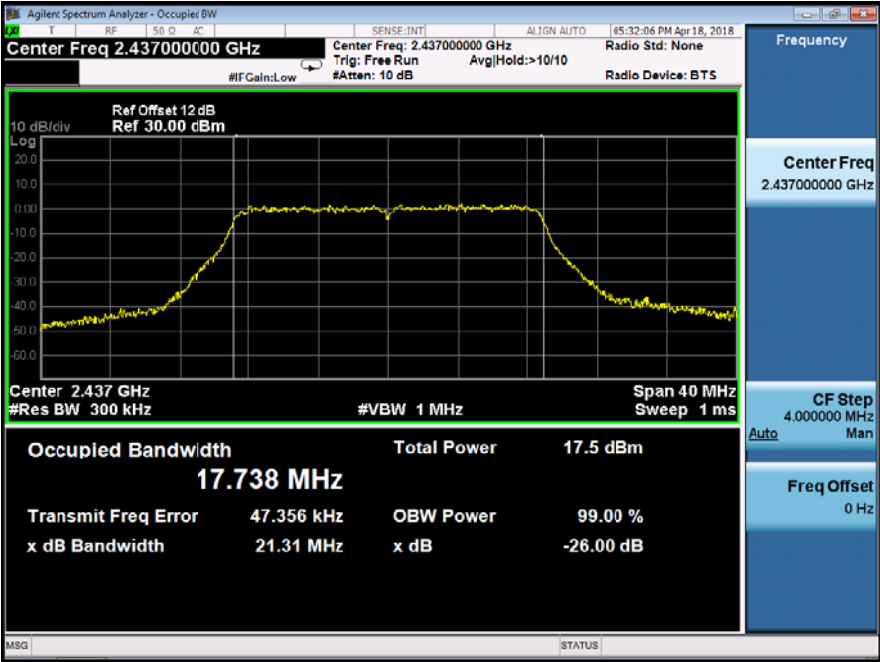


Test Model 99% Occupied Bandwidth
802.11n (HT20)
Channel 11: 2462MHz

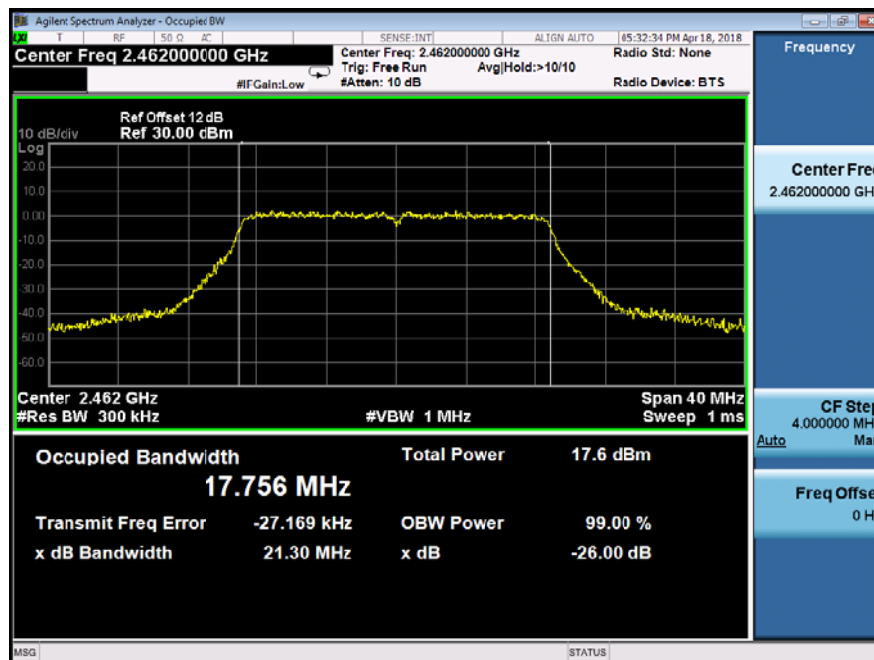


Test Model 99% Occupied Bandwidth
802.11n (HT40)
Channel 3: 2422MHz

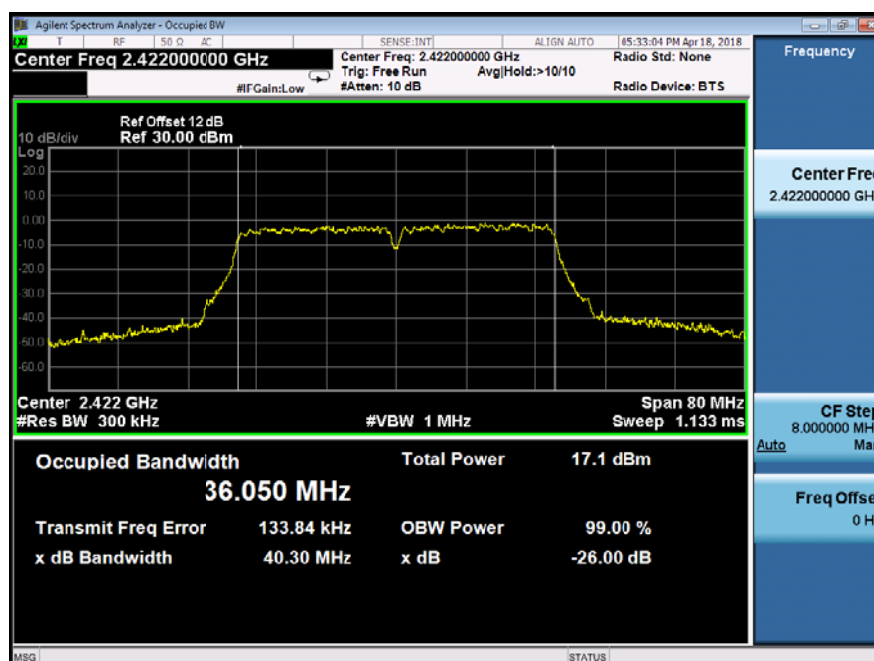

Test Model 99% Occupied Bandwidth
802.11n (HT20)
Channel 6: 2437MHz

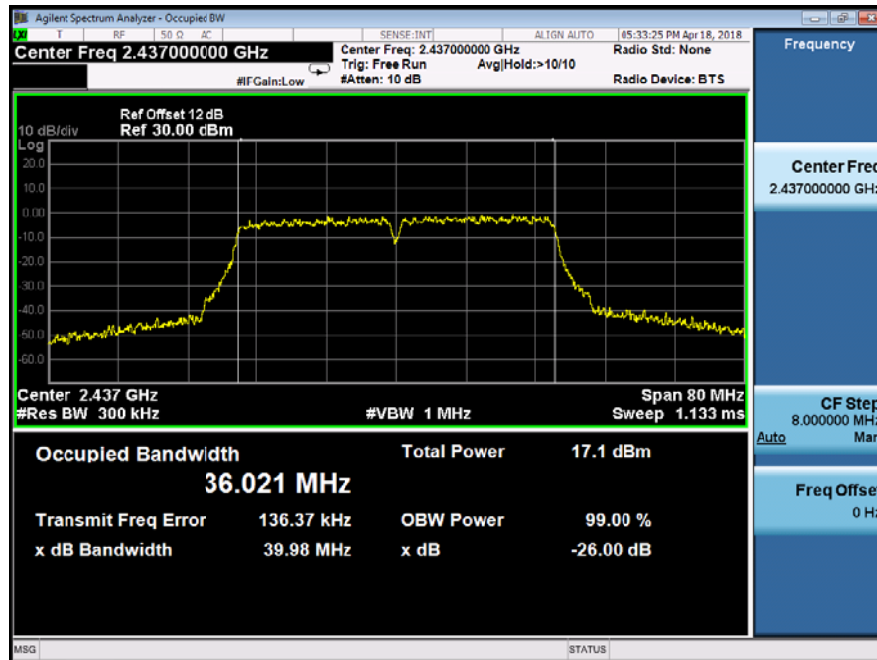

Test Model 99% Occupied Bandwidth
802.11n (HT20)
Channel 9: 2452MHz

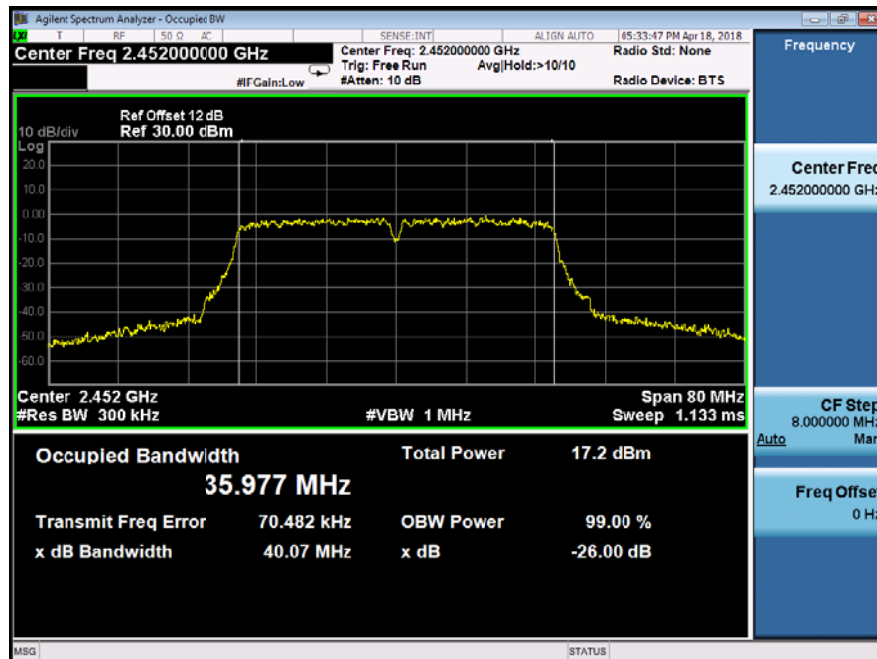

8.3 MAXIMUM PEAK CONDUCTED OUTPUT POWER

8.3.1 Applicable Standard

According to FCC Part 15.247(b)(3) and KDB558074 DTS 01 Meas. Guidance v05
According to IC RSS-Gen 6.12, IC RSS-247.5.4(d)

8.3.2 Conformance Limit

FCC:

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm).

IC:

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W.

8.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.3.4 Test Procedure

■ According to FCC Part 15.247(b)(3)

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum output power setting and enable the EUT transmit continuously.

Measure the conducted output power with cable loss and record the results in the test report.

Measure and record the results in the report.

■ According to FCC Part 15.247(b)(4):

Conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note: If antenna Gain exceeds 6 dBi, then Output power Limit = $30 - (\text{Gain} - 6)$

8.3.5 Test Results

Temperature : 26°C Test Date : April 18, 2018
Humidity : 60 % Test By: King Kong

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm)	EIRP (dBm)	Limit for peak conducted output power (dBm)	Limit for EIRP (dBm)	Verdict
802.11b	1	2412	13.19	15.79	30	36	PASS
	6	2437	13.75	16.35	30	36	PASS
	11	2462	14.50	17.1	30	36	PASS
802.11g	1	2412	17.44	20.04	30	36	PASS
	6	2437	16.99	19.59	30	36	PASS
	11	2462	17.49	20.09	30	36	PASS
802.11n (HT20)	1	2412	17.16	19.76	30	36	PASS
	6	2437	17.21	19.81	30	36	PASS
	11	2462	17.65	20.25	30	36	PASS
802.11n (HT40)	3	2422	16.41	19.01	30	36	PASS
	6	2437	17.05	19.65	30	36	PASS
	9	2452	17.26	19.86	30	36	PASS
Note: /							

8.4 MAXIMUM POWER SPECTRAL DENSITY

8.4.1 Applicable Standard

According to FCC Part15.247(e) and KDB558074 DTS 01 Meas. Guidance v05
According to IC RSS- Gen 6.12, IC RSS-247 5.2(b)

8.4.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.4.4 Test Procedure

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance

The transmitter output (antenna port) was connected to the spectrum analyzer

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz

Set the VBW to:10 kHz.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

Note: If antenna Gain exceeds 6 dBi, then PSD Limit=8-(Gain- 6)


8.4.5 Test Results

Temperature :	26°C	Test Date :	April 18, 2018
Humidity :	60 %	Test By:	King Kong

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
802.11b	1	2412	-17.282	8	PASS
	6	2437	-16.529	8	PASS
	11	2462	-15.893	8	PASS
802.11g	1	2412	-16.071	8	PASS
	6	2437	-15.939	8	PASS
	11	2462	-15.711	8	PASS
802.11n (HT20)	1	2412	-16.085	8	PASS
	6	2437	-15.780	8	PASS
	11	2462	-15.042	8	PASS
802.11n (HT40)	3	2422	-18.510	8	PASS
	6	2437	-18.230	8	PASS
	9	2452	-17.897	8	PASS


Test Model

Power Spectral Density
802.11b
Channel 1: 2412MHz

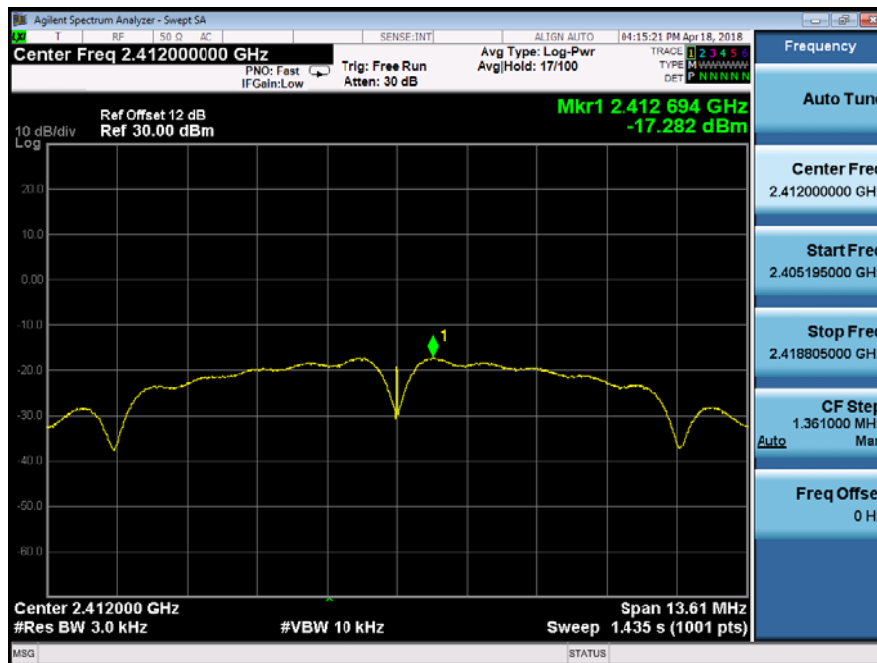


Test Model

Power Spectral Density
802.11b
Channel 6: 2437MHz

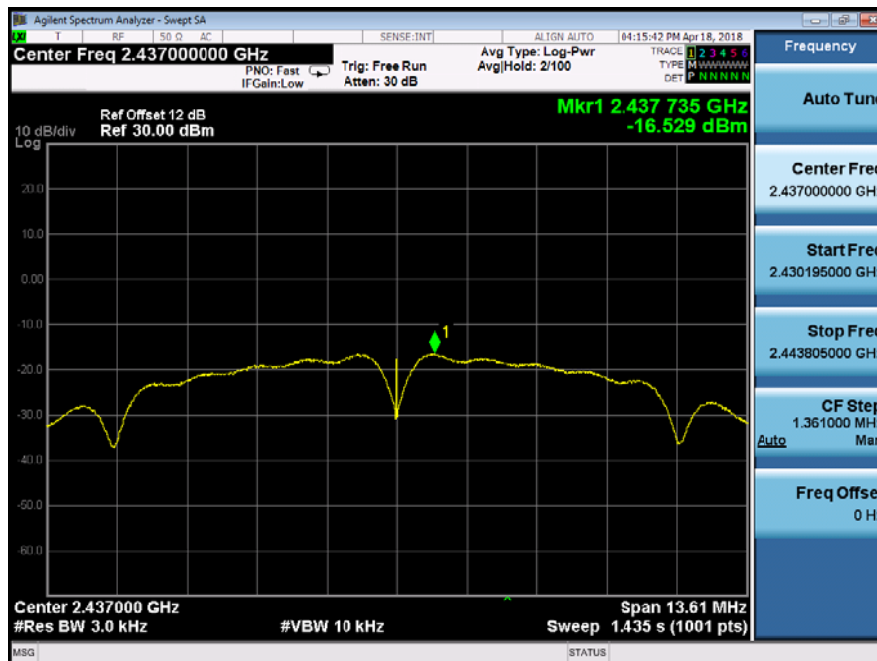


Test Model

Power Spectral Density
802.11b
Channel 11: 2462MHz

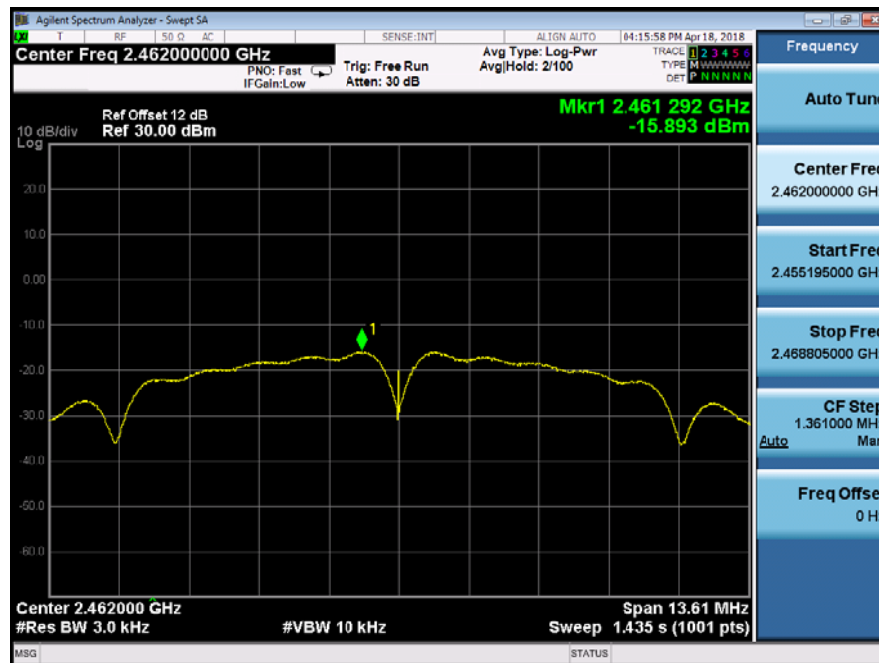


Test Model

Power Spectral Density
802.11g
Channel 1: 2412MHz

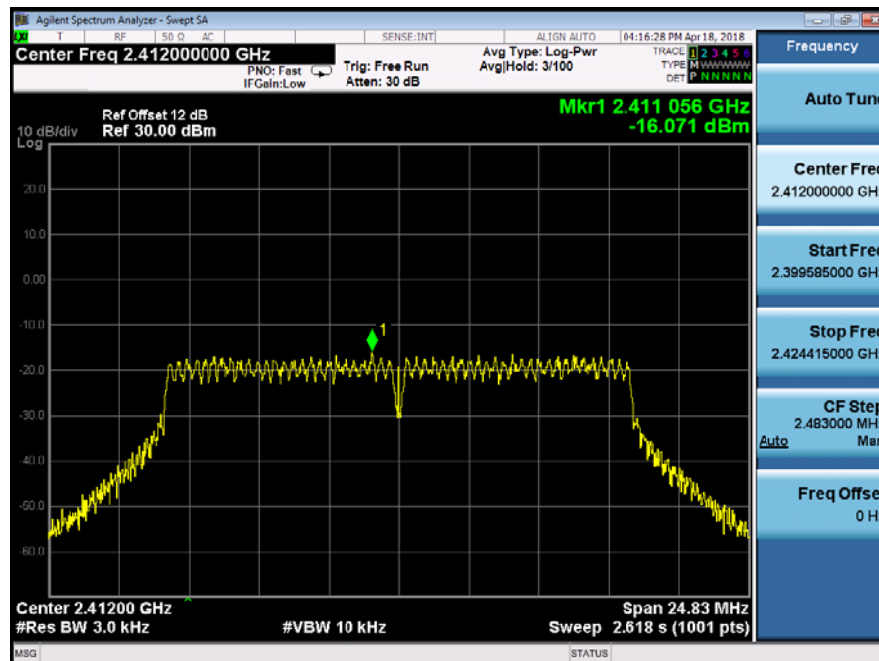


Test Model

Power Spectral Density
802.11g
Channel 6: 2437MHz

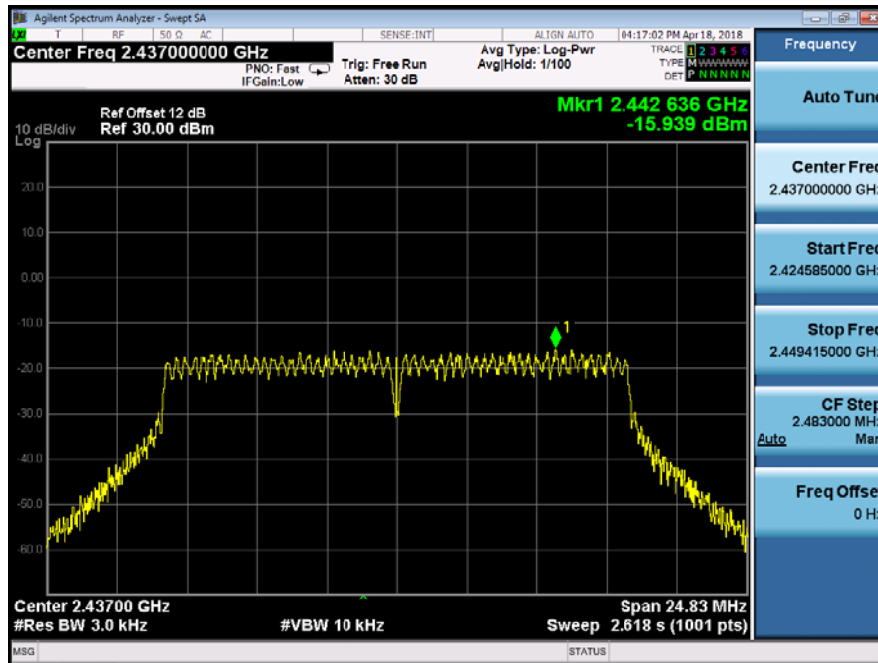


Test Model

Power Spectral Density
802.11g
Channel 11: 2462MHz

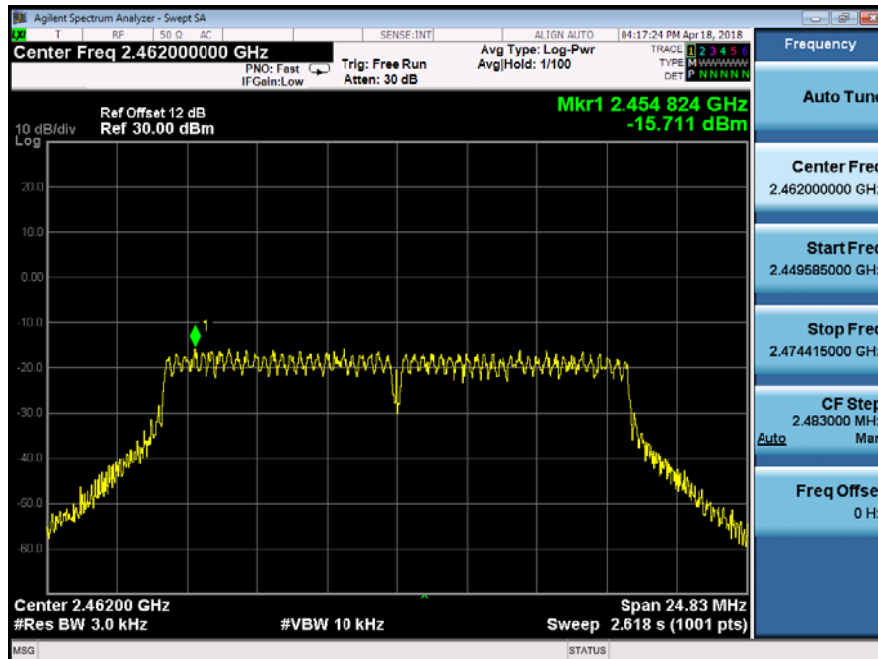


Test Model

Power Spectral Density
802.11n (HT20)
Channel 1: 2412MHz

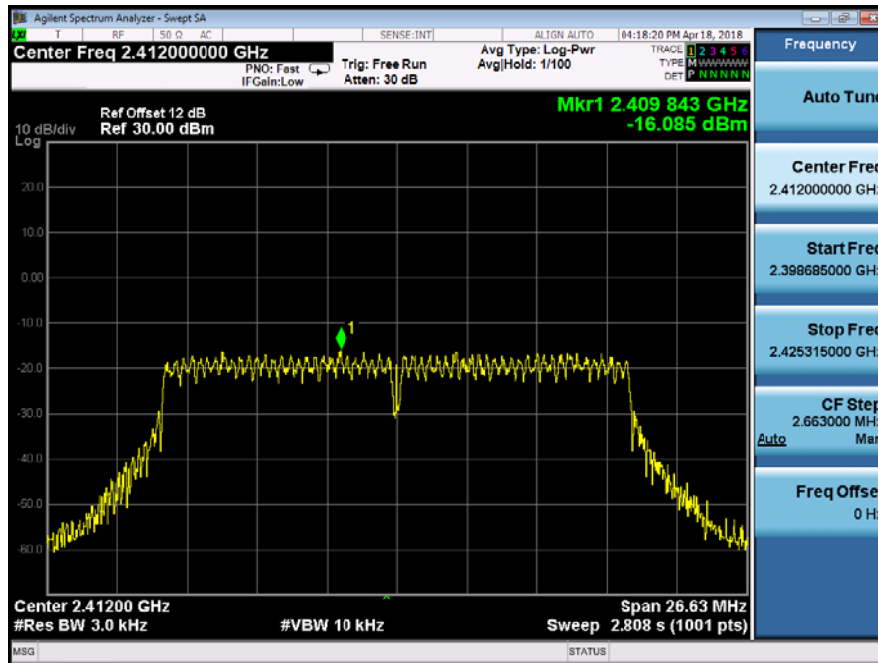


Test Model

Power Spectral Density
802.11n (HT20)
Channel 6: 2437MHz

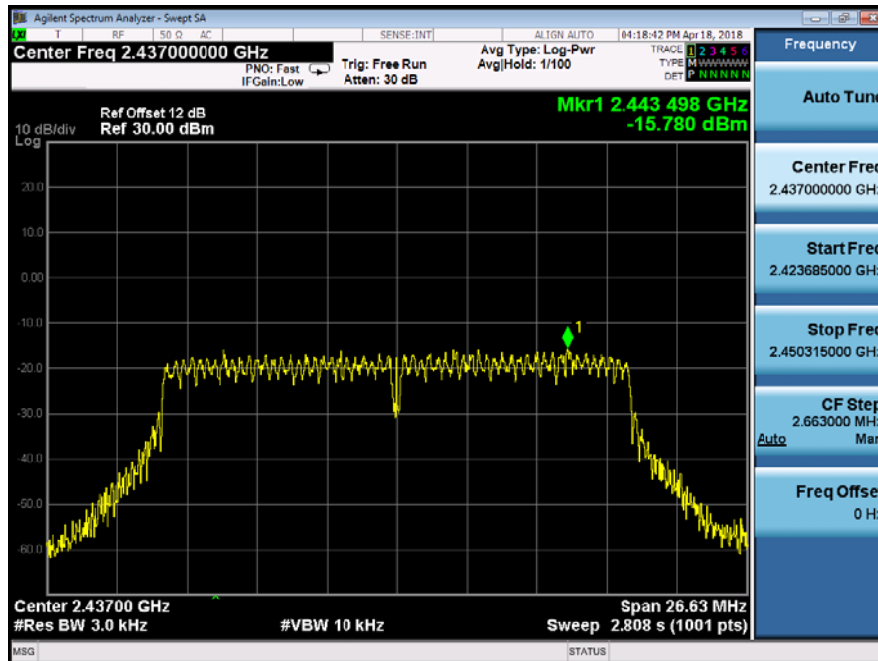


Test Model

Power Spectral Density
802.11n (HT20)
Channel 11: 2462MHz

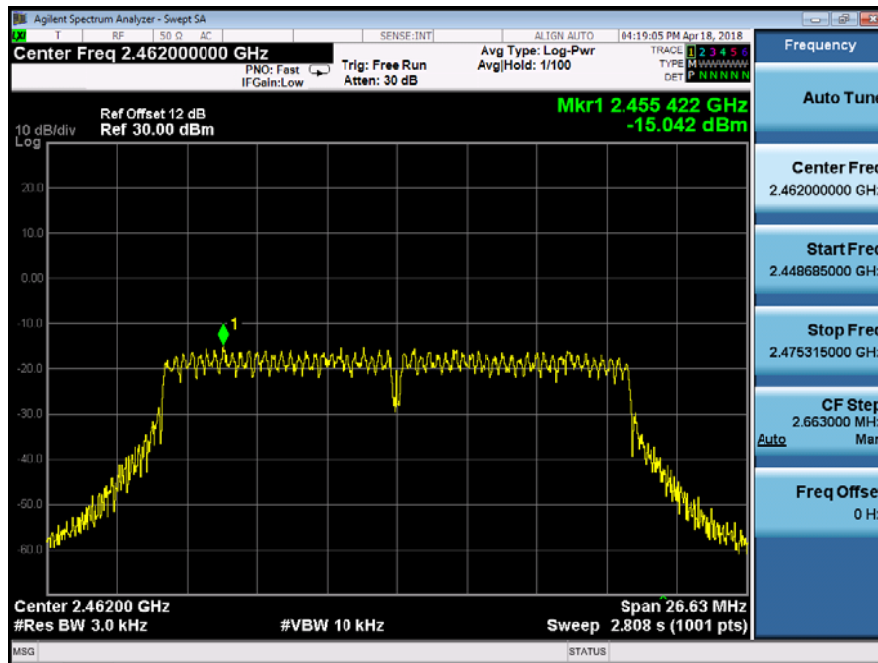


Test Model

Power Spectral Density
802.11n (HT40)
Channel 3: 2422MHz

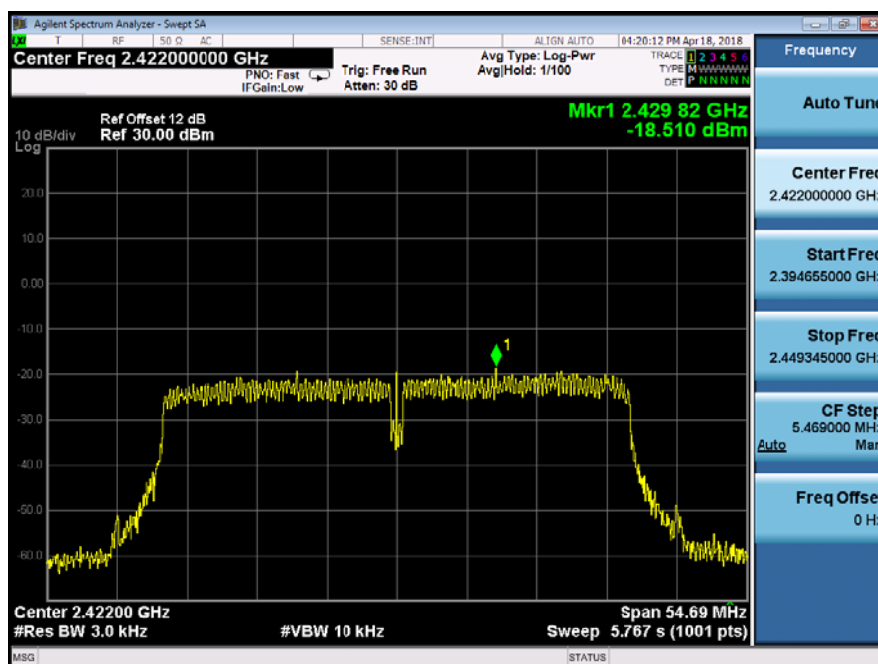


Test Model

Power Spectral Density
802.11n (HT40)
Channel 6: 2437MHz

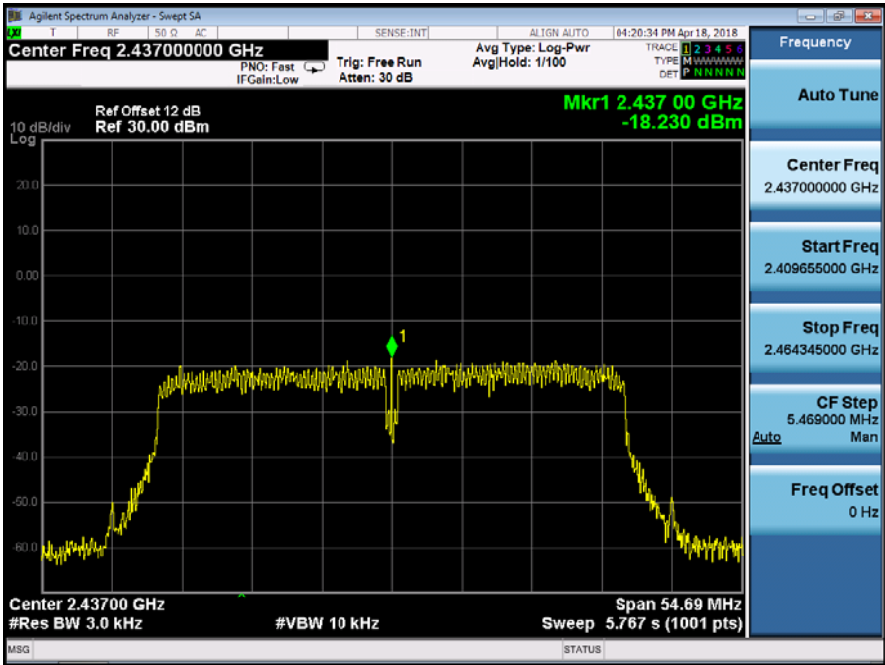

Test Model

Power Spectral Density
802.11n (HT40)
Channel 9: 2452MHz

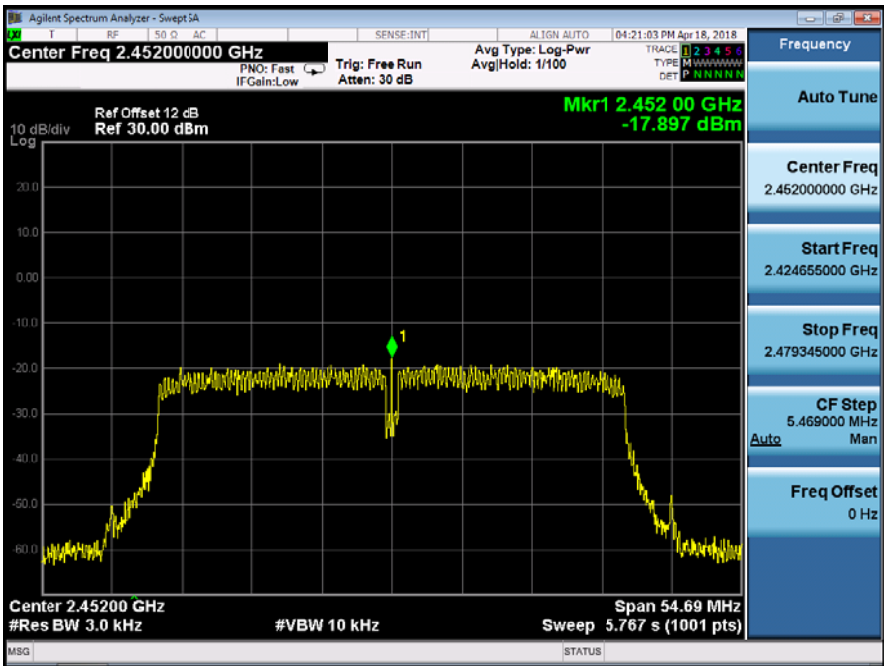

8.5 UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

8.5.1 Applicable Standard

According to FCC Part 15.247(d) and KDB558074 DTS 01 Meas. Guidance v05
According to IC RSS- Gen 6.13, IC RSS-247 5.5

8.5.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

8.5.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.5.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

■ Emission level measurement

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW = 300 kHz.

Set Detector = peak

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.

8.5.5 Test Results

All modes 2.4G 802.11b/g/n(HT20)/n(HT40) have been tested, and the worst result recorded was report as below:


Test Model ☒ 802.11b ☐ 802.11g ☐ 802.11n(HT20) ☐ 802.11n(HT40)
☒ Channel 1: 2412MHz ☐ Channel 3: 2422MHz

PSD(Power Spectral Density) RBW=100kHz

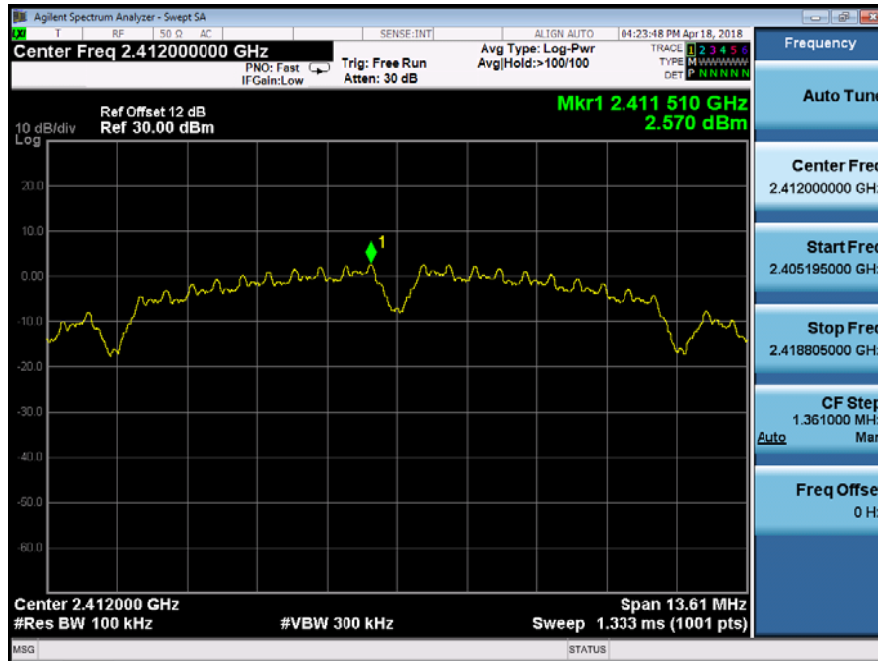

Test Model ☒ 802.11b ☐ 802.11g ☐ 802.11n(HT20) ☐ 802.11n(HT40)
☒ Channel 1: 2412MHz ☐ Channel 3: 2422MHz

Unwanted Emissions in non-restricted frequency bands

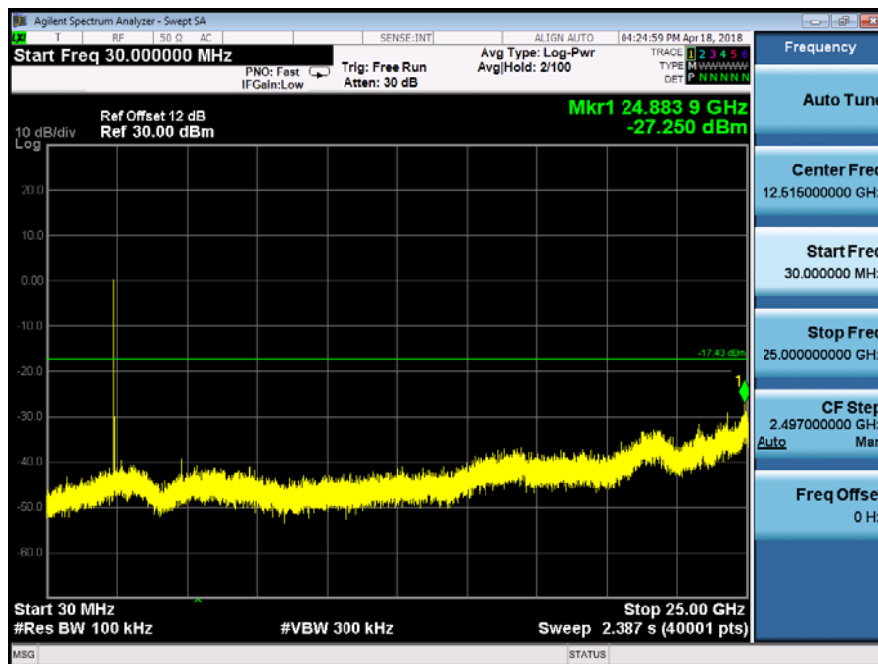

Test Model ☒ 802.11b ☐ 802.11g ☐ 802.11n(HT20) ☐ 802.11n(HT40) Band edge
☒ Channel 1: 2412MHz ☐ Channel 3: 2422MHz




Test Model ☒ 802.11b ☐ 802.11g ☐ 802.11n(HT20) ☐ 802.11n(HT40) PSD(Power Spectral Density) RBW=100kHz
Channel 6: 2437MHz



Unwanted Emissions In Non-Restricted Frequency Bands

Test Model ☒ 802.11b ☐ 802.11g ☐ 802.11n(HT20) ☐ 802.11n(HT40)


Channel 6: 2437MHz

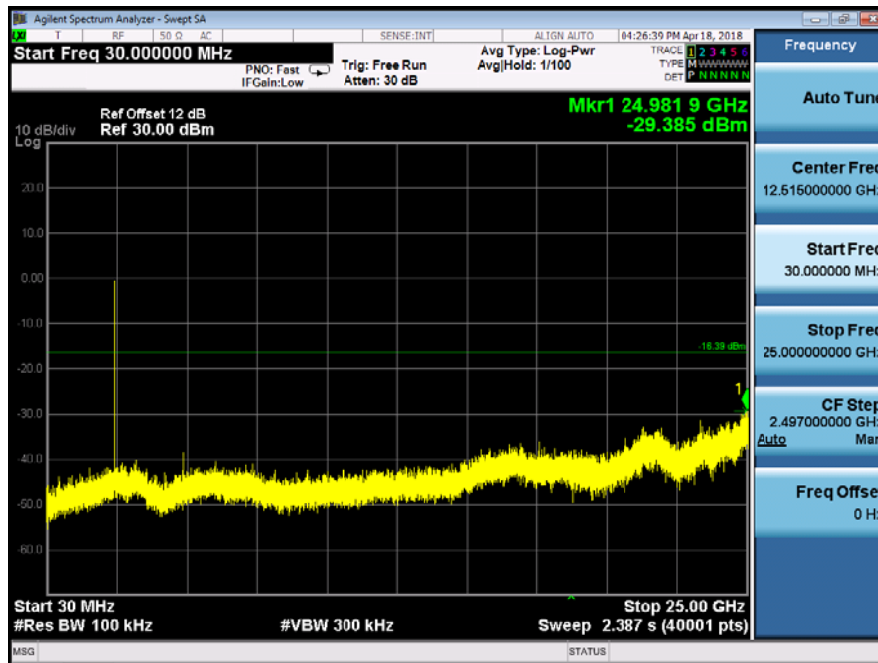

PSD(Power Spectral Density) RBW=100kHz

Test Model ☒ 802.11b ☐ 802.11g ☐ 802.11n(HT20) ☐ 802.11n(HT40)


☒ Channel 11: 2462MHz ☐ Channel 9: 2452MHz

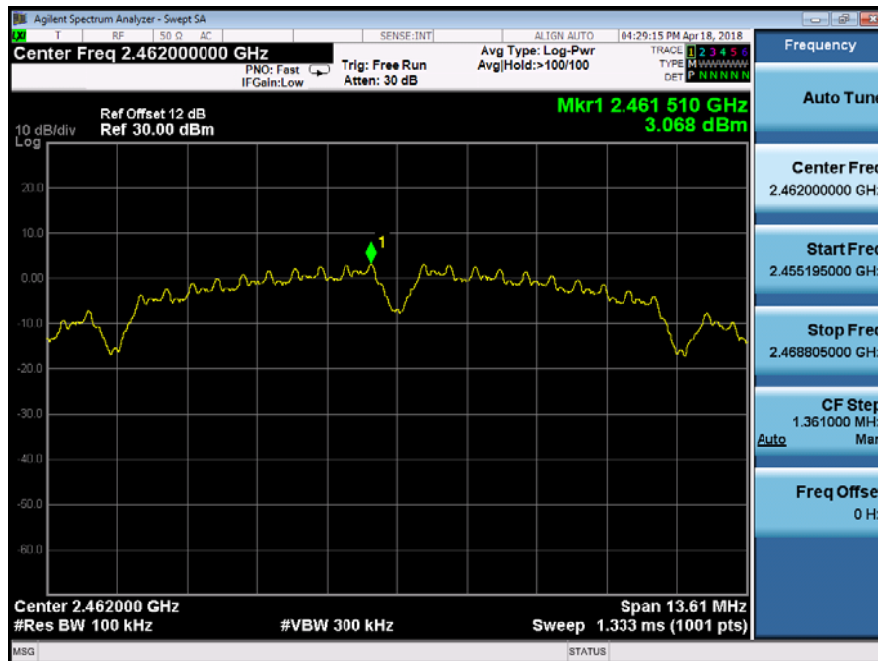

Unwanted Emissions In Non-Restricted Frequency Bands

Test Model ☒ 802.11b ☐ 802.11g ☐ 802.11n(HT20) ☐ 802.11n(HT40)


☒ Channel 11: 2462MHz ☐ Channel 9: 2452MHz

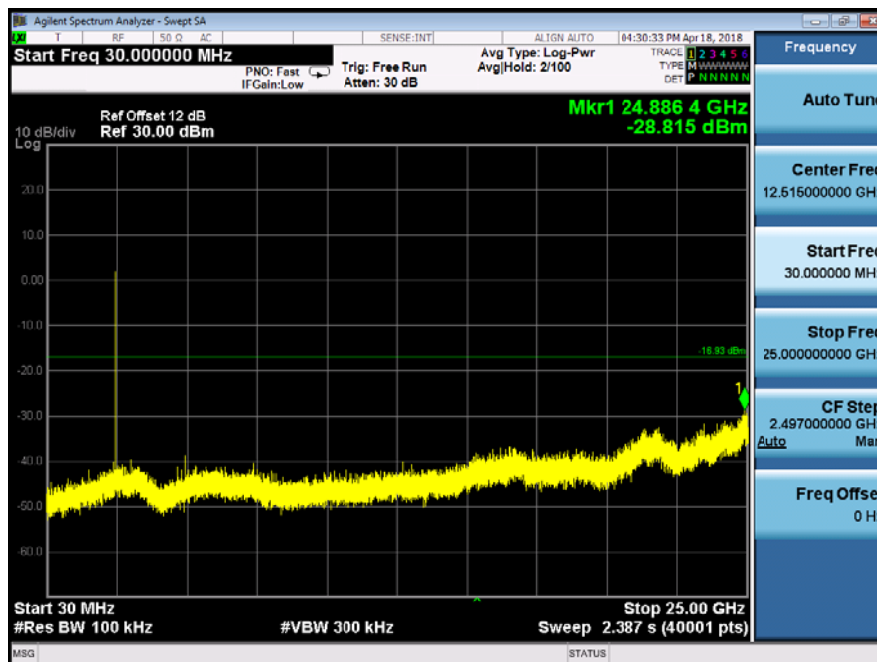

Band edge

Test Model ☒ 802.11b ☐ 802.11g ☐ 802.11n(HT20) ☐ 802.11n(HT40)

☒ Channel 11: 2462MHz ☐ Channel 9: 2452MHz

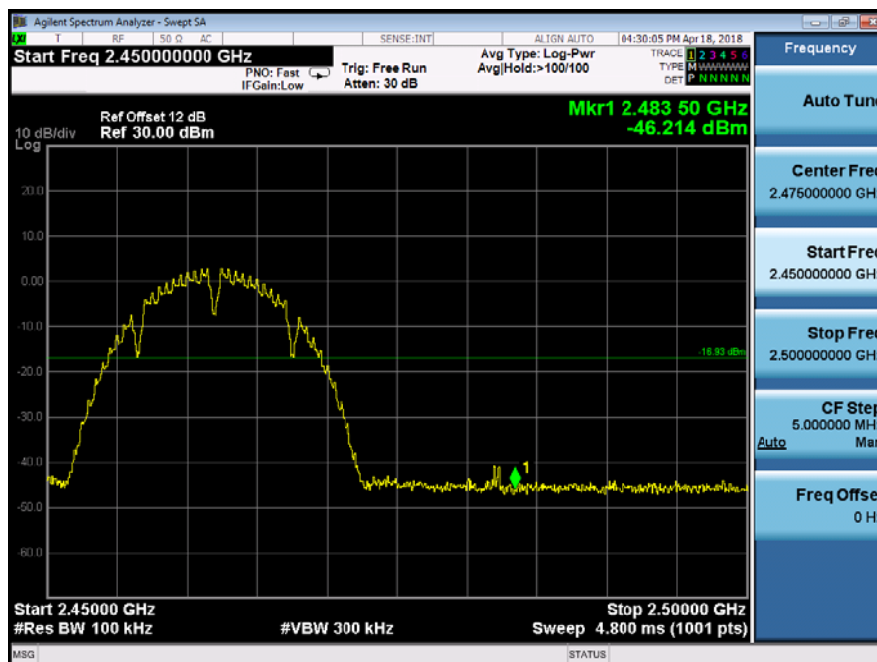

8.6 RADIATED SPURIOUS EMISSION

8.6.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB558074 DTS 01 Meas. Guidance v05

8.6.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
 According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	2400/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

8.6.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

8.6.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz (1GHz to 25GHz), 100 kHz for $f < 1$ GHz (30MHz to 1GHz), 200Hz for $f < 150$ KHz (9KHz to 150KHz), 9KHz for $f < 30$ MHz (150KHz to 30KHz)

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT,

measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data. Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

8.6.5 Test Results

■ Spurious Emission below 30MHz(9KHz to 30MHz)

Temperature:	24°C	Test Date:	April 18, 2018
Humidity:	53 %	Test By:	King Kong
Test mode:	TX Mode		

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.


Distance extrapolation factor = $40\log(\text{Specific distance}/\text{test distance})$ (dB);

Limit line = Specific limits(dBuV) + distance extrapolation factor

■ Spurious Emission Above 1GHz(1GHz to 25GHz)


All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11b recorded was report as below:

Temperature :	26°C	Test Date :	April 28, 2018
Humidity :	60 %	Test By:	King Kong
Test mode:	802.11b	Frequency:	Channel 1: 2412MHz

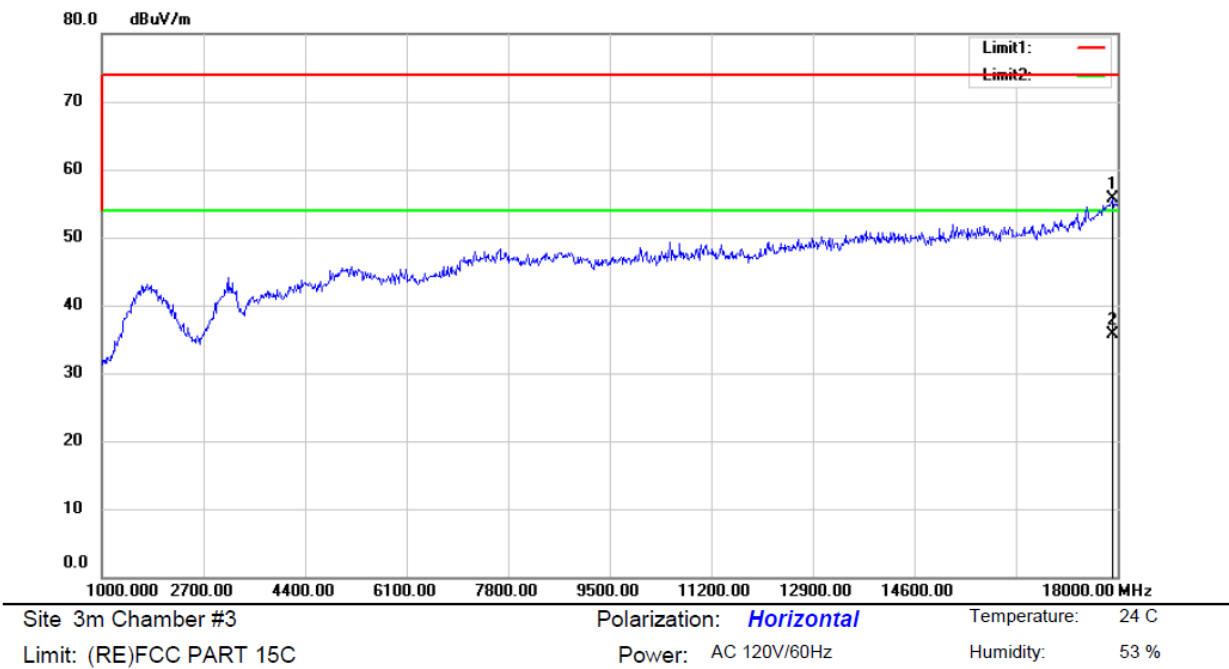


Mode:WIFI2.4G B20 2412HMz
Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	17915.00	38.45	17.26	55.71	74.00	-18.29	peak		
2		17915.00	18.42	17.26	35.68	54.00	-18.32	AVG		

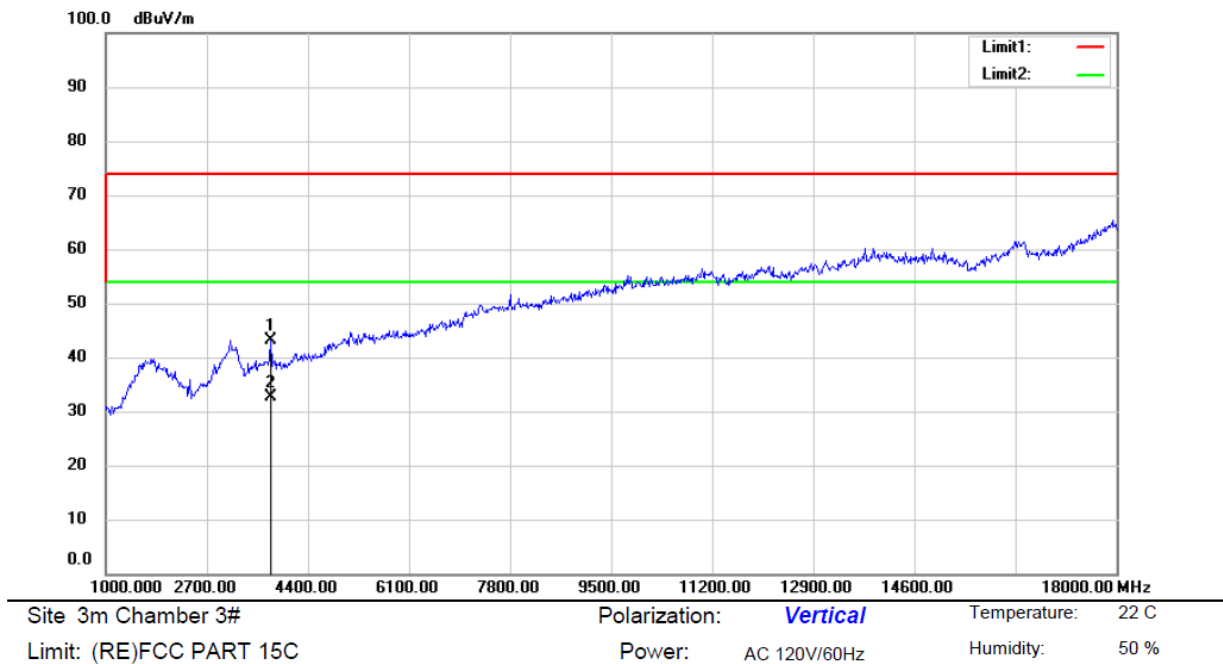

Mode:WIFI2.4G B20 2412HMz
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		3771.000	52.00	-8.89	43.11	74.00	-30.89	peak		
2	*	3771.000	41.54	-8.89	32.65	54.00	-21.35	AVG		

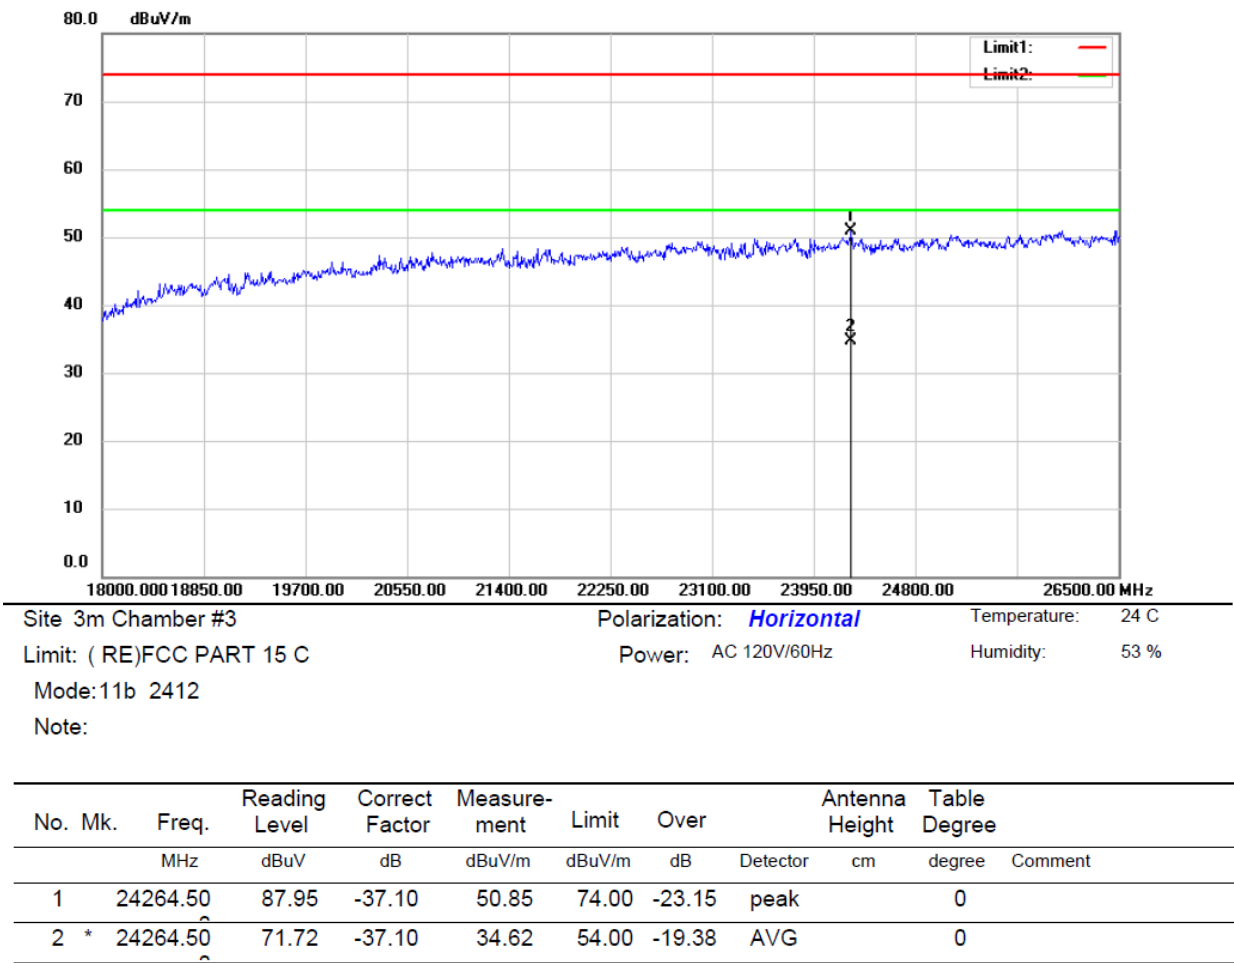


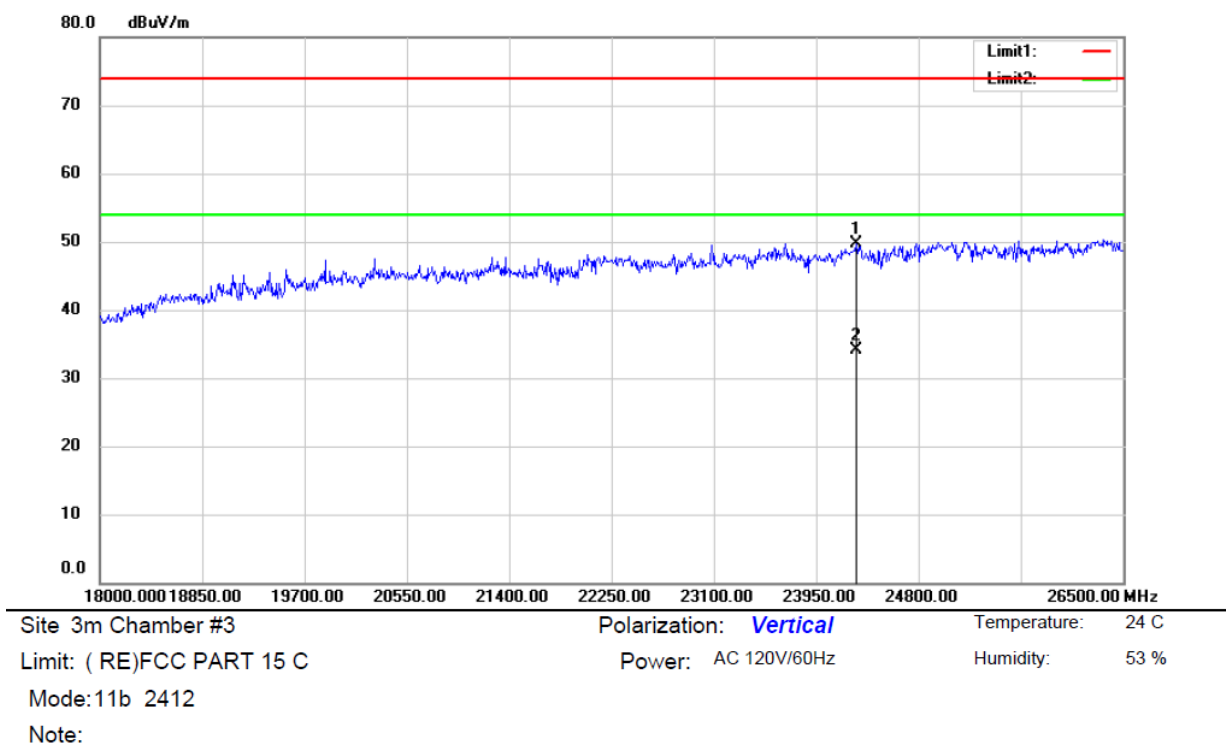

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24281.50	86.82	-37.10	49.72	74.00	-24.28	peak		0
2	*	24281.50	71.22	-37.10	34.12	54.00	-19.88	AVG		0

Temperature : 26°C
Humidity : 60 %
Test mode: 802.11b

Test Date : April 28, 2018
Test By: King Kong
Frequency: Channel 6: 2437MHz

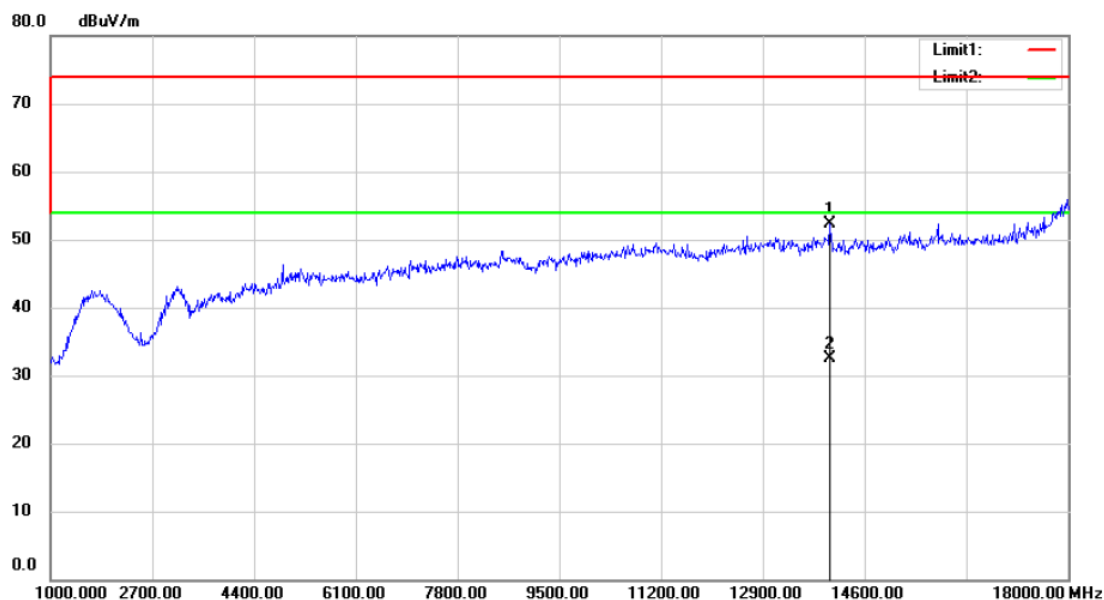

Site 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15C


Power: AC 120V/60Hz

Humidity: 53 %


Mode:WIFI2.4G B20 2437HMz

Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		14022.00	43.31	8.91	52.22	74.00	-21.78	peak		
2	*	14022.00	23.60	8.91	32.51	54.00	-21.49	AVG		

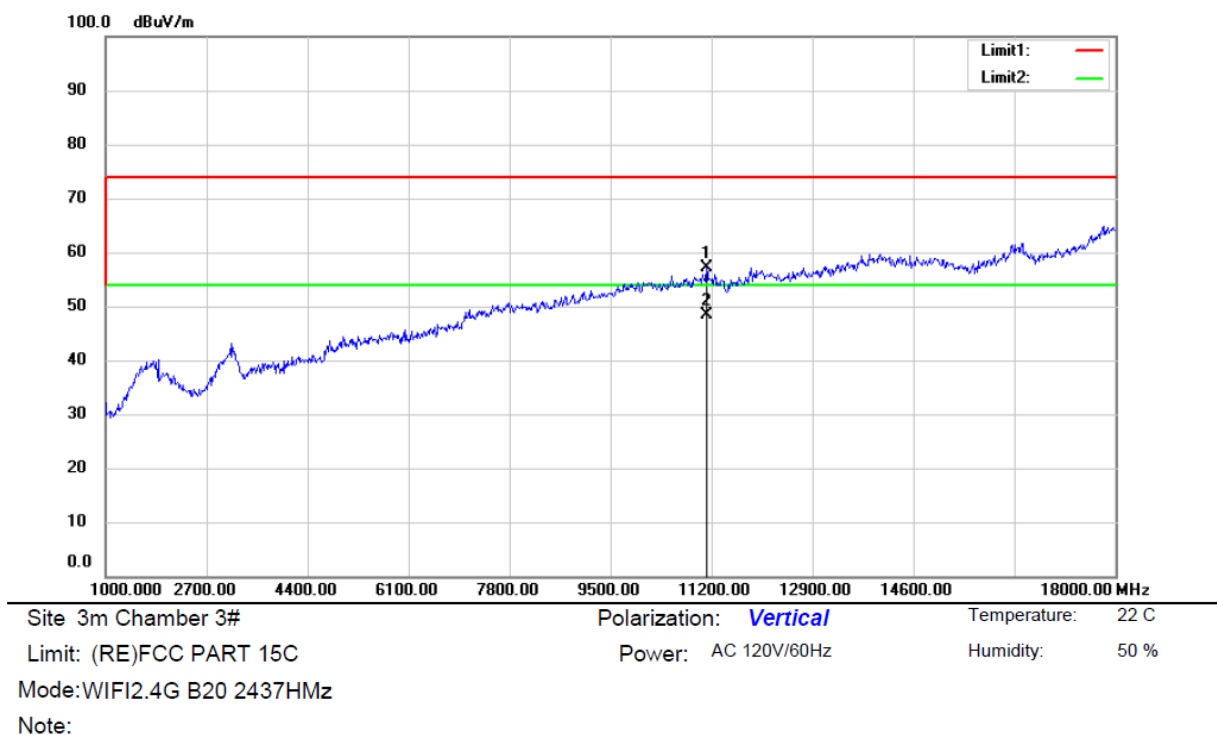

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		11125.62	50.42	6.78	57.20	74.00	-16.80	peak		
2	*	11125.62	41.57	6.78	48.35	54.00	-5.65	AVG		

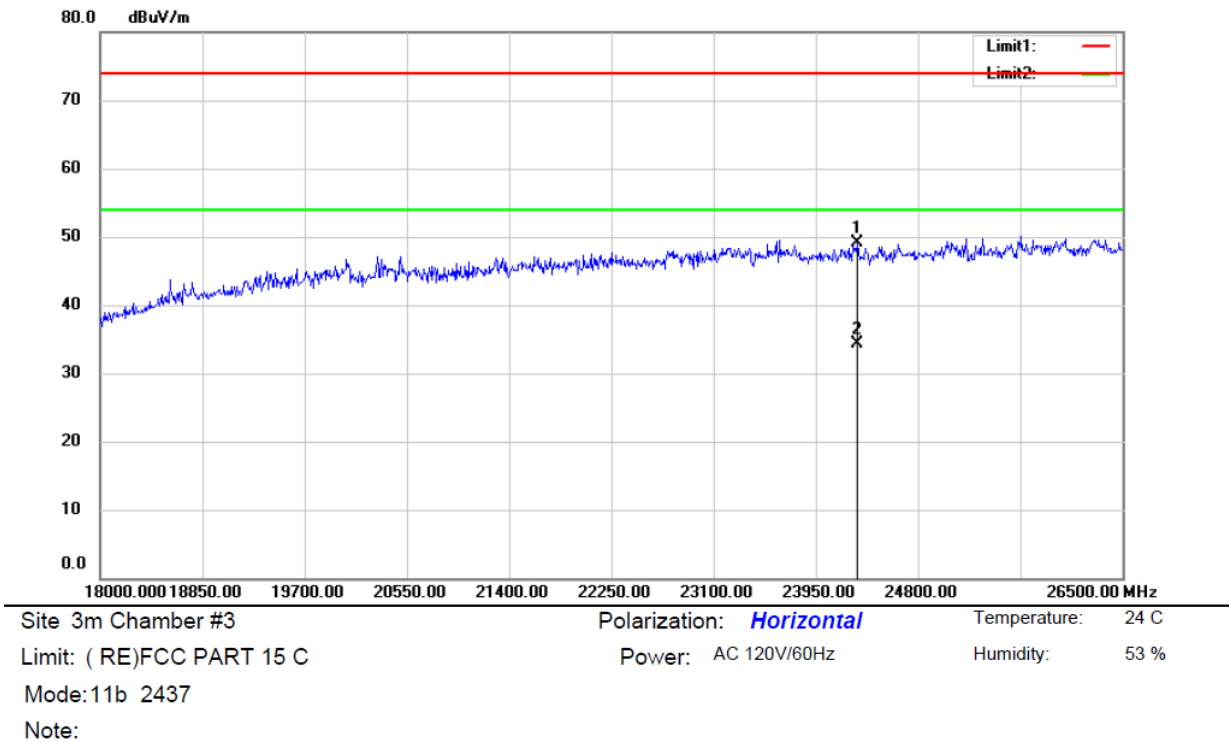


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24298.50	86.28	-37.09	49.19	74.00	-24.81	peak		0
2	*	24298.50	71.32	-37.09	34.23	54.00	-19.77	AVG		0

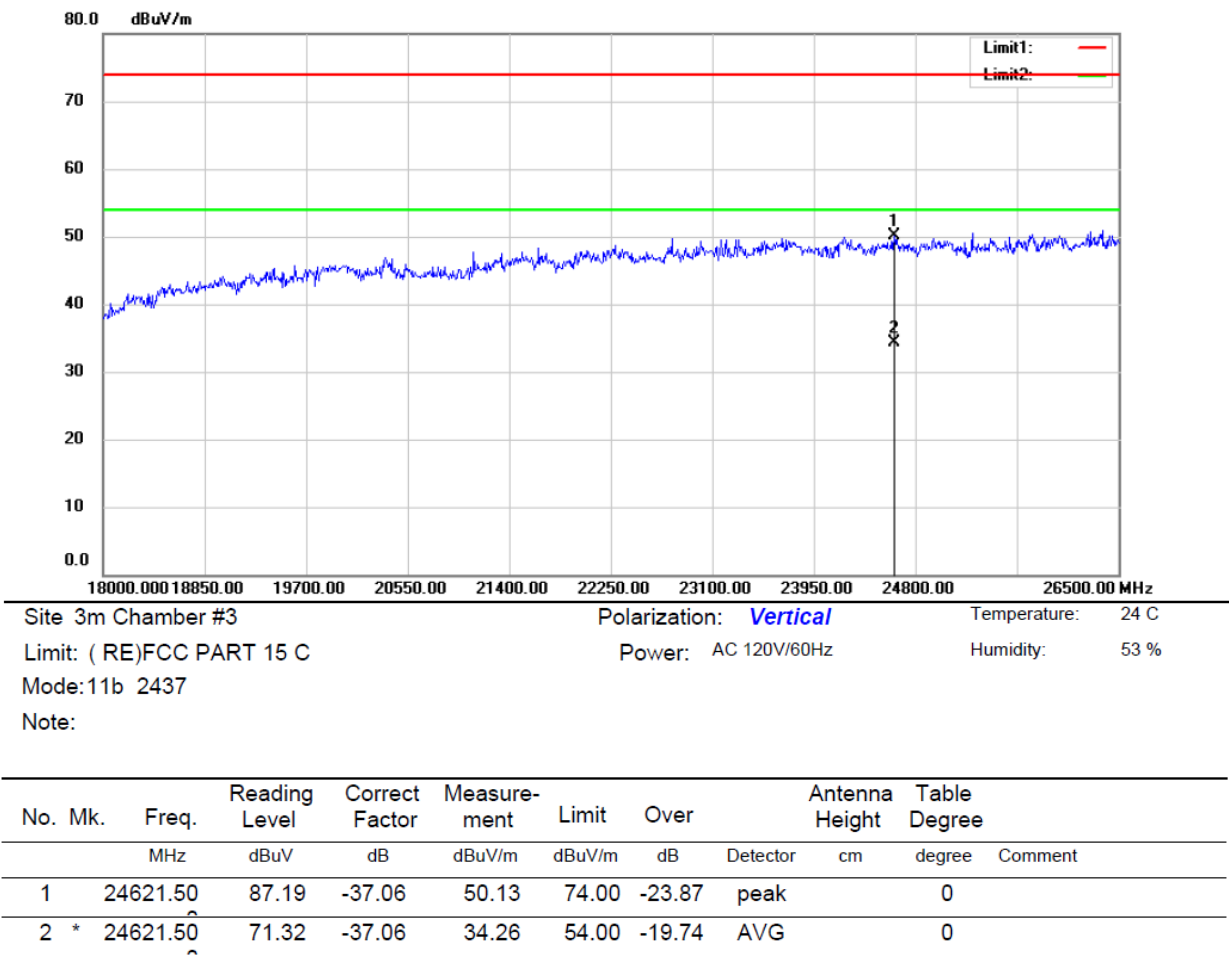

Temperature : 26°C
Humidity : 60 %
Test mode: 802.11b

Test Date : April 28, 2018
Test By: King Kong
Frequency: Channel 11: 2462MHz

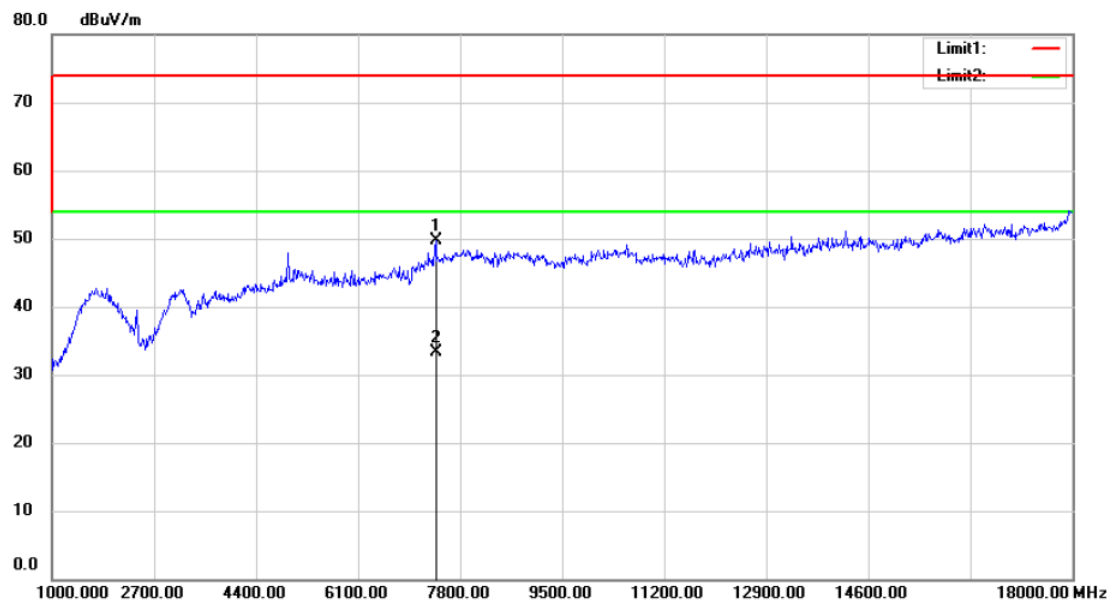

Site 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15C


Power: AC 120V/60Hz

Humidity: 53 %

Mode:WIFI2.4G B20 2462HMz


Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		7392.000	50.79	-1.16	49.63	74.00	-24.37	peak		
2	*	7392.000	34.44	-1.16	33.28	54.00	-20.72	AVG		

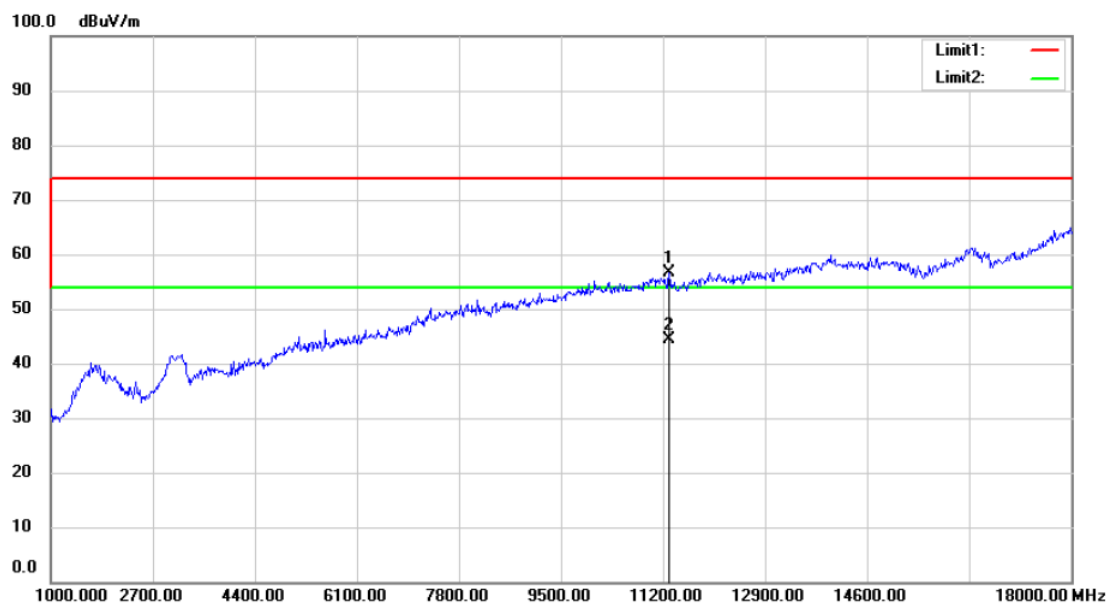


Site 3m Chamber 3# Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 50 %
 Mode:WIFI2.4G B20 2462HMz
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		11312.62	49.89	6.64	56.53	74.00	-17.47	peak		
2	*	11312.62	37.72	6.64	44.36	54.00	-9.64	AVG		

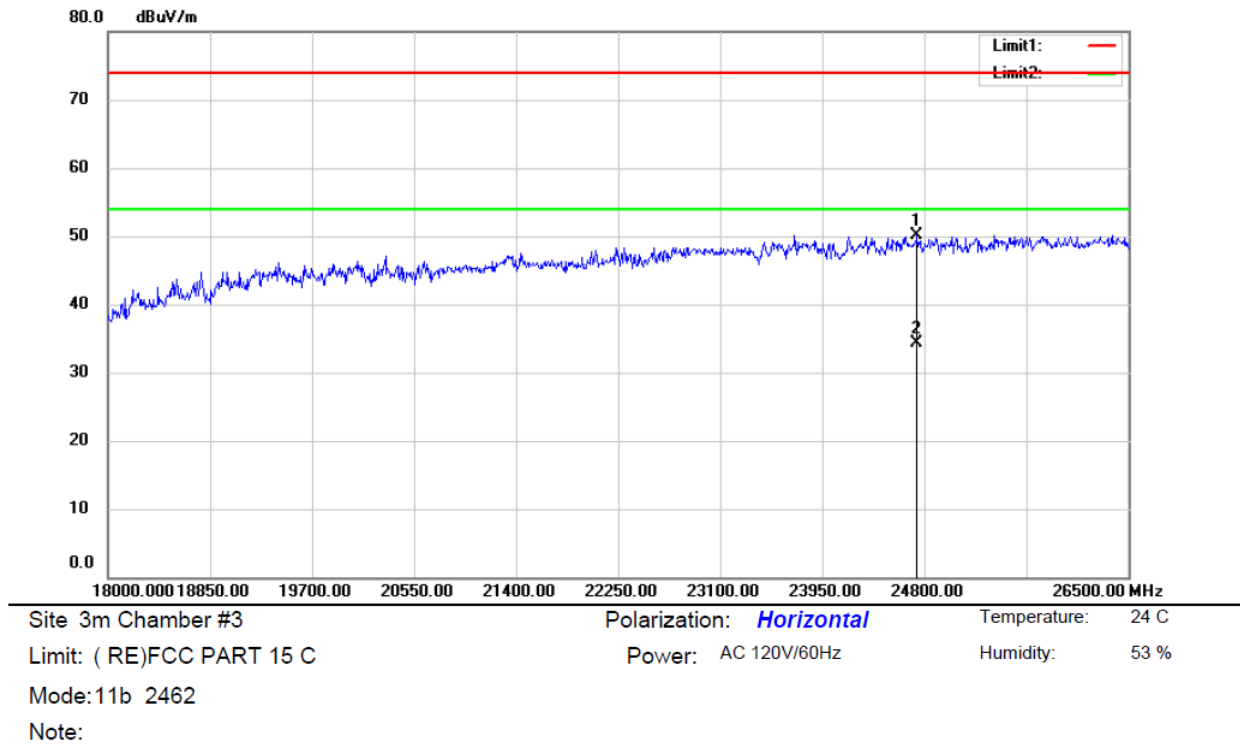

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24740.50	87.13	-37.04	50.09	74.00	-23.91	peak		0
2	*	24740.50	71.30	-37.04	34.26	54.00	-19.74	AVG		0

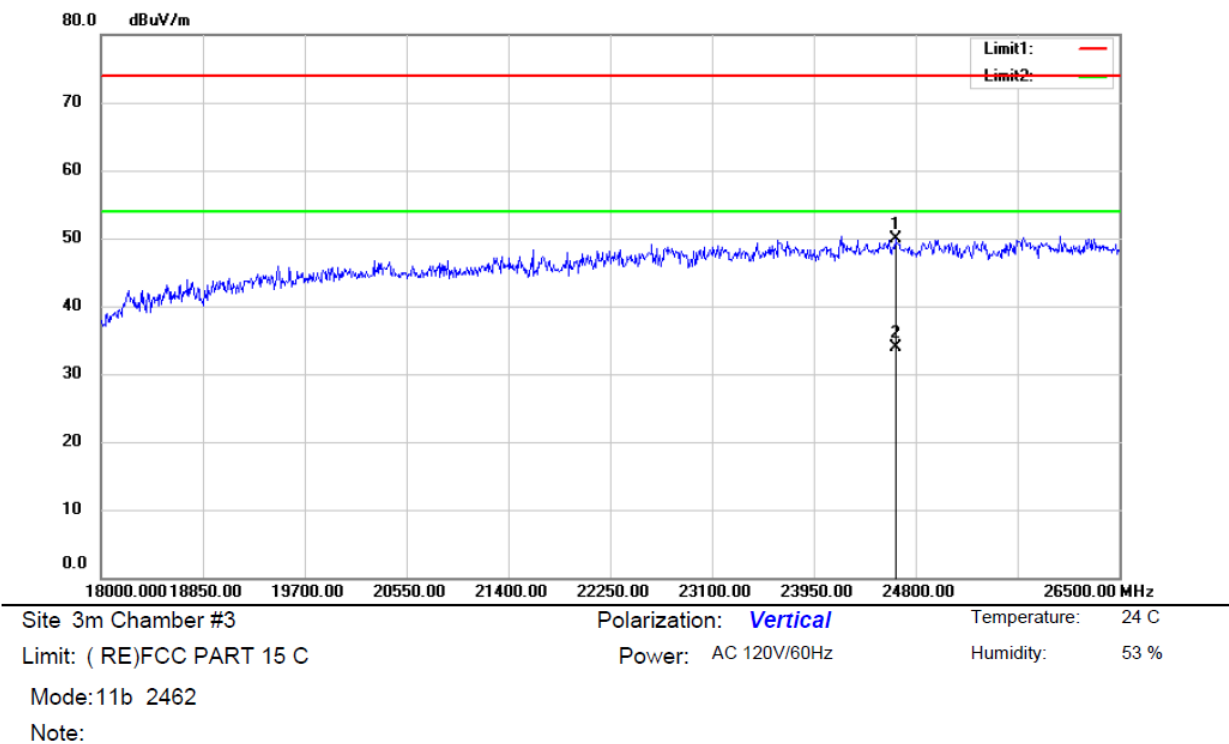


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		24630.00	86.92	-37.05	49.87	74.00	-24.13	peak	0
2	*	24630.00	71.00	-37.05	33.95	54.00	-20.05	AVG	0

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11b recorded was report as below:

Spurious Emission in Restricted Band 2310-2390MHz				
Test Model	☒ 802.11b	☐ 802.11g	☐ 802.11n(HT20)	☐ 802.11n(HT40)
	☒ Channel 1: 2412MHz	☐ Channel 3: 2422MHz		Polarity: H
	VBW=3MHz		Test By: King Kong	

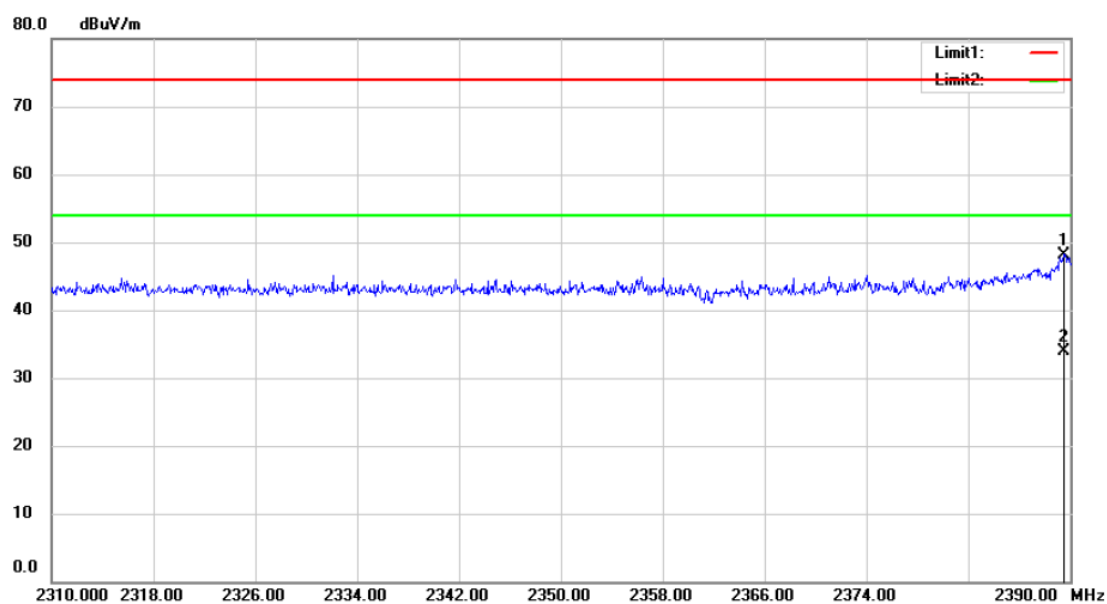

Site 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15C

Power: AC 120V/60Hz


Humidity: 53 %

Mode:WIFI2.4G B20 2412MHz

Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2389.520	17.55	30.65	48.20	74.00	-25.80	peak		
2	*	2389.520	3.19	30.65	33.84	54.00	-20.16	AVG		

Spurious Emission in Restricted Band 2310-2390MHz				
Test Model	☒ 802.11b	☐ 802.11g	☐ 802.11n(HT20)	☐ 802.11n(HT40)
	☒ Channel 1: 2412MHz	☐ Channel 3: 2422MHz		Polarity:V
	VBW=3MHz		Test By: King Kong	

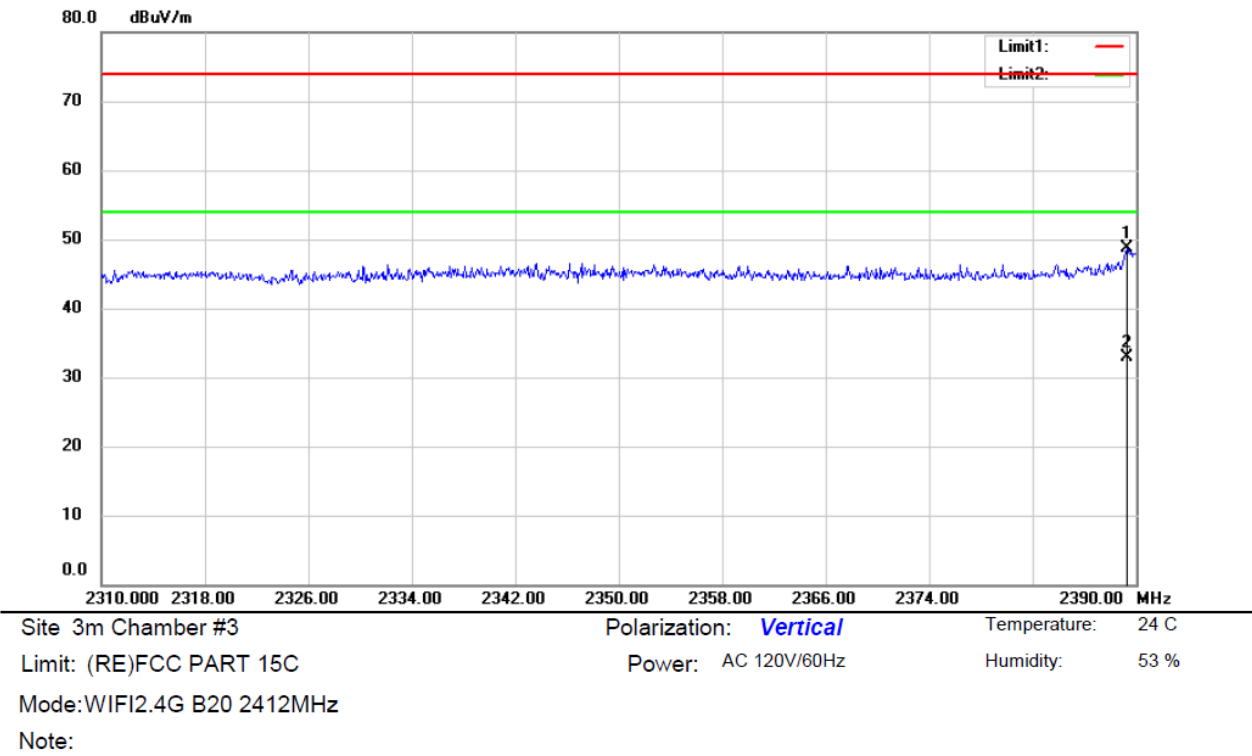

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2389.280	18.09	30.65	48.74	74.00	-25.26	peak		Comment
2	*	2389.280	2.20	30.65	32.85	54.00	-21.15	AVG		

Spurious Emission in Restricted Band 2483.5-2500MHz				
Test Model	☒ 802.11b	☐ 802.11g	☐ 802.11n(HT20)	☐ 802.11n(HT40)
	☒ Channel 11: 2462MHz	☐ Channel 9: 2452MHz	Polarity: H	
	VBW=3MHz		Test By: King Kong	

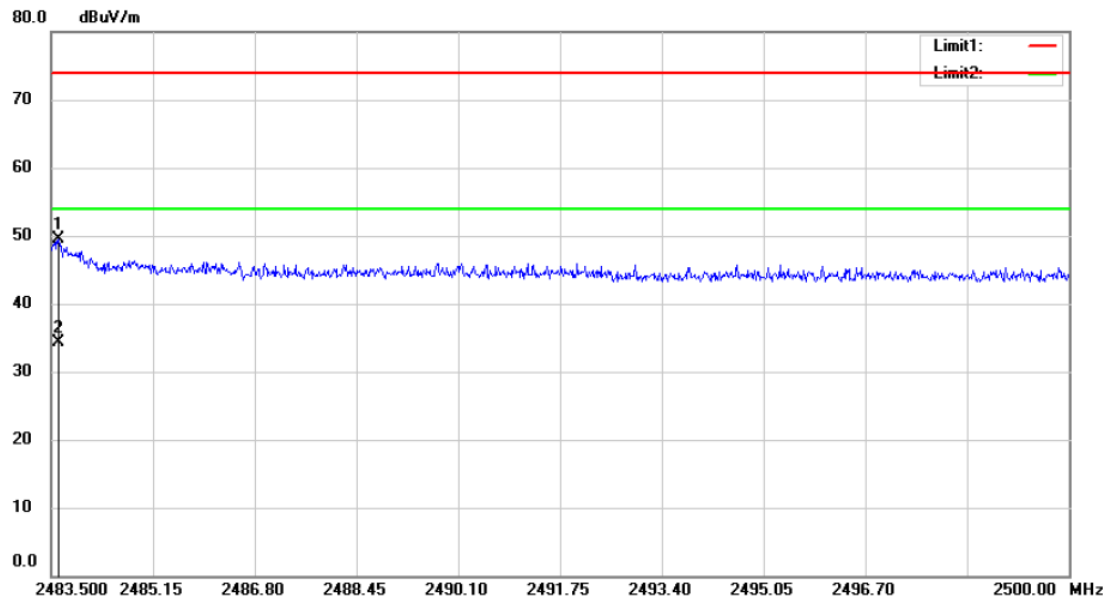


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
Mode:WIFI2.4G B20 2462MHz
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.615	18.54	30.97	49.51	74.00	-24.49	peak		
2	*	2483.615	3.32	30.97	34.29	54.00	-19.71	AVG		

Spurious Emission in Restricted Band 2483.5-2500MHz

Test Model	☒ 802.11b	☐ 802.11g	☐ 802.11n(HT20)	☐ 802.11n(HT40)
	☒ Channel 11: 2462MHz	☐ Channel 9: 2452MHz	Polarity: V	
VBW=3MHz			Test By: King Kong	

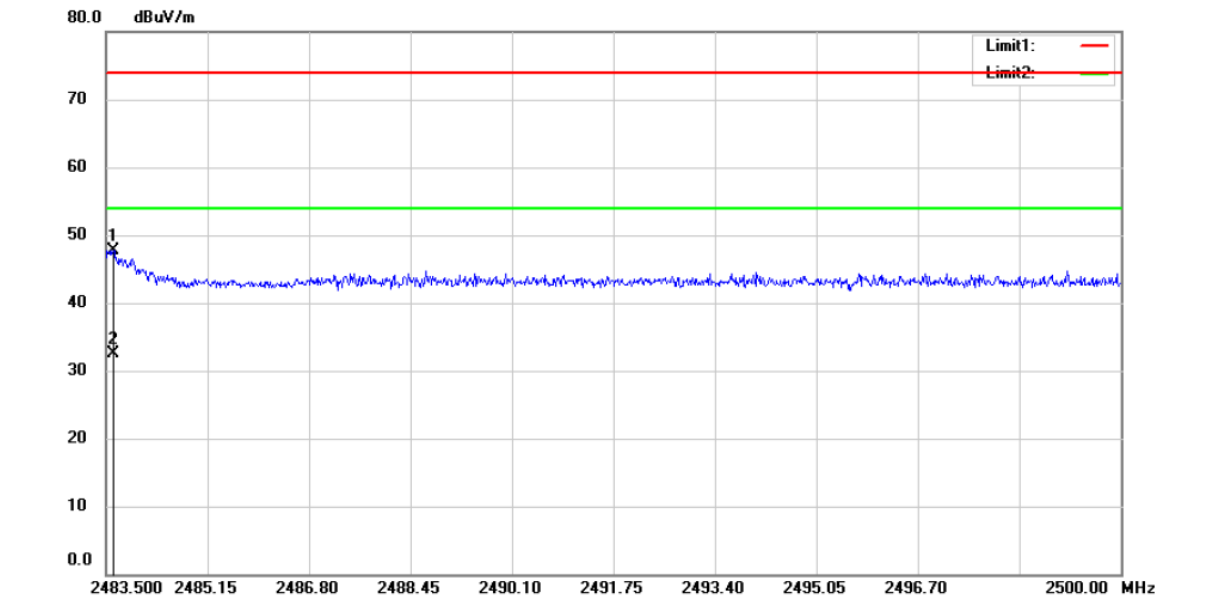


Site 3m Chamber #3	Polarization: Vertical	Temperature: 24 C
Limit: (RE)FCC PART 15C	Power: AC 120V/60Hz	Humidity: 53 %
Mode: WIFI 2.4G B20 2462MHz		
Note:		


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		2483.615	16.74	30.97	47.71	74.00	-26.29	peak		
2	*	2483.615	1.61	30.97	32.58	54.00	-21.42	AVG		

■ Spurious Emission below 1GHz (30MHz to 1GHz)


All modes 2.4G 802.11b/g/n(HT20)/n(HT40) have been tested, and the worst result 802.11b recorded was report as below:

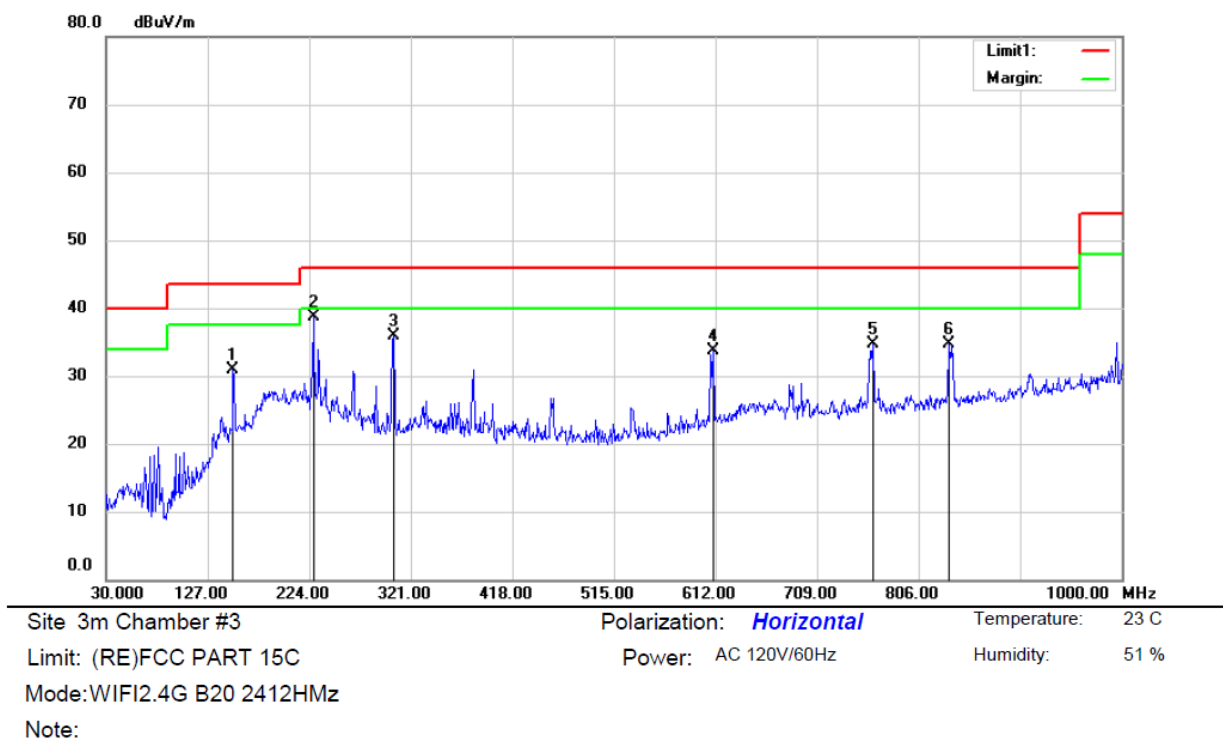


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		151.2500	50.03	-19.07	30.96	43.50	-12.54	QP		
2	*	227.8800	53.19	-14.54	38.65	46.00	-7.35	QP		
3		304.5100	48.20	-12.35	35.85	46.00	-10.15	QP		
4		610.0600	38.36	-4.75	33.61	46.00	-12.39	QP		
5		762.3500	37.17	-2.49	34.68	46.00	-11.32	QP		
6		835.1000	36.34	-1.55	34.79	46.00	-11.21	QP		

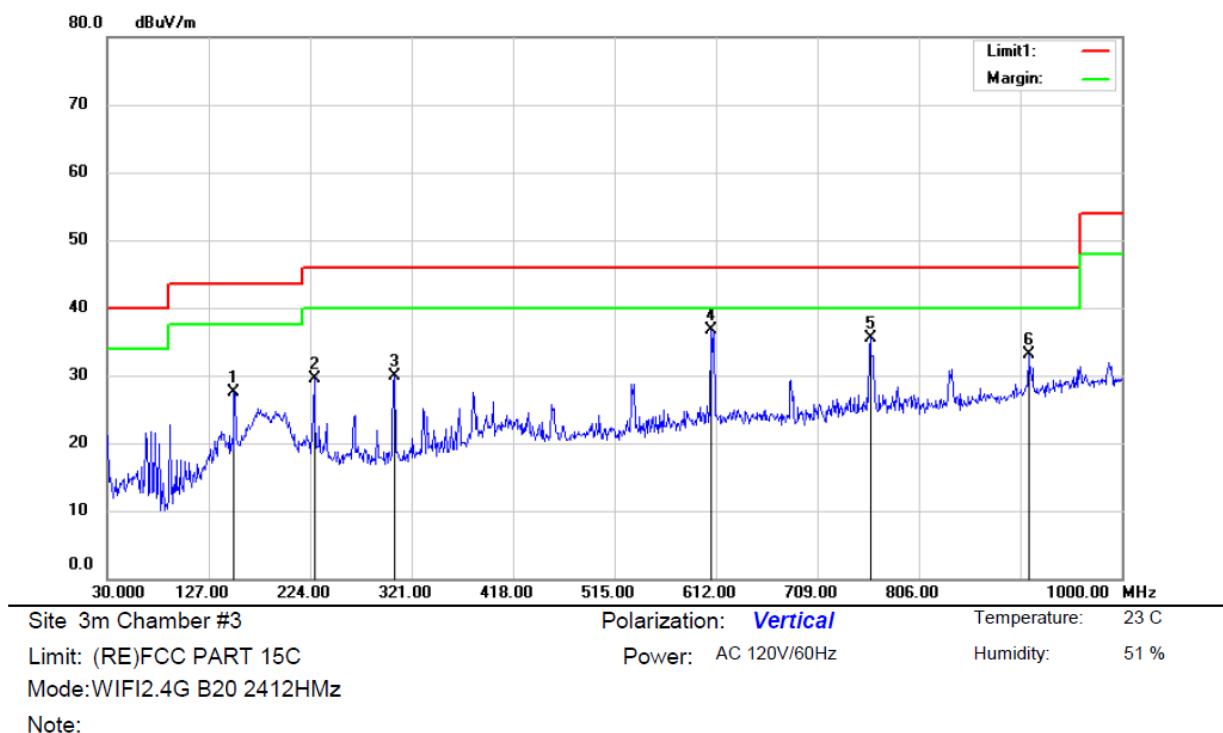


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		151.2500	46.58	-19.07	27.51	43.50	-15.99	QP		
2		227.8800	44.01	-14.54	29.47	46.00	-16.53	QP		
3		304.5100	42.27	-12.35	29.92	46.00	-16.08	QP		
4	*	607.1500	41.59	-4.83	36.76	46.00	-9.24	QP		
5		759.4400	38.08	-2.48	35.60	46.00	-10.40	QP		
6		910.7600	33.07	0.00	33.07	46.00	-12.93	QP		

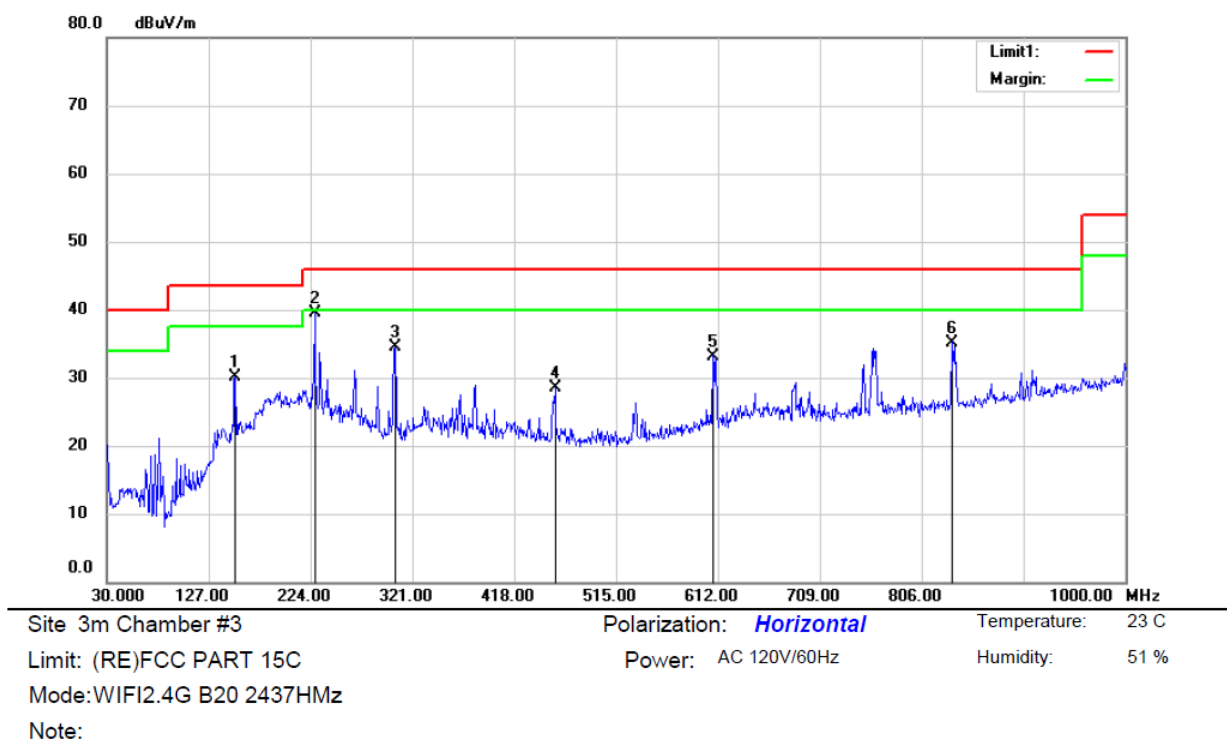


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		152.2200	49.11	-18.99	30.12	43.50	-13.38	QP		
2	*	227.8800	54.00	-14.54	39.46	46.00	-6.54	QP		
3		304.5100	46.77	-12.35	34.42	46.00	-11.58	QP		
4		456.8000	37.03	-8.48	28.55	46.00	-17.45	QP		
5		607.1500	38.03	-4.83	33.20	46.00	-12.80	QP		
6		835.1000	36.75	-1.55	35.20	46.00	-10.80	QP		

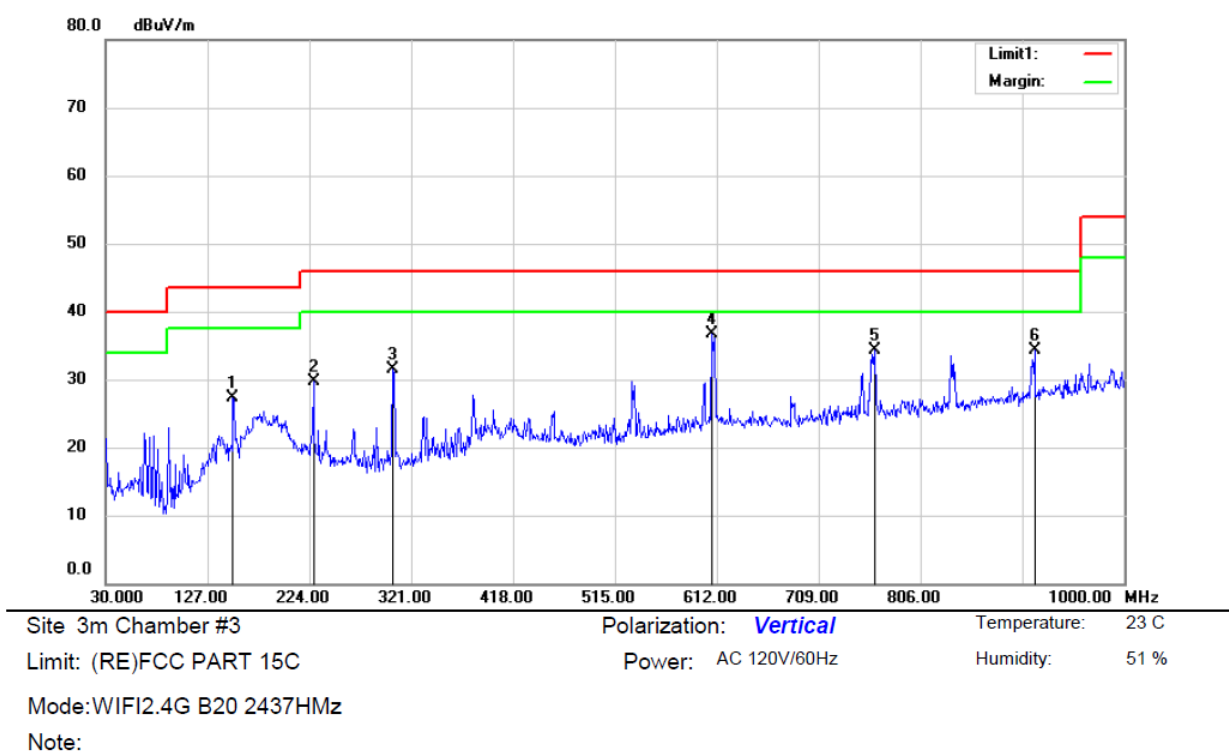

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		151.2500	46.43	-19.07	27.36	43.50	-16.14	QP		
2		227.8800	44.33	-14.54	29.79	46.00	-16.21	QP		
3		303.5400	43.81	-12.38	31.43	46.00	-14.57	QP		
4	*	607.1500	41.61	-4.83	36.78	46.00	-9.22	QP		
5		762.3500	36.75	-2.49	34.26	46.00	-11.74	QP		
6		914.6400	34.29	0.05	34.34	46.00	-11.66	QP		

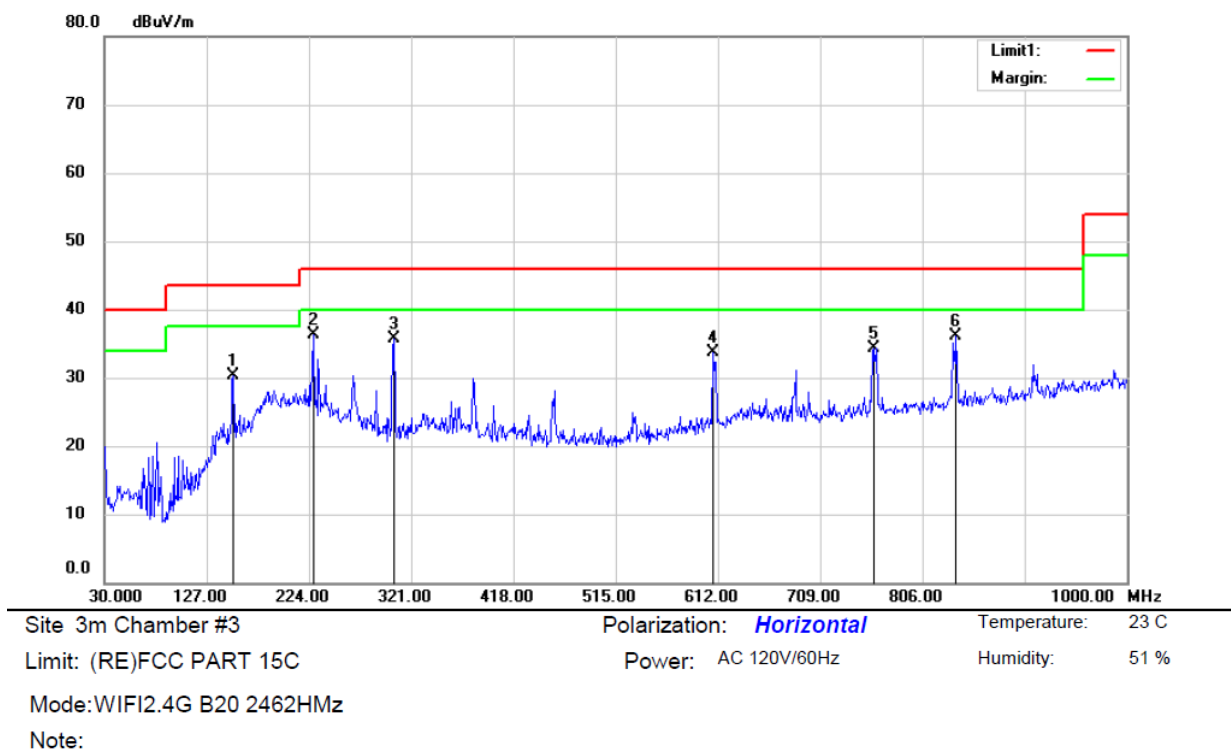

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		152.2200	49.25	-18.99	30.26	43.50	-13.24	QP		
2	*	227.8800	50.91	-14.54	36.37	46.00	-9.63	QP		
3		304.5100	47.98	-12.35	35.63	46.00	-10.37	QP		
4		607.1500	38.59	-4.83	33.76	46.00	-12.24	QP		
5		759.4400	36.74	-2.48	34.26	46.00	-11.74	QP		
6		838.0100	37.50	-1.46	36.04	46.00	-9.96	QP		

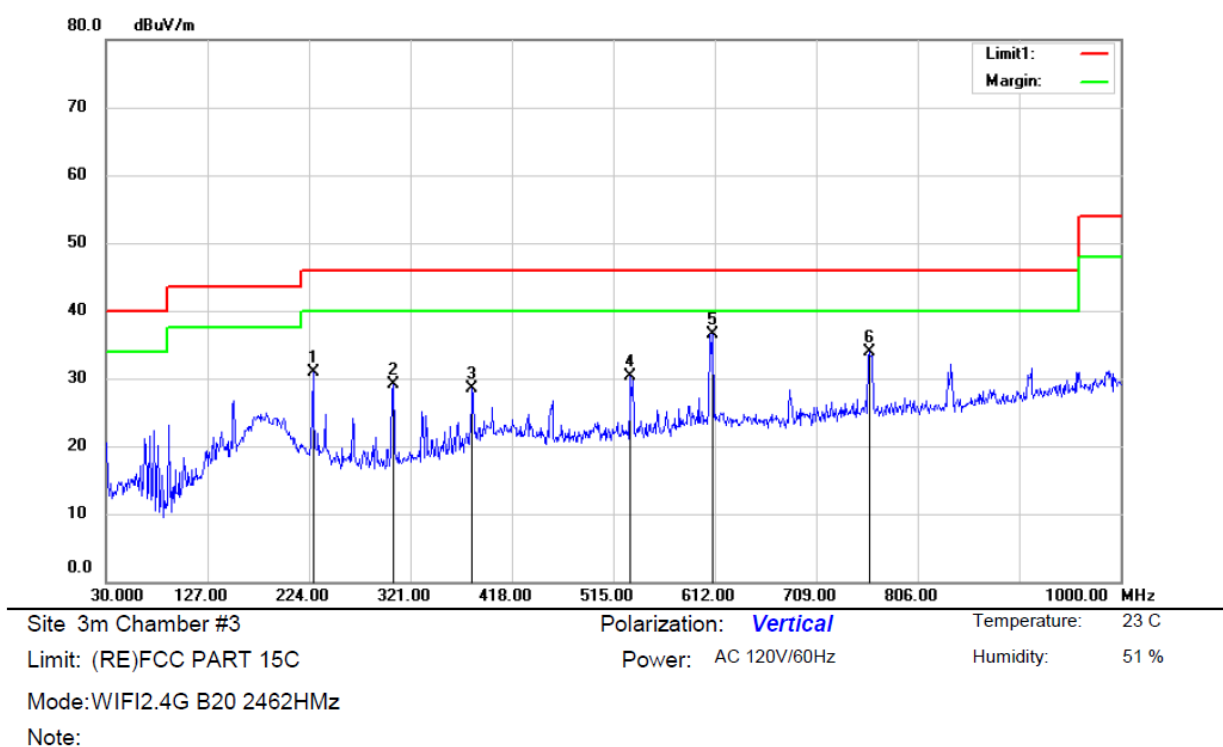

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		227.8800	45.42	-14.54	30.88	46.00	-15.12	QP		
2		304.5100	41.50	-12.35	29.15	46.00	-16.85	QP		
3		380.1700	38.35	-9.93	28.42	46.00	-17.58	QP		
4		531.4900	36.90	-6.68	30.22	46.00	-15.78	QP		
5	*	610.0600	41.27	-4.75	36.52	46.00	-9.48	QP		
6		759.4400	36.29	-2.48	33.81	46.00	-12.19	QP		

8.7 CONDUCTED EMISSIONS TEST

8.7.1 Applicable Standard

According to FCC Part 15.207(a)

8.7.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.7.3 Test Configuration

Test according to clause 7.3conducted emission test setup


8.7.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.
Maximum procedure was performed on the highest emissions to ensure EUT compliance.
Repeat above procedures until all frequency measured were complete.

8.7.5 Test Results

Pass


AC 120V/60Hz have been tested, and the worst result recorded was report as below:

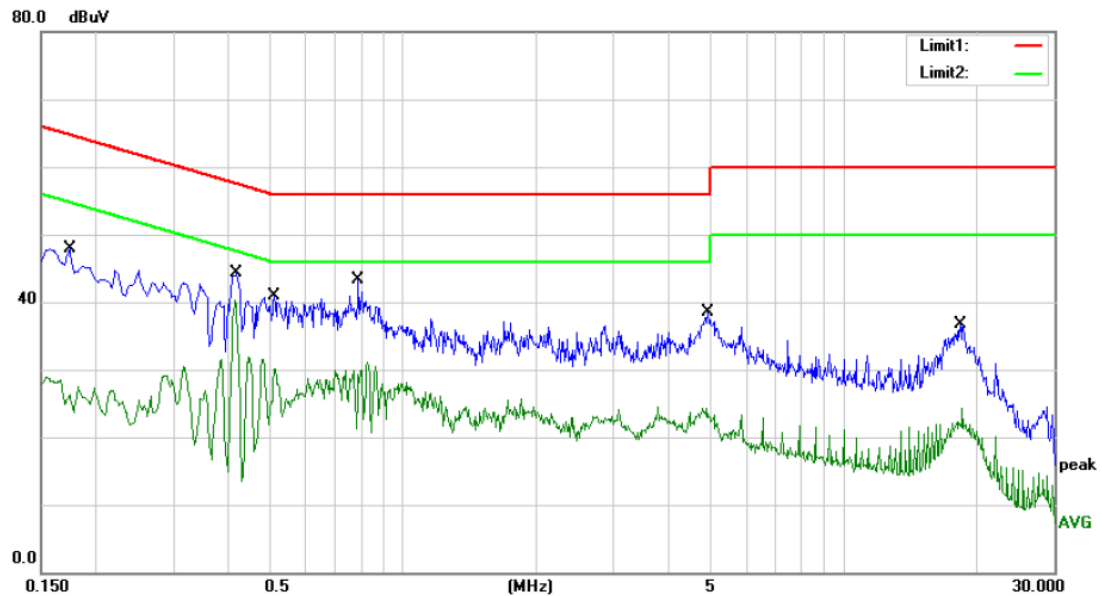

Site Conduction #1
Limit: (CE)FCC PART 15 C
Mode: ON-WIFI 802.11 b/g/n mode
Note:

Phase: **L1**
Power: AC 120V/60Hz
Temperature: 24.9
Humidity: 54 %

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.1740	38.32	9.61	47.93	64.77	-16.84	QP	
2	0.1740	19.34	9.61	28.95	54.77	-25.82	AVG	
3	0.4180	34.54	9.68	44.22	57.49	-13.27	QP	
4 *	0.4180	30.53	9.68	40.21	47.49	-7.28	AVG	
5	0.5100	31.13	9.70	40.83	56.00	-15.17	QP	
6	0.5100	21.89	9.70	31.59	46.00	-14.41	AVG	
7	0.7900	33.63	9.70	43.33	56.00	-12.67	QP	
8	0.7900	21.35	9.70	31.05	46.00	-14.95	AVG	
9	4.9180	28.60	9.80	38.40	56.00	-17.60	QP	
10	4.9180	14.56	9.80	24.36	46.00	-21.64	AVG	
11	18.3380	26.34	10.40	36.74	60.00	-23.26	QP	
12	18.3380	13.81	10.40	24.21	50.00	-25.79	AVG	

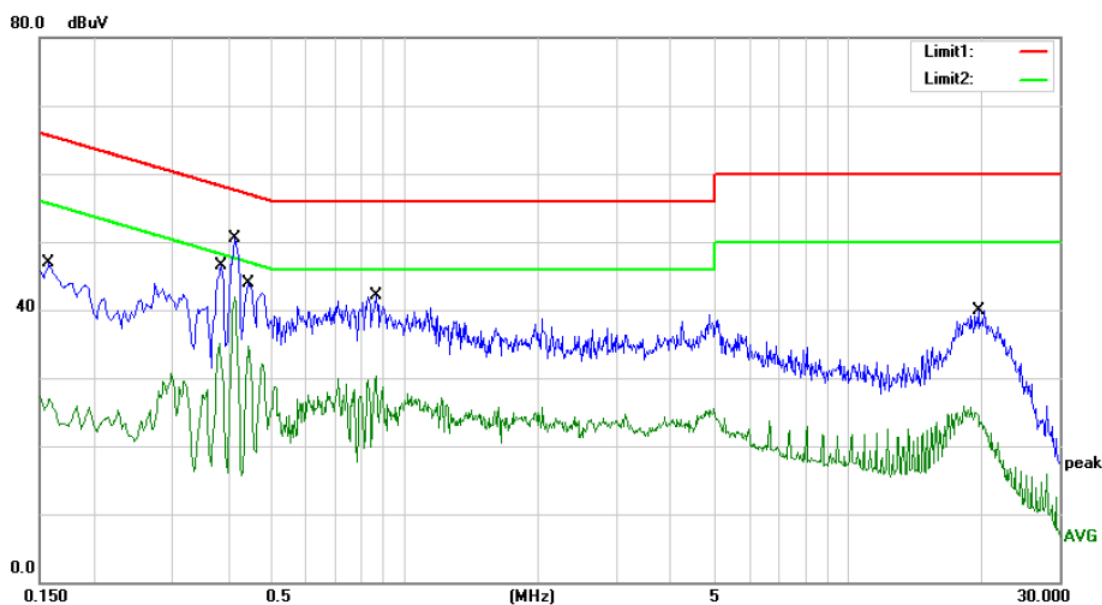

Site Conduction #1

Phase: **N**

Temperature: 24.9

Limit: (CE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 54 %

Mode: ON-WIFI 802.11 b/g/n mode

Note:

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.1580	37.23	9.60	46.83	65.57	-18.74	QP	
2	0.1580	18.16	9.60	27.76	55.57	-27.81	AVG	
3	0.3860	36.82	9.67	46.49	58.15	-11.66	QP	
4	0.3860	25.42	9.67	35.09	48.15	-13.06	AVG	
5	0.4140	40.77	9.68	50.45	57.57	-7.12	QP	
6 *	0.4140	32.23	9.68	41.91	47.57	-5.66	AVG	
7	0.4460	34.26	9.68	43.94	56.95	-13.01	QP	
8	0.4460	25.03	9.68	34.71	46.95	-12.24	AVG	
9	0.8620	32.30	9.70	42.00	56.00	-14.00	QP	
10	0.8620	20.55	9.70	30.25	46.00	-15.75	AVG	
11	19.6780	29.45	10.48	39.93	60.00	-20.07	QP	
12	19.6780	15.42	10.48	25.90	50.00	-24.10	AVG	

8.8 ANTENNA APPLICATION

8.8.1 Antenna Requirement

Standard	Requirement
FCC CRF Part15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

For intentional device, according to RSS-Gen Issue 4 Section 8.3:

The applicant for equipment certification, as per RSP-100, must provide a list of all antenna types that may be used with the licence-exempt transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna.

Licence-exempt transmitters that have received equipment certification may operate with different types of antennas. However, it is not permissible to exceed the maximum equivalent isotropically radiated power (e.i.r.p.) limits specified in the applicable standard (RSS) for licence-exempt apparatus.

RSS-247 Section 5.4

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

8.8.2 Result

The EUT has a metal antennas for WIFI, the antenna max gain is 2.6 dBi,

Note:

- ☒ Antenna use a permanently attached antenna which is not replaceable.
- ☐ Not using a standard antenna jack or electrical connector for antenna replacement
- ☐ The antenna has to be professionally installed (please provide method of installation)

which in accordance to section 15.203, please refer to the internal photos.