Shenzhen Global Test Service Co.,Ltd.



1F, Building No. 13A, Zhonghaixin Science and Technology City, No.12,6 Road, Ganli Industrial Park, Buji Street, Longgang District, Shenzhen, Guangdong

FCC PART 22/24 TEST REPORT

FCC Part 22 /Part 24

 Report Reference No......
 GTSR16090082-01

 FCC ID......
 2AJZ5-IOBDC2

Compiled by

(position+printed name+signature)..: File administrators Jimmy Wang

Supervised by

(position+printed name+signature)..: Test Engineer Peter Xiao

Approved by

(position+printed name+signature)..: Manager Sam Wang

Representative Laboratory Name .: Shenzhen Global Test Service Co.,Ltd.

1F, Building No. 13A, Zhonghaixin Science and Technology City,

Peter Lion

Shenzhen, Guangdong

Applicant's name...... Beijing CarSmart Technology Co.,LTD.

District, Beijing

Test specification

Standard FCC Part 22: PUBLIC MOBILE SERVICES

FCC Part 24: PERSONAL COMMUNICATIONS SERVICES

TRF Originator...... Shenzhen Global Test Service Co.,Ltd.

Master TRF...... Dated 2014-12

Shenzhen Global Test Service Co.,Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description Autofun Box

Trade Mark: /

Manufacturer Dongguan Superior Manufacturing Technology Company

Limited

Model/Type reference..... iOBD-C2

Listed Models

Ratings DC 12V 80mA

Modulation: GMSK

GPRS...... Supported

Hardware versioni iOBD-C2_V1.5

Software version V1.2

Result..... PASS

Report No.: GTSR16090082-01 Page 2 of 45

TEST REPORT

Test Report No. :	GTSR16090082-01	Oct. 24, 2016
	G13K10090002-01	Date of issue

Equipment under Test : Autofun Box

Model /Type : iOBD-C2

Listed Models : /

Applicant : Beijing CarSmart Technology Co.,LTD.

Address : Room 2112,19th Floor, Xueqing Road (Block B) No.38,

Haidian District, Beijing

Manufacturer : Dongguan Superior Manufacturing Technology

Company Limited

Address : No.2,2 of Hong Ye Road North,Tangxia Town,Dongguan

City, Guangdong, P.R. China

The test report merely corresponds to the test sample.

It is not per mitted to copy extracts of these test result without the written permission of the test laboratory.

Report No.: GTSR16090082-01 Page 3 of 45

Contents

<u>1</u>	TEST STANDARDS	<u> 4</u>
2	SUMMARY	5
<u> </u>	30 WI WIAR I	<u> J</u>
2.1	General Remarks	5
2.2	Product Description	5
2.3	Equipment under Test	6
2.4	Short description of the Equipment under Test (EUT)	6
2.5	EUT configuration	6
2.6	Related Submittal(s) / Grant (s)	6
2.7	Modifications	6
2.8	General Test Conditions/Configurations	7
2.9	NOTE	7
<u>3</u>	TEST ENVIRONMENT	8
3.1	Address of the test laboratory	8
3.2	Test Facility	8
3.3	Environmental conditions	8
3.4	Test Description	9
3.5	Equipments Used during the Test	10
<u>4</u>	TEST CONDITIONS AND RESULTS	11
4.1	Output Power	11
4.2	Radiated Spurious Emssion	14
4.3	Occupied Bandwidth and Emission Bandwidth	17
4.4	Band Edge Complicance	20
4.5	Spurious Emssion on Antenna Port	23
4.6	Frequency Stability Test	36
4.7	Peak-to-Average Ratio (PAR)	38
<u>5</u>	TEST SETUP PHOTOS OF THE EUT	41
6	EXTERNAL AND INTERNAL PHOTOS OF THE EUT	42

Report No.: GTSR16090082-01 Page 4 of 45

1 TEST STANDARDS

The tests were performed according to following standards:

FCC Part 22 (10-1-12 Edition): PRIVATE LAND MOBILE RADIO SERVICES.

FCC Part 24(10-1-12 Edition): PUBLIC MOBILE SERVICES

<u>TIA/EIA 603 D June 2010:</u> Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

Report No.: GTSR16090082-01 Page 5 of 45

2 SUMMARY

2.1 General Remarks

Date of receipt of test sample	:	Sep. 14, 2016
Testing commenced on	:	Sep. 14, 2016
Testing concluded on	:	Oct. 24, 2016

2.2 Product Description

Product Name:	Autofun Box
Trade Mark:	1
Model/Type reference:	iOBD-C2
List Model:	1
Power supply:	DC 12V
Modilation Type	GMSK
Antenna Type	Internal antenna
GPS function	Supported
GPRS	Supported
GPRS Power Class	GSM850:Power Class 4/ PCS1900:Power Class 1
GPRS Operation Frequency	GSM850 :824.2MHz-848.8MHz/PCS1900:1850.2MHz-1909.8MHz
GPRS Operation Frequency Band	GPRS850/GPRS1900
GPRS Multislot Class	Multi-slot Class 12
Extreme temp. Tolerance	-30°C to +50°C
GPRS operation mode	Class B
Antenna gain:	GSM850: -0.81dbi,DCS1900: -1.04dbi

Report No.: GTSR16090082-01 Page 6 of 45

2.3 Equipment under Test

Power supply system utilised

Power supply voltage	0	120V / 60 Hz	0	230V / 50Hz
	•	12 V DC	0	24 V DC
	0	Other (specified in blank bel	ow)

Test frequency list

Test Mode	TX/RX	RF Channel				
1 est Mode	I A/KA	Low(L)	Middle (M)	High (H)		
	TX	Channel 128	Channel 190	Channel 251		
GPRS 850	17	824.2 MHz	836.6 MHz	848.8 MHz		
GFR3 000	RX	Channel 128	Channel 190	Channel 251		
	KA.	869.2 MHz	881.6 MHz	893.8 MHz		
Test Mode	Test Mode TX/RX		RF Channel			
1 est Mode	I A/KA	Low(L)	Middle (M)	High (H)		
	TX	Channel 512	Channel 661	Channel 810		
CDDS 1000	GPRS 1900	1850.2 MHz	1880.0 MHz	1909.8 MHz		
GFI/O 1900	RX	Channel 512	Channel 661	Channel 810		
	IVA	1930.2 MHz	1960.0 MHz	1989.8 MHz		

2.4 Short description of the Equipment under Test (EUT)

This is a Autofun Box.

For more details, refer to the user's manual of the EUT.

2.5 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer
- \bigcirc supplied by the lab

C	/	M/N :	1
		Manufacturer:	1

2.6 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2AJZ5-IOBDC2 filing to comply with FCC Part 22 and Part 24 Rules

2.7 Modifications

No modifications were implemented to meet testing criteria.

Report No.: GTSR16090082-01 Page 7 of 45

2.8 General Test Conditions/Configurations

2.8.1 Test Modes

NOTE: The test mode(s) are selected according to relevant radio technology specifications.

Test Mode	GPRS	ı
-----------	------	---

2.8.2 Test Environment

Environment Parameter	Selected Values During Tests			
Relative Humidity	Ambient			
Temperature	TN	Ambient		
	VL	10.8V		
Voltage	VN	12.0V		
_	VH	13.2V		

NOTE: VL=lower extreme test voltage VN=nominal voltage VH=upper extreme test voltage TN=normal temperature

2.9 NOTE

Function	Test Standards	Reference Report
GPRS	FCC Part 22 FCC Part 24	GTSR16090082-01
EMF	47CFR §1.1310 47CFR §2.1091	GTSR16090082-02

Report No.: GTSR16090082-01 Page 8 of 45

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.

1F, Building No. 13A, Zhonghaixin Science and Technology City, No.12,6 Road, Ganli Industrial Park, Buji Street, Longgang District, Shenzhen, Guangdong

Shenzhen CTL Testing Technology Co., Ltd

1/F.-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 964637

Shenzhen Global Test Service Co.,Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 964637, Jul 24, 2015.

CNAS-Lab Code: L8169

Shenzhen Global Test Service Co.,Ltd. has been as sessed and proved to be in compliance with CNAS-CL01 Accreditation C riteria for T esting and C alibration La boratories (identical to ISO/IEC 17 025: 2005 General Requirements) for the Competence of Testing and C alibration Laboratories. Date of Registration: Dec. 11, 2015. Valid time is until Dec. 10, 2018.

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

Report No.: GTSR16090082-01 Page 9 of 45

3.4 Test Description

3.4.1 Cellular Band (824-849MHz paired with 869-894MHz)

Test Item	FCC Rule No.	Requirements	Verdict
Effective(Isotropic) Radiated Output Power	§2.1046, §22.913	FCC: ERP ≤ 7W.	Pass
Modulation Characteristics	§2.1047	Digital modulation	N/A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Pass
Band Edges Compliance	§2.1051, §22.917	≤-13dBm/1%*EBW, in 1MHz bands immediately outside and adjacent to The frequency block.	Pass
Spurious Emission at Antenna Terminals	§2.1051, §22.917	FCC: ≤ -13dBm/100kHz, from 9kHz to 10th harmonics but outside authorized operating frequency ranges.	Pass
Field Strength of Spurious Radiation	§2.1053, §22.917	FCC: ≤ -13dBm/100kHz.	Pass
Frequency Stability	§2.1055, §22.355	≤ ±2.5ppm.	Pass
NOTE 1: For the verdict, t	he "N/A" denotes	s "not applicable", the "N/T" de notes "not tested".	

3.4.2 PCS Band (1850-1915MHz paired with 1930-1995MHz)

Test Item	FCC Rule No.	Requirements	Verdict
Effective(Isotropic) Radiated Output Power	§2.1046, §24.232	EIRP ≤ 2W	Pass
Peak-Average Ratio	§2.1046, §24.232	FCC:Limit≤13dB	Pass
Modulation Characteristics	§2.1047	Digital modulation	N/A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Pass
Band Edges Compliance	§2.1051, §24.238	≤ -13dBm/1%*EBW, In 1MHz bands immediately outside and adjacent to The frequency block.	Pass
Spurious Emission at Antenna Terminals	§2.1051, §24.238	≤-13dBm/1MHz, from 9kHz to10th harmonics but outside authorized Operating frequency ranges.	Pass
Field Strength of Spurious Radiation	§2.1053, §24.238	≤ -13dBm/1MHz.	Pass
Frequency Stability	§2.1055, §24.235	FCC: within authorized frequency block.	Pass

Remark:

^{1.} The measurement uncertainty is not included in the test result.

Report No.: GTSR16090082-01 Page 10 of 45

3.5 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.12	2016/06/02	2017/06/01
LISN	R&S	ESH2-Z5	860014/010	2016/06/02	2017/06/01
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2016/06/02	2017/06/01
Bilog Antenna	Sunol Sciences Corp.	JB1	A061719	2016/06/02	2017/06/01
EMI Test Receiver	R&S	ESCI	103710	2016/06/02	2017/06/01
Spectrum Analyzer	Agilent	N9030A	MY49430428	2016/05/21	2017/05/20
Controller	EM Electronics	Controller EM 1000	N/A	2016/05/21	2017/05/20
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2016/05/19	2017/05/18
Horn Antenna	Sunol Sciences Corp.	DRH-118	A052014	2016/05/19	2017/05/18
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2016/05/19	2017/05/18
Amplifier	Agilent	8349B	3008A02306	2016/05/19	2017/05/18
Amplifier	Agilent	8447D	2944A10176	2016/05/19	2017/05/18
Temperature/ Humidity Meter	Gangxing	CTH-608	02	2016/05/20	2017/05/19
High-Pass Filter	K&L	9SH10- 2700/X12750-O/O	N/A	2016/05/20	2017/05/19
High-Pass Filter	K&L	41H10- 1375/U12750-O/O	N/A	2016/05/20	2017/05/19
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	2016/06/02	2017/06/01
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2016/06/02	2017/06/01
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2016/06/02	2017/06/01
RF Cable	Megalon	RF-A303	N/A	2016/06/02	2017/06/01
Power Sensor	R&S	NRP-Z4	823.3618.03	2016/06/02	2017/06/01
Power Meter	R&S	NRVS	1020.1809.02	2016/06/02	2017/06/01

Report No.: GTSR16090082-01 Page 11 of 45

4 TEST CONDITIONS AND RESULTS


4.1 Output Power

TEST APPLICABLE

During the process of testing, the EUT was controlled via R&S Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

4.1.1 Conducted Output Power

TEST CONFIGURATION

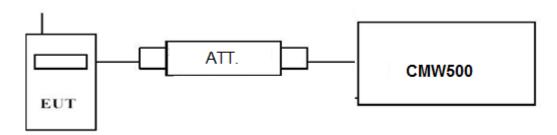

TEST PROCEDURE

Conducted Power Measurement:

- a) Place the EUT on a bench and set it in transmitting mode.
- b) Connect a low loss RF cable from the antenna port to a CMW500 by an Att.
- c) EUT Communicate with CMW500 then selects a channel for testing.
- d) Add a correction factor to the display CMW500, and then test.

GSM850						
Function	Power step Nominal output Power &Multislot Operation					
GSM	5	33dBm(2W)	4	1		
GPRS	3	33dBm(2W)	12	В		

PCS1900						
Function	Power step	Nominal output power (dBm)	Power &Multislot class	Operation class		
GSM	0	30dBm(1W)	1	/		
GPRS	3	30dBm(1W)	12	В		

		Burst A	verage Conducted pow	ver (dBm)		
GSI	И 850	Channel/Frequency(MHz)				
		128/824.2	190/836.6	251/848.8		
	1TX slot	32.61	32.52	32.67		
GPRS	2TX slot	30.12	30.54	30.47		
(GMSK)	3TX slot	30.28	30.17	30.24		
	4TX slot	29.34	29.41	29.62		
		Burst Average Conducted power (dBm)				
PCS	1900	Channel/Frequency(MHz)				
		512/1850.2	661/1880	810/1909.8		
	1TX slot	30.87	30.92	30.97		
GPRS	2TX slot	29.45	29.38	29.62		
(GMSK)	3TX slot	27.64	27.81	27.52		
	4TX slot	27.09	27.34	27.28		

Report No.: GTSR16090082-01 Page 12 of 45


4.1.2 Radiated Output Power

TEST DESCRIPTION

This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(c) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(e) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

TEST CONFIGURATION

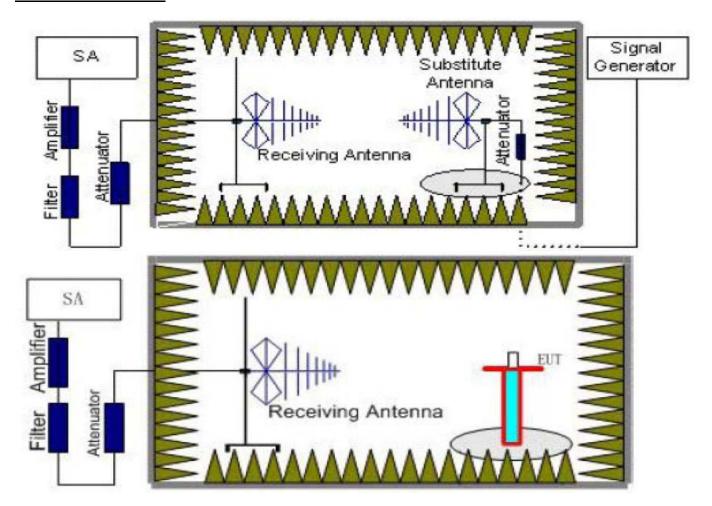

TEST PROCEDURE

- 1. EUT was placed on a 0.80 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 0.80m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
- 2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
- 4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the

Report No.: GTSR16090082-01 Page 13 of 45

substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

 A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}) ,the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

Power(EIRP)= P_{Mea} - P_{Ag} - P_{cl} + G_a

We used SMF100A micowave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substituation test; The measurement results are amend as described below: $Power(EIRP) = P_{Mea} - P_{cl} + G_{a}$

- 6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- 7. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

TEST LIMIT

Note: We test the H direction and V direction, V direction is worse.

According to 22.913(a) and 24.232(c), the ERP should be not exceed following table limits:

GSM850(GPRS850,EDGE850)						
Function Power Step Burst Peak ERP (dBm)						
GSM	5	≤38.45dBm (7W)				
GPRS	3	≤38.45dBm (7W)				

PCS1900(GPRS1900,EDGE1900)						
Function Power Step Burst Peak EIRP (dBm)						
GSM	0	≤33dBm (2W)				
GPRS	3	≤33dBm (2W)				

TEST RESULTS

Remark:

- 1. We were tested all Configuration refer 3GPP TS151 010.
- 2. $EIRP=P_{Mea}(dBm)-P_{cl}(dB)+P_{Ag}(dB)+G_{a}(dBi)$
- 3. ERP = EIRP 2.15dBi as EIRP by subtracting the gain of the dipole.

Test site: Shenzhen CTL Testing Technology Co., Ltd

Note: We tesed Horizontal and Vertical, and Recorded the worst data at the Vertical

GPRS 850

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	Correction (dB)	P _{Ag} (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
824.20	-13.72	2.42	8.45	2.15	36.82	26.98	38.45	11.47	V
836.60	-13.53	2.46	8.45	2.15	36.82	27.13	38.45	11.32	V
848.80	-13.48	2.53	8.36	2.15	36.82	27.02	38.45	11.43	V

GPRS 1900

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1850.20	-15.86	3.41	10.24	33.60	24.57	33.01	8.44	V
1880.00	-15.72	3.49	10.24	33.60	24.63	33.01	8.38	V
1909.80	-15.92	3.55	10.23	33.60	24.36	33.01	8.65	V


Report No.: GTSR16090082-01 Page 14 of 45

4.2 Radiated Spurious Emssion

TEST APPLICABLE

According to the TIA/EIA 603D:2010 test method, The Receiver or Spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set as outlined in Part 24.238 and Part 22.917. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of PCS1900 and GSM850.

TEST CONFIGURATION

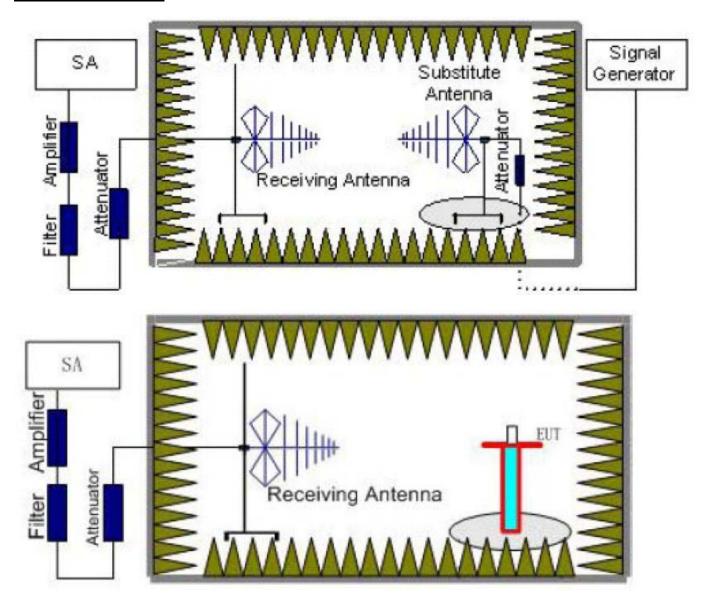

TEST PROCEDURE

- 1. EUT was placed on a 0.80 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 0.80m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
- 2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

Report No.: GTSR16090082-01 Page 15 of 45

3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).

- 4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- 5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}) ,the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test. The measurement results are obtained as described below: Power(EIRP)=P_{Mea}- P_{Ag} P_{cl} + G_a
- 6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- 7. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi.

8. In order to make sure test results more clearly, we set frequency range and sweep time for difference frequency range as follows table:

Working Frequency	Subrange (GHz) RBW VBW		Sweep time (s)	
	0.00009~0.15	1KHz	3KHz	30
	0.00015~0.03	10KHz	30KHz	10
	0.03~1	100KHz	300KHz	10
GSM 850	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~10	1 MHz	3 MHz	3
	0.00009~0.15	1KHz	3KHz	30
	0.00015~0.03	10KHz	30KHz	10
	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
PCS 1900	2~5	1 MHz	3 MHz	3
PCS 1900	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2

TEST LIMITS

According to 24.238 and 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB

The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Frequency	Channel	Frequency Range	Verdict
	Low	9KHz-10GHz	PASS
GSM 850	Middle	9KHz -10GHz	PASS
	High	9KHz -10GHz	PASS
	Low	9KHz -20GHz	PASS
PCS 1900	Middle	9KHz -20GHz	PASS
	High	9KHz -20GHz	PASS

Report No.: GTSR16090082-01 Page 16 of 45

TEST RESULTS

Remark:

- 1. We were tested all refer 3GPP TS151 010.
- 2. EIRP= $P_{Mea}(dBm)-P_{cl}(dB)+G_a(dBi)$
- 3. We were not recorded other points as values lower than limits.
- 4. Margin = Limit EIRP

Test site: Shenzhen CTL Testing Technology Co., Ltd

GPRS 850_ Low Channel

Frequency (MHz)	P _{Mea} (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1648.4	-31.82	3.00	3.00	9.58	-25.24	-13.00	12.24	Н
2472.6	-37.65	3.03	3.00	10.72	-29.96	-13.00	16.96	Н
1648.4	-30.54	3.00	3.00	9.68	-23.86	-13.00	10.86	V
2472.6	-38.62	3.03	3.00	10.72	-30.93	-13.00	17.93	V

GPRS 850_ Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.2	-30.87	3.00	3.00	9.58	-24.29	-13.00	11.29	Н
2509.8	-39.41	3.03	3.00	10.72	-31.72	-13.00	18.72	Н
1673.2	-31.93	3.00	3.00	9.68	-25.25	-13.00	12.25	V
2509.8	-38.45	3.03	3.00	10.72	-30.76	-13.00	17.76	V

GPRS 850_ High Channel

Frequency (MHz)	P _{Mea} (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1697.6	-32.88	3.00	3.00	9.58	-26.30	-13.00	13.30	Н
2546.4	-39.29	3.03	3.00	10.72	-31.60	-13.00	18.60	Н
1697.6	-31.65	3.00	3.00	9.68	-24.97	-13.00	11.97	V
2546.4	-37.44	3.03	3.00	10.72	-29.75	-13.00	16.75	V

GPRS 1900_ Low Channel

Frequency (MHz)	P _{Mea} (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3700.4	-33.72	4.39	3.00	12.34	-25.77	-13.00	12.77	Н
5550.6	-39.75	5.31	3.00	13.52	-31.54	-13.00	18.54	Н
3700.4	-31.64	4.39	3.00	12.34	-23.69	-13.00	10.69	V
5550.6	-40.83	5.31	3.00	13.52	-32.62	-13.00	19.62	V

GPRS 1900_ Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-37.84	4.41	3.00	12.34	-29.91	-13.00	16.91	Н
5640.0	-41.95	5.38	3.00	13.58	-33.75	-13.00	20.75	Н
3760.0	-38.74	4.41	3.00	12.34	-30.81	-13.00	17.81	V
5640.0	-40.47	5.38	3.00	13.58	-32.27	-13.00	19.27	V

GPRS 1900_ High Channel

Frequency (MHz)	P _{Mea} (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3819.6	-36.93	4.45	3.00	12.45	-28.93	-13.00	15.93	Н
5729.4	-41.57	5.47	3.00	13.66	-33.38	-13.00	20.38	Н
3819.6	-37.28	4.45	3.00	12.45	-29.28	-13.00	16.28	V
5729.4	-40.77	5.48	3.00	13.66	-32.59	-13.00	19.59	V


Report No.: GTSR16090082-01 Page 17 of 45

4.3 Occupied Bandwidth and Emission Bandwidth

TEST APPLICABLE

Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of PCS1900 band and GSM850 band. The table below lists the measured 99% Bandwidth and -26dBc Bandwidth.

TEST CONFIGURATION

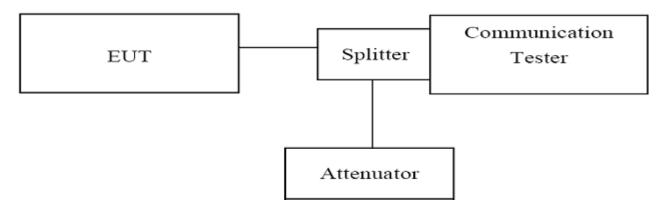



TEST PROCEDURE

- 1. The EUT was set up for the max output power with pseudo random data modulation;
- 2. The Occupied bandwidth and Emission Bandwidth were measured with Aglient Spectrum Analyzer N9030A (peak);
- 3. Set RBW=5.1KHz,VBW=51KHz,Span=1MHz,SWT=500ms;
- 4. Set SPA Max hold and View, Set 99% Occupied Bandwidth/ Set -26dBc Occupied Bandwidth
- These measurements were done at 3 frequencies, 1850.20 MHz, 1880.00 MHz and 1909.80 MHz for PCS1900 band; 824.20MHz, 836.60 MHz and 848.80 MHz for GSM850 band. (Low, middle and high of operational frequency range).

	GPRS 850									
Channel Number	Frequency (MHz)	Occupied Bandwidth (99% BW) (kHz)	Emission Bandwidth (26 dBc BW) (kHz)	Verdict						
128	824.20	246.22	315.9	PASS						
190	836.60	247.80	315.6	PASS						
251	848.80	242.62	316.3	PASS						

	GPRS 1900								
Channel Number	Frequency (MHz)	Occupied Bandwidth (99% BW) (kHz)	Emission Bandwidth (26 dBc BW) (kHz)	Verdict					
512	1850.20	249.73	316.8	PASS					
661	1880.00	247.93	314.1	PASS					
810	1909.80	246.95	313.7	PASS					

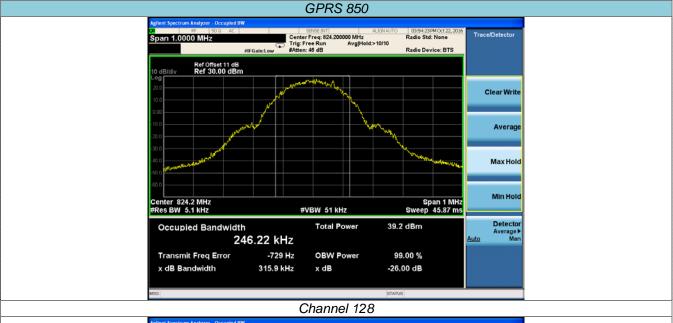


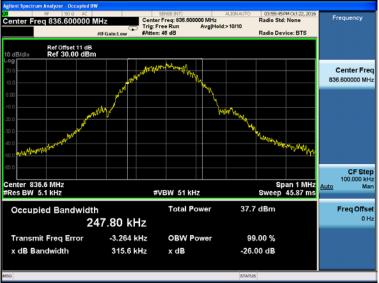



Channel 190



Channel 251

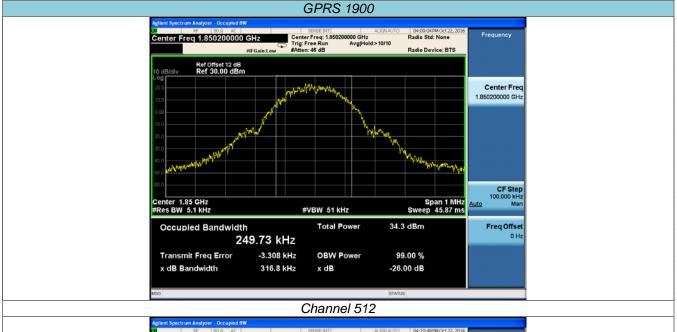

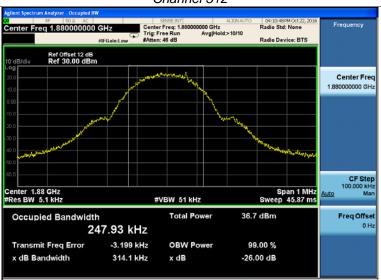

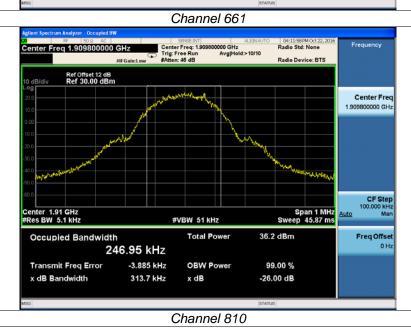


Report No.: GTSR16090082-01 Page 20 of 45

4.4 Band Edge Complicance

TEST APPLICABLE

During the process of testing, the EUT was controlled via Aglient Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation.

TEST CONFIGURATION

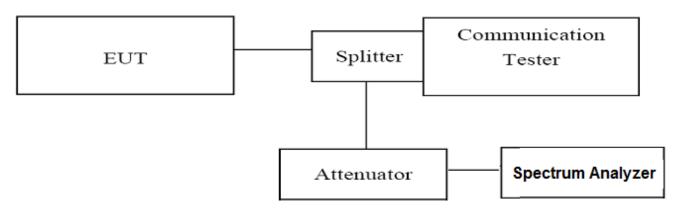


TEST PROCEDURE


- 1. The EUT was set up for the max output power with pseudo random data modulation;
- 2. The power was measured with Aglient Spectrum Analyzer N9030A;
- 3. Set RBW=5.1KHz, VBW=51KHz, Span=2MHz, SWT=300ms, Dector: RMS;
- 4. These measurements were done at 3 frequencies, 1850.20 MHz, 1880.00 MHz and 1909.80 MHz for PCS1900 band; 824.20 MHz, 836.60 MHz and 848.80 MHz for GSM850 band. (bottom, middle and top of operational frequency range).

	GPRS 850								
Channel Number	Erogueney	Measureme	ent Results	Limit	Verdict				
	Frequency (MHz)	Frequency (MHz)	Values (dBm)	(dBm)					
128	824.20	823.99	-14.188	-13.00	PASS				
251	848.80	849.00	-14.751	-13.00	PASS				


	GPRS 1900								
Channel	Erogueney	Measureme	ent Results	Limit	Verdict				
Number	Frequency (MHz)	Frequency (MHz)	Values (dBm)	(dBm)					
512	1850.20	1850.00	-15.492	-13.00	PASS				
810	1909.80	1910.00	-14.772	-13.00	PASS				

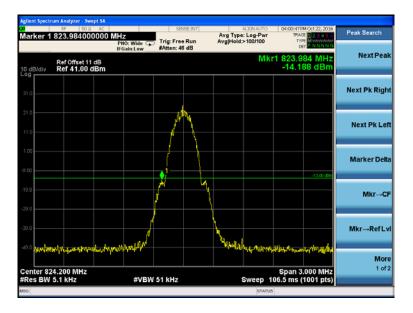


(Channel 128: 824.20MHz @ GPRS 850)

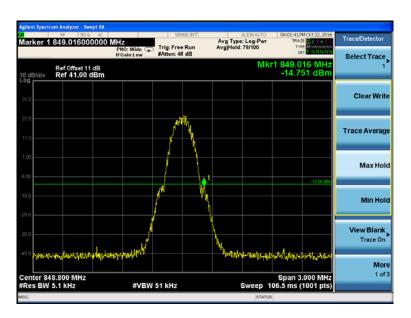

(Channel 251: 848.80MHz @ GPRS 850)

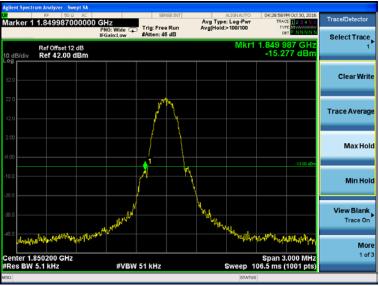

(Channel 512: 1850.20MHz @ GPRS 1900)

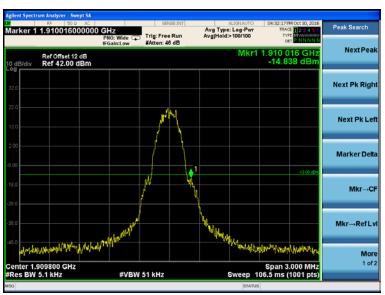

(Channel 810: 1909.80MHz @ GPRS 1900)

Report No.: GTSR16090082-01 Page 23 of 45


4.5 Spurious Emssion on Antenna Port

TEST APPLICABLE

The following steps outline the procedure used to measure the conducted emissions from the EUT.

- 1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 9 KHz to 19.1 GHz, data taken from 9 KHz to 25 GHz. For GSM850, data taken from 9 KHz to 9 GHz.
- 2. The sweep time is set automatically by instrument itself. That should be the optimal sweep time for the span and the RBW. If the sweep time is too short, that is sweep is too fast, the sweep result is not accurate; if the sweep time is too long, that is sweep is too low, some frequency components may be lost. The instrument will give an optimal sweep time according the selected span and RBW.
- The procedure to get the conducted spurious emission is as follows:
 The trace mode is set to MaxHold to get the highest signal at each frequency;
 Wait 25 seconds;
 Get the result.
- 4. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

TEST CONFIGURATION

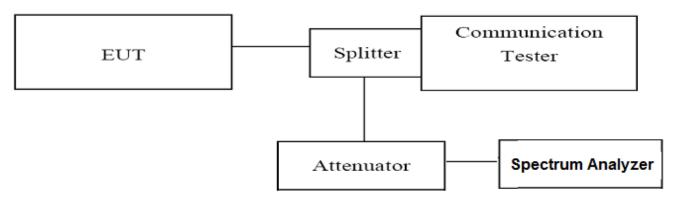

TEST PROCEDURE

- 1. The EUT was set up for the max output power with pseudo random data modulation;
- 2. The power was measured with Agilent Spectrum Analyzer N9030A (peak);
- These measurements were done at 3 frequencies, 1850.20 MHz, 1880.00 MHz and 1909.80 MHz for PCS1900 band; 824.20 MHz, 836.60 MHz and 848.80 MHz for GSM850 band. (Low, middle and high of operational frequency range).

TEST LIMIT

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

4.5.1 For GPRS 850Test Results


A. Test Verdict

Test Mode/ Channel	Frequency (MHz)	Frequency Range	Limit (dBm)	Verdict
		30MHz-1GHz	-13.00	PASS
GPRS 850	824.20	1GHz-2.5GHz	-13.00	PASS
/128	024.20	2.5GHz-7.5GHz	-13.00	PASS
		7.5GHz-10GHz	-13.00	PASS
	836.60	30MHz-1GHz	-13.00	PASS
GPRS 850		1GHz-2.5GHz	-13.00	PASS
/190		2.5GHz-7.5GHz	-13.00	PASS
		7.5GHz-10GHz	-13.00	PASS
		30MHz-1GHz	-13.00	PASS
GPRS 850	848.80	1GHz-2.5GHz	-13.00	PASS
/251	040.00	2.5GHz-7.5GHz	-13.00	PASS
		7.5GHz-10GHz	-13.00	PASS


Note:

- 1. In general, the worse case attenuation requirement shown above was applied.
- 2."---" means that the emission level is too low to be measured or at least 20 dB down than the limit.

B. Test Plots

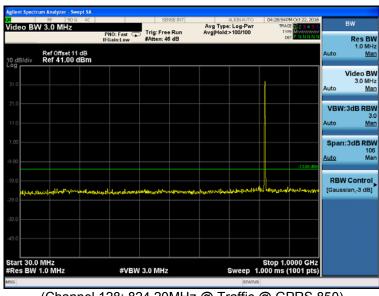

(Channel 128: 824.20MHz @ Traffic @ GPRS 850)

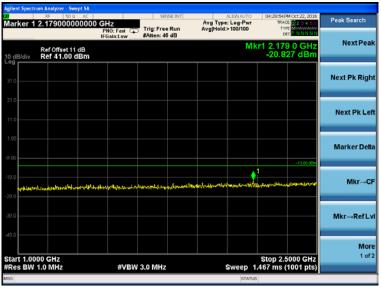


(Channel 128: 824.20MHz @ Traffic @ GPRS 850)




(Channel 128: 824.20MHz @ Traffic @ GPRS 850)



(Channel 128: 824.20MHz @ Traffic @ GPRS 850)

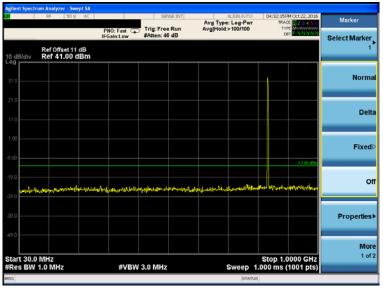

(Channel 190: 836.60MHz @ Traffic @ GPRS 850)

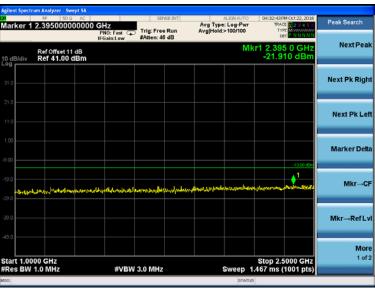


(Channel 190: 836.60MHz @ Traffic @ GPRS 850)




(Channel 190: 836.60MHz @ Traffic @ GPRS 850)




(Channel 190: 836.60MHz @ Traffic @ GPRS 850)

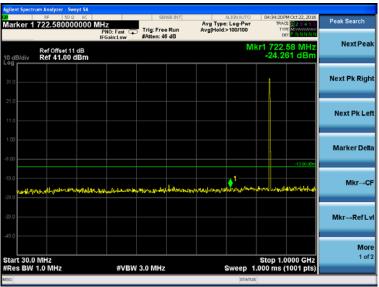

(Channel 251: 848.80MHz @ Traffic @ GPRS 850)

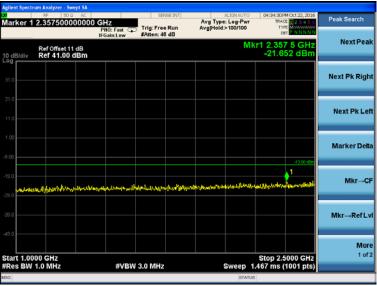

(Channel 251: 848.80MHz @ Traffic @ GPRS 850)

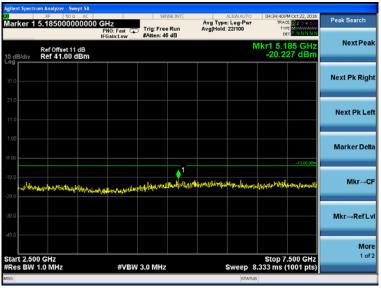

(Channel 251: 848.80MHz @ Traffic @ GPRS 850)



(Channel 251: 848.80MHz @ Traffic @ GPRS 850)


4.5.2 For GPRS 1900 Test Results

A. Test Verdict


Test Mode/ Channel	Frequency (MHz)	Frequency Range	Limit (dBm)	Verdict
		30MHz-1GHz	-13.00	PASS
		1GHz-2.5GHz	-13.00	PASS
GPRS 1900	1850.20	2.5GHz-7.5GHz	-13.00	PASS
/512	1650.20	7.5GHz-10GHz	-13.00	PASS
		10GHz-15GHz	-13.00	PASS
		15GHz-20GHz	-13.00	PASS
	1880.00	30MHz-1GHz	-13.00	PASS
		1GHz-2.5GHz	-13.00	PASS
GPRS 1900		2.5GHz-7.5GHz	-13.00	PASS
/661		7.5GHz-10GHz	-13.00	PASS
		10GHz-15GHz	-13.00	PASS
		15GHz-20GHz	-13.00	PASS
		30MHz-1GHz	-13.00	PASS
		1GHz-2.5GHz	-13.00	PASS
GPRS 1900	1000.00	2.5GHz-7.5GHz	-13.00	PASS
/810	1909.80	7.5GHz-10GHz	-13.00	PASS
		10GHz-15GHz	-13.00	PASS
		15GHz-20GHz	-13.00	PASS

Note:

- 1. In general, the worse case attenuation requirement shown above was applied.
- 2."---" means that the emission level is too low to be measured or at least 20 dB down than the limit.
- B. Test Plots

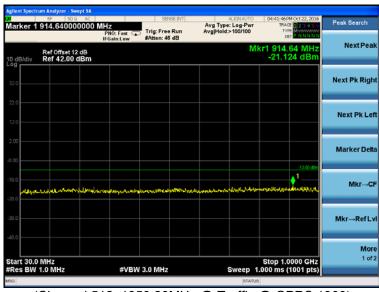

(Channel 512: 1850.20MHz @ Traffic @ GPRS 1900)

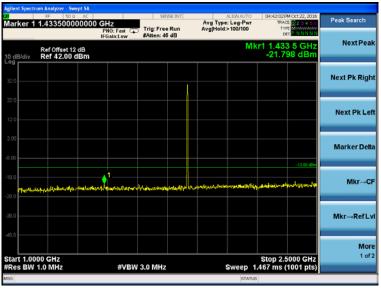

(Channel 512: 1850.20MHz @ Traffic @ GPRS 1900)



(Channel 512: 1850.20MHz @ Traffic @ GPRS 1900)




(Channel 512: 1850.20MHz @ Traffic @ GPRS 1900)



(Channel 512: 1850.20MHz @ Traffic @ GPRS 1900)




(Channel 512: 1850.20MHz @ Traffic @ GPRS 1900)

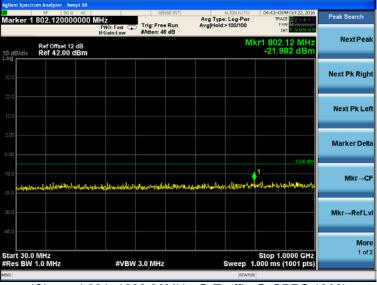

(Channel 661: 1880.00MHz @ Traffic @ GPRS 1900)



(Channel 661: 1880.00MHz @ Traffic @ GPRS 1900)

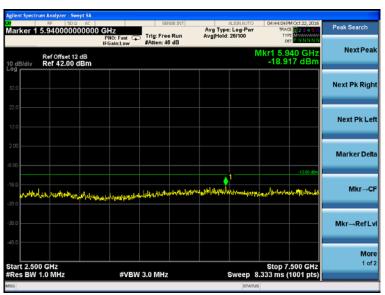

(Channel 661: 1880.00MHz @ Traffic @ GPRS 1900)



(Channel 661: 1880.00MHz @ Traffic @ GPRS 1900)




(Channel 661: 1880.00MHz @ Traffic @ GPRS 1900)



(Channel 661: 1880.00MHz @ Traffic @ GPRS 1900)



(Channel 810: 1909.80MHz @ Traffic @ GPRS 1900)

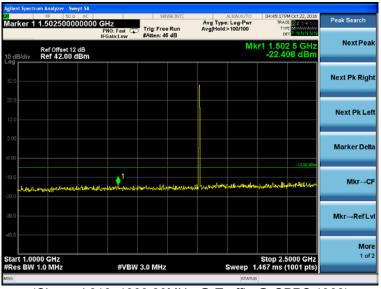

(Channel 810: 1909.80MHz @ Traffic @ GPRS 1900)



(Channel 810: 1909.80MHz @ Traffic @ GPRS 1900)



(Channel 810: 1909.80MHz @ Traffic @ GPRS 1900)



(Channel 810: 1909.80MHz @ Traffic @ GPRS 1900)



(Channel 810: 1909.80MHz @ Traffic @ GPRS 1900)

Report No.: GTSR16090082-01 Page 36 of 45

4.6 Frequency Stability Test

TEST APPLICABLE

1. According to FCC Part 2 Section 2.1055 (a)(1), the frequency stability shall be measured with variation of ambient temperature from -30℃ to +50℃ centigrade.


- 2. According to FCC Part 2 Section 2.1055 (E) (2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacture.
- 3. Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried voltage equipment and the end voltage point was 10.8V.

TEST PROCEDURE

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

- 1. Measure the carrier frequency at room temperature;
- 2. Subject the EUT to overnight soak at -30°C;
- 3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel of PCS 1900 and GSM850, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming;
- 4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 0.5 hours at each temperature, unpowered, before making measurements;
- 5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 0.5 hours unpowered, to allow any self-heating to stabilize, before continuing;
- Subject the EUT to overnight soak at +50℃;
- 7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming;
- 8. Repeat the above measurements at 10°C increments from +50°C to -30°C. Allow at least 0.5 hours at each temperature, unpowered, before making measurements;
- 9. At all temperature levels hold the temperature to +/- 0.5℃ during the measurement procedure;

TEST CONFIGURATION

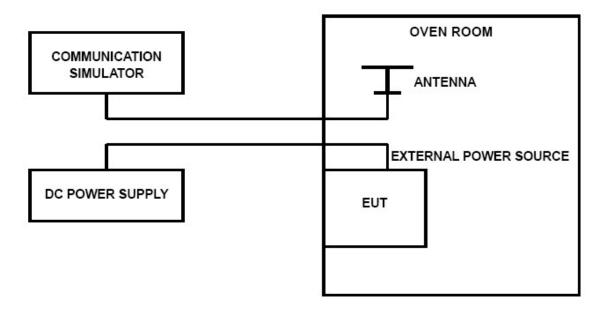

Report No.: GTSR16090082-01 Page 37 of 45

TEST LIMITS

For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 10.8VDC and 13.2VDC, with a nominal voltage of 12 DC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

	GPRS 850 Middle channel=190 channel=836.6MHz					
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict	
10.8	25	19	0.0227	2.50	PASS	
12.0	25	25	0.0299	2.50	PASS	
13.2	25	18	0.0215	2.50	PASS	
12.0	-30	19	0.0227	2.50	PASS	
12.0	-20	25	0.0299	2.50	PASS	
12.0	-10	24	0.0287	2.50	PASS	
12.0	0	19	0.0227	2.50	PASS	
12.0	10	17	0.0203	2.50	PASS	
12.0	20	18	0.0215	2.50	PASS	
12.0	30	14	0.0167	2.50	PASS	
12.0	40	15	0.0179	2.50	PASS	
12.0	50	20	0.0239	2.50	PASS	

	GPRS 1900 Middle channel=661 channel=1880MHz					
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict	
10.8	25	32	0.0170	2.50	PASS	
12.0	25	33	0.0176	2.50	PASS	
13.2	25	37	0.0197	2.50	PASS	
12.0	-30	25	0.0133	2.50	PASS	
12.0	-20	34	0.0181	2.50	PASS	
12.0	-10	37	0.0197	2.50	PASS	
12.0	0	36	0.0191	2.50	PASS	
12.0	10	37	0.0197	2.50	PASS	
12.0	20	35	0.0186	2.50	PASS	
12.0	30	30	0.0160	2.50	PASS	
12.0	40	32	0.0170	2.50	PASS	
12.0	50	31	0.0165	2.50	PASS	


Report No.: GTSR16090082-01 Page 38 of 45

4.7 Peak-to-Average Ratio (PAR)

LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

TEST CONFIGURATION

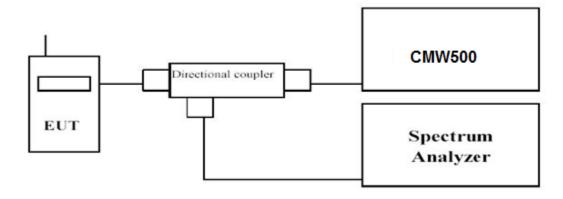

TEST PROCEDURE


Use spectrum to measure the total peak power and record as P_{Pk} . Use spectrum to measure the total average power and record as P_{Avg} . Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm).


Determine the PAPR from:

PAPR (dB) = P_{Pk} (dBm) - P_{Avg} (dBm).

GPRS 850				
Frequency	Measured			
(MHz)	(dB)			
824.20	0.72			
836.60	0.24			
848.80	0.83			

GPRS 1900				
Frequency	Measured			
(MHz)	(dB)			
1850.20	0.66			
1880.00	0.94			
1909.80	0.64			

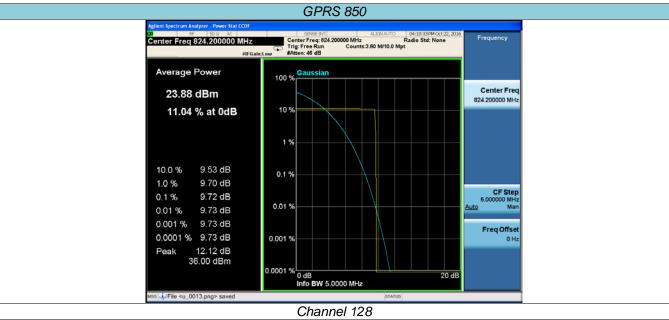


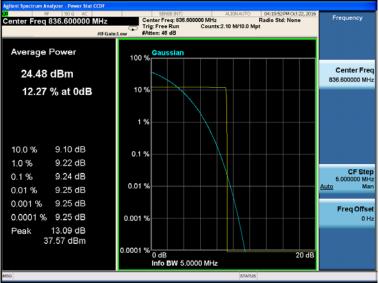

Channel 190




Channel 251

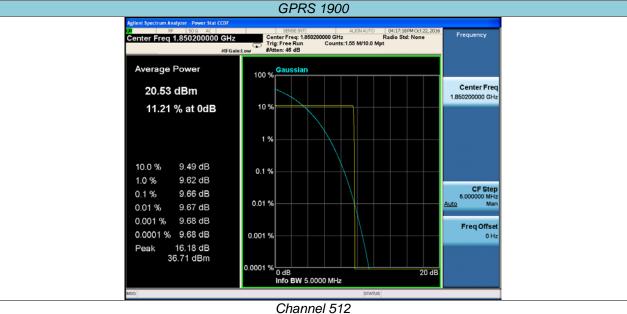





Channel 661

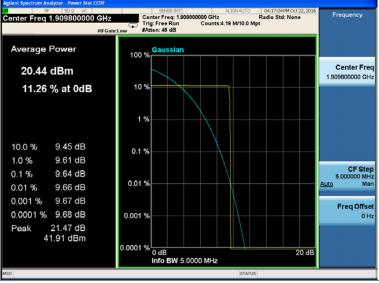

Channel 810

Report No.: GTSR16090082-01 Page 41 of 45

5 Test Setup Photos of the EUT





Report No.: GTSR16090082-01 Page 42 of 45

6 External and Internal Photos of the EUT

External Photos







Report No.: GTSR16090082-01 Page 43 of 45








Report No.: GTSR16090082-01 Page 44 of 45


Internal Photos





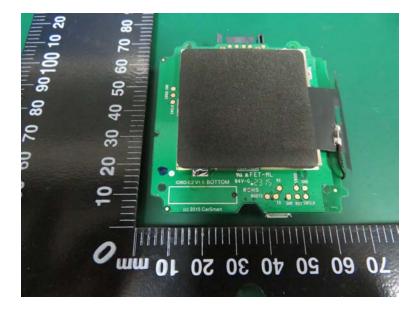


Report No.: GTSR16090082-01 Page 45 of 45

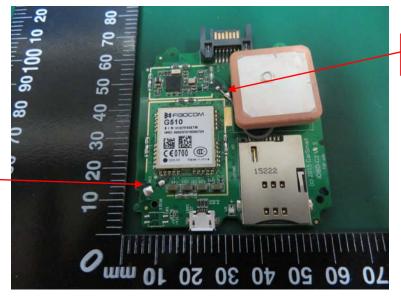

GPS antenna

GSM antenna

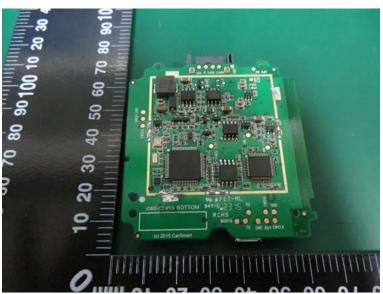

.....End of Report.....