



# TEST REPORT

Report Reference No.....	CHTEW19100133	Report verification:	
Project No.....	SHT1909064404EW		
FCC ID .....	2AJZP-G450A1		
Applicant's name .....	Mason America, Inc		
Address.....	2101 4th Avenue Suite 1550, Seattle WA, 98121		
Manufacturer.....	Mason America, Inc		
Address.....	2101 4th Avenue Suite 1550, Seattle WA, 98121		
Test item description .....	PAD		
Trade Mark .....	MASON/ypprime		
Model/Type reference.....	G450A1		
Listed Model(s) .....	-		
Standard .....	<b>FCC CFR Title 47 Part 15 Subpart E Section 15.407</b>		
Date of receipt of test sample.....	Sep 27, 2019		
Date of testing.....	Sep 28, 2019- Oct 28, 2019		
Date of issue.....	Oct 29, 2019		
Result.....	<b>PASS</b>		
Compiled by (position+printedname+signature)....	File administrators Silvia Li		
Supervised by (position+printedname+signature)....	Project Engineer Aaron Fang		
Approved by (position+printedname+signature)....	RF Manager Hans Hu		
Testing Laboratory Name .....	<b>Shenzhen Huatongwei International Inspection Co., Ltd</b>		
Address.....	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China		

**Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

*The test report merely correspond to the test sample.*

## Contents

<u>1. TEST STANDARDS AND REPORT VERSION</u>	<u>3</u>
1.1. Test Standards	3
1.2. Report Version	3
<u>2. TEST DESCRIPTION</u>	<u>4</u>
<u>3. SUMMARY</u>	<u>5</u>
3.1. Client Information	5
3.2. Product Description	5
3.3. Operation state	6
3.4. EUT configuration	7
3.5. Modifications	7
<u>4. TEST ENVIRONMENT</u>	<u>8</u>
4.1. Address of the test laboratory	8
4.2. Test Facility	8
4.3. Environmental conditions	9
4.4. Statement of the measurement uncertainty	9
4.5. Equipments Used during the Test	10
<u>5. TEST CONDITIONS AND RESULTS</u>	<u>11</u>
5.1. Antenna requirement	11
5.2. Conducted Emissions (AC Main)	12
5.3. Maximum Conducted Output Power	15
5.4. Maximum Power Spectral Density	18
5.5. 26dB bandwidth and 99% Occupy bandwidth	42
5.6. 6dB Bandwidth	61
5.7. Band edge	68
5.8. Radiated Spurious Emissions	72
5.9. Frequency stability	79
<u>6. TEST SETUP PHOTOS OF THE EUT</u>	<u>83</u>
<u>7. EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>84</u>

## 1. TEST STANDARDS AND REPORT VERSION

### 1.1. Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.407: General technical requirements.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices

KDB789033 D02 v02r01: GUIDELINES FOR COMPLIANCE TESTING OF UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII) DEVICES PART 15, SUBPART E

### 1.2. Report Version

Revision No.	Date of issue	Description
N/A	2019-10-29	Original

## 2. TEST DESCRIPTION

Test Item	FCC Rule	Result	Test Engineer
Antenna Requirement	15.203	PASS	Kang Yang
Line Conducted Emissions (AC Main)	15.207	PASS	Kang Yang
Maximum Conducted Output Power	15.407(a)	PASS	JiongSheng.Feng
Maximum Power Spectral Density	15.407(a)	PASS	JiongSheng.Feng
26dB Bandwidth and 99% Occupy bandwith	15.407(a)	PASS	JiongSheng.Feng
6dB Bandwidth	15.407(a)	PASS	JiongSheng.Feng
Band edge	15.407(b)	PASS	Pan Xie
Radiated Spurious Emissions	15.209	PASS	Pan Xie
Frequency Stability	15.407(g)	PASS	JiongSheng.Feng

Remark: The measurement uncertainty is not included in the test result.

### 3. SUMMARY

#### 3.1. Client Information

Applicant:	Mason America, Inc
Address:	2101 4th Avenue Suite 1550, Seattle WA, 98121
Manufacturer:	Mason America, Inc
Address:	2101 4th Avenue Suite 1550, Seattle WA, 98121

#### 3.2. Product Description

Name of EUT	PAD				
Trade Mark:	MASON/yprime				
Model No.:	G450A1				
Listed Model(s):	-				
Power supply:	DC 3.8V				
Adapter information :	Model: A138A-120150U-US2 Input: 100-240V a.c., 50/60Hz, 0.5A Output: 5.0V d.c., 2.5A/9.0V d.c., 2.0A/12V d.c., 1.5A				
<b>5G WIFI</b>					
Supported type:	<input checked="" type="checkbox"/> 802.11a	<input checked="" type="checkbox"/> 802.11n(HT20)	<input checked="" type="checkbox"/> 802.11n(HT40)		
	<input checked="" type="checkbox"/> 802.11ac(HT20)	<input checked="" type="checkbox"/> 802.11ac(HT40)	<input checked="" type="checkbox"/> 802.11ac(HT80)		
Function:	<input type="checkbox"/> Outdoor AP	<input type="checkbox"/> Indoor AP	<input type="checkbox"/> Fixed P2P		
	<input checked="" type="checkbox"/> Client				
DFS type:	<input type="checkbox"/> master devices	<input type="checkbox"/> Slave devices with radar detection	<input checked="" type="checkbox"/> Slave devices without radar detection		
Modulation:	BPSK, QPSK, 16QAM, 64QAM				
Operation frequency:	<input checked="" type="checkbox"/> Band I:	5150MHz~5250MHz			
	<input checked="" type="checkbox"/> Band II:	5250MHz~5350MHz			
	<input checked="" type="checkbox"/> Band III:	5470MHz~5725MHz			
	<input checked="" type="checkbox"/> Band IV:	5725MHz~5850MHz			
Supported Bandwidth	20MHz:	802.11ac, 802.11n, 802.11a			
	40MHz:	802.11ac, 802.11n			
	80MHz:	802.11ac			
Antenna type:	FPC Antenna				
Antenna gain:	2.6dBi				

### 3.3. Operation state

#### ➤ Frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

Band	Test Channel	20MHz		40MHz		80MHz	
		Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
I	CH <sub>L</sub>	36	5180	38	5190	-	-
	CH <sub>M</sub>	44	5220	-	-	42	5210
	CH <sub>H</sub>	48	5240	46	5230	-	-
II	CH <sub>L</sub>	52	5260	54	5270	-	-
	CH <sub>M</sub>	56	5280	-	-	58	5290
	CH <sub>H</sub>	64	5320	62	5310	-	-
III	CH <sub>L</sub>	100	5500	102	5510	106	5530
	CH <sub>M</sub>	120	5600	118	5590	122	5610
	CH <sub>H</sub>	140	5700	134	5670	138	5690
IV	CH <sub>L</sub>	149	5745	151	5755	-	-
	CH <sub>M</sub>	157	5785	-	-	155	5775
	CH <sub>H</sub>	165	5825	159	5795	-	-

#### ➤ Data Rated

Preliminary tests were performed in different data rate, and found which the below bit rate is worst case mode, so only show data which it is a worst case mode.

Mode	Data rate (worst mode)
802.11a	6Mbps
802.11n(HT20)/ 802.11ac(HT20)	MCS0
802.11n(HT40)/ 802.11ac(HT40)	MCS0
802.11ac(HT80)	MCS0

#### ➤ Test mode

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit (duty cycle>98%).
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated suprious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit(duty cycle>98%). The EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data Recorded in the report.

### 3.4. EUT configuration

**The following peripheral devices and interface cables were connected during the measurement:**

- - supplied by the manufacturer
- - supplied by the lab

○	N/A	Manufacturer :	N/A
		Model No. :	N/A
○	N/A	Manufacturer :	N/A
		Model No. :	N/A

### 3.5. Modifications

No modifications were implemented to meet testing criteria.

## **4. TEST ENVIRONMENT**

### **4.1. Address of the test laboratory**

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Phone: 86-755-26748019 Fax: 86-755-26748089

### **4.2. Test Facility**

#### **CNAS-Lab Code: L1225**

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

#### **A2LA-Lab Cert. No.: 3902.01**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### **FCC-Registration No.: 762235**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files.

#### **IC-Registration No.: 5377A**

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No.: 5377A.

#### **ACA**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

### 4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

### 4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors in calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd. quality system according to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Here after the best measurement capability for Shenzhen Huatongwei International Inspection Co., Ltd. is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.51 dB	(1)
Conducted spurious emissions 9kHz~40GHz	0.51 dB	(1)
Conducted Disturbance 150kHz~30MHz	3.02 dB	(1)
Radiated Emissions below 1GHz	4.90 dB	(1)
Radiated Emissions above 1GHz	4.96 dB	(1)
Occupied Bandwidth	70 Hz	(1)
Frequency error	70 Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=1.96$ .

## 4.5. Equipments Used during the Test

● Conducted Emission							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Shielded Room	Albatross projects	HTWE0114	N/A	N/A	2018/09/28	2023/09/27
●	EMI Test Receiver	R&S	HTWE0111	ESCI	101247	2019/10/26	2020/10/25
●	Artificial Mains	SCHWARZBECK	HTWE0113	NNLK 8121	573	2019/10/23	2020/10/22
●	Pulse Limiter	R&S	HTWE0033	ESH3-Z2	100499	2019/10/23	2020/10/22
●	RF Connection Cable	HUBER+SUHNER	HTWE0113-02	ENVIROFLEX_142	EF-NM-BNCM-2M	2019/10/23	2020/10/22
●	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A

● Radiated Emission-6th test site							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2018/09/30	2021/09/29
●	EMI Test Receiver	R&S	HTWE0099	ESCI	100900	2019/10/26	2020/10/25
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0119	VULB9163	546	2017/04/05	2020/04/04
●	Pre-Amplifier	SCHWARZBECK	HTWE0295	BBV 9742	N/A	2018/11/14	2019/11/13
●	RF Connection Cable	HUBER+SUHNER	HTWE0062-01	N/A	N/A	2019/8/21	2020/8/20
●	RF Connection Cable	HUBER+SUHNER	HTWE0062-02	SUCOFLEX104	501184/4	2019/5/27	2020/5/26
●	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A

● Radiated emission-7th test site							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	N/A	2018/09/30	2021/09/29
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2019/10/26	2020/10/25
●	Horn Antenna	SCHWARZBECK	HTWE0126	9120D	1011	2017/04/01	2020/03/31
●	Broadband Pre-amplifier	SCHWARZBECK	HTWE0201	BBV 9718	9718-248	2019/05/23	2020/05/22
●	RF Connection Cable	HUBER+SUHNER	HTWE0121-01	RE-7-FH	N/A	2019/05/10	2020/05/09
●	Test Software	Audix	N/A	E3	N/A	N/A	N/A

● RF Conducted Method							
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
●	Signal and spectrum Analyzer	R&S	FSV40	100048	2019/10/26	2020/10/25	
●	Spectrum Analyzer	Agilent	N9020A	MY50510187	2019/10/26	2020/10/25	
●	Test software	Tonscend	JS1120-2(WIFI)	N/A	N/A	N/A	

## 5. **TEST CONDITIONS AND RESULTS**

### 5.1. Antenna requirement

#### Requirement

#### **FCC CFR Title 47 Part 15 Subpart C Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### Test Result:

The directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.



## 5.2. Conducted Emissions (AC Main)


### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

### TEST CONFIGURATION

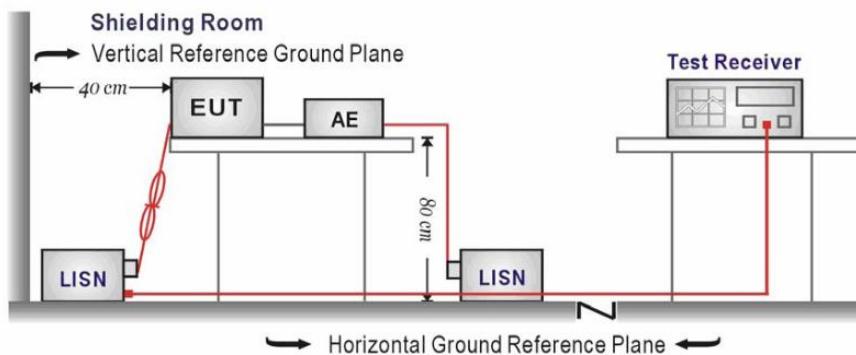

### TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

### TEST MODE:


Please refer to the clause 3.3


### TEST RESULTS

Passed       Not Applicable

Note:

- 1) Transd=Cable loss+ Pulse Limiter Factor + Artificial Mains Factor
- 2) Margin= Limit -Level

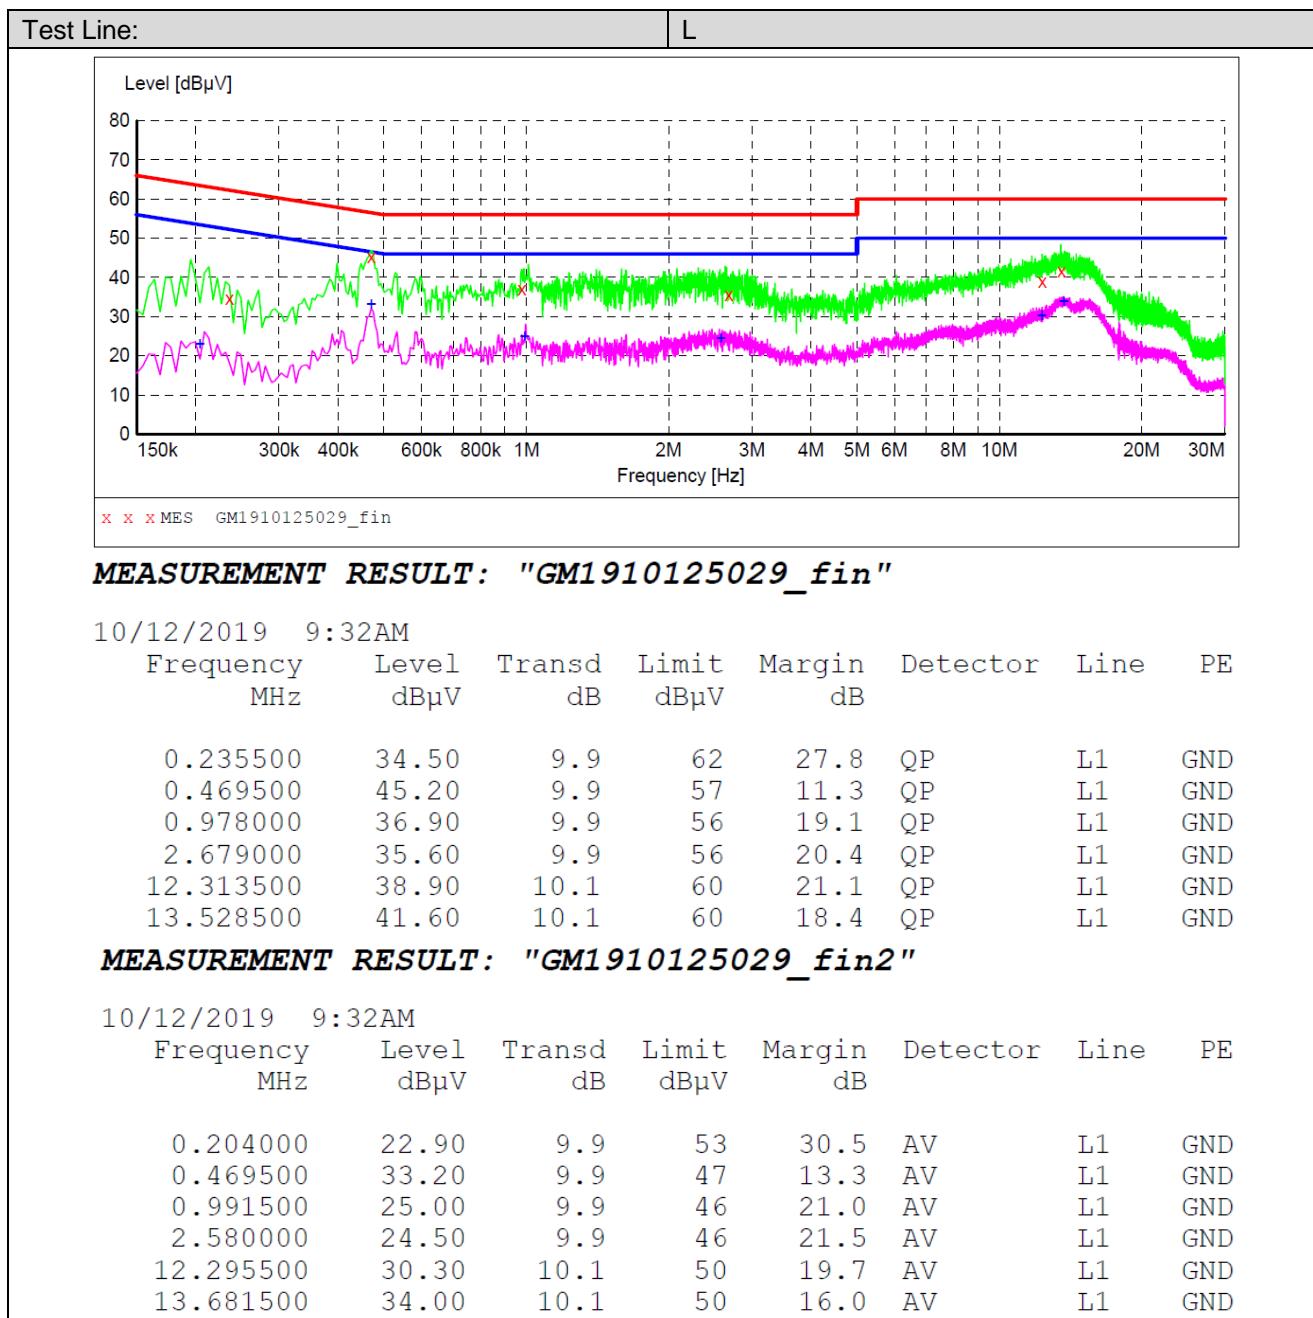

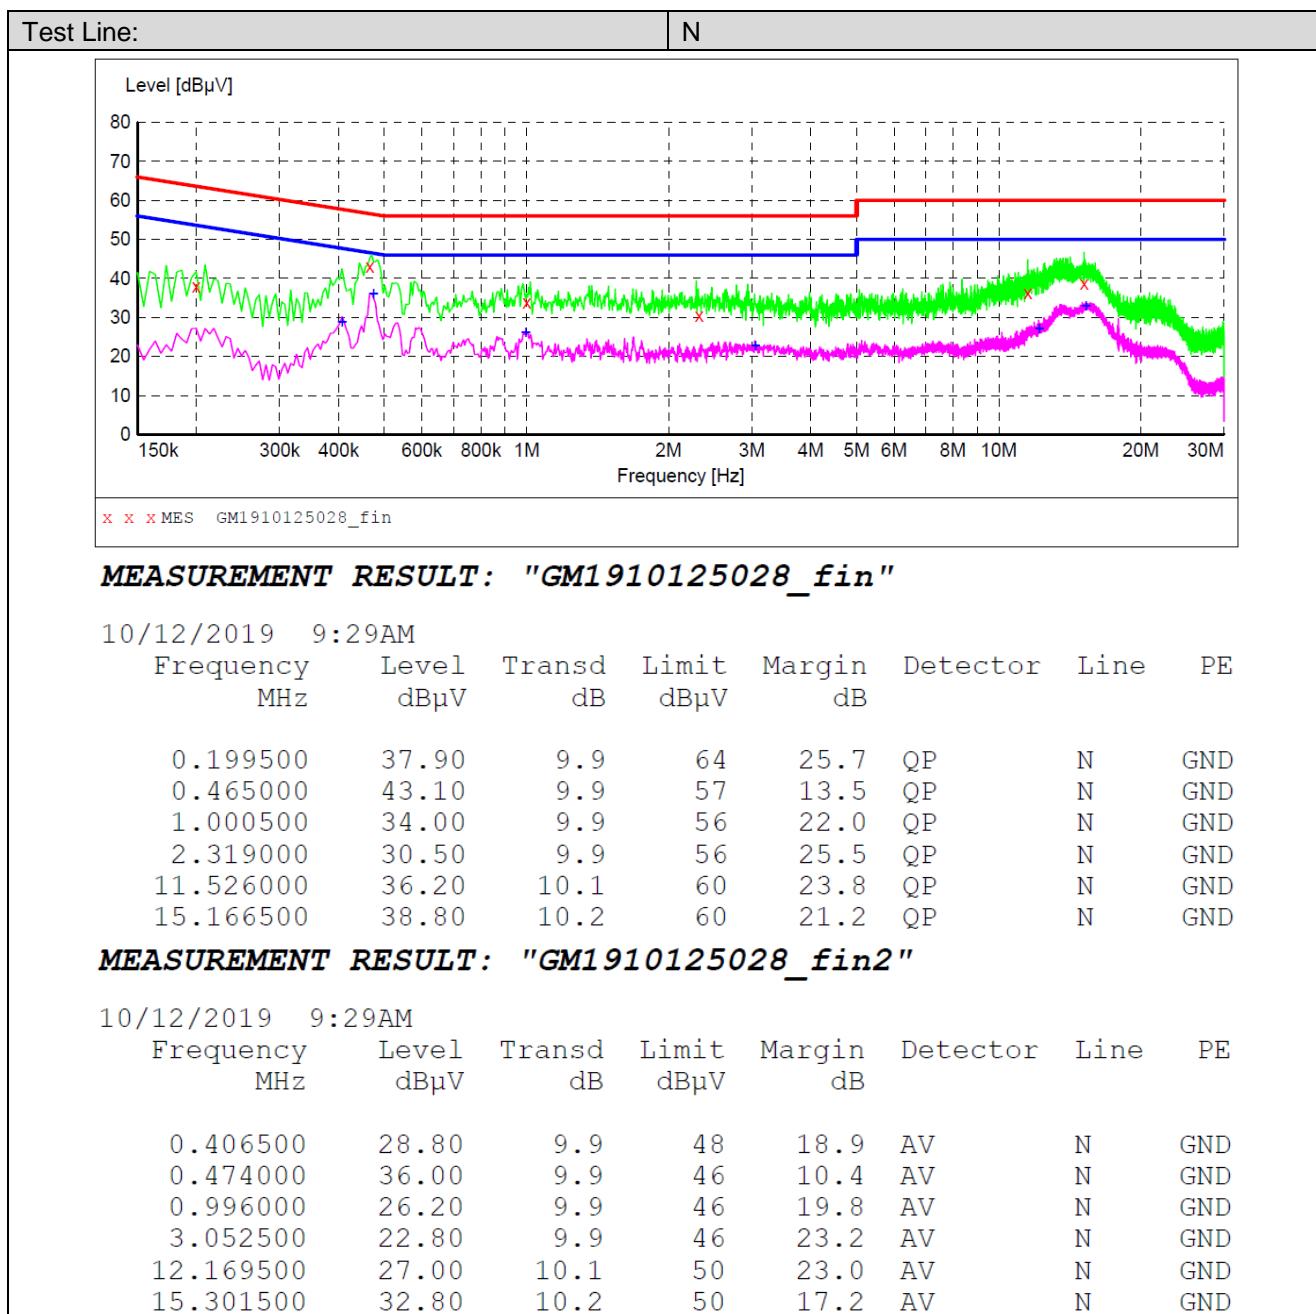

### 5.3. Maximum Conducted Output Power

#### LIMIT

##### FCC CFR Title 47 Part 15 Subpart E Section 15.407(a):

For the 5.15~5.25GHz band:

- Outdoor AP  
The maximum conducted output power ( $P_{out}$ ) shall not exceed the lesser of 1W (30dBm).  
if  $G_{Tx} > 6\text{dBi}$ , then  $P_{out} = 30 - (G_{Tx} - 6)$ . e.i.r.p. at any elevation angle above 30 degrees  $\leq 125\text{mW}$  (21dBm)
- Indoor AP  
The maximum conducted output power ( $P_{out}$ ) shall not exceed the lesser of 1W (30dBm).  
if  $G_{Tx} > 6\text{dBi}$ , then  $P_{out} = 30 - (G_{Tx} - 6)$ .
- Point-to-point AP  
The maximum conducted output power ( $P_{out}$ ) shall not exceed the lesser of 1W (30dBm).  
if  $G_{Tx} > 23\text{dBi}$ , then  $P_{out} = 30 - (G_{Tx} - 23)$ .
- Client devices  
The maximum conducted output power ( $P_{out}$ ) shall not exceed the lesser of 250W (24dBm).  
if  $G_{Tx} > 6\text{dBi}$ , then  $P_{out} = 24 - (G_{Tx} - 6)$ .

For the 5.25~5.35GHz band:

The maximum conducted output power ( $P_{out}$ ) shall not exceed the lesser of 250mW (24dBm) or  $11\text{dBm} + 10 \log B$ , where B is the 26dB emission bandwidth in MHz.  
if  $G_{Tx} > 6\text{dBi}$ , then  $P_{out} = 24 - (G_{Tx} - 6)$ .


For the 5.47~5.725GHz band:

The maximum conducted output power ( $P_{out}$ ) shall not exceed the lesser of 250mW (24dBm) or  $11\text{dBm} + 10 \log B$ , where B is the 26dB emission bandwidth in MHz.  
if  $G_{Tx} > 6\text{dBi}$ , then  $P_{out} = 24 - (G_{Tx} - 6)$ .

For the 5.725~5.85GHz band:

- Point-to-multipoint systems (P2M)  
The maximum conducted output power ( $P_{out}$ ) shall not exceed the lesser of 1W (30dBm).  
if  $G_{Tx} > 6\text{dBi}$ , then  $P_{out} = 30 - (G_{Tx} - 6)$ .
- Point-to-point systems (P2P)  
The maximum conducted output power ( $P_{out}$ ) shall not exceed the lesser of 1W (30dBm).

#### TEST CONFIGURATION

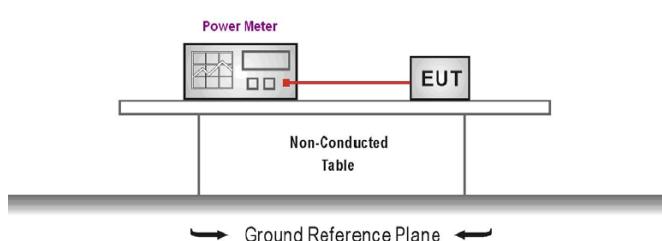

#### TEST PROCEDURE

1. The EUT was tested according to KDB789033 Section E-3-b)
2. The maximum conducted output power may be measured using a broadband AVG RF power meter.
3. Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor.
4. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.
5. Record the measurement data.

#### TEST MODE:

Please refer to the clause 3.3

#### TEST RESULTS

Passed Not Applicable

Band	Bandwidth (MHz)	Type	Channel	Conducted Output Power (dBm)	Limit (dBm)	Result
I	20	802.11ac	CH <sub>L</sub>	16.21	24.00	Pass
			CH <sub>M</sub>	16.34		
			CH <sub>H</sub>	16.36		
		802.11n	CH <sub>L</sub>	16.67	24.00	Pass
			CH <sub>M</sub>	16.47		
			CH <sub>H</sub>	16.57		
	40	802.11a	CH <sub>L</sub>	16.54	24.00	Pass
			CH <sub>M</sub>	17.05		
			CH <sub>H</sub>	16.48		
	80	802.11ac	CH <sub>L</sub>	16.37	24.00	Pass
			CH <sub>H</sub>	16.91		
		802.11n	CH <sub>L</sub>	16.55	24.00	Pass
			CH <sub>H</sub>	17.09		
II	20	802.11ac	CH <sub>L</sub>	16.43	24.00	Pass
			CH <sub>M</sub>	16.45		
			CH <sub>H</sub>	16.45		
		802.11n	CH <sub>L</sub>	17.11	24.00	Pass
			CH <sub>M</sub>	17.02		
			CH <sub>H</sub>	16.99		
	40	802.11a	CH <sub>L</sub>	17.64	24.00	Pass
			CH <sub>M</sub>	17.82		
			CH <sub>H</sub>	17.13		
	80	802.11ac	CH <sub>L</sub>	15.47	24.00	Pass
			CH <sub>H</sub>	14.92		
		802.11n	CH <sub>L</sub>	15.67	24.00	Pass
			CH <sub>H</sub>	15.74		

Band	Bandwidth (MHz)	Type	Channel	Conducted Output Power (dBm)	Limit (dBm)	Result
III	20	802.11ac	CH <sub>L</sub>	16.67	24.00	Pass
			CH <sub>M</sub>	16.97		
			CH <sub>H</sub>	15.58		
		802.11n	CH <sub>L</sub>	17.53	24.00	Pass
			CH <sub>M</sub>	17.54		
			CH <sub>H</sub>	16.03		
		802.11a	CH <sub>L</sub>	17.88	24.00	Pass
			CH <sub>M</sub>	18.65		
			CH <sub>H</sub>	16.41		
	40	802.11ac	CH <sub>L</sub>	15.51	24.00	Pass
			CH <sub>M</sub>	16.24		
			CH <sub>H</sub>	14.68		
		802.11n	CH <sub>L</sub>	15.47	24.00	Pass
			CH <sub>M</sub>	16.10		
			CH <sub>H</sub>	12.95		
	80	802.11ac	CH <sub>L</sub>	11.04	24.00	Pass
			CH <sub>M</sub>	14.22		
			CH <sub>H</sub>	12.76		
IV	20	802.11ac	CH <sub>L</sub>	16.57	30.00	Pass
			CH <sub>M</sub>	16.64		
			CH <sub>H</sub>	17.18		
		802.11n	CH <sub>L</sub>	17.55	30.00	Pass
			CH <sub>M</sub>	17.70		
			CH <sub>H</sub>	17.32		
		802.11a	CH <sub>L</sub>	17.46	30.00	Pass
			CH <sub>M</sub>	17.52		
			CH <sub>H</sub>	18.16		
	40	802.11ac	CH <sub>L</sub>	14.65	30.00	Pass
			CH <sub>H</sub>	15.14		
		802.11n	CH <sub>L</sub>	15.97	30.00	Pass
			CH <sub>H</sub>	15.80		
	80	802.11ac	CH <sub>M</sub>	10.21	30.00	Pass

## 5.4. Maximum Power Spectral Density

### LIMIT

FCC CFR Title 47 Part 15 Subpart E Section 15.407(a):

For the 5.15~5.25GHz band:

- Outdoor AP  
The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz.  
if  $G_{Tx} > 6\text{dBi}$ , then  $\text{PSD} = 17 - (G_{Tx} - 6)$ .
- Indoor AP  
The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz.  
if  $G_{Tx} > 6\text{dBi}$ , then  $\text{PSD} = 17 - (G_{Tx} - 6)$ .
- Point-to-point AP  
The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz.  
if  $G_{Tx} > 23\text{dBi}$ , then  $\text{PSD} = 17 - (G_{Tx} - 23)$ .
- Client devices  
The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz.  
if  $G_{Tx} > 6\text{dBi}$ , then  $\text{PSD} = 11 - (G_{Tx} - 6)$ .

For the 5.25~5.35GHz band:

The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz.  
if  $G_{Tx} > 6\text{dBi}$ , then  $\text{PSD} = 11 - (G_{Tx} - 6)$ .


For the 5.47~5.725GHz band:

The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz.  
if  $G_{Tx} > 6\text{dBi}$ , then  $\text{PSD} = 11 - (G_{Tx} - 6)$ .

For the 5.725~5.85GHz band:

- Point-to-multipoint systems (P2M)  
The peak power spectral density (PSD) shall not exceed the lesser of 30dBm/500kHz.  
if  $G_{Tx} > 6\text{dBi}$ , then  $\text{PSD} = 30 - (G_{Tx} - 6)$ .
- Point-to-point systems (P2P)  
The peak power spectral density (PSD) shall not exceed the lesser of 30dBm/500kHz.

### TEST CONFIGURATION

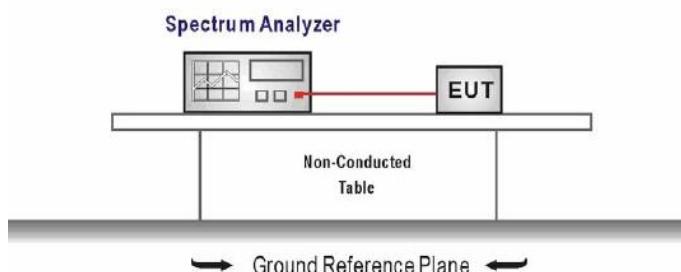

### TEST PROCEDURE

1. According KDB 789033 D02 – Section F
2. Analyzer was setting as follow:  
Center frequency: test channel  
Span was set to encompass the entire emission bandwidth of the signal  
RBW=1MHz for devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz  
RBW=500kHz for devices operating in the band 5.725-5.85 GHz  
VBW  $\geq 3$  RBW  
Number of sweep points  $> 2 \times (\text{span}/\text{RBW})$   
Sweep time = auto  
Detector = Peak  
Trigger was set to free run for all modes, trace was averaged over 100 sweeps
3. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

### TEST MODE:

Please refer to the clause 3.3


**TEST RESULTS**


Passed       Not Applicable


Band	Bandwidth (MHz)	Type	Channel	Power Spectral Density (dBm/MHz)	Limit (dBm/MHz)	Result	
I	20	802.11ac	CH <sub>L</sub>	6.04	11.00	Pass	
			CH <sub>M</sub>	5.66			
			CH <sub>H</sub>	5.81			
		802.11n	CH <sub>L</sub>	6.50	11.00	Pass	
			CH <sub>M</sub>	6.18			
			CH <sub>H</sub>	6.11			
	40	802.11a	CH <sub>L</sub>	6.77	11.00	Pass	
			CH <sub>M</sub>	6.74			
			CH <sub>H</sub>	6.40			
		802.11ac	CH <sub>L</sub>	3.98	11.00	Pass	
			CH <sub>H</sub>	3.53			
II	20	802.11n	CH <sub>L</sub>	3.85	11.00	Pass	
			CH <sub>H</sub>	4.23			
		802.11ac	CH <sub>M</sub>	-4.12	11.00	Pass	
	40		CH <sub>L</sub>	5.44	11.00	Pass	
			CH <sub>M</sub>	5.30			
			CH <sub>H</sub>	5.74			
	802.11n	CH <sub>L</sub>	5.86	11.00	Pass		
		CH <sub>M</sub>	5.91				
		CH <sub>H</sub>	5.95				
	80	802.11a	CH <sub>L</sub>	6.74	11.00	Pass	
			CH <sub>M</sub>	7.26			
			CH <sub>H</sub>	6.54			
		802.11ac	CH <sub>L</sub>	2.52	11.00	Pass	
			CH <sub>H</sub>	1.71			
		802.11n	CH <sub>L</sub>	1.59	11.00	Pass	
			CH <sub>H</sub>	1.95			


Band	Bandwidth (MHz)	Type	Channel	Power Spectral Density (dBm/MHz)	Limit (dBm/MHz)	Result
III	20	802.11ac	CH <sub>L</sub>	5.80	11.00	Pass
			CH <sub>M</sub>	6.61		
			CH <sub>H</sub>	5.09		
		802.11n	CH <sub>L</sub>	6.73	11.00	Pass
			CH <sub>M</sub>	7.42		
			CH <sub>H</sub>	5.85		
	40	802.11a	CH <sub>L</sub>	6.81	11.00	Pass
			CH <sub>M</sub>	8.85		
			CH <sub>H</sub>	5.80		
		802.11ac	CH <sub>L</sub>	2.58	11.00	Pass
			CH <sub>M</sub>	3.79		
			CH <sub>H</sub>	1.46		
	80	802.11n	CH <sub>L</sub>	1.59	11.00	Pass
			CH <sub>M</sub>	3.32		
			CH <sub>H</sub>	0.15		
IV	20	802.11ac	CH <sub>L</sub>	-5.27	11.00	Pass
			CH <sub>M</sub>	-1.38		
			CH <sub>H</sub>	-3.22		
	802.11n	802.11n	CH <sub>L</sub>	5.40	30.00	Pass
			CH <sub>M</sub>	5.63		
			CH <sub>H</sub>	5.01		
	802.11a	802.11a	CH <sub>L</sub>	5.37	30.00	Pass
			CH <sub>M</sub>	5.77		
			CH <sub>H</sub>	6.03		
	40	802.11ac	CH <sub>L</sub>	0.33	30.00	Pass
			CH <sub>H</sub>	0.57		
		802.11n	CH <sub>L</sub>	1.15	30.00	Pass
			CH <sub>H</sub>	1.22		
	80	802.11ac	CH <sub>M</sub>	-7.80	30.00	Pass


Test plot as follows:

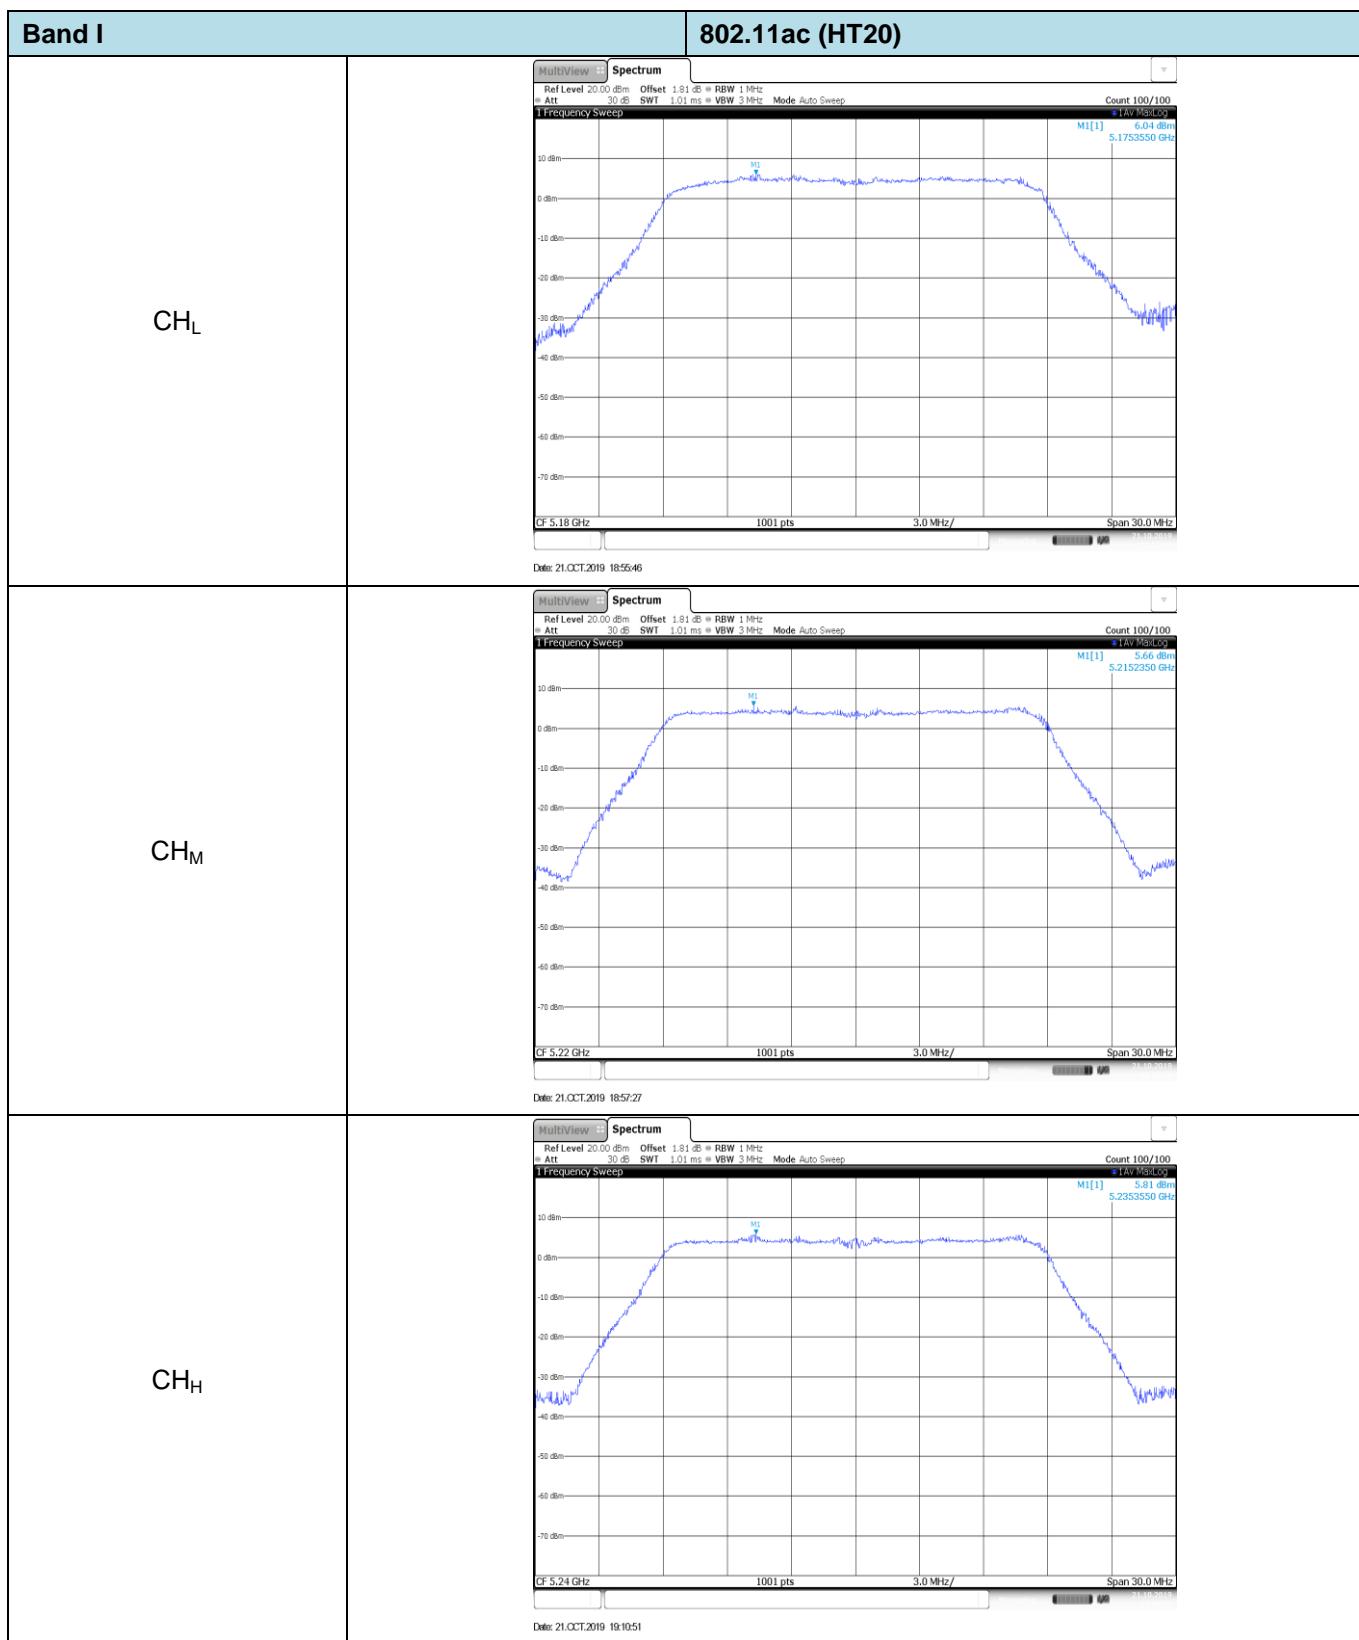


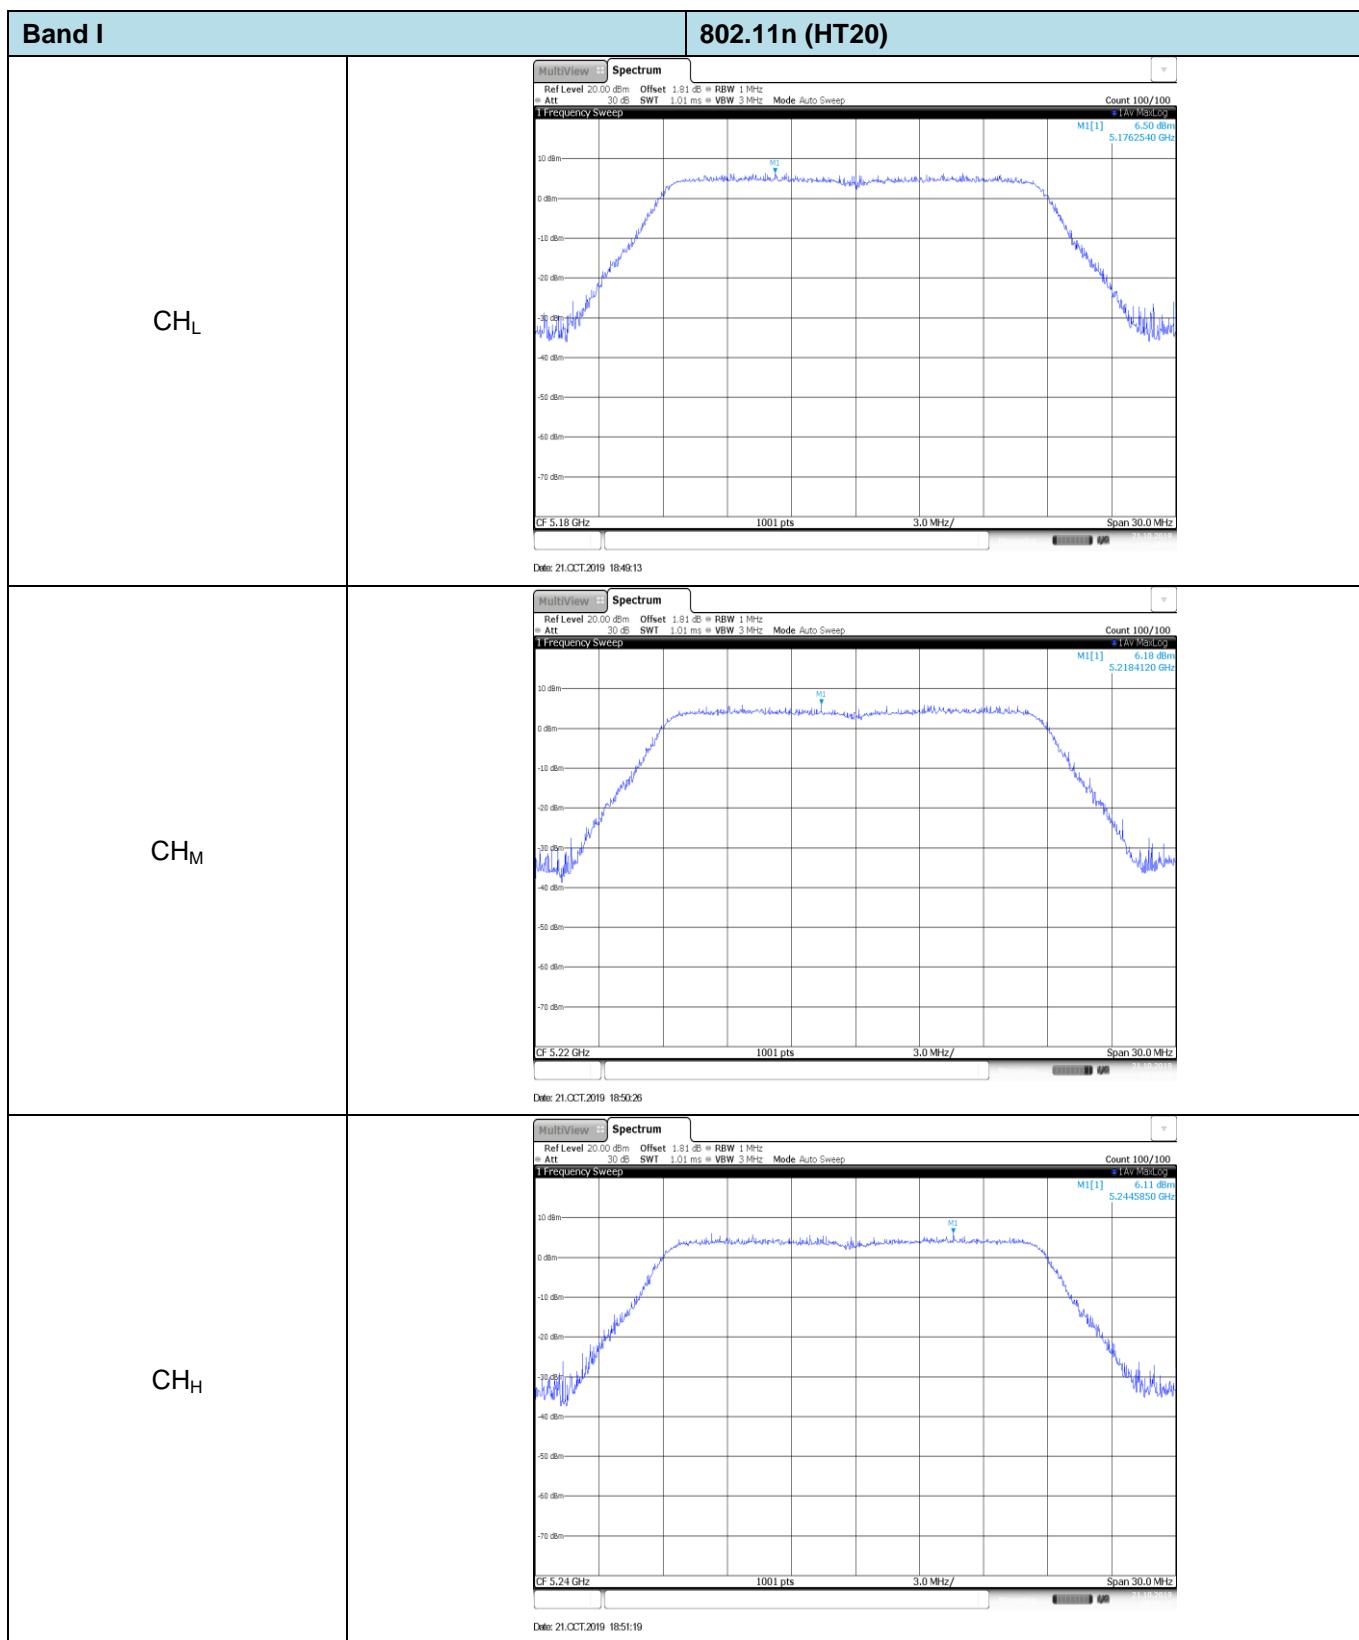


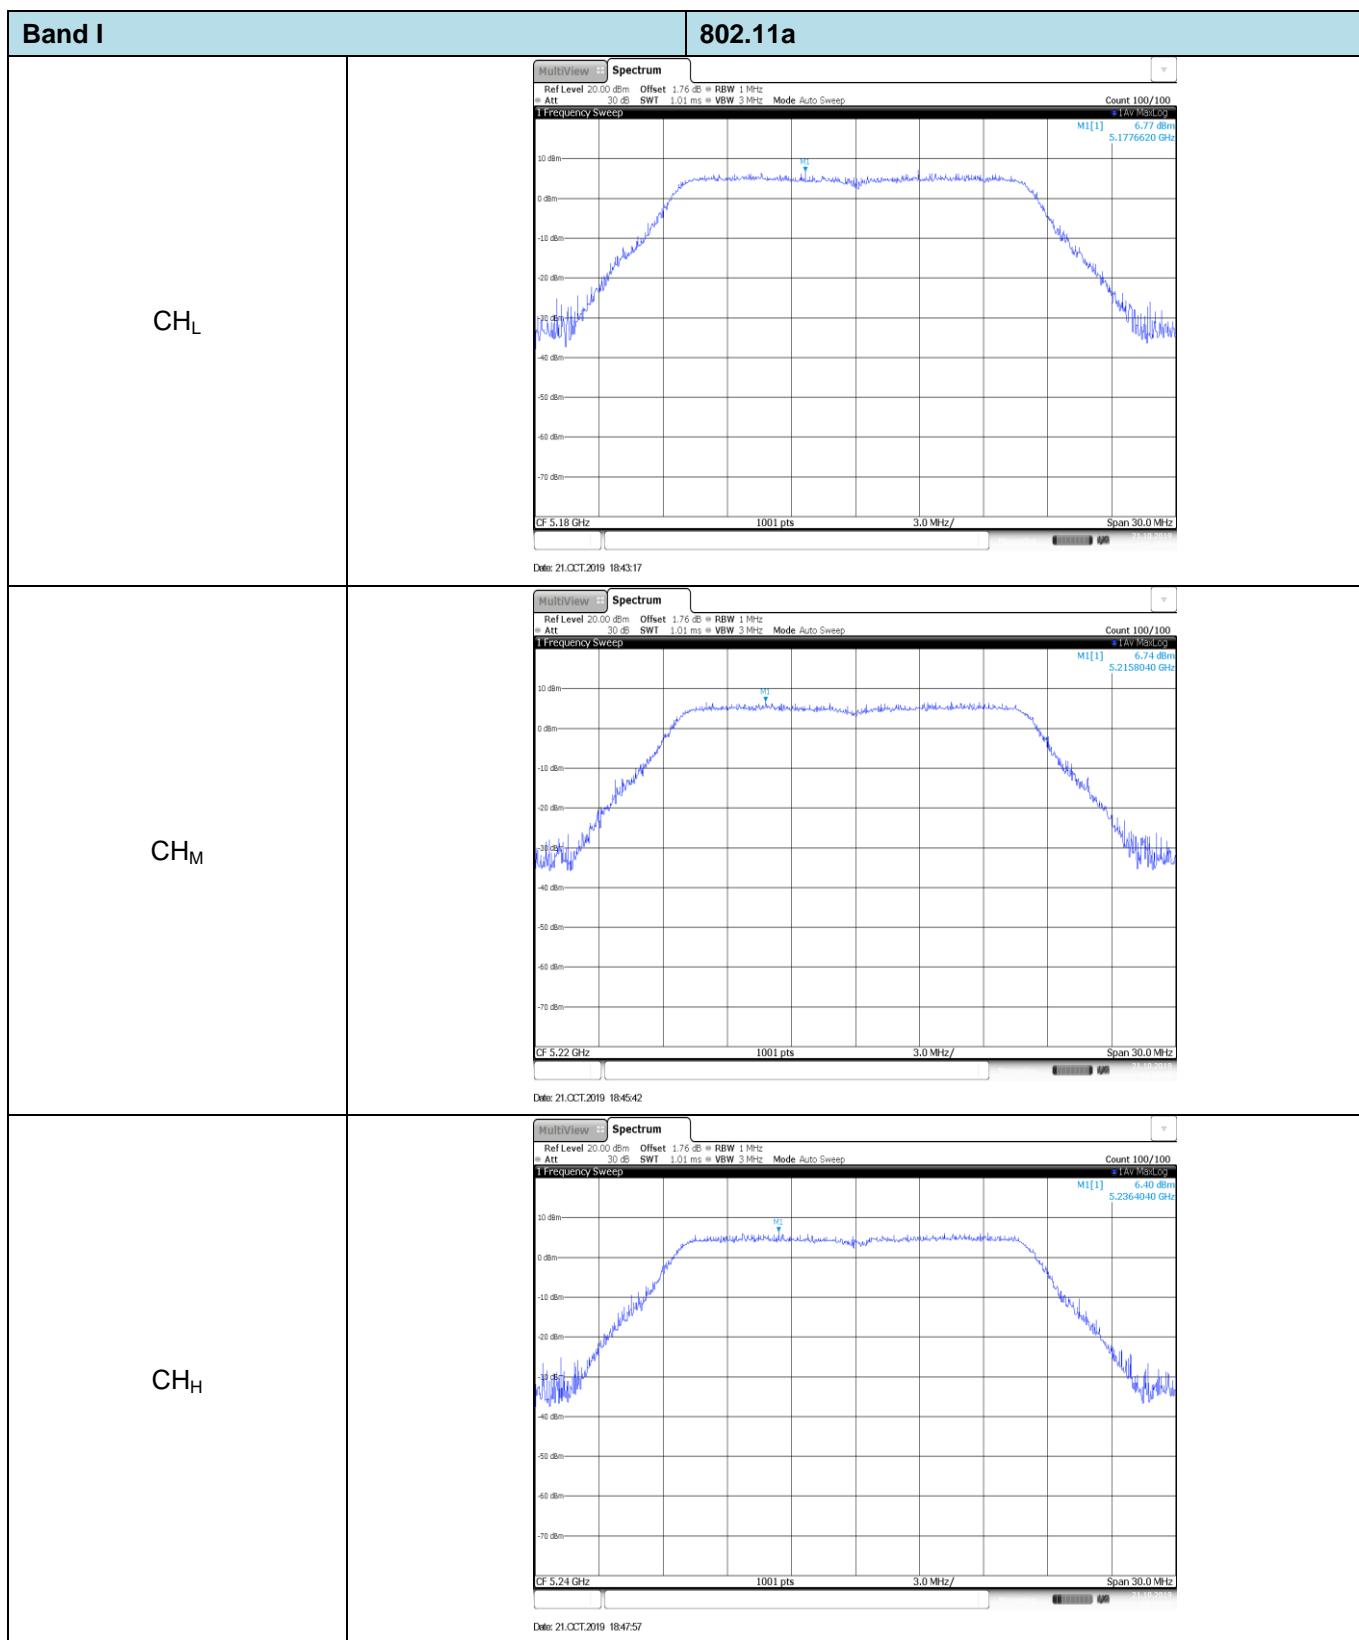


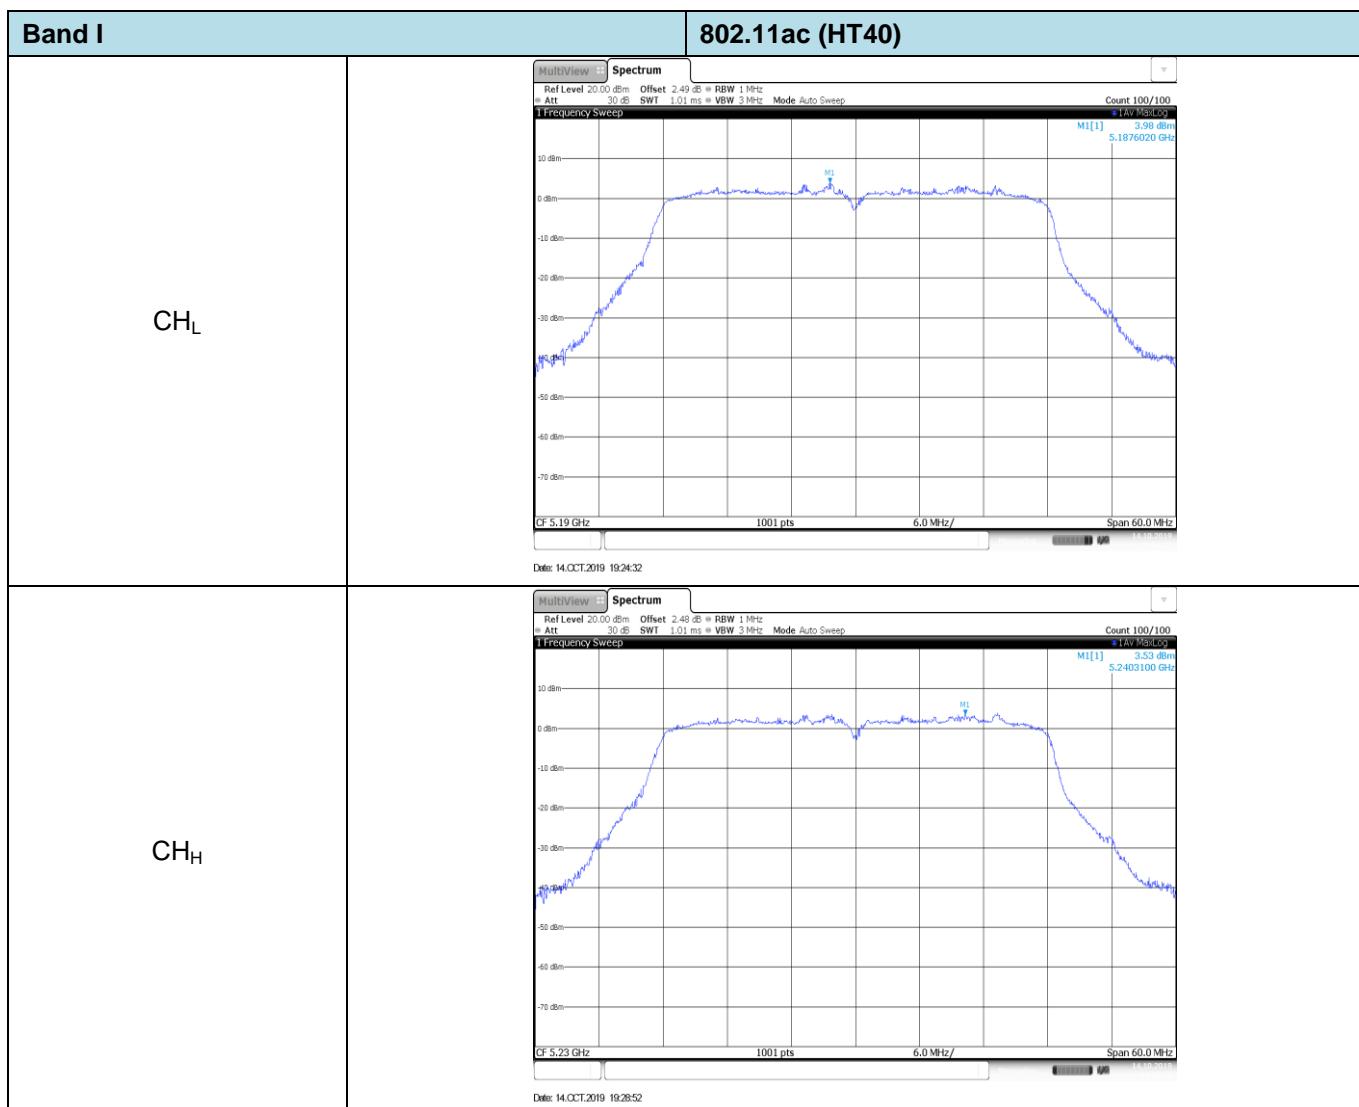


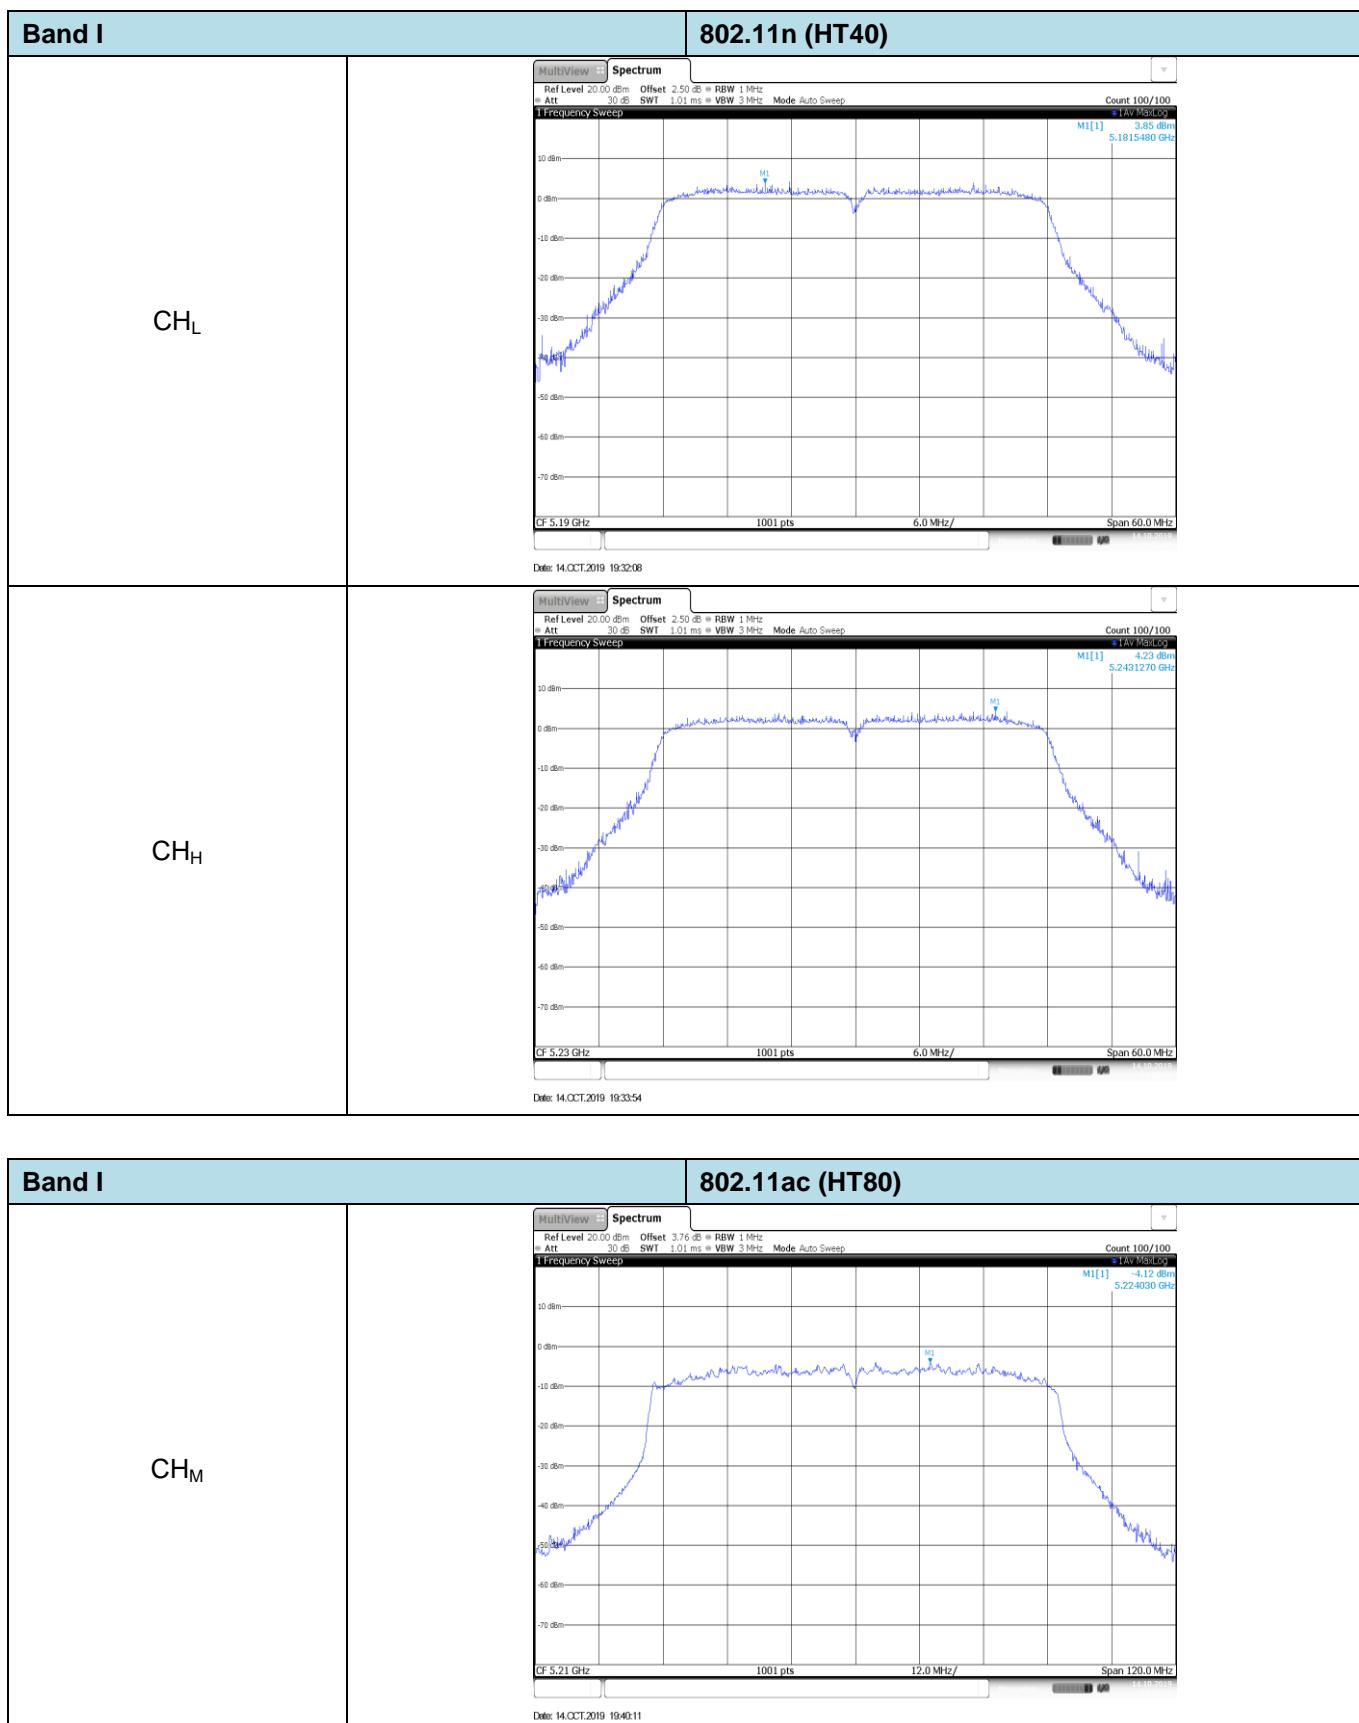


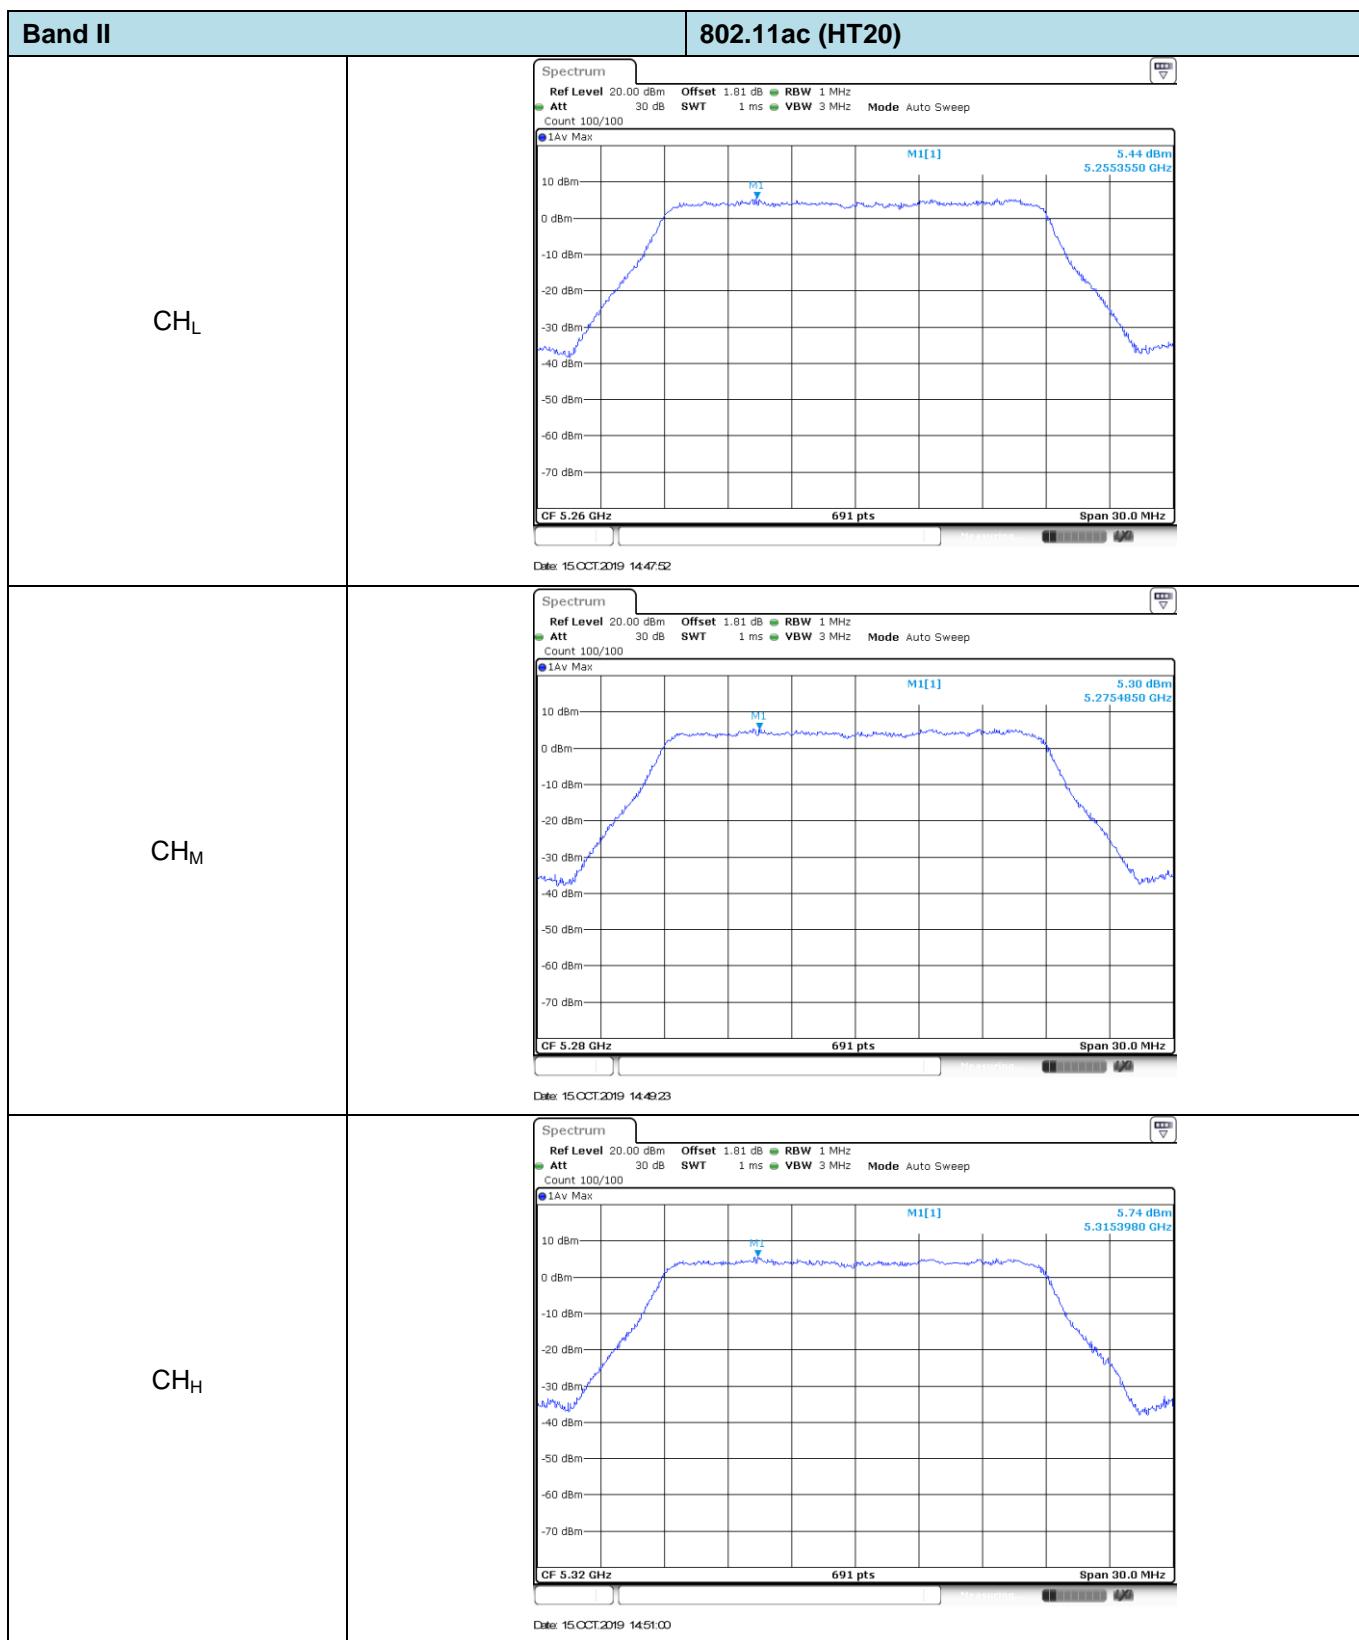


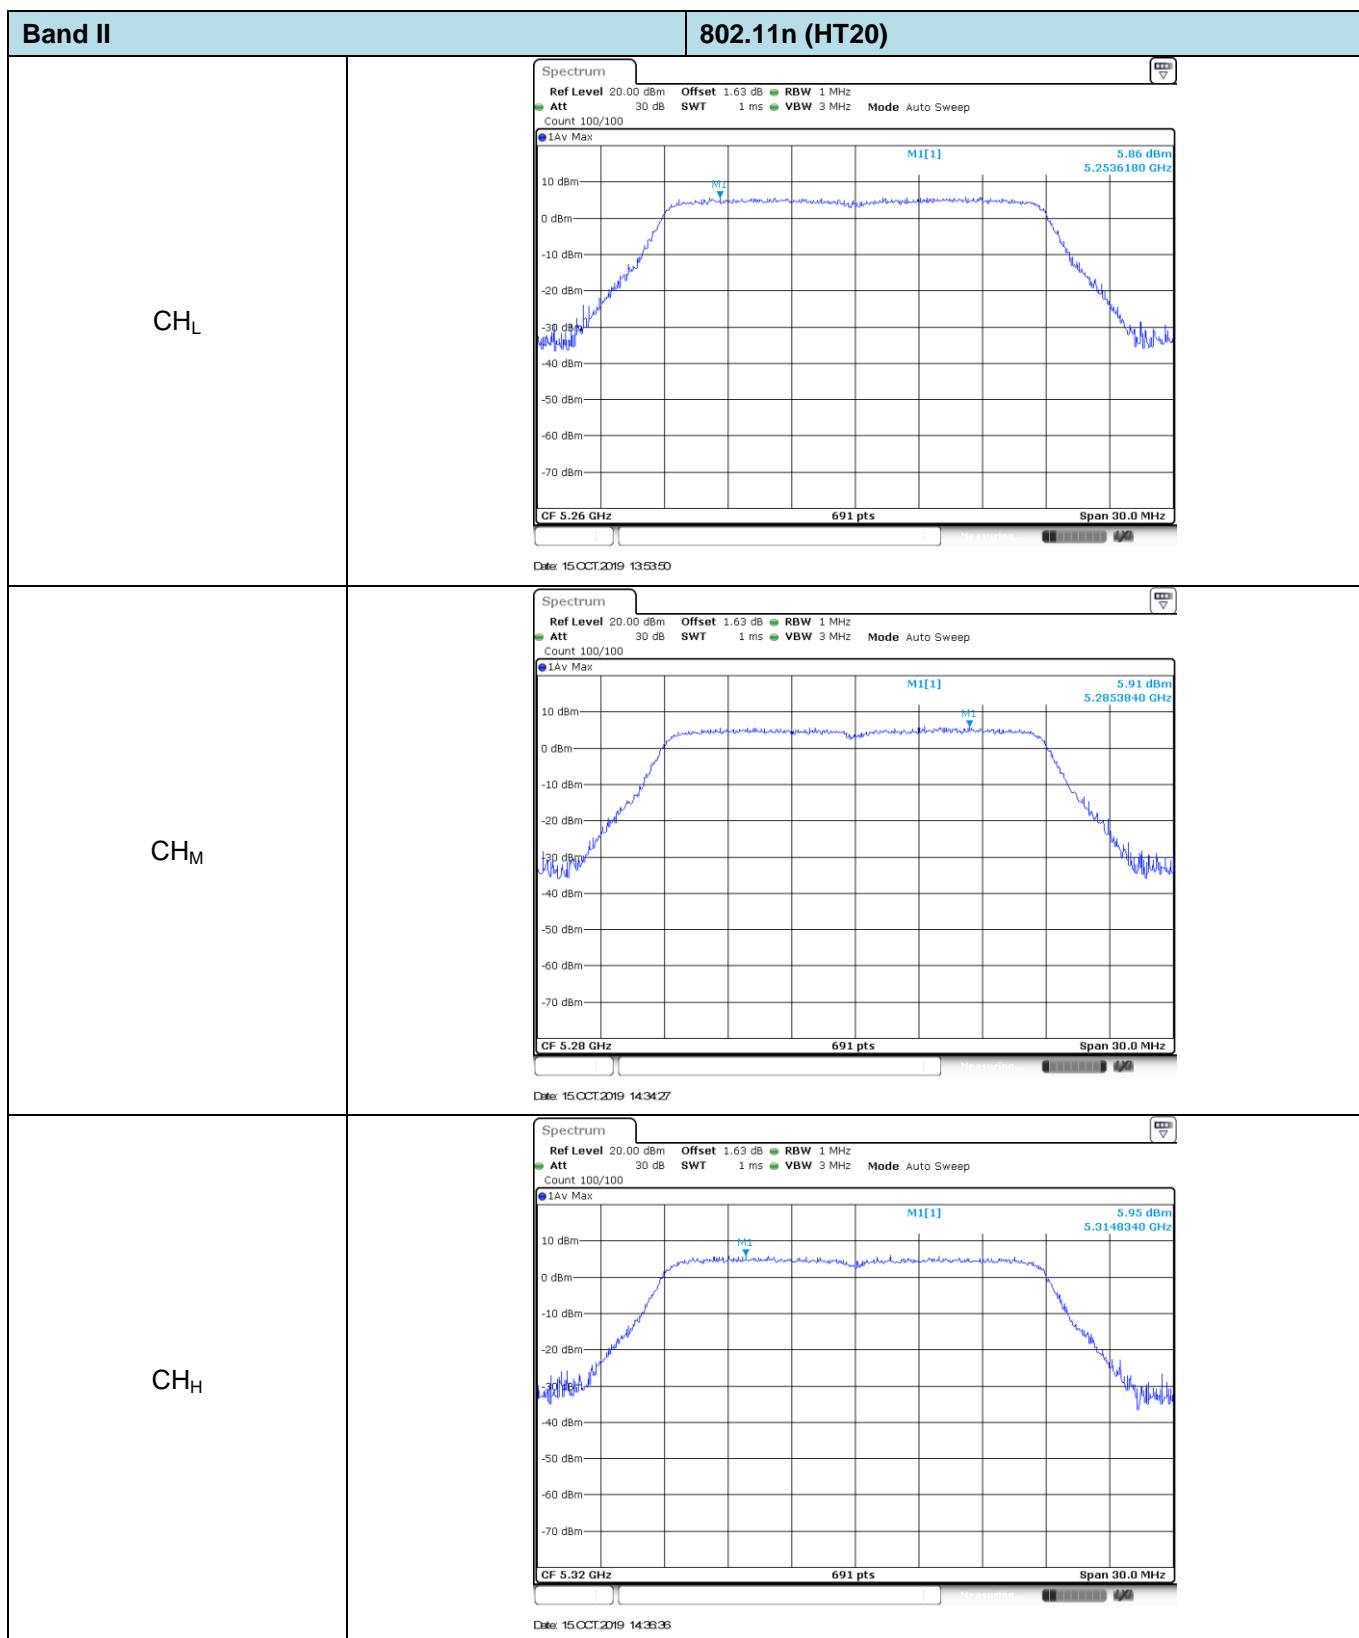


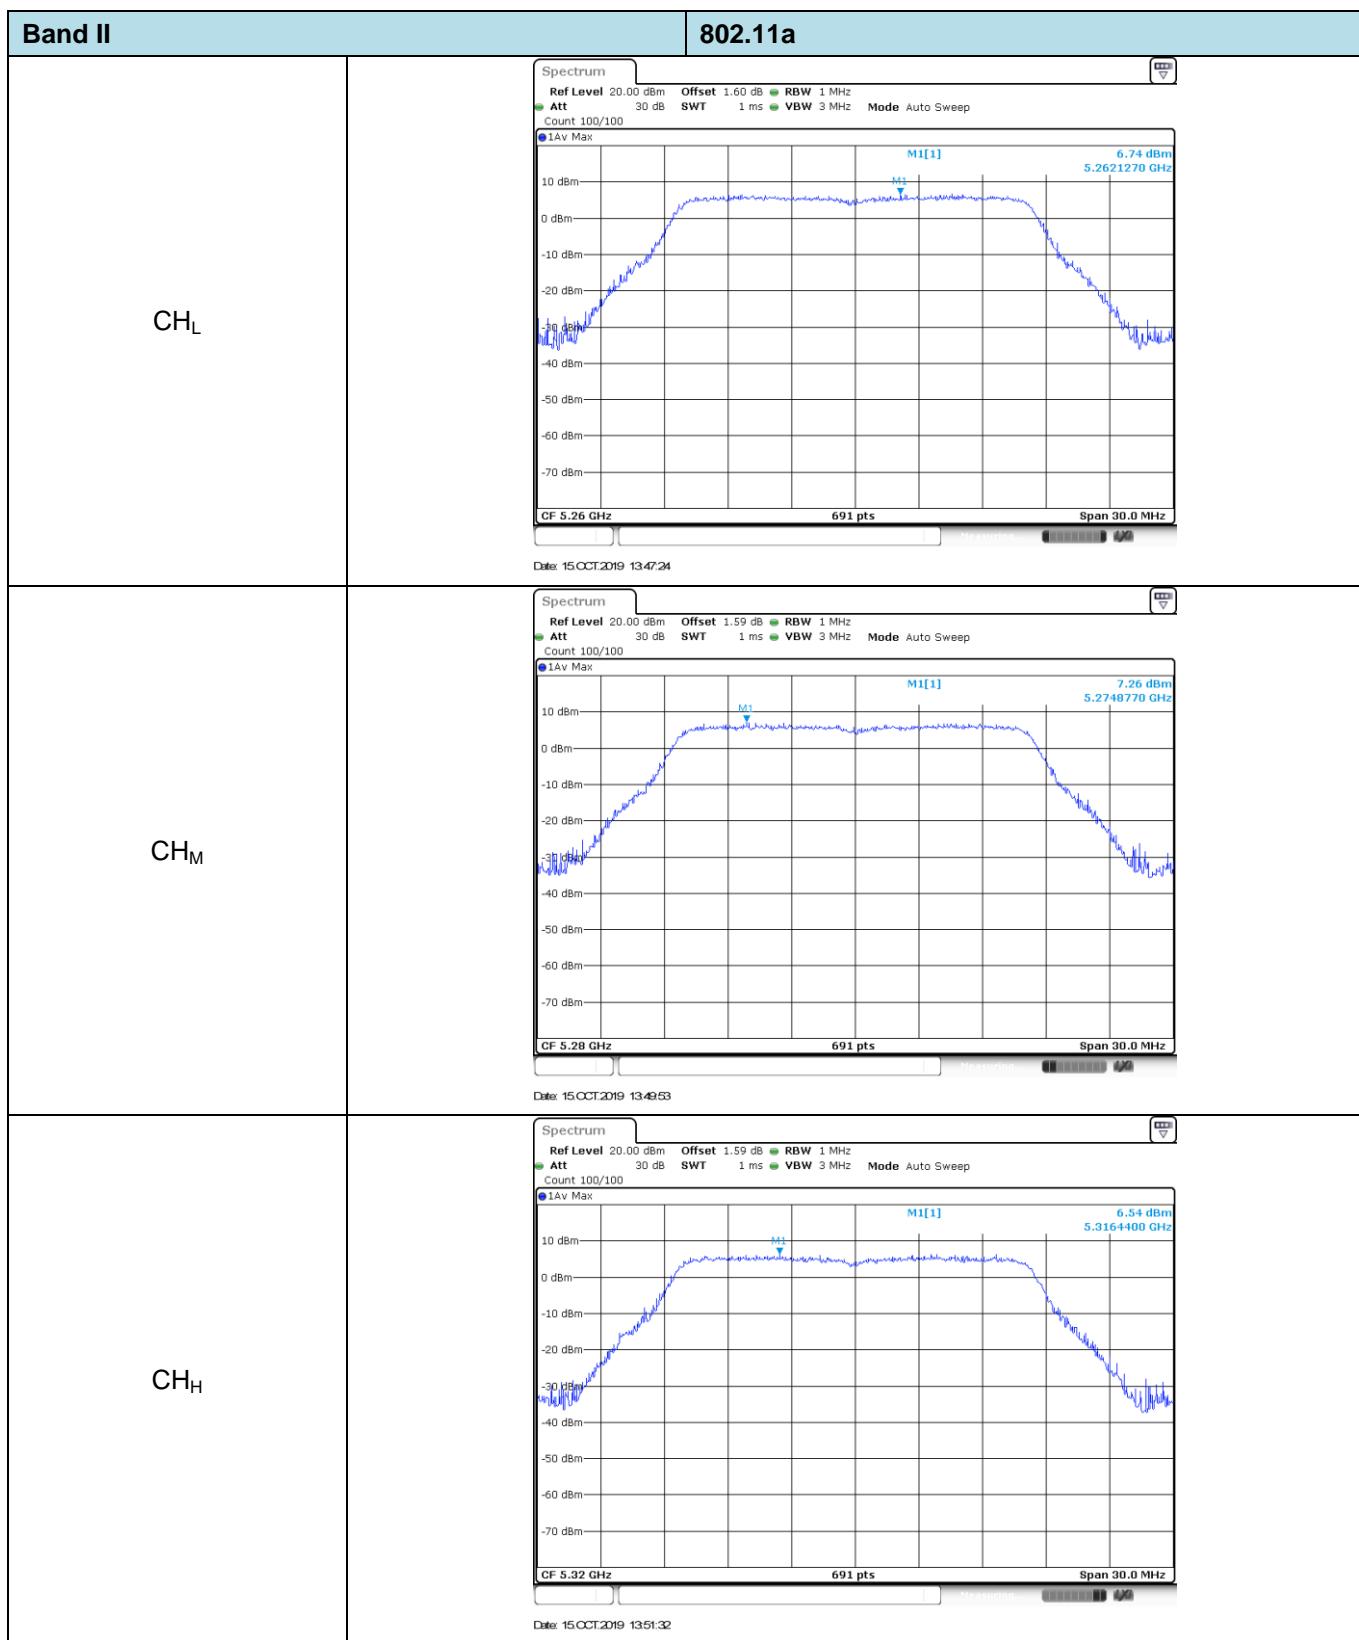


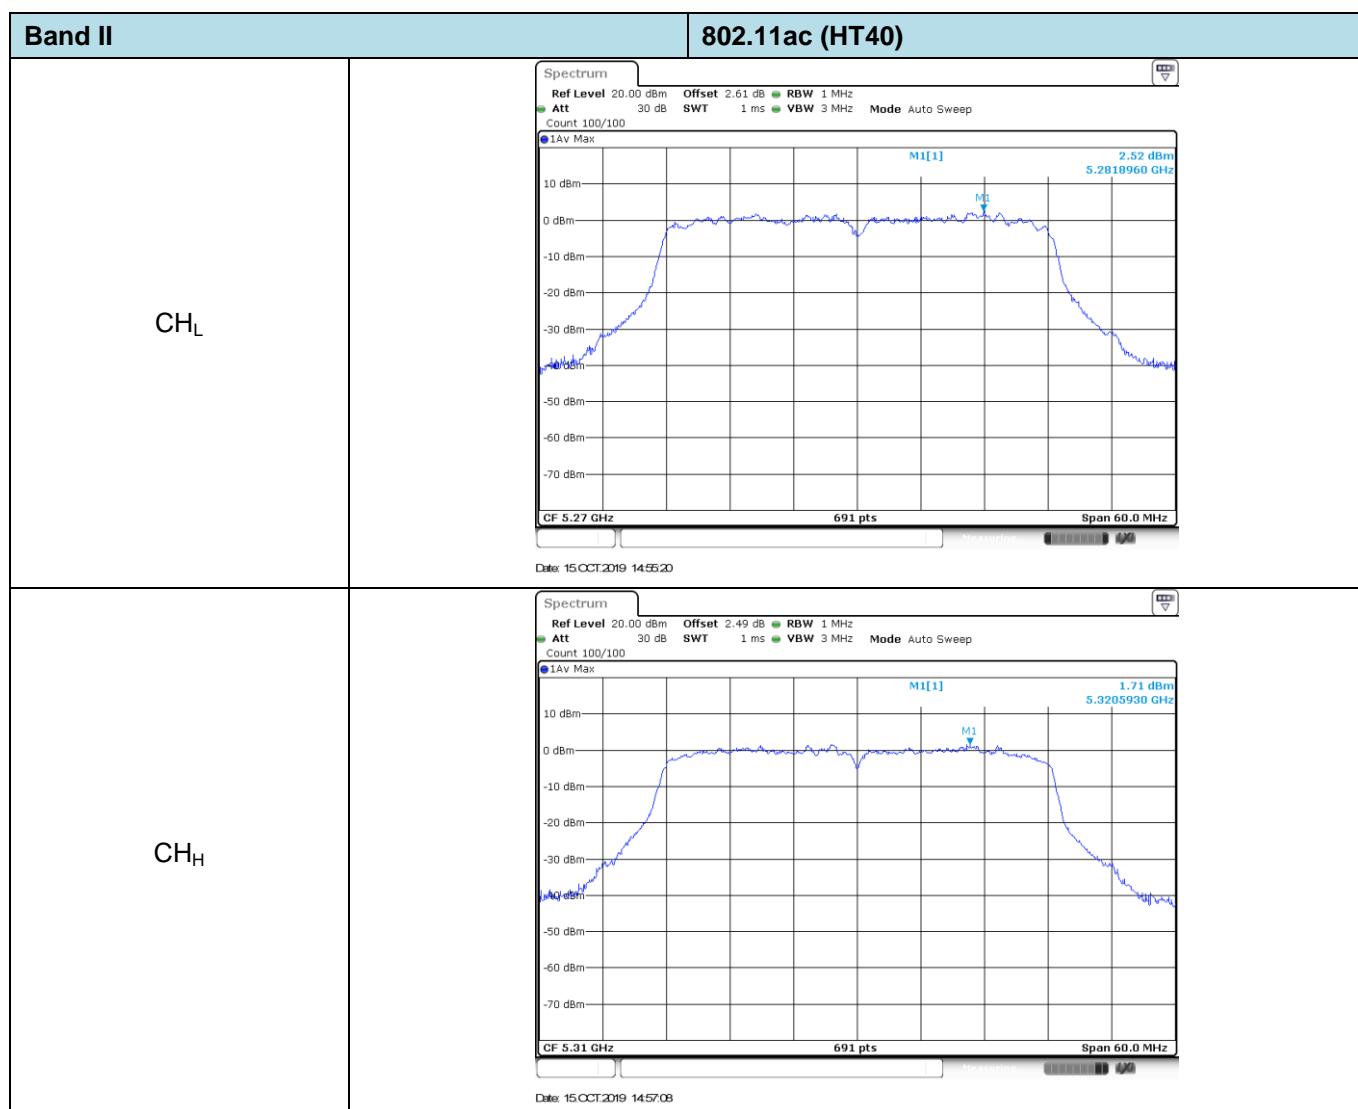


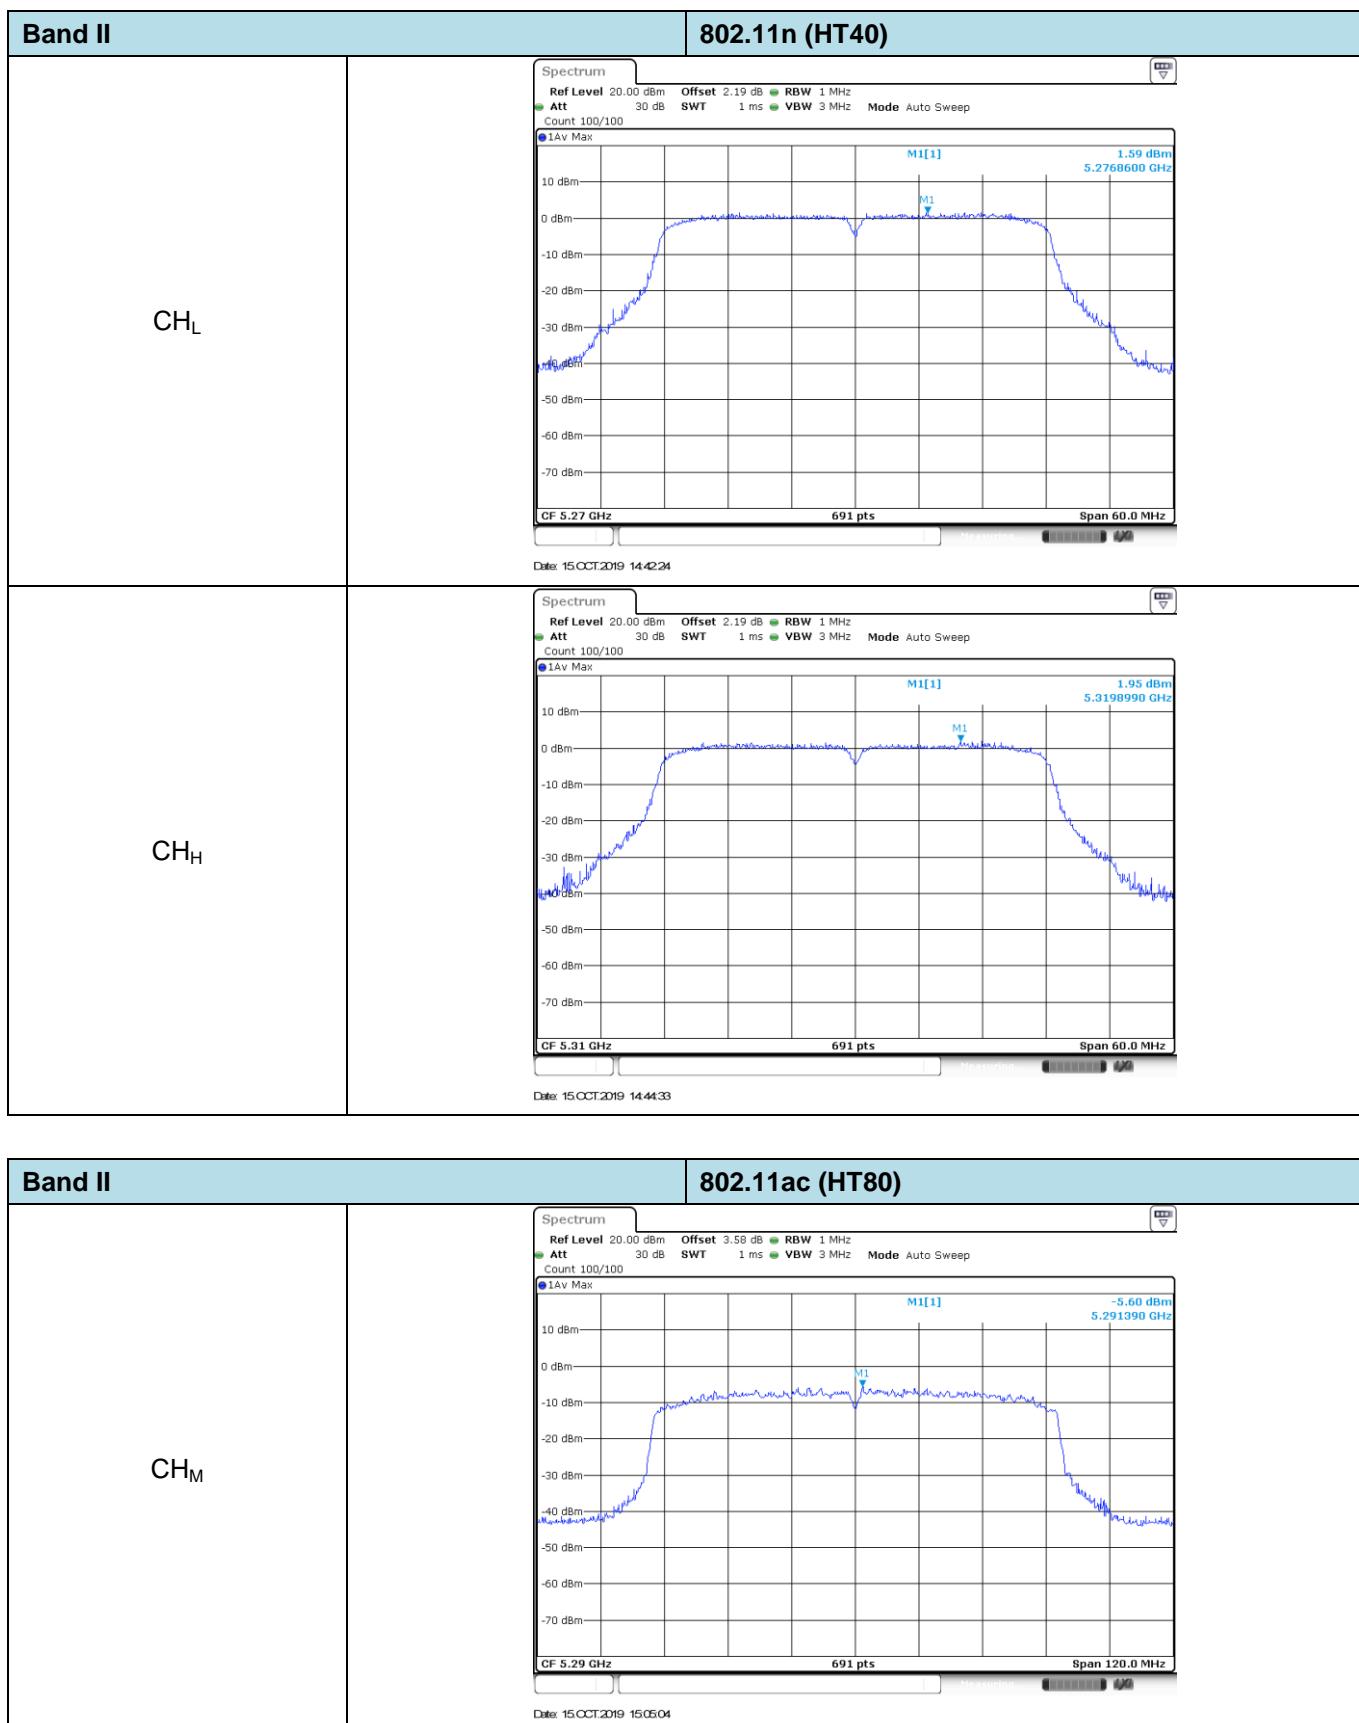


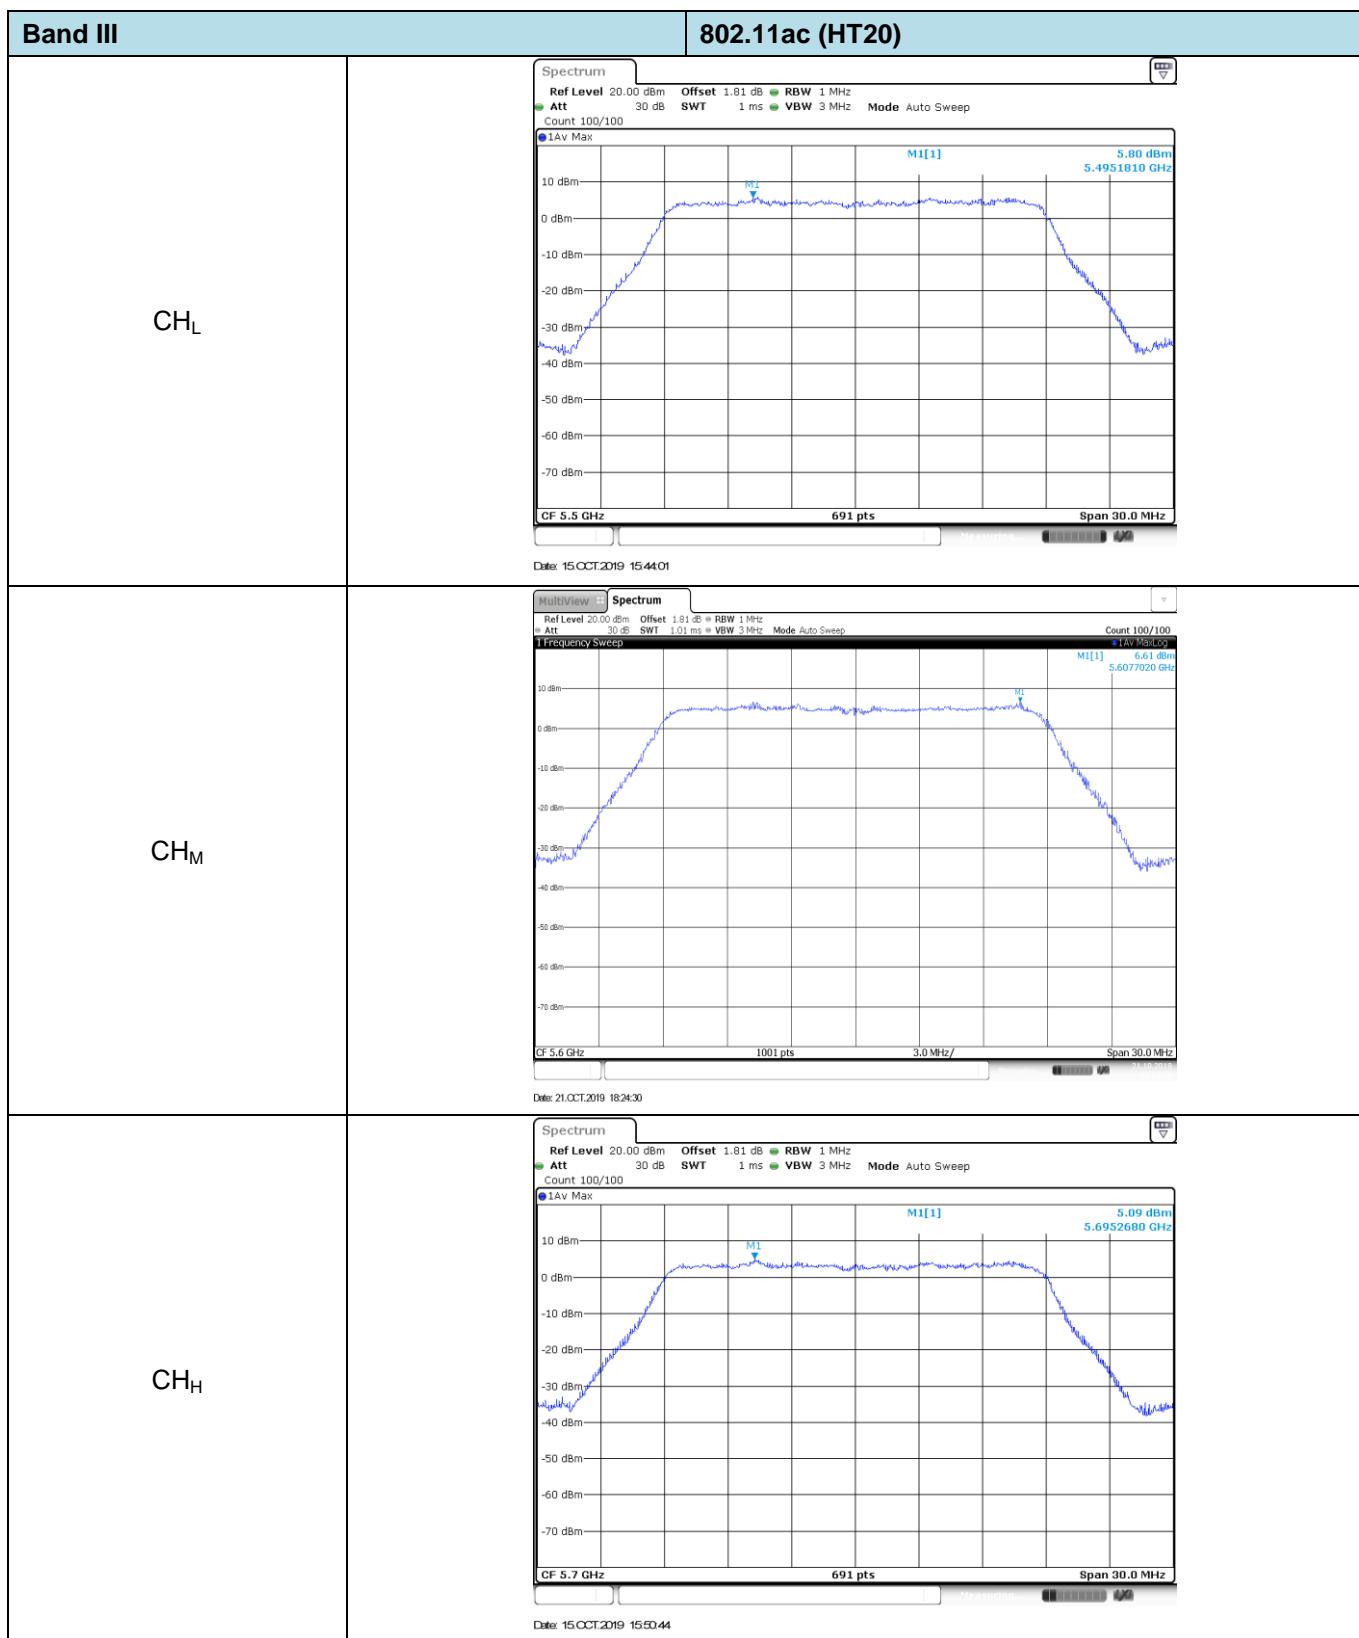


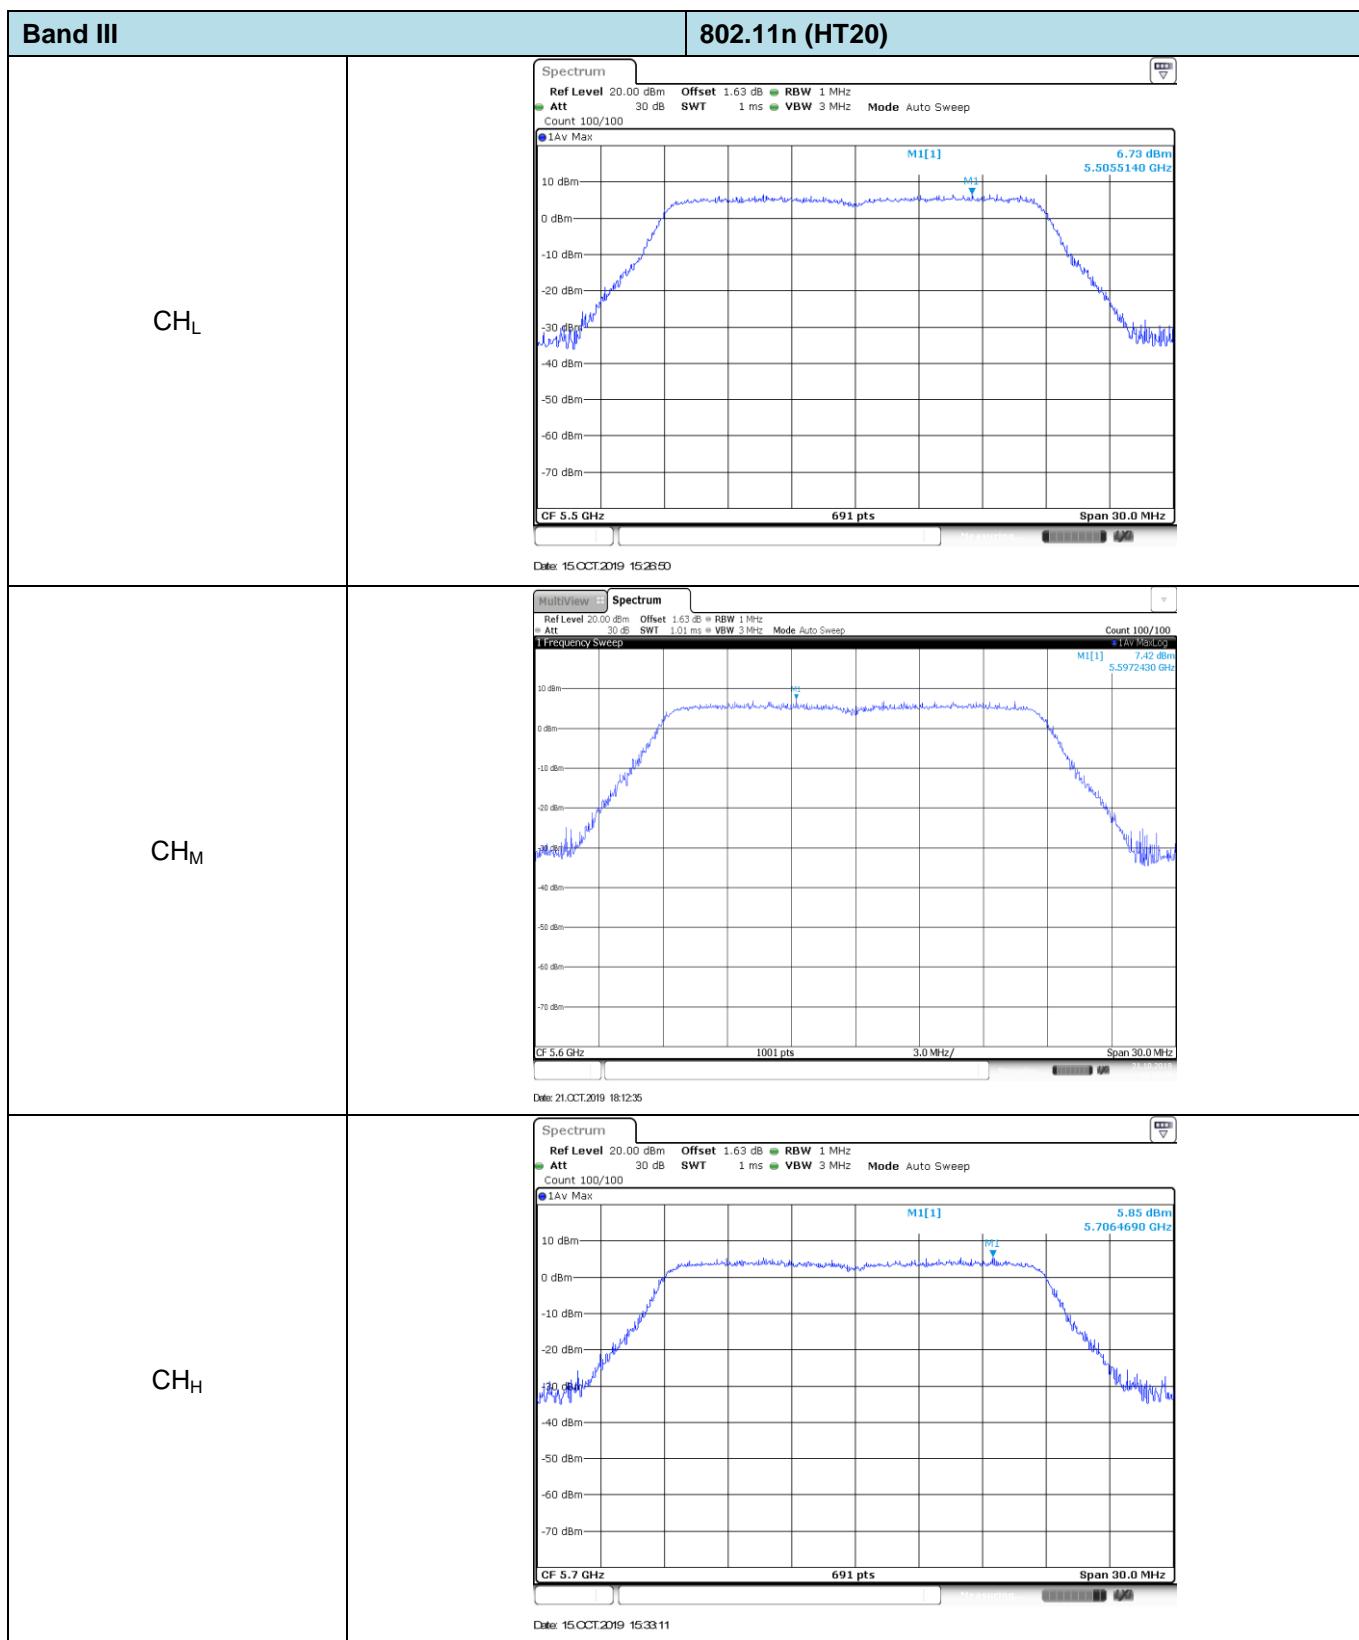


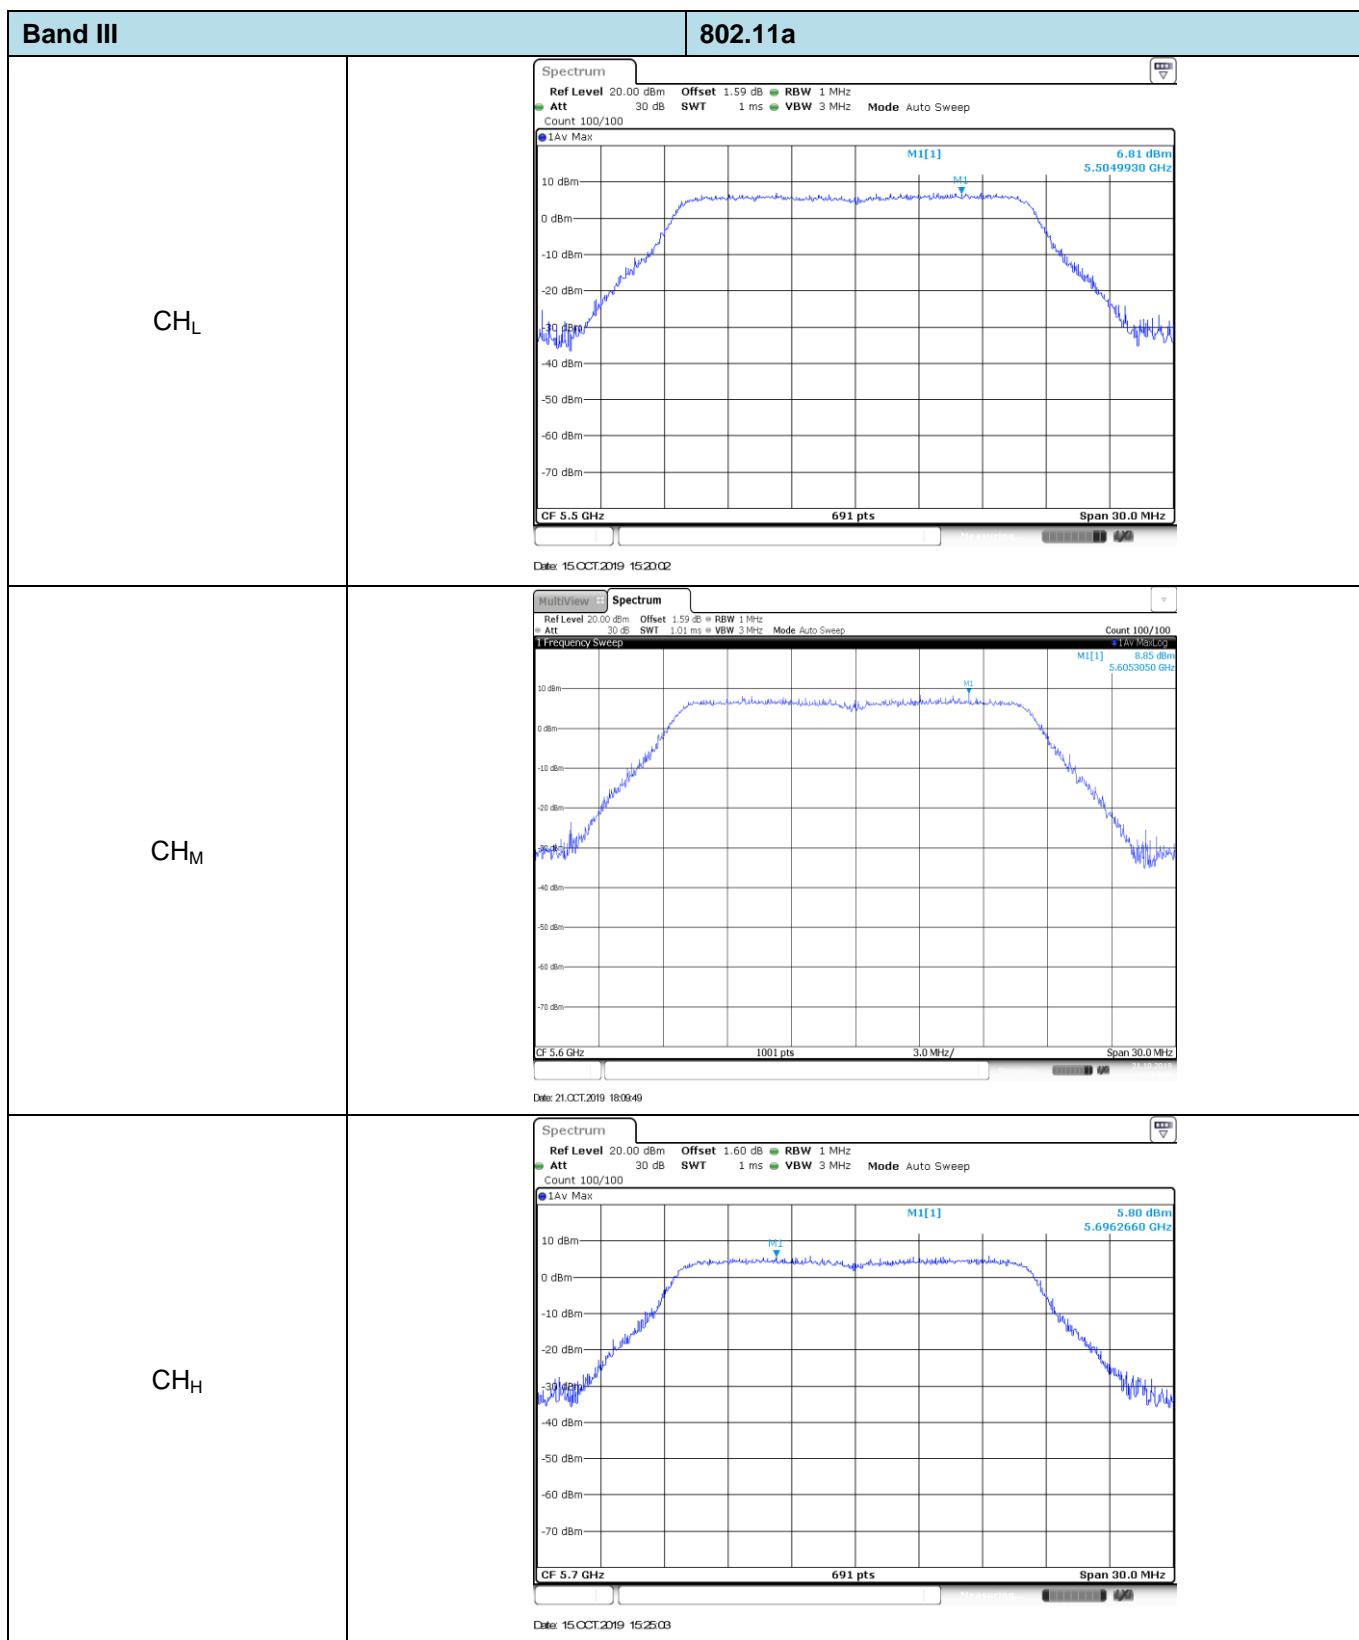


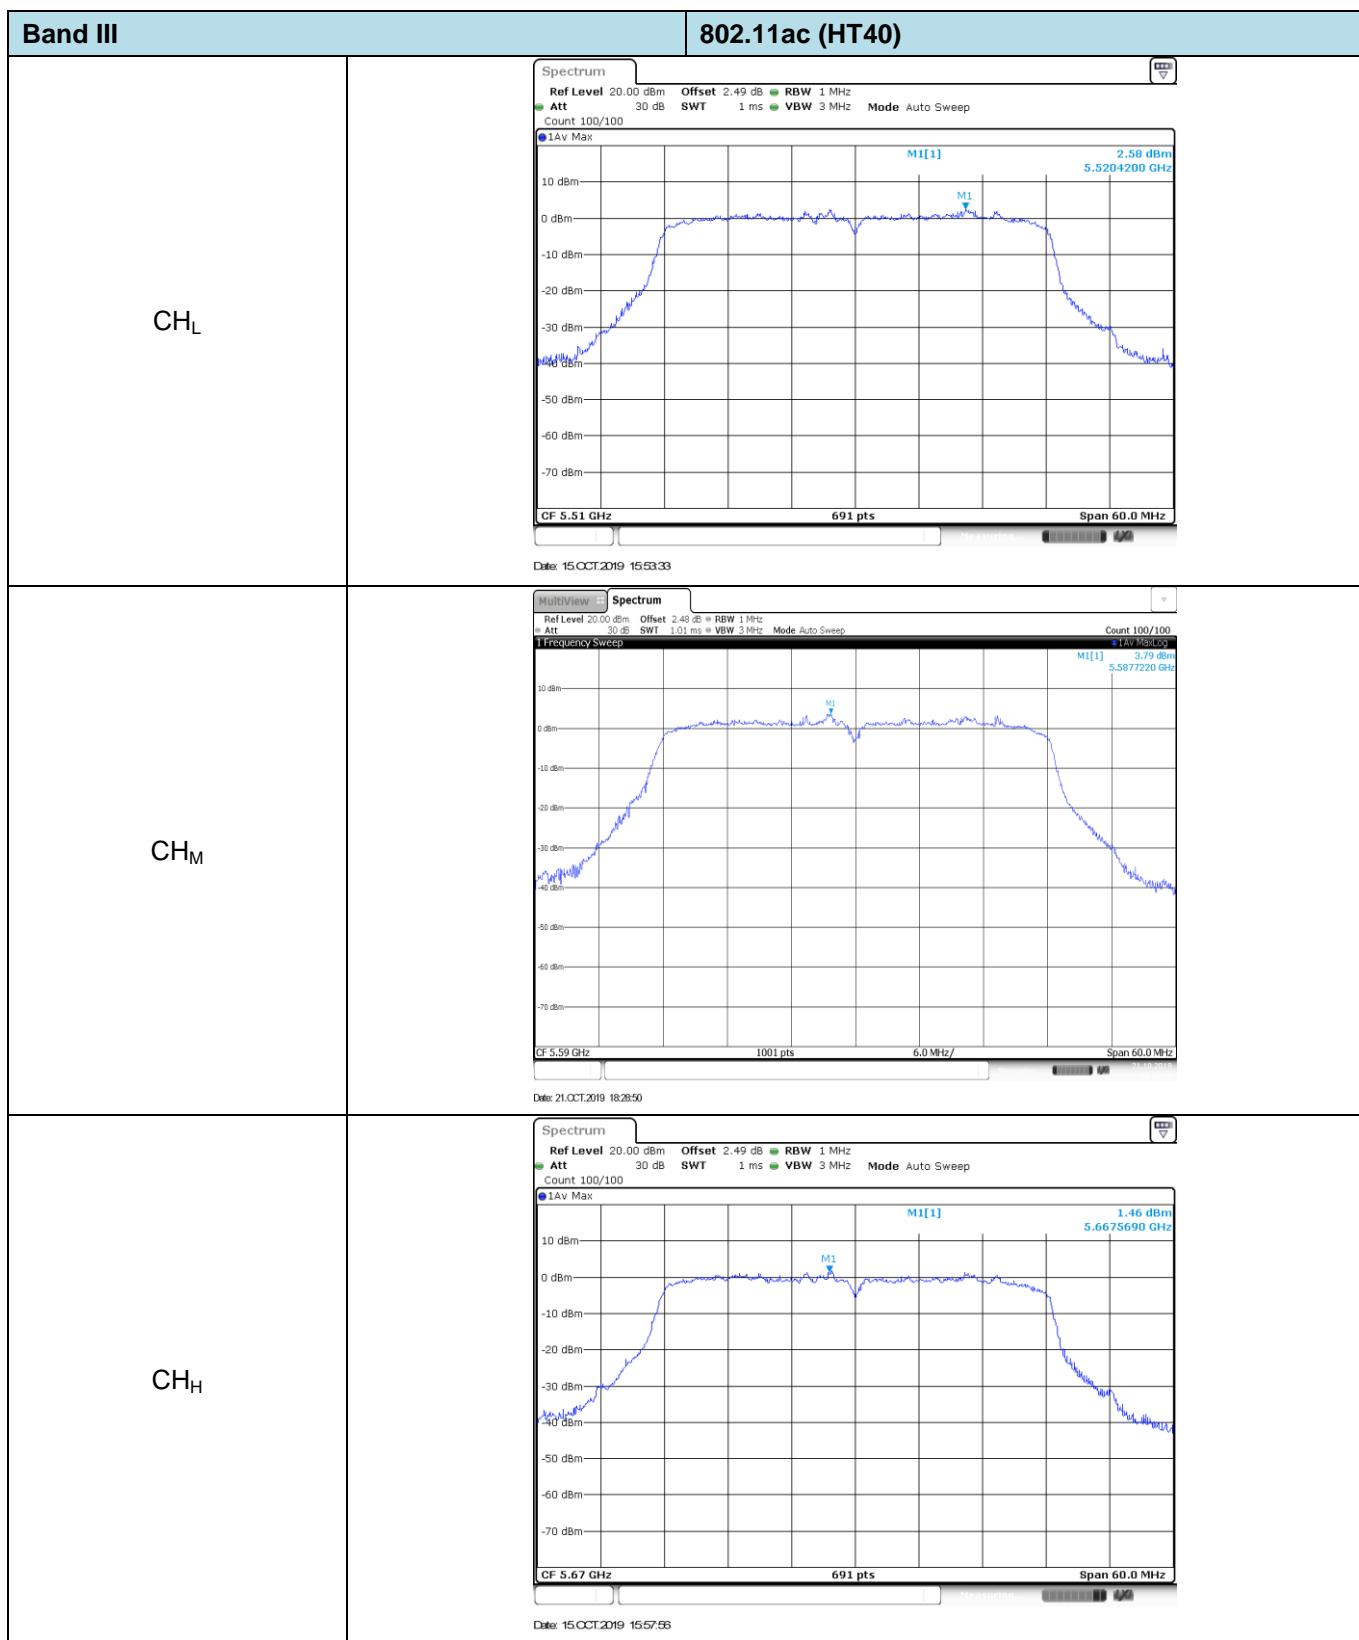


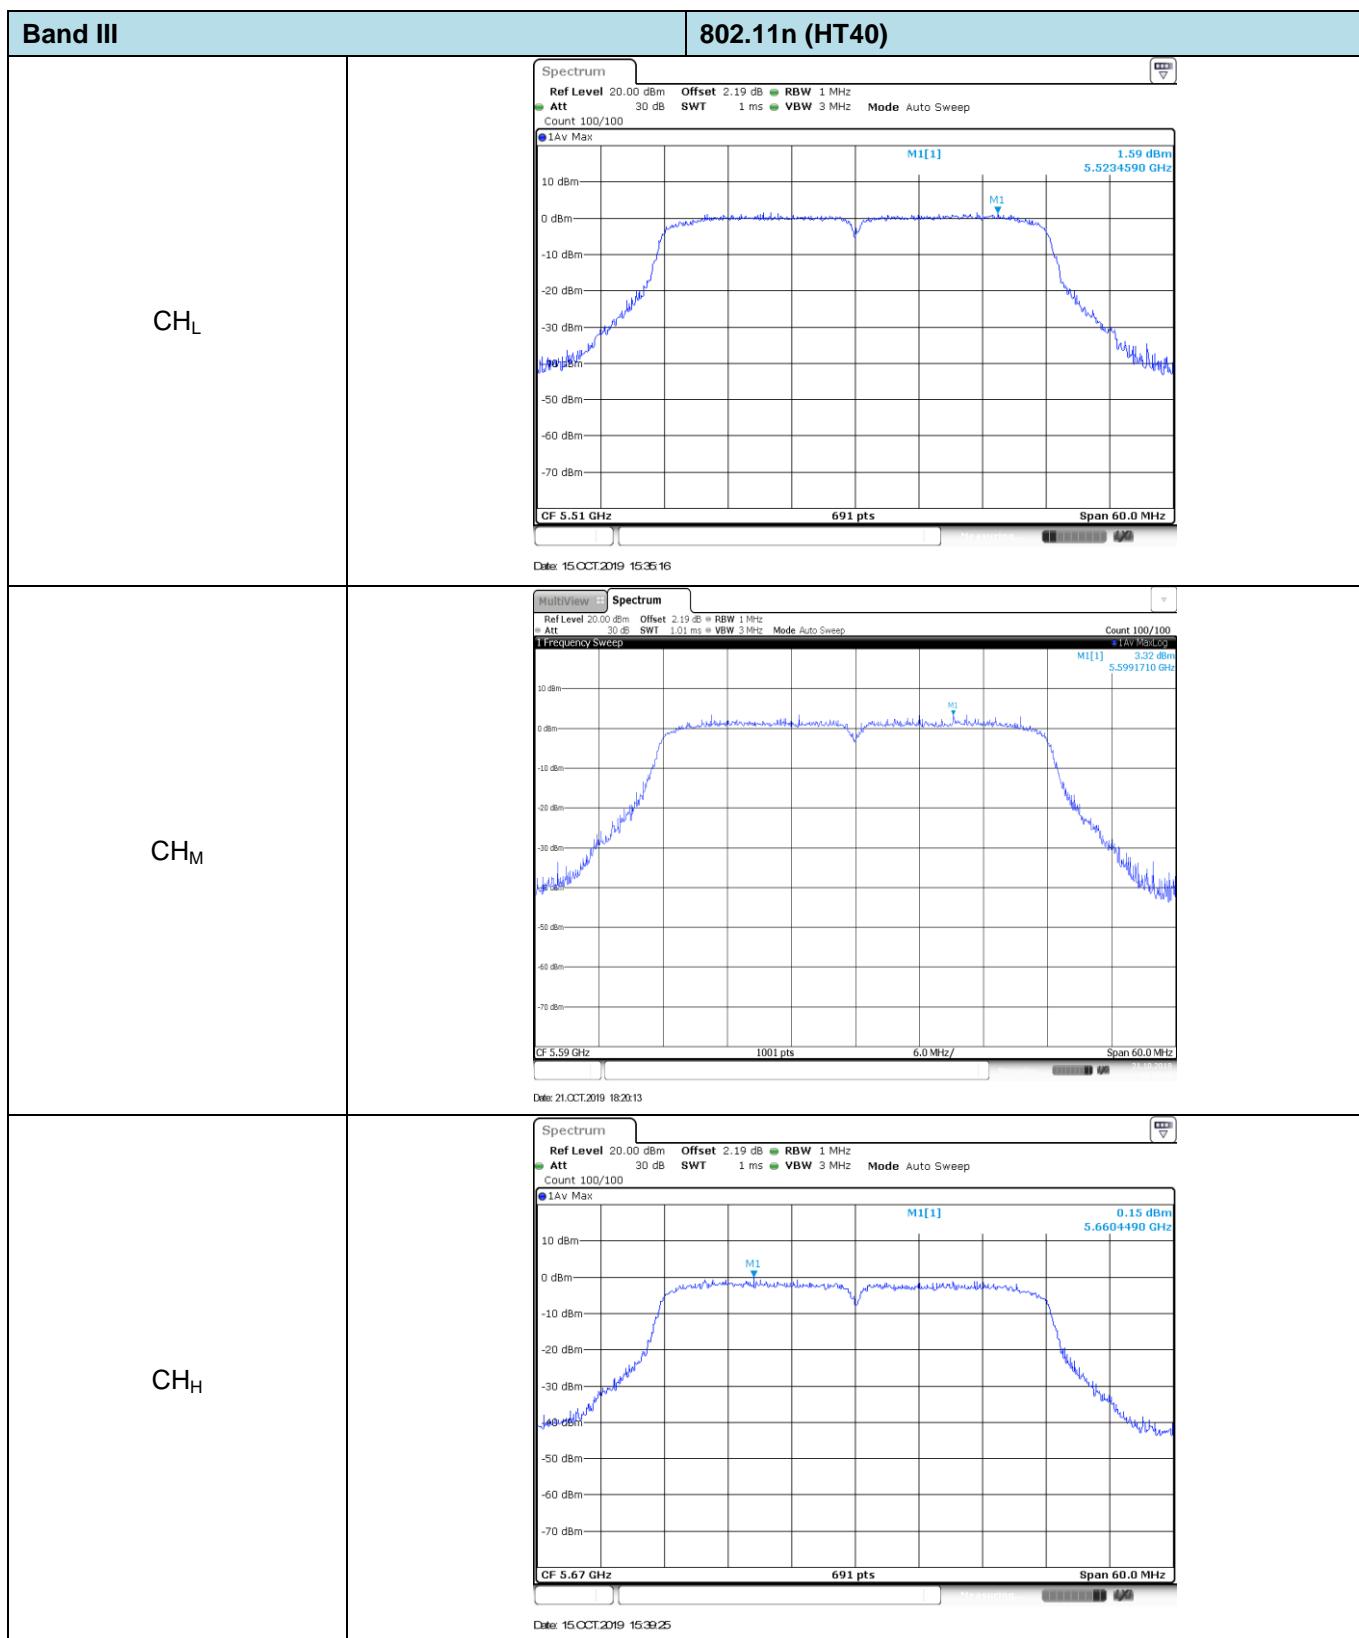


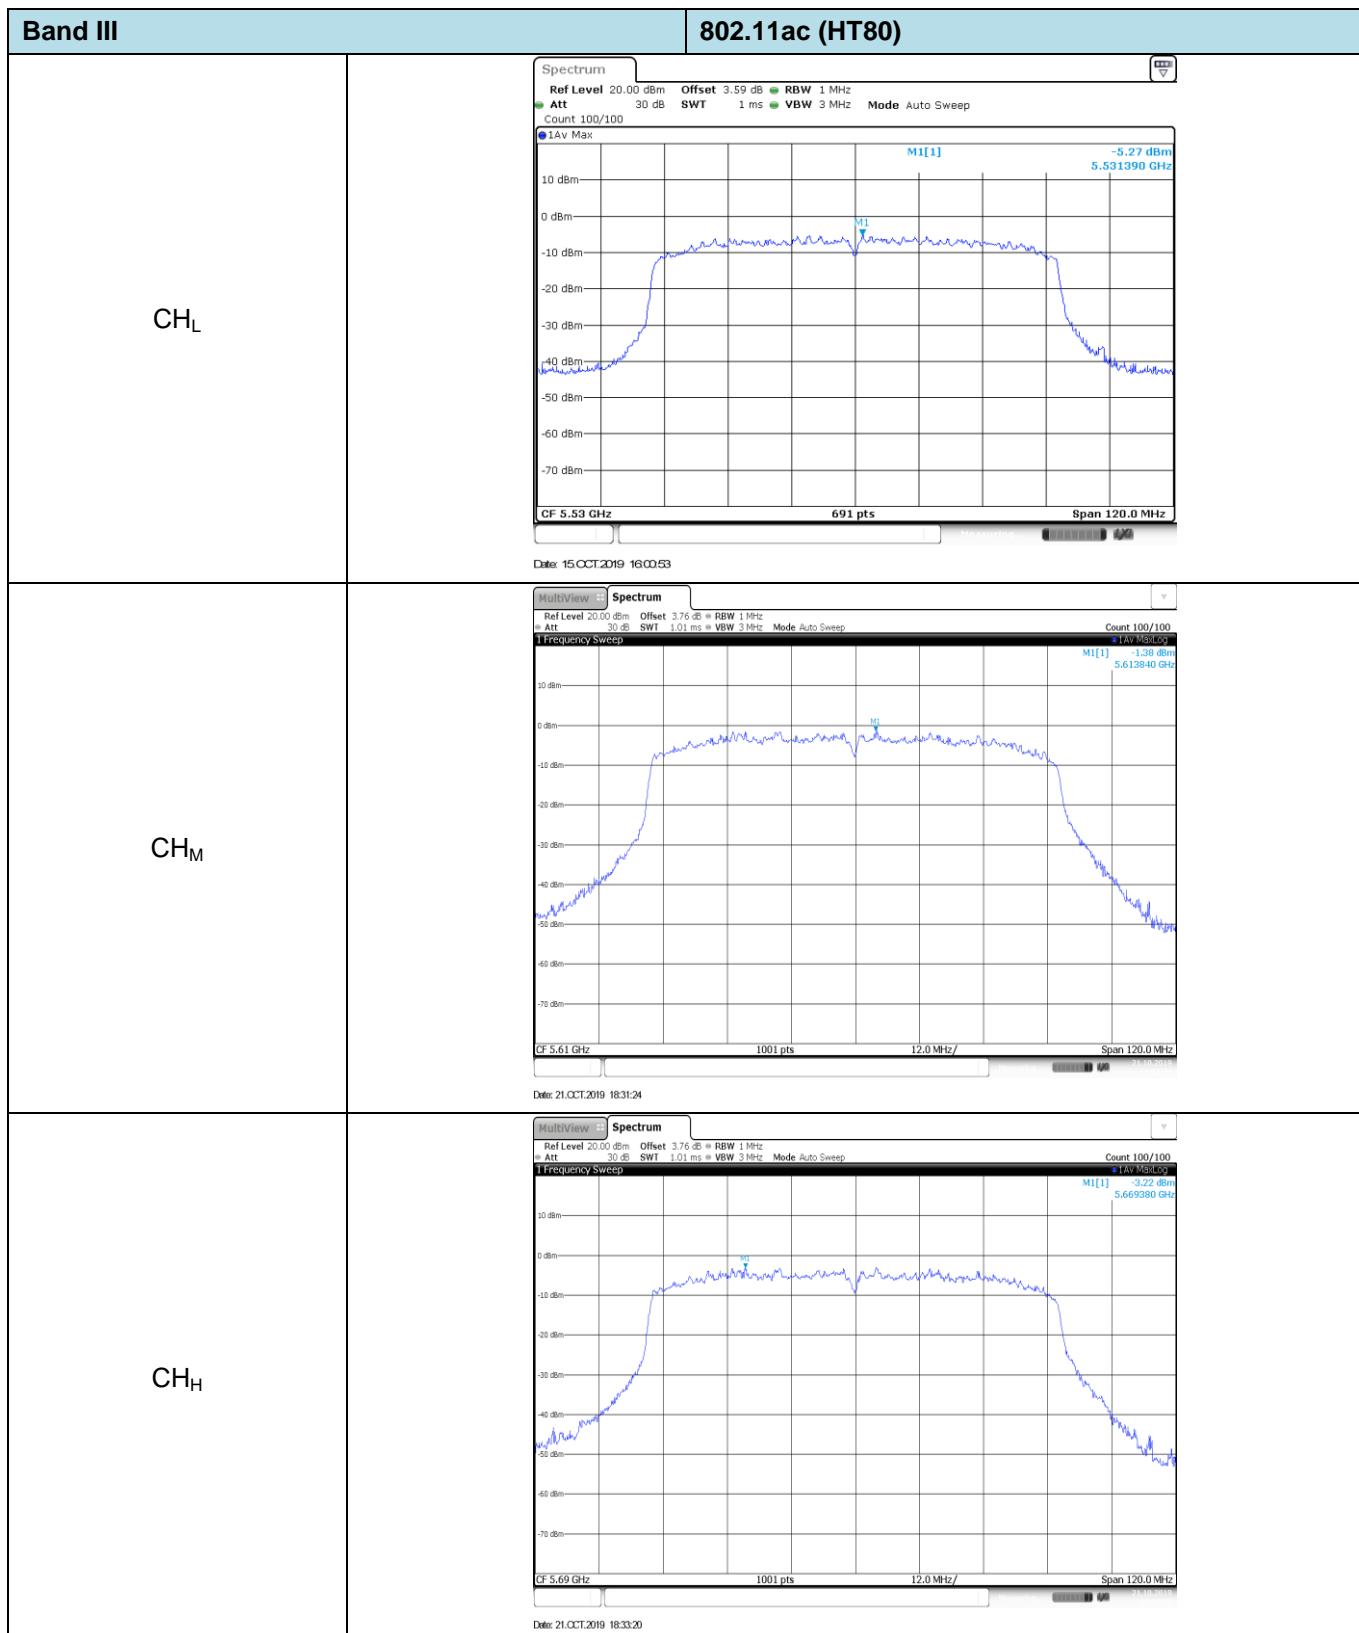


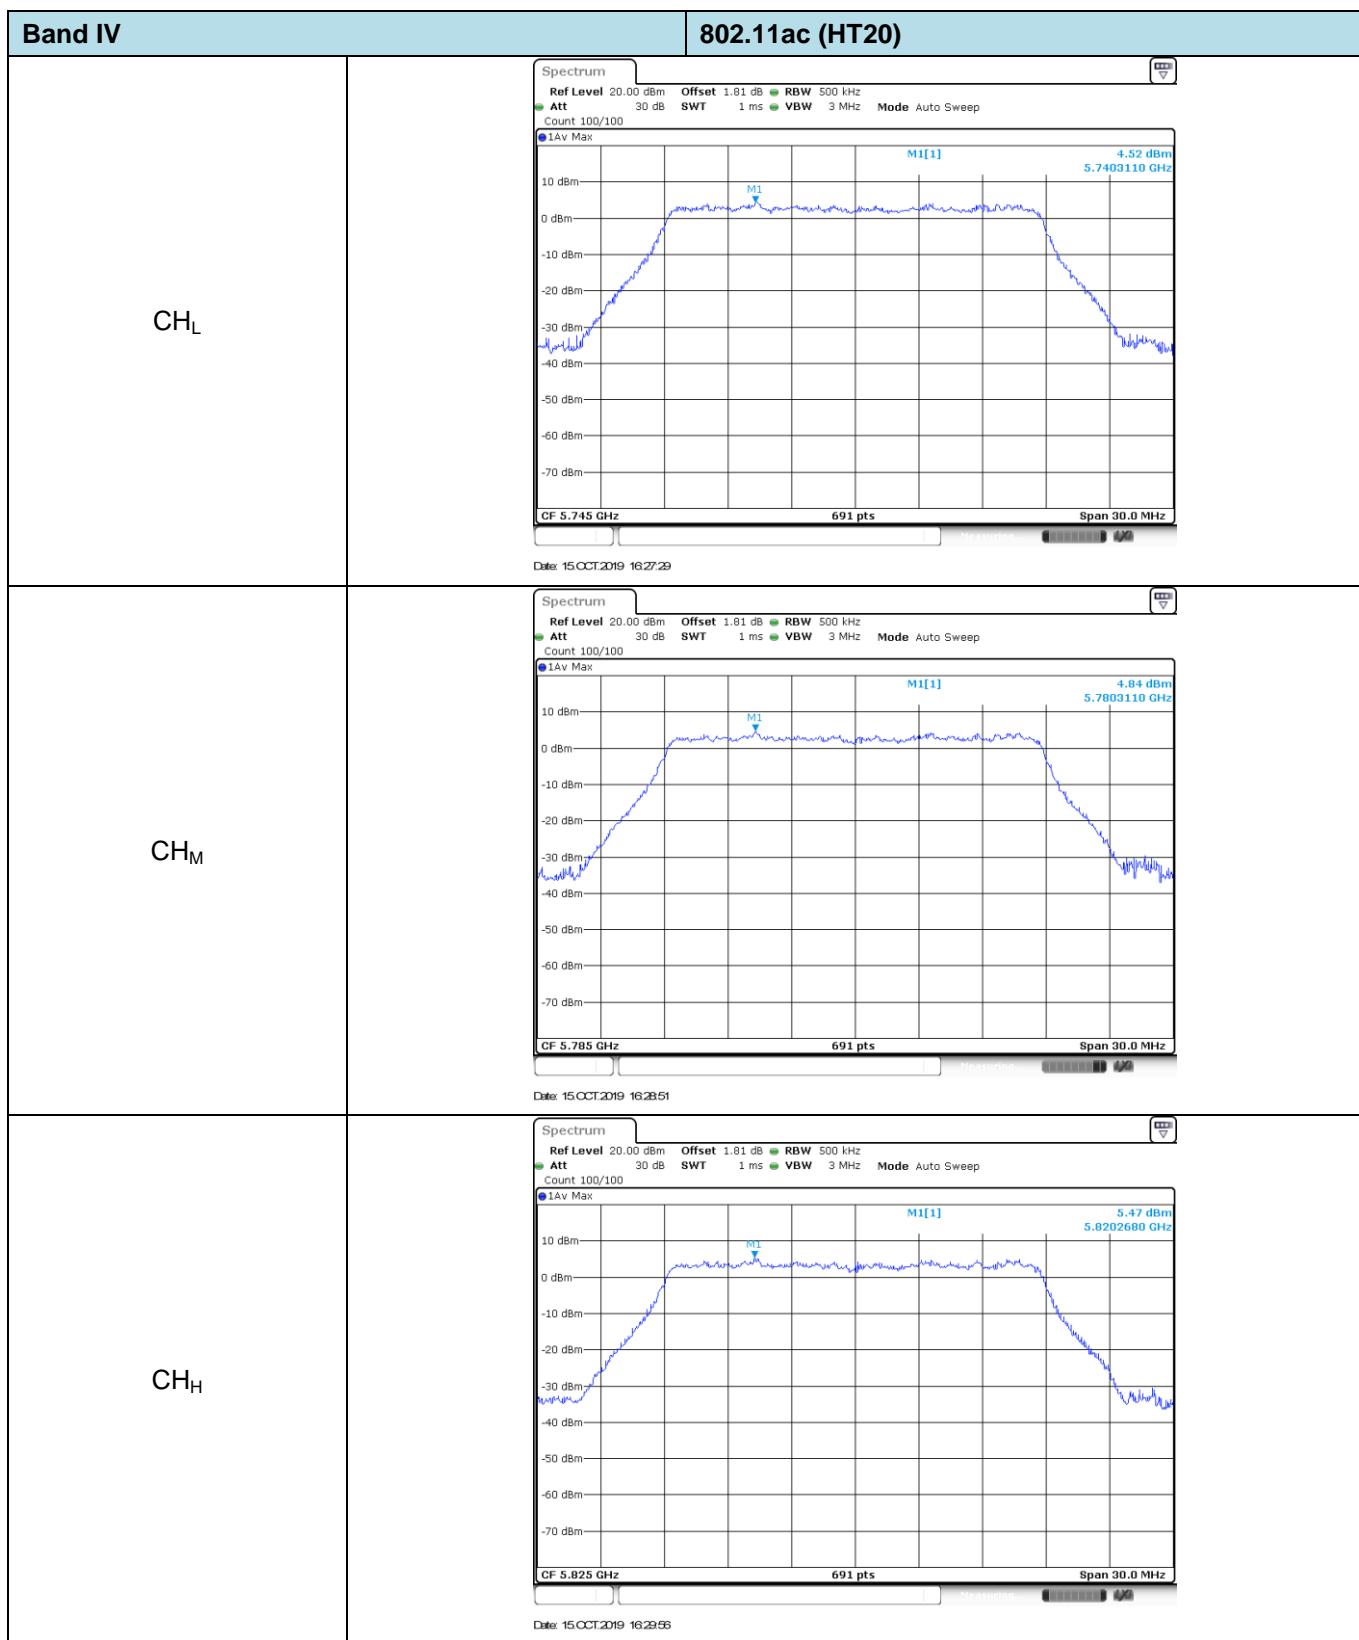

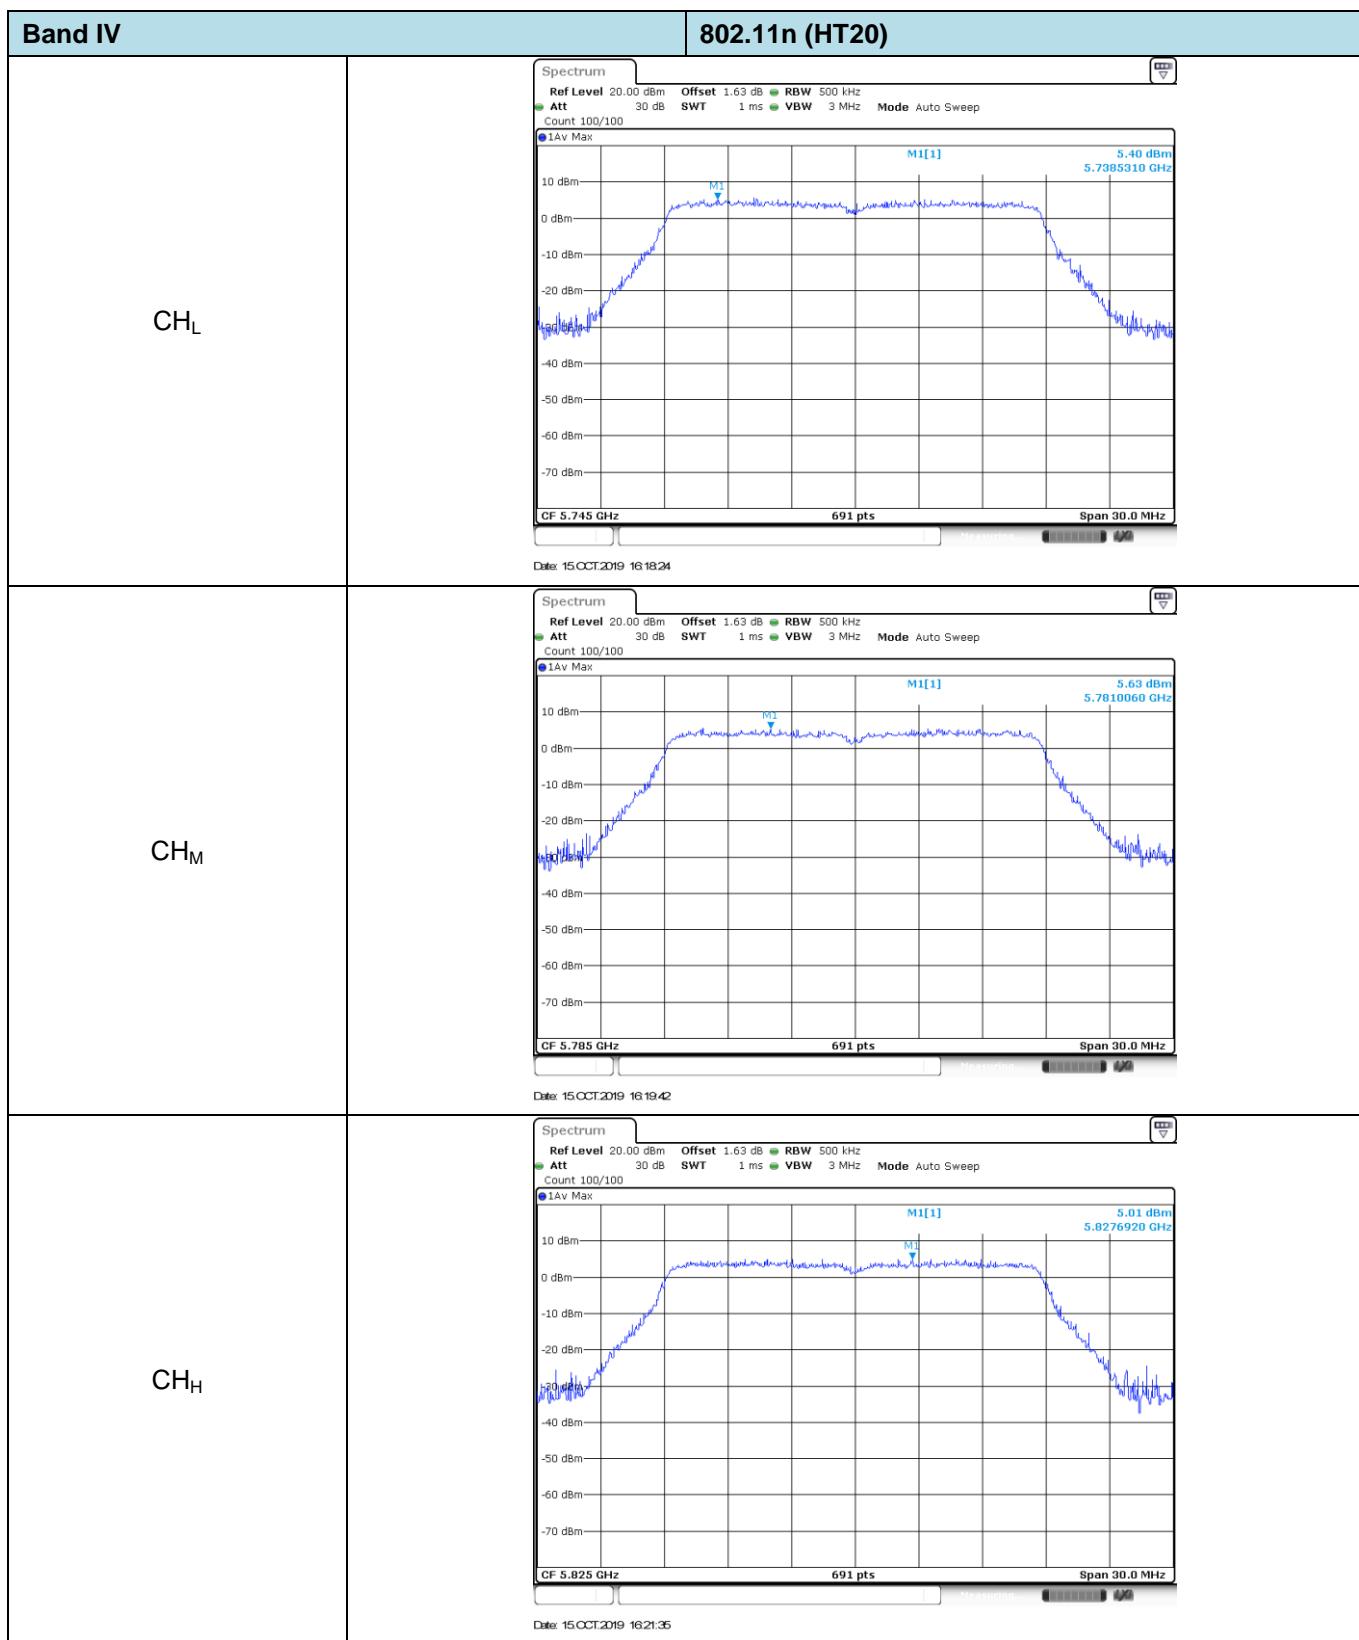

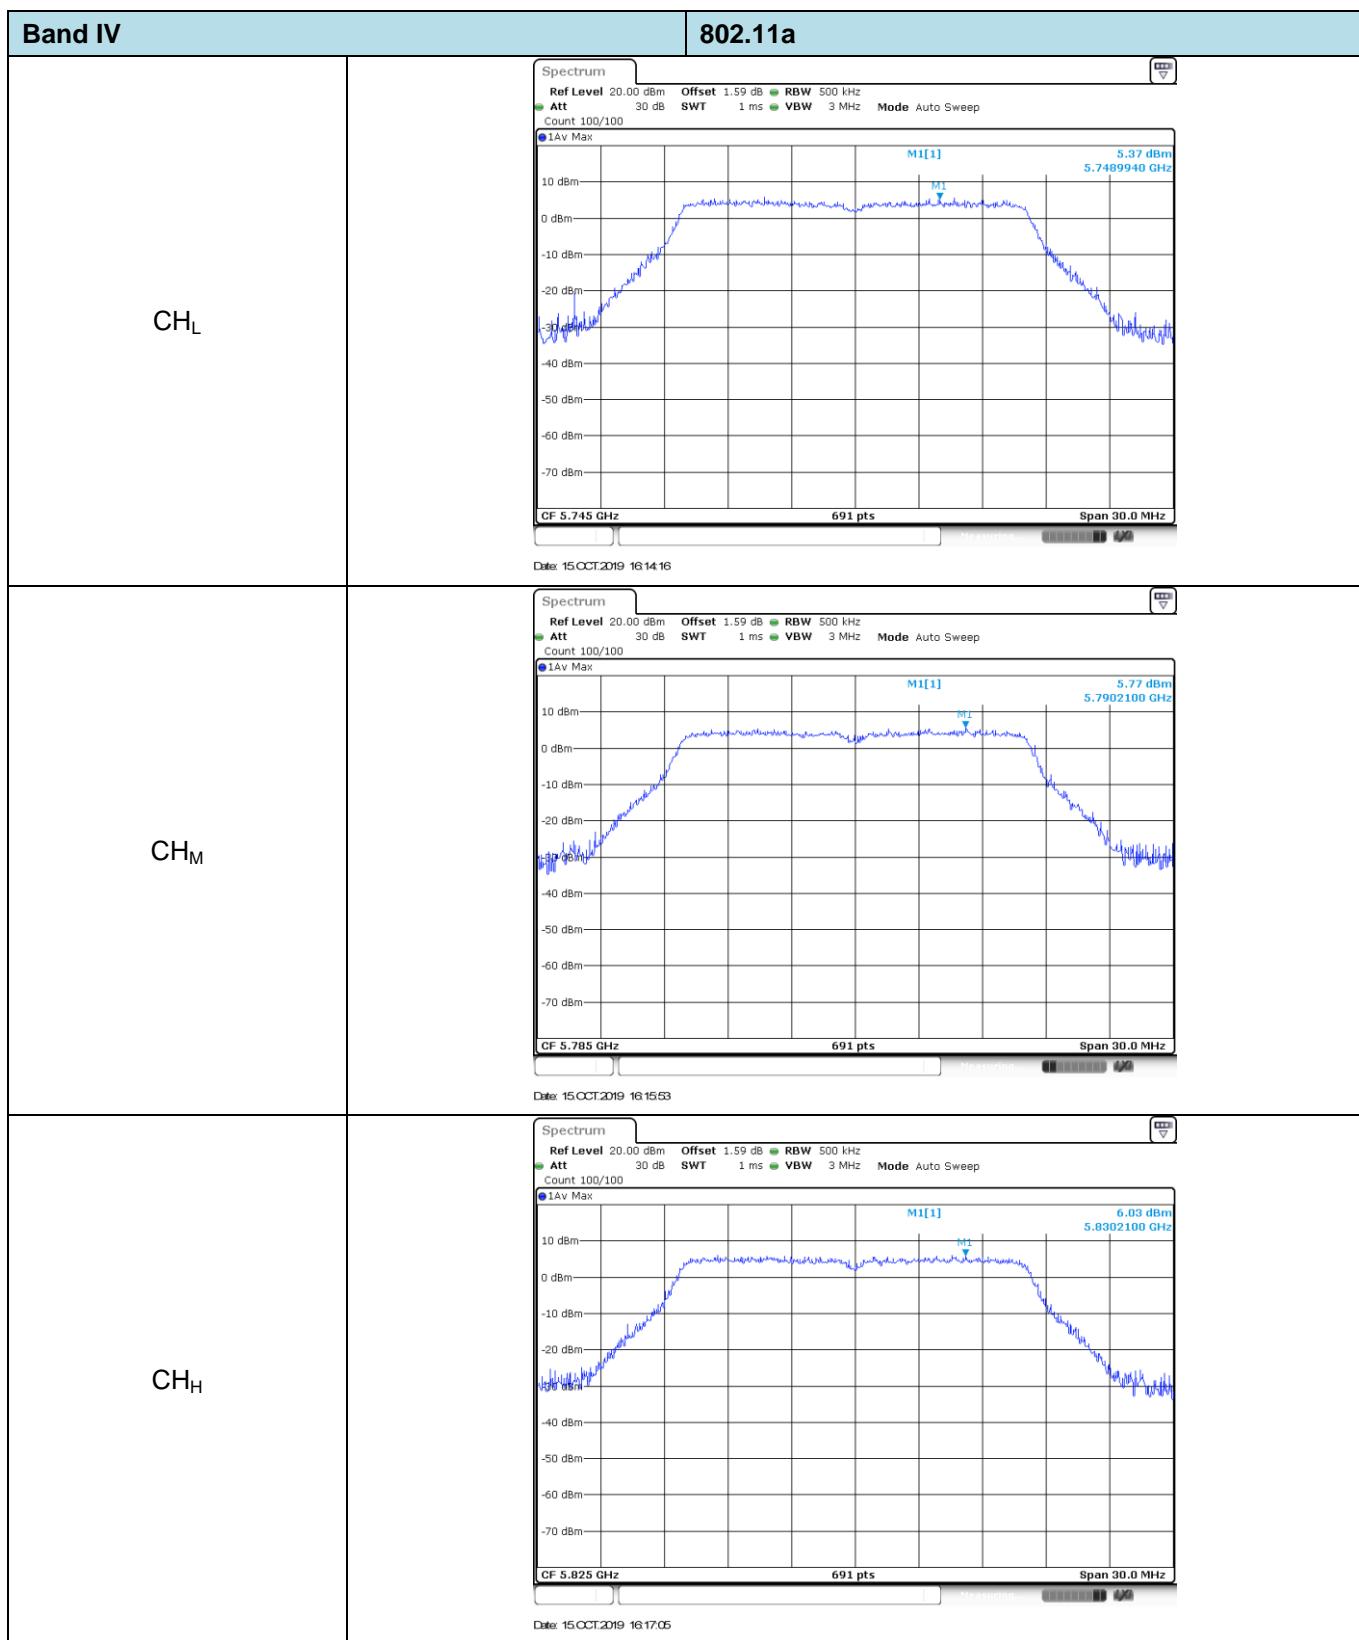

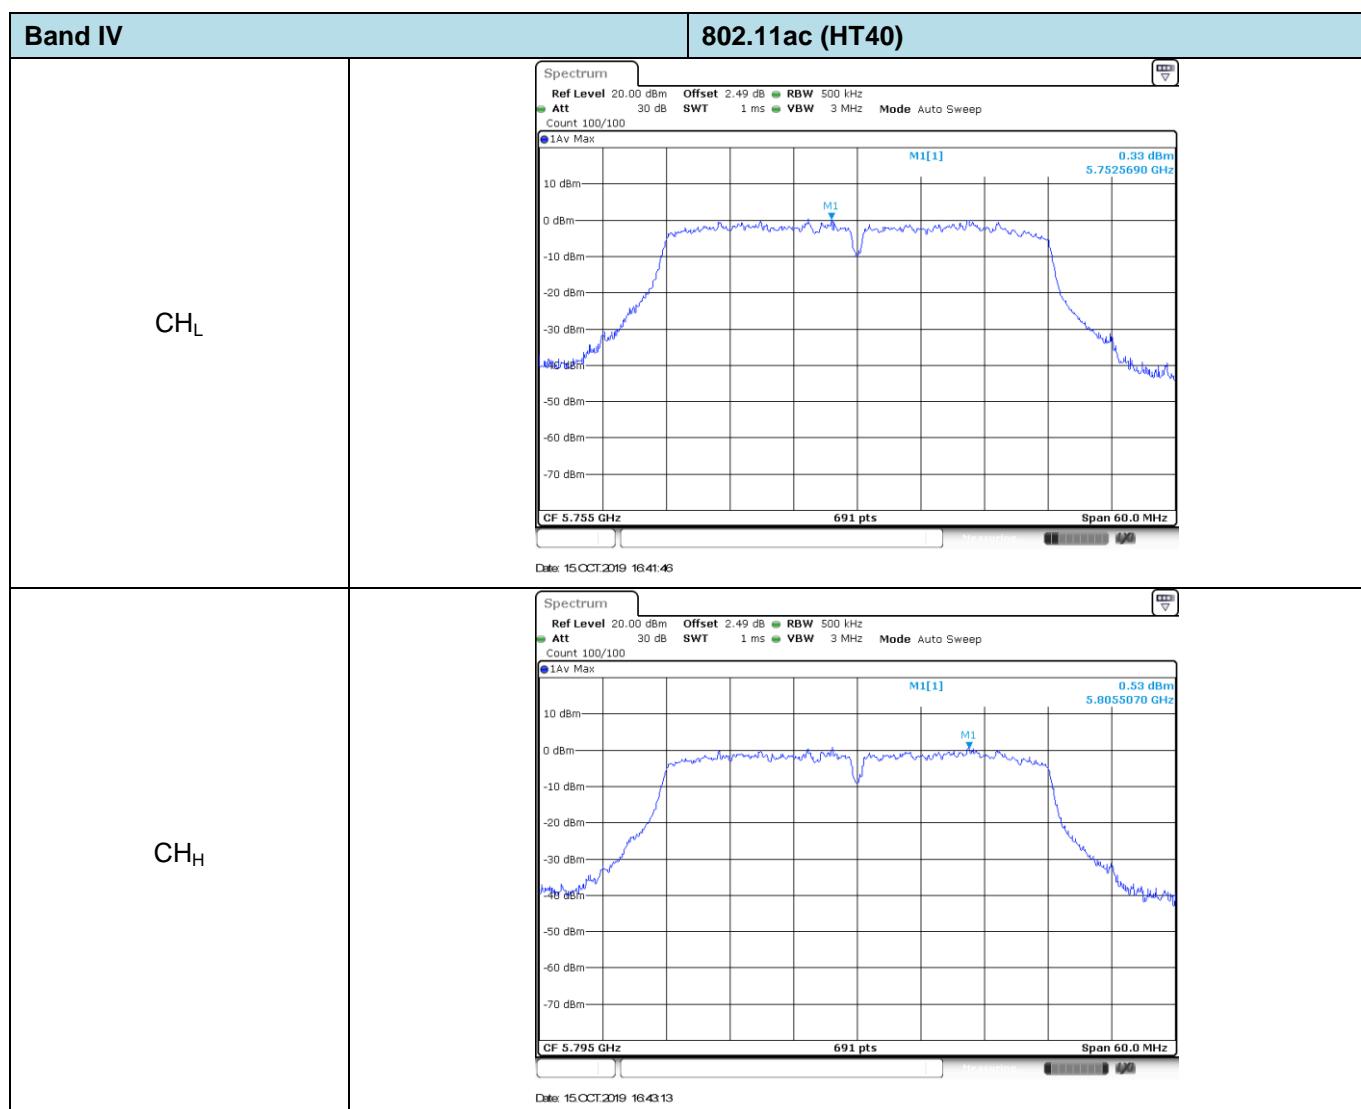

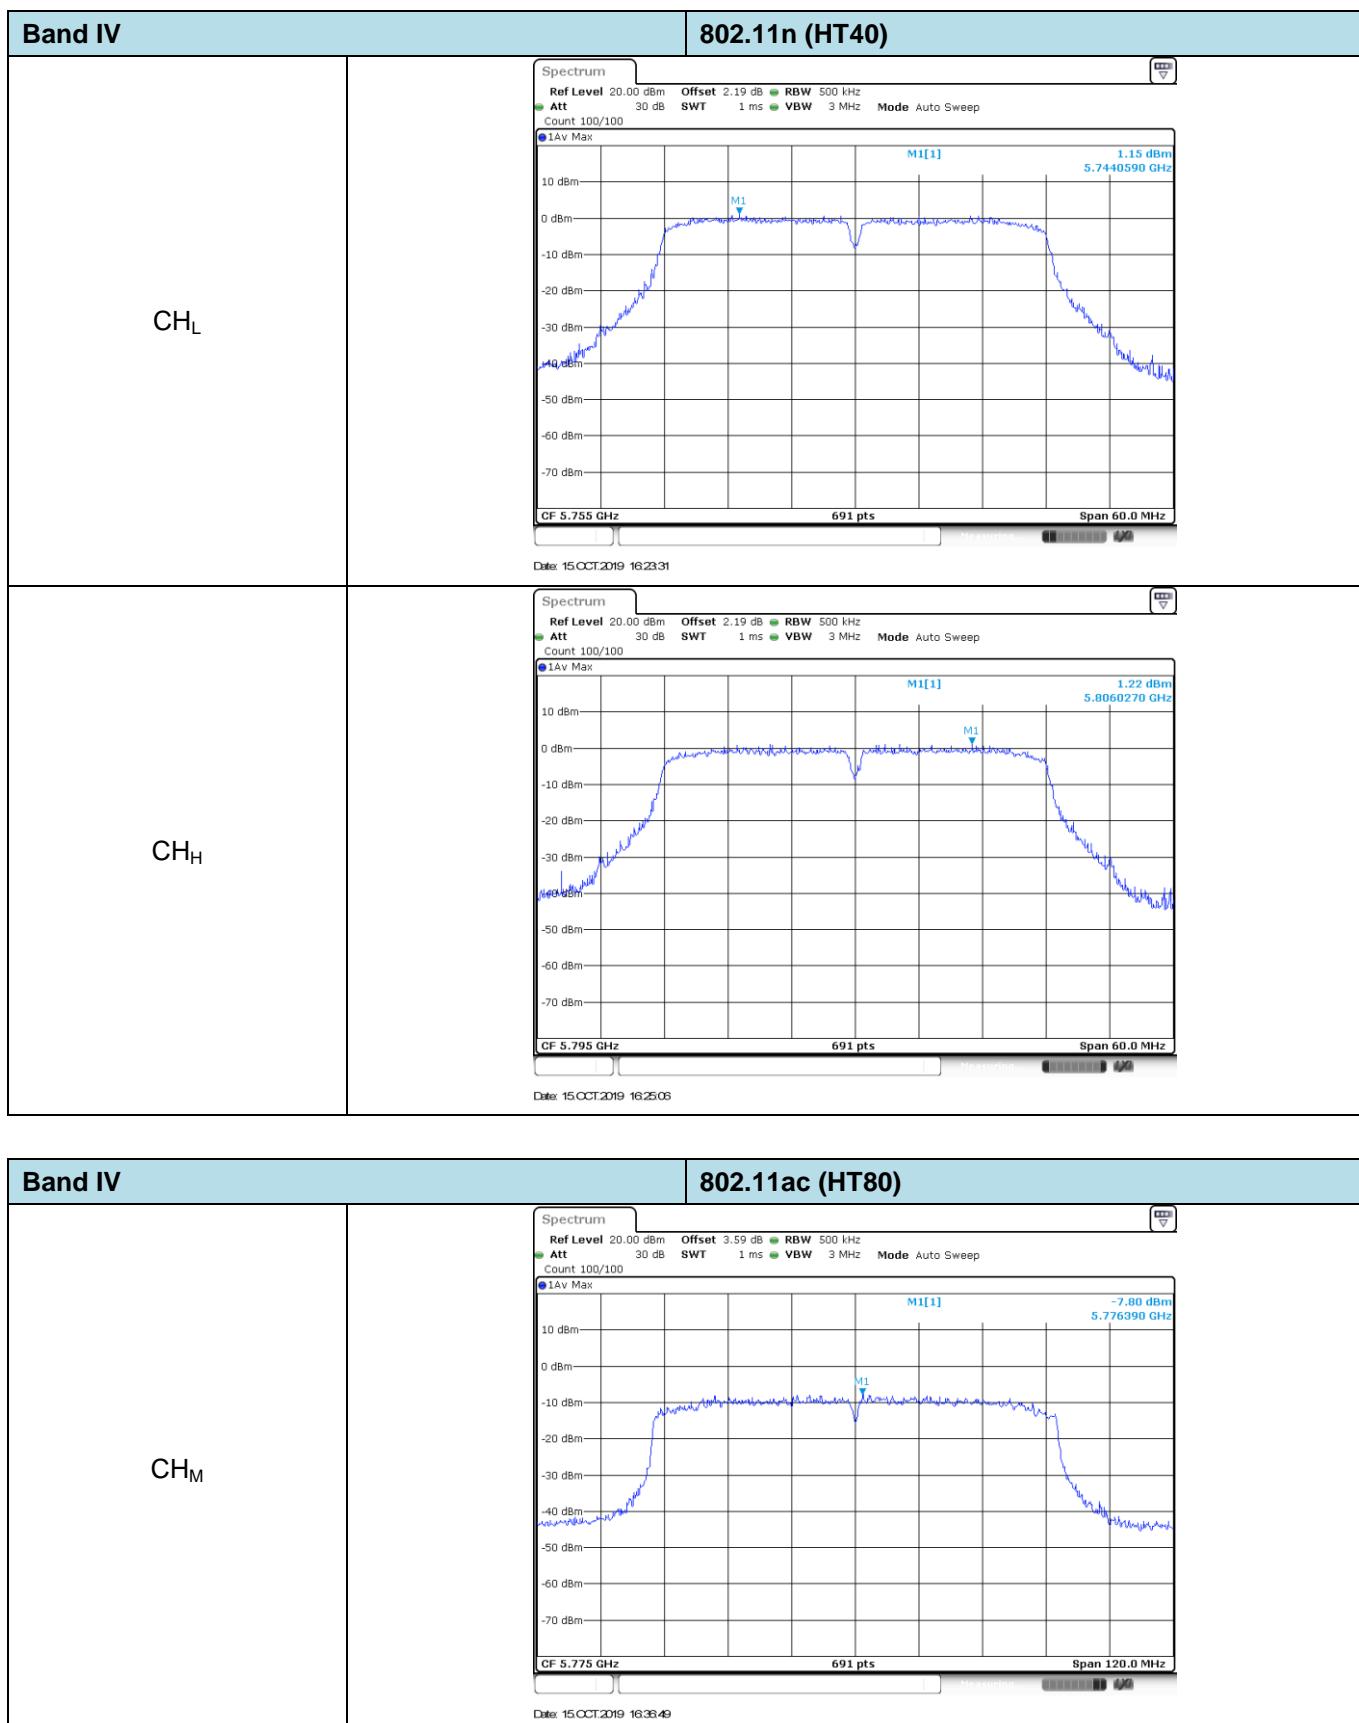


## 5.5. 26dB bandwidth and 99% Occupy bandwidth

### LIMIT

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

### TEST CONFIGURATION

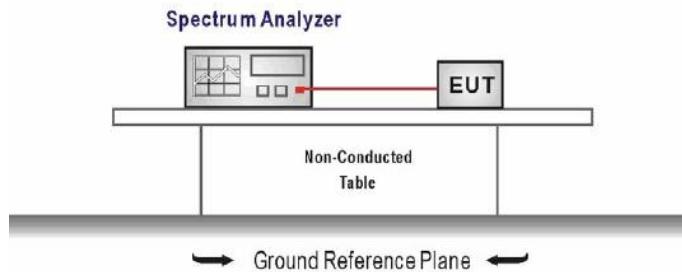

### TEST PROCEDURE

1. According KDB 789033 D02 – Section C
2. Connect the antenna port(s) to the spectrum analyzer input.
3. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).  
Center Frequency =Channel center frequency  
Span=2 x emission bandwidth  
RBW = 1% to 5% of the emission bandwidth  
VBW>3 x RBW  
Sweep time= auto couple  
Detector = Peak  
Trace mode = max hold
4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission, and use the 99 % power bandwidth function of the instrument

### TEST MODE:

Please refer to the clause 3.3

### TEST RESULTS

Passed       Not Applicable

Band	Bandwidth (MHz)	Type	Channel	99% Occupy bandwith (MHz)	26dB bandwidth (MHz)	Result
I	20	802.11ac	CH <sub>L</sub>	17.77	21.63	Pass
			CH <sub>M</sub>	17.80	21.75	
			CH <sub>H</sub>	17.80	21.75	
		802.11n	CH <sub>L</sub>	17.83	21.96	Pass
			CH <sub>M</sub>	17.83	22.53	
			CH <sub>H</sub>	17.83	22.38	
	40	802.11a	CH <sub>L</sub>	16.75	21.84	Pass
			CH <sub>M</sub>	16.75	22.05	
			CH <sub>H</sub>	16.72	21.87	
		802.11ac	CH <sub>L</sub>	36.32	42.84	Pass
			CH <sub>H</sub>	36.26	42.48	
			CH <sub>L</sub>	36.32	44.76	
	80	802.11ac	CH <sub>M</sub>	74.93	86.04	Pass
II	20	802.11ac	CH <sub>L</sub>	17.80	21.57	Pass
			CH <sub>M</sub>	17.77	21.48	
			CH <sub>H</sub>	17.77	21.57	
		802.11n	CH <sub>L</sub>	17.83	21.90	Pass
			CH <sub>M</sub>	17.86	21.84	
			CH <sub>H</sub>	17.77	21.57	
	40	802.11a	CH <sub>L</sub>	16.66	21.27	Pass
			CH <sub>M</sub>	16.69	21.42	
			CH <sub>H</sub>	16.75	21.45	
		802.11ac	CH <sub>L</sub>	36.26	42.42	Pass
			CH <sub>H</sub>	36.32	42.48	
			CH <sub>L</sub>	36.38	45.36	Pass
	80	802.11ac	CH <sub>M</sub>	74.45	84.60	Pass
	CH <sub>H</sub>	36.26	44.22			

Band	Bandwidth (MHz)	Type	Channel	99% Occupy bandwith (MHz)	26dB bandwidth (MHz)	Result
III	20	802.11ac	CH <sub>L</sub>	17.74	21.51	Pass
			CH <sub>M</sub>	17.83	21.96	
			CH <sub>H</sub>	17.86	21.72	
		802.11n	CH <sub>L</sub>	18.04	22.35	Pass
			CH <sub>M</sub>	17.83	21.99	
			CH <sub>H</sub>	17.83	21.81	
	40	802.11a	CH <sub>L</sub>	16.84	21.30	Pass
			CH <sub>M</sub>	16.75	22.02	
			CH <sub>H</sub>	16.66	20.94	
		802.11ac	CH <sub>L</sub>	36.26	43.02	Pass
			CH <sub>M</sub>	36.36	43.17	
			CH <sub>H</sub>	36.32	42.72	
	80	802.11n	CH <sub>L</sub>	36.26	43.38	Pass
			CH <sub>M</sub>	36.26	43.20	
			CH <sub>H</sub>	36.26	44.16	
		802.11ac	CH <sub>L</sub>	74.57	85.20	Pass
			CH <sub>M</sub>	74.45	85.20	
			CH <sub>H</sub>	74.69	85.68	

