

RF Exposure Test Report

Report No.: SHE25070059-03DE

Date: 2025-09-15

Page 1 of 21

Applicant

: Keeson Technology Corporation Limited

Address of Applicant

: No.158, Qiumao Road, Wangjiangjing, Xiuzhou district, Jiaxing, Zhejiang, China

Product Name

: REMOTE CONTROL

Brand Name

: N/A

Model Name

: RC301C, RC301A, RC301B

Sample Acquisition Method

: Sent by Client

Sample No.

: E25070059-01#02

FCC ID

: 2AK23RC301AC

Standards

: FCC Part 2.1093

Date of Receipt

: 2025-07-21

Date of Test

: 2025-07-25 ~ 2025-09-15


Date of Issue

: 2025-09-15


Remark:

This report details the results of the testing carried out on one sample, the results contained in this report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.


Prepared by:


(Erik Yang)

Reviewed by:


(Jennifer Zhou)

Approved by:


(Authorized signatory: Echo Mu)

RF Exposure Test Report

Report No.: SHE25070059-03DE

Date: 2025-09-15

Page 2 of 21

Contents

1	GENERAL INFORMATION	3
1.1	TESTING LABORATORY	3
1.2	DETAILS OF APPLICATION	3
1.3	DETAILS OF EUT	3
2	ASSESSMENT METHODS	4
3	CONCLUSION	5
4	APPENDIXES	6
4.1	SAMPLE PHOTOGRAPH	6

RF Exposure Test Report

Report No.: SHE25070059-03DE

Date: 2025-09-15

Page 3 of 21

1 General Information

1.1 Testing Laboratory

Company Name	ICAS Testing Technology Services (Shanghai) Co., Ltd.
Address	No.1298, Pingan Road, Minhang District, Shanghai, China
Telephone	0086 21-51682999
Fax	0086 21-54711112
Homepage	www.icasiso.com

1.2 Details of Application

Applicant Company Name	Keeson Technology Corporation Limited
Applicant Company Address	No.158, Qiumao Road, Wangjiangjing, Xiuzhou district, Jiaxing, Zhejiang, China
Contact Person	Jinhua Xu
Telephone	+86 18279170755
Email	Sam.Xu@keeson.com
Manufacturer Company Name	Ergo Intelligent Technology (Jiaxing) Co., Ltd.
Address	No.1508, Xiushui Road, WangJiangjing Town, Xiuzhou District, Jiaxing City, Zhejiang Province,China.
Factory Company Name	Ergo Intelligent Technology (Jiaxing) Co., Ltd.
Address	No.1508, Xiushui Road, WangJiangjing Town, Xiuzhou District, Jiaxing City, Zhejiang Province,China.

1.3 Details of EUT

Product Name	REMOTE CONTROL
Brand Name	N/A
Test Model Name	RC301C
Series Model Name	RC301A, RC301B
Difference Description	All the same except for the model name, appearance color, the number of buttons and components due to the number of button. (The differences between the RC301A or RC301B series models and the RC301C main test model are: The PCB boards are the same, but the number of buttons is different. The components corresponding to the button function part are different. These components do not affect the RF parameters and will not have an impact on the RF test results.) Refer to the sample photo for details.
FCC ID	2AK23RC301AC
Operation Frequency	2403MHz ~ 2480MHz
Modulation Type	GFSK

RF Exposure Test Report

Report No.: SHE25070059-03DE

Date: 2025-09-15

Page 4 of 21

Antenna Type	PCB Antenna
Antenna Gain	0dBi
Hardware version	V1.0
Software version	V1.0

Note:

1. The above information was declared by the manufacturer.
2. For more details, please refer to the User's manual of the EUT.

2 Assessment methods

According to KDB 447498 D04 Interim General RF Exposure Guidance v01

Appendix B

Exemptions for Single RF Sources

SAR-based thresholds are derived based on frequency, power, and separation distance of the RF source. The formula defines the thresholds in general for either available maximum time-averaged power or maximum time-averaged ERP, whichever is greater.

If the ERP of a device is not easily determined, such as for a portable device with a small form factor, the applicant may use the available maximum time-averaged power exclusively if the device antenna or radiating structure does not exceed an electrical length of $\lambda/4$.

As for devices with antennas of length greater than $\lambda/4$ where the gain is not well defined, but always less than that of a half-wave dipole (length $\lambda/2$), the available maximum time-averaged power generated by the device may be used in place of the maximum time-averaged ERP, where that value is not known.

The separation distance is the smallest distance from any part of the antenna or radiating structure for all persons, during operation at the applicable ERP. In the case of mobile or portable devices, the separation distance is from the outer housing of the device where it is closest to the antenna.

The SAR-based exemption formula of § 1.1307(b)(3)(i)(B), repeated here as Formula (B.2), applies for single fixed, mobile, and portable RF sources with available maximum time-averaged power or effective radiated power (ERP), whichever is greater, of less than or equal to the threshold P_{th} (mW).

This method shall only be used at separation distances from 0.5 cm to 40 cm and at frequencies from 0.3 GHz to 6 GHz (inclusive). P_{th} is given by Formula (B.2).

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases} \quad (\text{B.2})$$

where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right)$$

and f is in GHz, d is the separation distance (cm), and $ERP_{20\text{cm}}$ is per Formula (B.1).

RF Exposure Test Report

Report No.: SHE25070059-03DE

Date: 2025-09-15

Page 5 of 21

$$P_{th} \text{ (mW)} = ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases} \quad (\text{B.1})$$

The example values shown in Table B.2 are for illustration only.

Table B.2—Example Power Thresholds (mW)

Frequency (MHz)	Distance (mm)									
	5	10	15	20	25	30	35	40	45	50
300	39	65	88	110	129	148	166	184	201	217
450	22	44	67	89	112	135	158	180	203	226
835	9	25	44	66	90	116	145	175	207	240
1900	3	12	26	44	66	92	122	157	195	236
2450	3	10	22	38	59	83	111	143	179	219
3600	2	8	18	32	49	71	96	125	158	195
5800	1	6	14	25	40	58	80	106	136	169

Test Data

Field strength (dBuV/m)	2403MHz ~ 2480MHz
	GFSK
	93.63
Peak Power (dBm)	-1.57

Note: This report listed the worst case value, please refer to RF test Report No. SHE25070059-03CE

Test Result Radiated Emission 4.1.2.

EIRP[dBm]=E[dBuV/m]-95.2.

3 Conclusion

Per KDB 447498 D04 Interim General RF Exposure Guidance v01 Appendix B, when the minimum test separation distance is 5mm, a distance of 5mm is applied to determine SAR test exclusion. The test exclusion threshold is <2.787mW(f=2.403GHz).

RF Maximum Output Power is -1.57dBm; ERP =0.425mW<2.787mW

So SAR testing is not required. RF exposure Evaluation Results: Compliance

RF Exposure Test Report

Report No.: SHE25070059-03DE

Date: 2025-09-15

Page 6 of 21

4 Appendixes

4.1 Sample Photograph



All models (RC301C, RC301B, RC301A)

RC301C Model



Front of the sample

RF Exposure Test Report

Report No.: SHE25070059-03DE

Date: 2025-09-15

Page 7 of 21



Rear of the sample



Left of the sample

RF Exposure Test Report


Report No.: SHE25070059-03DE

Date: 2025-09-15

Page 8 of 21



Right of the sample

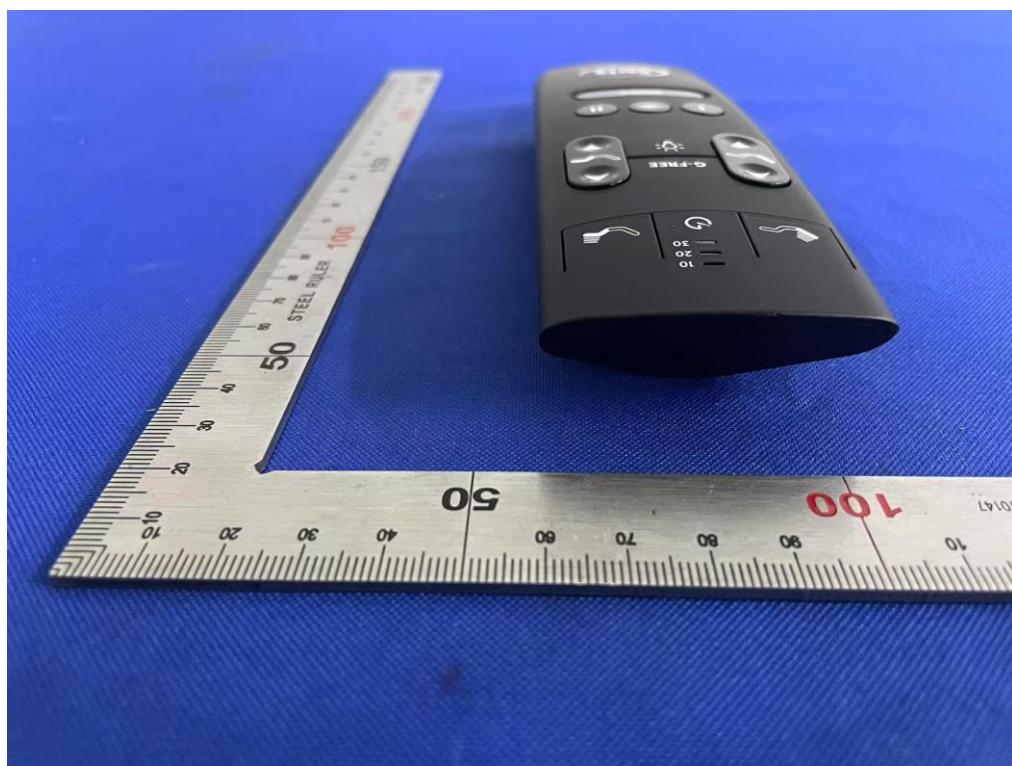


Top of the sample

RF Exposure Test Report

Report No.: SHE25070059-03DE

Date: 2025-09-15

Page 9 of 21

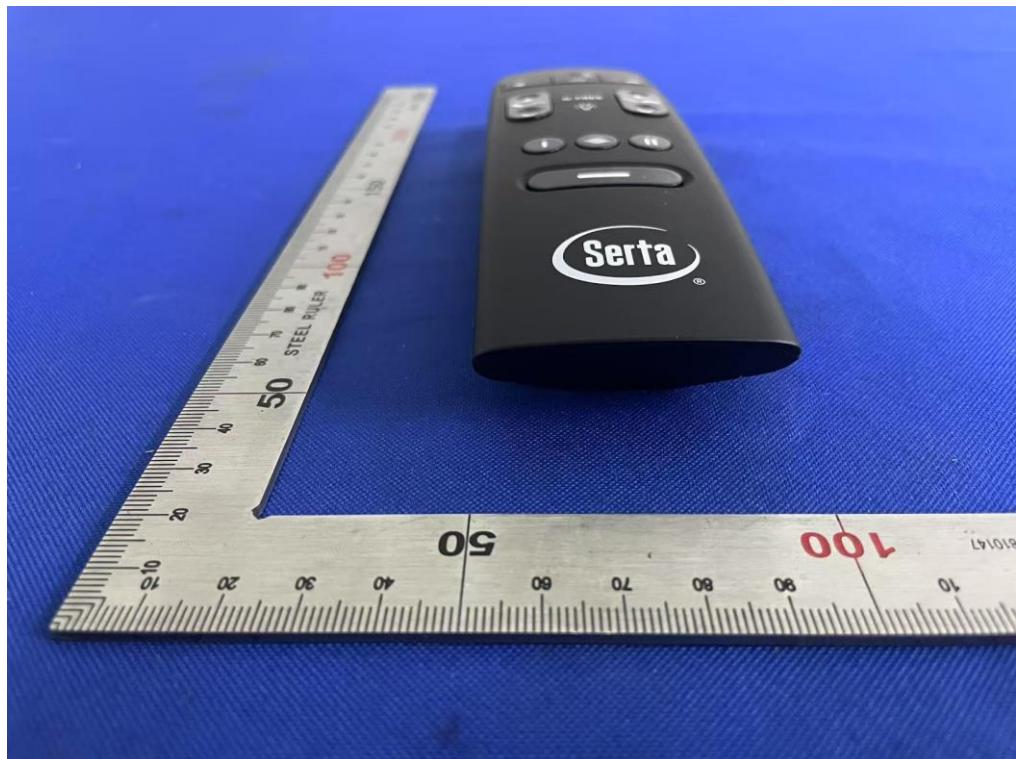

Bottom of the sample




Open of the sample

RF Exposure Test Report


Report No.: SHE25070059-03DE

Date: 2025-09-15

Page 10 of 21

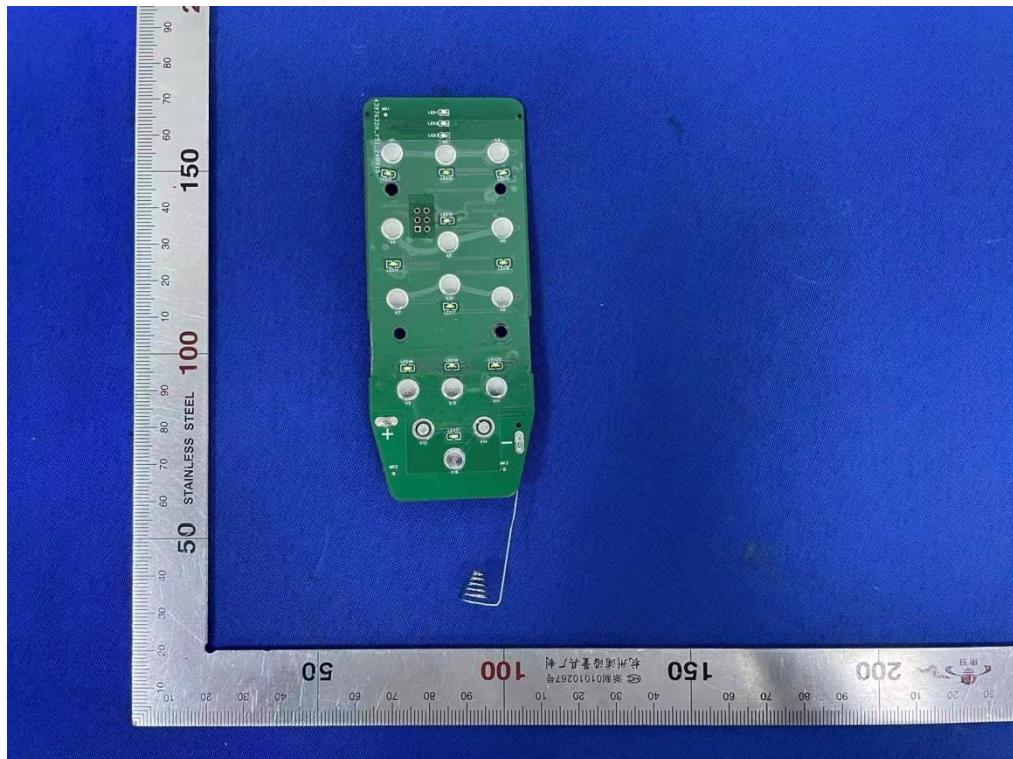

Internal photo-1 of the sample

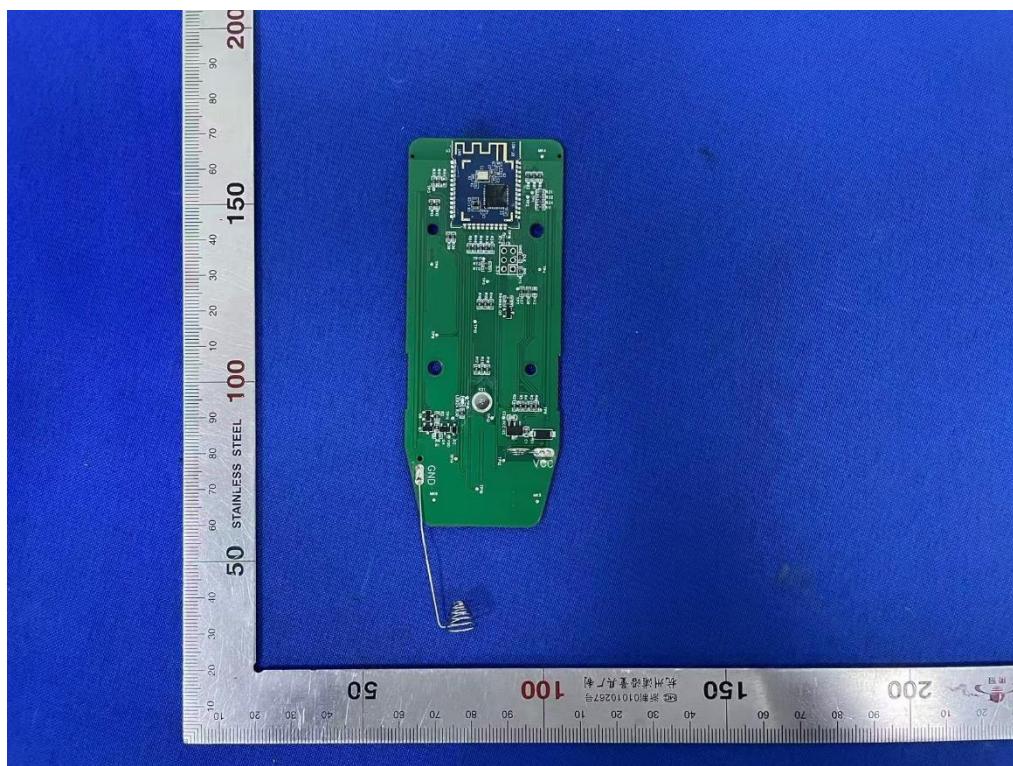


Internal photo-2 of the sample

RF Exposure Test Report

Report No.: SHE25070059-03DE

Date: 2025-09-15

Page 11 of 21

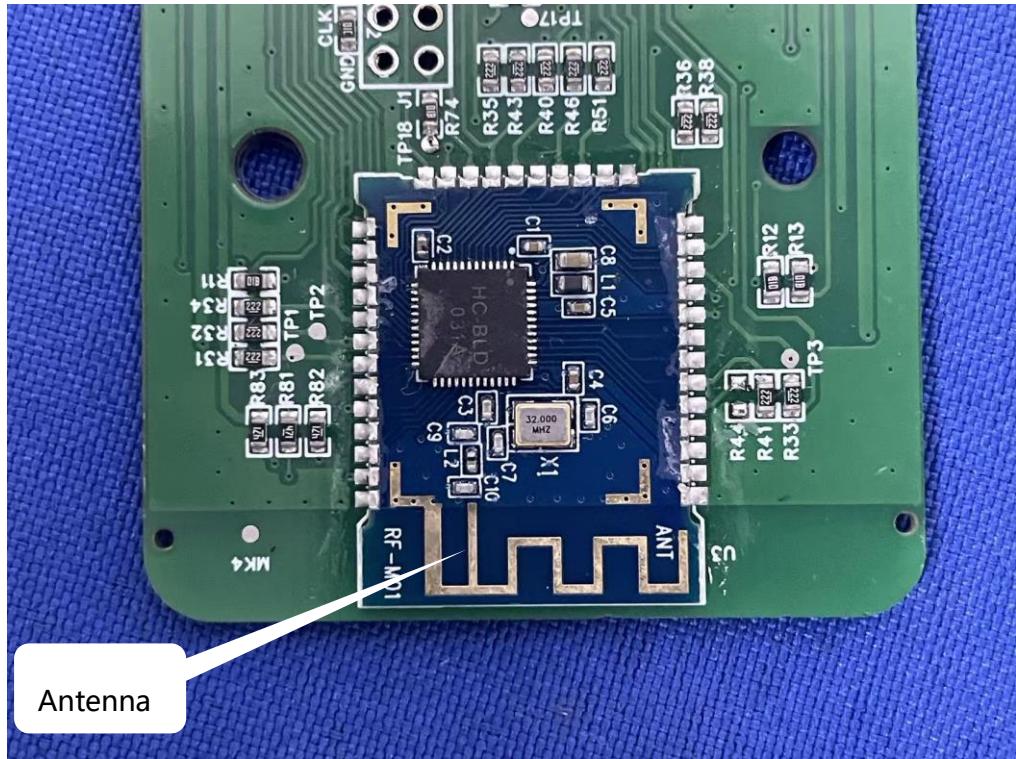

Antenna position of the sample

RC301B Model



Front of the sample

RF Exposure Test Report

Report No.: SHE25070059-03DE

Date: 2025-09-15

Page 12 of 21



Rear of the sample



Left of the sample

RF Exposure Test Report


Report No.: SHE25070059-03DE

Date: 2025-09-15

Page 13 of 21



Right of the sample

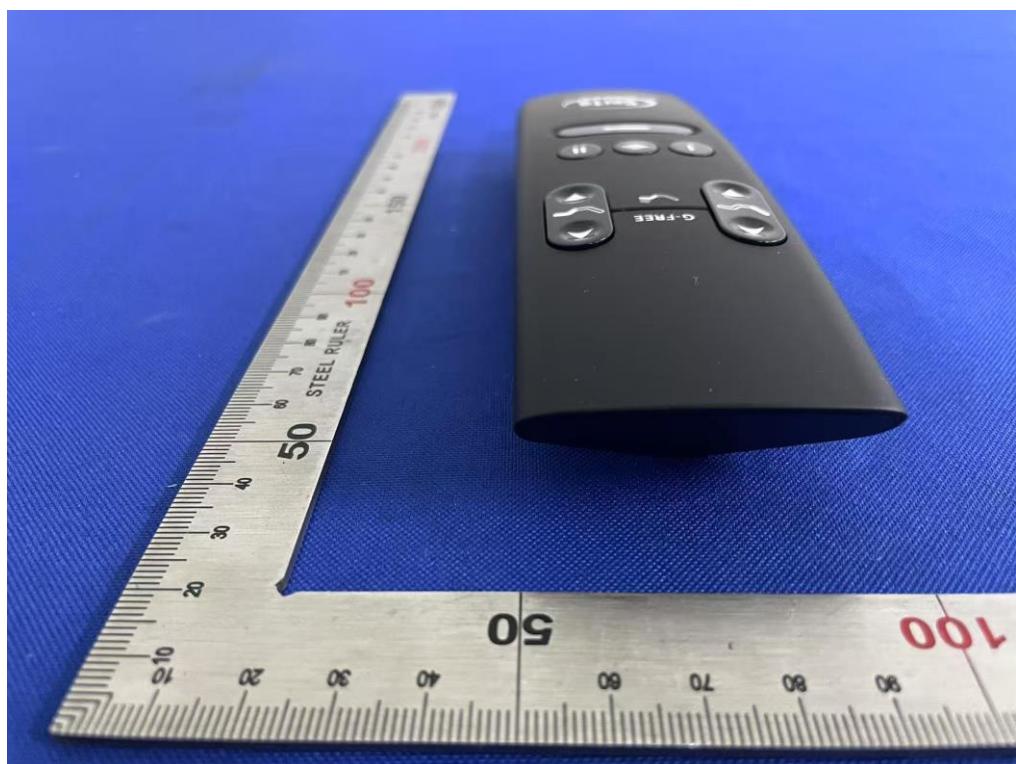

Top of the sample

RF Exposure Test Report

Report No.: SHE25070059-03DE

Date: 2025-09-15

Page 14 of 21



Bottom of the sample



Open of the sample

RF Exposure Test Report


Report No.: SHE25070059-03DE

Date: 2025-09-15

Page 15 of 21



Internal photo-1 of the sample

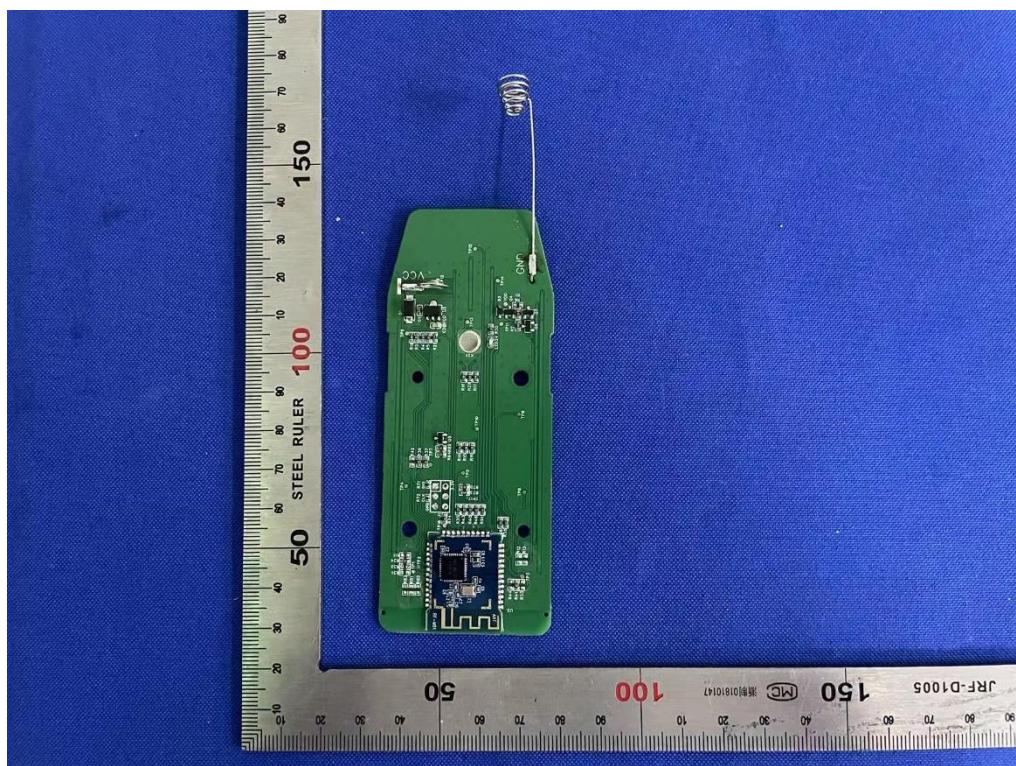


Internal photo-2 of the sample

RF Exposure Test Report

Report No.: SHE25070059-03DE

Date: 2025-09-15

Page 16 of 21

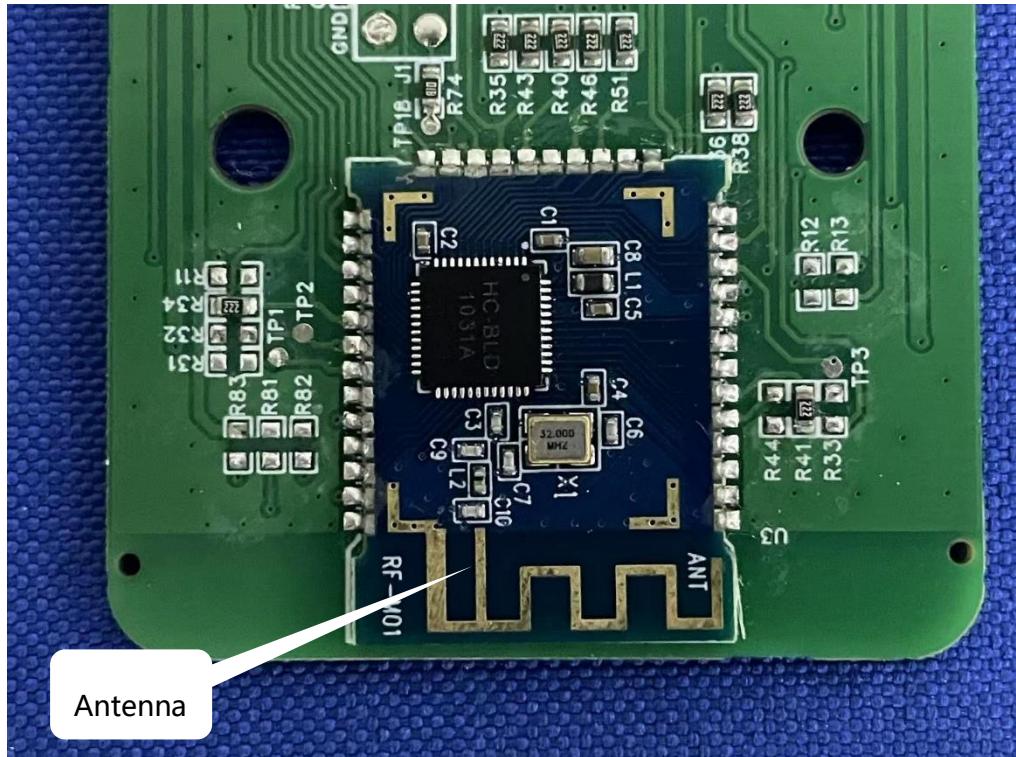

Antenna position of the sample

RC301A Model



Front of the sample

RF Exposure Test Report

Report No.: SHE25070059-03DE

Date: 2025-09-15

Page 17 of 21



Rear of the sample



Left of the sample

RF Exposure Test Report

Report No.: SHE25070059-03DE

Date: 2025-09-15

Page 18 of 21



Right of the sample




Top of the sample

RF Exposure Test Report

Report No.: SHE25070059-03DE

Date: 2025-09-15

Page 19 of 21

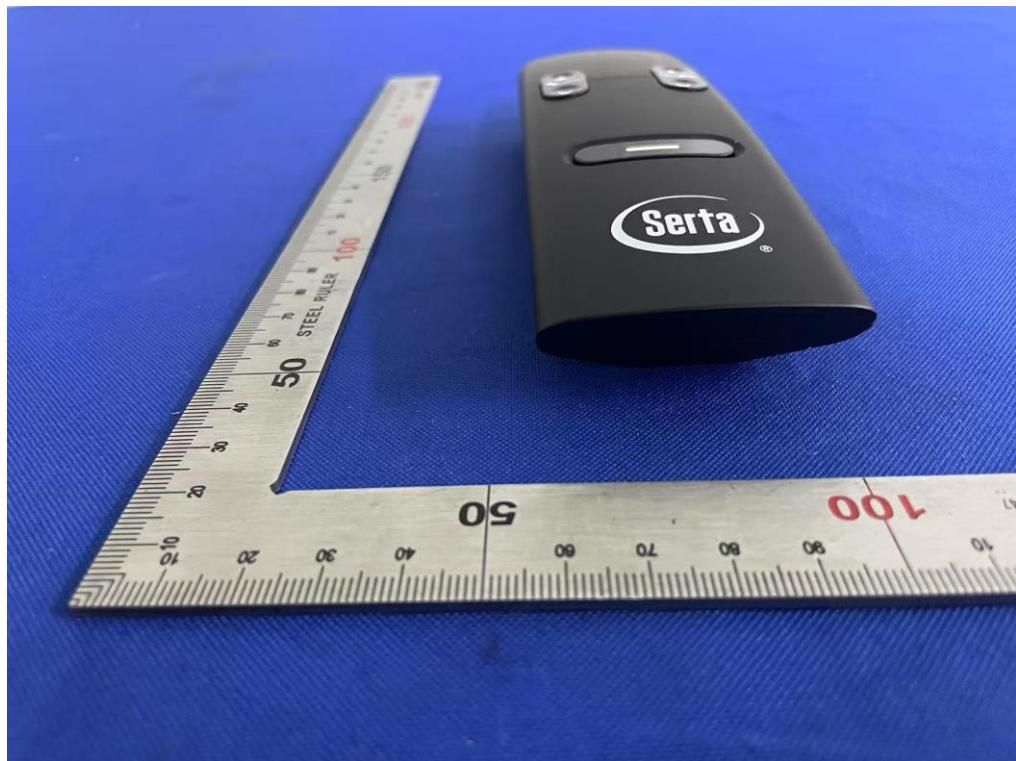

Bottom of the sample



Open of the sample

RF Exposure Test Report


Report No.: SHE25070059-03DE

Date: 2025-09-15

Page 20 of 21



Internal photo-1 of the sample

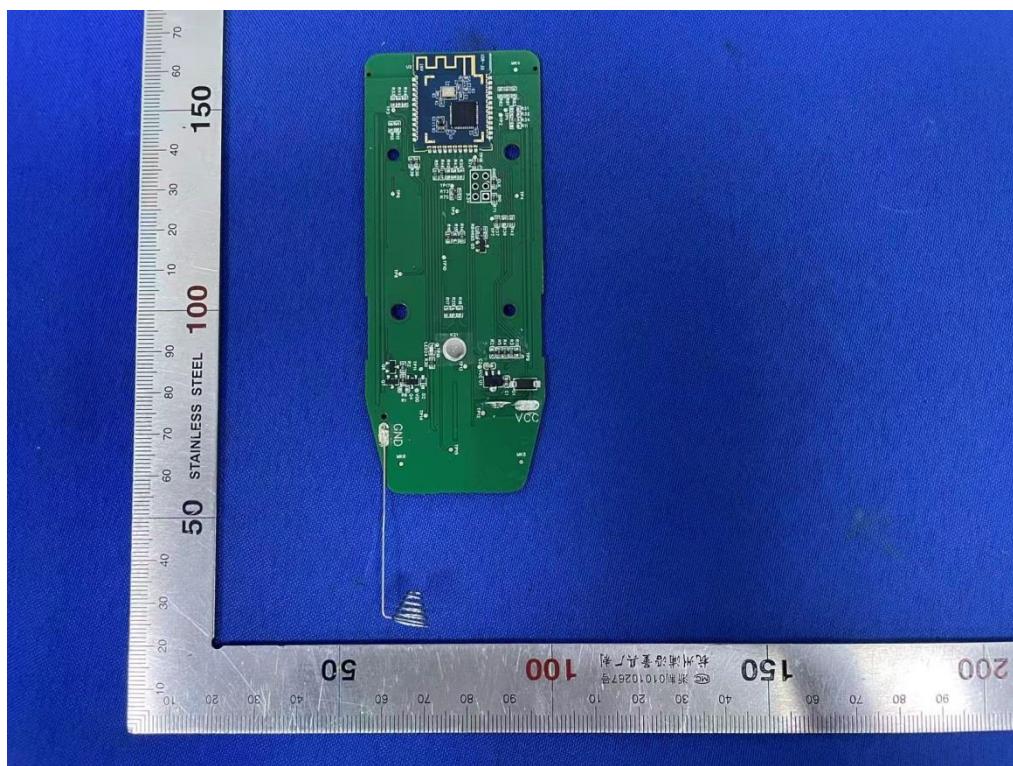


Internal photo-2 of the sample

RF Exposure Test Report

Report No.: SHE25070059-03DE

Date: 2025-09-15

Page 21 of 21

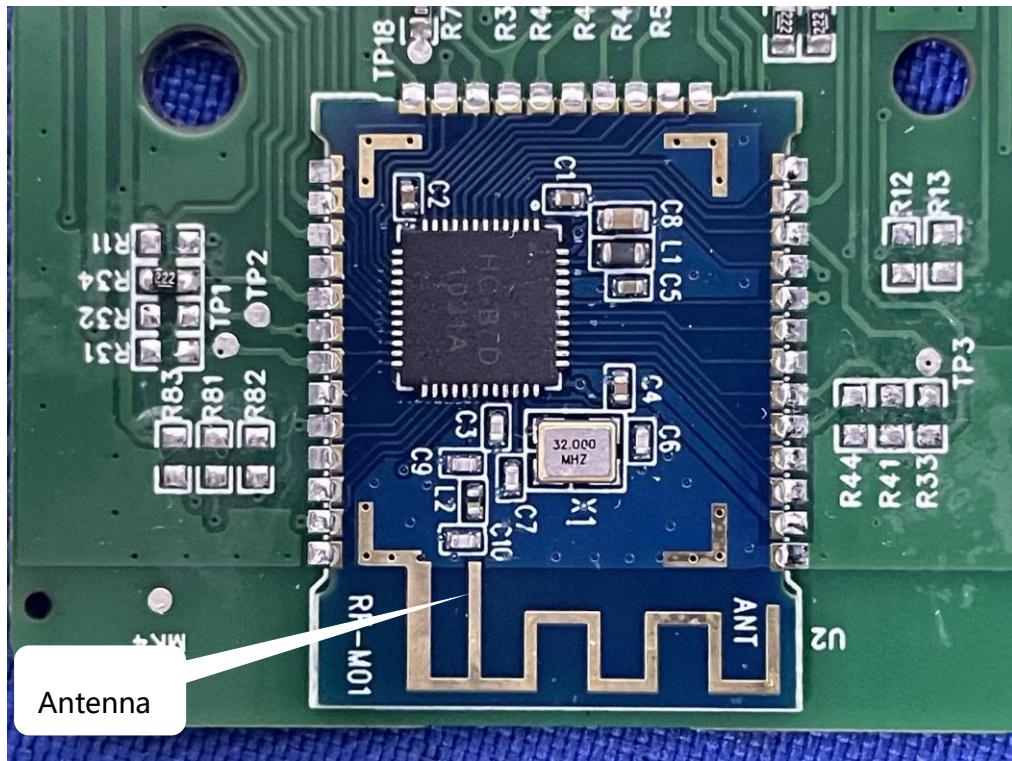

Antenna position of the sample

End of the report