

# FCC Radio Test Report

FCC ID: 2AK4D-S003

This report concerns (check one):  Original Grant  Class I Change  Class II Change

**Project No.** : 1709C160A  
**Equipment** : Portable Bluetooth Speaker  
**Test Model** : Solo 3  
**Series Model** : N/A  
**Applicant** : DYNAUDIO A/S  
**Address** : Sverigesvej 15, 8660 Skanderborg, Denmark

**Date of Receipt** : Oct. 18, 2017  
**Date of Test** : Oct. 18, 2017 ~ Oct. 30, 2017  
**Issued Date** : Oct. 31, 2017  
**Tested by** : BTL Inc.

**Testing Engineer** : Welly Zhou  
(Welly Zhou)

**Technical Manager** : Shawn Xiao  
(Shawn Xiao)

**Authorized Signatory** : David Mao  
(David Mao)

**B T L I N C .**

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,  
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

 NVLAP®  
Lab Code: 200788-0

## Declaration

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL**'s reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.**

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

**BTL**'s laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

## Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
<b>1 . CERTIFICATION</b>	<b>7</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>8</b>
<b>2.1 TEST FACILITY</b>	<b>9</b>
<b>2.2 MEASUREMENT UNCERTAINTY</b>	<b>9</b>
<b>3 . GENERAL INFORMATION</b>	<b>10</b>
<b>3.1 GENERAL DESCRIPTION OF EUT</b>	<b>10</b>
<b>3.2 DESCRIPTION OF TEST MODES</b>	<b>12</b>
<b>3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING</b>	<b>12</b>
<b>3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED</b>	<b>13</b>
<b>3.5 DESCRIPTION OF SUPPORT UNITS</b>	<b>13</b>
<b>4 . EMC EMISSION TEST</b>	<b>14</b>
<b>4.1 CONDUCTED EMISSION MEASUREMENT</b>	<b>14</b>
<b>4.1.1 POWER LINE CONDUCTED EMISSION LIMITS</b>	<b>14</b>
<b>4.1.2 TEST PROCEDURE</b>	<b>14</b>
<b>4.1.3 DEVIATION FROM TEST STANDARD</b>	<b>14</b>
<b>4.1.4 TEST SETUP</b>	<b>15</b>
<b>4.1.5 EUT OPERATING CONDITIONS</b>	<b>15</b>
<b>4.1.6 EUT TEST CONDITIONS</b>	<b>15</b>
<b>4.1.7 TEST RESULTS</b>	<b>15</b>
<b>4.2 RADIATED EMISSION MEASUREMENT</b>	<b>16</b>
<b>4.2.1 RADIATED EMISSION LIMITS</b>	<b>16</b>
<b>4.2.2 TEST PROCEDURE</b>	<b>17</b>
<b>4.2.3 DEVIATION FROM TEST STANDARD</b>	<b>17</b>
<b>4.2.4 TEST SETUP</b>	<b>18</b>
<b>4.2.5 EUT OPERATING CONDITIONS</b>	<b>19</b>
<b>4.2.6 EUT TEST CONDITIONS</b>	<b>19</b>
<b>4.2.7 TEST RESULTS (9KHZ TO 30MHZ)</b>	<b>19</b>
<b>4.2.8 TEST RESULTS (30MHZ TO 1000MHZ)</b>	<b>19</b>
<b>4.2.9 TEST RESULTS (ABOVE 1000MHZ)</b>	<b>19</b>
<b>5 . NUMBER OF HOPPING CHANNEL</b>	<b>20</b>
<b>5.1 APPLIED PROCEDURES</b>	<b>20</b>
<b>5.1.1 TEST PROCEDURE</b>	<b>20</b>
<b>5.1.2 DEVIATION FROM STANDARD</b>	<b>20</b>
<b>5.1.3 TEST SETUP</b>	<b>20</b>
<b>5.1.4 EUT OPERATION CONDITIONS</b>	<b>20</b>
<b>5.1.5 EUT TEST CONDITIONS</b>	<b>20</b>
<b>5.1.6 TEST RESULTS</b>	<b>20</b>
<b>6 . AVERAGE TIME OF OCCUPANCY</b>	<b>21</b>

Table of Contents	Page
<b>6.1 APPLIED PROCEDURES / LIMIT</b>	<b>21</b>
<b>6.1.1 TEST PROCEDURE</b>	21
<b>6.1.2 DEVIATION FROM STANDARD</b>	21
<b>6.1.3 TEST SETUP</b>	21
<b>6.1.4 EUT OPERATION CONDITIONS</b>	22
<b>6.1.5 EUT TEST CONDITIONS</b>	22
<b>6.1.6 TEST RESULTS</b>	22
<b>7 . HOPPING CHANNEL SEPARATION MEASUREMENT</b>	<b>23</b>
<b>7.1 APPLIED PROCEDURES / LIMIT</b>	23
<b>7.1.1 TEST PROCEDURE</b>	23
<b>7.1.2 DEVIATION FROM STANDARD</b>	23
<b>7.1.3 TEST SETUP</b>	23
<b>7.1.4 EUT TEST CONDITIONS</b>	23
<b>7.1.5 TEST RESULTS</b>	23
<b>8 . BANDWIDTH TEST</b>	<b>24</b>
<b>8.1 APPLIED PROCEDURES</b>	24
<b>8.1.1 TEST PROCEDURE</b>	24
<b>8.1.2 DEVIATION FROM STANDARD</b>	24
<b>8.1.3 TEST SETUP</b>	24
<b>8.1.4 EUT OPERATION CONDITIONS</b>	24
<b>8.1.5 EUT TEST CONDITIONS</b>	24
<b>8.1.6 TEST RESULTS</b>	24
<b>9 . PEAK OUTPUT POWER TEST</b>	<b>25</b>
<b>9.1 APPLIED PROCEDURES / LIMIT</b>	25
<b>9.1.1 TEST PROCEDURE</b>	25
<b>9.1.2 DEVIATION FROM STANDARD</b>	25
<b>9.1.3 TEST SETUP</b>	25
<b>9.1.4 EUT OPERATION CONDITIONS</b>	25
<b>9.1.5 EUT TEST CONDITIONS</b>	25
<b>9.1.6 TEST RESULTS</b>	25
<b>10 . ANTENNA CONDUCTED SPURIOUS EMISSION</b>	<b>26</b>
<b>10.1 APPLIED PROCEDURES / LIMIT</b>	26
<b>10.1.1 TEST PROCEDURE</b>	26
<b>10.1.2 DEVIATION FROM STANDARD</b>	26
<b>10.1.3 TEST SETUP</b>	26
<b>10.1.4 EUT OPERATION CONDITIONS</b>	26
<b>10.1.5 EUT TEST CONDITIONS</b>	26
<b>10.1.6 TEST RESULTS</b>	26
<b>11 . MEASUREMENT INSTRUMENTS LIST</b>	<b>27</b>
<b>12 . EUT TEST PHOTO</b>	<b>29</b>

Table of Contents	Page
APPENDIX A - CONDUCTED EMISSION	33
APPENDIX B - RADIATED EMISSION (9KHZ-30MHZ)	36
APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)	41
APPENDIX D - RADIATED EMISSION (ABOVE 1000MHZ)	54
APPENDIX E - NUMBER OF HOPPING CHANNEL	79
APPENDIX F - AVERAGE TIME OF OCCUPANCY	81
APPENDIX G - HOPPING CHANNEL SEPARATION MEASUREMENT	94
APPENDIX H - BANDWIDTH	99
APPENDIX I - PEAK OUTPUT POWER	104
APPENDIX J - ANTENNA CONDUCTED SPURIOUS EMISSION	109

**REPORT ISSUED HISTORY**

Issued No.	Description	Issued Date
BTL-FCCP-1-1709C160A	Original Issue.	Oct. 31, 2017

## 1. CERTIFICATION

Equipment : Portable Bluetooth Speaker  
Brand Name : **DYNAUDIO**  
Test Model : Solo 3  
Series Model : N/A  
Applicant : DYNAUDIO A/S  
Manufacturer : DYNAUDIO A/S  
Address : Sverigesvej 15, 8660 Skanderborg, Denmark  
Factory : Shenzhen Synchron Electronics Co., Ltd.  
Address : No.9 Mei Li Road, Xia Mei Lin, Fu Tian Area, Shenzhen, Guangdong, P.R. China.  
Date of Test : Oct. 18, 2017 ~ Oct. 30, 2017  
Test Sample : Engineering Sample  
Standard(s) : FCC Part15, Subpart C (15.247)/ ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1709C160A) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15, Subpart C (15.247)			
Standard(s) Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247(d)	Antenna conducted Spurious Emission	PASS	
15.247 (a)(1)	Hopping Channel Separation	PASS	
15.247(a)(1)	Bandwidth	PASS	
15.247 (b)(1)	Peak Output Power	PASS	
15.247(d) 15.209	Radiated Spurious Emission	PASS	
15.247 (a)(1)(iii)	Number of Hopping Frequency	PASS	
15.247 (a)(1)(iii)	Dwell Time	PASS	
15.205	Restricted Bands	PASS	
15.203	Antenna Requirement	PASS	

Note:

(1)" N/A" denotes test is not applicable in this test report

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 854385

BTL's designation number for FCC: CN5020

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95 %**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 KHz ~ 30MHz	2.32

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9KHz~30MHz	V	3.79
		9KHz~30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06
		1GHz~18GHz	V	3.12
		1GHz~18GHz	H	3.68
		18GHz~40GHz	V	4.15
		18GHz~40GHz	H	4.14

C. Other Measurement:

Test Item	Uncertainty
Conducted Spurious Emission	2.67dB
Hopping Channel Separation	53.46MHz
Peak Output Power	0.95dB
Number of Hopping Frequency	53.46MHz
Temperature	0.08 °C
Humidity	1.5%

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	Portable Bluetooth Speaker	
Brand Name	<b>DYNAUDIO</b>	
Test Model	Solo 3	
Series Model	N/A	
Model Difference	N/A	
Output Power (Max.)	Operation Frequency	2402~2480 MHz
	Modulation Technology	GFSK(1Mbps) $\pi$ /4-DQPSK(2Mbps) 8-DPSK(3Mbps)
	Bit Rate of Transmitter	
	Output Power Max.	3.76 dBm(1Mbps) 3.89 dBm(3Mbps)
Power Source	#1 DC voltage supplied from AC/DC adapter. Brand / Model: DYS / APP524-051240U #2 Battery supplied.	
Power Rating	#1 I/P: 100-240V~50/60Hz 0.45A MAX O/P: 5.1V - - 2.4A #2 DC 7.6V, 2750mAh	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

## 2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

## 3 Table for Filed Antenna:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Internal	N/A	2.15

### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode Note (1)

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Emission	
Final Test Mode	Description
Mode 1	TX Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	TX Mode Note (1)

**Note:**


- (1) The measurements are performed at the high, middle, low available channels.
- (2) The measurements for Hopping Channel Separation, Bandwidth and Peak Output Power were tested during 1Mbps, 2Mbps and 3Mbps, the worst case are 1Mbps and 3Mbps, only worst case was documented.

### 3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Test Software Version	Blue TEST3		
Frequency	2402 MHz	2441 MHz	2480 MHz
Parameters(1Mbps)	51	36	48
Parameters(3Mbps)	60	50	59

### 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

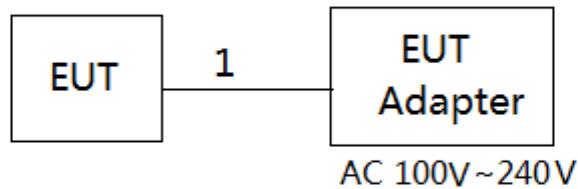

### 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1m	USB Cable

## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 -0.50	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

Note:

- (1) The limit of " \* " decreases with the logarithm of the frequency
- (2) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)  
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


#### 4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.4 TEST SETUP

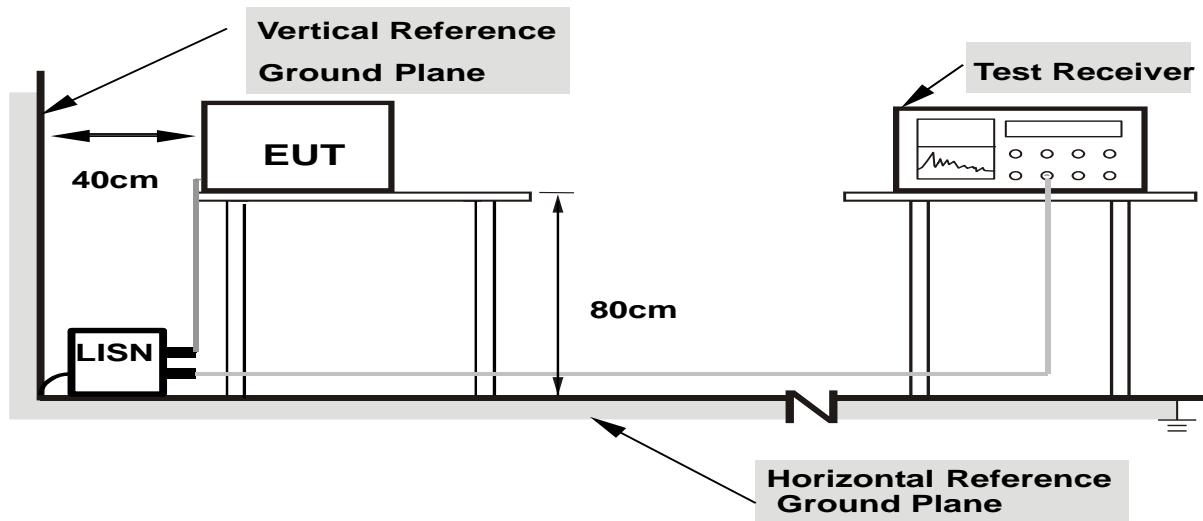

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

#### 4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical function (as a customer would normally use it), EUT was programmed to be in continuously transmitting/receiving data or hopping on mode.

#### 4.1.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

#### 4.1.7 TEST RESULTS

Please refer to the Appendix A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of [Note]. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform in this case, a "\*" marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9KHz -1000MHz)

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

#### Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dB<sub>uV/m</sub>) = 20log Emission level (uV/m).
- (4) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
 Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Spectrum Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz ~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz ~110KHz for QP detector
Start ~ Stop Frequency	110KHz ~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz ~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

#### 4.2.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.2.3 DEVIATION FROM TEST STANDARD


No deviation

#### 4.2.4 TEST SETUP


##### (A) Radiated Emission Test Set-Up Frequency Below 1 GHz

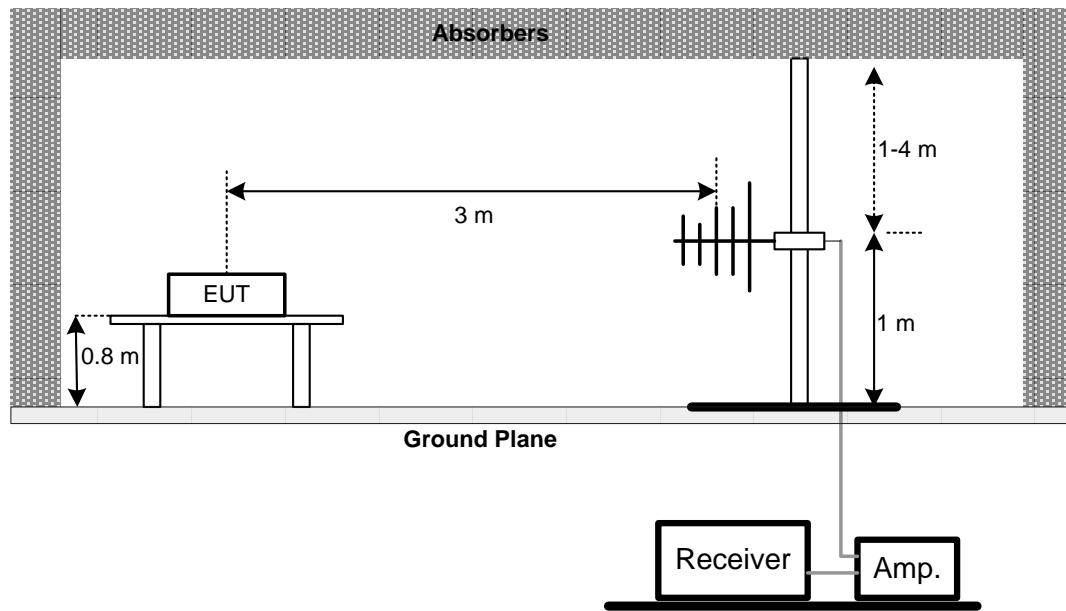

##### (B) Radiated Emission Test Set-Up Frequency Above 1 GHz

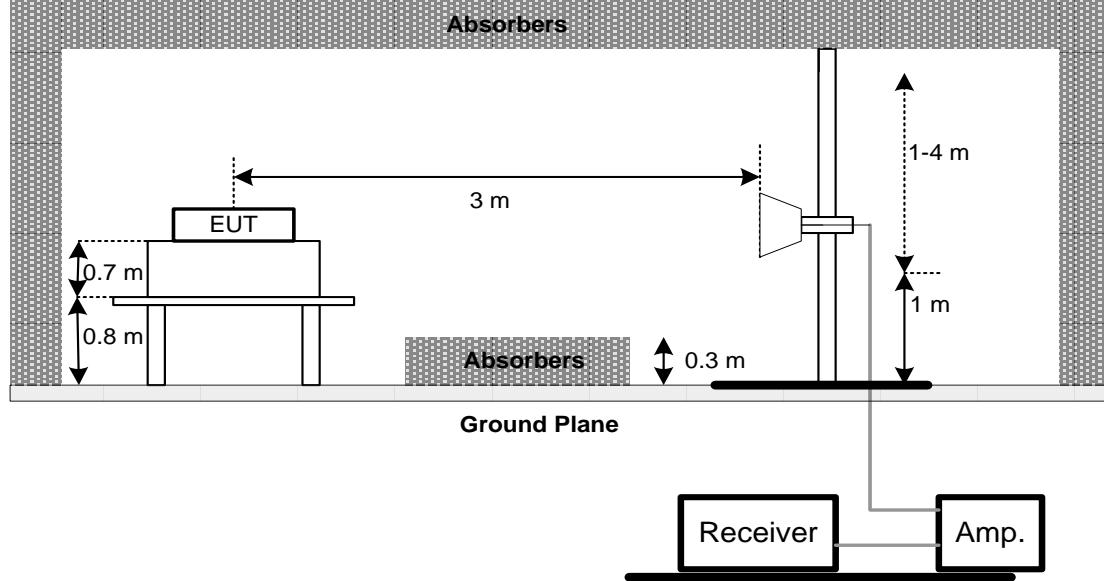

(C) For Radiated Emissions Below 30MHz

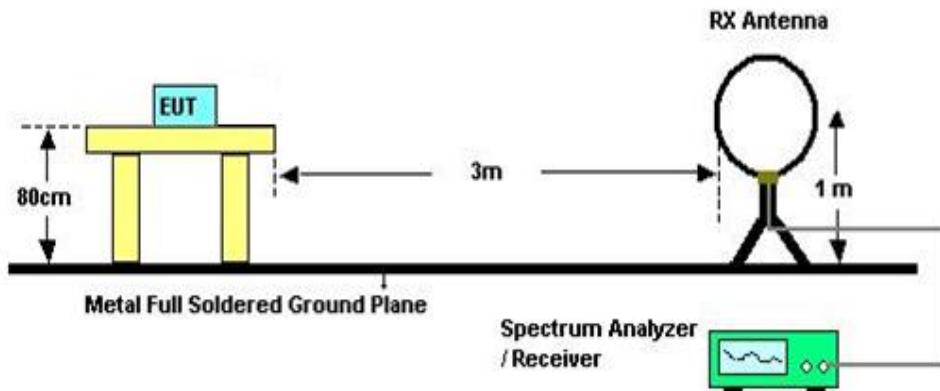

#### 4.2.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

#### 4.2.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Appendix B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

#### 4.2.8 TEST RESULTS (30MHZ TO 1000MHZ)

Please refer to the Appendix C.

#### 4.2.9 TEST RESULTS (ABOVE 1000MHZ)

Please refer to the Appendix D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 5. NUMBER OF HOPPING CHANNEL

### 5.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(1)(iii)	Number of Hopping Channel	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RBW	100 KHz
VBW	100 KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 5.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW=100KHz, VBW=100KHz, Sweep time = Auto.

### 5.1.2 DEVIATION FROM STANDARD

No deviation.

### 5.1.3 TEST SETUP



### 5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 5.1.5 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

### 5.1.6 TEST RESULTS

Please refer to the Appendix E

## 6. AVERAGE TIME OF OCCUPANCY

## 6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(1)(iii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS

### 6.1.1 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. DH5 Packet permit maximum  $1600 / 79 / 6 = 3.37$  hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $3.37 \times 31.6 = 106.6$  within 31.6 seconds.
- j. DH3 Packet permit maximum  $1600 / 79 / 4 = 5.06$  hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $5.06 \times 31.6 = 160$  within 31.6 seconds.
- k. DH1 Packet permit maximum  $1600 / 79 / 2 = 10.12$  hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $10.12 \times 31.6 = 320$  within 31.6 seconds.

### 6.1.2 DEVIATION FROM STANDARD

No deviation.

### 6.1.3 TEST SETUP



#### **6.1.4 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### **6.1.5 EUT TEST CONDITIONS**

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

#### **6.1.6 TEST RESULTS**

Please refer to the Appendix F

## 7. HOPPING CHANNEL SEPARATION MEASUREMENT

### 7.1 APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 KHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 KHz
VBW	100 KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


#### 7.1.1 TEST PROCEDURE

- The EUT must have its hopping function enabled
- Span = wide enough to capture the peaks of two adjacent channels  
Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span  
Video (or Average) Bandwidth (VBW)  $\geq$  RBW  
Sweep = Auto  
Detector function = Peak  
Trace = Max Hold

#### 7.1.2 DEVIATION FROM STANDARD

No deviation.

#### 7.1.3 TEST SETUP

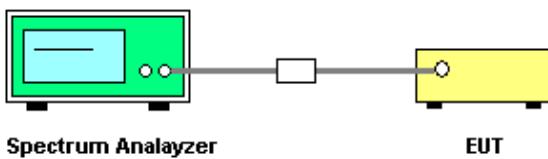

#### 7.1.4 EUT TEST CONDITIONS

Temperature: 25°C  
Relative Humidity: 55%  
Test Voltage: AC 120V/60Hz

#### 7.1.5 TEST RESULTS

Please refer to the Appendix G

## 8. BANDWIDTH TEST

### 8.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C

Section	Test Item	Frequency Range (MHz)
15.247(a)(2)	Bandwidth	2400-2483.5

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 KHz (20dB Bandwidth) / 30 KHz (Channel Separation)
VBW	100 KHz (20dB Bandwidth) / 100 KHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 8.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 30KHz, VBW=100KHz, Sweep Time = Auto.

#### 8.1.2 DEVIATION FROM STANDARD

No deviation.

#### 8.1.3 TEST SETUP



#### 8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### 8.1.5 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

#### 8.1.6 TEST RESULTS

Please refer to the Appendix H

## 9. PEAK OUTPUT POWER TEST

### 9.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(1)	Peak Output Power	1 Watt or 30dBm ( hopping channel >75) 0.125Watt or 21dBm (hopping channel <75)	2400-2483.5	PASS

#### 9.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 1MHz/3MHz, VBW= 1MHz/3MHz, Sweep time = Auto.

#### 9.1.2 DEVIATION FROM STANDARD

No deviation.

#### 9.1.3 TEST SETUP



#### 9.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### 9.1.5 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

#### 9.1.6 TEST RESULTS

Please refer to the Appendix I

## 10. ANTENNA CONDUCTED SPURIOUS EMISSION

### 10.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.


#### 10.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.
- c. Offset=antenna gain+cable loss

#### 10.1.2 DEVIATION FROM STANDARD

No deviation.

#### 10.1.3 TEST SETUP

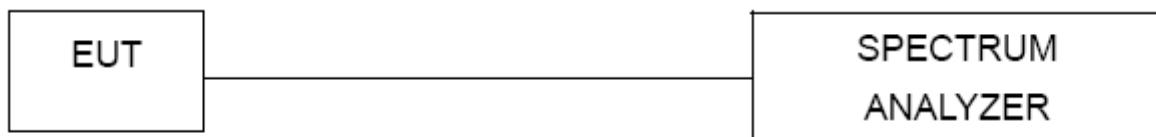

#### 10.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### 10.1.5 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

#### 10.1.6 TEST RESULTS

Please refer to the Appendix J

## 11. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Mar. 26, 2018
2	LISN	EMCO	3816/2	52765	Mar. 26, 2018
3	50Ω Terminator	SHX	TF2-3G-A	8122901	Mar. 26, 2018
4	TWO-LINE V-NETWORK	R&S	ENV216	101447	Mar. 26, 2018
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	Cable	N/A	RG223	12m	Aug. 20, 2018

Radiated Emission Measurement - Below 1GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 26, 2018
2	Amplifier	HP	8447D	2944A09673	Aug. 20, 2018
3	Receiver	Agilent	N9038A	MY52130039	Aug. 20, 2018
4	Cable	emci	LMR-400(30MHz-1GHz)(8m+5m)	N/A	Jun. 26, 2018
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Aug. 20, 2018

Radiated Emission Measurement - Above 1GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS	3115	75789	Mar. 26, 2018
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jun. 08, 2018
3	Amplifier	Agilent	8449B	3008A02274	May. 16, 2018
4	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 26, 2018
5	Receiver	Agilent	N9038A	MY52130039	Aug. 20, 2018
6	Antenna	EM	EM-6876-1	230	Jul. 07, 2018
7	Controller	CT	SC100	N/A	N/A
8	Controller	MF	MF-7802	MF780208416	N/A
9	Cable	emci	EMC104-SM-SM-1 2000(12m)	N/A	Jun. 26, 2018
10	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

**Number of Hopping Channel**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018

**Average Time of Occupancy**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018

**Hopping Channel Separation Measurement**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018

**Bandwidth**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018

**Peak Output Power**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018

**Antenna Conducted Spurious Emission**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

**12. EUT TEST PHOTO****Conducted Measurement Photos**

### Radiated Measurement Photos

**9KHz to 30MHz**




## Radiated Measurement Photos

30MHz to 1000MHz



## Radiated Measurement Photos


### Above 1GHz

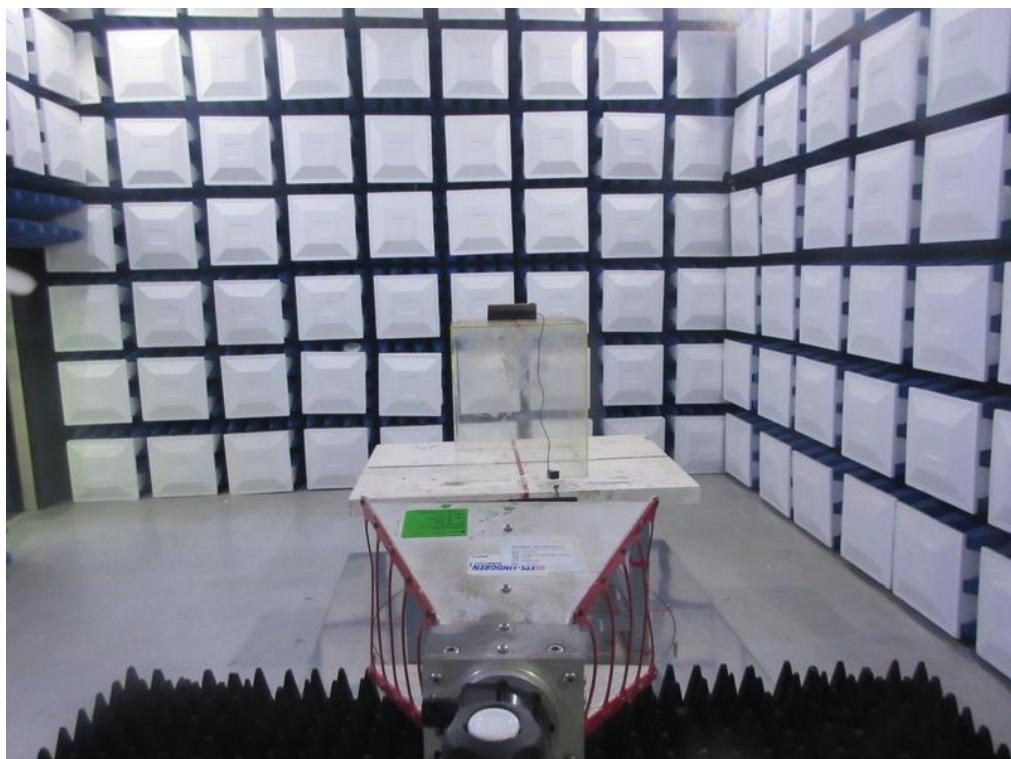

## APPENDIX A - CONDUCTED EMISSION

Test Mode: TX Mode


## Line

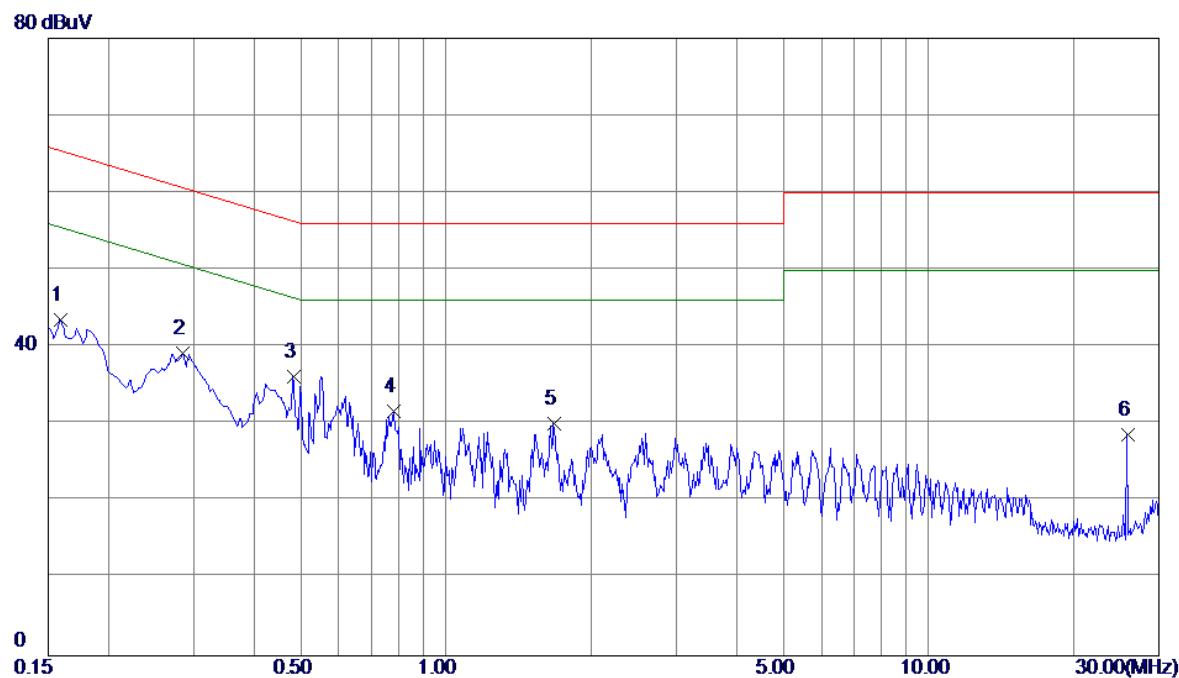

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dB	Margin Detector	Comment
1	0.1590	33.91	9.64	43.55	65.52	-21.97	Peak
2	0.2850	29.50	9.64	39.14	60.67	-21.53	Peak
3 *	0.4830	26.49	9.66	36.15	56.29	-20.14	Peak
4	0.7799	21.95	9.66	31.61	56.00	-24.39	Peak
5	1.6754	20.34	9.70	30.04	56.00	-25.96	Peak
6	25.8405	18.11	10.53	28.64	60.00	-31.36	Peak

Test Mode: TX Mode

Neutral

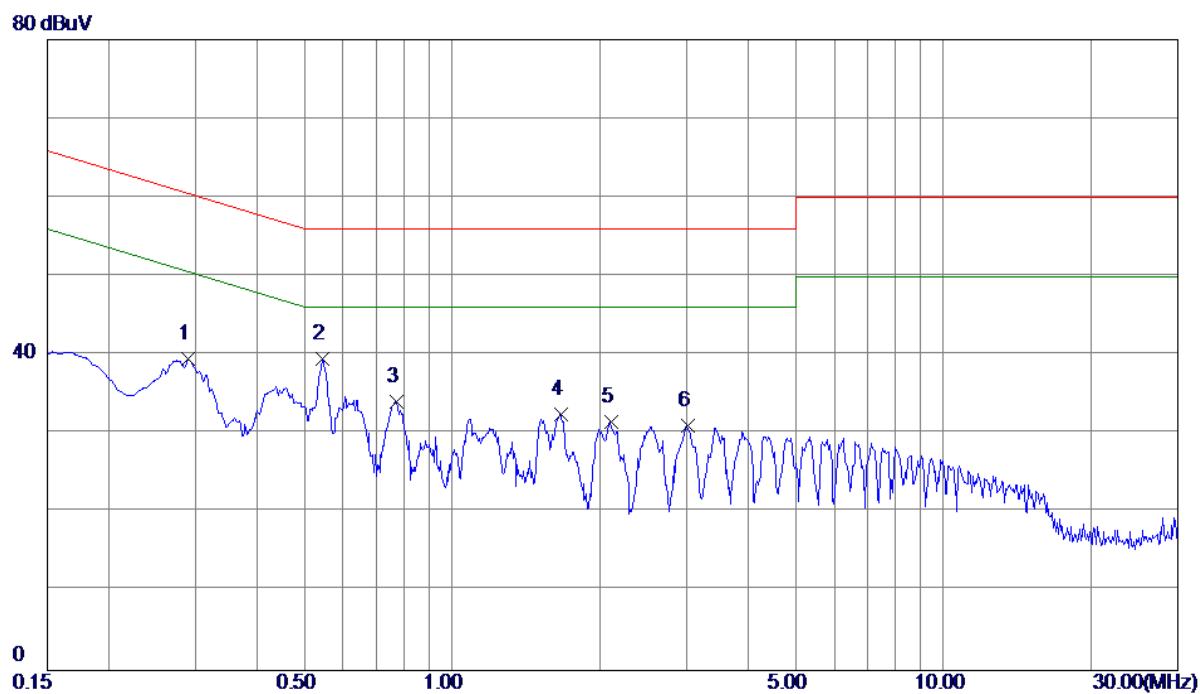


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.2895	29.86	9.64	39.50	60.54	-21.04	Peak	
2 *	0.5460	29.79	9.66	39.45	56.00	-16.55	Peak	
3	0.7710	24.38	9.66	34.04	56.00	-21.96	Peak	
4	1.6620	22.80	9.70	32.50	56.00	-23.50	Peak	
5	2.1030	21.76	9.73	31.49	56.00	-24.51	Peak	
6	3.0120	21.29	9.76	31.05	56.00	-24.95	Peak	

## APPENDIX B - RADIATED EMISSION (9KHZ-30MHZ)

Test Mode: TX Mode


Ant 0°

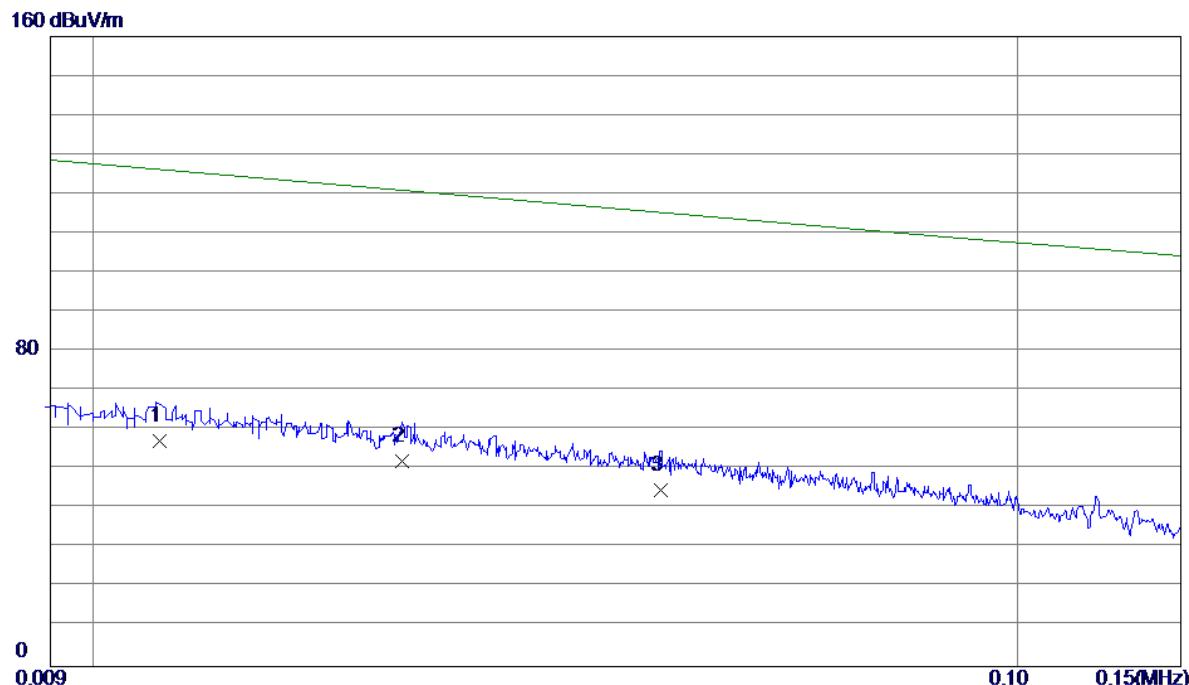

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	0.0118	36.62	20.69	57.31	127.80	-70.49	AVG	
2	0.0216	32.59	19.57	52.16	125.38	-73.22	AVG	
3	0.0411	25.78	18.99	44.77	120.57	-75.80	AVG	

Test Mode: TX Mode


Ant 0°

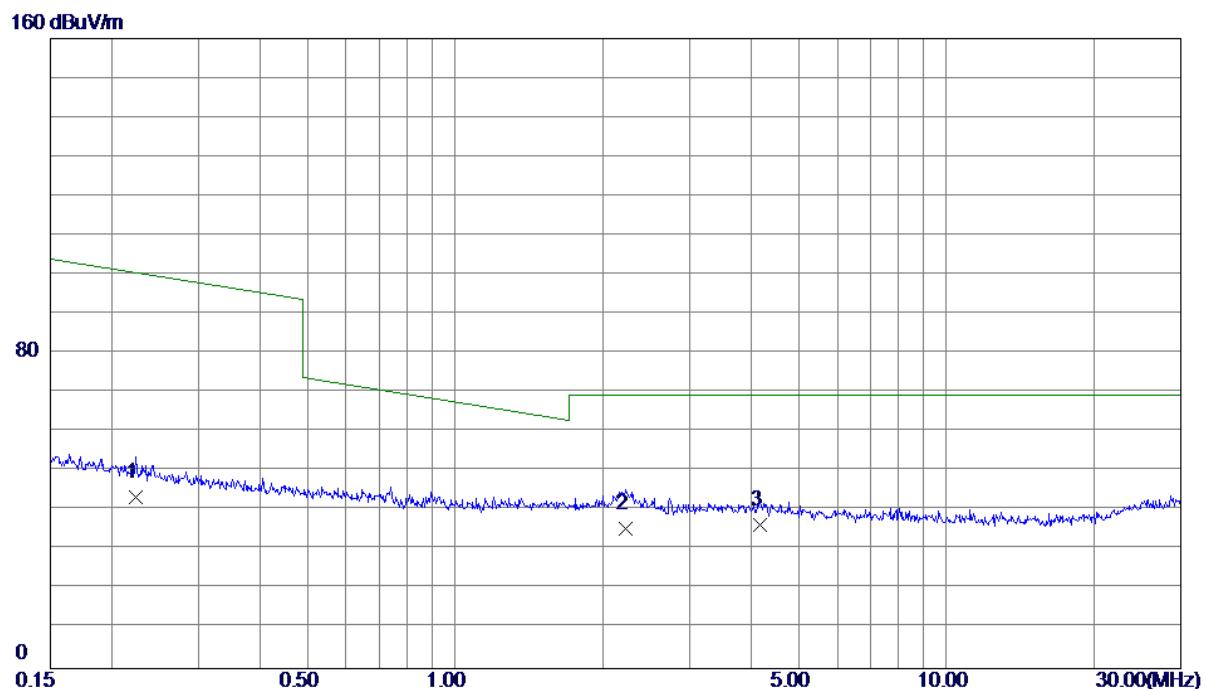

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.2244	26.87	16.73	43.60	102.87	-59.27	AVG	
2	2.2250	20.02	15.45	35.47	69.54	-34.07	QP	
3 *	4.1796	21.49	14.85	36.34	69.54	-33.20	QP	

Test Mode: TX Mode


Ant 90°

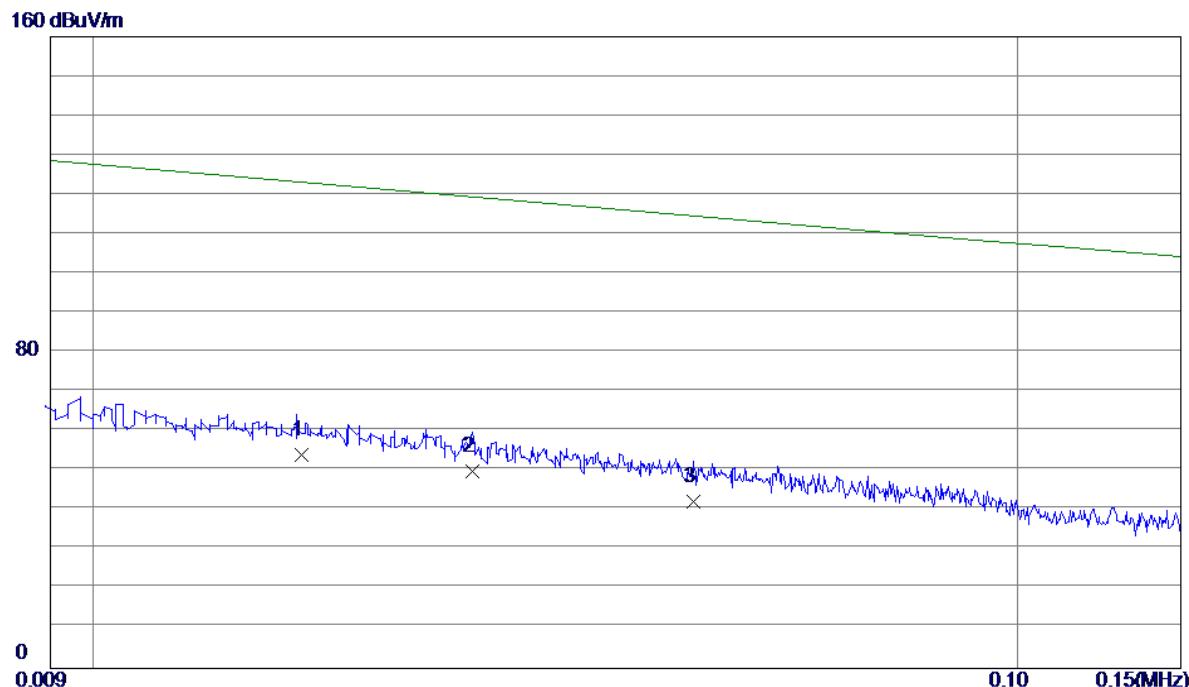

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	0.0168	34.17	20.04	54.21	126.57	-72.36	AVG	
2	0.0257	30.33	19.45	49.78	124.37	-74.59	AVG	
3	0.0446	23.46	18.89	42.35	119.71	-77.36	AVG	

Test Mode: TX Mode

Ant 90°

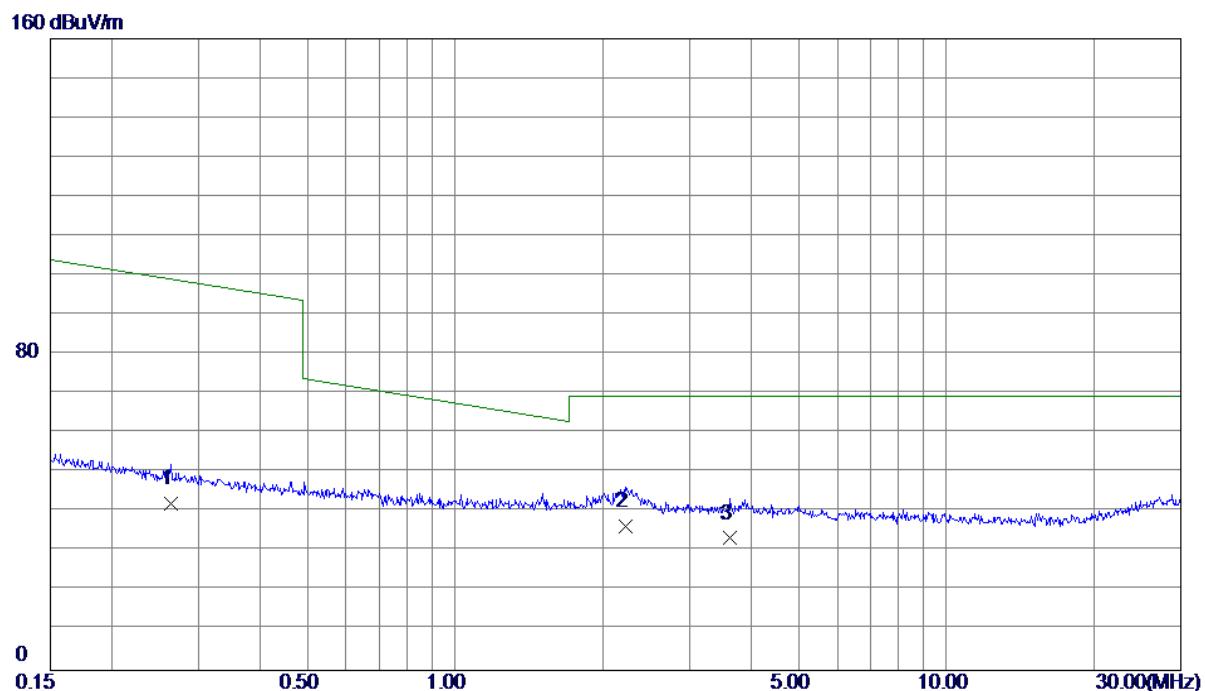


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment				
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	0.2644	25.63	16.65	42.28	101.50	-59.22	AVG	
2 *	2.2250	21.11	15.45	36.56	69.54	-32.98	QP	
3	3.6225	18.38	15.06	33.44	69.54	-36.10	QP	

## APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode: TX 2402MHz\_CH00\_1Mbps

## Vertical


80 dBuV/m

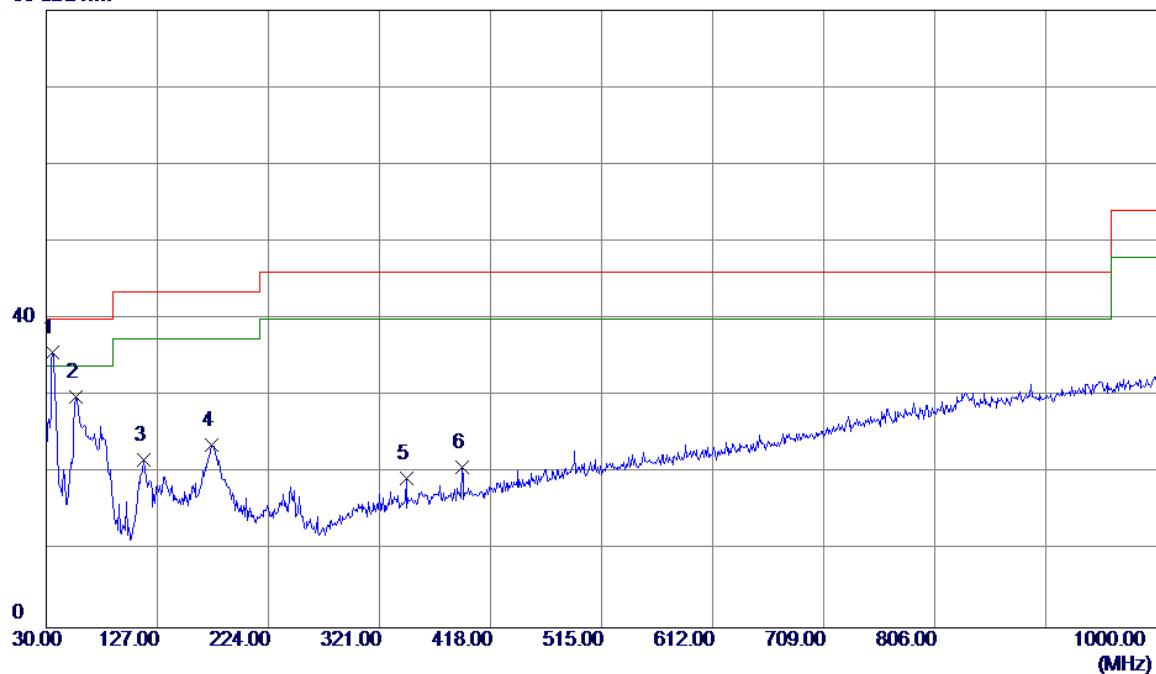

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Margin	
							Detector	Comment
1 *	35.8200	50.25	-14.51	35.74	40.00	-4.26	Peak	
2	56.1900	43.82	-13.95	29.87	40.00	-10.13	Peak	
3	115.3600	37.58	-15.77	21.81	43.50	-21.69	Peak	
4	174.5300	35.85	-12.20	23.65	43.50	-19.85	Peak	
5	344.2800	31.46	-12.06	19.40	46.00	-26.60	Peak	
6	392.7800	32.30	-11.45	20.85	46.00	-25.15	Peak	

Test Mode: TX 2402MHz\_CH00\_1Mbps


## Horizontal

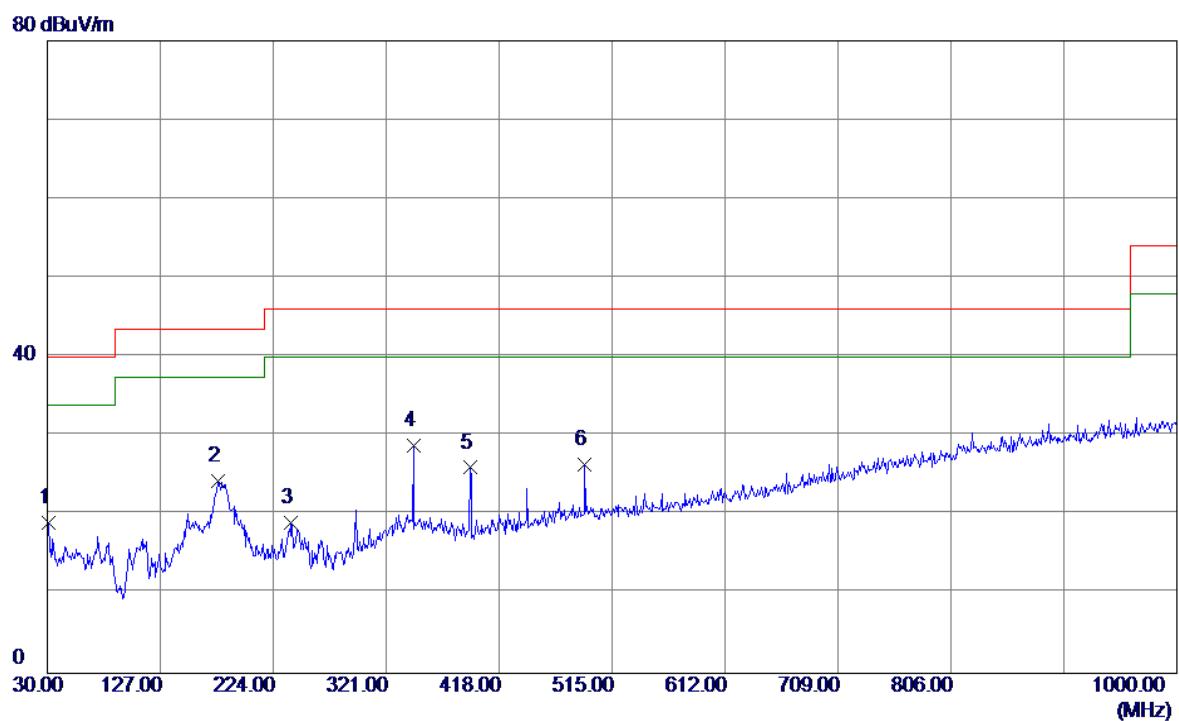

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	30.9700	34.19	-15.14	19.05	40.00	-20.95	Peak	
2	176.4700	36.41	-12.14	24.27	43.50	-19.23	Peak	
3	239.5200	33.44	-14.35	19.09	46.00	-26.91	Peak	
4 *	344.2800	40.81	-12.06	28.75	46.00	-17.25	Peak	
5	392.7800	37.45	-11.45	26.00	46.00	-20.00	Peak	
6	491.7200	35.28	-8.92	26.36	46.00	-19.64	Peak	

Test Mode: TX 2441MHz\_CH39\_1Mbps


## Vertical

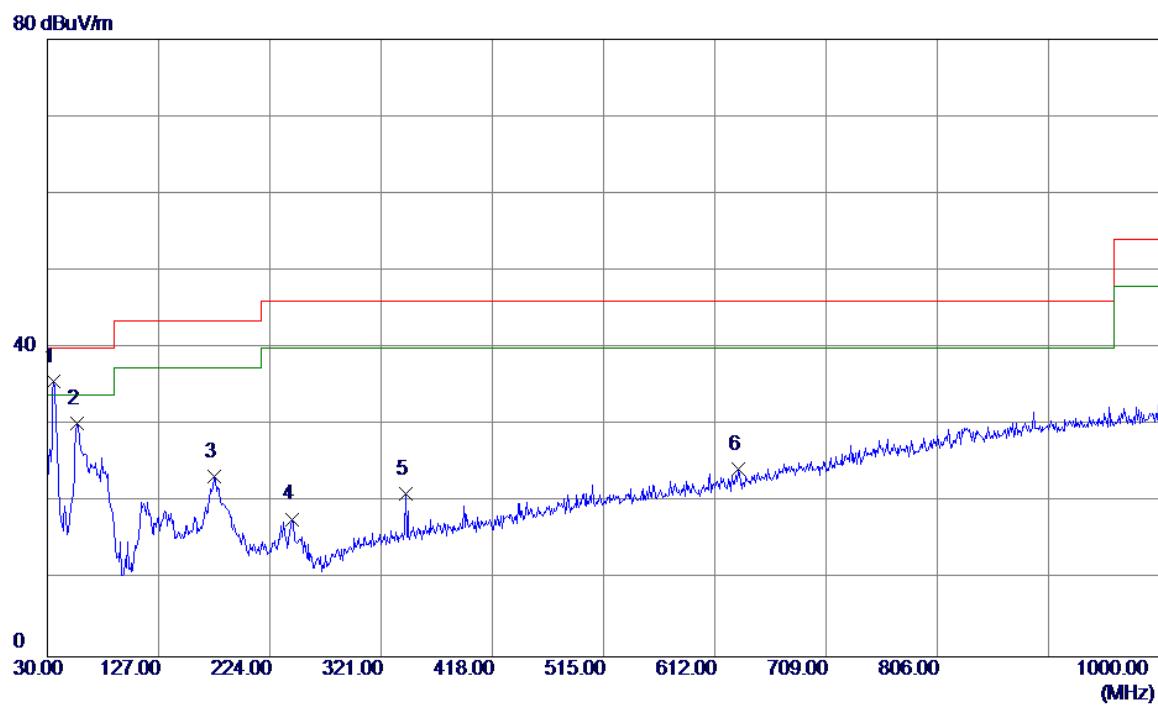

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Margin	
							Detector	Comment
1 *	35.8200	50.15	-14.51	35.64	40.00	-4.36	Peak	
2	56.1900	44.14	-13.95	30.19	40.00	-9.81	Peak	
3	175.5000	35.52	-12.17	23.35	43.50	-20.15	Peak	
4	243.4000	32.38	-14.54	17.84	46.00	-28.16	Peak	
5	342.3400	33.23	-12.09	21.14	46.00	-24.86	Peak	
6	632.3700	30.09	-5.81	24.28	46.00	-21.72	Peak	

Test Mode: TX 2441MHz\_CH39\_1Mbps

## Horizontal

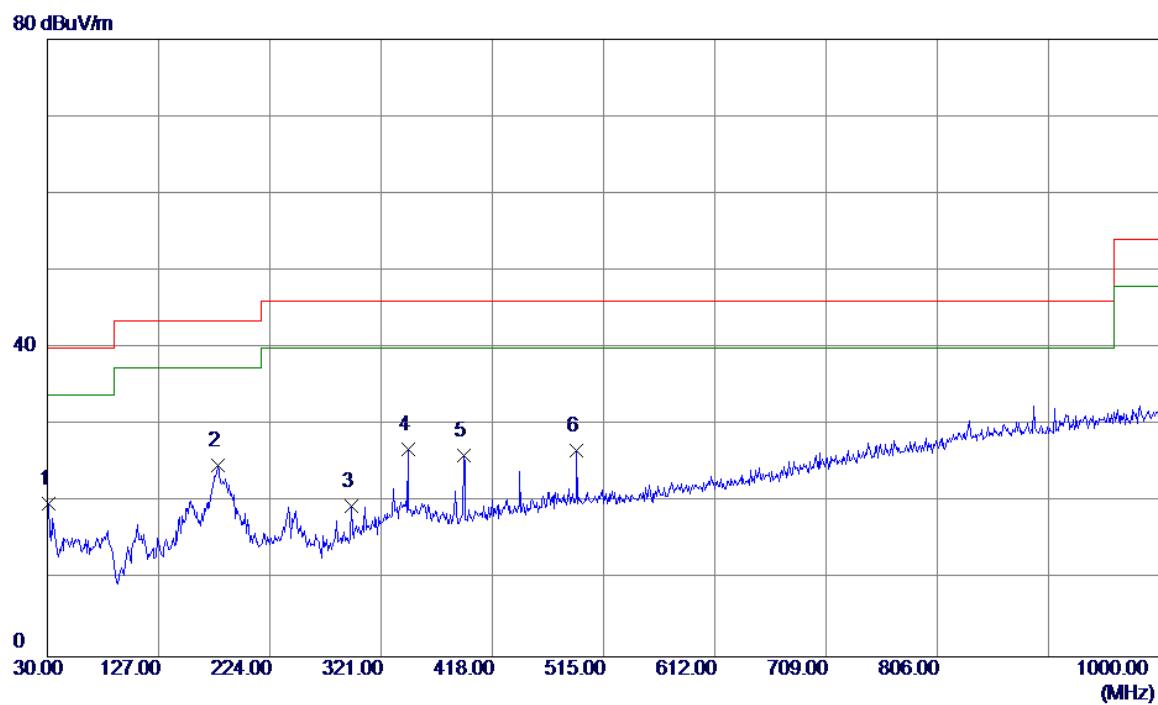


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Margin	
							Detector	Comment
1	30.9700	34.99	-15.14	19.85	40.00	-20.15	Peak	
2 *	178.4100	36.82	-12.09	24.73	43.50	-18.77	Peak	
3	294.8100	33.12	-13.54	19.58	46.00	-26.42	Peak	
4	344.2800	38.92	-12.06	26.86	46.00	-19.14	Peak	
5	392.7800	37.52	-11.45	26.07	46.00	-19.93	Peak	
6	491.7200	35.68	-8.92	26.76	46.00	-19.24	Peak	

Test Mode: TX 2480MHz\_CH78\_1Mbps

## Vertical


80 dBuV/m

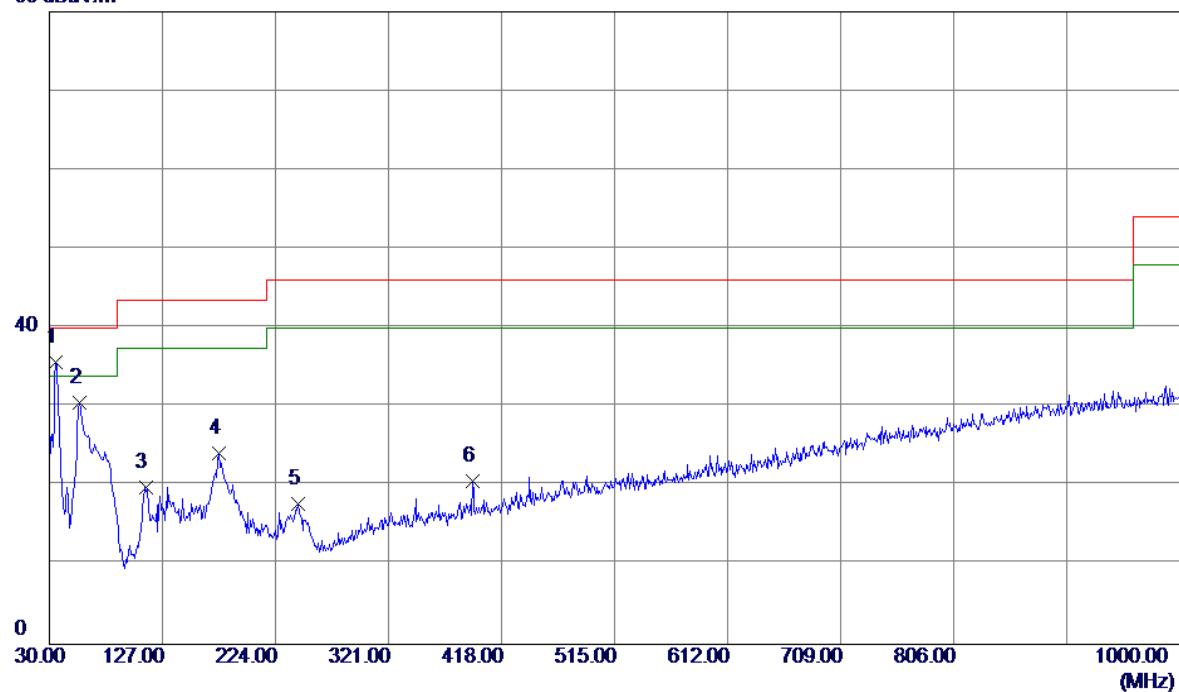

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector		Comment
							Detector	Margin	
1 *	35.8200	50.17	-14.51	35.66	40.00	-4.34	Peak		
2	56.1900	44.48	-13.95	30.53	40.00	-9.47	Peak		
3	112.4500	35.84	-16.00	19.84	43.50	-23.66	Peak		
4	175.5000	36.29	-12.17	24.12	43.50	-19.38	Peak		
5	243.4000	32.23	-14.54	17.69	46.00	-28.31	Peak		
6	392.7800	32.08	-11.45	20.63	46.00	-25.37	Peak		

Test Mode: TX 2480MHz\_CH78\_1Mbps


## Horizontal

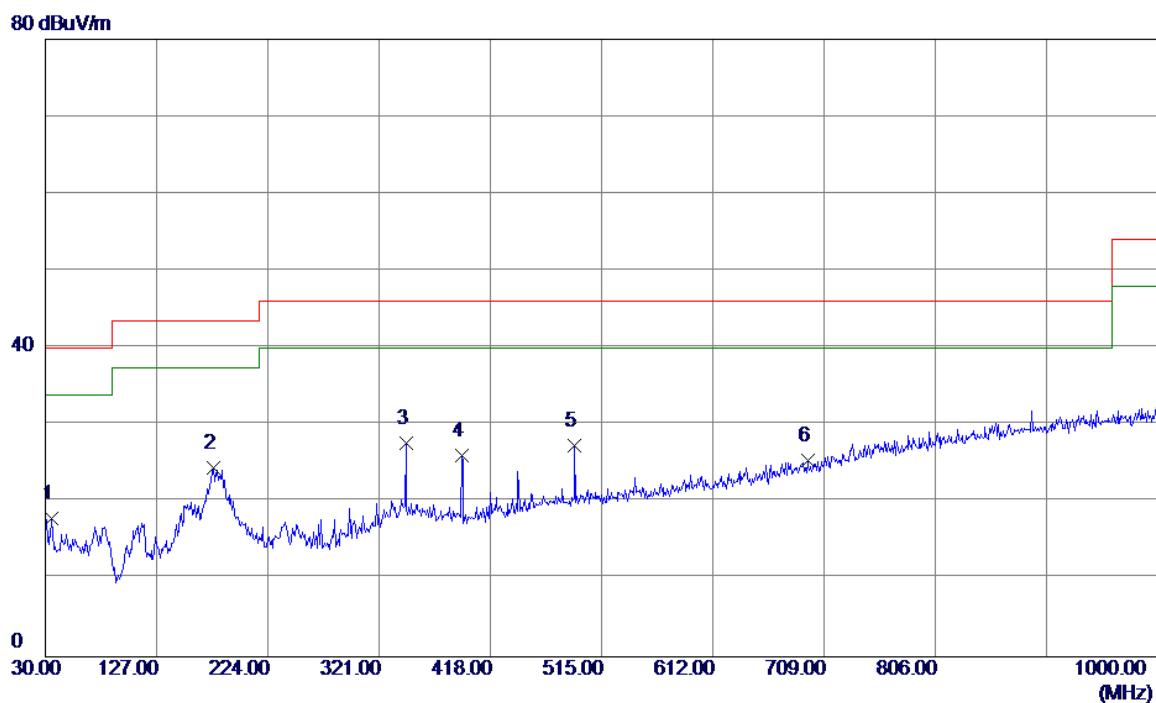

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Margin	
							Detector	Comment
1	35.8200	32.50	-14.51	17.99	40.00	-22.01	Peak	
2	176.4700	36.55	-12.14	24.41	43.50	-19.09	Peak	
3 *	344.2800	39.71	-12.06	27.65	46.00	-18.35	Peak	
4	392.7800	37.54	-11.45	26.09	46.00	-19.91	Peak	
5	491.7200	36.27	-8.92	27.35	46.00	-18.65	Peak	
6	694.4500	29.58	-4.11	25.47	46.00	-20.53	Peak	

Test Mode: TX 2402MHz \_CH00\_3Mbps

## Vertical

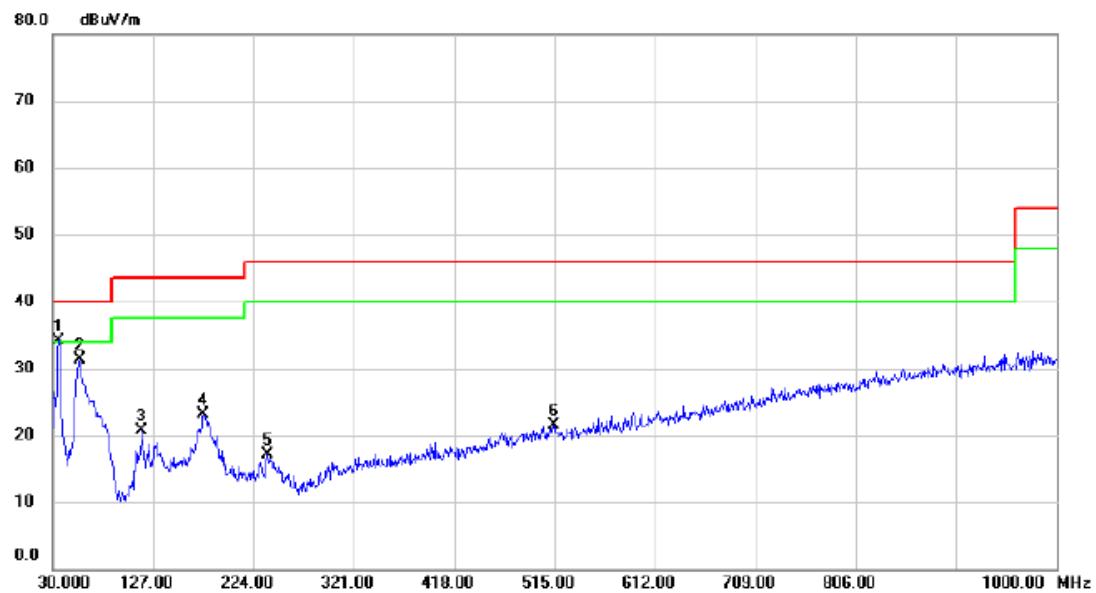

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	35.820	48.71	-14.51	34.20	40.00	-5.80	peak	
2		56.190	45.34	-13.96	31.38	40.00	-8.62	peak	
3		116.330	36.44	-15.70	20.74	43.50	-22.76	peak	
4		175.500	35.27	-12.18	23.09	43.50	-20.41	peak	
5		237.580	31.33	-14.31	17.02	46.00	-28.98	peak	
6		514.030	29.93	-8.44	21.49	46.00	-24.51	peak	

Test Mode: TX 2402MHz \_CH00\_3Mbps


## Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB	Margin Detector	Comment
			dBuV	dB	dBuV/m			
1		30.970	33.65	-15.14	18.51	40.00	-21.49	peak
2		55.220	31.45	-13.94	17.51	40.00	-22.49	peak
3 *		176.470	36.94	-12.14	24.80	43.50	-18.70	peak
4		240.490	32.41	-14.38	18.03	46.00	-27.97	peak
5		345.250	32.08	-12.03	20.05	46.00	-25.95	peak
6		505.300	31.25	-8.61	22.64	46.00	-23.36	peak

Test Mode: TX 2441MHz \_CH39\_3Mbps


## Vertical

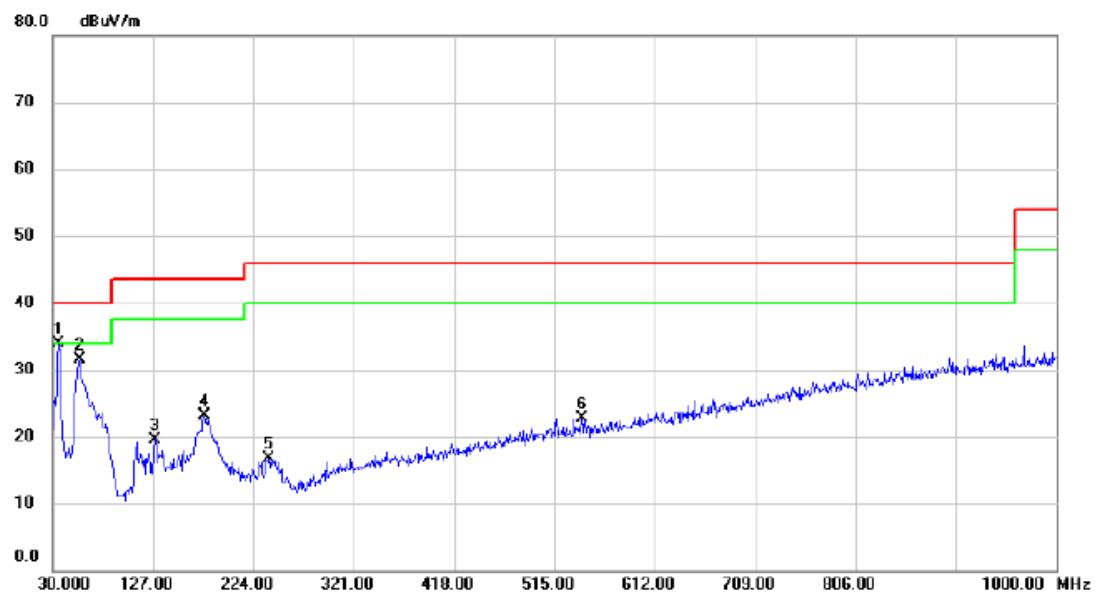

No.	Mk.	Reading		Correct Factor	Measure- ment	Limit	Margin	Comment
		MHz	dBuV	dB	dBuV/m	dB	Detector	
1 *	35.820	48.42	48.42	-14.51	33.91	40.00	-6.09	peak
2	56.190	45.50	45.50	-13.96	31.54	40.00	-8.46	peak
3	128.940	34.38	34.38	-14.78	19.60	43.50	-23.90	peak
4	176.470	35.21	35.21	-12.14	23.07	43.50	-20.43	peak
5	238.550	31.06	31.06	-14.33	16.73	46.00	-29.27	peak
6	541.190	30.68	30.68	-7.89	22.79	46.00	-23.21	peak

Test Mode: TX 2441MHz \_CH39\_3Mbps


## Horizontal

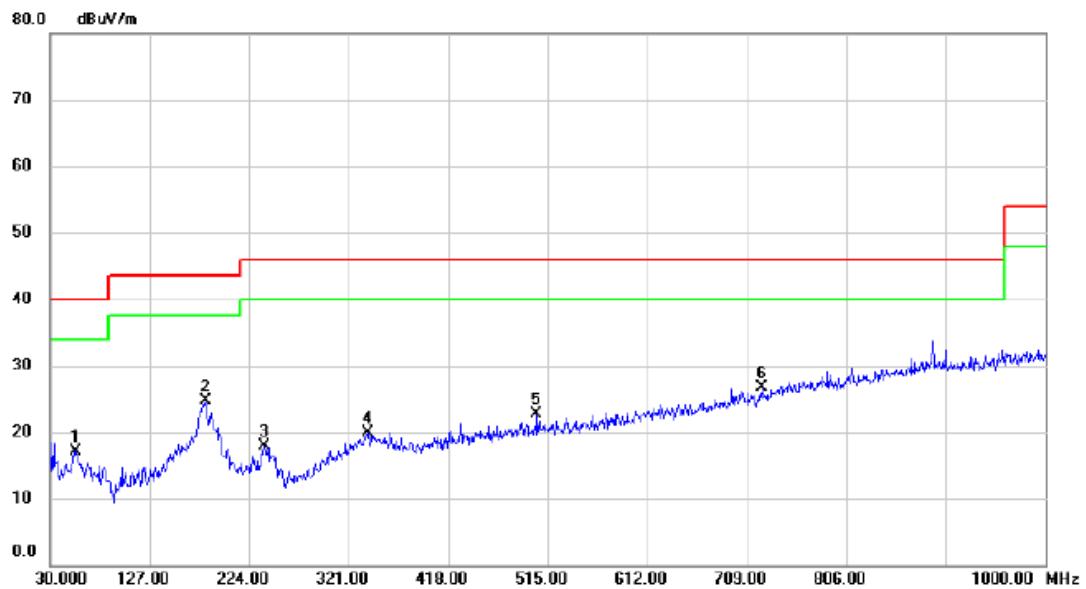

No.	Mk.	Reading		Correct Factor	Measure- ment	Limit	Margin	Detector	Comment
		Freq.	Level						
		MHz	dBuV	dB	dBuV/m	dB			
1		55.220	31.06	-13.94	17.12	40.00	-22.88	peak	
2 *		181.320	36.76	-12.14	24.62	43.50	-18.88	peak	
3		238.550	32.19	-14.33	17.86	46.00	-28.14	peak	
4		339.430	32.13	-12.14	19.99	46.00	-26.01	peak	
5		504.330	31.31	-8.63	22.68	46.00	-23.32	peak	
6		723.550	29.86	-3.23	26.63	46.00	-19.37	peak	

Test Mode: TX 2480MHz \_CH78\_3Mbps


## Vertical

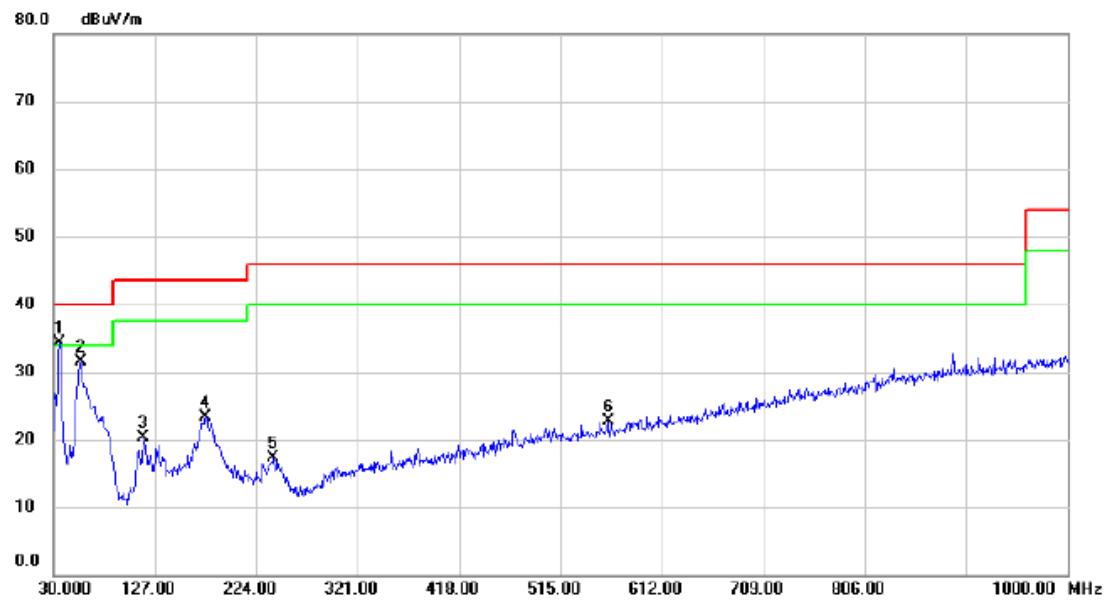

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level dBuV	Factor dB	ment dBuV/m				
1	*	35.820	48.82	-14.51	34.31	40.00	-5.69	peak	
2		56.190	45.51	-13.96	31.55	40.00	-8.45	peak	
3		115.360	36.12	-15.76	20.36	43.50	-23.14	peak	
4		175.500	35.40	-12.18	23.22	43.50	-20.28	peak	
5		240.490	31.77	-14.38	17.39	46.00	-28.61	peak	
6		560.590	30.19	-7.45	22.74	46.00	-23.26	peak	

Test Mode: TX 2480MHz \_CH78\_3Mbps

## Horizontal

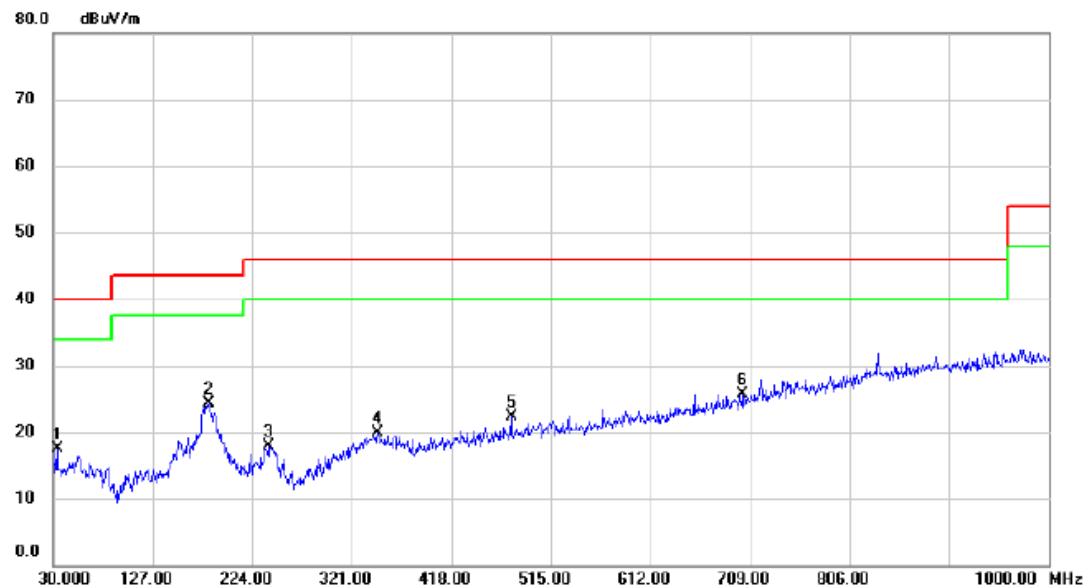


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		33.880	32.18	-14.73	17.45	40.00	-22.55	peak
2 *		181.320	36.38	-12.14	24.24	43.50	-19.26	peak
3		240.490	32.28	-14.38	17.90	46.00	-28.10	peak
4		346.220	32.02	-12.03	19.99	46.00	-26.01	peak
5		476.200	31.53	-9.30	22.23	46.00	-23.77	peak
6		702.210	29.67	-3.88	25.79	46.00	-20.21	peak

## APPENDIX D - RADIATED EMISSION (ABOVE 1000MHZ)

Test Mode : TX 2402MHz \_CH00\_1Mbps

Vertical

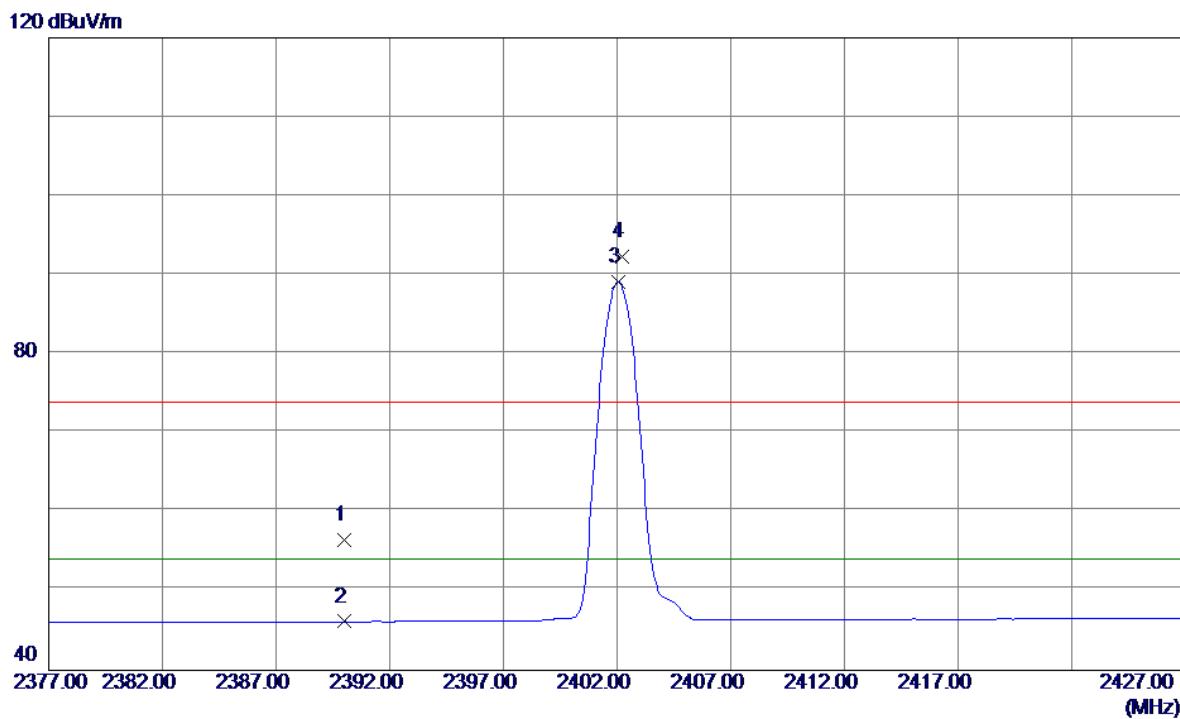


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment				
	MHz	dBuV/m	dB	dBuV/m	dB			
1	2390.0000	23.49	33.06	56.55	74.00	-17.45	Peak	
2	2390.0000	13.10	33.06	46.16	54.00	-7.84	AVG	
3 *	2402.0500	55.99	33.10	89.09	54.00	35.09	AVG	No Limit
4	2402.2000	59.21	33.10	92.31	74.00	18.31	Peak	No Limit

Test Mode : TX 2402MHz \_CH00\_1Mbps

## Vertical

80 dBuV/m

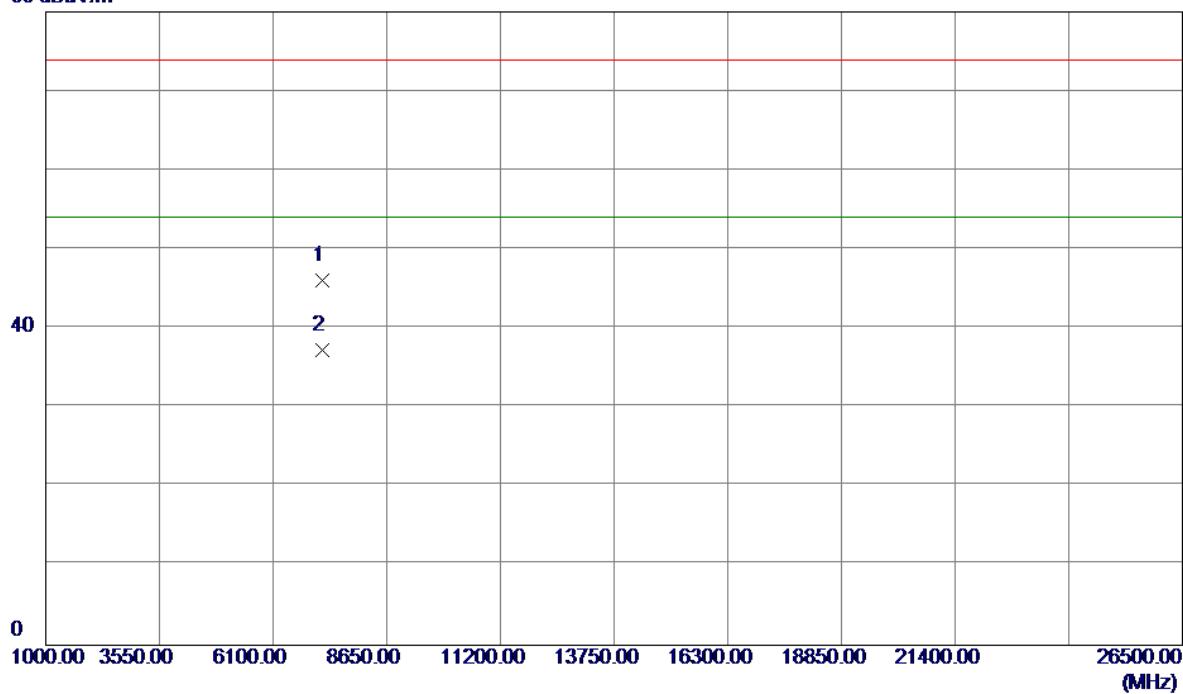


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	7205.2400	32.90	13.13	46.03	74.00	-27.97	Peak	
2 *	7206.2880	24.10	13.13	37.23	54.00	-16.77	AVG	

Test Mode : TX 2402MHz \_CH00\_1Mbps

## Horizontal


120 dBuV/m

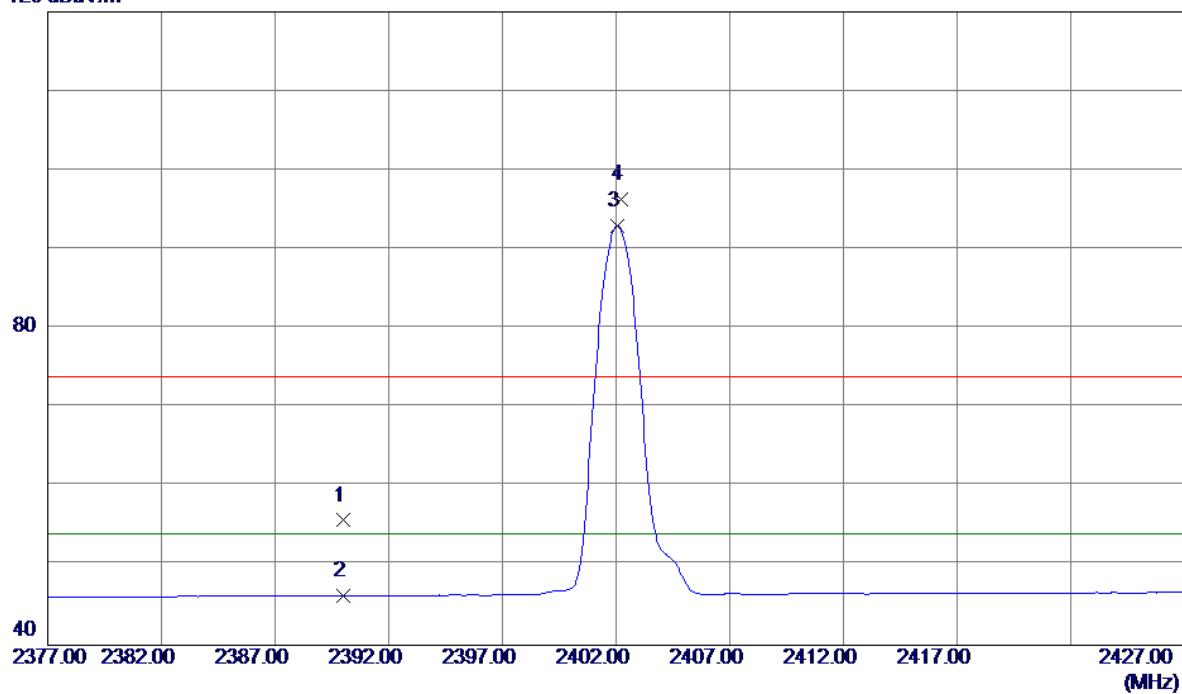

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dB	Margin dB	Margin	
							Detector	Comment
1	2390.0000	22.70	33.06	55.76	74.00	-18.24	Peak	
2	2390.0000	13.17	33.06	46.23	54.00	-7.77	AVG	
3 *	2402.0500	59.85	33.10	92.95	54.00	38.95	AVG	No Limit
4	2402.2000	63.21	33.10	96.31	74.00	22.31	Peak	No Limit

Test Mode : TX 2402MHz \_CH00\_1Mbps

## Horizontal

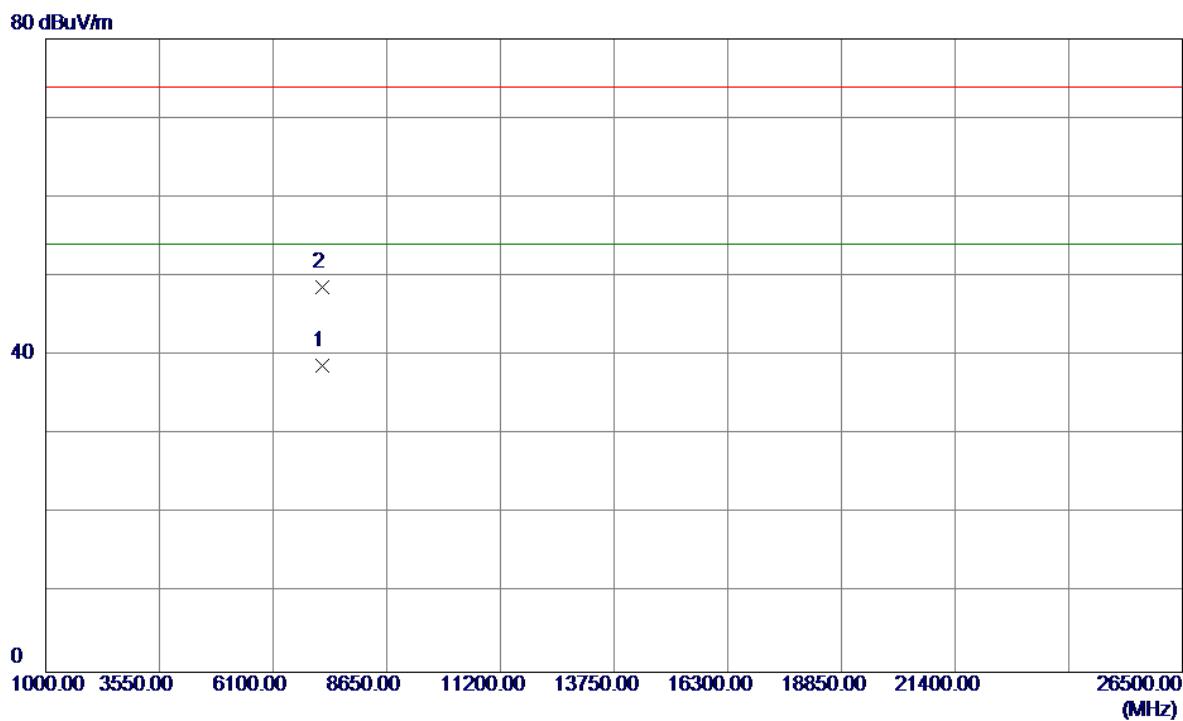


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dB	Margin	Detector	Comment
								1 *
2	7206.6500	35.58	13.13	48.71	74.00	-25.29	Peak	

Test Mode : TX 2441MHz \_CH39\_1Mbps

## Vertical

120 dBuV/m

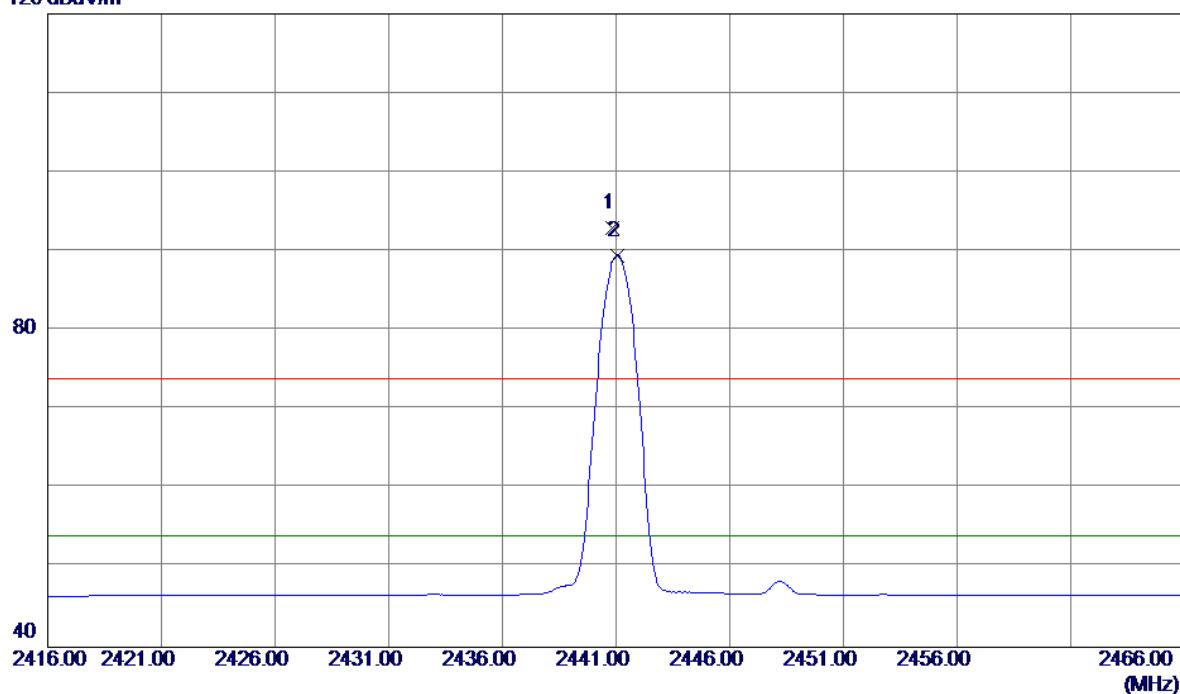


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	2440.8500	59.65	33.25	92.90	74.00	18.90	Peak	No Limit
2 *	2441.0500	56.27	33.25	89.52	54.00	35.52	AVG	No Limit

Test Mode : TX 2441MHz \_CH39\_1Mbps

## Vertical

80 dBuV/m

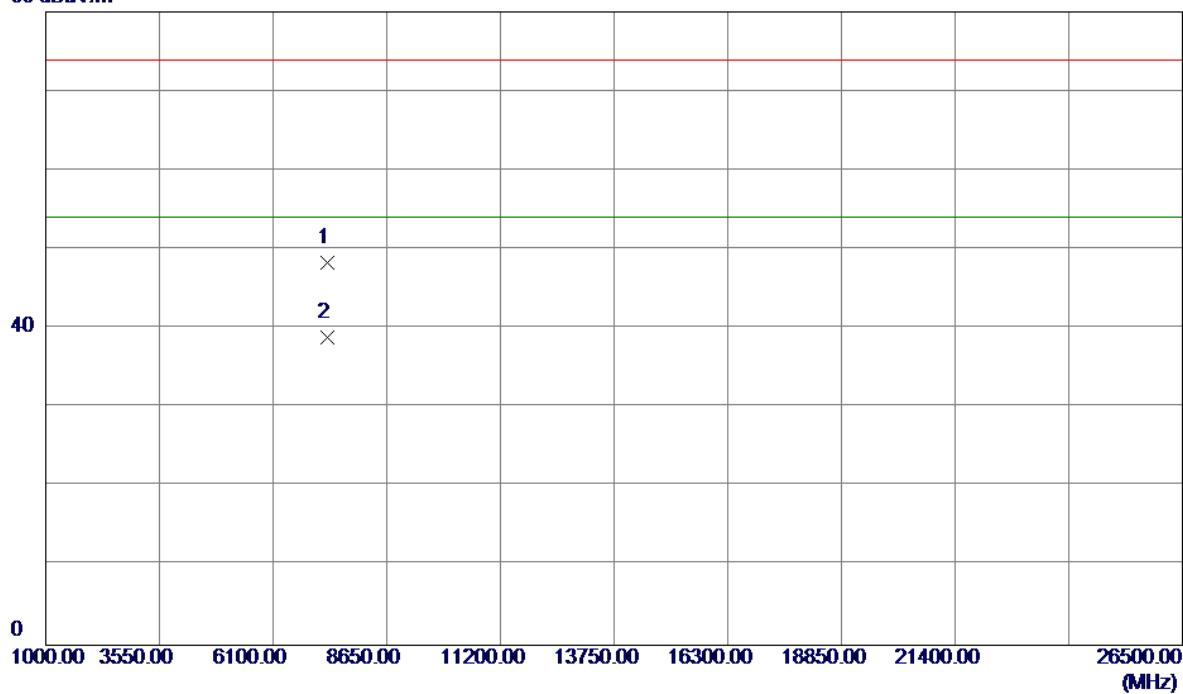


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	7322.6300	35.07	13.22	48.29	74.00	-25.71	Peak	
2 *	7322.8260	25.65	13.22	38.87	54.00	-15.13	AVG	

Test Mode : TX 2441MHz \_CH39\_1Mbps

## Horizontal

120 dBuV/m

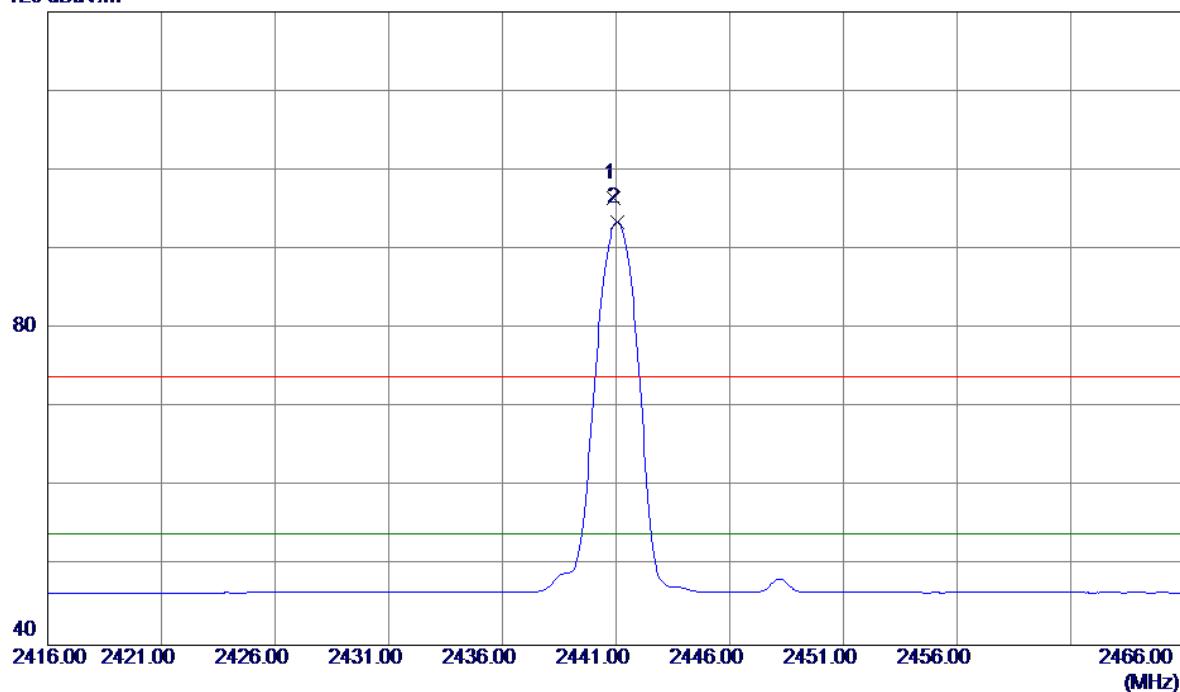


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Comment
		Level	Factor	ment	dBuV/m	dB	
	MHz	dBuV/m	dB	dBuV/m	dB		
1	2440.9000	63.30	33.25	96.55	74.00	22.55	Peak No Limit
2 *	2441.0500	60.23	33.25	93.48	54.00	39.48	AVG No Limit

Test Mode : TX 2441MHz \_CH39\_1Mbps

## Horizontal

80 dBuV/m

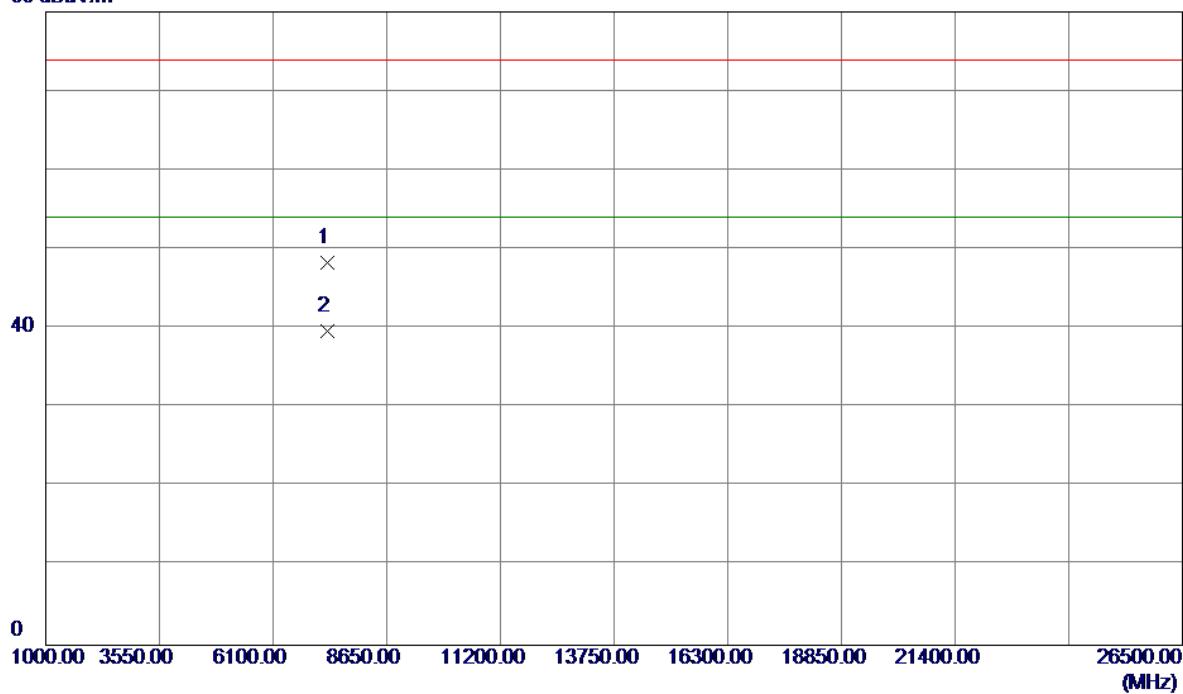


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dB	Margin Detector	Margin
							Comment
1	7322.7700	35.05	13.22	48.27	74.00	-25.73	Peak
2 *	7323.1380	26.40	13.22	39.62	54.00	-14.38	AVG

Test Mode : TX 2480MHz \_CH78\_1Mbps

## Vertical

120 dBuV/m

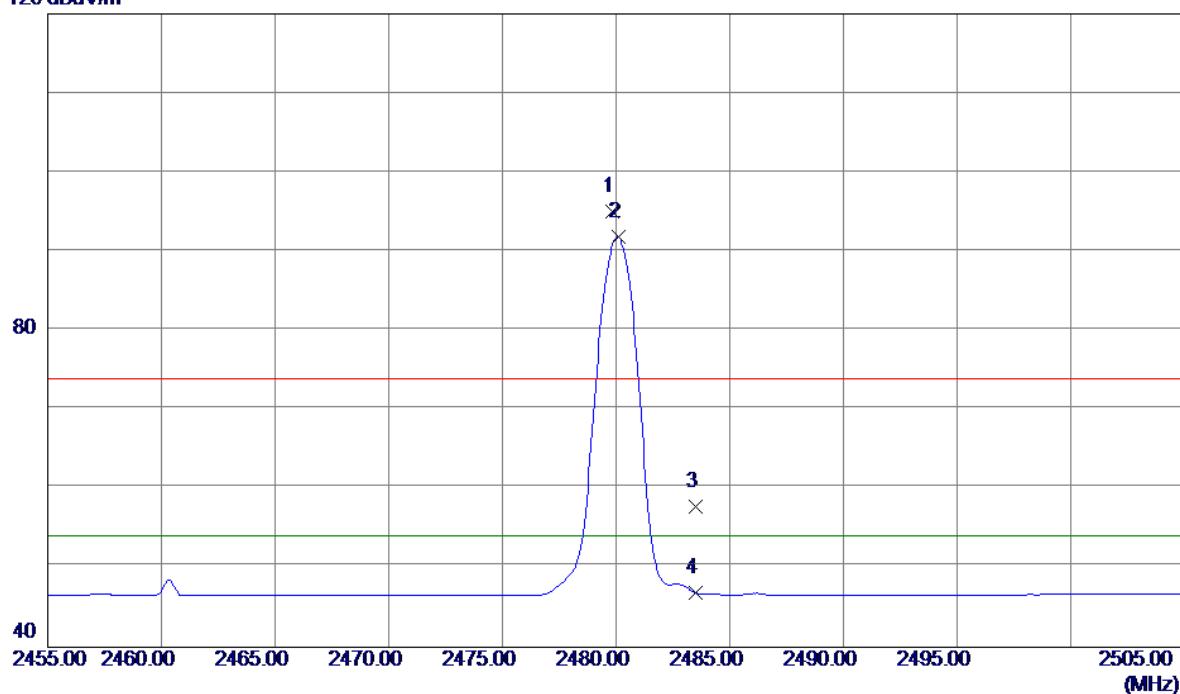


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	2479.8500	61.67	33.39	95.06	74.00	21.06	Peak	No Limit
2 *	2480.1000	58.41	33.40	91.81	54.00	37.81	AVG	No Limit
3	2483.5000	24.42	33.41	57.83	74.00	-16.17	Peak	
4	2483.5000	13.44	33.41	46.85	54.00	-7.15	AVG	

Test Mode : TX 2480MHz \_CH78\_1Mbps

## Vertical

80 dBuV/m

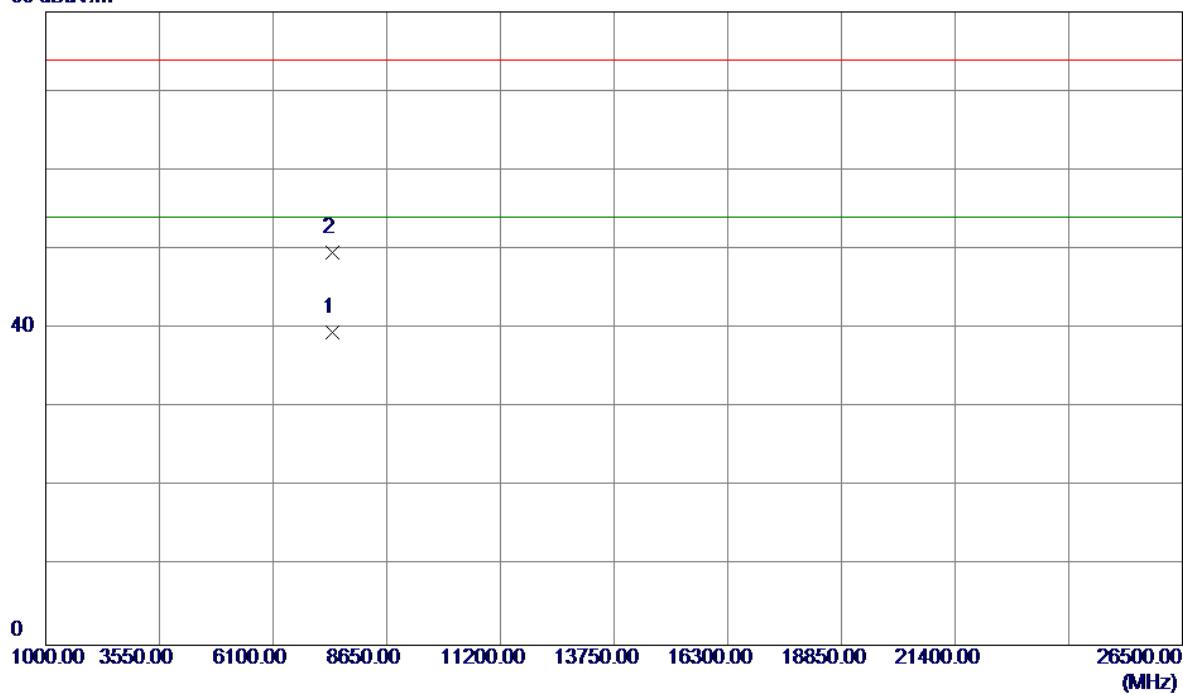


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1 *	7440.0320	26.28	13.31	39.59	54.00	-14.41	AVG	
2	7440.5480	36.27	13.31	49.58	74.00	-24.42	Peak	

Test Mode : TX 2480MHz \_CH78\_1Mbps

## Horizontal

120 dBuV/m

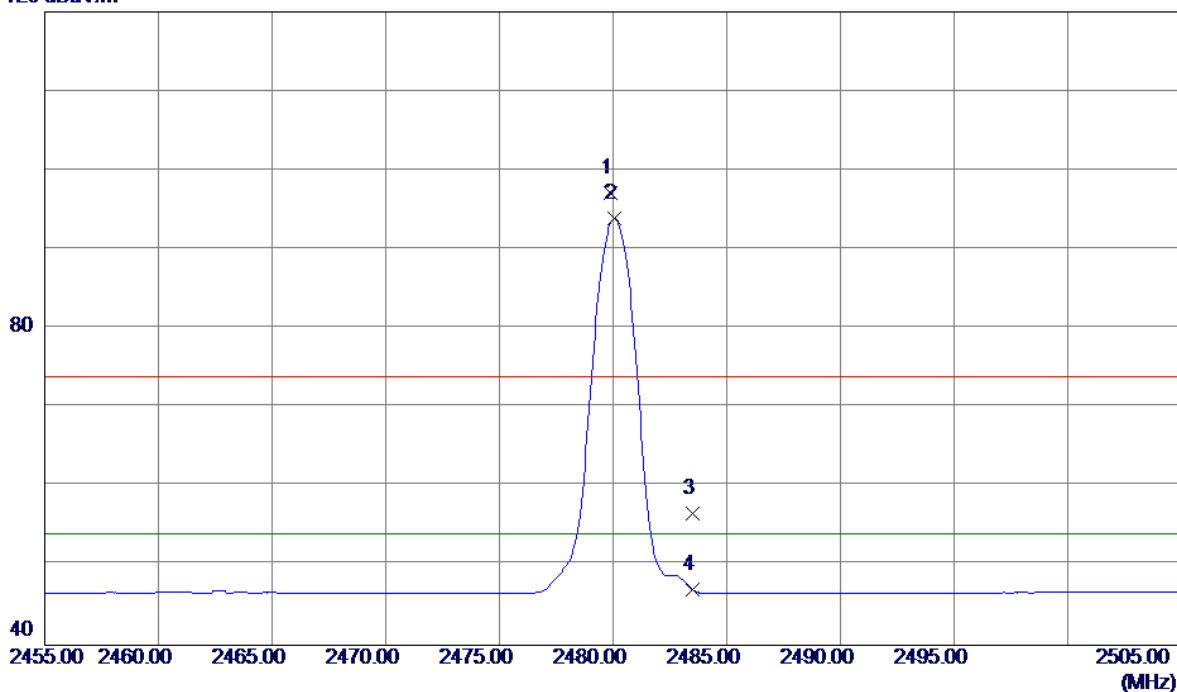


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	2479.9000	63.77	33.39	97.16	74.00	23.16	Peak	No Limit
2 *	2480.0500	60.46	33.39	93.85	54.00	39.85	AVG	No Limit
3	2483.5000	23.17	33.41	56.58	74.00	-17.42	Peak	
4	2483.5000	13.57	33.41	46.98	54.00	-7.02	AVG	

Test Mode : TX 2480MHz \_CH78\_1Mbps

## Horizontal

80 dBuV/m

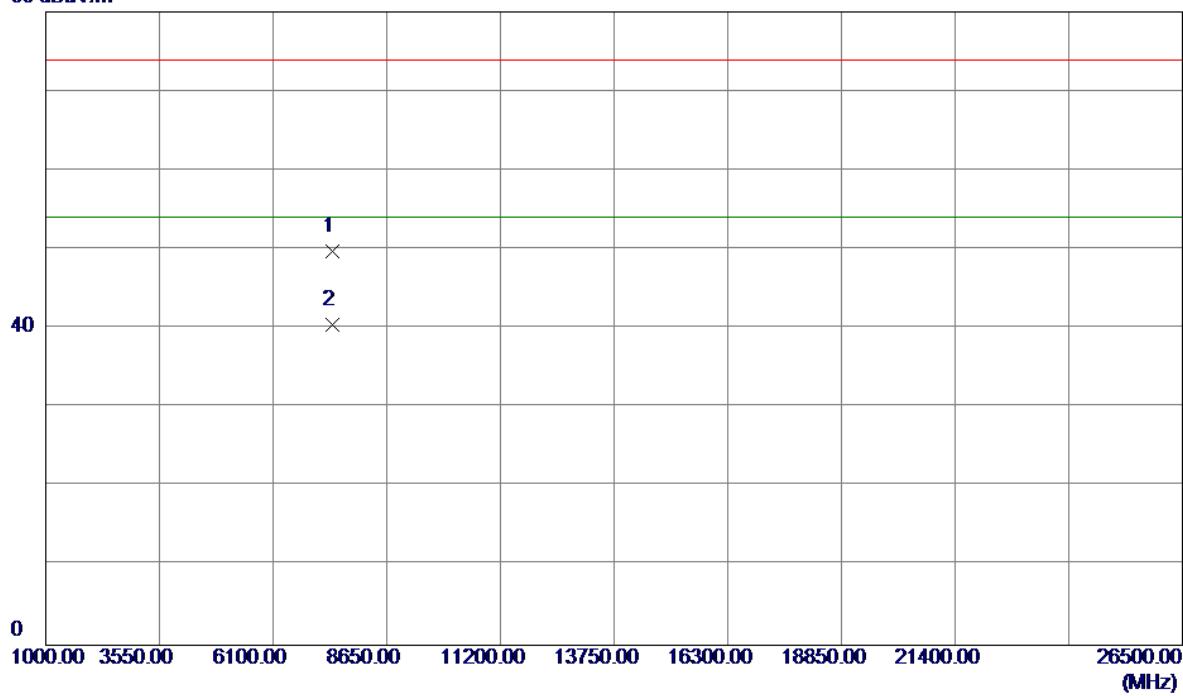


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	7439.6180	36.50	13.31	49.81	74.00	-24.19	Peak	
2 *	7440.1180	27.13	13.31	40.44	54.00	-13.56	AVG	

Test Mode : TX 2402MHz \_CH00\_3Mbps

## Vertical

120 dBuV/m

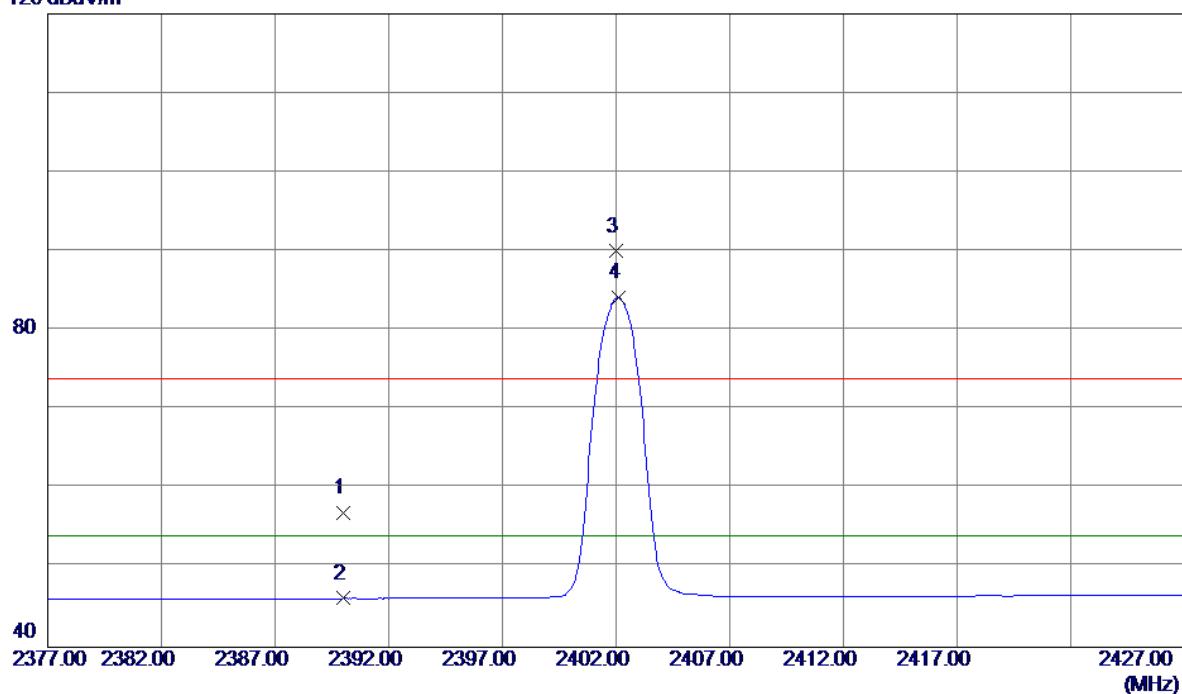


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector		Comment
							Detector	Comment	
1	2390.0000	23.88	33.06	56.94	74.00	-17.06	Peak		
2	2390.0000	13.10	33.06	46.16	54.00	-7.84	AVG		
3	2402.0000	56.90	33.10	90.00	74.00	16.00	Peak	No Limit	
4 *	2402.1000	51.06	33.10	84.16	54.00	30.16	AVG	No Limit	

Test Mode : TX 2402MHz \_CH00\_3Mbps

## Vertical

80 dBuV/m

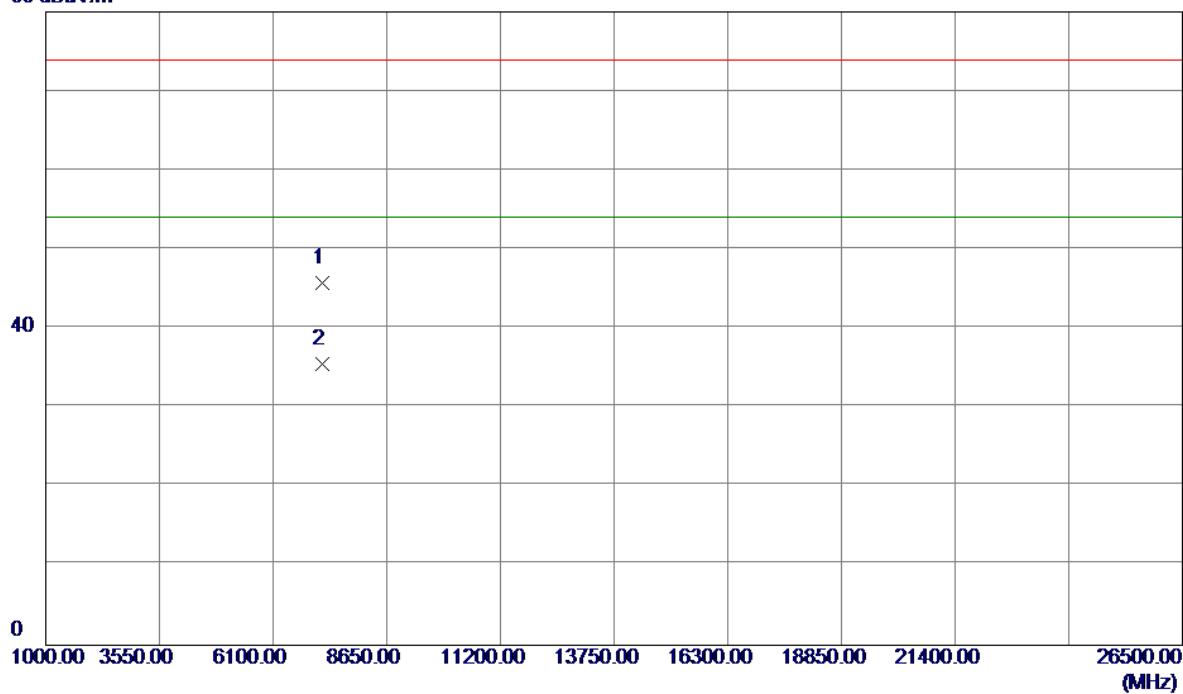


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	7205.3920	32.67	13.13	45.80	74.00	-28.20	Peak	
2 *	7205.6580	22.36	13.13	35.49	54.00	-18.51	AVG	

Test Mode : TX 2402MHz \_CH00\_3Mbps

## Horizontal

120 dBuV/m

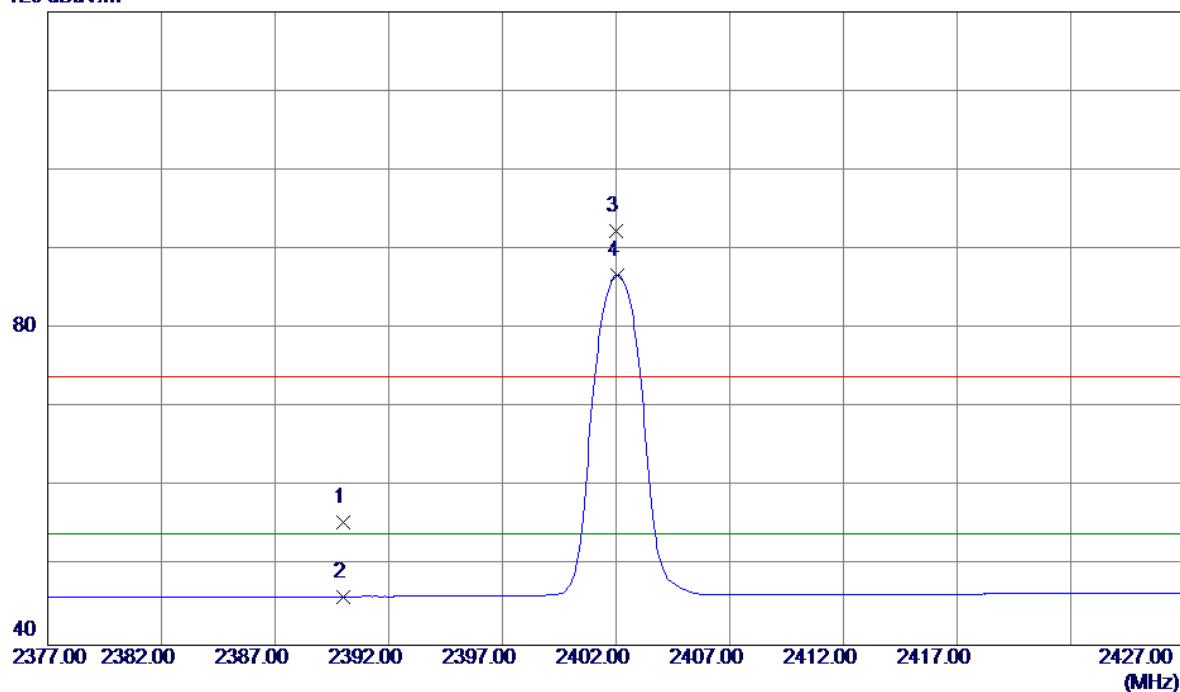


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dB			
1	2390.0000	13.09	33.06	55.45	74.00	-18.55	Peak	
2	2390.0000	22.39	33.06	46.15	54.00	-7.85	AVG	
3	2402.0000	59.28	33.10	92.38	74.00	18.38	Peak	No Limit
4 *	2402.0500	53.67	33.10	86.77	54.00	32.77	AVG	No Limit

Test Mode : TX 2402MHz \_CH00\_3Mbps

## Horizontal

80 dBuV/m

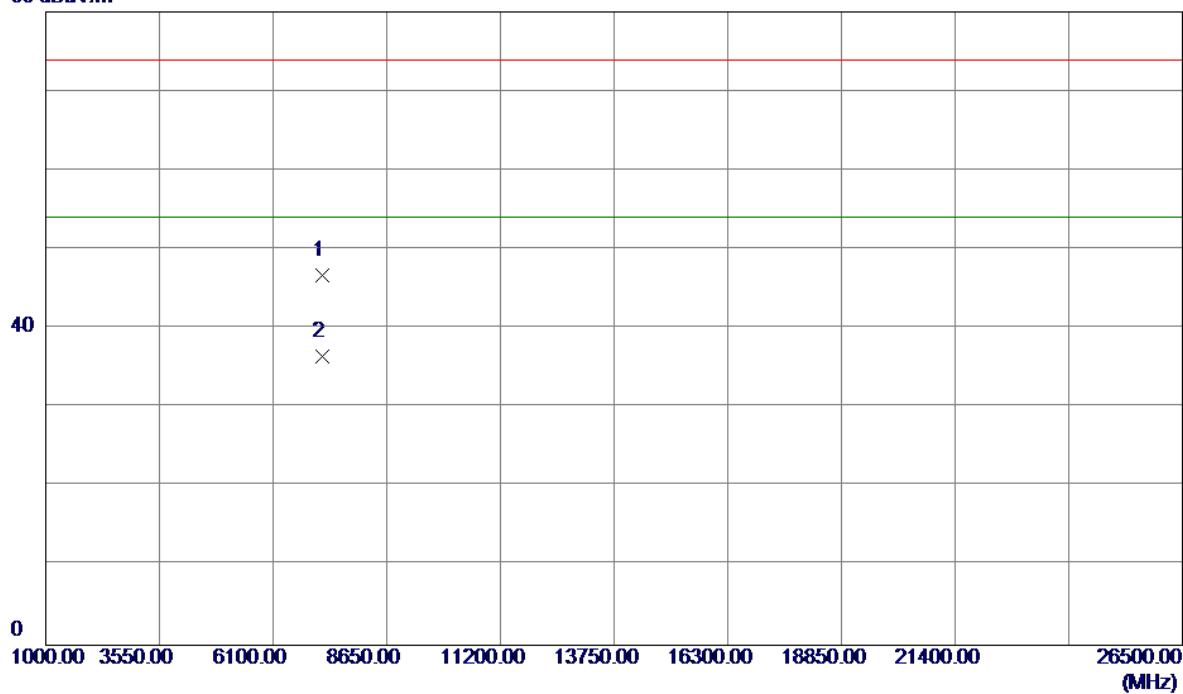


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	7205.1420	33.64	13.13	46.77	74.00	-27.23	Peak	
2 *	7206.2880	23.28	13.13	36.41	54.00	-17.59	AVG	

Test Mode : TX 2441MHz \_CH39\_3Mbps

## Vertical

120 dBuV/m

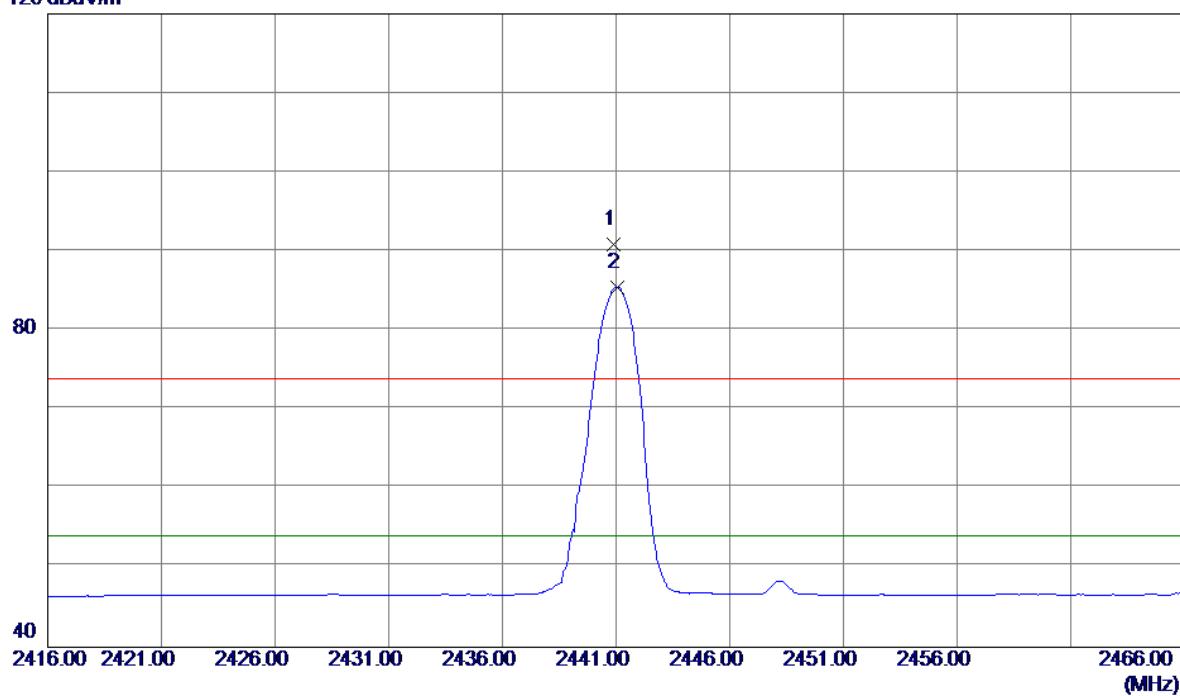


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dB	Detector	Comment
1	2440.9000	57.69	33.25	90.94	74.00	16.94	Peak No Limit
2 *	2441.0500	52.23	33.25	85.48	54.00	31.48	AVG No Limit

Test Mode : TX 2441MHz \_CH39\_3Mbps

## Vertical

80 dBuV/m

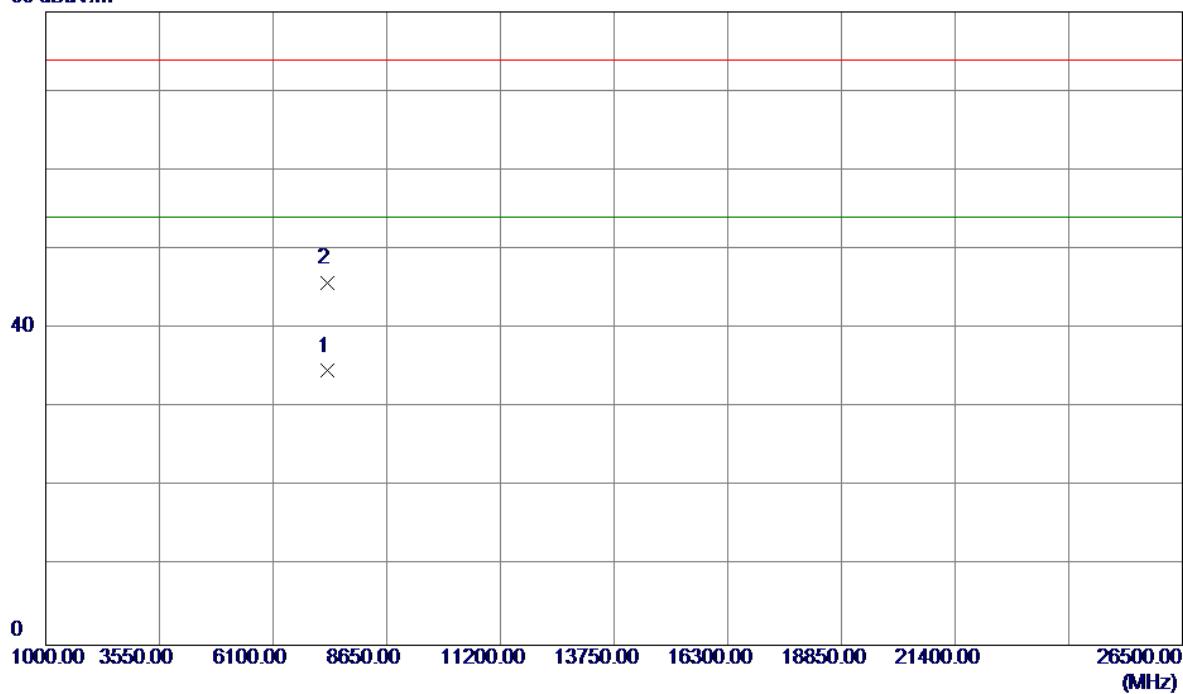


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1 *	7322.9200	21.42	13.22	34.64	54.00	-19.36	AVG	
2	7323.6740	32.51	13.22	45.73	74.00	-28.27	Peak	

Test Mode : TX 2441MHz \_CH39\_3Mbps

## Horizontal

120 dBuV/m

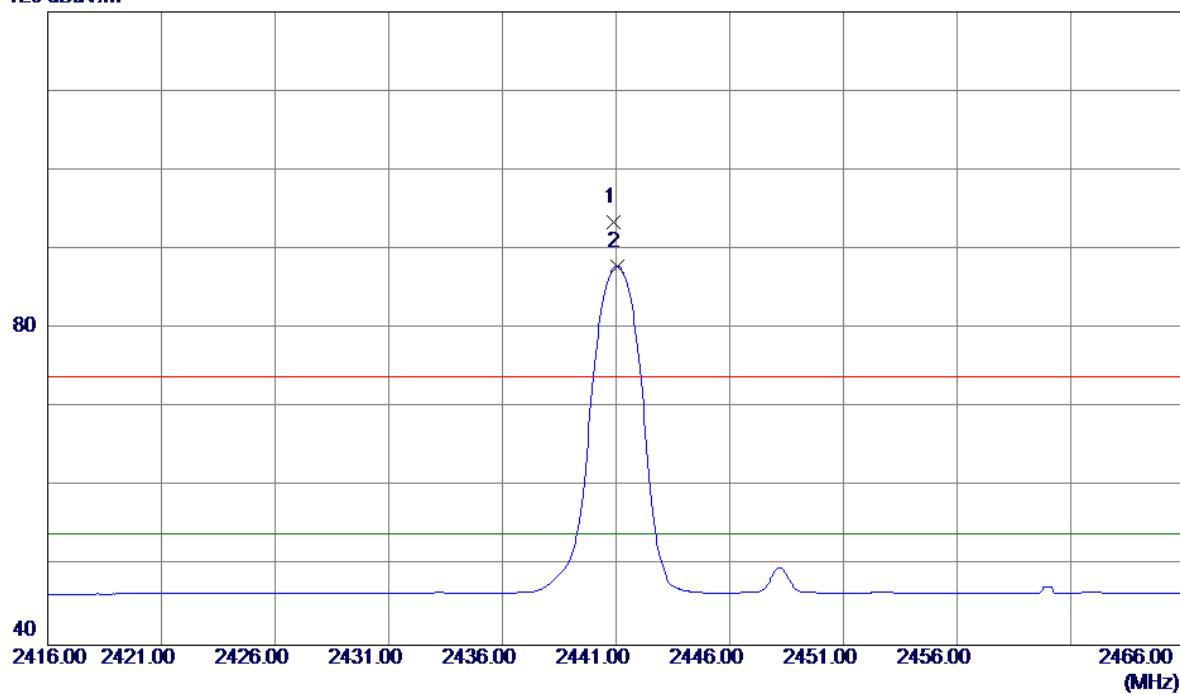


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	2440.9000	60.16	33.25	93.41	74.00	19.41	Peak	No Limit
2 *	2441.0500	54.65	33.25	87.90	54.00	33.90	AVG	No Limit

Test Mode : TX 2441MHz \_CH39\_3Mbps

## Horizontal

80 dBuV/m

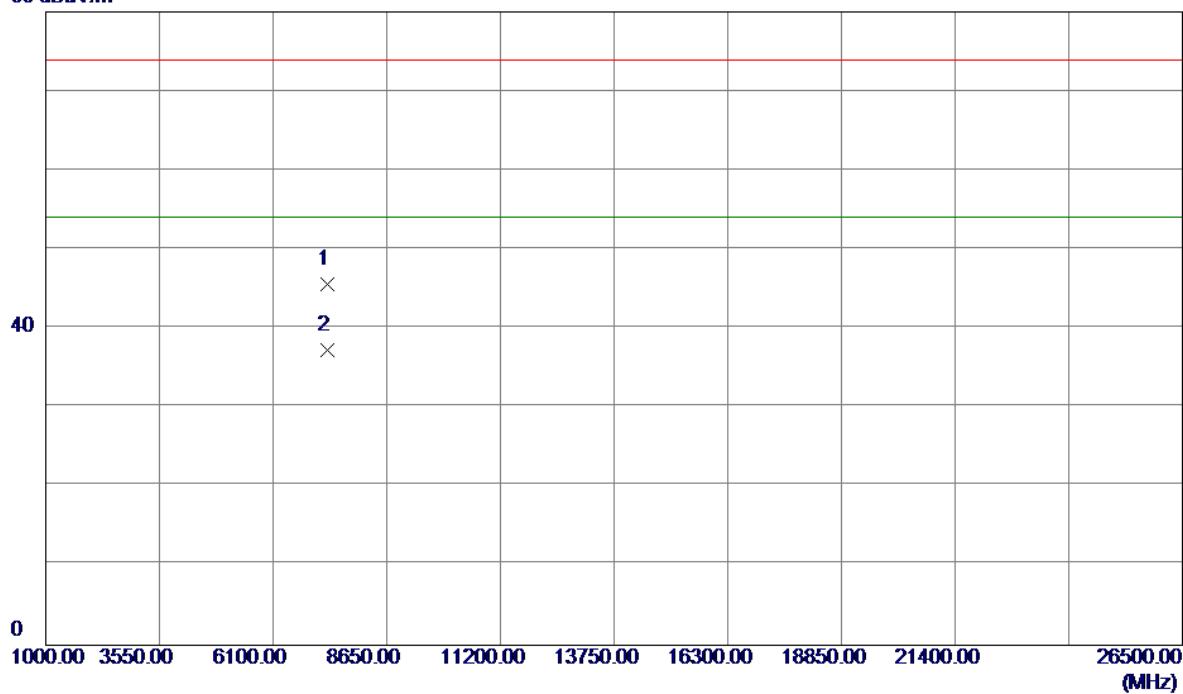


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	7322.5560	32.45	13.22	45.67	74.00	-28.33	Peak	
2 *	7322.5800	24.08	13.22	37.30	54.00	-16.70	AVG	

Test Mode : TX 2480MHz \_CH78\_3Mbps

## Vertical

120 dBuV/m

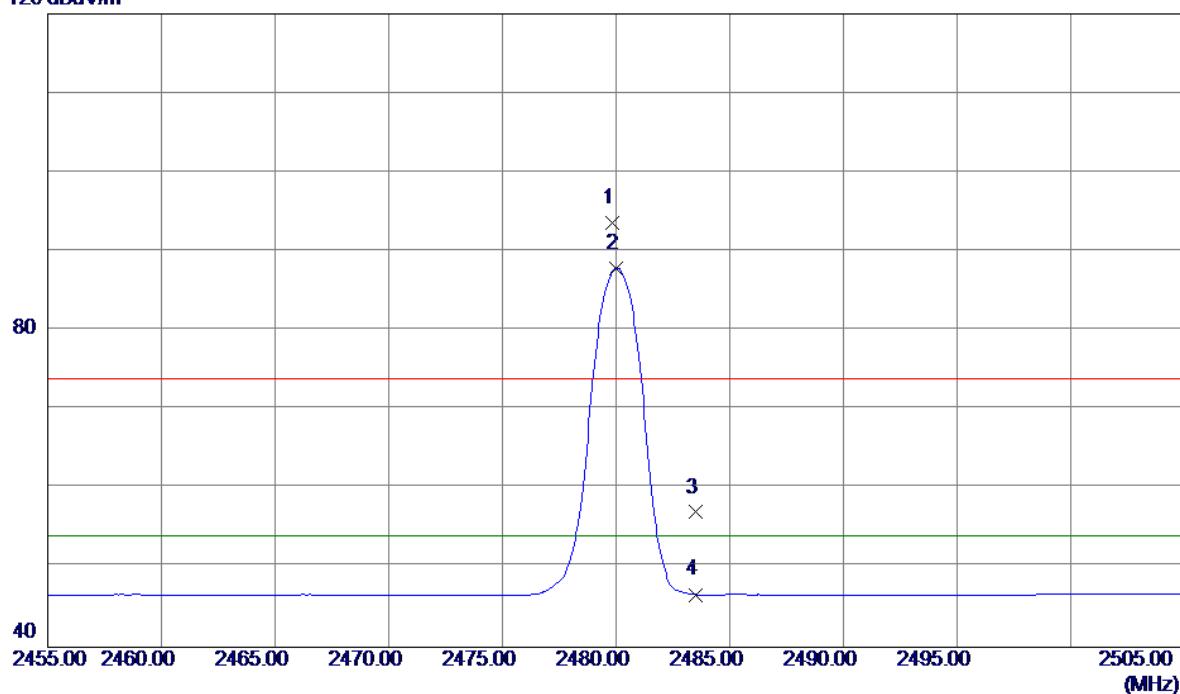


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	2479.8500	60.25	33.39	93.64	74.00	19.64	Peak	No Limit
2 *	2480.0000	54.47	33.39	87.86	54.00	33.86	AVG	No Limit
3	2483.5000	23.63	33.41	57.04	74.00	-16.96	Peak	
4	2483.5000	13.23	33.41	46.64	54.00	-7.36	AVG	

Test Mode : TX 2480MHz \_CH78\_3Mbps

## Vertical

80 dBuV/m

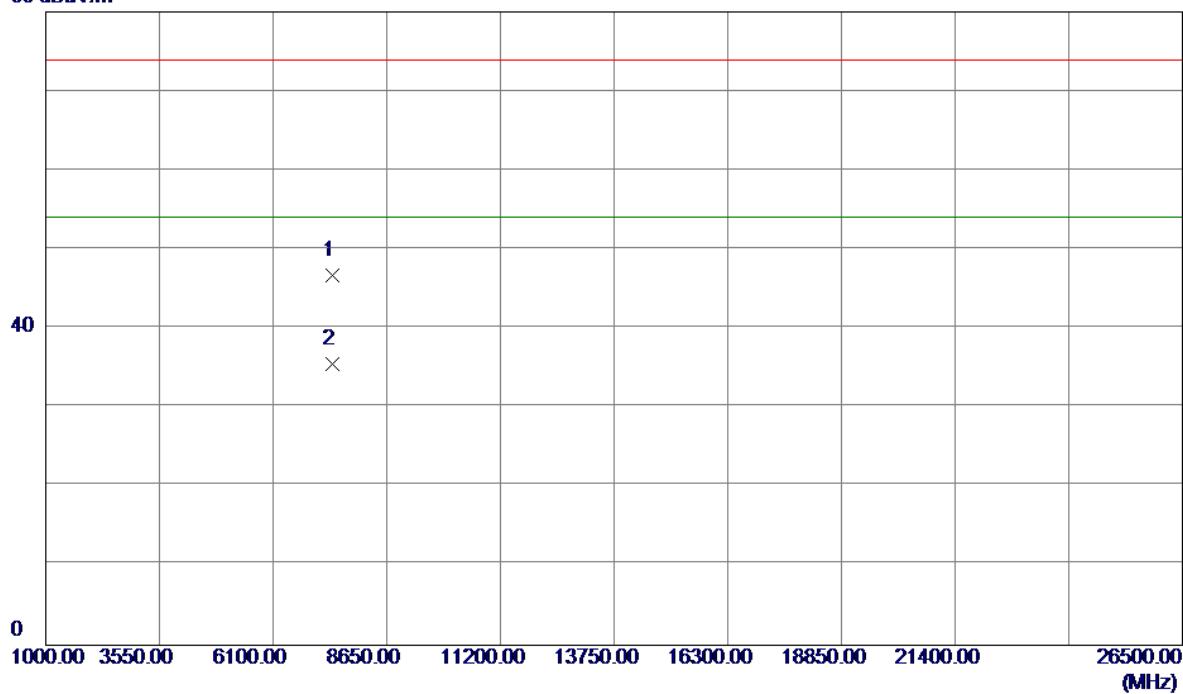


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	7439.7780	33.41	13.31	46.72	74.00	-27.28	Peak	
2 *	7440.2800	22.19	13.31	35.50	54.00	-18.50	AVG	

Test Mode : TX 2480MHz \_CH78\_3Mbps

## Horizontal

120 dBuV/m

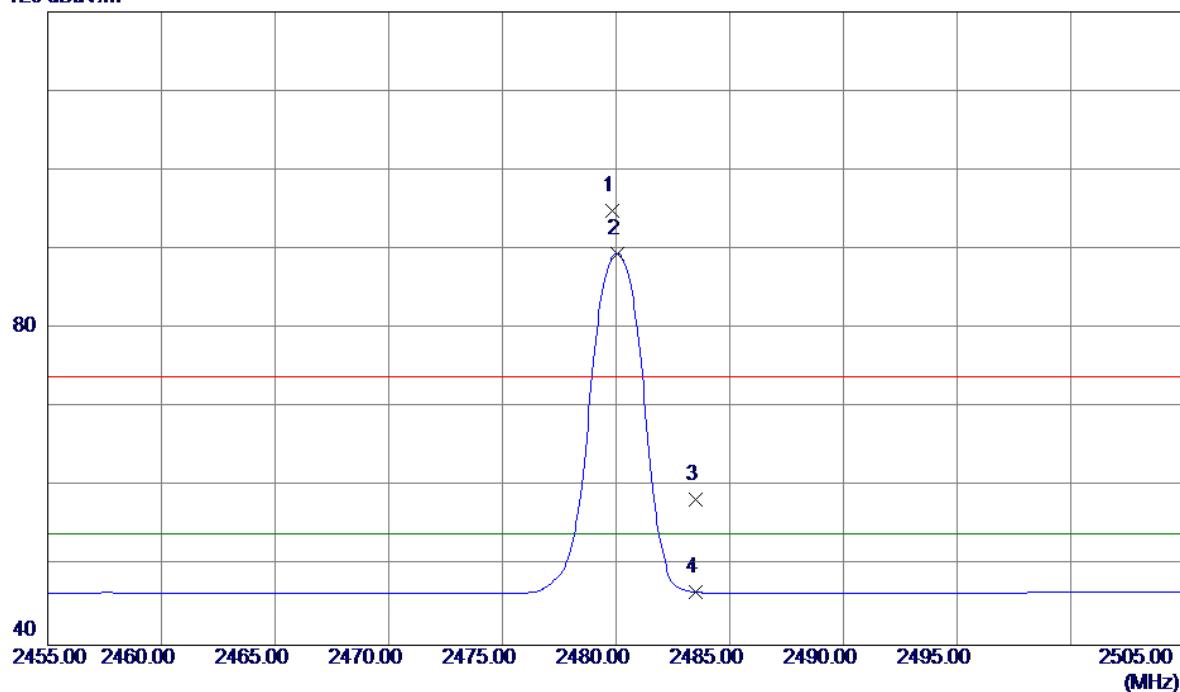


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	2479.8500	61.54	33.39	94.93	74.00	20.93	Peak	No Limit
2 *	2480.0500	56.08	33.39	89.47	54.00	35.47	AVG	No Limit
3	2483.5000	24.97	33.41	58.38	74.00	-15.62	Peak	
4	2483.5000	13.31	33.41	46.72	54.00	-7.28	AVG	

Test Mode : TX 2480MHz \_CH78\_3Mbps

## Horizontal

80 dBuV/m

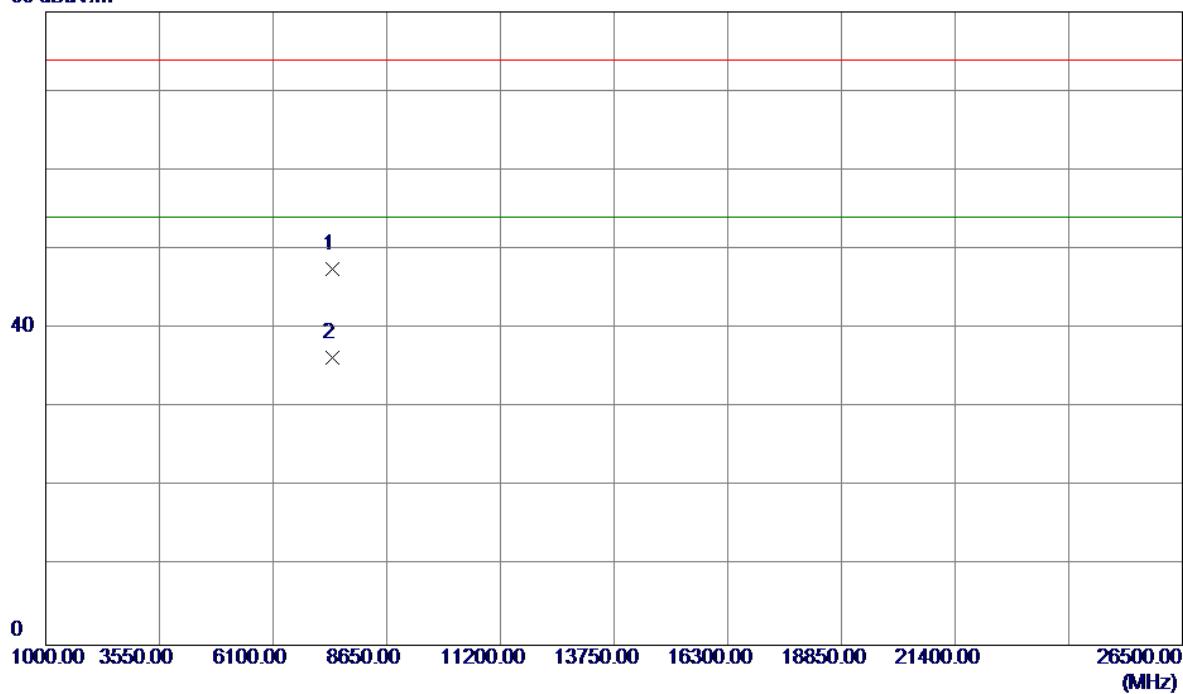


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	7439.8720	34.27	13.31	47.58	74.00	-26.42	Peak	
2 *	7440.0440	22.98	13.31	36.29	54.00	-17.71	AVG	

## APPENDIX E - NUMBER OF HOPPING CHANNEL

**Test Mode      Hopping Mode\_1Mbps**

Number of Hopping Channel

79

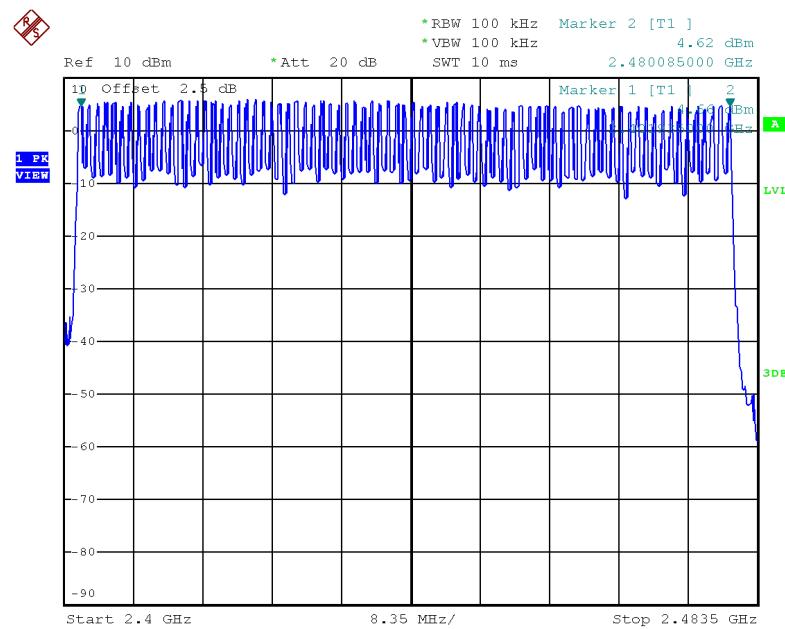


Date: 23.OCT.2017 09:46:32

**Test Mode****Hopping Mode\_3Mbps**

Number of Hopping Channel

79

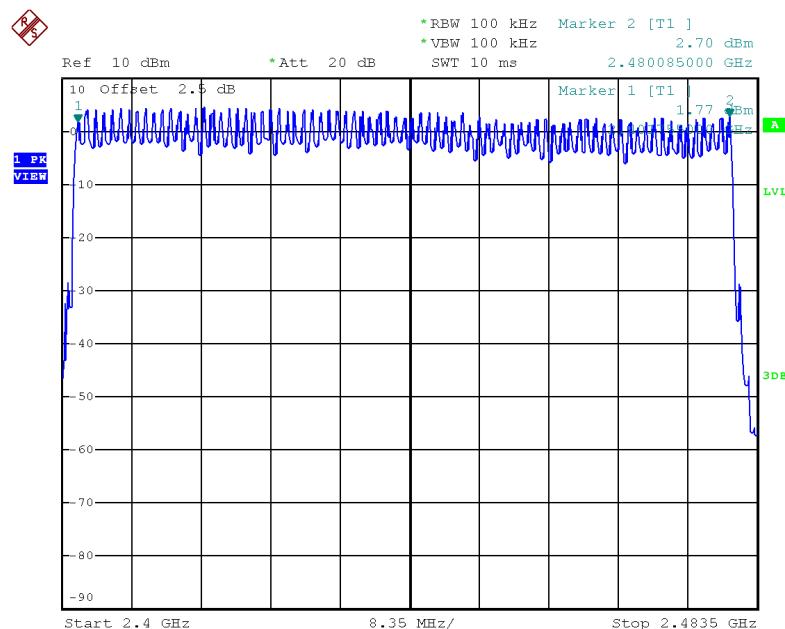


Date: 23.OCT.2017 10:01:27

## APPENDIX F - AVERAGE TIME OF OCCUPANCY

Test Mode : TX Mode\_1Mbps


Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
DH5	2402	2.9200	0.3115	0.4000	Pass
DH3	2402	1.6600	0.2656	0.4000	Pass
DH1	2402	0.4000	0.1280	0.4000	Pass
DH5	2441	2.8800	0.3072	0.4000	Pass
DH3	2441	1.6800	0.2688	0.4000	Pass
DH1	2441	0.4000	0.1280	0.4000	Pass
DH5	2480	2.9200	0.3115	0.4000	Pass
DH3	2480	1.6600	0.2656	0.4000	Pass
DH1	2480	0.4000	0.1280	0.4000	Pass

## CH00-DH1

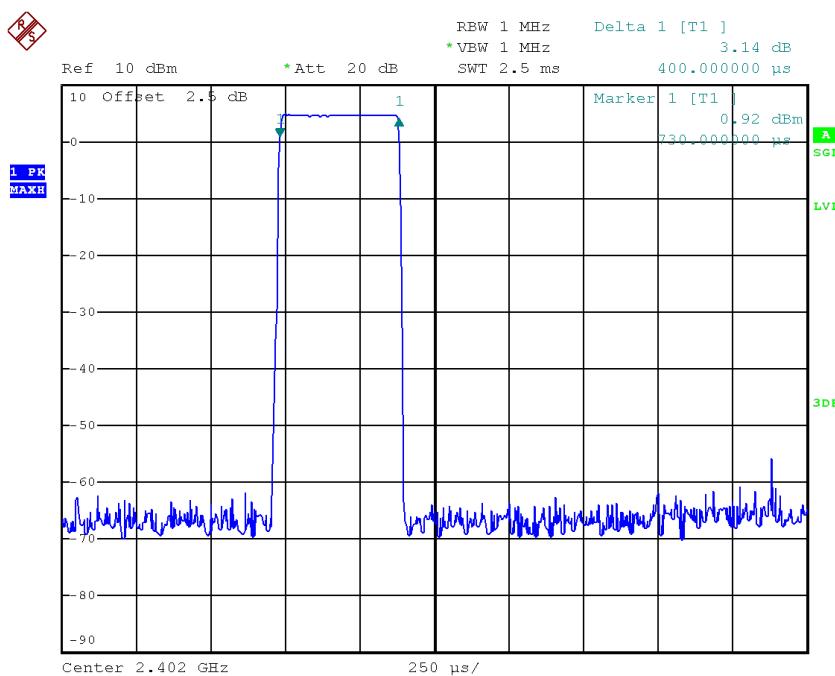


Date: 23.OCT.2017 09:39:49

## CH00-DH3

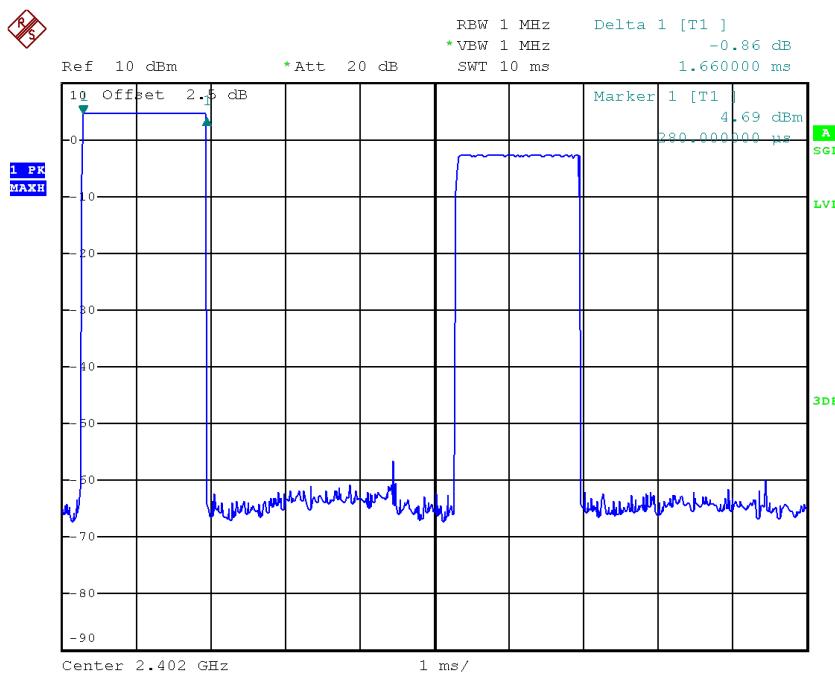


Date: 23.OCT.2017 09:48:21

## CH00-DH5

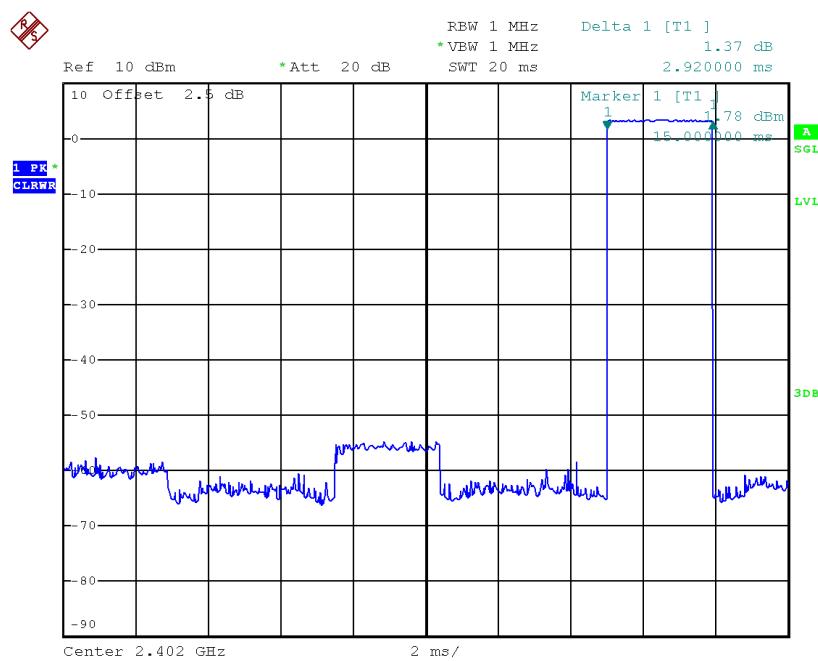


Date: 23.OCT.2017 09:49:20

## CH39-DH1

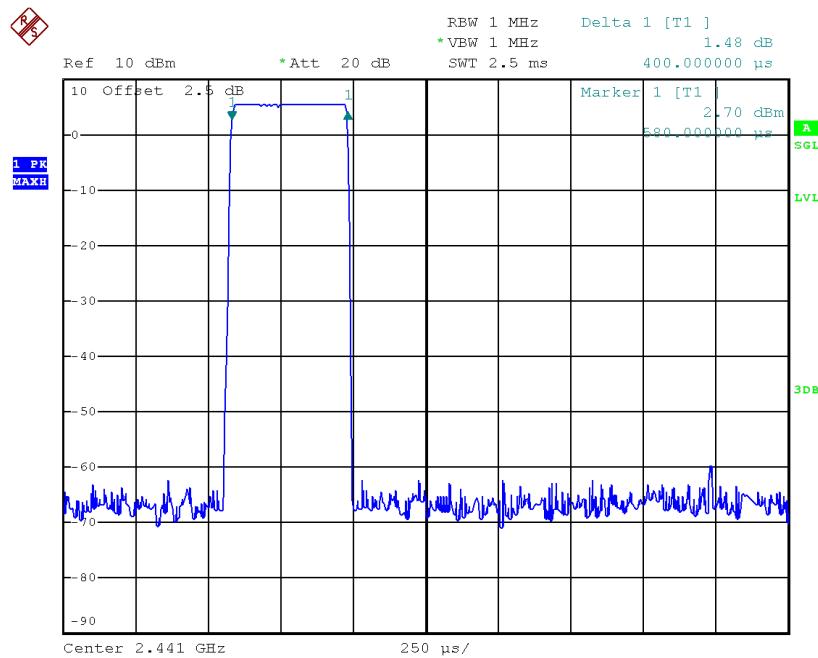


Date: 23.OCT.2017 09:40:13

## CH39-DH3

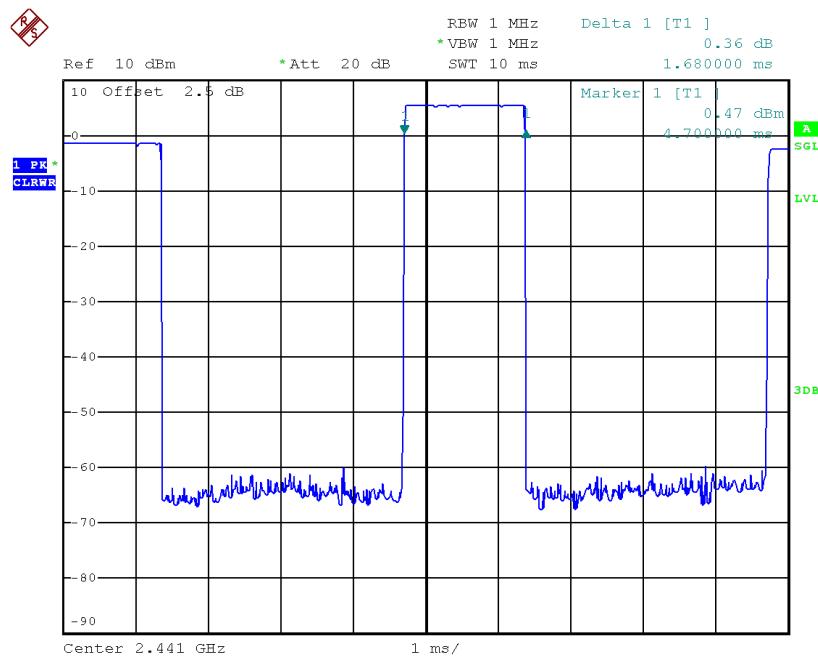


Date: 23.OCT.2017 09:48:46

## CH39-DH5

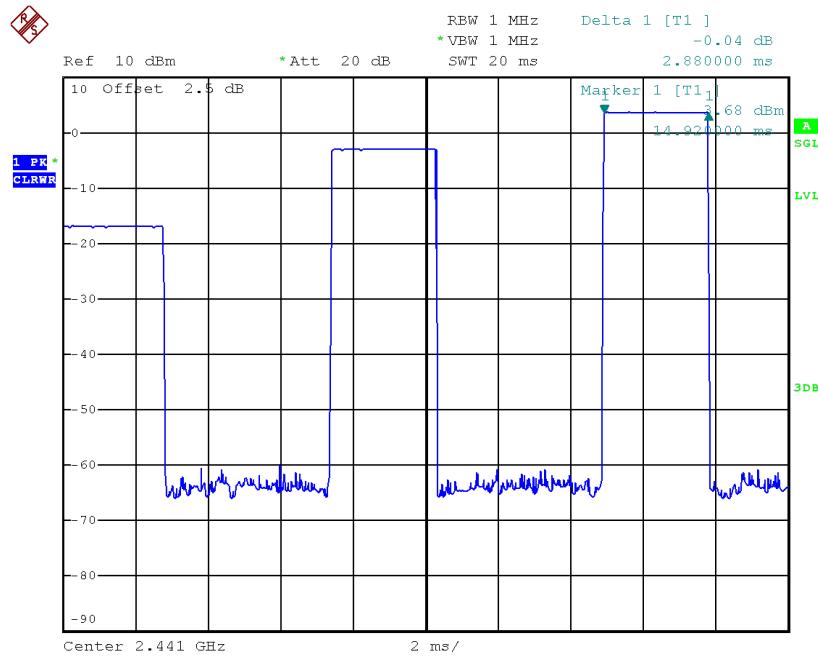


Date: 23.OCT.2017 09:49:41

## CH78-DH1

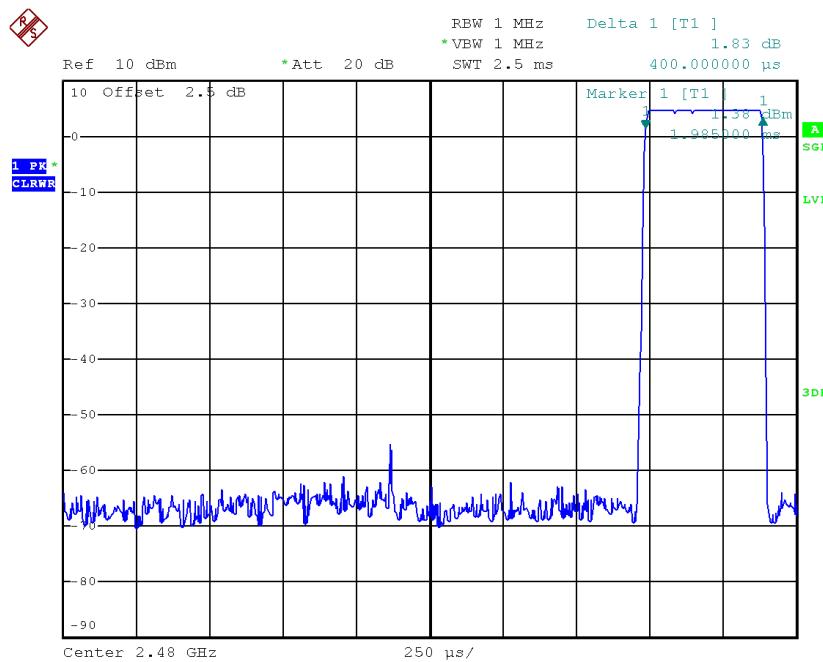


Date: 23.OCT.2017 09:40:19

## CH78-DH3

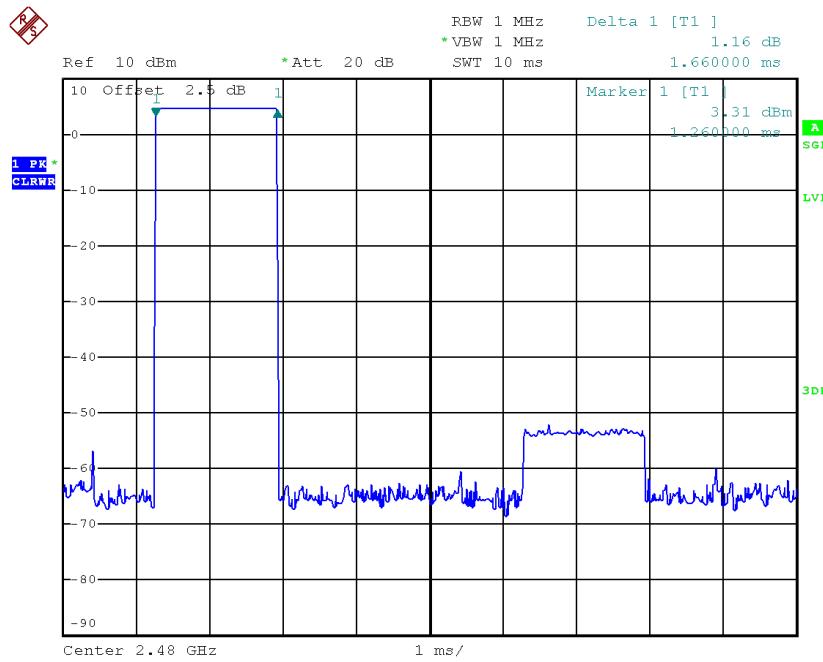

Date: 23.OCT.2017 09:48:29

## CH78-DH5

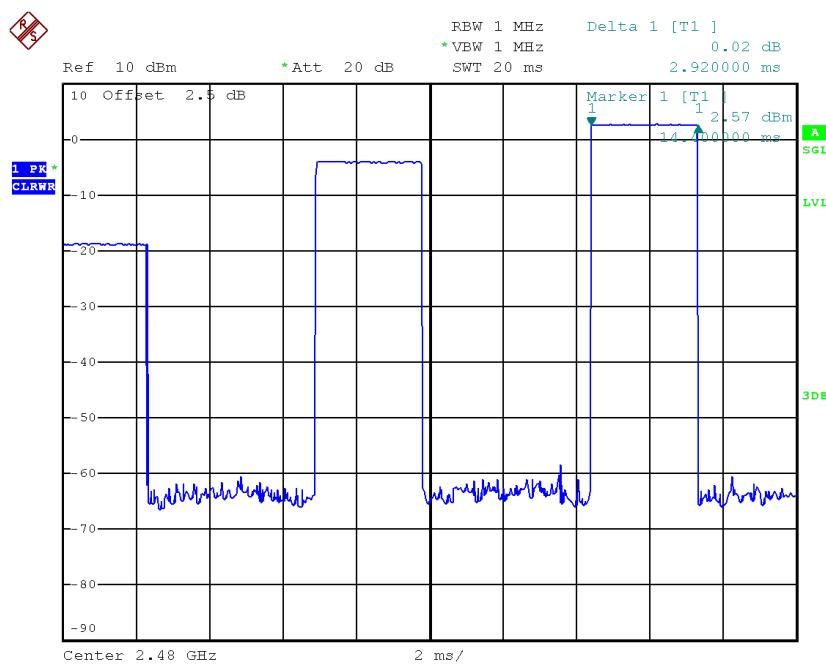


Date: 23.OCT.2017 09:49:47

Test Mode : TX Mode\_3Mbps


Data Packet	Frequency	Pulse Duration(ms)	Dwell Time(s)	Limits(s)	Test Result
DH5	2402	2.9200	0.3115	0.4000	Pass
DH3	2402	1.6600	0.2656	0.4000	Pass
DH1	2402	0.4150	0.1328	0.4000	Pass
DH5	2441	2.9200	0.3115	0.4000	Pass
DH3	2441	1.6600	0.2656	0.4000	Pass
DH1	2441	0.4150	0.1328	0.4000	Pass
DH5	2480	2.9200	0.3115	0.4000	Pass
DH3	2480	1.6600	0.2656	0.4000	Pass
DH1	2480	0.4150	0.1328	0.4000	Pass

## CH00-DH1

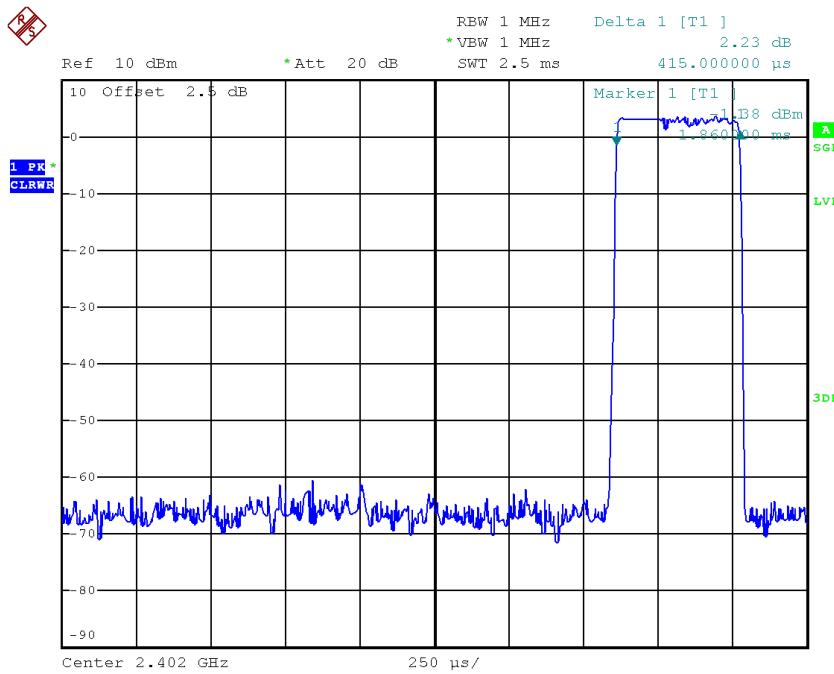


Date: 23.OCT.2017 09:55:40

## CH00-DH3

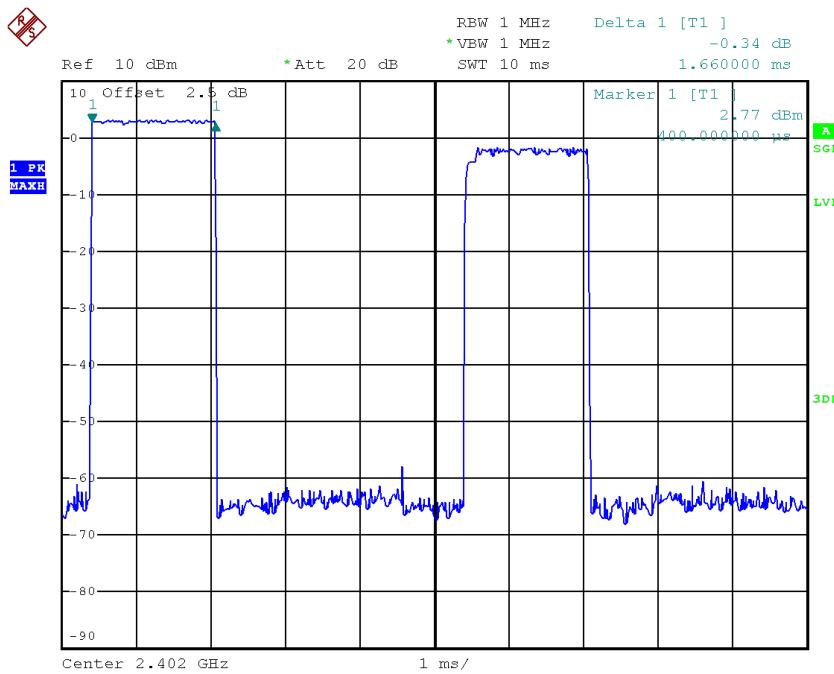


Date: 23.OCT.2017 10:03:16

## CH00-DH5

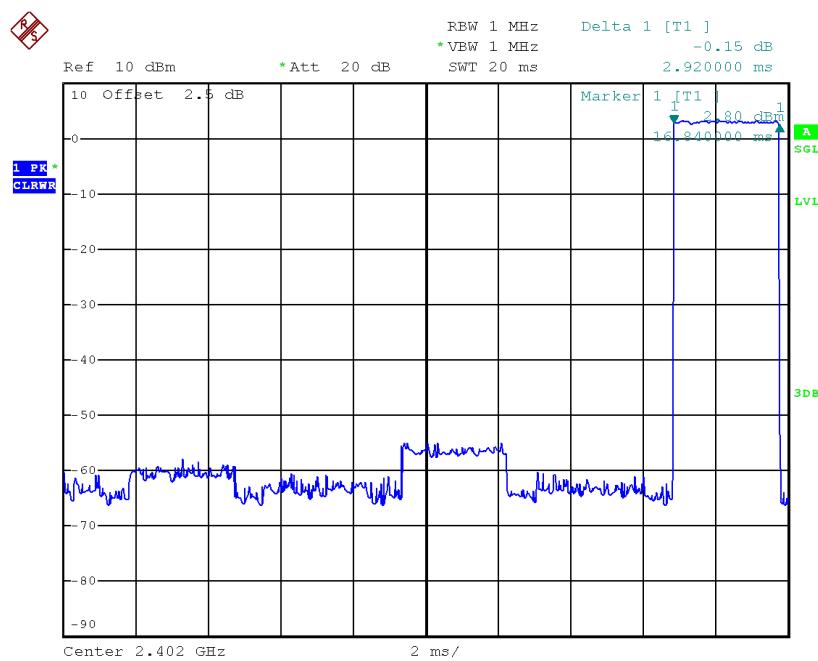


Date: 23.OCT.2017 10:04:17


## CH39-DH1

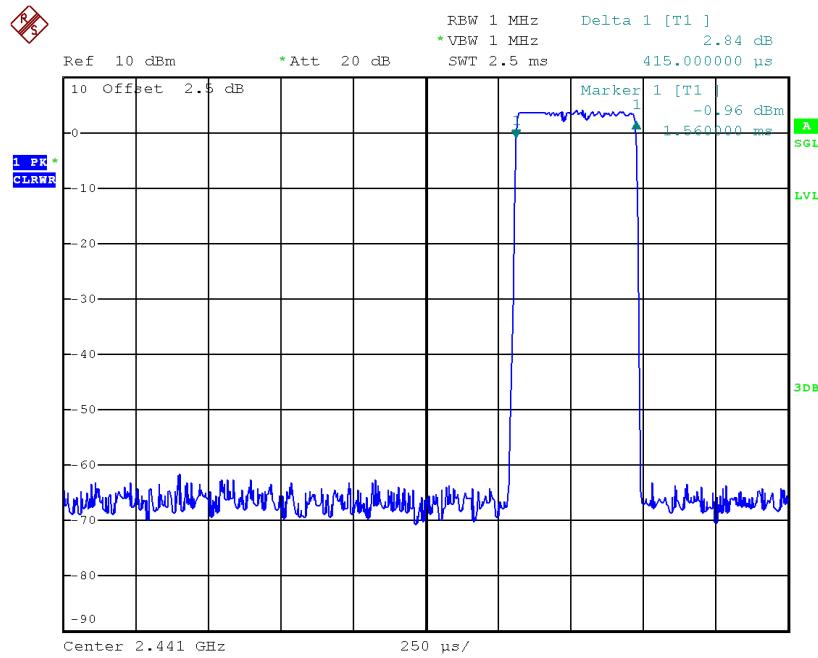

Date: 23.OCT.2017 09:56:23

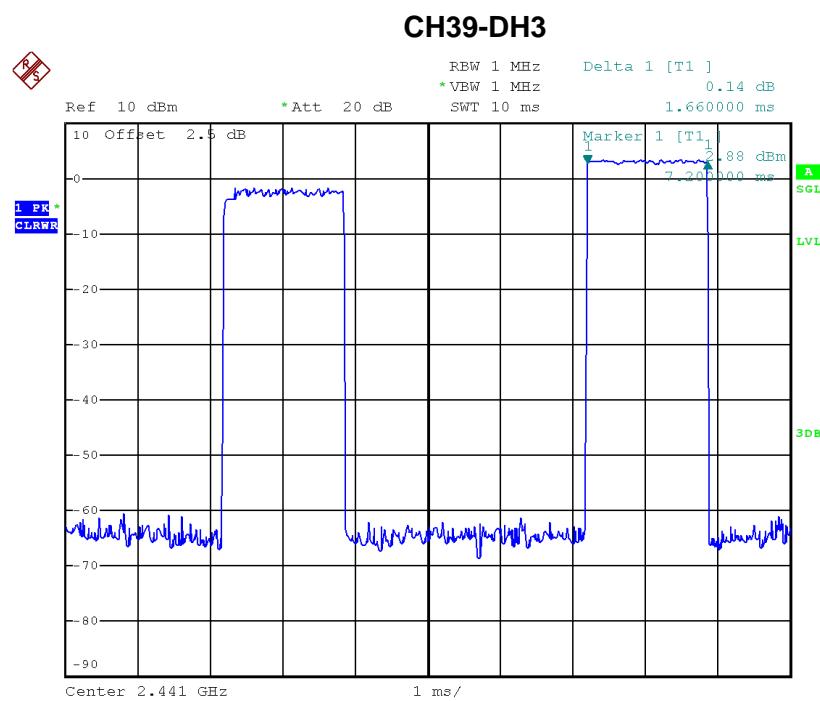


Date: 23.OCT.2017 10:03:47

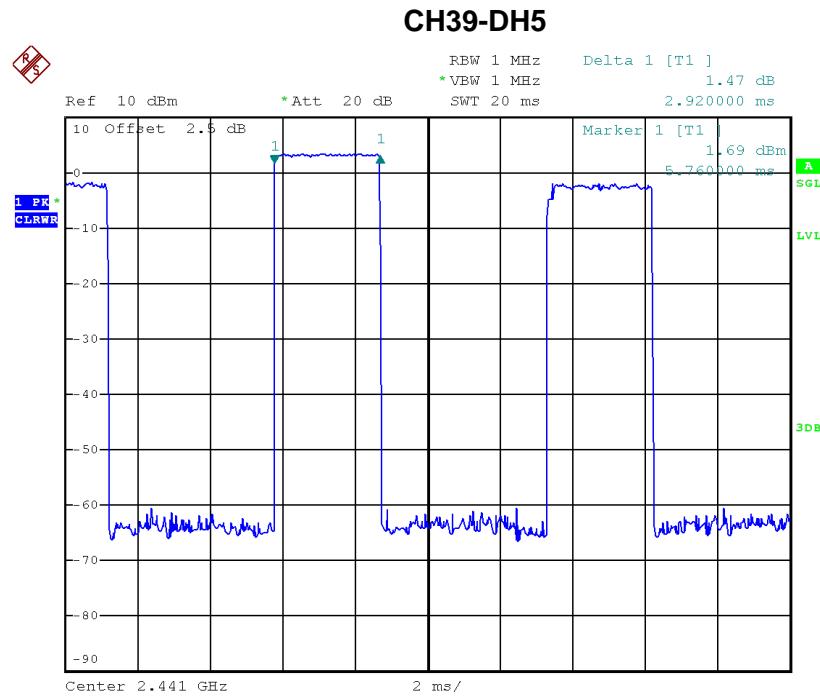


Date: 23.OCT.2017 10:04:46

## CH78-DH1

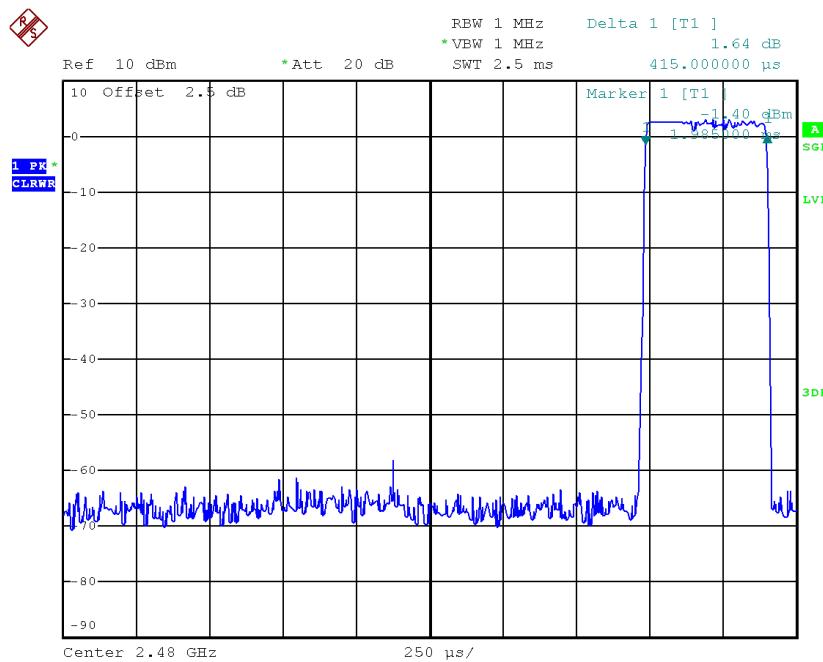


Date: 23.OCT.2017 09:56:27

## CH78-DH3

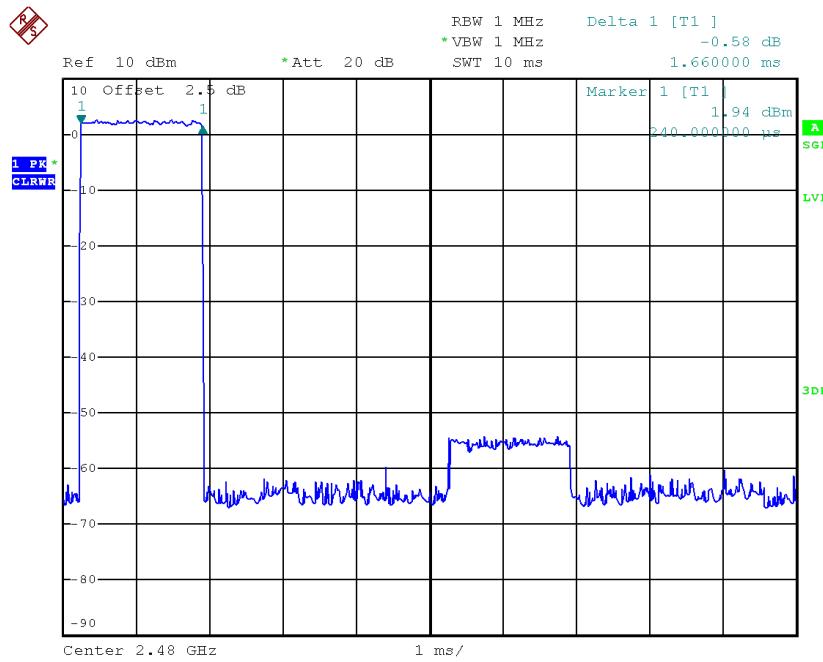

Date: 23.OCT.2017 10:03:51

## CH78-DH5

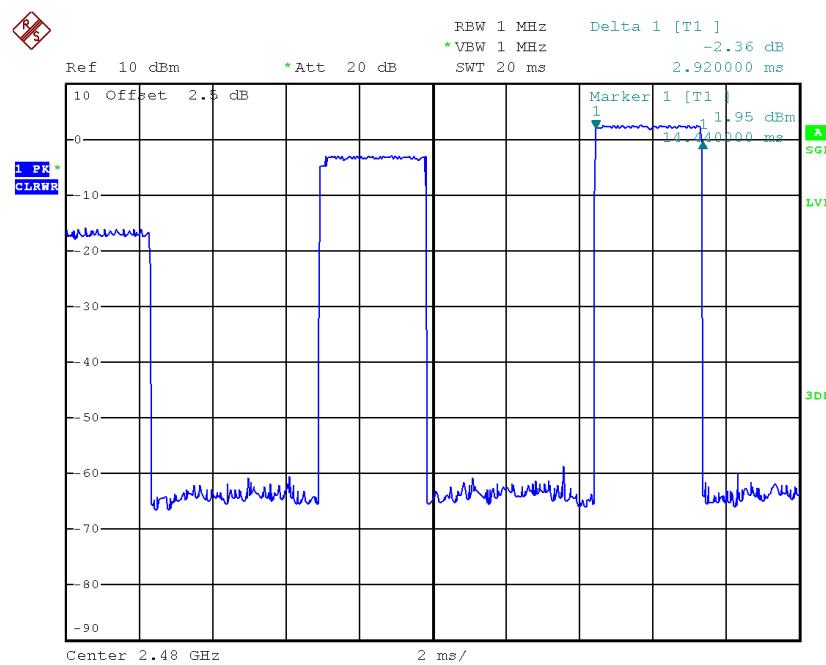


Date: 23.OCT.2017 10:05:14


## APPENDIX G - HOPPING CHANNEL SEPARATION MEASUREMENT

Test Mode : Hopping on \_1Mbps


Frequency (MHz)	Channel Separation (MHz)	2/3 of 20dB Bandwidth (MHz)	Test Result
2402	1.008	0.635	Pass
2441	0.995	0.615	Pass
2480	1.002	0.627	Pass

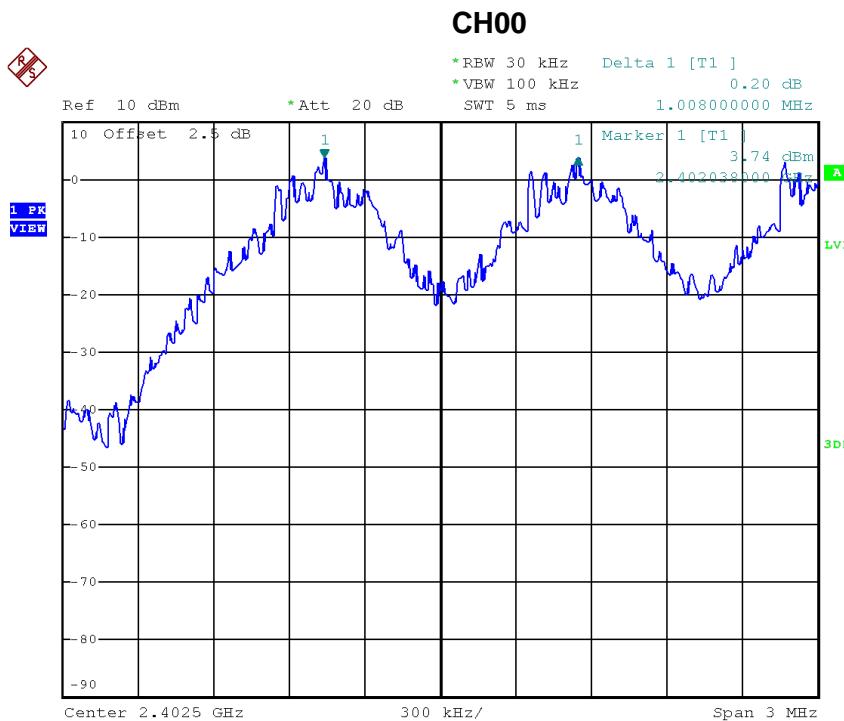

Date: 23.OCT.2017 09:42:36

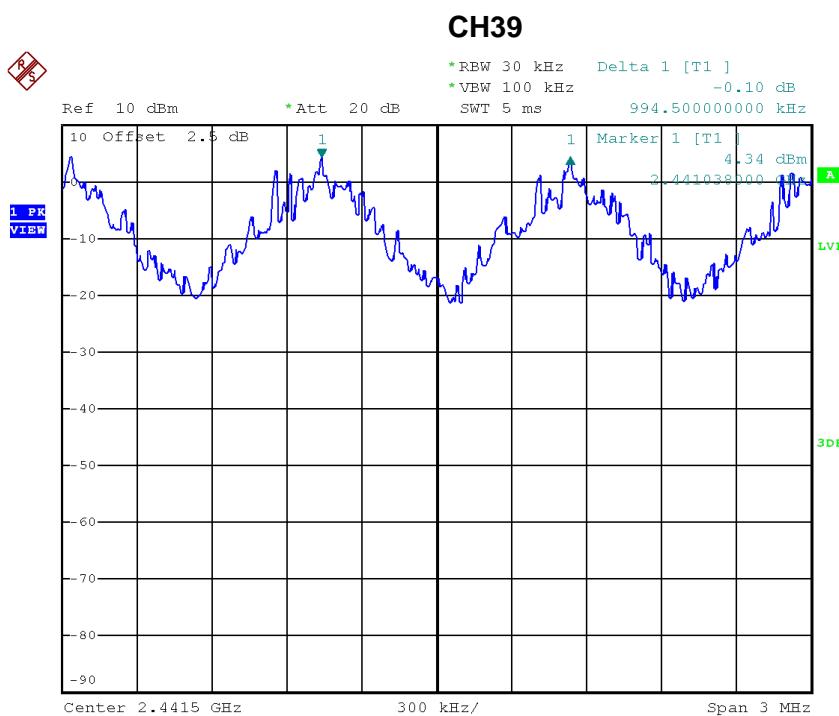


Date: 23.OCT.2017 09:43:43

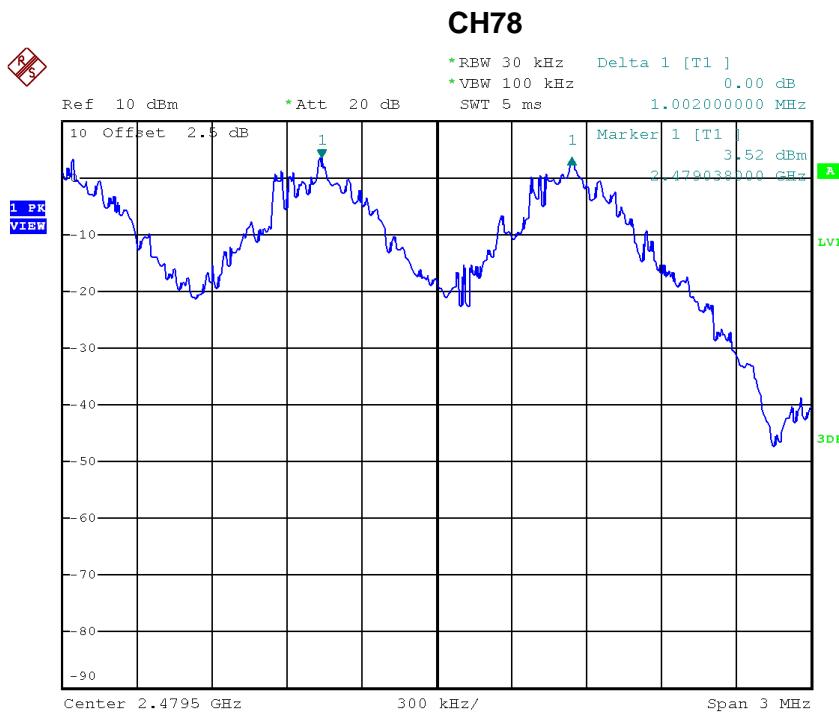

Date: 23.OCT.2017 09:44:46


Test Mode : Hopping on \_3Mbps

Frequency (MHz)	Channel Separation (MHz)	2/3 of 20dB Bandwidth (MHz)	Test Result
2402	1.026	0.639	Pass
2441	1.008	0.639	Pass
2480	1.012	0.677	Pass

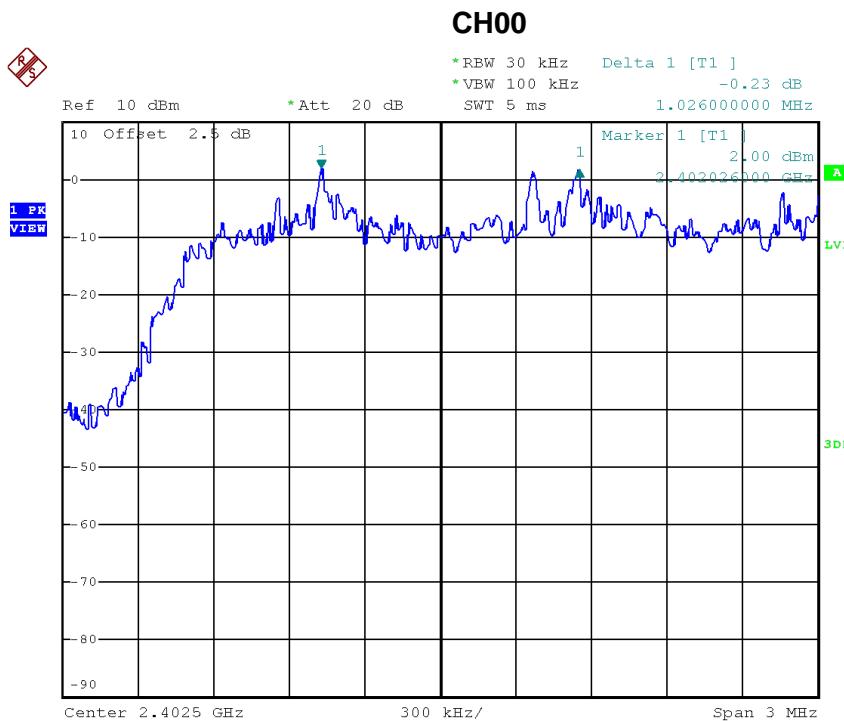


Date: 23.OCT.2017 10:27:25

## CH39

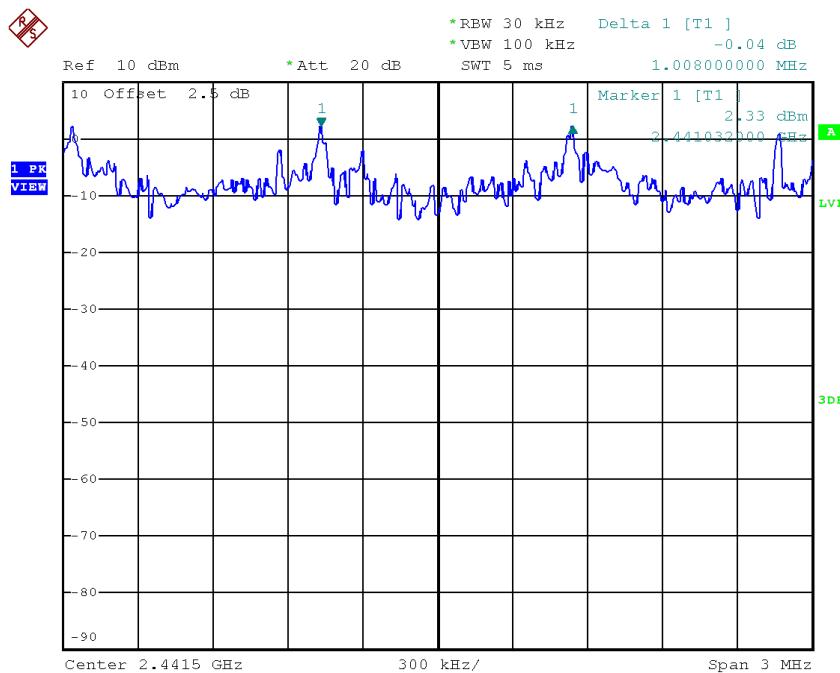

Date: 23.OCT.2017 10:34:50

## CH78

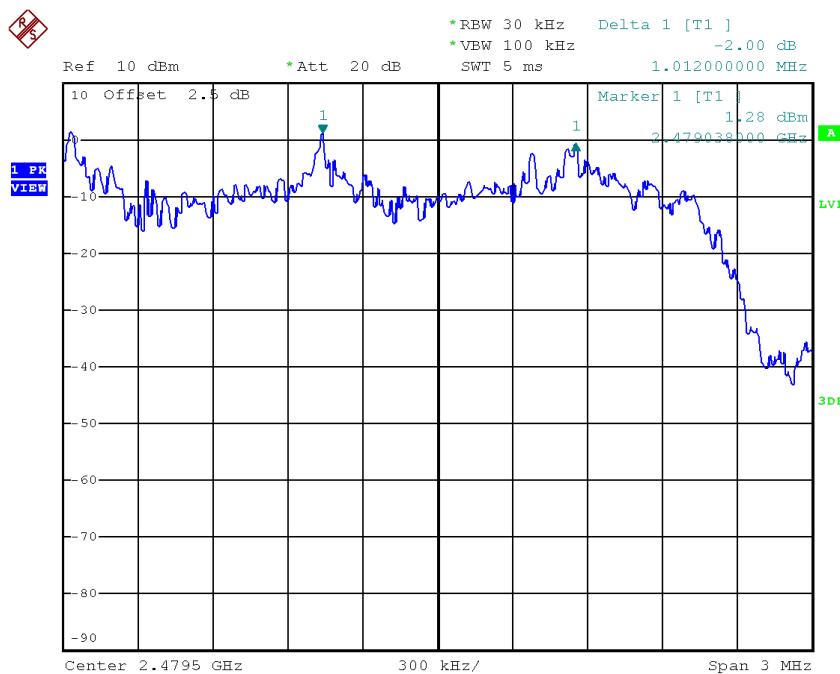


Date: 23.OCT.2017 10:29:36

## APPENDIX H - BANDWIDTH


Test Mode : TX Mode \_1Mbps

Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied BW (MHz)	Test Result
2402	0.952	0.872	Pass
2441	0.923	0.856	Pass
2480	0.940	0.876	Pass

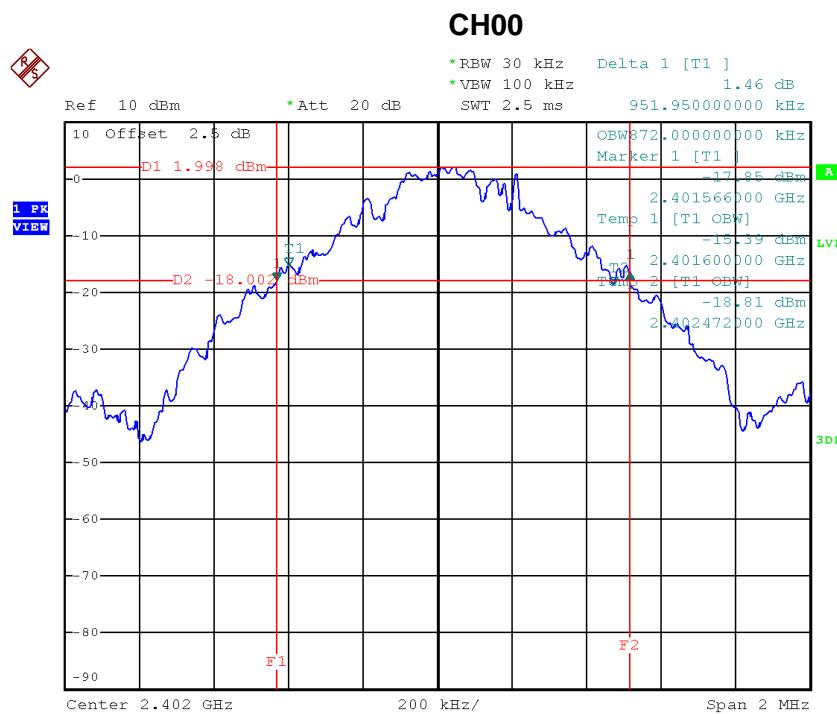


Date: 23.OCT.2017 09:35:46

## CH39

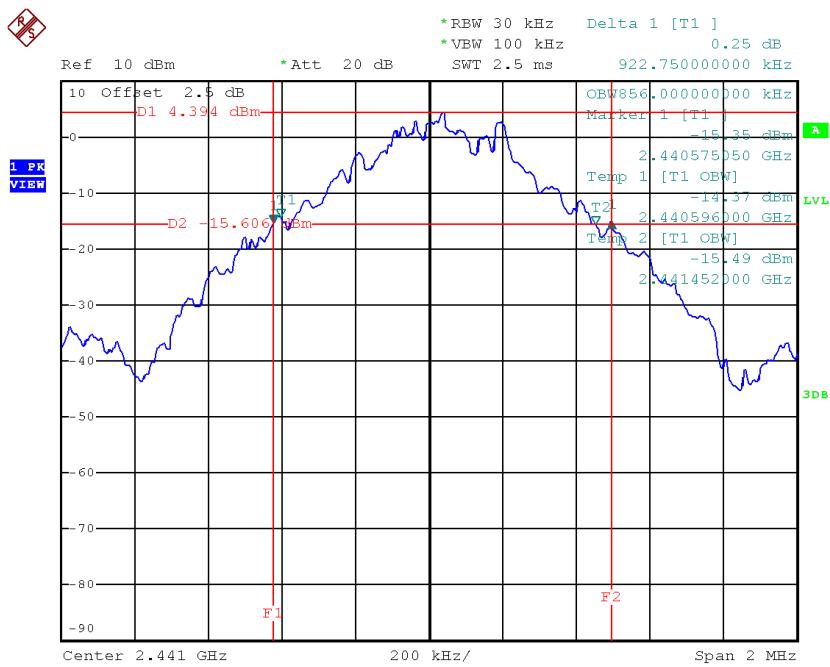

Date: 23.OCT.2017 09:37:30


## CH78

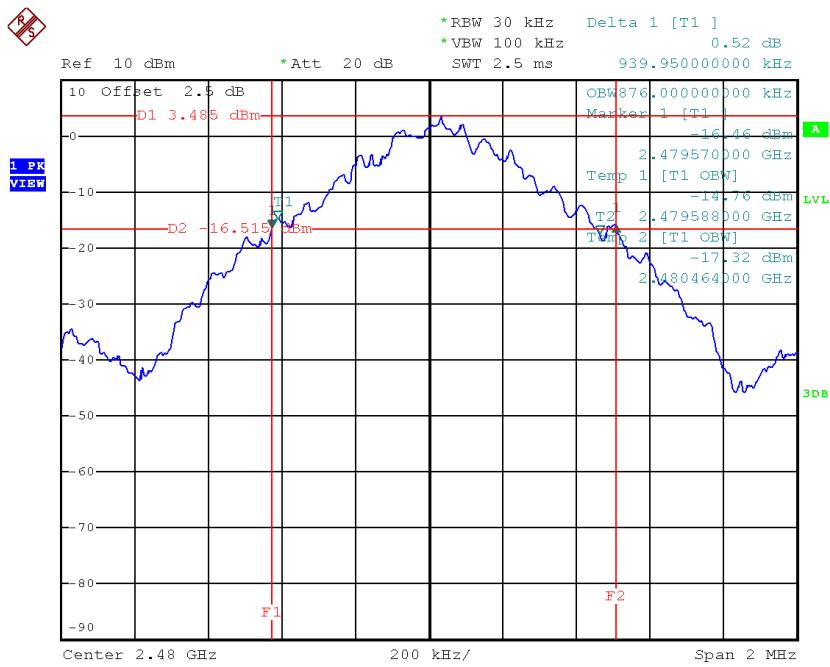

Date: 23.OCT.2017 09:38:19


Test Mode :	TX Mode _3Mbps
-------------	----------------

Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied BW (MHz)	Test Result
2402	1.266	1.184	Pass
2441	1.278	1.138	Pass
2480	1.266	1.192	Pass

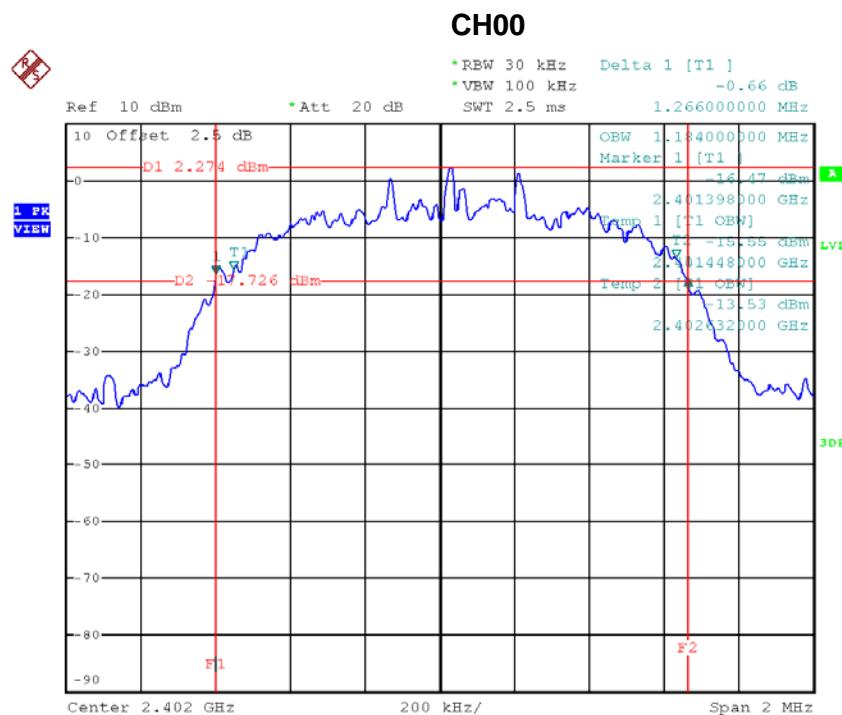


Date: 13.DEC.2017 15:40:45

## CH39

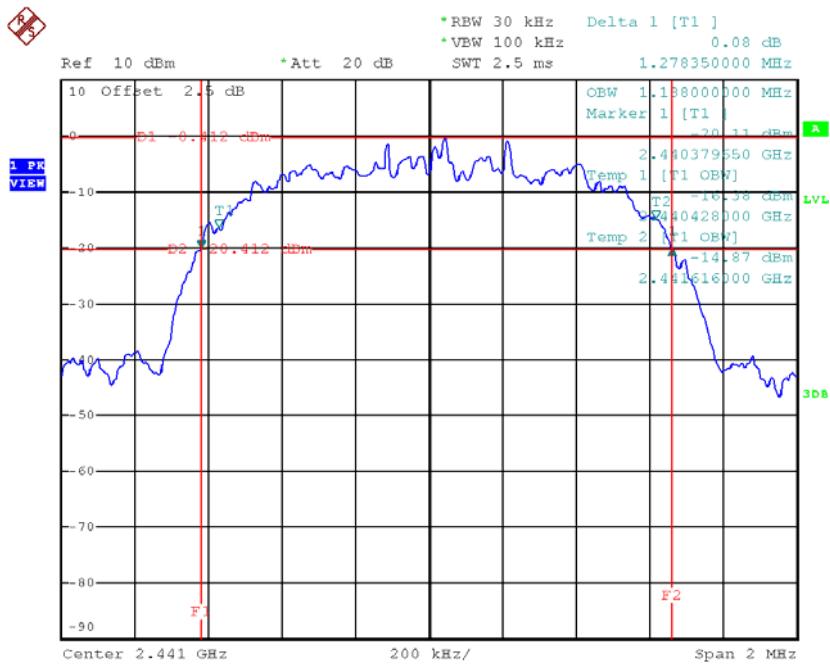

Date: 13.DEC.2017 15:41:57

## CH78

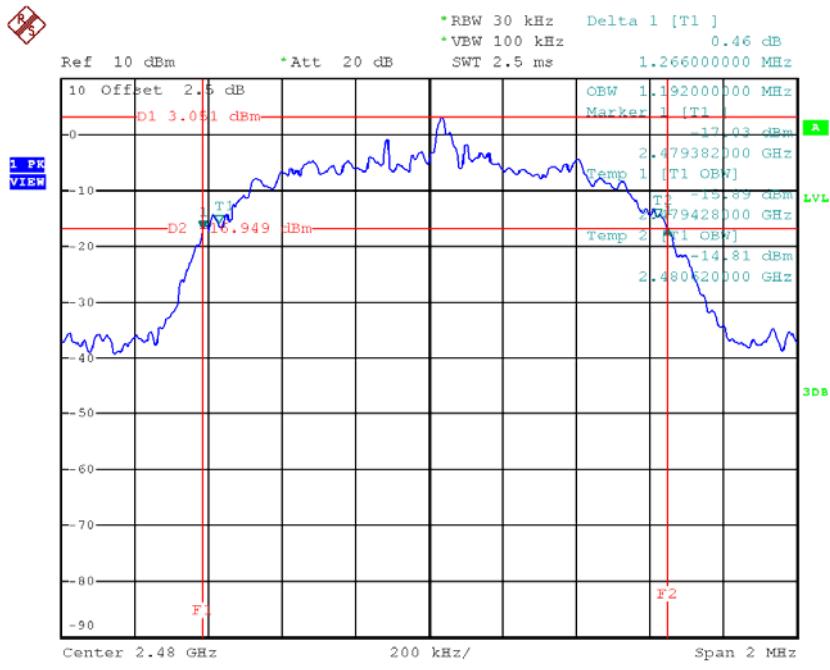


Date: 13.DEC.2017 15:42:30

## APPENDIX I - PEAK OUTPUT POWER

Test Mode : TX Mode \_1Mbps


Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	3.74	0.0024	30.00	1.00	Pass
2441	3.66	0.0023	30.00	1.00	Pass
2480	3.76	0.0024	30.00	1.00	Pass

## CH00

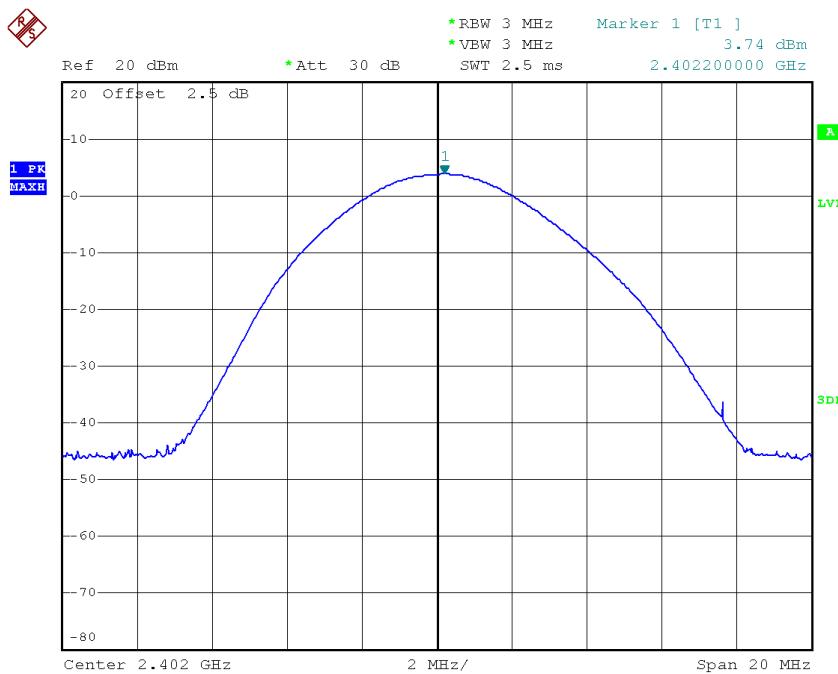


Date: 27.OCT.2017 19:37:20

## CH39

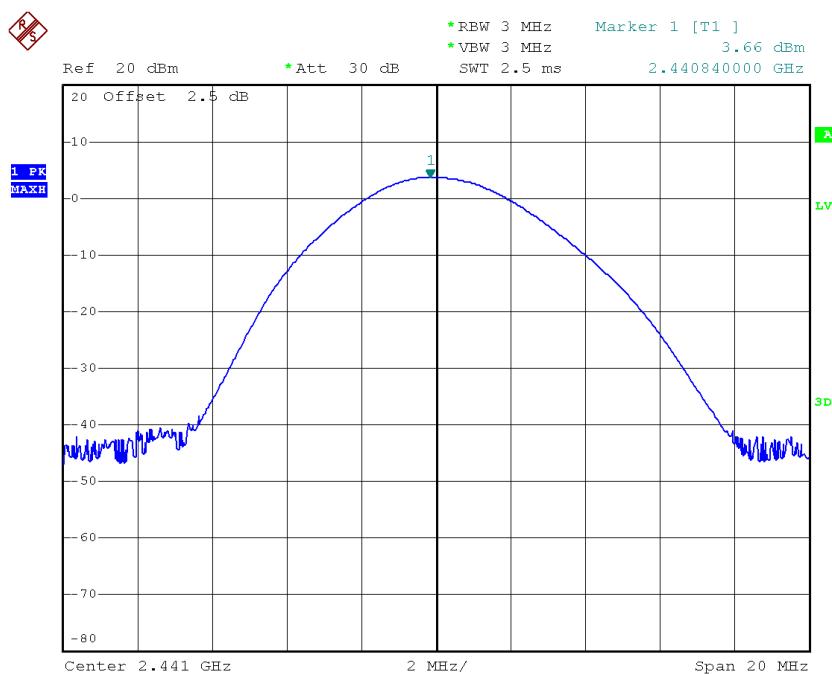

Date: 27.OCT.2017 19:34:53

## CH78

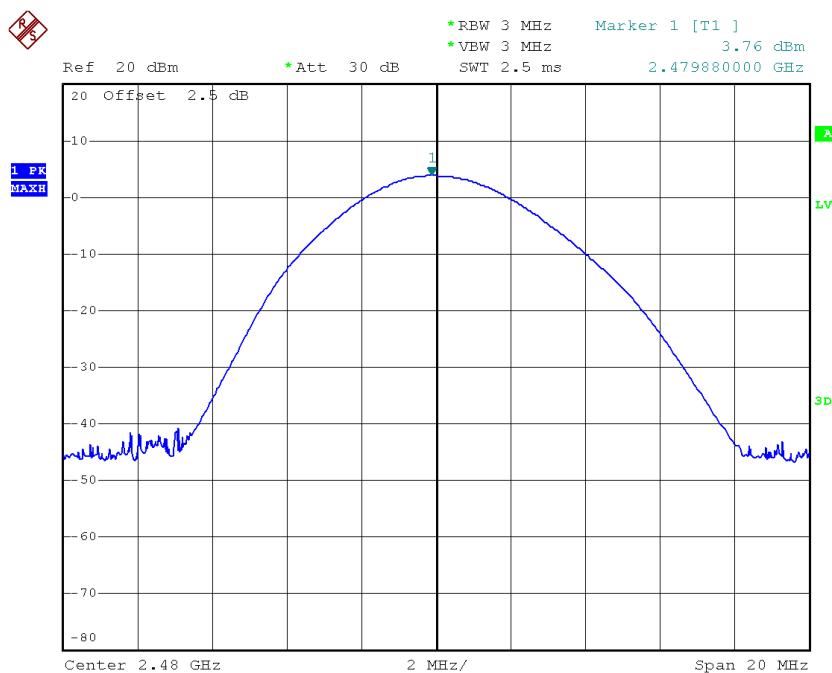


Date: 27.OCT.2017 19:35:49

Test Mode :	TX Mode _3Mbps
-------------	----------------


Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	3.82	0.0024	30.00	1.00	Pass
2441	3.89	0.0024	30.00	1.00	Pass
2480	3.81	0.0024	30.00	1.00	Pass

### CH00

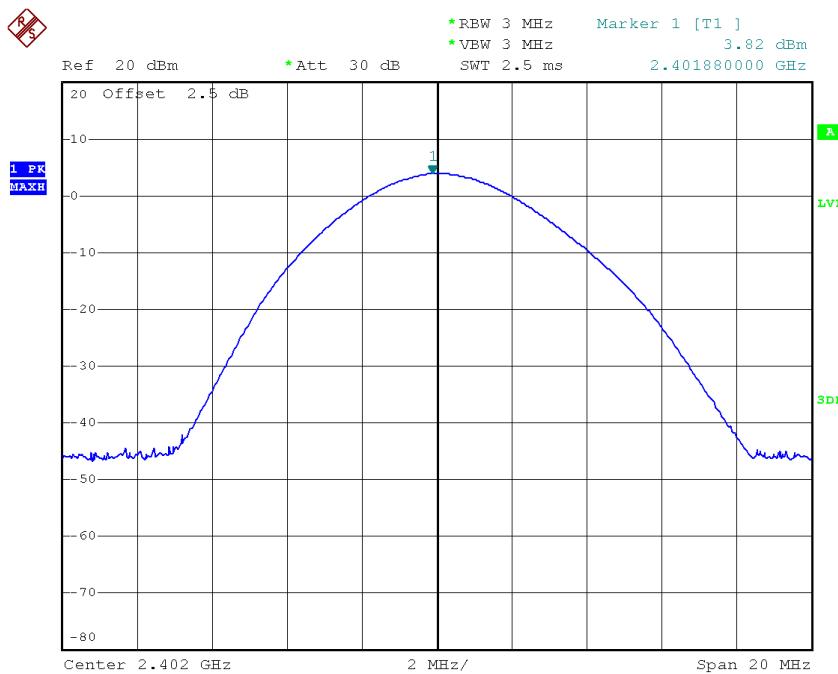


Date: 27.OCT.2017 19:38:35

## CH39

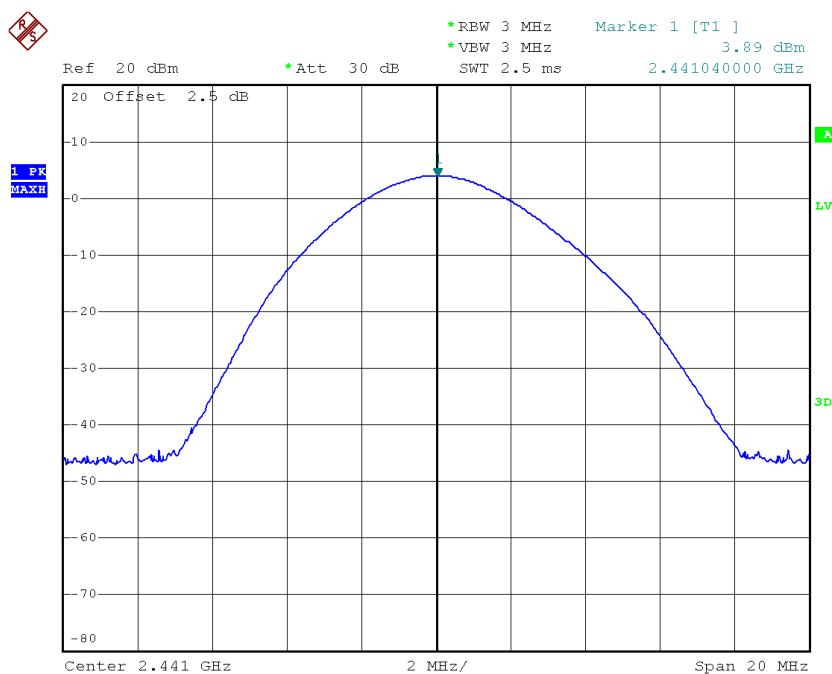


Date: 27.OCT.2017 19:39:20

## CH78

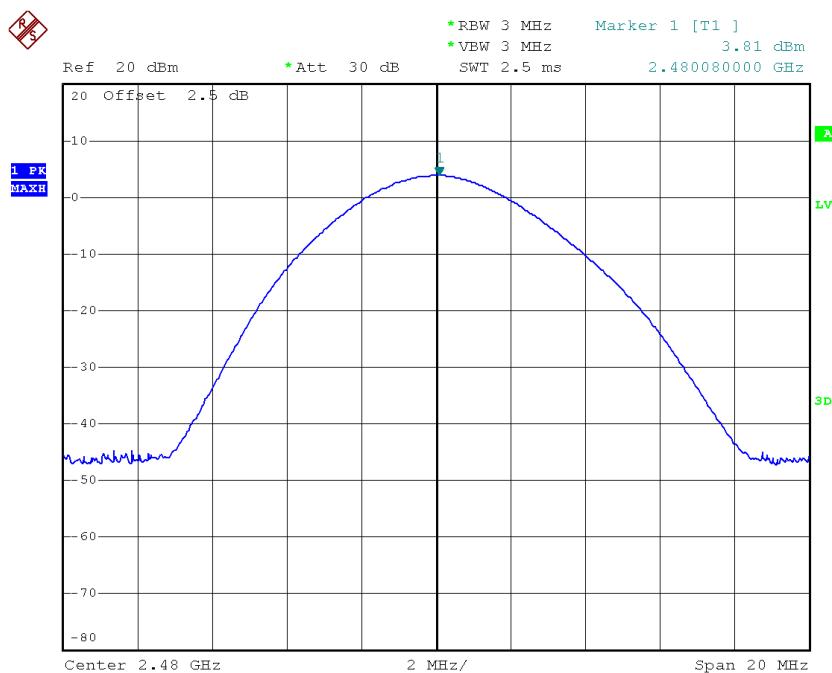


Date: 27.OCT.2017 19:40:09

## APPENDIX J - ANTENNA CONDUCTED SPURIOUS EMISSION

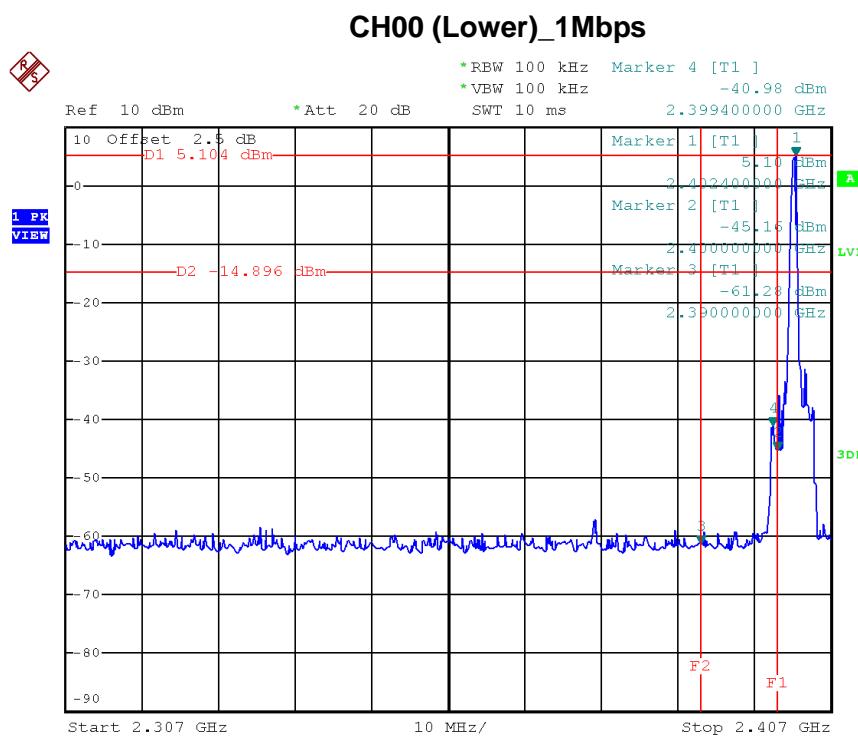


Date: 23.OCT.2017 09:35:24

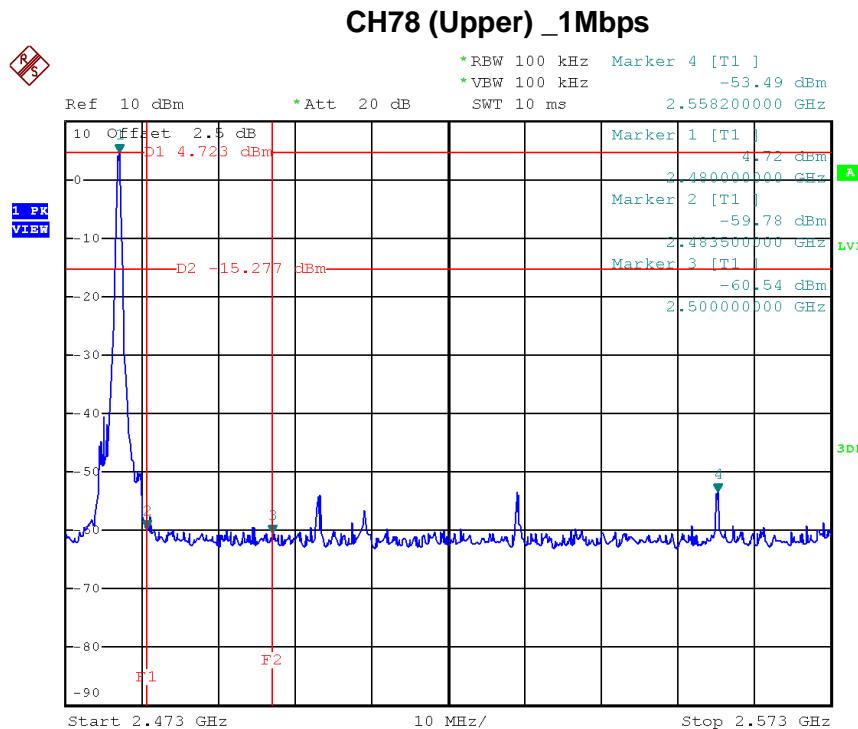


Date: 23.OCT.2017 09:37:57

### CH00 Hopping on mode (Lower) \_1Mbps

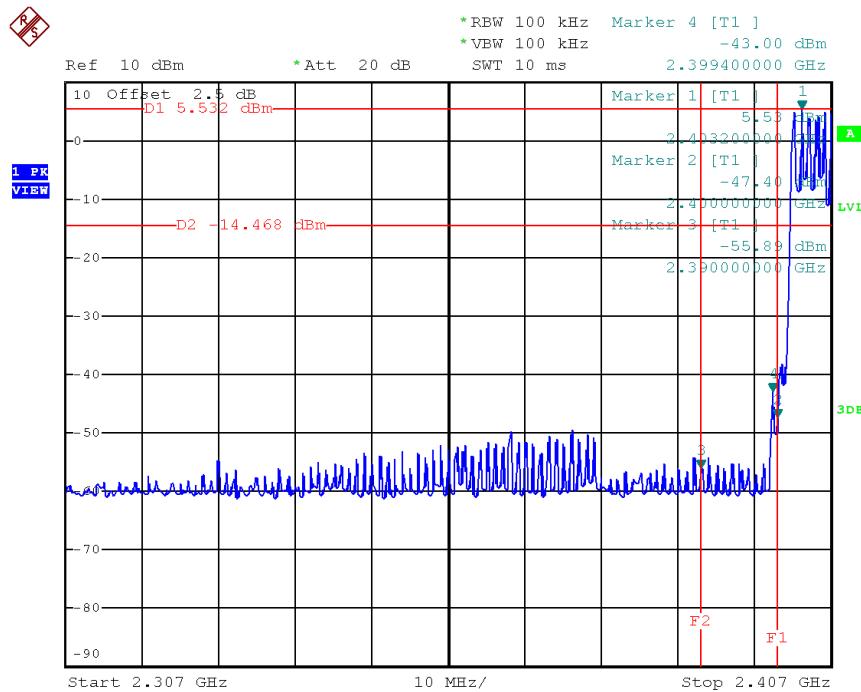


Date: 23.OCT.2017 09:47:08

### CH78 Hopping on mode (Upper) \_1Mbps

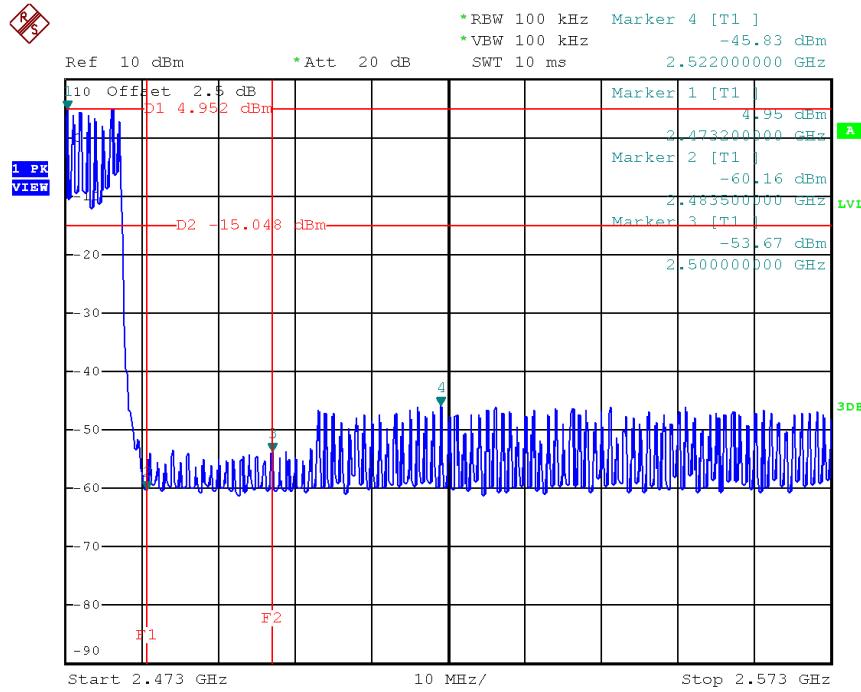


Date: 23.OCT.2017 09:47:45


## CH00 (10 Harmonic of the frequency) \_1Mbps

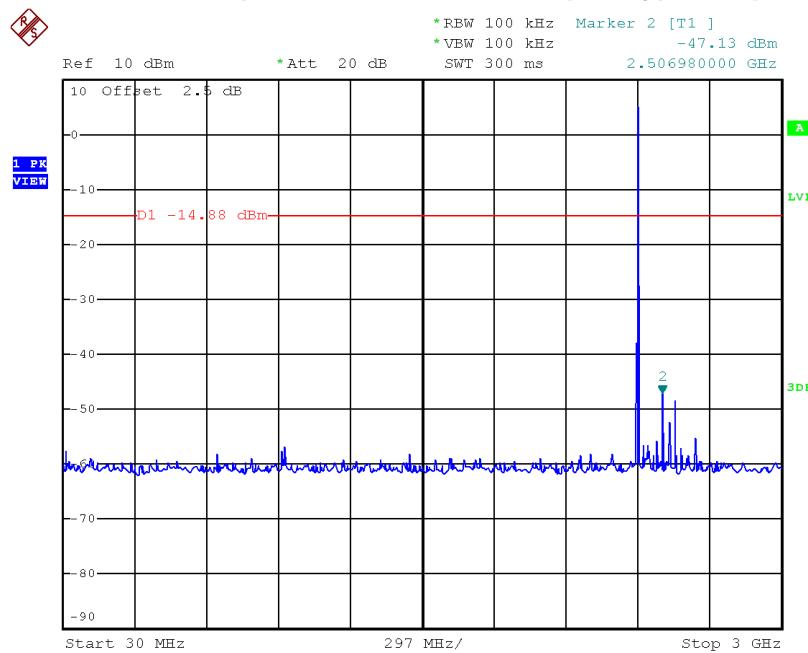

Date: 23.OCT.2017 09:36:00

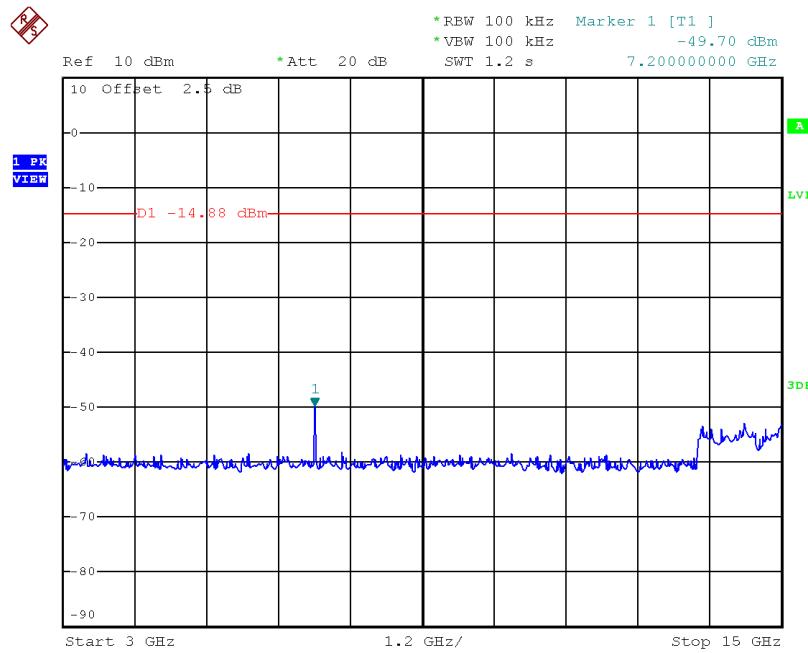


Date: 23.OCT.2017 09:36:11

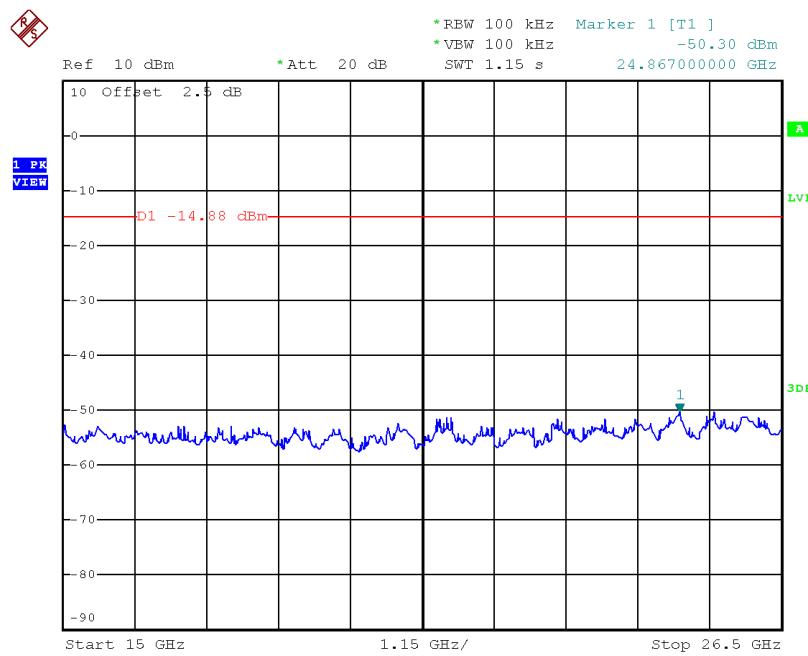


Date: 23.OCT.2017 09:36:18


### CH39 (10 Harmonic of the frequency) \_1Mbps

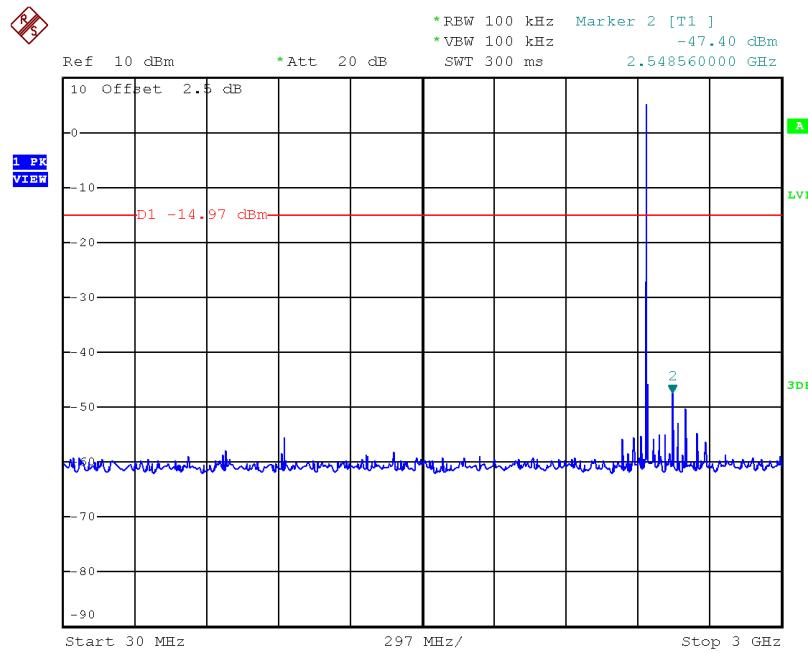

Date: 23.OCT.2017 09:36:52

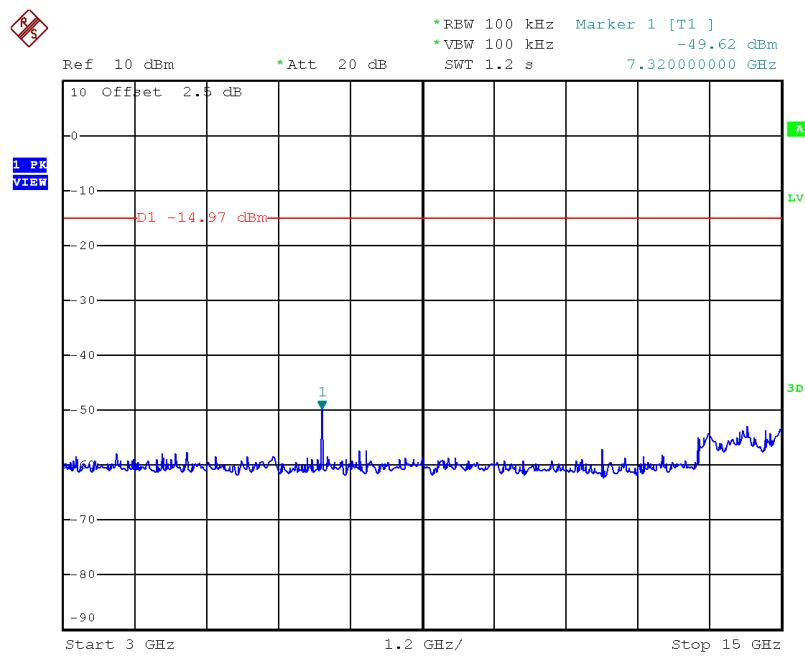


Date: 23.OCT.2017 09:36:59

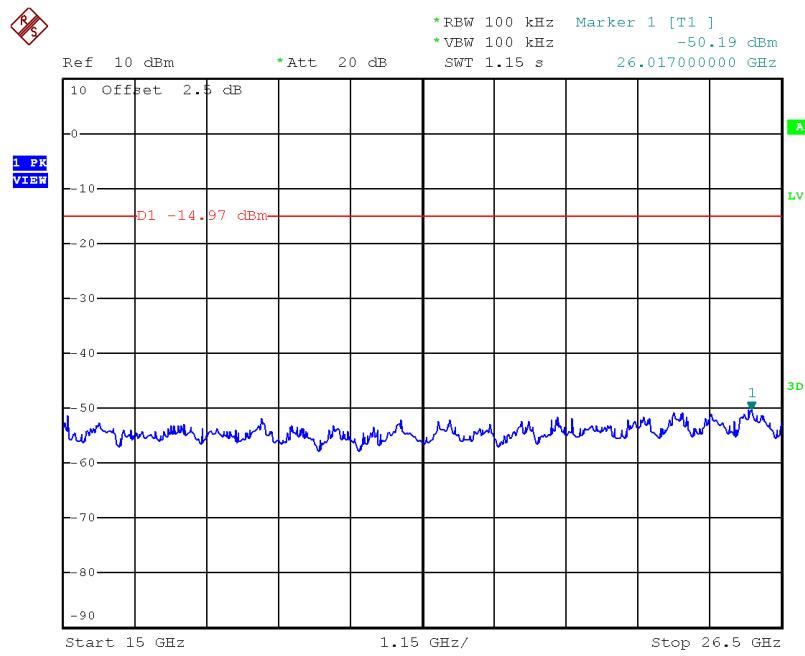


Date: 23.OCT.2017 09:37:06


## CH78 (10 Harmonic of the frequency) \_1Mbps

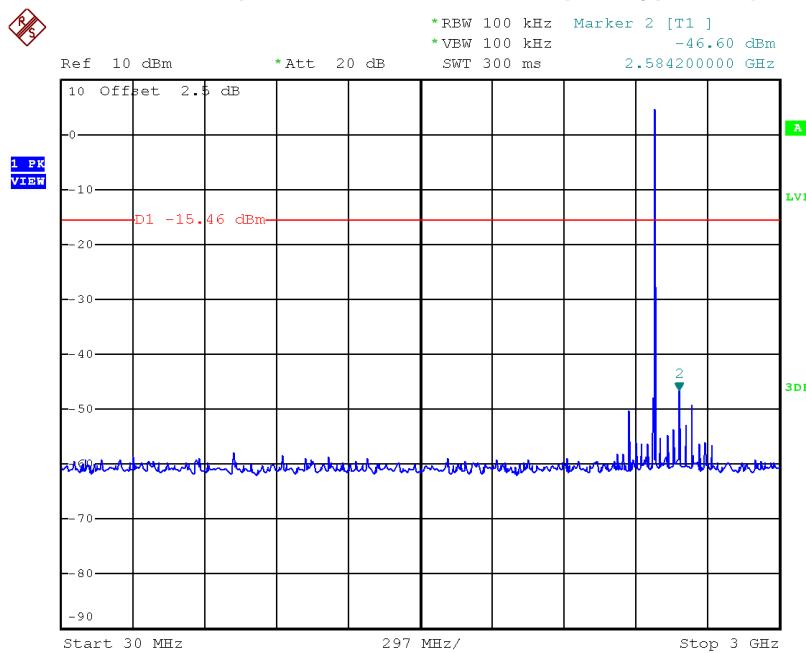

Date: 23.OCT.2017 09:38:32

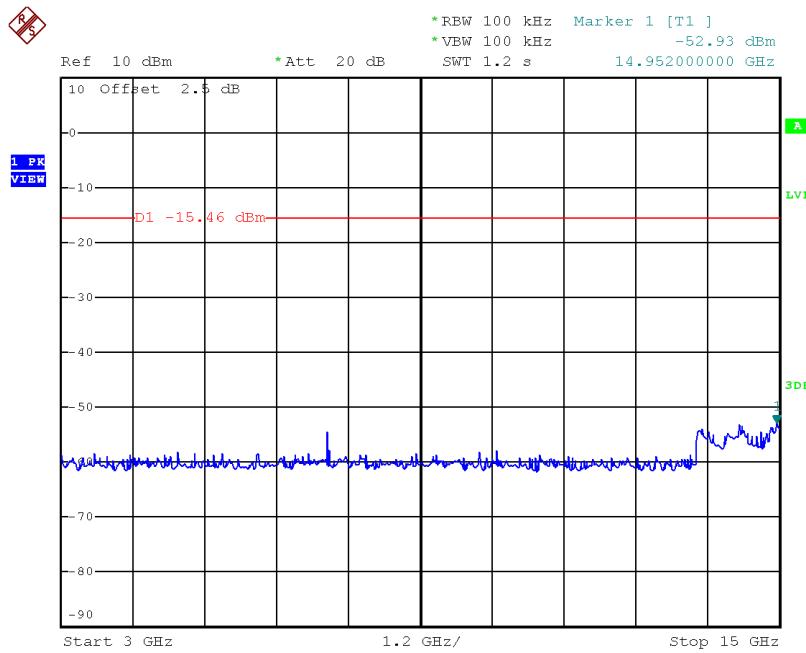


Date: 23.OCT.2017 09:38:39

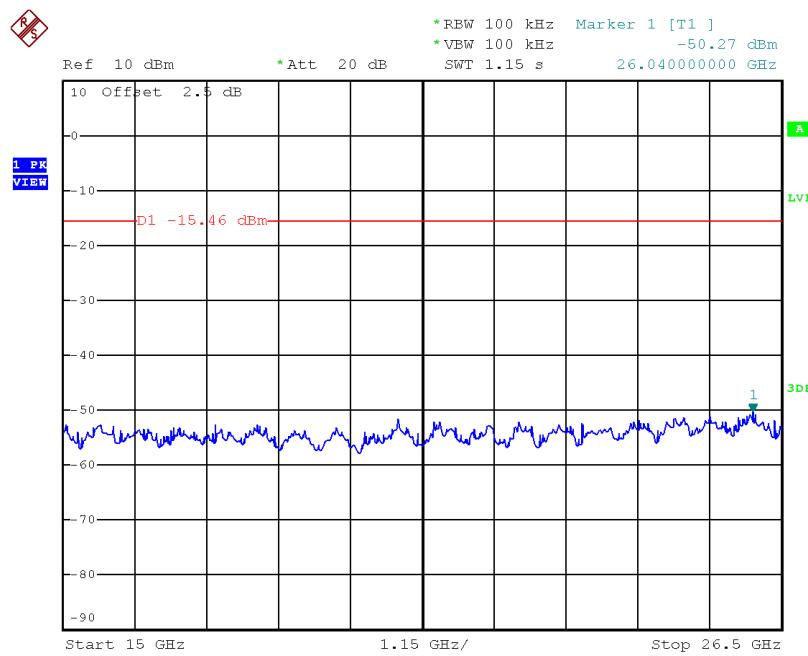


Date: 23.OCT.2017 09:38:46

### CH00 (Lower) \_3Mbps

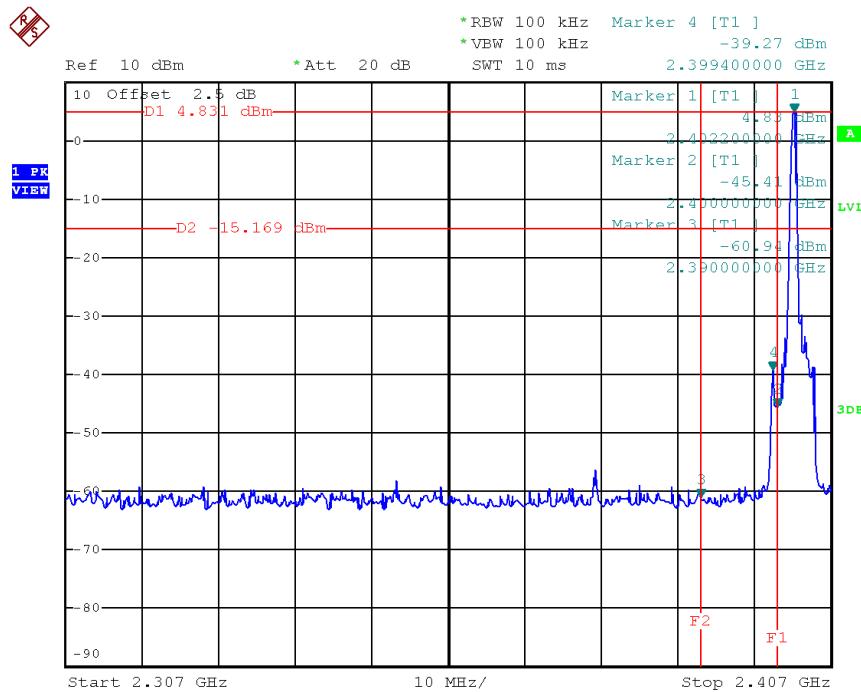


Date: 23.OCT.2017 09:50:43

### CH78 (Upper) \_3Mbps

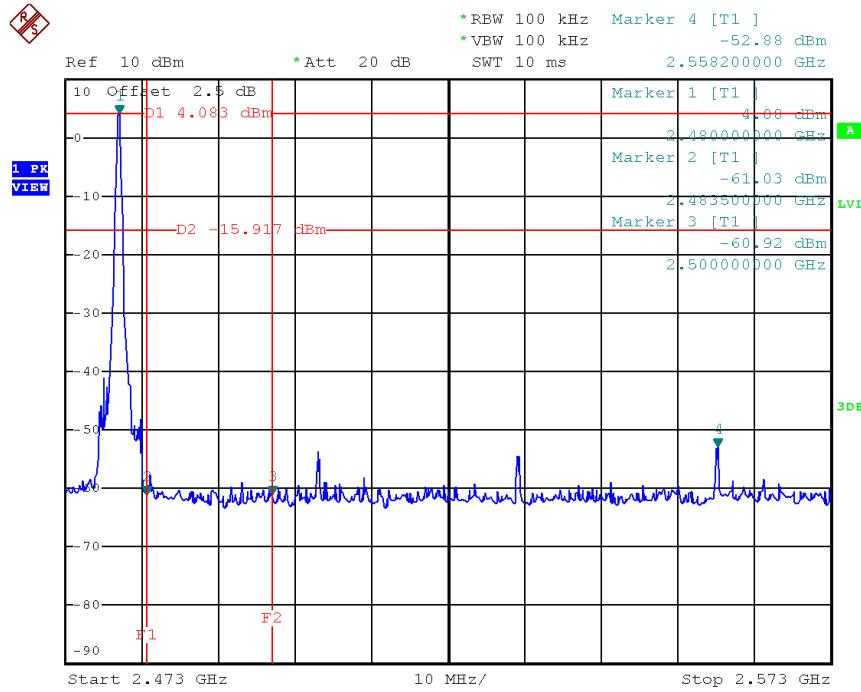


Date: 23.OCT.2017 09:53:57

### CH00 Hopping on mode (Lower) \_3Mbps

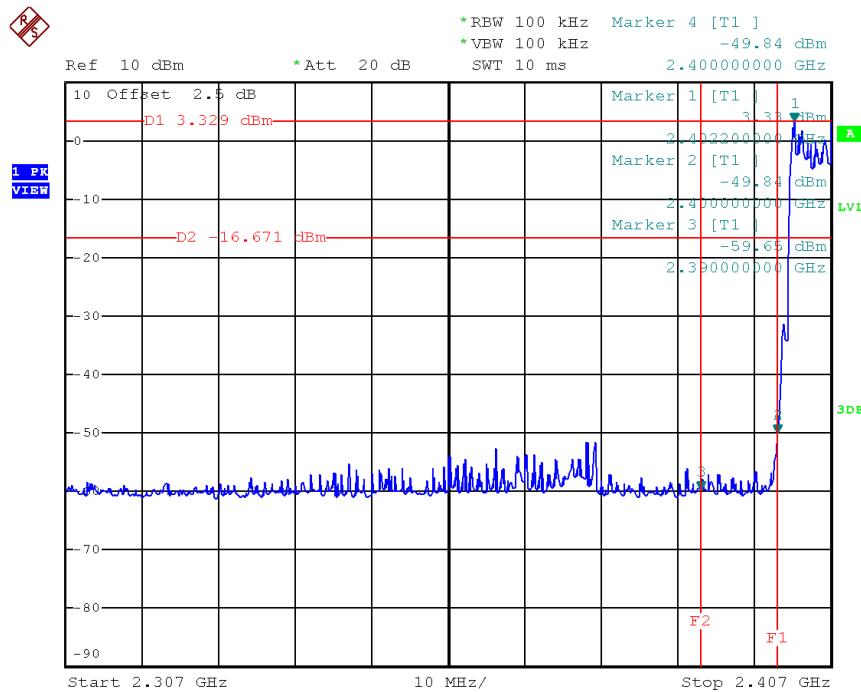


Date: 23.OCT.2017 10:02:01

### CH78 Hopping on mode (Upper) \_3Mbps

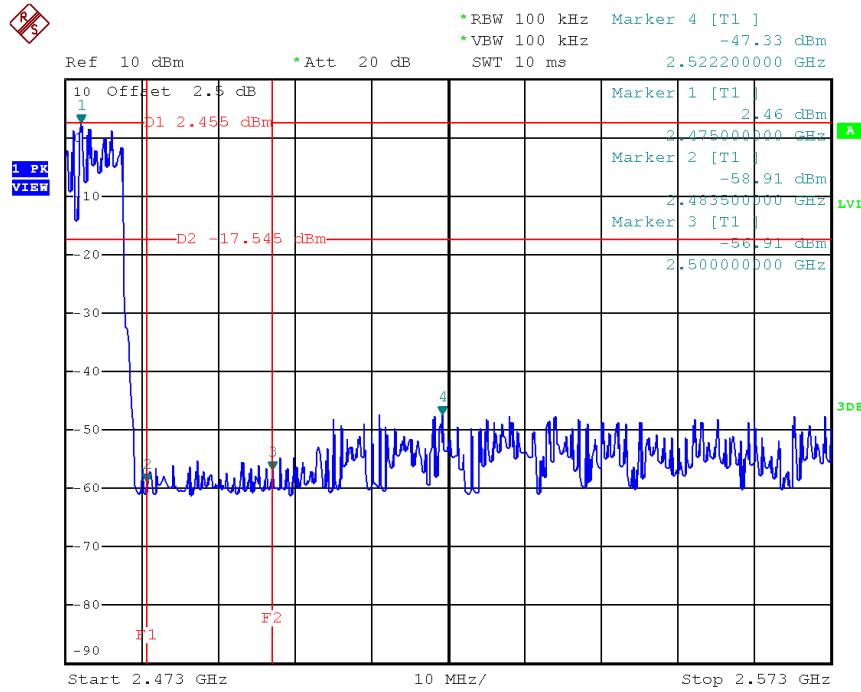


Date: 23.OCT.2017 10:02:37


## CH00 (10 Harmonic of the frequency) \_3Mbps

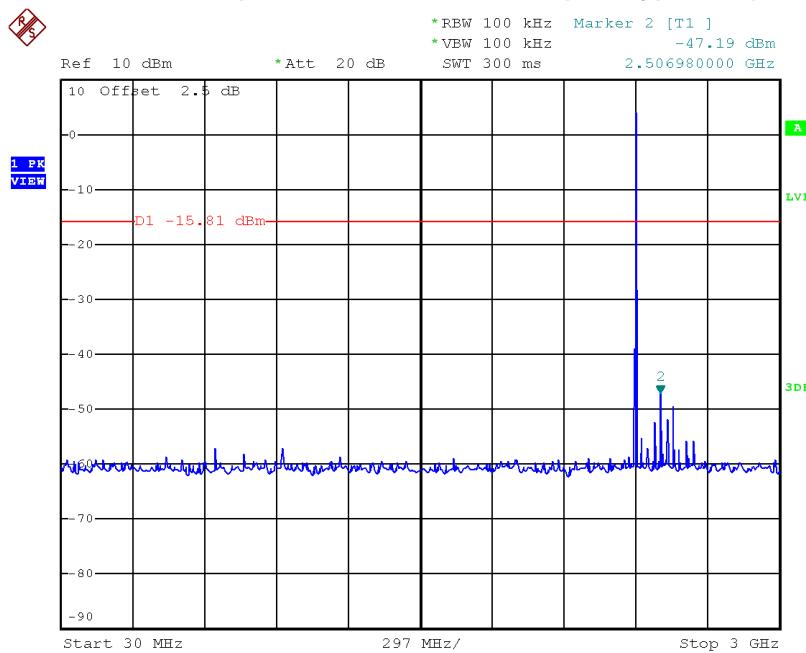

Date: 23.OCT.2017 09:51:18

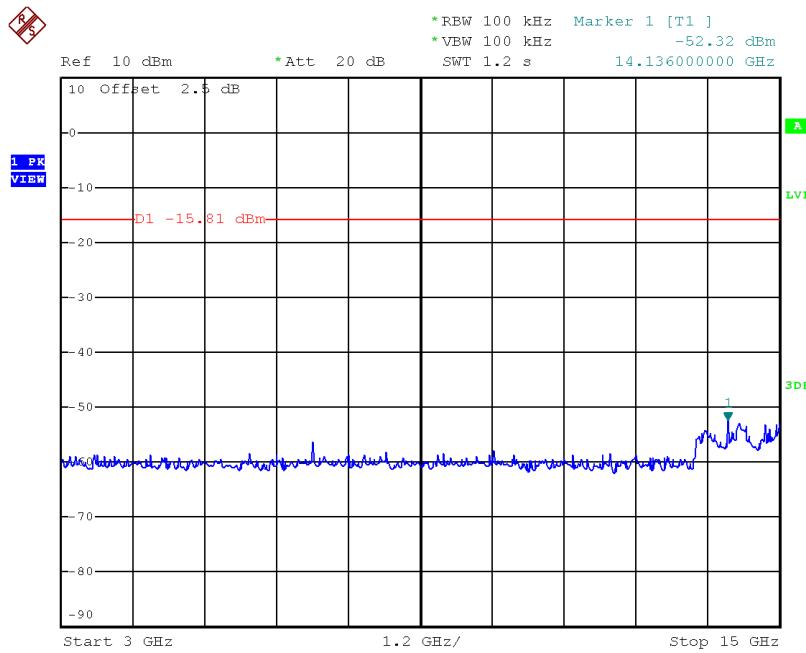


Date: 23.OCT.2017 09:51:25

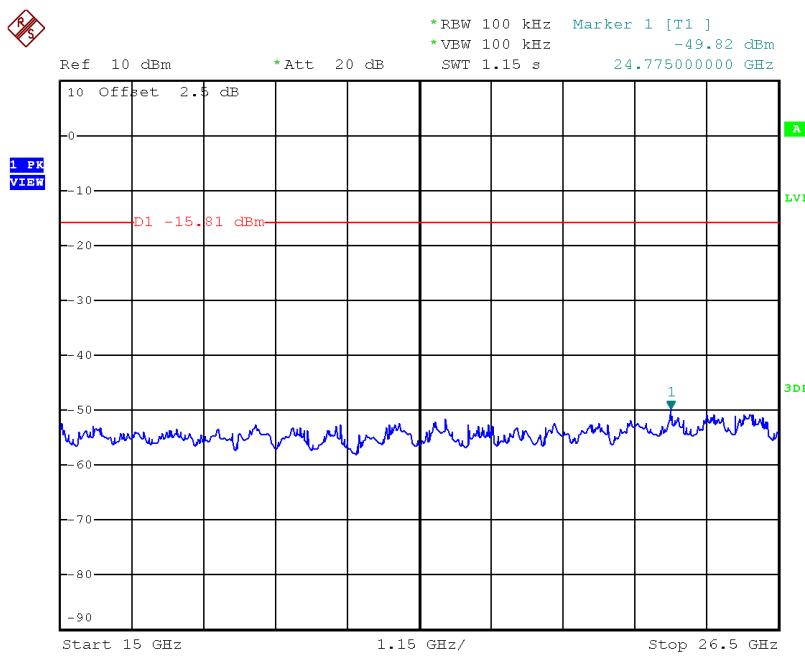


Date: 23.OCT.2017 09:51:32


## CH39 (10 Harmonic of the frequency) \_3Mbps

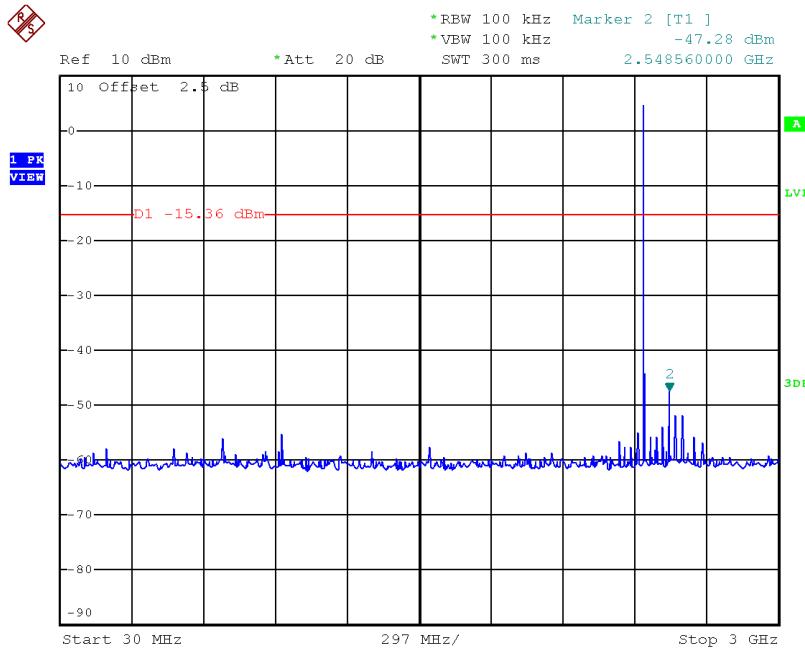

Date: 23.OCT.2017 09:52:44

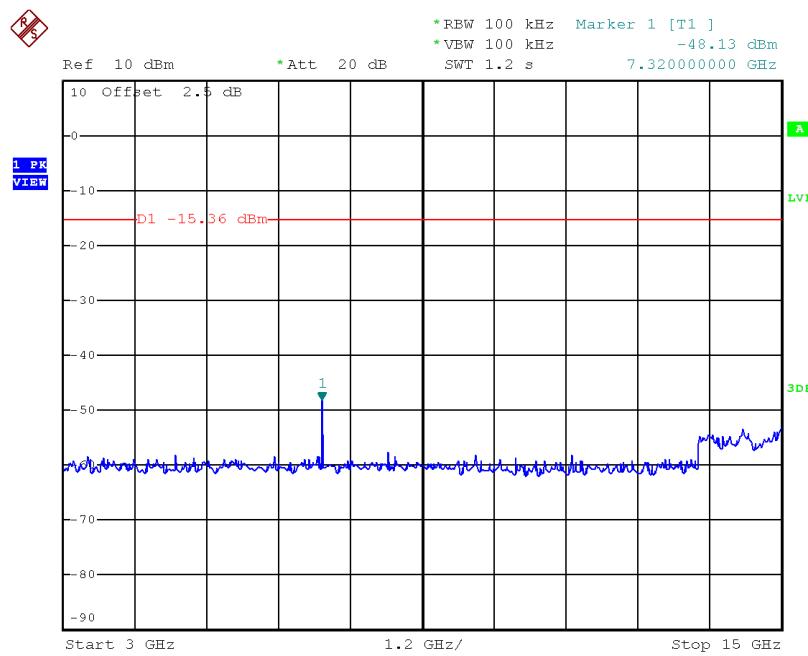


Date: 23.OCT.2017 09:52:51

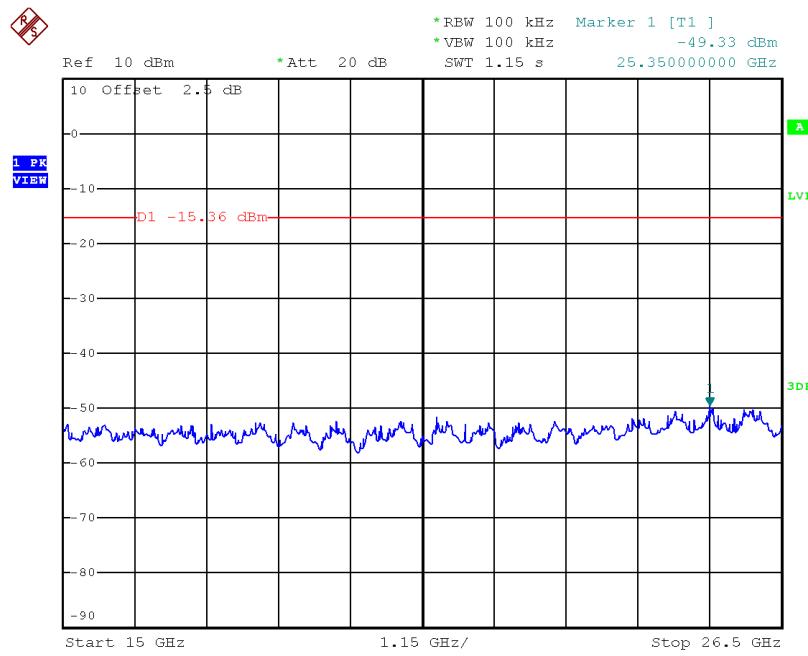


Date: 23.OCT.2017 09:52:58


## CH78 (10 Harmonic of the frequency) \_3Mbps

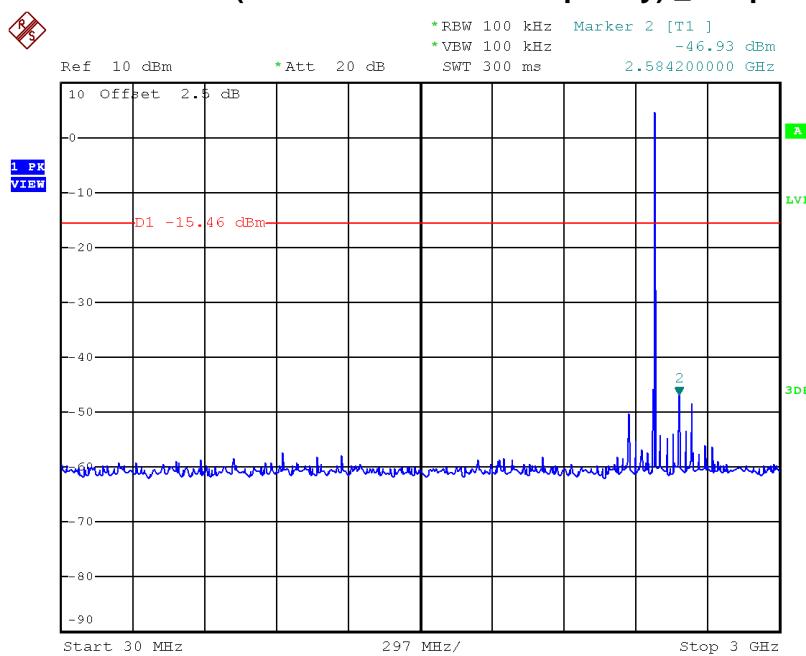

Date: 23.OCT.2017 09:54:31

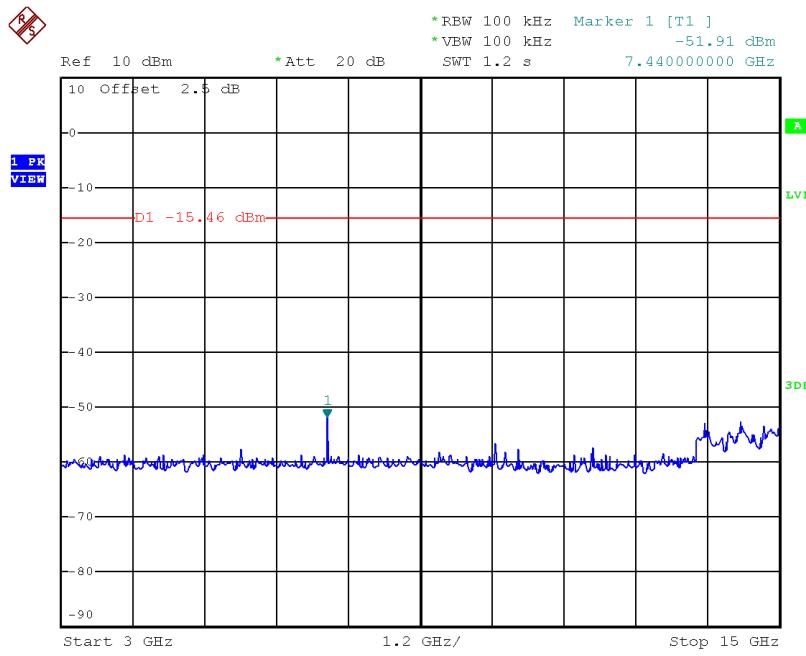

Date: 23.OCT.2017 09:54:38

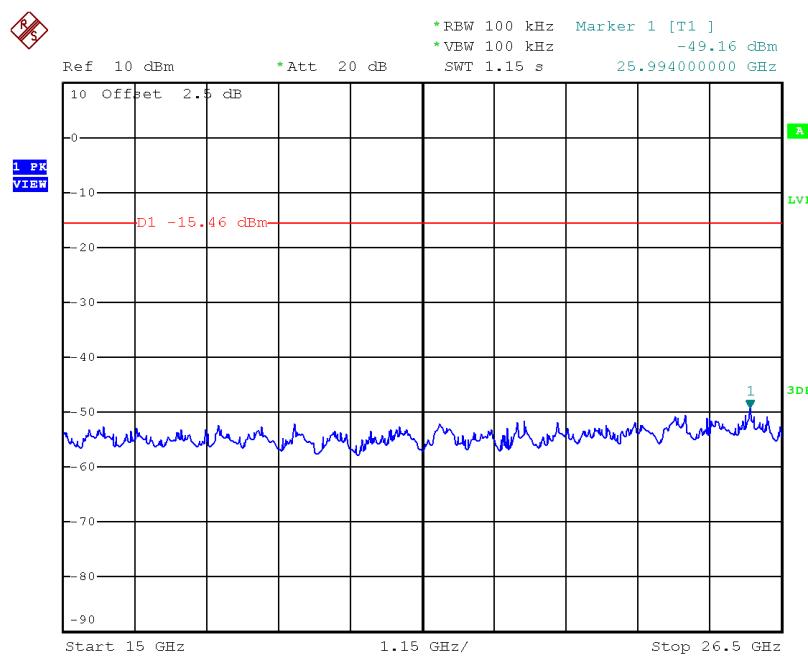

Date: 23.OCT.2017 09:54:45