



TESTING LABORATORY  
CERTIFICATE NUMBER: 3297.02



# FCC PART 15, SUBPART C ISEDC RSS-247, ISSUE 2, FEBRUARY 2017

## TEST REPORT

For

### The Detection Group, Inc.

4550 Kearny Villa Road, Suite 110,  
San Diego, CA 92123, USA

**FCC ID: 2AK4V-DT-501  
IC: 22517-DT501**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Hub
<b>Prepared By:</b> <u>Rudy Sun</u> Lab Support/Test <u>Engineer</u> 	
<b>Report Number:</b> <u>R17020112-247 DTS (Hub)</u>	
<b>Report Date:</b> <u>2017-08-14</u>	
<b>Reviewed By:</b> <u>Jin Yang</u> RF Lead 	
Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732-9164	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA\*, NIST, or any agency of the Federal Government.

\* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*” (sac2)

## TABLE OF CONTENTS

<b>1 General Description .....</b>	<b>5</b>
1.1 Product Description for Equipment Under Test (EUT) .....	5
1.2 Mechanical Description of EUT .....	5
1.3 Objective.....	5
1.4 Related Submittal(s)/Grant(s) .....	5
1.5 Test Methodology .....	5
1.6 Measurement Uncertainty.....	6
1.7 Test Facility Registrations .....	7
1.8 Test Facility Accreditations .....	7
<b>2 System Test Configuration .....</b>	<b>10</b>
2.1 Justification.....	10
2.2 EUT Exercise Software.....	10
2.3 Duty Cycle Correction Factor .....	10
2.4 Test Channels.....	11
2.5 Equipment Modifications.....	11
2.6 Local Support Equipment .....	11
2.7 Support Equipment .....	11
2.8 Interface Ports and Cabling.....	12
<b>3 Summary of Test Results.....</b>	<b>13</b>
<b>4 FCC §15.203 and ISEDC RSS-Gen Clause 8.3 - Antenna Requirements .....</b>	<b>14</b>
4.1 Applicable Standards .....	14
4.2 Antenna Description .....	14
<b>5 FCC § 2.1091, §15.247(i) and ISEDC RSS-102 - RF Exposure.....</b>	<b>15</b>
5.1 Applicable Standards .....	15
5.2 MPE Prediction.....	16
5.3 MPE Results For FCC .....	16
5.4 RF exposure evaluation exemption for IC .....	16
<b>6 FCC §15.207 and ISEDC RSS-Gen Clause 8.8 - AC Line Conducted Emissions .....</b>	<b>17</b>
6.1 Applicable Standards .....	17
6.2 Test Setup .....	17
6.3 Test Procedure .....	17
6.4 Corrected Amplitude and Margin Calculation.....	18
6.5 Test Setup Block Diagram.....	18
6.6 Test Equipment List and Details .....	19
6.7 Test Environmental Conditions .....	19
6.8 Summary of Test Results.....	19
6.9 Conducted Emissions Test Plots and Data.....	20
<b>7 FCC §15.209, §15.247(d) and ISEDC RSS-247 Clause 5.5, RSS-GEN Clause 8.9 &amp; 8.10 - Spurious Radiated Emissions.....</b>	<b>22</b>
7.1 Applicable Standards .....	22
7.2 Test Setup .....	24
7.3 Test Procedure .....	24
7.4 Corrected Amplitude and Margin Calculation.....	24
7.5 Test Equipment List and Details.....	25
7.6 Test Environmental Conditions .....	25
7.7 Summary of Test Results .....	26
7.8 Radiated Emissions Test Results .....	27
<b>8 FCC §15.247(a) (2) and ISEDC RSS-247 Clause 5.2 -Emission Bandwidth.....</b>	<b>31</b>

8.1	Applicable Standards .....	31
8.2	Test Results.....	31
<b>9</b>	<b>FCC §15.247(b) (3) and ISEDC RSS-247 Clause 5.4 (d) - Output Power Measurement .....</b>	<b>32</b>
9.1	Applicable Standards .....	32
9.2	Test Results.....	32
<b>10</b>	<b>FCC §15.247(d) and ISEDC RSS-247 Clause 5.5 – 100 kHz Bandwidth of Band Edges.....</b>	<b>33</b>
10.1	Applicable Standards .....	33
10.2	Test Results.....	33
<b>11</b>	<b>FCC §15.247(e) and ISEDC RSS-247 Clause 5.2(b) – Power Spectral Density.....</b>	<b>34</b>
11.1	Applicable Standards .....	34
11.2	Test Results.....	34
<b>12</b>	<b>FCC §15.247(d) and ISEDC RSS-247 Clause 5.5– Spurious Emissions at Antenna Terminals .....</b>	<b>35</b>
12.1	Applicable Standards .....	35
12.2	Test Results.....	35
<b>13</b>	<b>Annex A (Normative) – FCC and IC Equipment Labeling Requirements.....</b>	<b>36</b>
13.1	FCC ID Label Requirements .....	36
13.2	IC Label Requirements .....	36
13.3	FCC ID and IC Label Contents and Location.....	37
<b>14</b>	<b>Annex B (Normative) - Test Setup Photographs.....</b>	<b>38</b>
14.1	Radiated Emission below 1 GHz Front View .....	38
14.2	Radiated Emission below 1 GHz Rear View .....	38
14.3	Radiated Emission above 1 GHz Front View .....	39
14.4	Radiated Emission above 1 GHz Rear View .....	39
14.5	AC Conducted Emission Front View.....	40
14.6	AC Conducted Emission Side View .....	40
<b>15</b>	<b>Annex C (Normative) - EUT Photographs.....</b>	<b>41</b>
15.1	EUT Top View.....	41
15.2	EUT Bottom View .....	41
15.3	EUT Left View .....	42
15.4	EUT Right View .....	42
15.5	EUT Front View .....	43
15.6	EUT Back View .....	43
15.7	Antenna Top View.....	44
15.8	AC Adaptor.....	44
15.9	EUT Open Case View.....	45
15.10	PCB Front Shielding Removed View.....	45
15.11	PCB Back View.....	46
15.12	RF Module Close up View .....	46
<b>16</b>	<b>Annex D (Informative) - A2LA Electrical Testing Certificate.....</b>	<b>47</b>

## DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R17020112-247 DTS (Hub)	Original Report	2017-08-14

## 1 General Description

### 1.1 Product Description for Equipment Under Test (EUT)

This test and measurement report was prepared on behalf of *The Detection Group, Inc.*, and their product model: DT-501 Wireless Communication Hub, FCC ID: 2AK4V-DT-501; IC: 22517-DT501 or the “EUT” as referred to in this report. The DT-501 Wireless Communication Hub is a 906-924 MHz RF router which provides routing and status data to and from the sensors and valve controllers to the smart base station.

### 1.2 Mechanical Description of EUT

The EUT measures approximately 125 mm (L) x 41 mm (W) x 97 mm (H).

*The test data gathered are from typical production sample, serial number: 20 000013 assigned by The Detection Group, Inc.*

### 1.3 Objective

This report is prepared on behalf of *The Detection Group, Inc.*, in accordance with Part 2, Subpart J, and Part 15, Subparts A and C of the Federal Communication Commission’s rules and ISEDC RSS-247 Issue 2, FEBRUARY 2017.

The objective is to determine compliance with FCC Part 15.247 and ISEDC RSS-247 rules for Output Power, Antenna Requirements, 6 dB Bandwidth, Power Spectral Density, 100 kHz Bandwidth of Band Edges Measurement, Conducted and Radiated Spurious Emissions.

### 1.4 Related Submittal(s)/Grant(s)

FCC Part 15, Subpart C, Equipment DTS with FCC ID: 2AK4V-DT-500, IC: 22517-DT500

FCC Part 15, Subpart C, Equipment DTS with FCC ID: 2AK4V-DT-502, IC: 22517-DT502

FCC Part 15, Subpart C, Equipment DTS with FCC ID: 2AK4V-DT-503, IC: 22517-DT503

### 1.5 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 558074 D01 DTS Meas Guidance v04: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247.

## 1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Parameter	Measurement uncertainty
Occupied Channel Bandwidth	$\pm 5\%$
RF output power, conducted	$\pm 0.57\text{ dB}$
Power Spectral Density, conducted	$\pm 1.48\text{ dB}$
Unwanted Emissions, conducted	$\pm 1.57\text{ dB}$
AC power line Conducted Emission	$\pm 2.0\text{ dB}$
Temperature	$\pm 2\text{ }^{\circ}\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 1.0\%$
Time	$\pm 2\%$
Duty Cycle	$\pm 3\%$

Type of Measurement: ANSI C63.4-2014 Radiated Emissions (in the BACL 5 m - 3 SAC) Note: Measurements up to 1 GHz made using an Brands ESCI EMI Receiver; Measurements from 1 GHz to 40 GHz made using an brands ESU40 EMI Receiver	BACL Typical $U_{\text{LAB}}$ Value (for a k=2 Coverage Factor, equivalent to ~ 95% level of confidence)	$U_{\text{CISPR}}$ Value worst-allowable values of the latest version of CISPR 16-4-2 (for a k=2 Coverage Factor, equivalent to ~ 95% level of confidence)
Radiated Electric Field Disturbance – Horizontal Polarization, 30 MHz – 200 MHz (i.e., Radiated Emissions measured at 3 meters distance)	4.76 dB (No Tilting)	5.06 dB (No Tilting)
Radiated Electric Field Disturbance – Vertical Polarization, 30 MHz – 200 MHz (i.e., Radiated Emissions measured at 3 meters distance)	5.13 dB (No Tilting)	5.17 dB (No Tilting)
Radiated Electric Field Disturbance – Horizontal Polarization, 200 MHz – 1000 MHz (i.e., Radiated Emissions measured at 3 meters distance)	5.29 dB (No Tilting)	5.34 (No Tilting)
Radiated Electric Field Disturbance – Vertical Polarization, 200 MHz – 1000 MHz (i.e., Radiated Emissions measured at 3 meters distance)	5.53 dB (No Tilting)	6.32 dB (No Tilting)
Radiated Electric Field Disturbance Horizontal and Vertical Polarizations, 1 GHz – 6 GHz (i.e., Radiated Emissions measured at 3 meters distance)	4.36 dB (No Tilting)	5.18 dB (No Tilting)
Radiated Electric Field Disturbance Horizontal and Vertical Polarizations, 1 GHz – 6 GHz (i.e., Radiated Emissions measured at 3 meters distance)	4.00 dB (With Bore-sighting)	$U_{\text{CISPR}}$ Value is Not Specified
Radiated Electric Field Disturbance Horizontal and Vertical Polarizations, 6 GHz – 18 GHz (i.e., Radiated Emissions measured at 3 meters distance)	4.23 dB (With Bore-sighting)	$U_{\text{CISPR}}$ Value is Not Specified
Radiated Electric Field Disturbance Horizontal and Vertical Polarizations, 18 GHz – 26.5 GHz (i.e., Radiated Emissions measured at 1 meter distance)	4.81 dB (With Bore-sighting)	$U_{\text{CISPR}}$ Value is Not Specified
Radiated Electric Field Disturbance Horizontal and Vertical Polarizations, 26.5 GHz – 40 GHz (i.e., Radiated Emissions measured at 1 meter distance)	5.00 dB (With Bore-sighting)	$U_{\text{CISPR}}$ Value is Not Specified

## 1.7 Test Facility Registrations

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently recognized by the Federal Communications Commission as Accredited with NIST Designation Number US1129.

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently registered with Industry Canada under Registration Numbers: 3062A-1, 3062A-2, and 3062A-3.

BACL is a Chinese Taipei Bureau of Standards Metrology and Inspection (BSMI) validated Conformity Assessment Body (CAB), under Appendix B, Phase I Procedures of the APEC Mutual Recognition Arrangement (MRA). BACL's BSMI Lab Code Number is: SL2-IN-E-1002R

BACL's test facilities that are used to perform AC Line Conducted Emissions, Telecommunications Line Conducted Emissions, Radiated Emissions from 30 MHz to 1 GHz, and Radiated Emissions from 1 GHz to 6 GHz are currently recognized as Accredited in accordance with the Voluntary Control Council for Interference [VCCI] Article 15 procedures under Registration Number A-0027.

## 1.8 Test Facility Accreditations

Bay Area Compliance Laboratories Corp. (BACL) is:

**A- An independent, 3<sup>rd</sup>-Party, Commercial Test Laboratory accredited to ISO/IEC 17025:2005 by A2LA (Test Laboratory Accreditation Certificate Number 3297.02)**, in the fields of: Electromagnetic Compatibility and Telecommunications. Unless noted by an Asterisk (\*) in the Compliance Matrix (See Section 3 of this Test Report), BACL's ISO/IEC 17025:2005 Scope of Accreditation includes all of the Test Method Standards and/or the Product Family Standards detailed in this Test Report..

BACL's ISO/IEC 17025:2005 Scope of Accreditation includes a comprehensive suite of EMC Emissions, EMC Immunity, Radio, RF Exposure, Safety and wireline Telecommunications test methods applicable to a wide range of product categories. These product categories include Central Office Telecommunications Equipment [including NEBS - Network Equipment Building Systems], Unlicensed and Licensed Wireless and RF devices, Information Technology Equipment (ITE); Telecommunications Terminal Equipment (TTE); Medical Electrical Equipment; Industrial, Scientific and Medical Test Equipment; Professional Audio and Video Equipment; Industrial and Scientific Instruments and Laboratory Apparatus; Cable Distribution Systems, and Energy Efficient Lighting.

**B- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3297.03)** to certify

- For the USA (Federal Communications Commission):

- 1- All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
- 2- All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
- 3- All Telephone Terminal Equipment within FCC Scope C.

- For the Canada (Industry Canada):

- 1 All Scope 1-Licence-Exempt Radio Frequency Devices;
- 2 All Scope 2-Licensed Personal Mobile Radio Services;
- 3 All Scope 3-Licensed General Mobile and Fixed Radio Services;
- 4 All Scope 4-Licensed Maritime and Aviation Radio Services;
- 5 All Scope 5-Licensed Fixed Microwave Radio Services
- 6 All Broadcasting Technical Standards (BETS) in the Category I Equipment Standards List.

- For Singapore (Info-Communications Development Authority (IDA)):

- 1 All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2
- 2 All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2

- For the Hong Kong Special Administrative Region:

- 1 All Radio Equipment, per KHCA 10XX-series Specifications;
- 2 All GMDSS Marine Radio Equipment, per HKCA 12XX-series Specifications;
- 3 All Fixed Network Equipment, per HKCA 20XX-series Specifications.

- For Japan:

- 1 MIC Telecommunication Business Law (Terminal Equipment):
  - All Scope A1 - Terminal Equipment for the Purpose of Calls;
  - All Scope A2 - Other Terminal Equipment
- 2 Radio Law (Radio Equipment):
  - All Scope B1 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law
  - All Scope B2 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
  - All Scope B3 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law

**C- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3297.01)** to certify Products to USA's Environmental Protection Agency (EPA) ENERGY STAR Product Specifications for:

- 1 Electronics and Office Equipment:
  - for Telephony (ver. 3.0)
  - for Audio/Video (ver. 3.0)
  - for Battery Charging Systems (ver. 1.1)
  - for Set-top Boxes and Cable Boxes (ver. 4.1)
  - for Televisions (ver. 6.1)
  - for Computers (ver. 6.0)
  - for Displays (ver. 6.0)
  - for Imaging Equipment (ver. 2.0)
  - for Computer Servers (ver. 2.0)
- 2 Commercial Food Service Equipment
  - for Commercial Dishwashers (ver. 2.0)
  - for Commercial Ice Machines (ver. 2.0)
  - for Commercial Ovens (ver. 2.1)
  - for Commercial Refrigerators and Freezers
- 3 Lighting Products
  - For Decorative Light Strings (ver. 1.5)
  - For Luminaires (including sub-components) and Lamps (ver. 1.2)
  - For Compact Fluorescent Lamps (CFLs) (ver. 4.3)
  - For Integral LED Lamps (ver. 1.4)
- 4 Heating, Ventilation, and AC Products
  - for Residential Ceiling Fans (ver. 3.0)
  - for Residential Ventilating Fans (ver. 3.2)
- 5 Other
  - For Water Coolers (ver. 3.0)

**D. A NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties:**

- Australia: ACMA (Australian Communication and Media Authority) – APEC Tel MRA -Phase I;
- Canada: (Industry Canada - IC) Foreign Certification Body – FCB – APEC Tel MRA -Phase I and Phase II;
- Chinese Taipei (Republic of China – Taiwan):
  - o BSMI (Bureau of Standards, Metrology and Inspection) APEC Tel MRA -Phase I;

- NCC (National Communications Commission) APEC Tel MRA -Phase I;
- European Union:
  - Radio and Teleterminal Equipment (RandTTE) Directive 1995/5/EC  
US -EU EMC and Telecom MRA CAB
- Hong Kong Special Administrative Region: (Office of the Telecommunications Authority – OFTA)  
APEC Tel MRA -Phase I and Phase II
- Israel – US-Israel MRA Phase I
- Republic of Korea (Ministry of Communications - Radio Research Laboratory) APEC Tel MRA -Phase I
- Singapore: (Infocomm Development Authority - IDA) APEC Tel MRA -Phase I and Phase II;
- Japan: VCCI - Voluntary Control Council for Interference US-Japan Telecom Treaty VCCI Side Letter-
- USA:
  - ENERGY STAR Recognized Test Laboratory – US EPA
  - Telecommunications Certification Body (TCB) – US FCC;
- Vietnam: APEC Tel MRA -Phase I;

## 2 System Test Configuration

### 2.1 Justification

The EUT was configured for testing according to ANSI C63.10-2013 and FCC KDB 558074 D01 DTS Meas Guidance v04.

The EUT was tested in a testing mode to represent worst-case results during the final qualification test.

The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the average power, peak power and PSD across all data rates bandwidths, and modulations.

### 2.2 EUT Exercise Software

N/A

### 2.3 Duty Cycle Correction Factor

According to KDB 558074 D01 DTS Meas Guidance v04 section 6.0:


Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be utilized to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration ( $T$ ) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed  $T$  at any time that data is being acquired (i.e., no transmitter off-time is to be considered).

Radio Mode	On Time (us)	Period (us)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
906 -924MHz	Continuous	Continuous	100%	0

Duty Cycle = On Time (ms)/ Period (ms)

Duty Cycle Correction Factor (dB) =  $10 \log(1/\text{Duty Cycle})$

Please refer to the following plots.

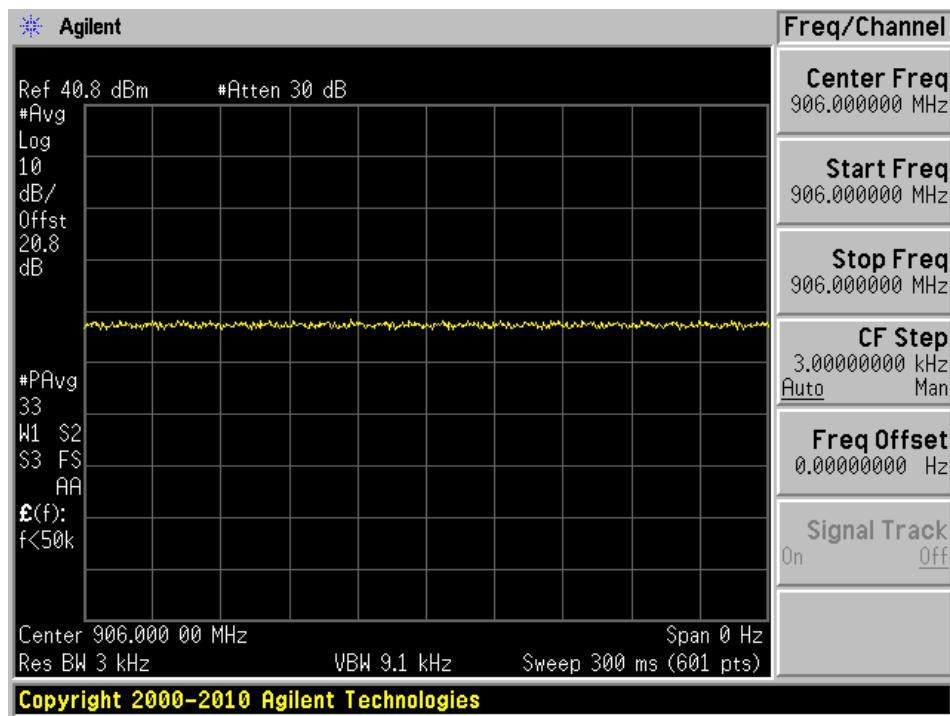

## 2.4 Test Channels

Channels	Frequency (MHz)
Low	906
Middle	914
High	924

## 2.5 Equipment Modifications

N/A

## 2.6 Local Support Equipment

Manufacturer	Description	Model No.	Serial No.
Dell	Windows Laptop	E6410	-

## 2.7 Support Equipment

There was no support equipment included, or intended for use with EUT during these tests.

## 2.8 Interface Ports and Cabling

Cable Description	Length (m)	To	From
RF Cable	< 1 m	PSA	EUT

### 3 Summary of Test Results

Results reported relate only to the product tested.

FCC & ISEDC Rules	Description of Test	Results
FCC §15.203 ISEDC RSS-Gen Clause 8.3	Antenna Requirement	Compliant
FCC §15.207 ISEDC RSS-Gen Clause 8.8	AC Line Conducted Emissions	Compliant
FCC §2.1091, §15.247(i) ISEDC RSS-102	RF Exposure	Compliant
FCC §2.1051, §15.247 (d) ISEDC RSS-247 Clause 5.5	Spurious Emissions at Antenna Port	Note <sup>1</sup>
FCC §2.1053, §15.205, §15.209, §15.247 (d) ISEDC RSS-247 Clause 5.5 ISEDC RSS-Gen Clause 8.9 & 8.10	Radiated Spurious Emissions	Compliant
FCC §15.247(a)(2) ISEDC RSS-247 Clause 5.2 (a)	6 dB and 99% Emission Bandwidth	Note <sup>1</sup>
FCC §15.247(b)(3) ISEDC RSS-247 Clause 5.4 (d)	Maximum Peak Output Power	Note <sup>1</sup>
FCC §15.247(d) ISEDC RSS-247 Clause 5.5	100 kHz Bandwidth of Frequency Band Edge	Note <sup>1</sup>
FCC §15.247(e) ISEDC RSS-247 Clause 5.2 (b)	Power Spectral Density	Note <sup>1</sup>

Note<sup>1</sup>: Refer to R1702012-247 (Sensor) Report with FCC ID: 2AK4V-DT-502, IC: 22517-DT502.

## 4 FCC §15.203 and ISEDC RSS-Gen Clause 8.3 - Antenna Requirements

### 4.1 Applicable Standards

According to FCC §15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

And according to FCC §15.247 (b) (4), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to ISEDC RSS-Gen Clause 8.3: Transmitter Antenna

The applicant for equipment certification, as per RSP-100, must provide a list of all antenna types that may be used with the license-exempt transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna.

License-exempt transmitters that have received equipment certification may operate with different types of antennas. However, it is not permissible to exceed the maximum equivalent isotropically radiated power (e.i.r.p.) limits specified in the applicable standard (RSS) for the license-exempt apparatus.

Testing shall be performed using the highest gain antenna of each combination of license-exempt transmitter and antenna type, with the transmitter output power set at the maximum level. 9 When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer.

User manuals for transmitters equipped with detachable antennas shall also contain the following notice in a conspicuous location:

This radio transmitter (identify the device by certification number) has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types approved for use with the transmitter, indicating the maximum permissible antenna gain (in dBi).

### 4.2 Antenna Description

Antenna usage	Frequency Range (MHz)	Maximum Antenna Gain (dBi)
RF	906-924	1.2

Note: Customer declared the EUT was professionally installed.

## 5 FCC § 2.1091, §15.247(i) and ISEDC RSS-102 - RF Exposure

### 5.1 Applicable Standards

According to FCC § 2.1091, §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

#### Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minutes)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	* (100)	30
1.34-30	824/f	2.19/f	* (180/f <sup>2</sup> )	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

Before equipment certification is granted, the procedure of ISEDC RSS-102 must be followed concerning the exposure of humans to RF field

### According to RSS-102 section 2.5.2

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

- below 20 MHz<sup>6</sup> and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance);
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than  $4.49/f^{0.5}$  W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance);
- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than  $1.31 \times 10^{-2} f^{0.6834}$  W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance).

In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.

## 5.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

## 5.3 MPE Results For FCC

Targeted output power tolerance is  $\pm 1$ db, so we use 25 dBm as output power to calculate the MPE.

<u>Maximum peak output power at antenna input terminal (dBm):</u>	<u>25</u>
<u>Maximum peak output power at antenna input terminal (mW):</u>	<u>316.23</u>
<u>Prediction distance (cm):</u>	<u>20</u>
<u>Prediction frequency (MHz):</u>	<u>914</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>1.2</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>1.318</u>
<u>Power density of prediction frequency at 20.0 cm (mW/cm<sup>2</sup>):</u>	<u>0.083</u>
<u>FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm<sup>2</sup>):</u>	<u>0.609</u>

The device is compliant with the requirement MPE limit for uncontrolled exposure. The maximum power density at the distance of 20 cm is 0.083 mW/cm<sup>2</sup>. Limit is 0.609 mW/cm<sup>2</sup>.

## 5.4 RF exposure evaluation exemption for IC

The max tune-up peak conducted output power is 25 dBm at 914 MHz and the antenna gain is 1.2 dBi, so the e.i.r.p is 26.2 dBm (0.417 W).

Exemption from Routine Evaluation Limit is:

$$1.31 \times 10^{-2} f^{0.6834} = 1.31 \times 10^{-2} \times 914^{0.6834} = 1.38 \text{ W} = 31.41 \text{ dBm eirp}$$

Since the device's e.i.r.p output power is less than the limit, the device is exemption from Routine Evaluation Limits –RF exposure Evaluation.

## 6 FCC §15.207 and ISEDC RSS-Gen Clause 8.8 - AC Line Conducted Emissions

### 6.1 Applicable Standards

As per FCC §15.207 and ISEDC RSS-Gen §8.8 Conducted limits:

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 <sup>Note1</sup>	56 to 46 <sup>Note2</sup>
0.5-5	56	46
5-30	60	50

*Note1: Decreases with the logarithm of the frequency.*

*Note2: A linear average detector is required*

### 6.2 Test Setup

The measurement was performed at site, using the setup per ANSI C63.10-2013 measurement procedure. The specification used were FCC §15.207 and ISEDC RSS-Gen Clause 8.8 limits.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The AC/DC power adapter of the EUT was connected with LISN-1 which provided 120 V / 60 Hz AC power.

### 6.3 Test Procedure

During the conducted emissions test, the power cord of the EUT host system was connected to the mains outlet of the LISN-1.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data were recorded in the peak, quasi-peak, and average detection mode. Quasi-Peak readings are distinguished with a “QP.” Average readings are distinguished with an “Ave”.

## 6.4 Corrected Amplitude and Margin Calculation


The Corrected Amplitude (CA) is calculated by adding LISN/ISN VDF (Voltage Division Factor), the Cable Loss (CL), the Attenuator Factor (Atten) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = Ai + LISN\ VDF + CL + Atten$$

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

## 6.5 Test Setup Block Diagram

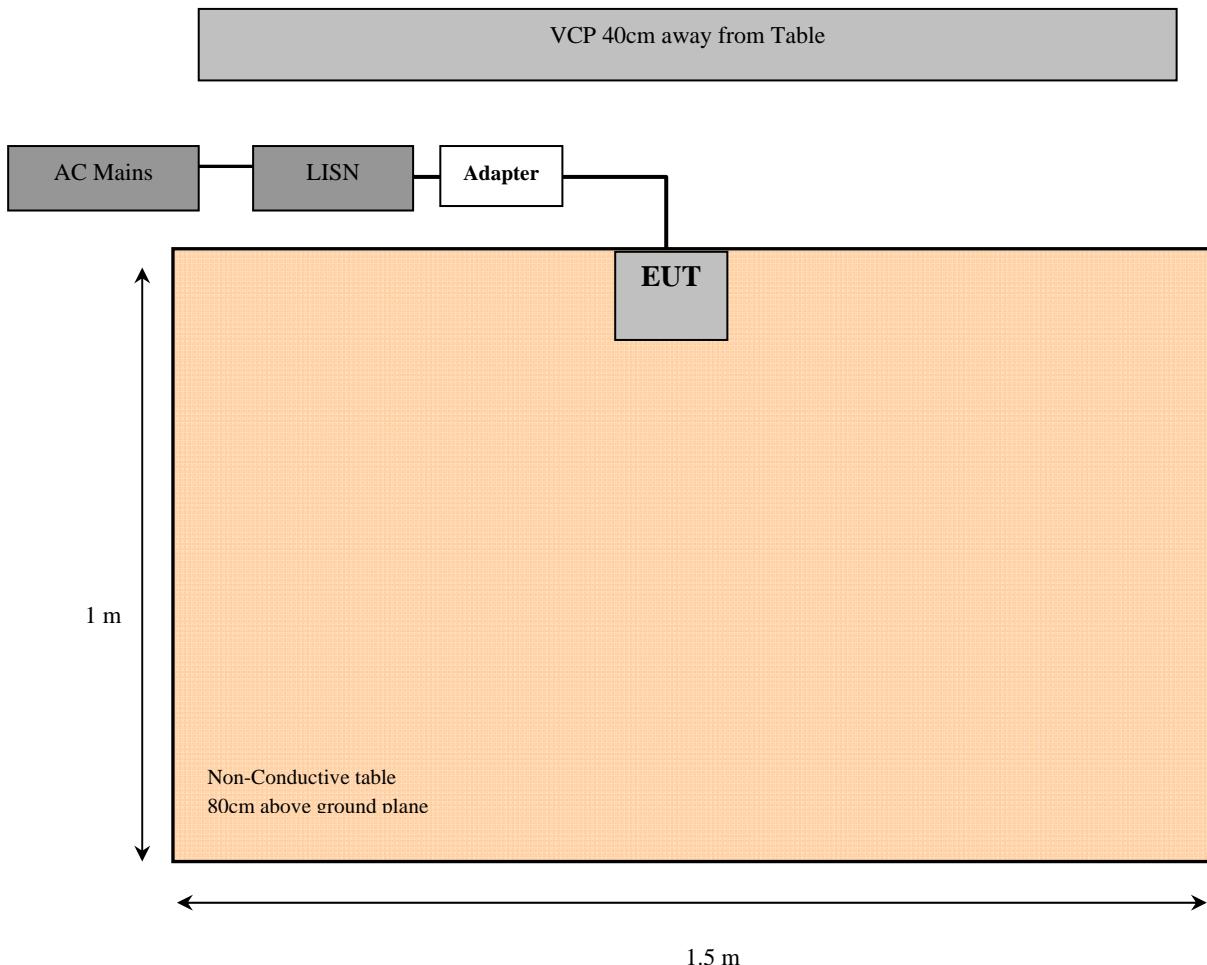

## 6.6 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde and Schwarz	Receiver, EMI Test	ESCI 1166.5950K03	100338	2016-02-04	2 years
Rohde and Schwarz	Impulse Limiter	ESH3-Z2	101964	2016-07-22	1 year
Solar Electronics Company	High Pass Filter	Type 7930-100	7930150204	2017-03-13	1 Year
Suirong	30 ft conductive emission cable	LMR 400	-	2017-03-05	1 year
FCC	LISN	FCC-LISN-50-25-2-10-CISPR16	160131	2016-04-25	1 year
Vasona	Test software	V6.0 build 11	10400213	N/R	N/R

**Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

## 6.7 Test Environmental Conditions

Temperature:	20° C
Relative Humidity:	36 %
ATM Pressure:	101 kPa

The testing was performed by Frank Wang on 2017-04-01 in BACL-USA's 5m3 chamber.

## 6.8 Summary of Test Results

According to the recorded data in following table, the EUT complied with the FCC 15C and ISEDC RSS-GEN standards' conducted emissions limits, with the margin reading of:


### 906-924 MHz

Connection: AC/DC adapter connected to 120 V/60 Hz, AC			
Margin (dB)	Frequency (MHz)	Conductor Mode (Line/Neutral)	Range (MHz)
-18.89	0.554053	Line	0.15-30

## 6.9 Conducted Emissions Test Plots and Data


906 - 924 MHz

120 V, 60 Hz – Line

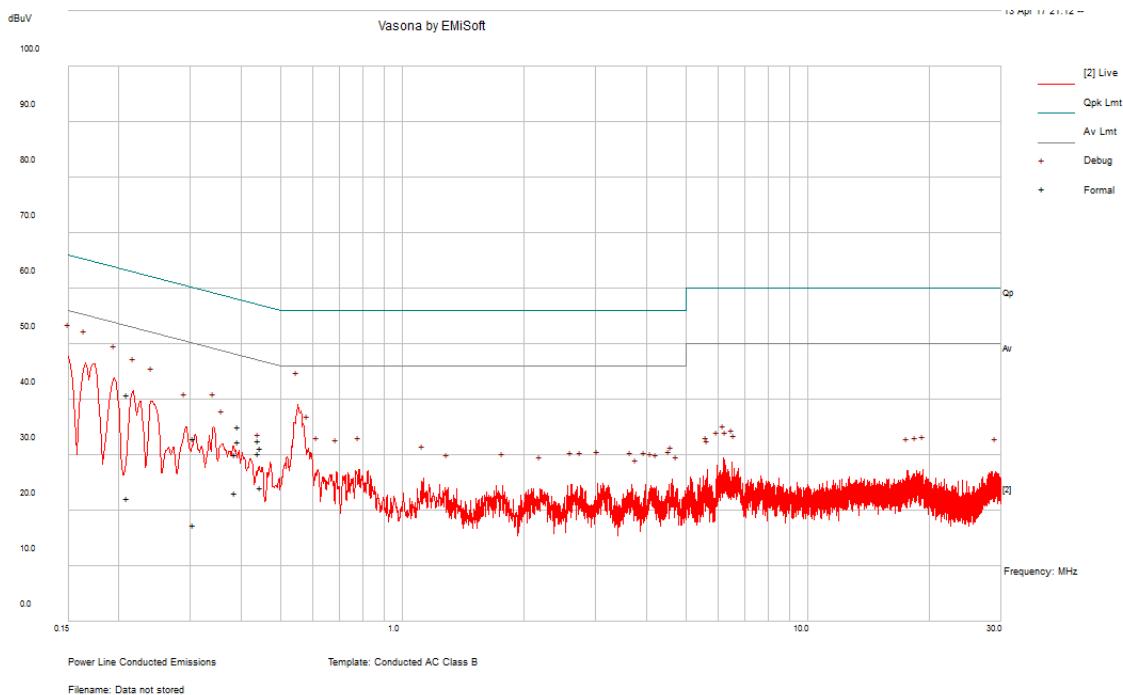

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.554053	36.87	Line	56	-19.13	QP
0.150348	45.53	Line	65.98	-20.45	QP
0.150146	45.01	Line	65.99	-20.98	QP
0.19065	41.21	Line	64.01	-22.8	QP
0.201282	38.56	Line	63.56	-25	QP
0.225948	35.67	Line	62.6	-26.93	QP

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.554053	27.11	Line	46	<b>-18.89</b>	Ave.
0.150348	28.34	Line	55.98	-27.64	Ave.
0.150146	28.59	Line	55.99	-27.4	Ave.
0.19065	29.57	Line	54.01	-24.44	Ave.
0.201282	22.61	Line	53.56	-30.95	Ave.
0.225948	21.01	Line	52.6	-31.59	Ave.

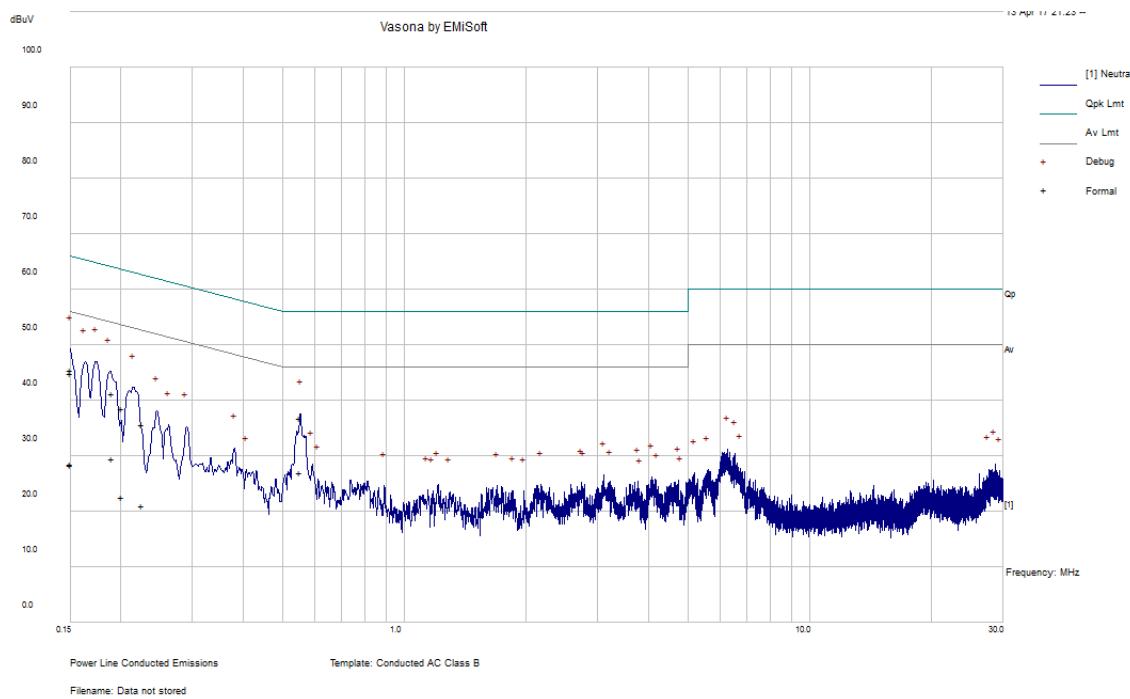**120 V, 60 Hz – Neutral**

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.150106	46.57	Neutral	65.99	-19.42	QP
0.165432	45.48	Neutral	65.19	-19.71	QP
0.164787	43.93	Neutral	65.22	-21.29	QP
0.553968	33.29	Neutral	56	-22.71	QP
0.16931	44.94	Neutral	64.99	-20.06	QP
0.199957	40.82	Neutral	63.61	-22.79	QP

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.150106	30.51	Neutral	55.99	-25.48	Ave.
0.165432	31.67	Neutral	55.19	-23.51	Ave.
0.164787	30.99	Neutral	55.22	-24.22	Ave.
0.553968	24.45	Neutral	46	-21.55	Ave.
0.16931	33.15	Neutral	54.99	-21.84	Ave.
0.199957	26.25	Neutral	53.61	-27.36	Ave.

## 7 FCC §15.209, §15.247(d) and ISEDC RSS-247 Clause 5.5, RSS-GEN Clause 8.9 & 8.10 - Spurious Radiated Emissions

### 7.1 Applicable Standards

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423		4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	960 – 1240	5.35 – 5.46
2.1735 – 2.1905	25.5 – 25.67	1300 – 1427	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1435 – 1626.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1645.5 – 1646.5	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1660 – 1710	9.3 – 9.5
6.215 – 6.218	108 – 121.94	1718.8 – 1722.2	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2200 – 2300	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2310 – 2390	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2483.5 – 2500	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	2690 – 2900	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3260 – 3267	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3.332 – 3.339	23.6 – 24.0
12.29 – 12.293	240 – 285	3.3458 – 3.358	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4	3.600 – 4.400	36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz.

However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC §15.247 (d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

As per ISEDC RSS-Gen 8.9,

Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in Table 4 or Table 5 below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

**Table 4 – General Field Strength Limits for Licence-Exempt Transmitters at Frequencies Above 30 MHz**

Frequency (MHz)	Field Strength (μv/m at 3 metres)
30-88	100
88-216	150
216-960	200
Above 960*	500

\* Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for license-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.

Note: Transmitting devices are not permitted in restricted frequency bands unless stated otherwise in the specific ISEDC RSS.

As per ISEDC RSS-247 Clause 5.5, in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

## 7.2 Test Setup

The radiated emissions tests were performed in the 5-meter Chamber, using the setup in accordance with ANSI C63.10-2013. The specification used was the subpart FCC 15C, ISED RSS-GEN, and ISED RSS-247 limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

## 7.3 Test Procedure

For the radiated emissions test, the EUT host, and all support equipment power cords were connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT was set 3 meter away from the testing antenna, which was varied from 1-4 meter, and the EUT was placed on a turntable, which was 0.8 meter and 1.5 meter above the ground plane for below and above 1000 MHz measurements, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna's polarity should be changed between horizontal and vertical.

The spectrum analyzer or receiver was set as:

Below 1000 MHz:

$$\text{RBW} = 100 \text{ kHz} / \text{VBW} = 300 \text{ kHz} / \text{Sweep} = \text{Auto}$$

Above 1000 MHz:

- (1) Peak:  $\text{RBW} = 1\text{MHz} / \text{VBW} = 1\text{MHz} / \text{Sweep} = \text{Auto}$
- (2) Average:  $\text{RBW} = 1\text{MHz} / \text{VBW} = 10 \text{ Hz} / \text{Sweep} = \text{Auto}$

## 7.4 Corrected Amplitude and Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$\text{CA} = \text{Ai} + \text{AF} + \text{CL} + \text{Atten} - \text{Ga}$$

For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

## 7.5 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde and Schwarz	Receiver, EMI Test	ESCI 1166.5950K03	100338	2016-02-04	2 year
Agilent	Analyzer, Spectrum	E4440A	US 42221851	2016-06-10	1 year
Sunol Science Corp	System Controller	SC99V	011003-1	N/R	N/R
Sunol Sciences	Antenna, Biconi-Log	JB3	A020106-2	2015-07-11	2 Years
EMCO	Antenna, Horn	3115	9511-4627	2016-01-28	2 years
HP	Amplifier, Pre	8447D	2944A06639	2016-06-28	1 year
IW	Yellow High Frequency Cable	DC 1531	SPS-2303-3840-SPS	2016-08-05	1 Year
Suirong	30 ft conductive emission cable	LMR400	C0013	2017-03-21	1 Year
Suirong	30 ft conductive emission cable	LMR400	C0014	2017-03-21	1 Year
Wainwright Instruments	Band Reject Filter	WRCGV900/930-880/950-40/8SS	-	Each time <sup>1</sup>	1 year
-	SMA cable	-	C0002	Each time <sup>1</sup>	N/A
HP	Pre-Amplifier	8449B OPT HO2	3008A0113	2016-05-23	1 year
Vasona	Test software	V6.0 build 11	10400213	N/R	N/R

Note<sup>1</sup>: cable and attenuator included in the test set-up will be checked each time before testing.

**Statement of Traceability:** *BACL attests that all calibrations have been performed per the A2LA requirements, traceable to NIST.*

## 7.6 Test Environmental Conditions

<b>Temperature:</b>	20-22 °C
<b>Relative Humidity:</b>	39-43 %
<b>ATM Pressure:</b>	101 kPa

*The testing was performed by Rudy Sun from 2017-04-12 in 5m chamber 3.*

## 7.7 Summary of Test Results

According to the data hereinafter, the EUT complied with FCC Title 47, subpart 15C, ISED RSS-GEN, and ISED RSS-247 standards' radiated emissions limits, and had the worst margin of:


### 906 -924 MHz

<b>Mode: Transmitting</b>			
<b>Margin (dB)</b>	<b>Frequency (MHz)</b>	<b>Polarization (Horizontal/Vertical)</b>	<b>Mode, channel</b>
-6.02	7392	Horizontal	924MHz

Please refer to the following table and plots for specific test result details.

## 7.8 Radiated Emissions Test Results

### 1) 30 MHz – 1 GHz Worst Case, Measured at 3 meters

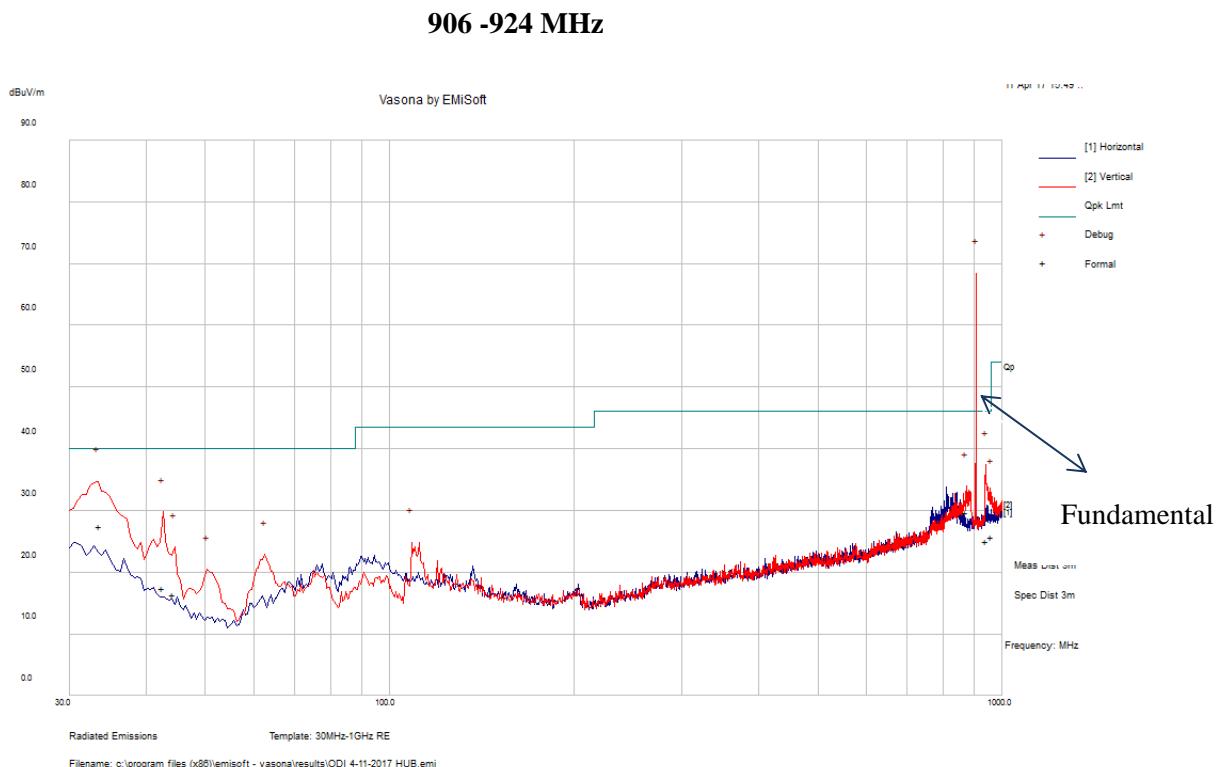

Frequency (MHz)	Corrected Amplitude (dB $\mu$ V/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dB $\mu$ V/m)	Margin (dB)	Comment
33.584	27.53	139	V	195	40	-12.47	QP
941.0145	25.1	145	V	87	46	-20.9	QP
42.64525	17.4	122	V	278	40	-22.6	QP
873.8808	29.67	157	V	202	46	-16.33	QP
958.6778	25.71	145	V	283	46	-20.29	QP
44.316	16.44	102	V	45	40	-23.56	QP

## 2) 1–10 GHz Measured at 3 meters

Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dB $\mu$ V/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dB $\mu$ V/m)	Margin (dB)	
Low Channel 906 MHz											
906	82.80	303	222	H	24.11	2.33	0.00	109.24	-	-	PK
906	81.06	303	222	H	24.11	2.33	0.00	107.50	-	-	AV
906	92.06	250	234	V	24.11	2.33	0.00	118.50	-	-	PK
906	90.37	250	234	V	24.11	2.33	0.00	116.81	-	-	AV
1812	65.70	303	222	H	26.88	3.35	38.75	57.18	79.24	-22.06	PK
1812	62.18	303	222	H	26.88	3.35	38.75	53.66	77.50	-23.84	AV
1812	63.27	250	234	V	26.88	3.35	38.75	54.75	88.50	-33.75	PK
1812	59.76	250	234	V	26.88	3.35	38.75	51.24	86.81	-35.57	AV
2718	54.97	303	222	H	29.01	3.79	39.46	48.31	74.00	-25.69	PK
2718	48.44	303	222	H	29.01	3.79	39.46	41.78	54.00	-12.22	AV
2718	56.87	250	234	V	29.01	3.79	39.46	50.21	74.00	-23.79	PK
2718	51.14	250	234	V	29.01	3.79	39.46	44.48	54.00	-9.52	AV
3624	49.46	303	222	H	31.78	4.70	39.20	46.74	74.00	-27.26	PK
3624	41.54	303	222	H	31.78	4.70	39.20	38.82	54.00	-15.18	AV
3624	49.81	250	234	V	31.78	4.70	39.20	47.09	74.00	-26.91	PK
3624	40.86	250	234	V	31.78	4.70	39.20	38.14	54.00	-15.86	AV
4530	48.83	303	222	H	32.26	5.10	38.56	47.63	74.00	-26.37	PK
4530	39.39	303	222	H	32.26	5.10	38.56	38.19	54.00	-15.81	AV
4530	48.67	250	234	V	32.26	5.10	38.56	47.47	74.00	-26.53	PK
4530	39.49	250	234	V	32.26	5.10	38.56	38.29	54.00	-15.71	AV
5436	47.21	303	222	H	34.09	5.50	38.33	48.47	74.00	-25.53	PK
5436	38.03	303	222	H	34.09	5.50	38.33	39.29	54.00	-14.71	AV
5436	48.51	250	234	V	34.09	5.50	38.33	49.77	74.00	-24.23	PK
5436	38.02	250	234	V	34.09	5.50	38.33	39.28	54.00	-14.72	AV
6342	65.79	303	222	H	34.42	6.10	37.97	68.34	79.24	-10.90	PK
6342	60.05	303	222	H	34.42	6.10	37.97	62.60	77.50	-14.90	AV
6342	61.93	250	234	V	34.42	6.10	37.97	64.48	88.50	-24.02	PK
6342	55.92	250	234	V	34.42	6.10	37.89	58.55	86.81	-28.26	AV
7248	49.36	303	222	H	36.39	6.91	37.89	54.77	79.24	-24.47	PK
7248	39.98	303	222	H	36.39	6.91	37.89	45.39	77.50	-32.11	AV
7248	49.76	250	234	V	36.39	6.91	37.89	55.17	88.50	-33.33	PK
7248	40.00	250	234	V	36.39	6.91	39.20	44.10	86.81	-42.71	AV
8154	49.22	303	222	H	36.89	6.80	37.88	55.03	74.00	-18.97	PK
8154	39.82	303	222	H	36.89	6.80	37.88	45.63	54.00	-8.37	AV
8154	50.38	250	234	V	36.89	6.80	37.88	56.19	74.00	-17.81	PK
8154	39.85	250	234	V	36.89	6.80	37.88	45.66	54.00	-8.34	AV
9060	49.10	303	222	H	37.80	7.30	38.08	56.12	74.00	-17.88	PK
9060	38.76	303	222	H	37.80	7.30	38.08	45.78	54.00	-8.22	AV
9060	49.47	250	234	V	37.80	7.30	38.08	56.49	74.00	-17.51	PK
9060	39.10	250	234	V	37.80	7.30	38.08	46.12	54.00	-7.88	AV

Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dB $\mu$ V/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dB $\mu$ V/m)	Margin (dB)	
Middle Channel 914 MHz											
914	84.13	296	224	H	24.11	2.33	0.00	110.57	-	-	PK
914	82.36	296	224	H	24.11	2.33	0.00	108.80	-	-	AV
914	93.50	337	174	V	24.11	2.33	0.00	119.94	-	-	PK
914	91.46	337	174	V	24.11	2.33	0.00	117.90	-	-	AV
1828	64.05	296	224	H	26.88	3.35	38.75	55.53	80.57	-25.04	PK
1828	60.49	296	224	H	26.88	3.35	38.75	51.97	78.80	-26.83	AV
1828	58.58	337	174	V	26.88	3.35	38.75	50.06	89.94	-39.88	PK
1828	51.17	337	174	V	26.88	3.35	38.75	42.65	87.90	-45.25	AV
2742	50.61	296	224	H	29.01	3.79	39.46	43.95	74.00	-30.05	PK
2742	43.54	296	224	H	29.01	3.79	39.46	36.88	54.00	-17.12	AV
2742	49.95	337	174	V	29.01	3.79	39.46	43.29	74.00	-30.71	PK
2742	41.02	337	174	V	29.01	3.79	39.46	34.36	54.00	-19.64	AV
3656	47.50	296	224	H	31.78	4.70	39.20	44.78	74.00	-29.22	PK
3656	39.73	296	224	H	31.78	4.70	39.20	37.01	54.00	-16.99	AV
3656	49.38	337	174	V	31.78	4.70	39.20	46.66	74.00	-27.34	PK
3656	40.42	337	174	V	31.78	4.70	39.20	37.70	54.00	-16.30	AV
4570	45.97	296	224	H	32.26	5.10	38.56	44.77	74.00	-29.23	PK
4570	36.36	296	224	H	32.26	5.10	38.56	35.16	54.00	-18.84	AV
4570	49.25	337	174	V	32.26	5.10	38.56	48.05	74.00	-25.95	PK
4570	40.02	337	174	V	32.26	5.10	38.56	38.82	54.00	-15.18	AV
5484	43.30	296	224	H	34.09	5.50	38.33	44.56	80.57	-36.01	PK
5484	34.03	296	224	H	34.09	5.50	38.33	35.29	78.80	-43.51	AV
5484	47.56	337	174	V	34.09	5.50	38.33	48.82	89.94	-41.12	PK
5484	38.02	337	174	V	34.09	5.50	38.33	39.28	87.90	-48.62	AV
6398	67.10	296	224	H	34.42	6.10	37.97	69.65	80.57	-10.92	PK
6398	60.67	296	224	H	34.42	6.10	37.97	63.22	78.80	-15.58	AV
6398	69.48	337	174	V	34.42	6.10	37.97	72.03	89.94	-17.91	PK
6398	63.08	337	174	V	34.42	6.10	37.89	65.71	87.90	-22.19	AV
7312	46.07	296	224	H	36.39	6.91	37.89	51.48	74.00	-22.52	PK
7312	37.79	296	224	H	36.39	6.91	37.89	43.20	54.00	-10.80	AV
7312	50.94	337	174	V	36.39	6.91	37.89	56.35	74.00	-17.65	PK
7312	41.82	337	174	V	36.39	6.91	39.20	45.92	54.00	-8.08	AV
8226	44.96	296	224	H	36.89	6.80	37.88	50.77	74.00	-23.23	PK
8226	34.48	296	224	H	36.89	6.80	37.88	40.29	54.00	-13.71	AV
8226	49.23	337	174	V	36.89	6.80	37.88	55.04	74.00	-18.96	PK
8226	39.14	337	174	V	36.89	6.80	37.88	44.95	54.00	-9.05	AV
9140	44.31	296	224	H	37.80	7.30	38.08	51.33	74.00	-22.67	PK
9140	34.38	296	224	H	37.80	7.30	38.08	41.40	54.00	-12.60	AV
9140	43.90	337	174	V	37.80	7.30	38.08	50.92	74.00	-23.08	PK
9140	34.45	337	174	V	37.80	7.30	38.08	41.47	54.00	-12.53	AV

Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dB $\mu$ V/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dB $\mu$ V/m)	Margin (dB)	
High Channel 924 MHz											
924	84.27	101	292	H	24.11	2.33	0.00	110.71	-	-	PK
924	82.34	101	292	H	24.11	2.33	0.00	108.78	-	-	AV
924	93.80	323	116	V	24.11	2.33	0.00	120.24	-	-	PK
924	91.34	323	116	V	24.11	2.33	0.00	117.78	-	-	AV
1848	63.08	101	292	H	26.88	3.35	38.75	54.56	80.71	-26.15	PK
1848	59.28	101	292	H	26.88	3.35	38.75	50.76	78.78	-28.02	AV
1848	63.10	323	116	V	26.88	3.35	38.75	54.58	90.24	-35.66	PK
1848	56.62	323	116	V	26.88	3.35	38.75	48.10	87.78	-39.68	AV
2772	49.87	101	292	H	29.01	3.79	39.46	43.21	74.00	-30.79	PK
2772	39.36	101	292	H	29.01	3.79	39.46	32.70	54.00	-21.30	AV
2772	49.46	323	116	V	29.01	3.79	39.46	42.80	74.00	-31.20	PK
2772	39.36	323	116	V	29.01	3.79	39.46	32.70	54.00	-21.30	AV
3696	48.63	101	292	H	31.78	4.70	39.20	45.91	74.00	-28.09	PK
3696	38.95	101	292	H	31.78	4.70	39.20	36.23	54.00	-17.77	AV
3696	52.74	323	116	V	31.78	4.70	39.20	50.02	74.00	-23.98	PK
3696	42.96	323	116	V	31.78	4.70	39.20	40.24	54.00	-13.76	AV
4620	47.57	101	292	H	32.26	5.10	38.56	46.37	74.00	-27.63	PK
4620	38.11	101	292	H	32.26	5.10	38.56	36.91	54.00	-17.09	AV
4620	47.88	323	116	V	32.26	5.10	38.56	46.68	74.00	-27.32	PK
4620	38.59	323	116	V	32.26	5.10	38.56	37.39	54.00	-16.61	AV
5544	48.27	101	292	H	34.09	5.50	38.33	49.53	80.71	-31.18	PK
5544	38.58	101	292	H	34.09	5.50	38.33	39.84	78.78	-38.94	AV
5544	47.78	323	116	V	34.09	5.50	38.33	49.04	90.24	-41.20	PK
5544	39.33	323	116	V	34.09	5.50	38.33	40.59	87.78	-47.19	AV
6468	65.48	101	292	H	34.42	6.10	37.97	68.03	80.71	-12.68	PK
6468	57.84	101	292	H	34.42	6.10	37.97	60.39	78.78	-18.39	AV
6468	64.31	323	116	V	34.42	6.10	37.97	66.86	90.24	-23.38	PK
6468	56.95	323	116	V	34.42	6.10	37.89	59.58	87.78	-28.20	AV
7392	51.15	101	292	H	36.39	6.91	37.89	56.56	74.00	-17.44	PK
7392	42.57	101	292	H	36.39	6.91	37.89	47.98	54.00	<b>-6.02</b>	AV
7392	50.14	323	116	V	36.39	6.91	37.89	55.55	74.00	-18.45	PK
7392	40.45	323	116	V	36.39	6.91	39.20	44.55	54.00	-9.45	AV
8316	48.42	101	292	H	36.89	6.80	37.88	54.23	74.00	-19.77	PK
8316	38.92	101	292	H	36.89	6.80	37.88	44.73	54.00	-9.27	AV
8316	48.13	323	116	V	36.89	6.80	37.88	53.94	74.00	-20.06	PK
8316	38.90	323	116	V	36.89	6.80	37.88	44.71	54.00	-9.29	AV
9240	48.70	101	292	H	37.80	7.30	38.08	55.72	80.71	-24.99	PK
9240	38.93	101	292	H	37.80	7.30	38.08	45.95	78.78	-32.83	AV
9240	48.16	323	116	V	37.80	7.30	38.08	55.18	90.24	-35.06	PK
9240	38.91	323	116	V	37.80	7.30	38.08	45.93	87.78	-41.85	AV

## **8 FCC §15.247(a) (2) and ISEDC RSS-247 Clause 5.2 -Emission Bandwidth**

### **8.1 Applicable Standards**

FCC §15.247(a) (2) and ISEDC RSS-247 Clause 5.2

### **8.2 Test Results**

Please refer to the Report: R1702012-247 (Sensor) section 7 (FCC ID: 2AK4V-DT-502, IC: 22517:DT502).

---

## **9 FCC §15.247(b) (3) and ISEDC RSS-247 Clause 5.4 (d) - Output Power Measurement**

---

### **9.1 Applicable Standards**

FCC §15.247(b) (3) and ISEDC RSS-247 Clause 5.4 (d)

### **9.2 Test Results**

Please refer to the Report: R1702012-247 (Sensor) section 8 (FCC ID: 2AK4V-DT-502, IC: 22517:DT502).

---

## **10 FCC §15.247(d) and ISEDC RSS-247 Clause 5.5 – 100 kHz Bandwidth of Band Edges**

---

### **10.1 Applicable Standards**

FCC §15.247(d) and ISEDC RSS-247 Clause 5.5

### **10.2 Test Results**

Please refer to the Report: R1702012-247 (Sensor) section 9 (FCC ID: 2AK4V-DT-502, IC: 22517:DT502).

## **11 FCC §15.247(e) and ISEDC RSS-247 Clause 5.2(b) – Power Spectral Density**

### **11.1 Applicable Standards**

FCC §15.247(e) and ISEDC RSS-247 Clause 5.2(b)

### **11.2 Test Results**

Please refer to the Report: R1702012-247 (Sensor) section 10 (FCC ID: 2AK4V-DT-502, IC: 22517:DT502).

---

## **12 FCC §15.247(d) and ISEDC RSS-247 Clause 5.5– Spurious Emissions at Antenna Terminals**

---

### **12.1 Applicable Standards**

FCC §15.247(d) and ISEDC RSS-247 Clause 5.5

### **12.2 Test Results**

Please refer to the Report: R1702012-247 (Sensor) section 11 (FCC ID: 2AK4V-DT-502, IC: 22517:DT502).