

S

T

S

L

A

B



RADIO TEST REPORT

Report No.: STS2007352W11

Issued for

Shanghai Unihertz E-Commerce Co., Ltd

Room 302, No. 5, Lane 59, Shennan Rd, Minhang district ,
Shanghai, China 201108

Product Name:	Smart phone
Brand Name:	Unihertz
Model Name:	Jelly2
Series Model:	N/A
FCC ID:	2AK6CJELLY2
Test Standard:	FCC Part 22H and 24E, 27

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.

Shenzhen STS Test Services Co., Ltd.
A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ,
Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail: sts@stsapp.com



**TEST RESULT CERTIFICATION**

Applicant's Name: Shanghai Unihertz E-Commerce Co., Ltd
Address.....: Room 302, No. 5, Lane 59, Shennan Rd, Minhang district ,
Shanghai, China 201108
Manufacturer's Name: OBLUE Communication Technology Co., Ltd.
Address.....: 7th floor, building B, dayou industrial and trade industrial park,
heping yonghe road, fuyong street, baoan district, shenzhen,
China.

Product Description

Product Name: Smart phone
Brand Name: Unihertz
Model Name.....: Jelly2
Series Model: N/A
Test Standards: FCC Part 22H and 24E, 27
Test Procedure: KDB 971168 D01 v03r01, ANSI C63.26(2015)

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document..

Date of Test.....:

Date of receipt of test item: 30 July 2020
Date (s) of performance of tests : 30 July 2020 ~ 21 Aug. 2020
Date of Issue: 21 Aug. 2020
Test Result: Pass

Testing Engineer :

(Chris Chen)

Technical Manager :

(Sean she)

Authorized Signatory :

(Vita Li)





Table of Contents	Page
1 INTRODUCTION	6
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 PRODUCT INFORMATION	7
3 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
4 MEASUREMENT INSTRUMENTS	11
5 TEST ITEMS	12
5.1 CONDUCTED OUTPUT POWER	12
5.2 PEAK TO AVERAGE RATIO	13
5.3 TRANSMITTER RADIATED POWER (EIRP/ERP)	14
5.4 OCCUPIED BANDWIDTH	15
5.5 FREQUENCY STABILITY	16
5.6 SPURIOUS EMISSIONS AT ANTENNA TERMINALS	17
5.7 BAND EDGE	18
5.8 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	19
APPENDIX A.TESTRESULT	21
A1. CONDUCTED OUTPUT POWER	21
A2. PEAK-TO-AVERAGE RADIO	27
A3. TRANSMITTER RADIATED POWER (EIRP/ERP)	41
A4. OCCUPIED BANDWIDTH (99% OCCUPIED BANDWIDTH/26DB BANDWIDTH)	45
A5. FREQUENCY STABILITY	58
A6. SPURIOUS EMISSIONS AT ANTENNA TERMINALS	65
A7. BAND EDGE	77
A8. FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	86
APPENDIX-PHOTOS OF TEST SETUP	105

**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	21 Aug. 2020	STS2007352W11	ALL	Initial Issue





SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

The radiated emission testing was performed according to the procedures of KDB 971168 D01 v03r01 and ANSI C63.26(2015)

FCC Rules	Test Description	Test Limit	Test Result	Reference
2.1046	Conducted Output Power	Reporting Only	PASS	
22.913d 24.232d	Peak-to-Average Ratio	< 13 dB	PASS	
2.1046 22.913 24.232 27.50	Effective Radiated Power/Equivalent Isotropic Radiated Power	< 7 Watts max. ERP(Part 22) < 2 Watts max. EIRP(Part 24) <1 Watts max. EIRP(Part 27)	PASS	
2.1049 22.917 24.238 27.53	Occupied Bandwidth	Reporting Only	PASS	
2.1055 22.355 24.235 27.54	Frequency Stability	< 2.5 ppm (Part 22) Emission must remain in band (Part 24) Emission must remain in band (Part 27)	PASS	
2.1051 22.917 24.238 27.53	Spurious Emission at Antenna Terminals	< 43+10log10(P[Watts])	PASS	
2.1053 22.917 24.238 27.53	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	
2.1051 22.917 24.238 27.53	Band Edge	< 43+10log10(P[Watts])	PASS	



1 INTRODUCTION

1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement data shown herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.68\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.988\text{dB}$
3	All emissions, radiated 30-1GHz	$\pm 5.6\text{dB}$
4	All emissions, radiated 1G-6GHz	$\pm 5.5\text{dB}$
5	All emissions, radiated >6G	$\pm 5.8\text{dB}$
6	Conducted Emission (9KHz-150KHz)	$\pm 3.37\text{dB}$
7	Conducted Emission (150KHz-30MHz)	$\pm 3.83\text{dB}$



2 PRODUCT INFORMATION

Product Name	Smart phone
Trade Name	Unihertz
Model Name	Jelly2
Series Model	N/A
Model Difference	N/A
Tx Frequency:	GSM/GPRS/EDGE: 850: 824 MHz ~ 849MHz 1900: 1850 MHz ~ 1910MHz WCDMA: Band V: 824 MHz ~ 849 MHz Band II: 1850 MHz ~ 1910 MHz Band IV: 1710 MHz ~ 1755 MHz EVDO&CDMA: BC0: 824.70 MHz~ 848.31 MHz BC1: 1851.25 MHz~ 1908.75 MHz
Rx Frequency:	GSM/GPRS/EDGE: 850: 869 MHz ~ 894 MHz 1900: 1930 MHz ~ 1990MHz WCDMA: Band V: 869 MHz ~ 894 MHz Band II: 1930 MHz ~ 1990 MHz Band IV: 2110 MHz ~ 2155 MHz EVDO&CDMA: BC0: 869.70 MHz~ 894.30 MHz BC1: 1931.25 MHz~ 1988.75 MHz
Max RF Output Power:	GSM850:32.69dBm, PCS1900:28.20dBm GPRS850(1-Slot):32.65dBm, GPRS1900(1-Slot):28.25dBm GPRS850(2-Slot):32.21dBm, GPRS1900(2-Slot):27.83dBm GPRS850(3-Slot):31.74dBm, GPRS1900(3-Slot):27.39dBm GPRS850(4-Slot):31.28dBm, GPRS1900(4-Slot):26.93dBm EDGE 850(1-Slot):31.88dBm, EDGE 1900(1-Slot):28.12dBm EDGE 850(2-Slot):31.16dBm, EDGE 1900(2-Slot):27.42dBm EDGE 850(3-Slot):30.40dBm, EDGE 1900(3-Slot):26.64dBm EDGE 850(4-Slot):29.61dBm, EDGE 1900(4-Slot):25.80dBm WCDMA Band V:22.79dBm, WCDMA Band II:23.04dBm WCDMA Band IV:23.76dBm EVDO BC0:23.13dBm, EVDO BC1:23.92dBm CDMA BC0:23.27dBm, CDMA BC1:24.08dBm
Type of Emission:	GSM(850): 249KGXW; PCS(1900): 245KGXW GPRS(850): 246KGXW; GPRS(1900): 248KGXW EDGE(850): 243KG7W; EDGE(1900): 247KG7W WCDMA850: 4M18F9W WCDMA1900: 4M19F9W WCDMA1700: 4M19F9W EVDO BC0: 1M29F9W; EVDO BC1: 1M29F9W CDMA BC0: 1M29F9W; CDMA BC1: 1M28F9W
Modulation Characteristics:	GMSK for GSM/GPRS; GMSK and 8PSK for EDGE WCDMA: QPSK; HSDPA:QPSK/16QAM; HSUPA:BPSK



SIM Card:	Only support single SIM Card. / SIM 1 and SIM 2 is a chipset unit and tested as single chipset, SIM 1 is used to tested.
Antenna:	PIFA
Antenna gain:	GSM 850: -1.47dBi ,PCS 1900:-0.69dBiWCDMA 850: --1.45dBi, WCDMA1900: -0.67dBi, WCDMA1700:-0.67dBi BC0: -1.35dBi,BC1: -1.28 dBi
Battery parameter:	Rated Voltage: 3.85V Charge Limit: 4.4V Capacity: 2000MAH
Adapter:	Input: 100-240V-50/60HZ 0.3A Output: 5.0V-1.5A 7.5W
GPRS/EDGE Class:	Multi-Class12
Extreme Vol. Limits:	DC 3.55V~ DC 4.4(Normal: DC 3.85V)
Extreme Temp. Tolerance:	-30℃ to +50℃
Hardware version number:	G55_V1.1
Software version number:	Unihertz_Jelly2_20200506
** Note: The High Voltage 3.55V and Low Voltage 4.4V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.	



3 TEST CONFIGURATION OF EQUIPMENT UNDER TEST

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 and ANSI C63.26 2015 Power Meas. License Digital Systems with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 10th harmonic for GSM850 and WCDMA Band V.
2. 30 MHz to 10th harmonic for WCDMA Band IV.
3. 30 MHz to 10th harmonic for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

BAND	TEST MODES	
	RADIATED TCS	CONDUCTED TCS
GSM 850	GSM LINK GPRS/EDGE CLASS 12 LINK	GSM LINK GPRS/EDGE CLASS 12 LINK
GSM 1900	GSM LINK GPRS/EDGE CLASS 12 LINK	GSM LINK GPRS/EDGE CLASS 12 LINK
WCDMA BAND V	RMC 12.2KBPS LINK	RMC 12.2KBPS LINK
WCDMA BAND II	RMC 12.2KBPS LINK	RMC 12.2KBPS LINK
WCDMA BAND IV	RMC 12.2KBPS LINK	RMC 12.2KBPS LINK



RF Function	Band	Mode	Modulation	Power Class	Ant Gain(dBi)	Ant Type	SIM Card
GSM	850	GSM	GMSK	4(power control level 5)	GSM850:-1.47dBi GSM1800:-0.69dBi	PIFA	2 SIM 1 is used to tested.
		GPRS (Class12)	GMSK	4			
		EDGE(Class12)	GMSK, 8PSK	E2			
	1900	GSM	GMSK	1(power control level 0)			
		GPRS (Class12)	GMSK	1			
		EDGE(Class12)	GMSK, 8PSK	E2			
RF Function	Band	Mode	Modulation	Power Class	Ant Gain(dBi)	Ant Type	SIM Card
WCDMA	2/4/5	WCDMA	QPSK	3	WCDMA2:0.8dBi WCDMA5:0.7dBi	PIFA	2 SIM 1 is used to tested.
		HSDPA	QPSK, 16QAM				
		HSUPA	BPSK				
RF Function	Band	Mode	Modulation	Power Class	Ant Gain(dBi)	Ant Type	SIM Card
CDMA	BC0/BC1	CDMA	QPSK	III	BC0: -1.35dBi BC1: -1.28 dBi	PIFA	2 SIM 1 is used to tested.
		EVDO	QPSK				





4 MEASUREMENT INSTRUMENTS

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2019.10.09	2020.10.08
Signal Analyzer	Agilent	N9020A	MY51110105	2020.03.05	2021.03.04
Wireless Communications Test Set	R&S	CMW 500	133884	2020.03.05	2021.03.04
Bilog Antenna	TESEQ	CBL6111D	34678	2017.11.02	2020.11.01
Horn Antenna	SCHWARZBECK	BBHA 9120D(1201)	9120D-1343	2018.10.19	2021.10.18
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	J211020657	2018.03.11	2021.03.10
Pre-Amplifier (0.1M-3GHz)	EM	EM330	060665	2019.10.09	2020.10.08
Pre-Amplifier (1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2019.10.12	2020.10.11
Pre-Amplifier (18G-40GHz)	SKET	LNPA-1840-50	SK2018101801	2019.10.12	2020.10.11
Turn table	EM	SC100_1	60531	N/A	N/A
Antenna mast	EM	SC100	N/A	N/A	N/A
Temperature & Humidity	HH660	Mieo	N/A	2019.10.17	2020.10.16
Test SW	BULUN	BL410-E/18.905			

RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Universal Radio communication tester	R&S	CMU200	119907	2020.10.11	2021.10.10
Wireless Communications Test Set	R&S	CMW 500	133884	2020.03.05	2021.03.04
Signal Analyzer	Agilent	N9020A	MY49100060	2019.10.09	2020.10.08
Temperature & Humidity	HH660	Mieo	N/A	2019.10.17	2020.10.16
Test SW	FARAD	LZ-RF /LzRf-3A3			

Equipment with a calibration date of "NCR" shown in this list was not used to make direct calibrated measurements.



5 TEST ITEMS

5.1 CONDUCTED OUTPUT POWER

TEST OVERVIEW

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

TEST PROCEDURES

1. The transmitter output port was connected to the system simulator.
2. Set eut at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

TEST SETUP



TEST RESULT

Note: Test data See Appendix 1.

5.2 PEAK TO AVERAGE RATIO


TEST OVERVIEW

According to §24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 db.

TEST PROCEDURES

1. The testing follows fcckdb 971168 v03r01 section.
2. The eut was connected to the peak and av system simulator& spectrum analyzer.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Set the test probe and measure average power of the spectrum analysis,

TEST SETUP

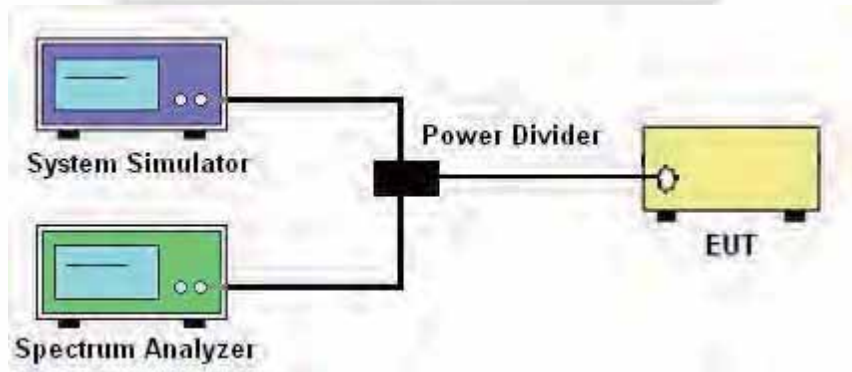

TEST RESULT

Note: Test data See Appendix 2.



5.3 TRANSMITTER RADIATED POWER (EIRP/ERP)

TEST OVERVIEW

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI C63.26 2015 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

TEST PROCEDURE

1. The testing follows FCC KDB 971168 Section 5.8 and ANSI C63.26-2015 Section 5.2.
2. The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.
3. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
4. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
5. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a nonradiating cable. The absolute levels of the spurious emissions were measured by the substitution.
6. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to ANSI C63.26-2015. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna.
The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain – Analyzer reading.
Then the EUT's EIRP/ERP was calculated with the correction factor, $EIRP = P_{SG} + GT - LC$,
 $ERP = EIRP - 2.15$ in radiated method
ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as P_{Meas} as, typically dBW or dBm);
P_{Meas}(PK) = measured transmitter output power or PSD, in dBm or dBW;
GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);
LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

TEST RESULT

Note: Test data See Appendix 3.



5.4 OCCUPIED BANDWIDTH

TEST OVERVIEW

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.


The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

All modes of operation were investigated and the worst case configuration results are reported in this section.

TEST PROCEDURE

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. $RBW = 1 - 5\%$ of the expected OBW
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

TEST SETUP

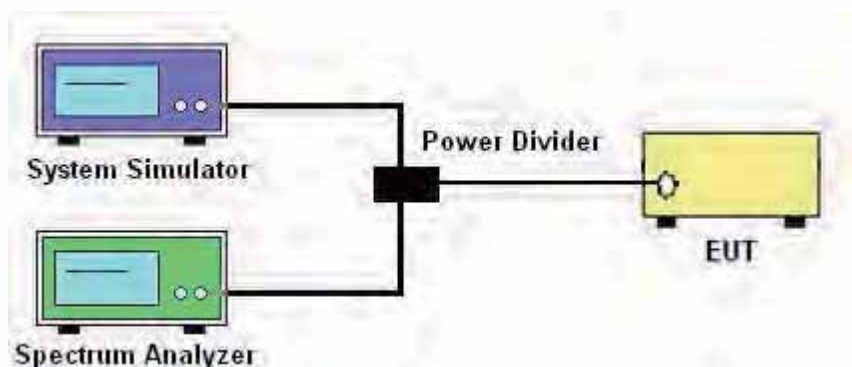

TEST RESULT

Note: Test data See Appendix 4.

5.5 FREQUENCY STABILITY

TEST OVERVIEW

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26 2015. The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is varied from -30°C to $+50^{\circ}\text{C}$ in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24 the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE


Temperature Variation

1. The testing follows fccfdb 971168 D01 section 9.0
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

Voltage Variation

1. The testing follows FCC KDB 971168 D01 Section 9.0.
2. The EUT was placed in a temperature chamber at $25 \pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

TEST SETUP

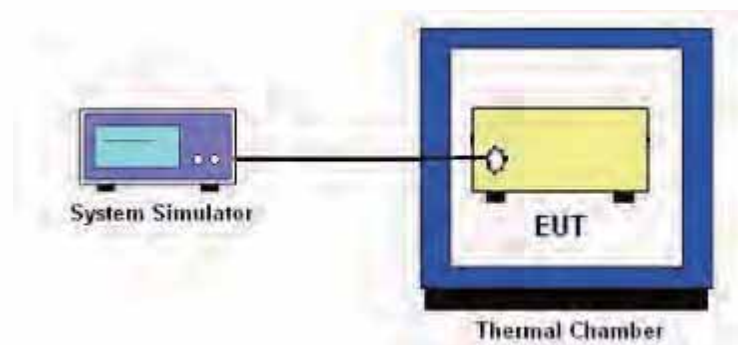

TEST RESULT

Note: Test data See Appendix 5.

5.6 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

TEST OVERVIEW

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log(P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

TEST PROCEDURE

1. The testing FCC KDB 971168 D01 v03r01 Section 6.0. and ANSI C63.26-2015-Section 5.7.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm}.$$

TEST SETUP

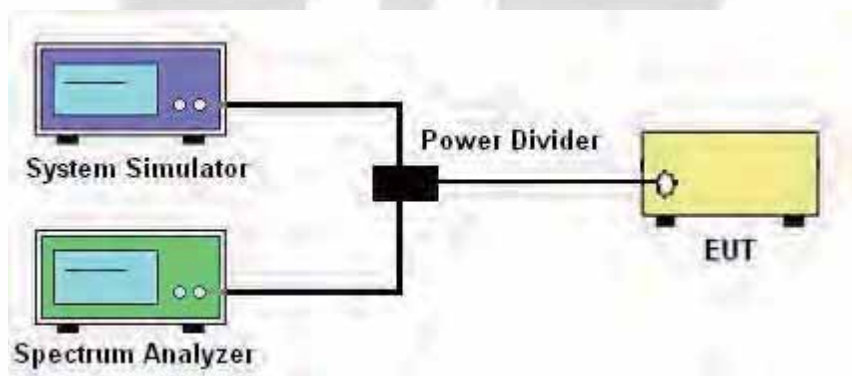

TEST RESULT

Note: Test data See Appendix 6.

5.7 BAND EDGE

TEST OVERVIEW


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

TEST PROCEDURE

1. The testing FCC KDB 971168 D01 v03r01 Section 6.0 and ANSI C63.26-2015-Section 5.7
2. Start and stop frequency were set such that the band edge would be placed in the center of the Plot.
3. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
4. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
5. The band edges of low and high channels for the highest RF powers were measured.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

TEST SETUP

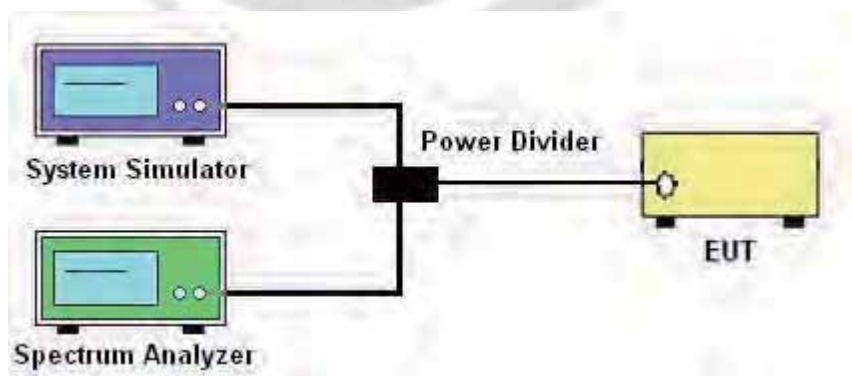

TEST RESULT

Note: Test data See Appendix 7.



5.8 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT

TEST OVERVIEW

Radiated spurious emissions measurements are performed using the substitution method described in ANSI C63.26-2015 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power and at the appropriate frequencies.


It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

TEST PROCEDURE


1. The testing FCC KDB 971168 D01 Section 5.8 and ANSI C63.26-2015-Section 5.5.
2. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span/RBW
6. Detector = Peak
7. Trace mode = max hold
8. The trace was allowed to stabilize
9. Effective Isotropic Spurious Radiation was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna.
The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP/ERP was calculated with the correction factor, $ERP/EIRP = P.SG + GT - LC$
ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as P_{Meas}, typically dBW or dBm);
P.SG = measured transmitter output power or PSD, in dBm or dBW;
GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);
LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

TEST SETUP

For radiated test from 30MHz to 1GHz

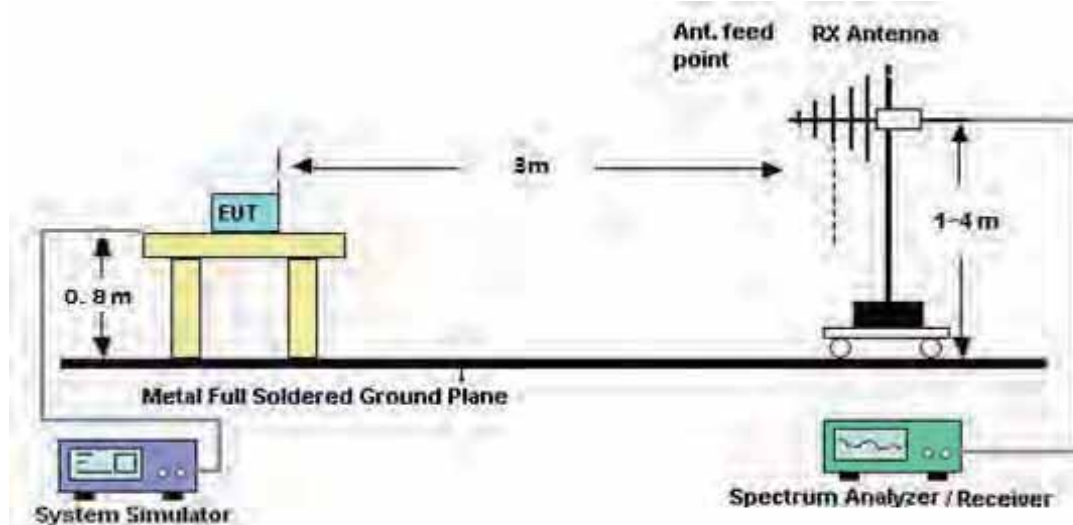

For radiated test from above 1GHz

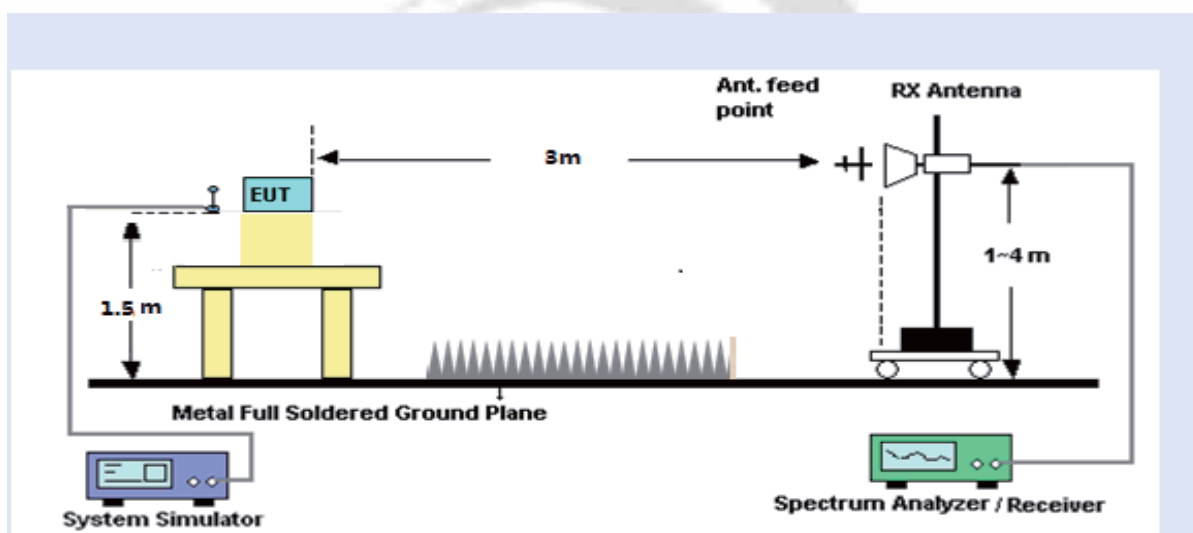

TEST RESULT

Note: Test data See Appendix 8.



APPENDIX A.TESTRESULT

A1. CONDUCTED OUTPUT POWER

GSM 850:

GSM 850		
Mode	Frequency (MHz)	AVG Power(dBm)
GSM (GMSK,1-Slot)	824.2	32.34
	836.6	32.62
	848.8	32.69
GPRS (GMSK,1-Slot)	824.2	32.33
	836.6	32.59
	848.8	32.65
GPRS (GMSK,2-Slot)	824.2	31.90
	836.6	32.18
	848.8	32.21
GPRS (GMSK,3-Slot)	824.2	31.45
	836.6	31.69
	848.8	31.74
GPRS (GMSK,4-Slot)	824.2	31.01
	836.6	31.26
	848.8	31.28
EGPRS (8PSK,1-Slot)	824.2	31.67
	836.6	31.82
	848.8	31.88
EGPRS (8PSK,2-Slot)	824.2	30.87
	836.6	31.07
	848.8	31.16
EGPRS (8PSK,3-Slot)	824.2	30.12
	836.6	30.30
	848.8	30.40
EGPRS (8PSK,4-Slot)	824.2	29.34
	836.6	29.57
	848.8	29.61



PCS 1900:

PCS 1900		
Mode	Frequency (MHz)	AVG Power(dBm)
GSM (GMSK,1-Slot)	1850.2	28.20
	1880.0	28.11
	1909.8	28.15
GPRS (GMSK,1-Slot)	1850.2	28.14
	1880.0	28.25
	1909.8	28.18
GPRS (GMSK,2-Slot)	1850.2	27.69
	1880.0	27.83
	1909.8	27.74
GPRS (GMSK,3-Slot)	1850.2	27.25
	1880.0	27.39
	1909.8	27.29
GPRS (GMSK,4-Slot)	1850.2	26.77
	1880.0	26.93
	1909.8	26.85
EGPRS (8PSK,1-Slot)	1850.2	28.12
	1880.0	28.09
	1909.8	28.08
EGPRS (8PSK,2-Slot)	1850.2	27.42
	1880.0	27.30
	1909.8	27.30
EGPRS (8PSK,3-Slot)	1850.2	26.64
	1880.0	26.56
	1909.8	26.50
EGPRS (8PSK,4-Slot)	1850.2	25.88
	1880.0	25.80
	1909.8	25.72



UMTS BAND V

UMTS BAND V		
Mode	Frequency(MHz)	AVG Power
WCDMA 850 RMC	826.4	22.72
	836.6	22.74
	846.6	22.79
HSDPA Subtest 1	826.4	20.89
	836.6	20.95
	846.6	20.84
HSDPA Subtest 2	826.4	20.43
	836.6	20.46
	846.6	20.34
HSDPA Subtest 3	826.4	19.98
	836.6	20.03
	846.6	20.00
HSDPA Subtest 4	826.4	19.64
	836.6	19.66
	846.6	19.67
HSUPA Subtest 1	826.4	21.35
	836.6	21.42
	846.6	21.21
HSUPA Subtest 2	826.4	20.49
	836.6	20.42
	846.6	20.24
HSUPA Subtest 3	826.4	20.48
	836.6	20.01
	846.6	19.94
HSUPA Subtest 4	826.4	20.10
	836.6	19.66
	846.6	19.62
HSUPA Subtest 5	826.4	18.66
	836.6	18.17
	846.6	18.15



UMTS BAND II

UMTS BAND II		
Mode	Frequency(MHz)	AVG Power
WCDMA 1900 RMC	1852.4	22.37
	1880	23.04
	1907.6	22.45
HSDPA Subtest 1	1852.4	20.32
	1880	20.10
	1907.6	20.19
HSDPA Subtest 2	1852.4	19.91
	1880	19.68
	1907.6	19.70
HSDPA Subtest 3	1852.4	19.59
	1880	19.25
	1907.6	19.34
HSDPA Subtest 4	1852.4	19.13
	1880	18.87
	1907.6	18.87
HSUPA Subtest 1	1852.4	20.47
	1880	20.46
	1907.6	20.43
HSUPA Subtest 2	1852.4	19.60
	1880	19.51
	1907.6	19.46
HSUPA Subtest 3	1852.4	19.46
	1880	19.06
	1907.6	19.09
HSUPA Subtest 4	1852.4	19.02
	1880	18.68
	1907.6	18.72
HSUPA Subtest 5	1852.4	17.57
	1880	17.23
	1907.6	17.30



UMTS BAND IV

UMTS BAND IV		
Mode	Frequency(MHz)	AVG Power
WCDMA 1700 RMC	1712.6	23.76
	1740	23.58
	1752.4	22.94
HSDPA Subtest 1	1712.6	22.56
	1740	22.52
	1752.4	22.46
HSDPA Subtest 2	1712.6	22.11
	1740	22.06
	1752.4	22.02
HSDPA Subtest 3	1712.6	21.65
	1740	21.59
	1752.4	21.60
HSDPA Subtest 4	1712.6	21.26
	1740	21.18
	1752.4	21.22
HSUPA Subtest 1	1712.6	22.42
	1740	22.34
	1752.4	22.53
HSUPA Subtest 2	1712.6	21.54
	1740	21.43
	1752.4	21.59
HSUPA Subtest 3	1712.6	21.37
	1740	20.94
	1752.4	21.24
HSUPA Subtest 4	1712.6	20.96
	1740	20.50
	1752.4	20.89
HSUPA Subtest 5	1712.6	19.47
	1740	19.05
	1752.4	19.42



CDMA BC0

Mode	Frequency(MHz)	AVG Power
CDMA BC0	824.7	23.27
	836.52	23.16
	848.31	23.25
EVDO BC0	824.7	23.13
	836.52	23.09
	848.31	23.12

CDMA BC1

CDMA BC1		
Mode	Frequency(MHz)	AVG Power
CDMA BC1	1851.25	23.97
	1880	24.08
	1908.75	23.96
EVDO BC1	1851.25	23.85
	1880	23.92
	1908.75	23.91



A2. PEAK-TO-AVERAGE RADIO

GSM 850		
Mode	Frequency (MHz)	PAR
GSM 850	824.2	2.95
	836.6	3.34
	848.8	3.49
GPRS 850	824.2	2.84
	836.6	3.42
	848.8	3.34
EGPRS 850	824.2	6.00
	836.6	5.73
	848.8	5.80
PCS 1900		
Mode	Frequency (MHz)	PAR
PCS1900	1850.2	2.65
	1880	2.64
	1909.8	2.64
GPRS1900	1850.2	2.65
	1880	2.64
	1909.8	2.64
EGPRS1900	1850.2	5.65
	1880	5.68
	1909.8	5.60

UMTS Band II		
Mode	Frequency (MHz)	PAR
WCDMA 1900 RMC	1852.4	2.83
	1880	2.90
	1907.6	2.91
HSDPA 1900	1852.4	3.12
	1880	3.07
	1907.6	3.32
HSUPA 1900	1852.4	3.16
	1880	3.27
	1907.6	3.26




UMTS Band V		
Mode	Frequency (MHz)	PAR
WCDMA 850 RMC	826.4	2.80
	836.6	2.97
	846.6	3.01
HSDPA 850	826.4	3.43
	836.6	3.28
	846.6	3.81
HSUPA 850	826.4	3.45
	836.6	3.23
	846.6	3.74


UMTS Band IV		
Mode	Frequency (MHz)	PAR
WCDMA 1700 RMC	1712.6	2.98
	1740	2.95
	1752.4	2.96
HSDPA 1700	1712.6	3.31
	1740	3.29
	1752.4	3.22
HSUPA 1700	1712.6	3.19
	1740	3.14
	1752.4	3.26

CDMA BC0		
Mode	Frequency (MHz)	PAR
CDMA BC0	824.7	4.25
	836.52	2.88
	848.31	3.21
EVDO BC0	824.7	4.24
	836.52	2.87
	848.31	3.24

CDMA BC1		
Mode	Frequency (MHz)	PAR
CDMA BC1	1851.25	3.60
	1880	3.67
	1908.75	2.97
EVDO BC1	1851.25	3.62
	1880	3.68
	1908.75	2.97

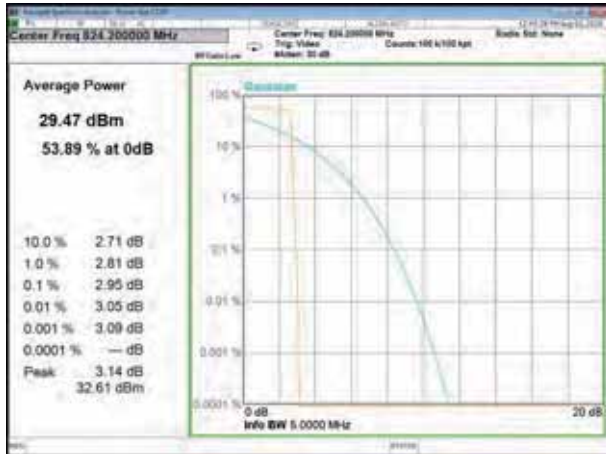

GSM850_Lower

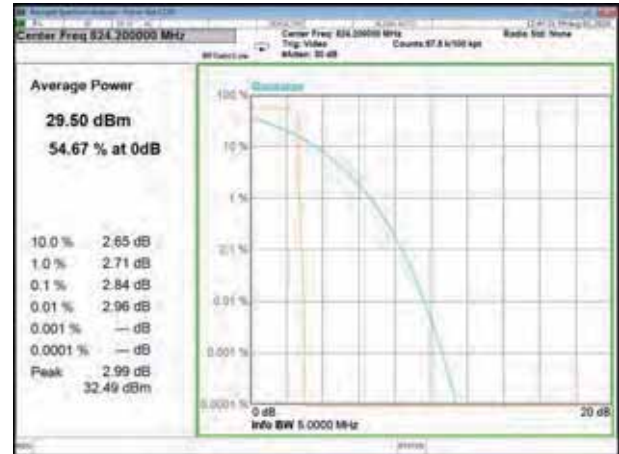


GPRS850_Lower




GSM850_Middle




GPRS850_Middle

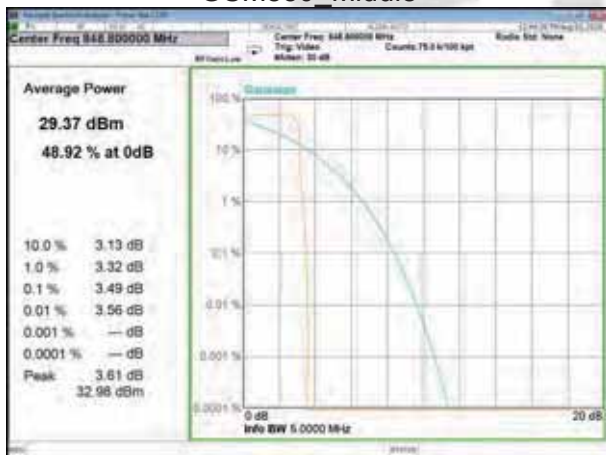


GSM850_Higher

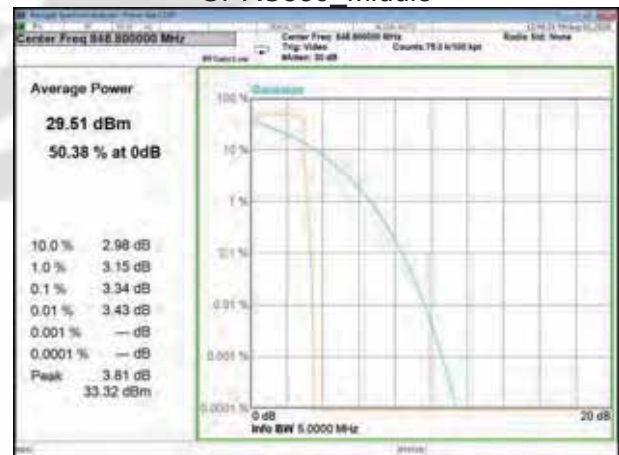

GPRS850_Higher

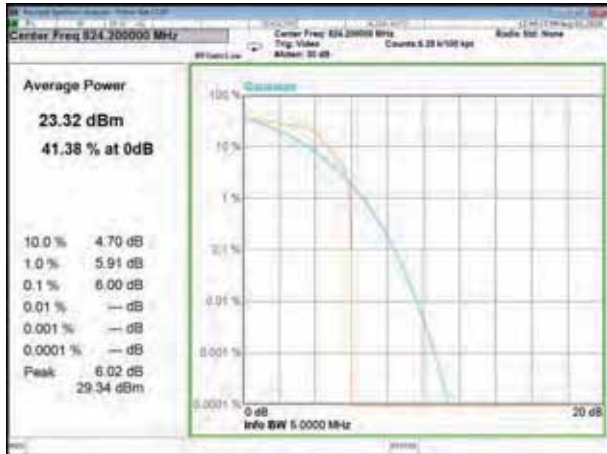


EGPRS850_Lower

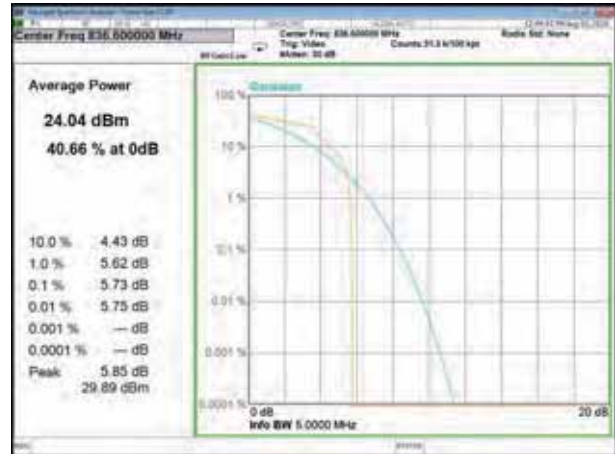

EGPRS850_Middle



EGPRS850_Higher

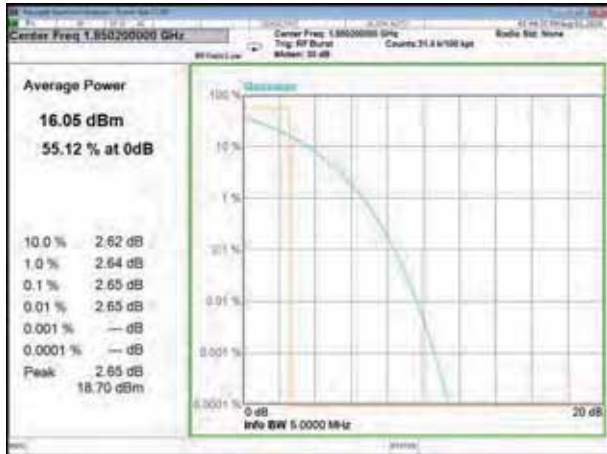


GSM1900_Lower




GPRS1900_Lower




GSM1900_Middle

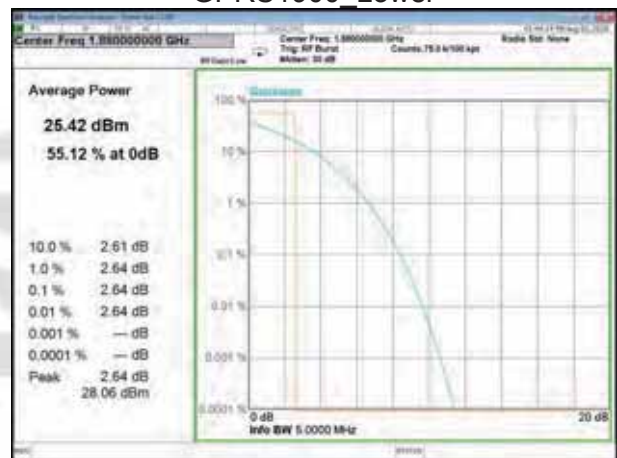


GPRS1900_Middle

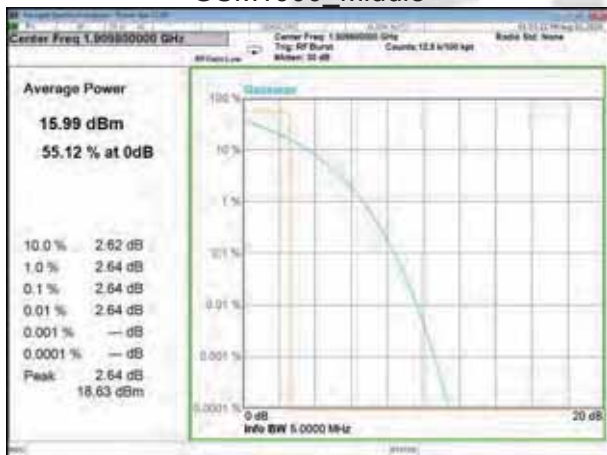


GSM1900_Higher

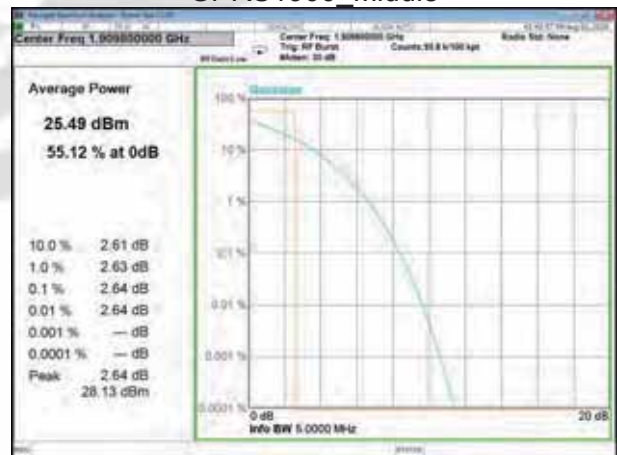

GPRS1900_Higher

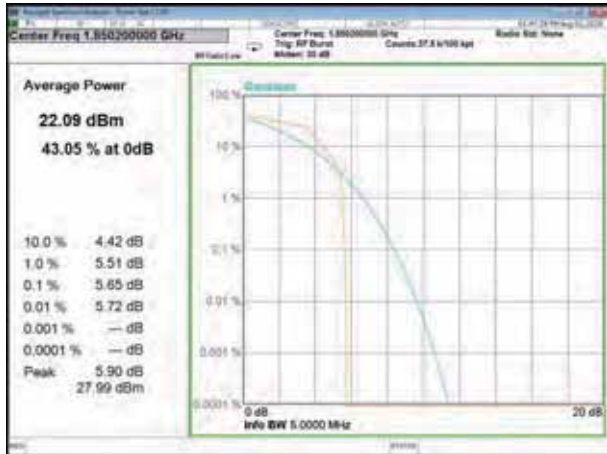


EGPRS1900_Lower

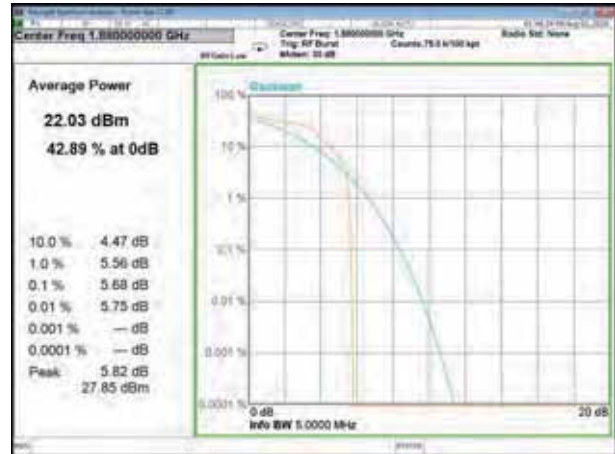


EGPRS1900_Middle



EGPRS1900_Higher

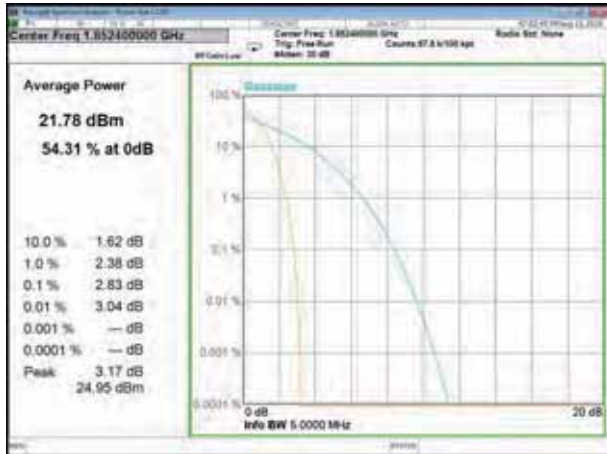


WCDMA B2_Low

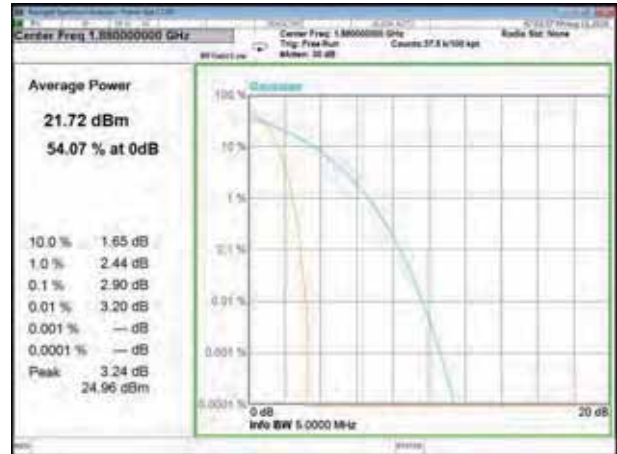


WCDMA B2_Middle




WCDMA B2_High

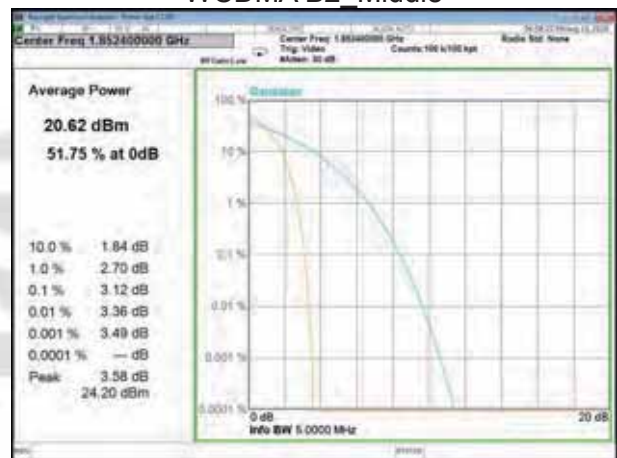


HSDPA B2_Low

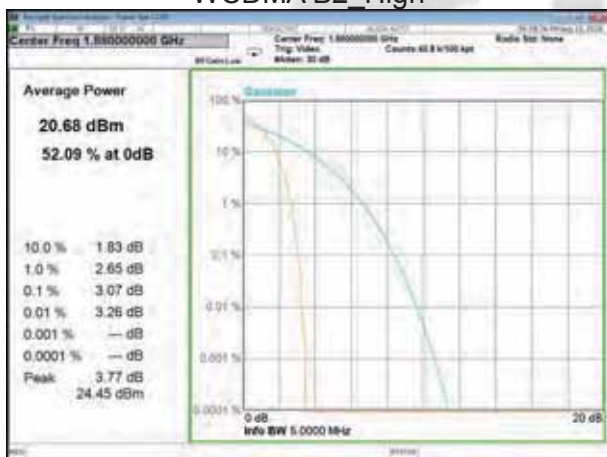


HSDPA B2_Middle

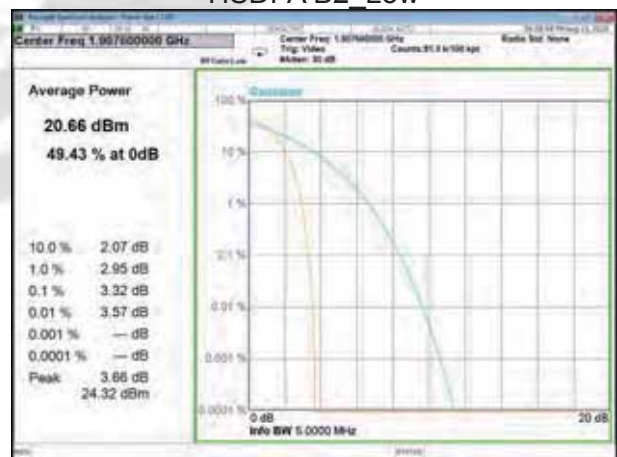

HSDPA B2_High

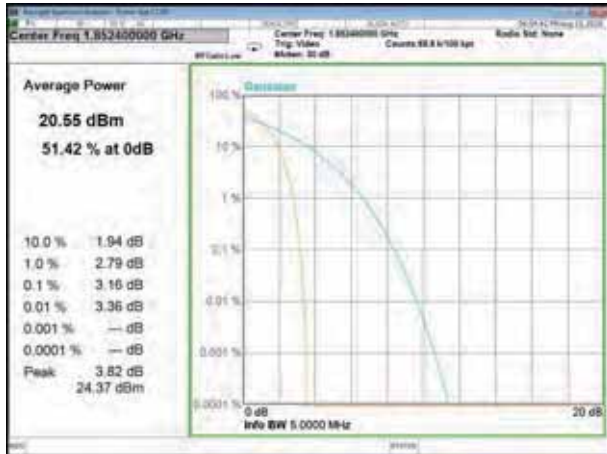


HSUPA B2_Low

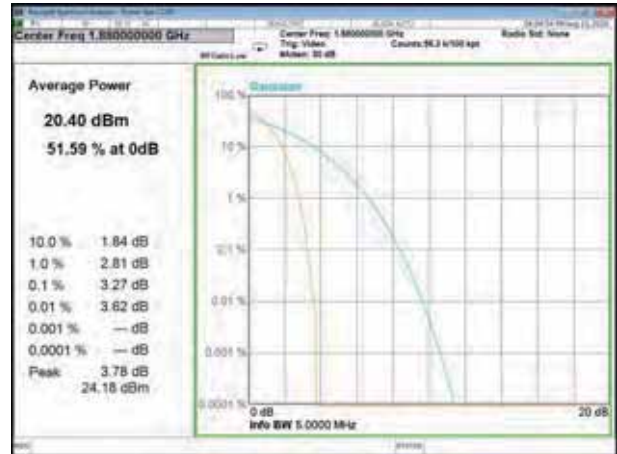


HSUPA B2_Middle



HSUPA B2_High

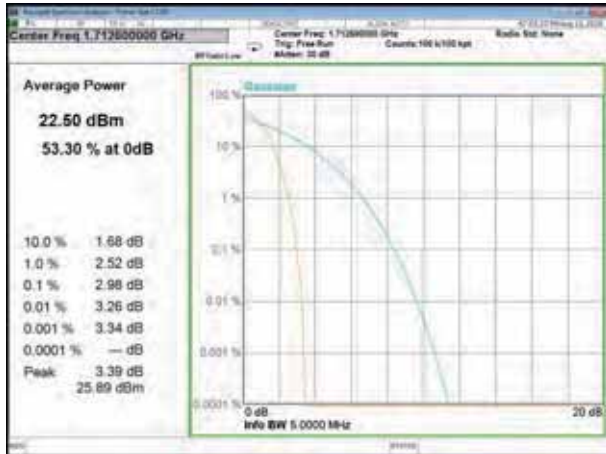

WCDMA B4_Low

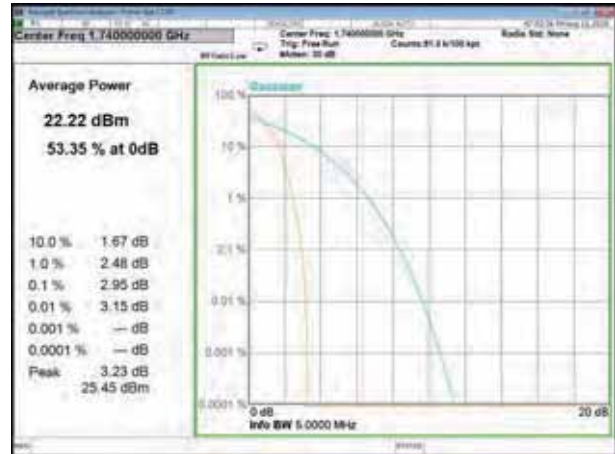


WCDMA B4_Middle




WCDMA B4_High




HSDPA B4_Low

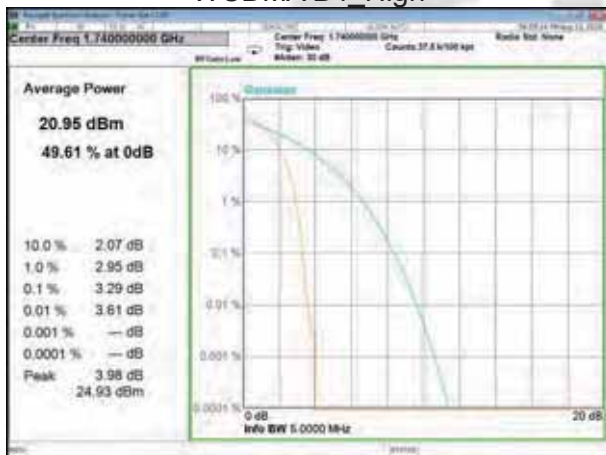


HSDPA B4_Middle

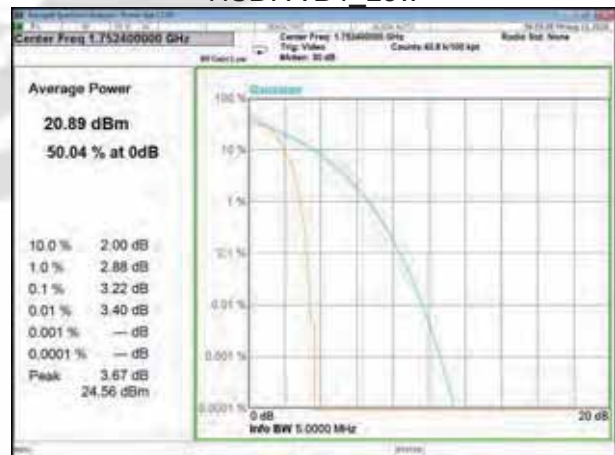

HSDPA B4_High

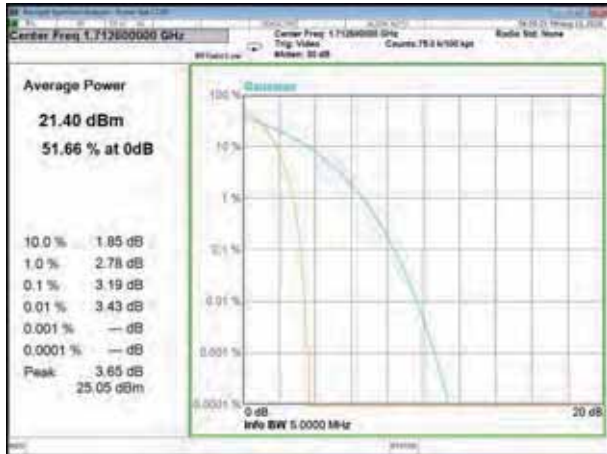


HSUPA B4_Low

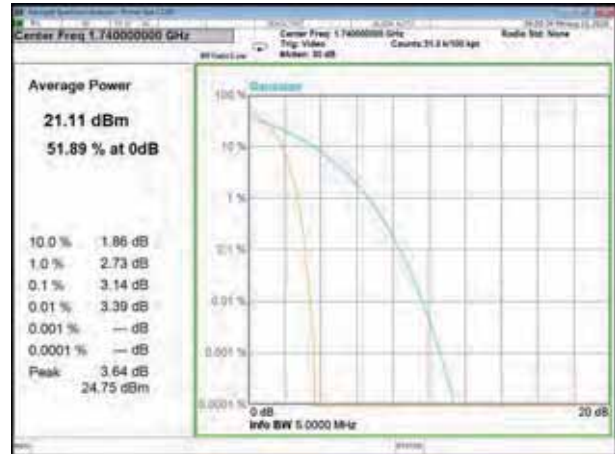


HSUPA B4_Middle



HSUPA B4_High

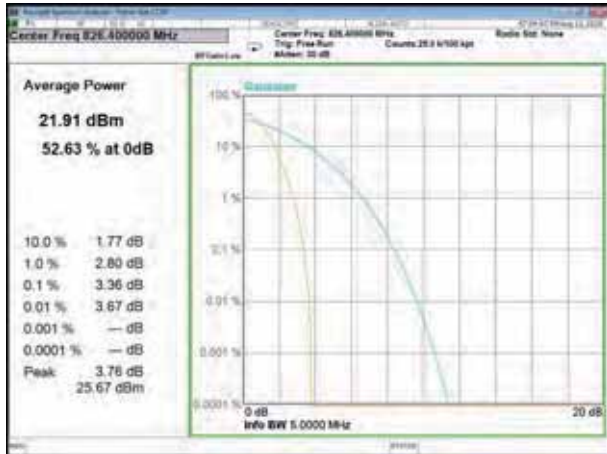

WCDMA B5_Low

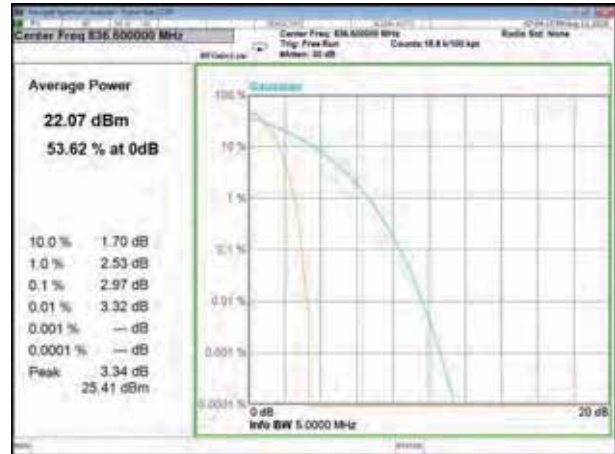


WCDMA B5_Middle




WCDMA B5_High




HSDPA B5_Low

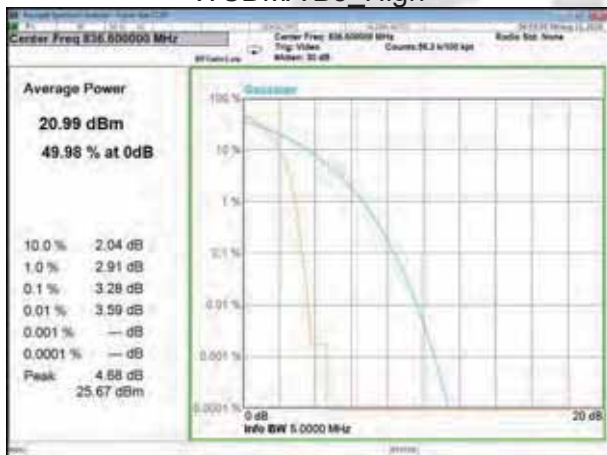


HSDPA B5_Middle

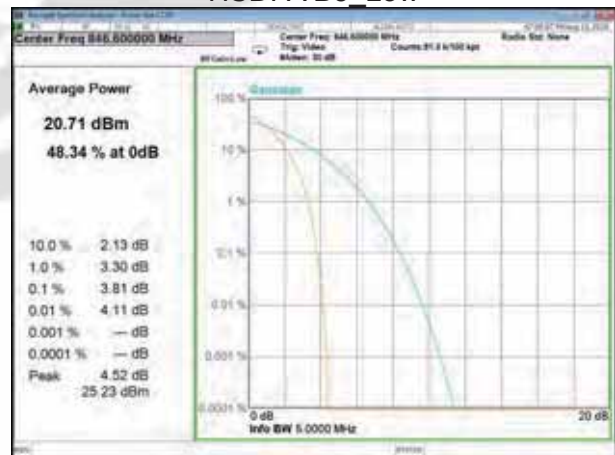

HSDPA B5_High

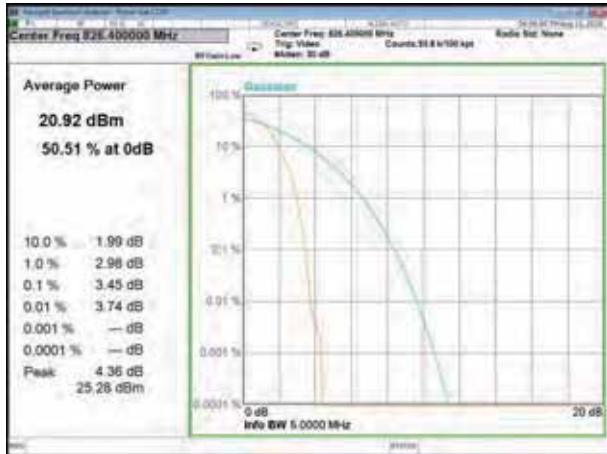


HSUPA B5_Low

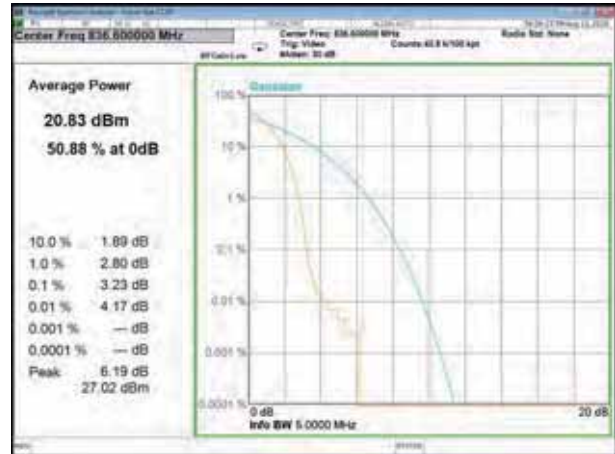


HSUPA B5_Middle



HSUPA B5_High

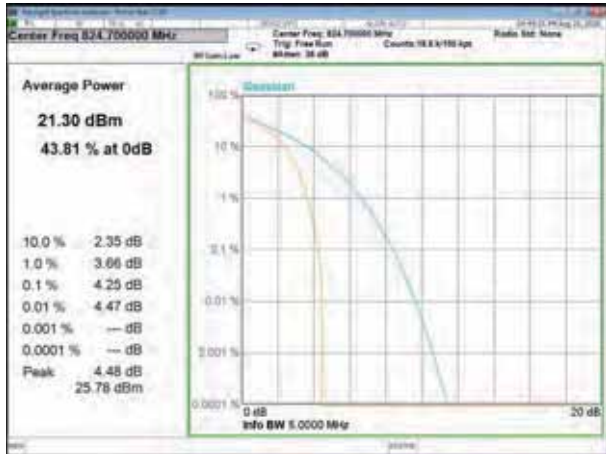

CDMA BC0Low Channel

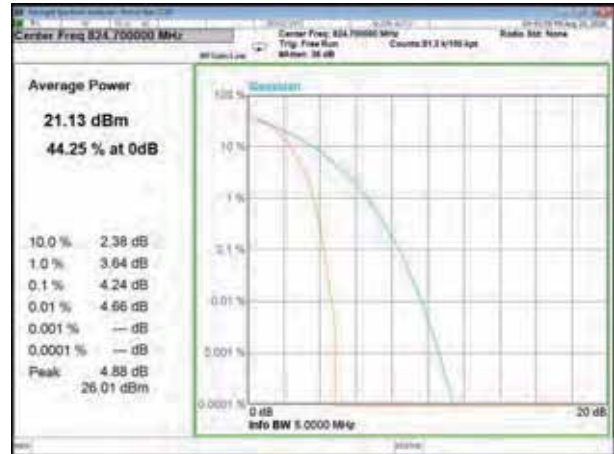

EVDO BC0Low Channel




CDMA BC0Mid Channel




EVDO BC0Mid Channel




CDMA BC0High Channel

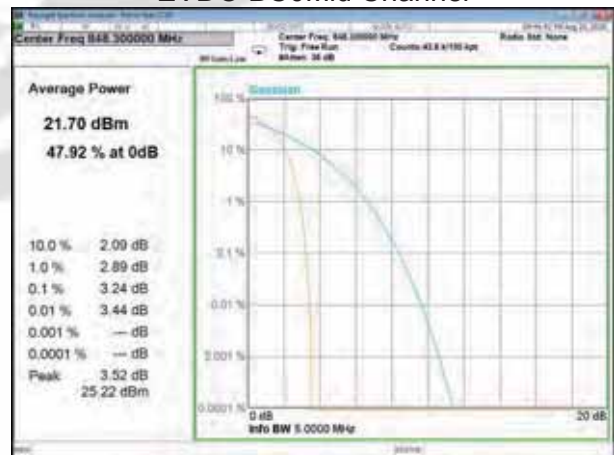

EVDO BC0High Channel

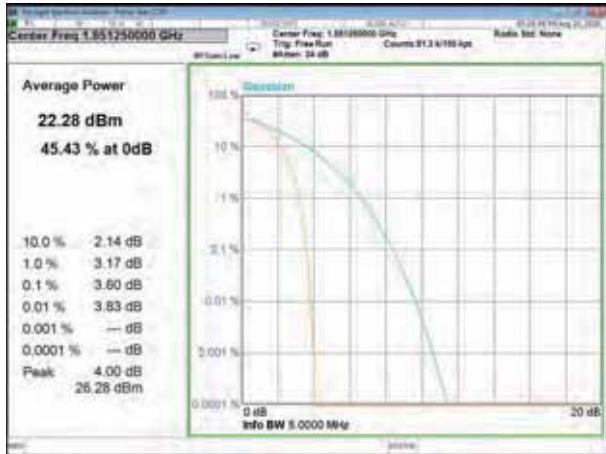

CDMA BC1Low Channel

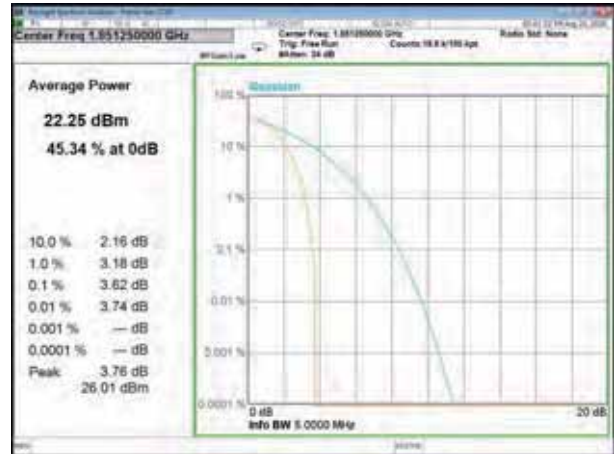


EVDO BC1Low Channel




CDMA BC1Mid Channel



EVDO BC1Mid Channel

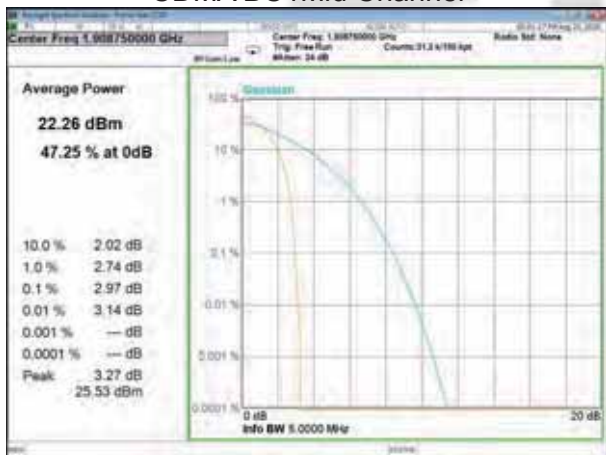

CDMA BC1High Channel

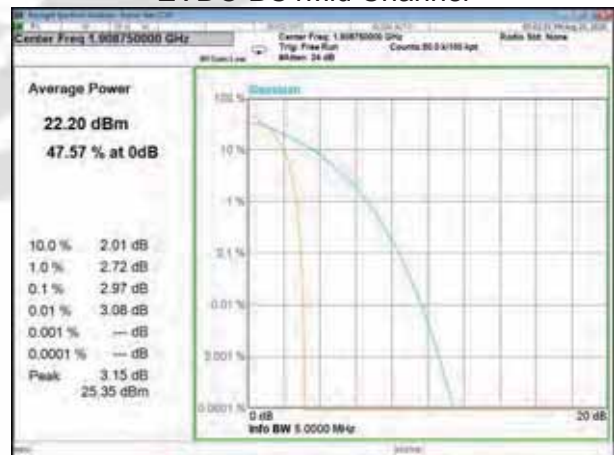

EVDO BC1High Channel



A3. TRANSMITTER RADIATED POWER (EIRP/ERP)

Note: Test is divided into three directions, X/Y/Z. X pattern for the worst

Radiated Power (ERP) for GSM 850 MHZ								
Mode	Frequency	Result						Conclusion
		S G.Level (dBm)	Cable loss	Gain(dBi)	correction factor(dB)	PMeas E.R.P(dBm)	Polarization Of Max. ERP	
GSM850	824.2	25.79	0.44	6.5	2.15	29.70	Horizontal	Pass
	824.2	27.60	0.44	6.5	2.15	31.51	Vertical	Pass
	836.6	26.11	0.45	6.5	2.15	30.01	Horizontal	Pass
	836.6	27.95	0.45	6.5	2.15	31.85	Vertical	Pass
	848.8	26.09	0.46	6.5	2.15	29.98	Horizontal	Pass
	848.8	28.07	0.46	6.5	2.15	31.96	Vertical	Pass
GPRS850	824.2	25.80	0.44	6.5	2.15	29.71	Horizontal	Pass
	824.2	27.90	0.44	6.5	2.15	31.81	Vertical	Pass
	836.6	25.93	0.45	6.5	2.15	29.83	Horizontal	Pass
	836.6	28.00	0.45	6.5	2.15	31.90	Vertical	Pass
	848.8	25.84	0.46	6.5	2.15	29.73	Horizontal	Pass
	848.8	28.17	0.46	6.5	2.15	32.06	Vertical	Pass
EGPRS850	824.2	24.83	0.44	6.5	2.15	28.74	Horizontal	Pass
	824.2	26.98	0.44	6.5	2.15	30.89	Vertical	Pass
	836.6	24.83	0.45	6.5	2.15	28.73	Horizontal	Pass
	836.6	27.24	0.45	6.5	2.15	31.14	Vertical	Pass
	848.8	24.92	0.46	6.5	2.15	28.81	Horizontal	Pass
	848.8	27.22	0.46	6.5	2.15	31.11	Vertical	Pass
Limit	ERP<7W=38.45dBm							

Radiated Power (EIRP) for PCS 1900 MHZ							
Mode	Frequency	Result					Conclusion
		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.I.R.P.(dBm)	Polarization Of Max. EIRP	
PCS1900	1850.2	17.82	2.41	10.35	25.76	Horizontal	Pass
	1850.2	19.67	2.41	10.35	27.61	Vertical	Pass
	1880	17.46	2.42	10.35	25.39	Horizontal	Pass
	1880	19.38	2.42	10.35	27.31	Vertical	Pass
	1909.8	17.78	2.43	10.35	25.70	Horizontal	Pass
	1909.8	19.6	2.43	10.35	27.52	Vertical	Pass
GPRS1900	1850.2	16.51	2.41	10.35	24.45	Horizontal	Pass
	1850.2	18.97	2.41	10.35	26.91	Vertical	Pass
	1880	16.73	2.42	10.35	24.66	Horizontal	Pass
	1880	19.1	2.42	10.35	27.03	Vertical	Pass
	1909.8	17.09	2.43	10.35	25.01	Horizontal	Pass
	1909.8	19.2	2.43	10.35	27.12	Vertical	Pass
EGPRS1900	1850.2	17.23	2.41	10.35	25.17	Horizontal	Pass
	1850.2	19.65	2.41	10.35	27.59	Vertical	Pass
	1880	17.14	2.42	10.35	25.07	Horizontal	Pass
	1880	19.52	2.42	10.35	27.45	Vertical	Pass
	1909.8	17.11	2.43	10.35	25.03	Horizontal	Pass
	1909.8	19.57	2.43	10.35	27.49	Vertical	Pass
Limit	EIRP<2W=33dBm						



Radiated Power (EIRP) for WCDMA Band II							
Mode	Frequency	Result					Conclusion
		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.I.R.P.(dBm)	Polarization Of Max. EIRP	
WCDMA	1852.4	12.09	2.41	10.35	20.03	Horizontal	Pass
	1852.4	13.88	2.41	10.35	21.82	Vertical	Pass
	1880	12.68	2.42	10.35	20.61	Horizontal	Pass
	1880	14.53	2.42	10.35	22.46	Vertical	Pass
	1907.4	12.1	2.43	10.35	20.02	Horizontal	Pass
	1907.4	13.99	2.43	10.35	21.91	Vertical	Pass
HSUPA	1852.4	9.78	2.41	10.35	17.72	Horizontal	Pass
	1852.4	11.51	2.41	10.35	19.45	Vertical	Pass
	1880	9.55	2.42	10.35	17.48	Horizontal	Pass
	1880	11.54	2.42	10.35	19.47	Vertical	Pass
	1907.4	9.86	2.43	10.35	17.78	Horizontal	Pass
	1907.4	11.62	2.43	10.35	19.54	Vertical	Pass
HSDPA	1852.4	10.06	2.41	10.35	18.00	Horizontal	Pass
	1852.4	11.89	2.41	10.35	19.83	Vertical	Pass
	1880	10.08	2.42	10.35	18.01	Horizontal	Pass
	1880	11.8	2.42	10.35	19.73	Vertical	Pass
	1907.4	9.99	2.43	10.35	17.91	Horizontal	Pass
	1907.4	11.9	2.43	10.35	19.82	Vertical	Pass
Limit	EIRP<2W=33dBm						

Radiated Power (ERP) for WCDMA Band V								
Mode	Frequency	Result						Conclusion
		S G.Level (dBm)	Cable loss	Gain (dBi)	correction factor(dB)	PMeas E.R.P(dBm)	Polarization Of Max. ERP	
WCDMA	826.4	16.31	0.44	6.5	2.15	20.22	Horizontal	Pass
	826.4	18.18	0.44	6.5	2.15	22.09	Vertical	Pass
	836.6	16.54	0.45	6.5	2.15	20.44	Horizontal	Pass
	836.6	18.33	0.45	6.5	2.15	22.23	Vertical	Pass
	846.4	16.62	0.46	6.5	2.15	20.51	Horizontal	Pass
	846.4	18.39	0.46	6.5	2.15	22.28	Vertical	Pass
HSUPA	826.4	14.65	0.44	6.5	2.15	18.56	Horizontal	Pass
	826.4	16.38	0.44	6.5	2.15	20.29	Vertical	Pass
	836.6	14.43	0.45	6.5	2.15	18.33	Horizontal	Pass
	836.6	16.33	0.45	6.5	2.15	20.23	Vertical	Pass
	846.4	14.43	0.46	6.5	2.15	18.32	Horizontal	Pass
	846.4	16.26	0.46	6.5	2.15	20.15	Vertical	Pass
HSDPA	826.4	15.18	0.44	6.5	2.15	19.09	Horizontal	Pass
	826.4	16.93	0.44	6.5	2.15	20.84	Vertical	Pass
	836.6	14.91	0.45	6.5	2.15	18.81	Horizontal	Pass
	836.6	16.84	0.45	6.5	2.15	20.74	Vertical	Pass
	846.4	14.65	0.46	6.5	2.15	18.54	Horizontal	Pass
	846.4	16.54	0.46	6.5	2.15	20.43	Vertical	Pass
Limit	ERP<7W=38.45dBm							



Radiated Power (EIRP) for WCDMA Band IV							
Mode	Frequency	Result					Conclusion
		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.I.R.P.(dBm)	Polarization Of Max. EIRP	
WCDMA	1712.6	13.05	2.07	10.13	21.11	Horizontal	Pass
	1712.6	14.94	2.07	10.13	23.00	Vertical	Pass
	1740	12.84	2.08	10.13	20.89	Horizontal	Pass
	1740	14.72	2.08	10.13	22.77	Vertical	Pass
	1752.4	12.23	2.09	10.13	20.27	Horizontal	Pass
	1752.4	14.02	2.09	10.13	22.06	Vertical	Pass
HSUPA	1712.6	11.96	2.07	10.13	20.02	Horizontal	Pass
	1712.6	13.9	2.07	10.13	21.96	Vertical	Pass
	1740	11.67	2.08	10.13	19.72	Horizontal	Pass
	1740	13.63	2.08	10.13	21.68	Vertical	Pass
	1752.4	12.12	2.09	10.13	20.16	Horizontal	Pass
	1752.4	13.82	2.09	10.13	21.86	Vertical	Pass
HSDPA	1712.6	11.49	2.07	10.13	19.55	Horizontal	Pass
	1712.6	13.47	2.07	10.13	21.53	Vertical	Pass
	1740	11.68	2.08	10.13	19.73	Horizontal	Pass
	1740	13.46	2.08	10.13	21.51	Vertical	Pass
	1752.4	12.06	2.09	10.13	20.10	Horizontal	Pass
	1752.4	13.92	2.09	10.13	21.96	Vertical	Pass
Limit	EIRP<3W=34.78dBm						

Radiated Power (ERP) for CDMA BC0								
Mode	Frequency	Result						Conclusion
		S G.Level (dBm)	Cable loss	Gain (dBi)	correction factor(dB)	PMeas E.R.P(dBm)	Polarization	
							Of Max. ERP	
CDMA	824.7	14.45	0.44	6.5	2.15	18.36	Horizontal	Pass
	824.7	16.25	0.44	6.5	2.15	20.16	Vertical	Pass
	836.52	13.84	0.45	6.5	2.15	17.74	Horizontal	Pass
	836.52	15.83	0.45	6.5	2.15	19.73	Vertical	Pass
	848.31	14.50	0.46	6.5	2.15	18.39	Horizontal	Pass
	848.31	16.20	0.46	6.5	2.15	20.09	Vertical	Pass
EVDO	826.4	14.28	0.44	6.5	2.15	18.19	Horizontal	Pass
	826.4	16.14	0.44	6.5	2.15	20.05	Vertical	Pass
	836.6	13.91	0.45	6.5	2.15	17.81	Horizontal	Pass
	836.6	15.64	0.45	6.5	2.15	19.54	Vertical	Pass
	846.4	14.50	0.46	6.5	2.15	18.39	Horizontal	Pass
	846.4	16.03	0.46	6.5	2.15	19.92	Vertical	Pass
Limit	ERP<7W=38.45dBm							



Radiated Power (EIRP) for CDMA BC1							
Mode	Frequency	Result					Conclusion
		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.I.R.P.(dBm)	Polarization	
						Of Max. ERP	
CDMA	1851.25	12.03	2.41	10.35	19.97	Horizontal	Pass
	1851.25	13.78	2.41	10.35	21.72	Vertical	Pass
	1880	11.99	2.42	10.35	19.92	Horizontal	Pass
	1880	13.92	2.42	10.35	21.85	Vertical	Pass
	1908.75	11.92	2.43	10.35	19.84	Horizontal	Pass
	1908.75	13.85	2.43	10.35	21.77	Vertical	Pass
EVDO	1851.25	11.99	2.41	10.35	19.93	Horizontal	Pass
	1851.25	13.52	2.41	10.35	21.46	Vertical	Pass
	1880	12.11	2.42	10.35	20.04	Horizontal	Pass
	1880	13.79	2.42	10.35	21.72	Vertical	Pass
	1908.75	11.88	2.43	10.35	19.80	Horizontal	Pass
	1908.75	13.83	2.43	10.35	21.75	Vertical	Pass
Limit	EIRP<2W=33dBm						





A4. OCCUPIED BANDWIDTH (99% OCCUPIED BANDWIDTH/26dB BANDWIDTH)

GSM Bandwidth [KHz]						
Mode	Lowest		Middle		Highest	
	99% BW	26dB BW	99% BW	26dB BW	99% BW	26dB BW
GSM850	246.52	315.9	249.08	319	249.11	314.6
GPRS850	246.03	311.8	246.15	318.1	245.85	323
EGPRS850	241.64	302.3	243.23	318.6	243.02	299.5

GSM Bandwidth [KHz]						
Mode	Lowest		Middle		Highest	
	99% BW	26dB BW	99% BW	26dB BW	99% BW	26dB BW
GSM1900	245.3	315.4	244.18	315.3	243.08	310.4
GPRS1900	247.95	317.7	246.21	316.3	245.44	315.8
EGPRS1900	241.56	306.9	246.89	314.5	246.2	313.5

WCDMA Bandwidth [MHz]						
Mode	Lowest		Middle		Highest	
	99% BW	26dB BW	99% BW	26dB BW	99% BW	26dB BW
WCDMA II	4.167	4.689	4.17	4.692	4.1669	4.686
HSDPA II	4.1791	4.695	4.165	4.694	4.186	4.685
HSUPA II	4.174	4.675	4.174	4.701	4.179	4.67

WCDMA Bandwidth [MHz]						
Mode	Lowest		Middle		Highest	
	99% BW	26dB BW	99% BW	26dB BW	99% BW	26dB BW
WCDMA V	4.156	4.651	4.162	4.672	4.172	4.68
HSDPA V	4.164	4.666	4.169	4.679	4.179	4.67
HSUPA V	4.163	4.661	4.181	4.686	4.1917	4.6936

WCDMA Bandwidth [MHz]						
Mode	Lowest		Middle		Highest	
	99% BW	26dB BW	99% BW	26dB BW	99% BW	26dB BW
WCDMA IV	4.1616	4.691	4.1593	4.692	4.1631	4.688
HSDPA IV	4.176	4.695	4.173	4.682	4.169	4.685
HSUPA IV	4.163	4.683	4.162	4.675	4.176	4.686

CDMA Bandwidth [MHz]						
Mode	Lowest		Middle		Highest	
	26dB BW	99% BW	26dB BW	99% BW	26dB BW	99% BW
BC0	1.2756	1.431	1.2896	1.483	1.2839	1.476
BC0-EVDO	1.2788	1.437	1.2945	1.504	1.2884	1.482
BC1	1.2825	1.452	1.2776	1.431	1.2835	1.448
BC1-EVDO	1.2834	1.462	1.2812	1.459	1.2879	1.508



GSM850_Low



GPRS850_Low



GSM850_Middle



GPRS850_Middle



GSM850_High



GPRS850_High



EGPRS850_Low



EGPRS850_Middle



EGPRS850_High



GSM1900_Low



GPRS1900_Low



GSM1900_Middle



GPRS1900_Middle



GSM1900_High



GPRS1900_High



EGPRS1900_Low



EGPRS1900_Middle



EGPRS1900_High



WCDMA_Band2_Low



WCDMA_Band2_Middle



WCDMA_Band2_High



HSDPA_Band2_Low



HSDPA_Band2_Middle



HSDPA_Band2_High




HSUPA_Band2_Low



HSUPA_Band2_Middle



HSUPA_Band2_High

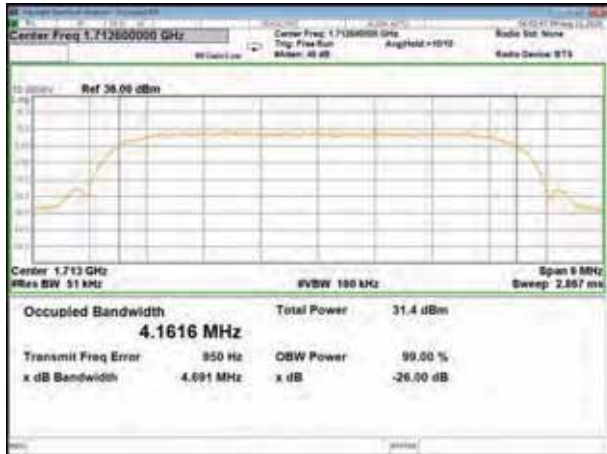

WCDMA_Band4_Low



WCDMA_Band4_Middle



WCDMA_Band4_High



HSDPA_Band4_Low



HSDPA_Band4_Middle



HSDPA_Band4_High



HSUPA_Band4_Low



HSUPA_Band4_Middle



HSUPA_Band4_High



WCDMA_Band5_Low




WCDMA_Band5_Middle



WCDMA_Band5_High



HSDPA_Band5_Low

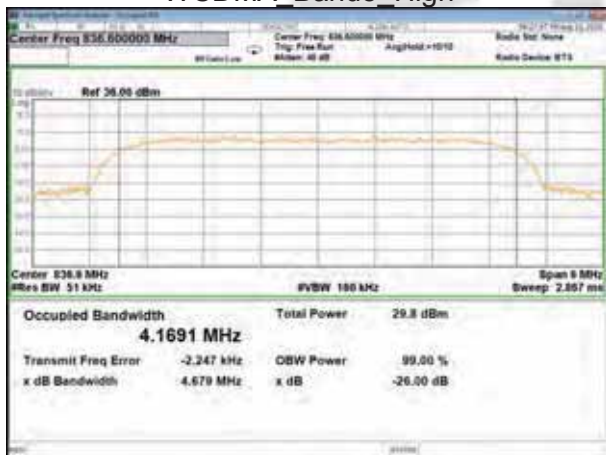

HSDPA_Band5_Middle



HSDPA_Band5_High



HSUPA_Band5_Low



HSUPA_Band5_Middle



HSUPA_Band5_High



BC0 CDMA Lower 26BW and 99%



BC0 EVDO Lower 26BW and 99%



BC0 CDMA Middle 26BW and 99%




BC0 EVDO Middle 26BW and 99%



BC0_CDMA_Higher_26BW and 99%



BC0_EVDO_Higher_26BW and 99%

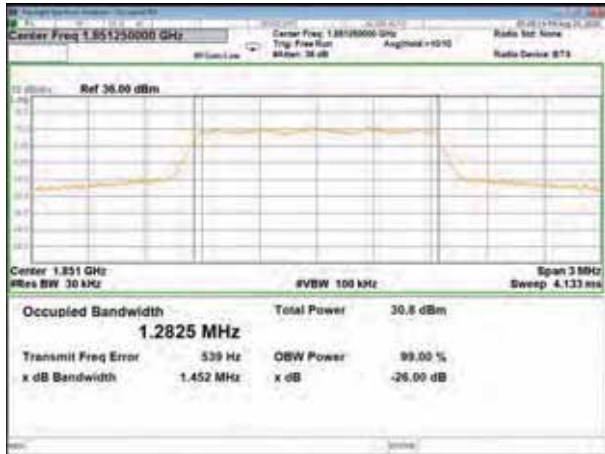

BC1 CDMA Lower 26BW and 99%



BC1 EVDO Lower 26BW and 99%



BC1 CDMA Middle 26BW and 99%



BC1 EVDO Middle 26BW and 99%



BC1_CDMA_Higher_26BW and 99%



BC1_EVDO_Higher_26BW and 99%



A5. FREQUENCY STABILITY

Normal Voltage = 3.85V; Battery End Point (BEP) = 4.4V; Maximum Voltage = 3.55V

GSM 850 /836.6MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	14.17	0.017	2.5ppm	PASS
40		29.11	0.035		
30		27.45	0.033		
20		32.36	0.039		
10		27.94	0.033		
0		26.06	0.031		
-10		25.09	0.030		
-20		16.81	0.020		
-30		18.90	0.023		
20	Maximum Voltage	12.52	0.015		
20	BEP	22.45	0.027		

GPRS 850 /836.6MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	13.01	0.016	2.5ppm	PASS
40		33.17	0.040		
30		19.48	0.023		
20		27.24	0.033		
10		22.85	0.027		
0		12.40	0.015		
-10		19.86	0.024		
-20		30.57	0.037		
-30		15.38	0.018		
20	Maximum Voltage	34.32	0.041		
20	BEP	23.77	0.028		

EGPRS 850 /836.6MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	24.03	0.029	2.5ppm	PASS
40		30.36	0.036		
30		11.69	0.014		
20		24.82	0.030		
10		14.78	0.018		
0		19.44	0.023		
-10		32.99	0.039		
-20		16.92	0.020		
-30		14.28	0.017		
20	Maximum Voltage	20.06	0.024		
20	BEP	20.88	0.025		



GSM 1900 / 1880MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	19.46	0.010	Within Authorized Band	PASS
40		20.48	0.011		
30		28.17	0.015		
20		33.94	0.018		
10		22.52	0.012		
0		25.53	0.014		
-10		22.81	0.012		
-20		21.66	0.012		
-30		21.78	0.012		
20	Maximum Voltage	24.02	0.013		
20	BEP	15.76	0.008		

GPRS 1900 / 1880MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	15.91	0.008	Within Authorized Band	PASS
40		19.86	0.011		
30		23.91	0.013		
20		21.85	0.012		
10		30.74	0.016		
0		21.16	0.011		
-10		19.47	0.010		
-20		30.77	0.016		
-30		31.76	0.017		
20	Maximum Voltage	18.34	0.010		
20	BEP	20.90	0.011		

EGPRS 1900 / 1880MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	25.52	0.014	Within Authorized Band	PASS
40		17.81	0.009		
30		26.40	0.014		
20		12.61	0.007		
10		12.84	0.007		
0		26.81	0.014		
-10		17.27	0.009		
-20		13.49	0.007		
-30		12.21	0.006		
20	Maximum Voltage	30.76	0.016		
20	BEP	30.96	0.016		



UMTS Band II /1880MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	26.57	0.014	Within Authorized Band	PASS
40		34.01	0.018		
30		21.45	0.011		
20		20.63	0.011		
10		15.15	0.008		
0		15.19	0.008		
-10		24.63	0.013		
-20		35.77	0.019		
-30		24.96	0.013		
20	Maximum Voltage	33.77	0.018		
20	BEP	34.31	0.018		

HSDPA Band II /1880MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	35.68	0.019	Within Authorized Band	PASS
40		25.18	0.013		
30		30.83	0.016		
20		35.07	0.019		
10		20.93	0.011		
0		33.71	0.018		
-10		21.51	0.011		
-20		34.90	0.019		
-30		27.98	0.015		
20	Maximum Voltage	18.85	0.010		
20	BEP	22.15	0.012		

HSUPA Band II /1880MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	21.27	0.011	Within Authorized Band	PASS
40		11.55	0.006		
30		22.80	0.012		
20		34.24	0.018		
10		34.36	0.018		
0		11.74	0.006		
-10		35.64	0.019		
-20		33.70	0.018		
-30		20.22	0.011		
20	Maximum Voltage	36.31	0.019		
20	BEP	31.74	0.017		



UMTS Band V / 836.6MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	15.86	0.019	2.5ppm	PASS
40		28.64	0.034		
30		29.28	0.035		
20		15.25	0.018		
10		27.63	0.033		
0		35.84	0.043		
-10		13.06	0.016		
-20		17.80	0.021		
-30		22.95	0.027		
20	Maximum Voltage	20.02	0.024		
20	BEP	13.35	0.016		

HSDPA Band V / 836.6MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)		(ppm)		
50	Normal Voltage	16.92	0.020	2.5ppm	PASS
40		12.10	0.014		
30		27.61	0.033		
20		29.18	0.035		
10		20.07	0.024		
0		23.23	0.028		
-10		26.87	0.032		
-20		17.11	0.020		
-30		23.84	0.028		
20	Maximum Voltage	24.81	0.030		
20	BEP	12.41	0.015		

HSUPA Band V / 836.6MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	14.68	0.018	2.5ppm	PASS
40		33.07	0.040		
30		19.79	0.024		
20		23.48	0.028		
10		16.73	0.020		
0		30.47	0.036		
-10		27.66	0.033		
-20		35.90	0.043		
-30		18.56	0.022		
20	Maximum Voltage	21.60	0.026		
20	BEP	22.67	0.027		



UMTS Band IV /1740MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	28.85	0.015	Within Authorized Band	PASS
40		13.83	0.007		
30		22.44	0.012		
20		30.65	0.016		
10		15.21	0.008		
0		13.93	0.007		
-10		27.57	0.015		
-20		20.14	0.011		
-30		23.75	0.013		
20	Maximum Voltage	34.59	0.018		
20	BEP	15.55	0.008		

HSDPA Band IV /1740MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	13.80	0.007	Within Authorized Band	PASS
40		15.36	0.008		
30		23.05	0.012		
20		17.98	0.010		
10		32.18	0.017		
0		29.29	0.016		
-10		34.87	0.019		
-20		29.38	0.016		
-30		19.53	0.010		
20	Maximum Voltage	14.28	0.008		
20	BEP	17.43	0.009		

HSUPA Band IV /1740MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	27.62	0.015	Within Authorized Band	PASS
40		13.98	0.007		
30		36.30	0.019		
20		19.82	0.011		
10		14.47	0.008		
0		33.53	0.018		
-10		13.32	0.007		
-20		33.13	0.018		
-30		30.96	0.016		
20	Maximum Voltage	34.71	0.018		
20	BEP	35.27	0.019		



CDMA BC0					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	16.84	0.020	2.5ppm	PASS
40		12.66	0.015		
30		34.32	0.041		
20		15.14	0.018		
10		16.89	0.020		
0		25.47	0.030		
-10		33.21	0.040		
-20		33.21	0.040		
-30		34.86	0.042		
20	Maximum Voltage	32.17	0.038		
20	BEP	16.91	0.020		

EVDO BC0					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	30.01	0.036	2.5ppm	PASS
40		26.44	0.032		
30		33.43	0.040		
20		15.44	0.018		
10		30.14	0.036		
0		25.16	0.030		
-10		17.78	0.021		
-20		22.20	0.027		
-30		25.00	0.030		
20	Maximum Voltage	25.94	0.031		
20	BEP	29.24	0.035		



CDMA BC1					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	35.64	0.019	Within Authorized Band	PASS
40		33.23	0.018		
30		24.81	0.013		
20		21.26	0.011		
10		16.94	0.009		
0		31.94	0.017		
-10		23.02	0.012		
-20		35.26	0.019		
-30		27.73	0.015		
20	Maximum Voltage	25.45	0.014		
20	BEP	20.80	0.011		

EVDO BC1					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	15.64	0.008	Within Authorized Band	PASS
40		27.80	0.015		
30		22.34	0.012		
20		14.55	0.008		
10		12.08	0.006		
0		24.91	0.013		
-10		27.59	0.015		
-20		23.17	0.012		
-30		34.71	0.018		
20	Maximum Voltage	27.97	0.015		
20	BEP	18.60	0.010		

1. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



A6. SPURIOUS EMISSIONS AT ANTENNA TERMINALS



GSM850_Low



GPRS850_Low



GSM850_Middle



GPRS850_Middle



GSM850_High




GPRS850_High



EGPRS850_Low



EGPRS850_Middle

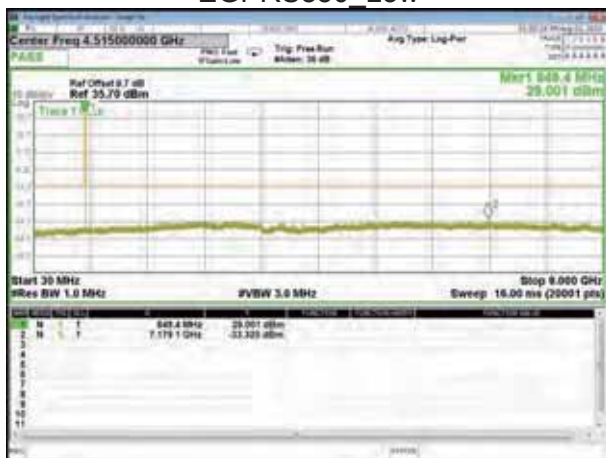


EGPRS850_High



GSM1900_Low



GPRS1900_Low

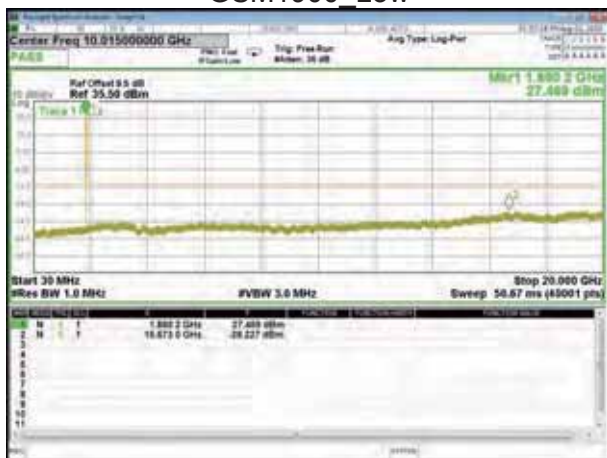

GSM1900_Middle



GPRS1900_Middle



GSM1900_High




GPRS1900_High



EGPRS1900_Low



EGPRS1900_Middle

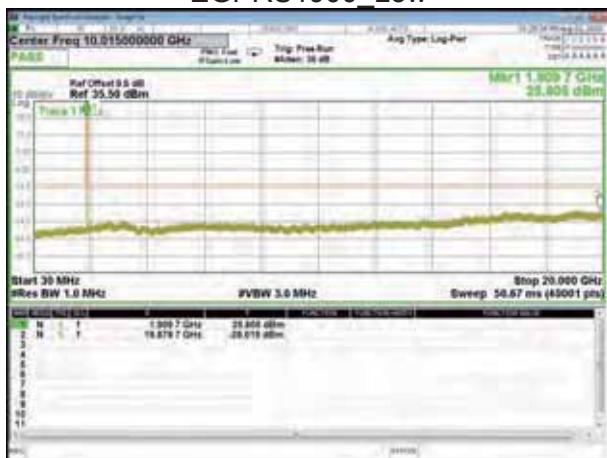

EGPRS1900_High



WCDMA Band2 Low



WCDMA Band2 Middle



WCDMA Band2 High



HSDPA Band2 Low



HSDPA_Band2_Middle



HSDPA_Band2_High



HSUPA_Band2_Low



HSUPA_Band2_Middle



HSUPA_Band2_High



WCDMA Band4 Low



WCDMA Band4 Middle



WCDMA Band4 High



HSDPA Band4 Low



HSDPA_Band4_Middle



HSDPA_Band4_High



HSUPA_Band4_Low



HSUPA_Band4_Middle



HSUPA_Band4_High



WCDMA Band5 Low



WCDMA Band5 Middle



WCDMA Band5 High



HSDPA Band5 Low



HSDPA_Band5_Middle




HSDPA_Band5_High



HSUPA_Band5_Low



HSUPA_Band5_Middle

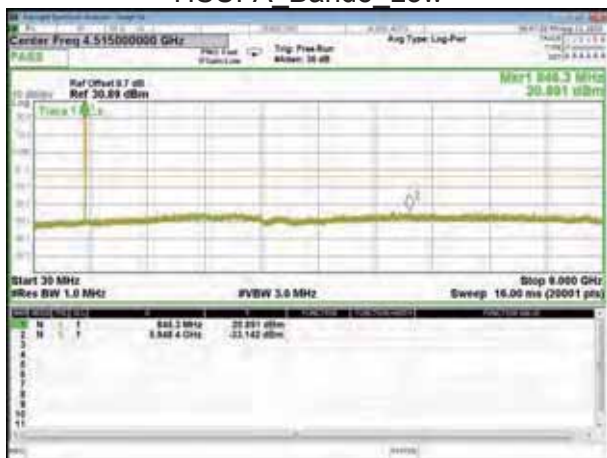

HSUPA_Band5_High



BC0_CDMA_Lower_Conducted_Spurious



BC0_EVDO_Lower_Conducted_Spurious



BC0_CDMA_Middle_Conducted_Spurious



BC0_EVDO_Middle_Conducted_Spurious



BC0_CDMA_Higher_Conducted_Spurious



BC0_EVDO_Higher_Conducted_Spurious



BC1_CDMA_Lower_Conducted_Spurious



BC1_EVDO_Lower_Conducted_Spurious



BC1_CDMA_Middle_Conducted_Spurious



BC1_EVDO_Middle_Conducted_Spurious



BC1_CDMA_Higher_Conducted_Spurious



BC1_EVDO_Higher_Conducted_Spurious



A7. BAND EDGE



GSM850_Low



GPRS850_Low



GSM850_High



GPRS850_High



EGPRS850_Low



EGPRS850_High



GSM1900_Low



GPRS1900_Low



GSM1900_High



GPRS1900_High



EGPRS1900_Low



EGPRS1900_High



WCDMA_Band2_Low



WCDMA_Band2_Low



WCDMA_Band2_High



WCDMA_Band2_High



HSDPA_Band2_Low



HSDPA_Band2_Low



HSDPA_Band2_High



HSDPA_Band2_High



HSUPA_Band2_Low



HSUPA_Band2_Low



HSUPA_Band2_High



HSUPA_Band2_High



WCDMA_Band4_Low



WCDMA_Band4_Low



WCDMA_Band4_High



WCDMA_Band4_High



HSDPA_Band4_Low



HSDPA_Band4_Low



HSDPA_Band4_High



HSDPA_Band4_High



HSUPA_Band4_Low



HSUPA_Band4_Low



HSUPA_Band4_High



HSUPA_Band4_High



WCDMA_Band5_Low



WCDMA_Band5_High



HSDPA_Band5_Low



HSDPA_Band5_High



HSUPA_Band5_Low



HSUPA_Band5_High



BC0 CDMA Lower Band edge



BC0 CDMA Higher Band edge



BC0 EVDO Lower Band edge



BC0 EVDO Higher Band edge



BC1_CDMA_Lower_Band edge



BC1_CDMA_Higher_Band edge



BC1_EVDO_Lower_Band edge



BC1_EVDO_Higher_Band edge





A8. FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT

Note: (1) Below 30MHz no Spurious found is the worst condition.

(2) Above 3.5GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value

(3) Test is divided into three directions, X/Y/Z. X pattern for the worst.

GSM 850: (30-9000)MHz							
The Worst Test Results Channel 128/824.2 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1648.07	-40.63	9.40	4.75	-35.98	-13.00	-22.98	H
2472.34	-40.50	10.60	8.39	-38.29	-13.00	-25.29	H
3296.79	-31.56	12.00	11.79	-31.35	-13.00	-18.35	H
1648.21	-43.96	9.40	4.75	-39.31	-13.00	-26.31	V
2472.66	-44.34	10.60	8.39	-42.13	-13.00	-29.13	V
3296.51	-43.51	12.00	11.79	-43.30	-13.00	-30.30	V
The Worst Test Results Channel 190/836.6 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1672.93	-41.40	9.50	4.76	-36.66	-13.00	-23.66	H
2509.82	-39.83	10.70	8.40	-37.53	-13.00	-24.53	H
3346.42	-31.59	12.20	11.80	-31.19	-13.00	-18.19	H
1672.99	-44.55	9.40	4.75	-39.90	-13.00	-26.90	V
2509.73	-44.37	10.60	8.39	-42.16	-13.00	-29.16	V
3346.07	-42.98	12.20	11.82	-42.60	-13.00	-29.60	V
The Worst Test Results Channel 251/848.8 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1697.65	-41.32	9.60	4.77	-36.49	-13.00	-23.49	H
2546.07	-40.00	10.80	8.50	-37.70	-13.00	-24.70	H
3394.97	-31.49	12.50	11.90	-30.89	-13.00	-17.89	H
1697.66	-44.15	9.60	4.77	-39.32	-13.00	-26.32	V
2546.55	-44.65	10.80	8.50	-42.35	-13.00	-29.35	V
3395.02	-43.14	12.50	11.90	-42.54	-13.00	-29.54	V



GPRS 850: (30-9000)MHz							
The Worst Test Results Channel 128/824.2 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1648.12	-40.72	9.40	4.75	-36.07	-13.00	-23.07	H
2472.31	-40.27	10.60	8.39	-38.06	-13.00	-25.06	H
3296.62	-32.20	12.00	11.79	-31.99	-13.00	-18.99	H
1648.06	-44.55	9.40	4.75	-39.90	-13.00	-26.90	V
2472.60	-45.15	10.60	8.39	-42.94	-13.00	-29.94	V
3296.78	-42.60	12.00	11.79	-42.39	-13.00	-29.39	V
The Worst Test Results Channel 190/836.6 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1673.17	-41.21	9.50	4.76	-36.47	-13.00	-23.47	H
2509.86	-40.45	10.70	8.40	-38.15	-13.00	-25.15	H
3346.13	-32.09	12.20	11.80	-31.69	-13.00	-18.69	H
1672.93	-43.87	9.40	4.75	-39.22	-13.00	-26.22	V
2509.91	-44.02	10.60	8.39	-41.81	-13.00	-28.81	V
3346.30	-43.52	12.20	11.82	-43.14	-13.00	-30.14	V
The Worst Test Results Channel 251/848.8 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1697.61	-41.36	9.60	4.77	-36.53	-13.00	-23.53	H
2546.24	-39.44	10.80	8.50	-37.14	-13.00	-24.14	H
3395.21	-31.20	12.50	11.90	-30.60	-13.00	-17.60	H
1697.22	-44.31	9.60	4.77	-39.48	-13.00	-26.48	V
2546.09	-45.25	10.80	8.50	-42.95	-13.00	-29.95	V
3395.02	-42.67	12.50	11.90	-42.07	-13.00	-29.07	V



EGPRS 850: (30-9000)MHz							
The Worst Test Results Channel 128/824.2 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1648.36	-40.91	9.40	4.75	-36.26	-13.00	-23.26	H
2472.38	-39.94	10.60	8.39	-37.73	-13.00	-24.73	H
3296.75	-30.88	12.00	11.79	-30.67	-13.00	-17.67	H
1648.46	-44.50	9.40	4.75	-39.85	-13.00	-26.85	V
2472.29	-44.86	10.60	8.39	-42.65	-13.00	-29.65	V
3296.60	-43.61	12.00	11.79	-43.40	-13.00	-30.40	V
The Worst Test Results Channel 190/836.6 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1673.07	-41.59	9.50	4.76	-36.85	-13.00	-23.85	H
2509.92	-39.41	10.70	8.40	-37.11	-13.00	-24.11	H
3346.31	-31.53	12.20	11.80	-31.13	-13.00	-18.13	H
1672.83	-43.85	9.40	4.75	-39.20	-13.00	-26.20	V
2509.57	-44.01	10.60	8.39	-41.80	-13.00	-28.80	V
3346.35	-42.74	12.20	11.82	-42.36	-13.00	-29.36	V
The Worst Test Results Channel 251/848.8 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1697.34	-40.89	9.60	4.77	-36.06	-13.00	-23.06	H
2546.32	-39.68	10.80	8.50	-37.38	-13.00	-24.38	H
3395.19	-31.84	12.50	11.90	-31.24	-13.00	-18.24	H
1697.68	-43.46	9.60	4.77	-38.63	-13.00	-25.63	V
2546.27	-44.75	10.80	8.50	-42.45	-13.00	-29.45	V
3395.27	-43.75	12.50	11.90	-43.15	-13.00	-30.15	V



DCS 1900: (30-20000)MHz							
The Worst Test Results for Channel 512/1850.2MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3700.26	-34.34	12.60	12.93	-34.67	-13.00	-21.67	H
5550.25	-35.46	13.10	17.11	-39.47	-13.00	-26.47	H
7400.62	-32.17	11.50	22.20	-42.87	-13.00	-29.87	H
3700.36	-35.92	12.60	12.93	-36.25	-13.00	-23.25	V
5550.54	-34.53	13.10	17.11	-38.54	-13.00	-25.54	V
7400.54	-32.03	11.50	22.20	-42.73	-13.00	-29.73	V
The Worst Test Results for Channel 661/1880.0MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3760.19	-34.44	12.60	12.93	-34.77	-13.00	-21.77	H
5640.23	-34.50	13.10	17.11	-38.51	-13.00	-25.51	H
7520.30	-33.04	11.50	22.20	-43.74	-13.00	-30.74	H
3760.12	-35.31	12.60	12.93	-35.64	-13.00	-22.64	V
5640.24	-33.98	13.10	17.11	-37.99	-13.00	-24.99	V
7519.95	-32.73	11.50	22.20	-43.43	-13.00	-30.43	V
The Worst Test Results for Channel 810/1909.8MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3819.66	-33.68	12.60	12.93	-34.01	-13.00	-21.01	H
5729.30	-35.14	13.10	17.11	-39.15	-13.00	-26.15	H
7639.20	-33.64	11.50	22.20	-44.34	-13.00	-31.34	H
3819.55	-35.66	12.60	12.93	-35.99	-13.00	-22.99	V
5729.23	-34.34	13.10	17.11	-38.35	-13.00	-25.35	V
7639.25	-32.15	11.50	22.20	-42.85	-13.00	-29.85	V



GPRS1900: (30-20000)MHz							
The Worst Test Results for Channel 512/1850.2MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3700.47	-33.65	12.60	12.93	-33.98	-13.00	-20.98	H
5550.60	-34.95	13.10	17.11	-38.96	-13.00	-25.96	H
7400.76	-32.65	11.50	22.20	-43.35	-13.00	-30.35	H
3700.19	-34.91	12.60	12.93	-35.24	-13.00	-22.24	V
5550.68	-34.97	13.10	17.11	-38.98	-13.00	-25.98	V
7400.88	-32.05	11.50	22.20	-42.75	-13.00	-29.75	V
The Worst Test Results for Channel 661/1880.0MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3760.07	-33.92	12.60	12.93	-34.25	-13.00	-21.25	H
5640.00	-35.10	13.10	17.11	-39.11	-13.00	-26.11	H
7520.21	-32.15	11.50	22.20	-42.85	-13.00	-29.85	H
3760.29	-35.09	12.60	12.93	-35.42	-13.00	-22.42	V
5640.22	-35.15	13.10	17.11	-39.16	-13.00	-26.16	V
7519.91	-32.20	11.50	22.20	-42.90	-13.00	-29.90	V
The Worst Test Results for Channel 810/1909.8MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3819.49	-34.36	12.60	12.93	-34.69	-13.00	-21.69	H
5729.27	-34.76	13.10	17.11	-38.77	-13.00	-25.77	H
7639.30	-33.61	11.50	22.20	-44.31	-13.00	-31.31	H
3819.71	-35.50	12.60	12.93	-35.83	-13.00	-22.83	V
5729.10	-34.62	13.10	17.11	-38.63	-13.00	-25.63	V
7639.19	-31.83	11.50	22.20	-42.53	-13.00	-29.53	V



EGPRS 1900: (30-20000)MHz							
The Worst Test Results for Channel 512/1850.2MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3700.49	-34.16	12.60	12.93	-34.49	-13.00	-21.49	H
5550.61	-34.08	13.10	17.11	-38.09	-13.00	-25.09	H
7400.81	-33.26	11.50	22.20	-43.96	-13.00	-30.96	H
3700.18	-34.62	12.60	12.93	-34.95	-13.00	-21.95	V
5550.66	-34.38	13.10	17.11	-38.39	-13.00	-25.39	V
7400.97	-33.15	11.50	22.20	-43.85	-13.00	-30.85	V
The Worst Test Results for Channel 661/1880.0MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3759.85	-33.76	12.60	12.93	-34.09	-13.00	-21.09	H
5640.01	-34.10	13.10	17.11	-38.11	-13.00	-25.11	H
7520.09	-32.16	11.50	22.20	-42.86	-13.00	-29.86	H
3760.04	-34.84	12.60	12.93	-35.17	-13.00	-22.17	V
5640.28	-35.17	13.10	17.11	-39.18	-13.00	-26.18	V
7519.86	-32.13	11.50	22.20	-42.83	-13.00	-29.83	V
The Worst Test Results for Channel 810/1909.8MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3819.44	-34.43	12.60	12.93	-34.76	-13.00	-21.76	H
5729.03	-34.32	13.10	17.11	-38.33	-13.00	-25.33	H
7639.04	-32.32	11.50	22.20	-43.02	-13.00	-30.02	H
3819.54	-35.40	12.60	12.93	-35.73	-13.00	-22.73	V
5729.25	-34.01	13.10	17.11	-38.02	-13.00	-25.02	V
7639.08	-32.08	11.50	22.20	-42.78	-13.00	-29.78	V



WCDMA Band V: (30-9000)MHz							
The worst testresults channel 4132/826.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1652.06	-41.02	9.40	4.75	-36.37	-13.00	-23.37	H
2479.55	-39.78	10.60	8.39	-37.57	-13.00	-24.57	H
3305.84	-32.23	12.00	11.79	-32.02	-13.00	-19.02	H
1652.34	-43.63	9.40	4.75	-38.98	-13.00	-25.98	V
2479.62	-44.99	10.60	8.39	-42.78	-13.00	-29.78	V
3305.56	-42.97	12.00	11.79	-42.76	-13.00	-29.76	V
The Worst Test Results Channel 4183/836.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1673.22	-40.88	9.40	4.75	-36.23	-13.00	-23.23	H
2509.86	-40.25	10.60	8.39	-38.04	-13.00	-25.04	H
3346.14	-30.90	12.00	11.79	-30.69	-13.00	-17.69	H
1672.89	-43.57	9.40	4.75	-38.92	-13.00	-25.92	V
2509.66	-45.20	10.60	8.39	-42.99	-13.00	-29.99	V
3346.02	-42.60	12.00	11.79	-42.39	-13.00	-29.39	V
The Worst Test Results Channel 4233/846.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1693.32	-41.06	9.40	4.75	-36.41	-13.00	-23.41	H
2539.13	-39.73	10.60	8.39	-37.52	-13.00	-24.52	H
3386.32	-31.52	12.00	11.79	-31.31	-13.00	-18.31	H
1693.18	-43.31	9.40	4.75	-38.66	-13.00	-25.66	V
2539.52	-45.28	10.60	8.39	-43.07	-13.00	-30.07	V
3385.91	-42.61	12.00	11.79	-42.40	-13.00	-29.40	V



HSUPA Band V: (30-9000)MHz							
The worst testresults channel 4132/826.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1652.05	-40.35	9.40	4.75	-35.70	-13.00	-22.70	H
2479.69	-40.34	10.60	8.39	-38.13	-13.00	-25.13	H
3305.88	-31.69	12.00	11.79	-31.48	-13.00	-18.48	H
1652.09	-43.19	9.40	4.75	-38.54	-13.00	-25.54	V
2479.35	-44.20	10.60	8.39	-41.99	-13.00	-28.99	V
3305.53	-43.86	12.00	11.79	-43.65	-13.00	-30.65	V
The Worst Test Results Channel 4183/836.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1673.05	-40.90	9.40	4.75	-36.25	-13.00	-23.25	H
2509.92	-39.35	10.60	8.39	-37.14	-13.00	-24.14	H
3346.05	-31.65	12.00	11.79	-31.44	-13.00	-18.44	H
1673.13	-44.16	9.40	4.75	-39.51	-13.00	-26.51	V
2509.80	-44.09	10.60	8.39	-41.88	-13.00	-28.88	V
3346.15	-42.79	12.00	11.79	-42.58	-13.00	-29.58	V
The Worst Test Results Channel 4233/846.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1693.31	-40.62	9.40	4.75	-35.97	-13.00	-22.97	H
2539.14	-39.20	10.60	8.39	-36.99	-13.00	-23.99	H
3385.85	-31.45	12.00	11.79	-31.24	-13.00	-18.24	H
1693.60	-44.20	9.40	4.75	-39.55	-13.00	-26.55	V
2539.48	-43.98	10.60	8.39	-41.77	-13.00	-28.77	V
3386.11	-42.91	12.00	11.79	-42.70	-13.00	-29.70	V



HSDPA Band V: (30-9000)MHz							
The worst testresults channel 4132/826.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1652.15	-41.53	9.40	4.75	-36.88	-13.00	-23.88	H
2479.33	-39.98	10.60	8.39	-37.77	-13.00	-24.77	H
3305.86	-31.87	12.00	11.79	-31.66	-13.00	-18.66	H
1652.04	-44.19	9.40	4.75	-39.54	-13.00	-26.54	V
2479.47	-44.70	10.60	8.39	-42.49	-13.00	-29.49	V
3305.44	-42.69	12.00	11.79	-42.48	-13.00	-29.48	V
The Worst Test Results Channel 4183/836.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1672.85	-41.53	9.40	4.75	-36.88	-13.00	-23.88	H
2509.58	-40.37	10.60	8.39	-38.16	-13.00	-25.16	H
3346.43	-31.99	12.00	11.79	-31.78	-13.00	-18.78	H
1673.03	-44.01	9.40	4.75	-39.36	-13.00	-26.36	V
2509.68	-44.09	10.60	8.39	-41.88	-13.00	-28.88	V
3346.34	-43.40	12.00	11.79	-43.19	-13.00	-30.19	V
The Worst Test Results Channel 4233/846.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1693.55	-41.38	9.40	4.75	-36.73	-13.00	-23.73	H
2539.52	-40.20	10.60	8.39	-37.99	-13.00	-24.99	H
3385.84	-31.16	12.00	11.79	-30.95	-13.00	-17.95	H
1693.36	-43.51	9.40	4.75	-38.86	-13.00	-25.86	V
2539.23	-44.71	10.60	8.39	-42.50	-13.00	-29.50	V
3386.30	-42.67	12.00	11.79	-42.46	-13.00	-29.46	V



WCDMA Band II: (30-20000)MHz							
The Worst Test Results for Channel 9262/1852.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3704.31	-34.55	12.60	12.93	-34.88	-13.00	-21.88	H
5557.45	-34.27	13.10	17.11	-38.28	-13.00	-25.28	H
7409.64	-32.86	11.50	22.20	-43.56	-13.00	-30.56	H
3704.23	-34.96	12.60	12.93	-35.29	-13.00	-22.29	V
5557.41	-34.35	13.10	17.11	-38.36	-13.00	-25.36	V
7409.82	-33.06	11.50	22.20	-43.76	-13.00	-30.76	V
The Worst Test Results for Channel 9400/1880MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3760.03	-34.55	12.60	12.93	-34.88	-13.00	-21.88	H
5639.88	-35.01	13.10	17.11	-39.02	-13.00	-26.02	H
7519.96	-33.10	11.50	22.20	-43.80	-13.00	-30.80	H
3760.24	-35.51	12.60	12.93	-35.84	-13.00	-22.84	V
5640.33	-33.84	13.10	17.11	-37.85	-13.00	-24.85	V
7520.25	-32.88	11.50	22.20	-43.58	-13.00	-30.58	V
The Worst Test Results for Channel 9538/1907.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3815.45	-34.64	12.60	12.93	-34.97	-13.00	-21.97	H
5722.04	-34.90	13.10	17.11	-38.91	-13.00	-25.91	H
7630.12	-32.79	11.50	22.20	-43.49	-13.00	-30.49	H
3815.34	-35.54	12.60	12.93	-35.87	-13.00	-22.87	V
5722.39	-34.85	13.10	17.11	-38.86	-13.00	-25.86	V
7630.13	-32.90	11.50	22.20	-43.60	-13.00	-30.60	V



HSUPA Band II: (30-20000)MHz							
The Worst Test Results for Channel 9262/1852.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3704.29	-33.63	12.60	12.93	-33.96	-13.00	-20.96	H
5557.33	-34.12	13.10	17.11	-38.13	-13.00	-25.13	H
7409.51	-32.65	11.50	22.20	-43.35	-13.00	-30.35	H
3704.42	-35.67	12.60	12.93	-36.00	-13.00	-23.00	V
5557.26	-35.14	13.10	17.11	-39.15	-13.00	-26.15	V
7409.51	-31.84	11.50	22.20	-42.54	-13.00	-29.54	V
The Worst Test Results for Channel 9400/1880MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3760.25	-34.84	12.60	12.93	-35.17	-13.00	-22.17	H
5639.92	-34.74	13.10	17.11	-38.75	-13.00	-25.75	H
7520.17	-33.54	11.50	22.20	-44.24	-13.00	-31.24	H
3760.34	-35.38	12.60	12.93	-35.71	-13.00	-22.71	V
5640.27	-35.22	13.10	17.11	-39.23	-13.00	-26.23	V
7520.25	-33.06	11.50	22.20	-43.76	-13.00	-30.76	V
The Worst Test Results for Channel 9538/1907.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3815.58	-34.61	12.60	12.93	-34.94	-13.00	-21.94	H
5722.03	-34.71	13.10	17.11	-38.72	-13.00	-25.72	H
7630.29	-33.20	11.50	22.20	-43.90	-13.00	-30.90	H
3815.59	-35.10	12.60	12.93	-35.43	-13.00	-22.43	V
5722.37	-34.02	13.10	17.11	-38.03	-13.00	-25.03	V
7630.11	-32.62	11.50	22.20	-43.32	-13.00	-30.32	V



HSDPA Band II: (30-20000)MHz							
The Worst Test Results for Channel 9262/1852.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3704.17	-34.73	12.60	12.93	-35.06	-13.00	-22.06	H
5557.27	-34.47	13.10	17.11	-38.48	-13.00	-25.48	H
7409.71	-32.64	11.50	22.20	-43.34	-13.00	-30.34	H
3704.34	-35.32	12.60	12.93	-35.65	-13.00	-22.65	V
5557.48	-34.82	13.10	17.11	-38.83	-13.00	-25.83	V
7409.63	-32.20	11.50	22.20	-42.90	-13.00	-29.90	V
The Worst Test Results for Channel 9400/1880MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3760.25	-33.53	12.60	12.93	-33.86	-13.00	-20.86	H
5639.94	-34.01	13.10	17.11	-38.02	-13.00	-25.02	H
7520.01	-32.61	11.50	22.20	-43.31	-13.00	-30.31	H
3760.11	-34.58	12.60	12.93	-34.91	-13.00	-21.91	V
5640.12	-34.23	13.10	17.11	-38.24	-13.00	-25.24	V
7520.09	-32.36	11.50	22.20	-43.06	-13.00	-30.06	V
The Worst Test Results for Channel 9538/1907.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3815.45	-34.90	12.60	12.93	-35.23	-13.00	-22.23	H
5722.35	-35.06	13.10	17.11	-39.07	-13.00	-26.07	H
7630.09	-32.26	11.50	22.20	-42.96	-13.00	-29.96	H
3815.60	-35.36	12.60	12.93	-35.69	-13.00	-22.69	V
5722.25	-34.54	13.10	17.11	-38.55	-13.00	-25.55	V
7630.25	-32.22	11.50	22.20	-42.92	-13.00	-29.92	V



WCDMA Band IV: (30-20000)MHz							
The Worst Test Results for Channel 1313/1712.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3425.00	-34.22	12.90	12.05	-33.37	-13.00	-20.37	H
5137.77	-35.40	12.80	16.27	-38.87	-13.00	-25.87	H
6850.21	-32.35	12.30	20.13	-40.18	-13.00	-27.18	H
3425.04	-35.77	12.90	12.05	-34.92	-13.00	-21.92	V
5137.42	-34.92	12.80	16.27	-38.39	-13.00	-25.39	V
6850.26	-32.77	12.30	20.13	-40.60	-13.00	-27.60	V
The Worst Test Results for Channel 1450/1740.0MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3479.81	-34.04	12.90	12.05	-33.19	-13.00	-20.19	H
5219.96	-34.49	12.80	16.27	-37.96	-13.00	-24.96	H
6959.85	-32.22	12.30	20.13	-40.05	-13.00	-27.05	H
3479.61	-35.76	12.90	12.05	-34.91	-13.00	-21.91	V
5219.62	-34.38	12.80	16.27	-37.85	-13.00	-24.85	V
6959.86	-32.40	12.30	20.13	-40.23	-13.00	-27.23	V
The Worst Test Results for Channel 1512/1752.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3504.47	-34.18	12.90	12.05	-33.33	-13.00	-20.33	H
5256.93	-34.26	12.80	16.27	-37.73	-13.00	-24.73	H
7009.56	-33.26	12.30	20.13	-41.09	-13.00	-28.09	H
3504.50	-34.82	12.90	12.05	-33.97	-13.00	-20.97	V
5256.85	-34.87	12.80	16.27	-38.34	-13.00	-25.34	V
7009.41	-31.80	12.30	20.13	-39.63	-13.00	-26.63	V



HSUPA Band IV: (30-20000)MHz							
The Worst Test Results for Channel 1313/1712.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3425.09	-33.72	12.90	12.05	-32.87	-13.00	-19.87	H
5137.34	-35.08	12.80	16.27	-38.55	-13.00	-25.55	H
6849.95	-32.72	12.30	20.13	-40.55	-13.00	-27.55	H
3424.93	-34.83	12.90	12.05	-33.98	-13.00	-20.98	V
5137.40	-35.03	12.80	16.27	-38.50	-13.00	-25.50	V
6850.15	-33.06	12.30	20.13	-40.89	-13.00	-27.89	V
The Worst Test Results for Channel 1450/1740.0MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3479.61	-34.49	12.90	12.05	-33.64	-13.00	-20.64	H
5219.96	-34.94	12.80	16.27	-38.41	-13.00	-25.41	H
6959.91	-32.52	12.30	20.13	-40.35	-13.00	-27.35	H
3479.93	-35.22	12.90	12.05	-34.37	-13.00	-21.37	V
5219.96	-34.15	12.80	16.27	-37.62	-13.00	-24.62	V
6959.77	-32.91	12.30	20.13	-40.74	-13.00	-27.74	V
The Worst Test Results for Channel 1512/1752.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3504.43	-34.41	12.90	12.05	-33.56	-13.00	-20.56	H
5256.90	-34.59	12.80	16.27	-38.06	-13.00	-25.06	H
7009.17	-32.84	12.30	20.13	-40.67	-13.00	-27.67	H
3504.51	-35.95	12.90	12.05	-35.10	-13.00	-22.10	V
5257.09	-34.08	12.80	16.27	-37.55	-13.00	-24.55	V
7009.13	-32.22	12.30	20.13	-40.05	-13.00	-27.05	V



HSDPA Band IV: (30-20000)MHz							
The Worst Test Results for Channel 1313/1712.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3425.14	-33.70	12.90	12.05	-32.85	-13.00	-19.85	H
5137.48	-34.95	12.80	16.27	-38.42	-13.00	-25.42	H
6850.24	-33.27	12.30	20.13	-41.10	-13.00	-28.10	H
3425.12	-35.18	12.90	12.05	-34.33	-13.00	-21.33	V
5137.30	-33.78	12.80	16.27	-37.25	-13.00	-24.25	V
6850.05	-32.90	12.30	20.13	-40.73	-13.00	-27.73	V
The Worst Test Results for Channel 1450/1740.0MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3479.89	-33.73	12.90	12.05	-32.88	-13.00	-19.88	H
5219.94	-34.26	12.80	16.27	-37.73	-13.00	-24.73	H
6959.84	-33.12	12.30	20.13	-40.95	-13.00	-27.95	H
3479.69	-34.89	12.90	12.05	-34.04	-13.00	-21.04	V
5219.56	-34.91	12.80	16.27	-38.38	-13.00	-25.38	V
6959.69	-32.47	12.30	20.13	-40.30	-13.00	-27.30	V
The Worst Test Results for Channel 1512/1752.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3504.52	-33.66	12.90	12.05	-32.81	-13.00	-19.81	H
5256.89	-34.18	12.80	16.27	-37.65	-13.00	-24.65	H
7009.27	-32.82	12.30	20.13	-40.65	-13.00	-27.65	H
3504.34	-34.57	12.90	12.05	-33.72	-13.00	-20.72	V
5257.19	-34.21	12.80	16.27	-37.68	-13.00	-24.68	V
7009.50	-32.45	12.30	20.13	-40.28	-13.00	-27.28	V



CDMA BC0: (30-20000)MHz							
The Worst Test Results for Channel 1013/824.7MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1649.51	-33.49	9.56	9.72	-33.65	-13.00	-20.65	H
2474.32	-35.47	10.50	10.86	-35.83	-13.00	-22.83	H
3298.31	-33.24	12.78	11.57	-32.03	-13.00	-19.03	H
1649.62	-35.02	9.56	9.72	-35.18	-13.00	-22.18	V
2474.35	-35.25	10.50	10.86	-35.61	-13.00	-22.61	V
3298.03	-32.02	12.78	11.57	-30.81	-13.00	-17.81	V
The Worst Test Results for Channel 384/836.52MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1673.74	-34.16	9.56	9.72	-34.32	-13.00	-21.32	H
2509.44	-34.83	10.50	10.86	-35.19	-13.00	-22.19	H
3346.31	-32.33	12.78	11.57	-31.12	-13.00	-18.12	H
1673.37	-34.69	9.56	9.72	-34.85	-13.00	-21.85	V
2509.70	-34.03	10.50	10.86	-34.39	-13.00	-21.39	V
3346.08	-33.07	12.78	11.57	-31.86	-13.00	-18.86	V
The Worst Test Results for Channel 1175/848.31MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1696.61	-33.91	9.56	9.72	-34.07	-13.00	-21.07	H
2544.18	-35.11	10.50	10.86	-35.47	-13.00	-22.47	H
3393.84	-32.68	12.78	11.57	-31.47	-13.00	-18.47	H
1696.59	-35.19	9.56	9.72	-35.35	-13.00	-22.35	V
2544.38	-34.76	10.50	10.86	-35.12	-13.00	-22.12	V
3393.79	-31.90	12.78	11.57	-30.69	-13.00	-17.69	V



EVDO BC0: (30-20000)MHz							
The Worst Test Results for Channel 1013/824.7MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1649.65	-34.23	9.56	9.72	-34.39	-13.00	-21.39	H
2474.53	-35.18	10.50	10.86	-35.54	-13.00	-22.54	H
3298.34	-33.21	12.78	11.57	-32.00	-13.00	-19.00	H
1649.62	-35.71	9.56	9.72	-35.87	-13.00	-22.87	V
2474.22	-34.40	10.50	10.86	-34.76	-13.00	-21.76	V
3298.05	-32.27	12.78	11.57	-31.06	-13.00	-18.06	V
The Worst Test Results for Channel 384/836.52MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1673.59	-34.00	9.56	9.72	-34.16	-13.00	-21.16	H
2509.45	-34.18	10.50	10.86	-34.54	-13.00	-21.54	H
3346.07	-32.44	12.78	11.57	-31.23	-13.00	-18.23	H
1673.50	-35.75	9.56	9.72	-35.91	-13.00	-22.91	V
2509.68	-34.22	10.50	10.86	-34.58	-13.00	-21.58	V
3346.15	-33.04	12.78	11.57	-31.83	-13.00	-18.83	V
The Worst Test Results for Channel 1175/848.31MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1696.57	-33.81	9.56	9.72	-33.97	-13.00	-20.97	H
2544.23	-34.71	10.50	10.86	-35.07	-13.00	-22.07	H
3393.65	-32.30	12.78	11.57	-31.09	-13.00	-18.09	H
1696.47	-34.98	9.56	9.72	-35.14	-13.00	-22.14	V
2544.07	-34.77	10.50	10.86	-35.13	-13.00	-22.13	V
3393.46	-32.41	12.78	11.57	-31.20	-13.00	-18.20	V



CDMA BC1: (30-20000)MHz							
The Worst Test Results for Channel 25/1851.25MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3702.17	-34.40	12.60	12.93	-34.73	-13.00	-21.73	H
5553.45	-34.73	13.10	17.11	-38.74	-13.00	-25.74	H
7405.68	-33.48	11.50	22.20	-44.18	-13.00	-31.18	H
3702.54	-35.38	12.60	12.93	-35.71	-13.00	-22.71	V
5553.51	-34.28	13.10	17.11	-38.29	-13.00	-25.29	V
7405.90	-32.01	11.50	22.20	-42.71	-13.00	-29.71	V
The Worst Test Results for Channel 600/1880MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3759.80	-33.56	12.60	12.93	-33.89	-13.00	-20.89	H
5639.96	-35.26	13.10	17.11	-39.27	-13.00	-26.27	H
7520.19	-32.99	11.50	22.20	-43.69	-13.00	-30.69	H
3760.07	-34.67	12.60	12.93	-35.00	-13.00	-22.00	V
5640.33	-35.11	13.10	17.11	-39.12	-13.00	-26.12	V
7520.00	-32.43	11.50	22.20	-43.13	-13.00	-30.13	V
The Worst Test Results for Channel 1175/1908.75MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3817.28	-33.57	12.60	12.93	-33.90	-13.00	-20.90	H
5726.10	-34.67	13.10	17.11	-38.68	-13.00	-25.68	H
7634.93	-33.53	11.50	22.20	-44.23	-13.00	-31.23	H
3817.45	-34.75	12.60	12.93	-35.08	-13.00	-22.08	V
5726.10	-33.86	13.10	17.11	-37.87	-13.00	-24.87	V
7635.06	-32.97	11.50	22.20	-43.67	-13.00	-30.67	V



EVDO BC1: (30-20000)MHz							
The Worst Test Results for Channel 25/1851.25MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3702.11	-34.86	12.60	12.93	-35.19	-13.00	-22.19	H
5553.44	-35.16	13.10	17.11	-39.17	-13.00	-26.17	H
7405.63	-33.62	11.50	22.20	-44.32	-13.00	-31.32	H
3702.44	-34.76	12.60	12.93	-35.09	-13.00	-22.09	V
5553.40	-34.33	13.10	17.11	-38.34	-13.00	-25.34	V
7405.53	-32.12	11.50	22.20	-42.82	-13.00	-29.82	V
The Worst Test Results for Channel 600/1880MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3760.22	-33.88	12.60	12.93	-34.21	-13.00	-21.21	H
5639.94	-34.46	13.10	17.11	-38.47	-13.00	-25.47	H
7520.16	-33.54	11.50	22.20	-44.24	-13.00	-31.24	H
3760.32	-35.55	12.60	12.93	-35.88	-13.00	-22.88	V
5639.98	-34.77	13.10	17.11	-38.78	-13.00	-25.78	V
7520.28	-33.14	11.50	22.20	-43.84	-13.00	-30.84	V
The Worst Test Results for Channel 1175/1908.75MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3817.69	-34.25	12.60	12.93	-34.58	-13.00	-21.58	H
5725.99	-34.84	13.10	17.11	-38.85	-13.00	-25.85	H
7634.92	-32.19	11.50	22.20	-42.89	-13.00	-29.89	H
3817.60	-35.63	12.60	12.93	-35.96	-13.00	-22.96	V
5725.78	-33.96	13.10	17.11	-37.97	-13.00	-24.97	V
7634.91	-32.68	11.50	22.20	-43.38	-13.00	-30.38	V



APPENDIX-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

※※※※END OF THE REPORT※※※※

