




Z Axis Scan



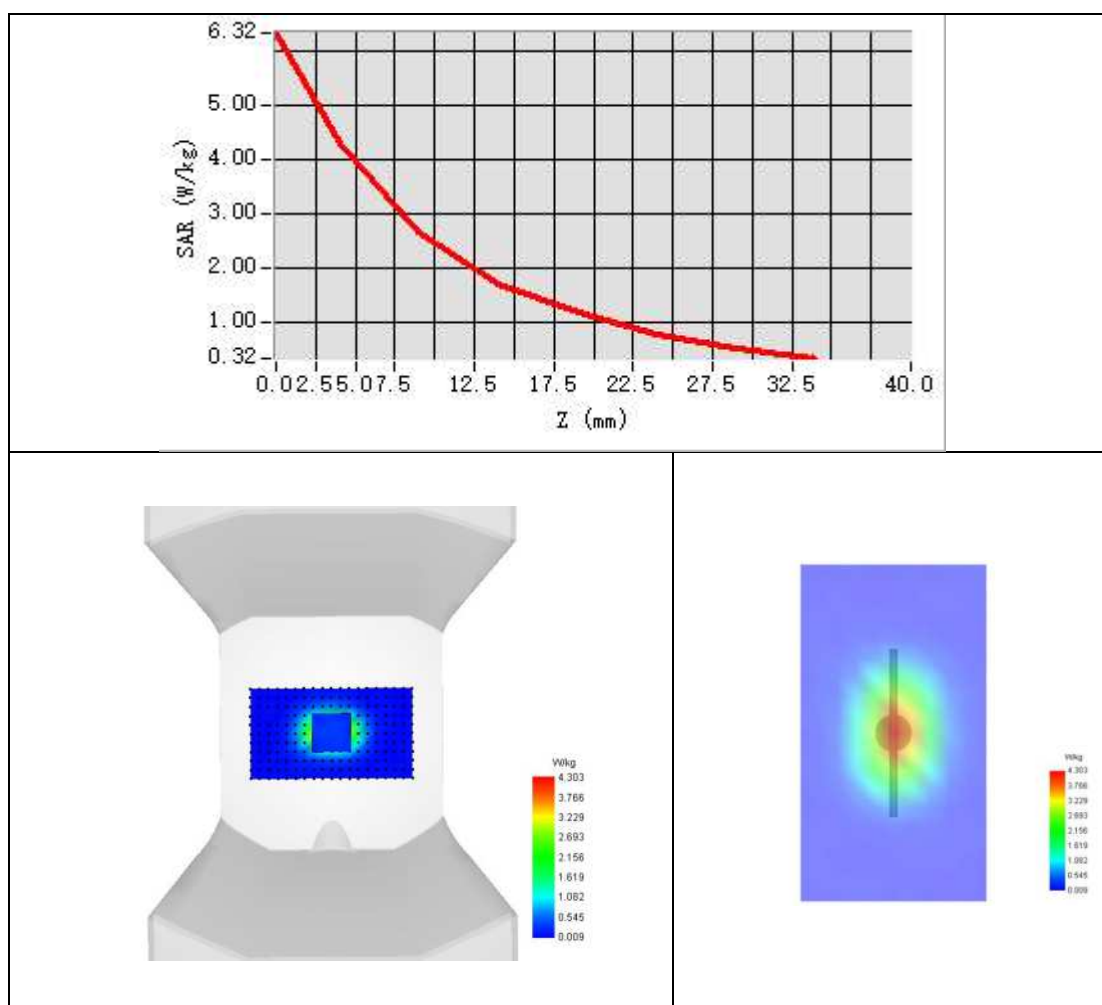

System Performance Check Data (1800MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement:2025-05-25

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW1800
Channels	Middle
Signal	CW
Frequency (MHz)	1800.000
Relative permittivity	40.27
Conductivity (S/m)	1.37
Probe	SN 04/22 EPGO364
ConvF	1.92
Crest factor:	1:1

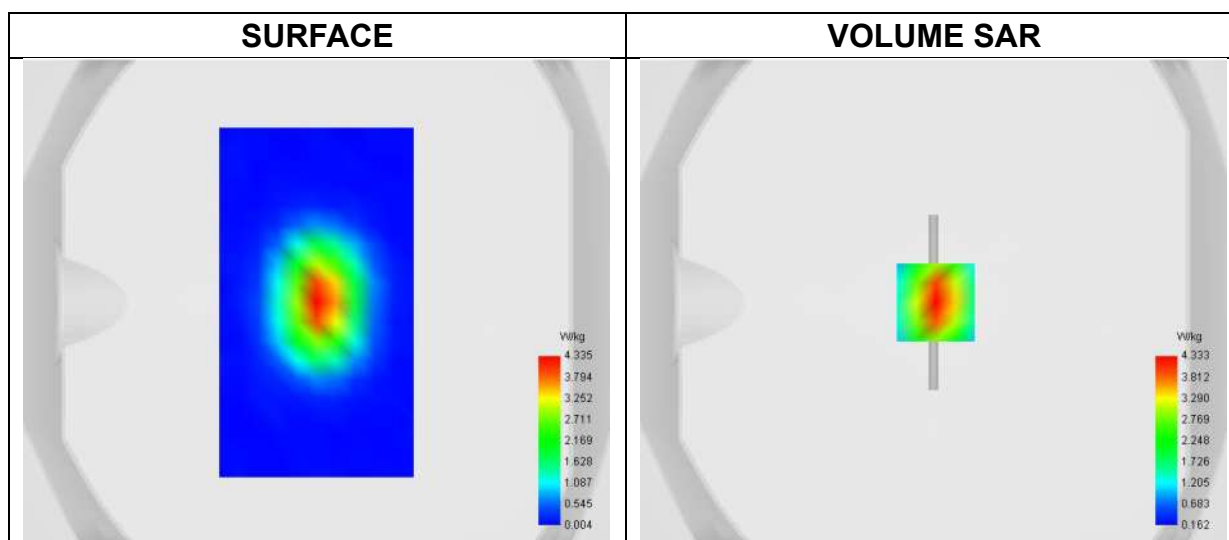


Maximum location: X=1.00, Y=0.00 ; SAR Peak: 6.42 W/kg

SAR 10g (W/Kg)	2.048
SAR 1g (W/Kg)	3.913



Z Axis Scan

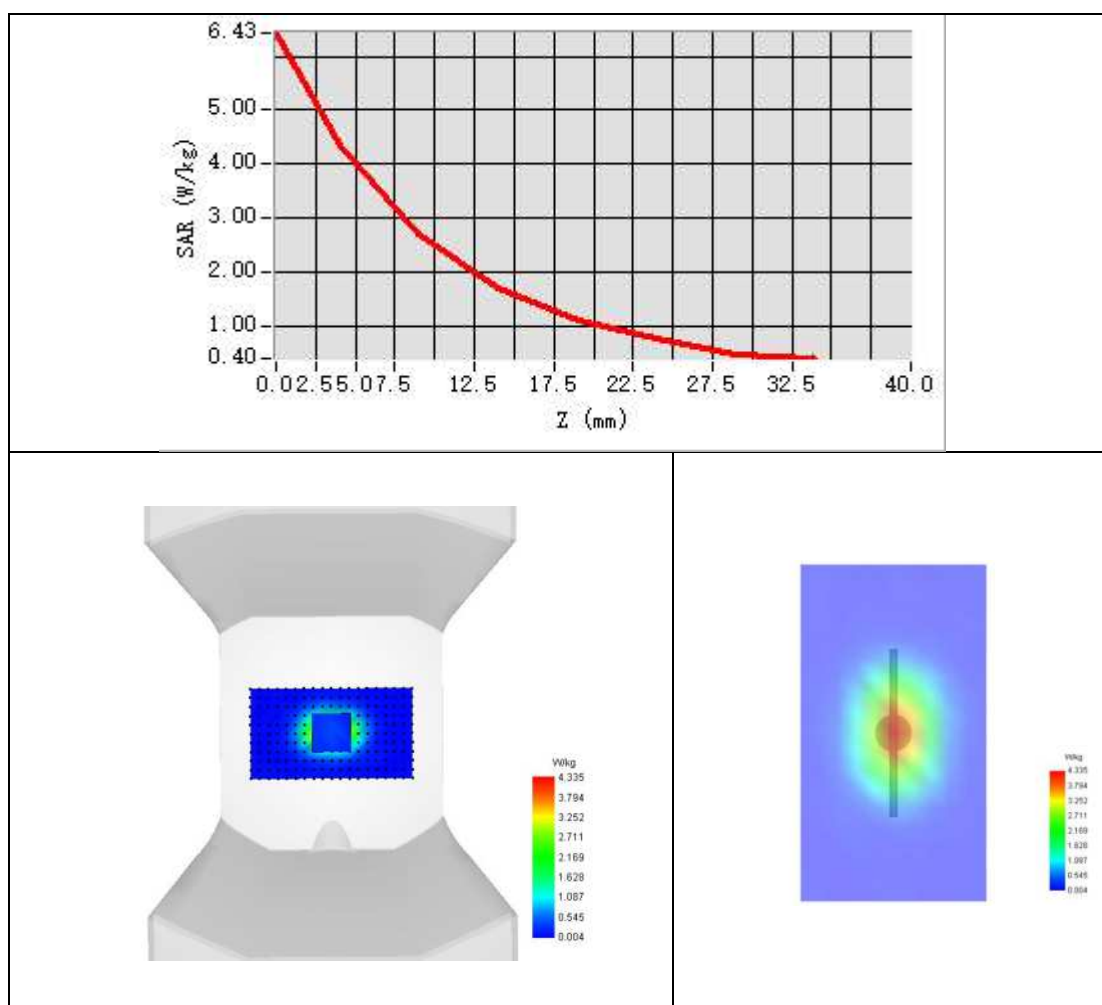



System Performance Check Data (1900MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement:2025-05-17

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Channels	Middle
Signal	CW
Frequency (MHz)	1900.000
Relative permittivity	40.54
Conductivity (S/m)	1.39
Probe	SN 04/22 EPGO364
ConvF	2.20
Crest factor:	1:1

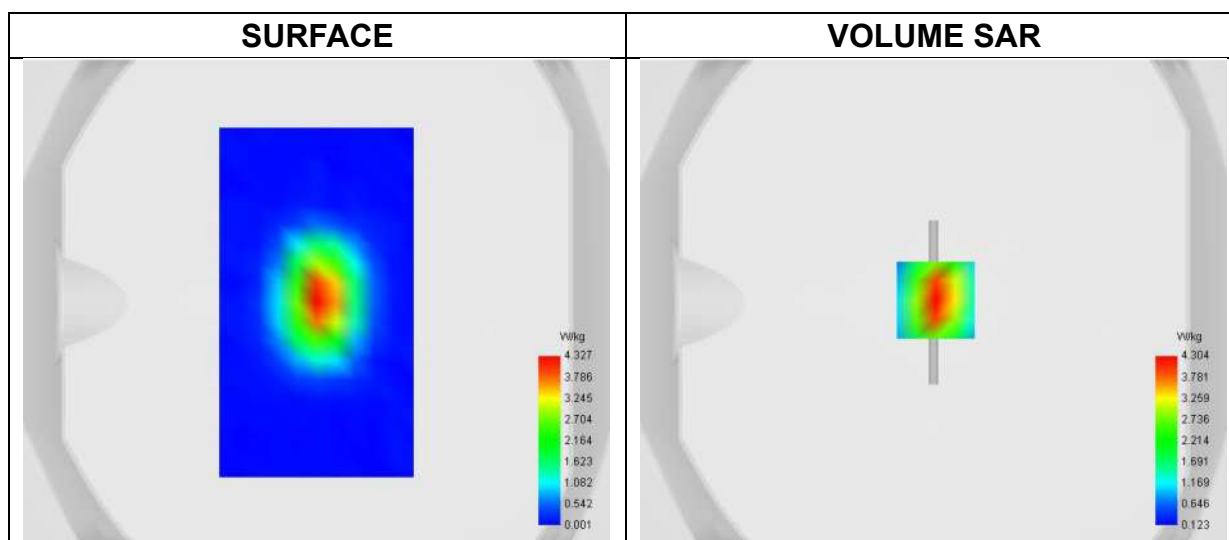


Maximum location: X=1.00, Y=1.00 ; SAR Peak: 6.64 W/kg

SAR 10g (W/Kg)	2.068
SAR 1g (W/Kg)	4.190



Z Axis Scan

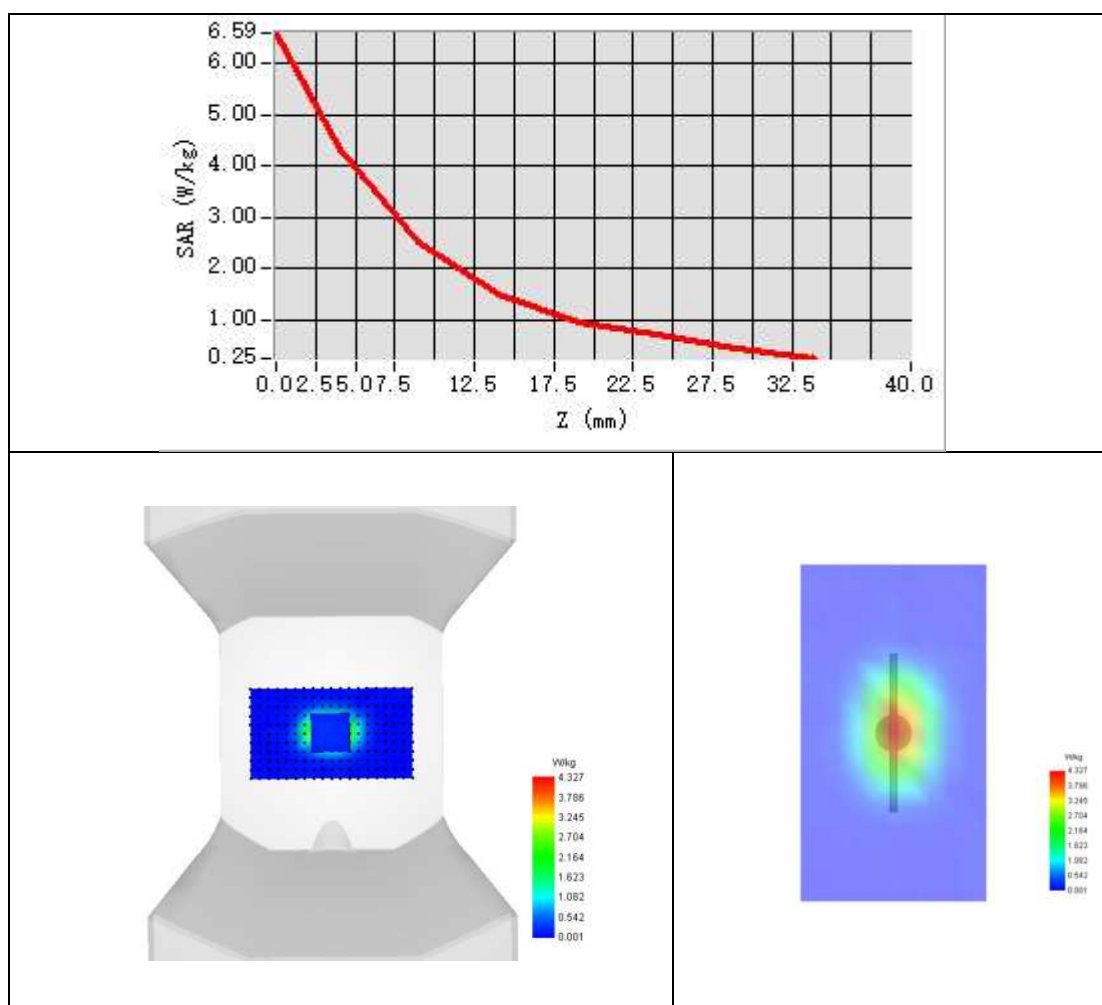



System Performance Check Data (1900MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement:2025-05-15

Experimental conditions.


Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Channels	Middle
Signal	CW
Frequency (MHz)	1900.000
Relative permittivity	40.28
Conductivity (S/m)	1.39
Probe	SN 04/22 EPGO364
ConvF	2.20
Crest factor:	1:1

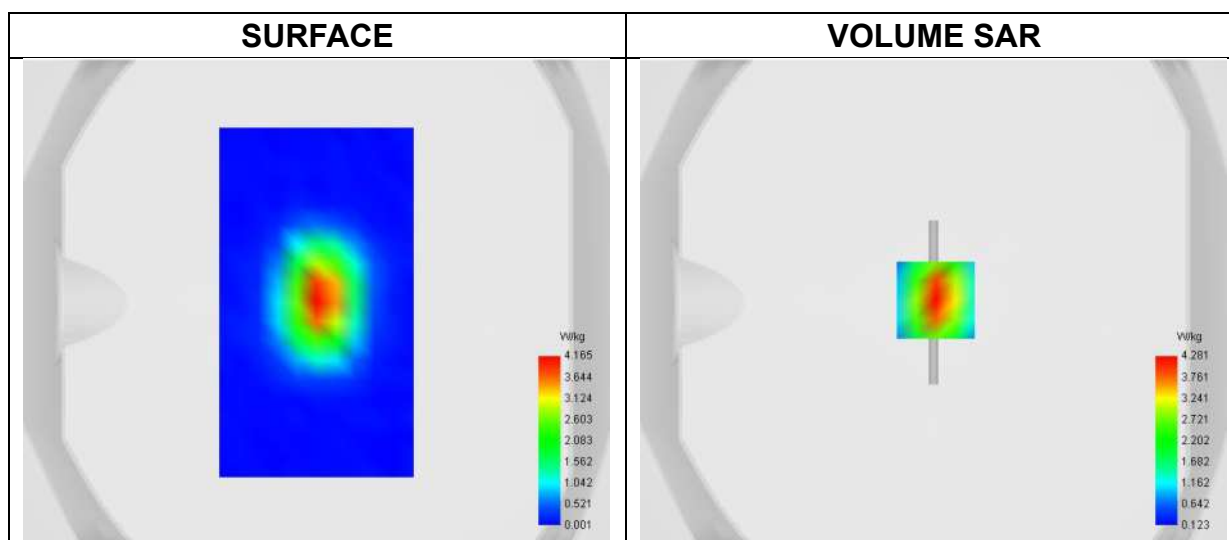

Maximum location: X=1.00, Y=1.00 ; SAR Peak: 6.79 W/kg

SAR 10g (W/Kg)	2.043
SAR 1g (W/Kg)	4.064

Z Axis Scan

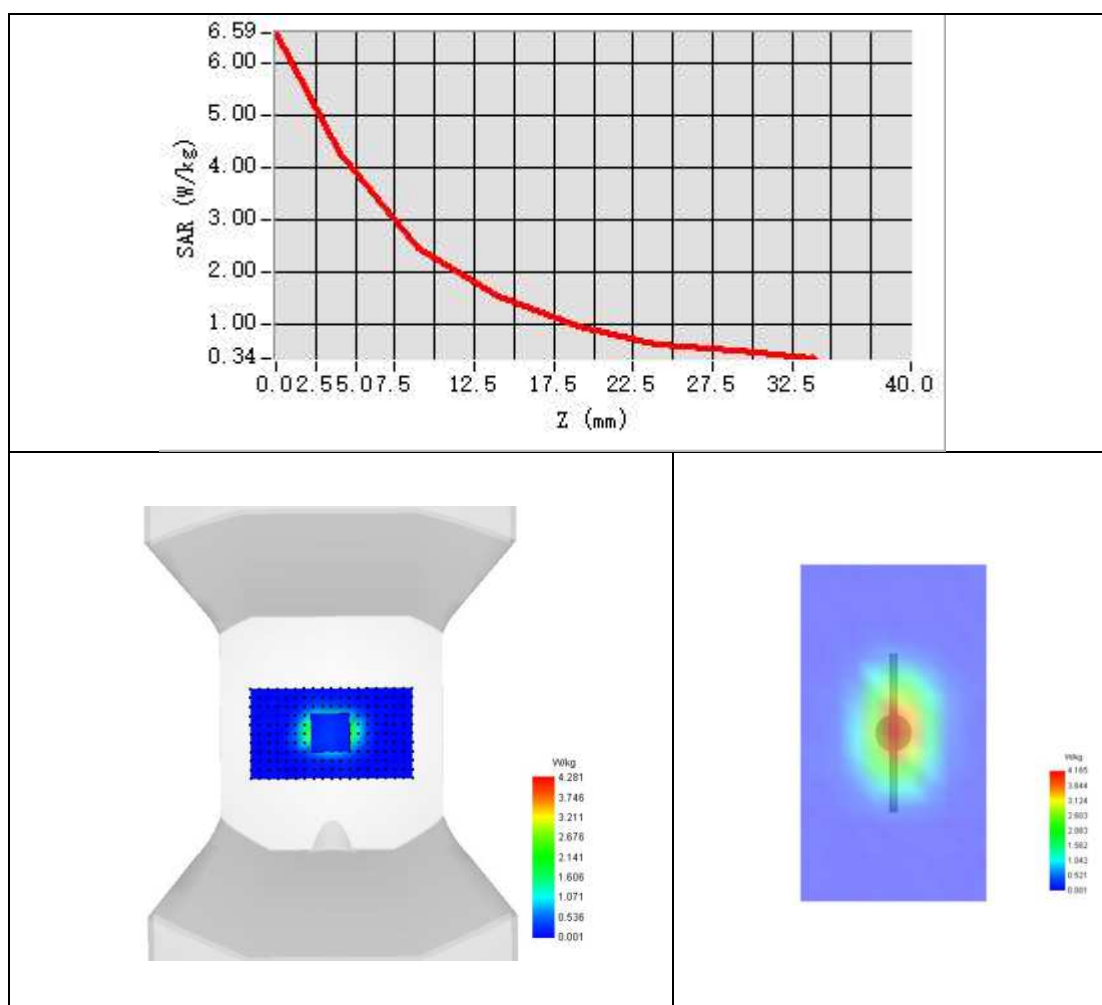



System Performance Check Data (1900MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement:2025-05-24

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Channels	Middle
Signal	CW
Frequency (MHz)	1900.000
Relative permittivity	41.32
Conductivity (S/m)	1.38
Probe	SN 04/22 EPGO364
ConvF	2.20
Crest factor:	1:1

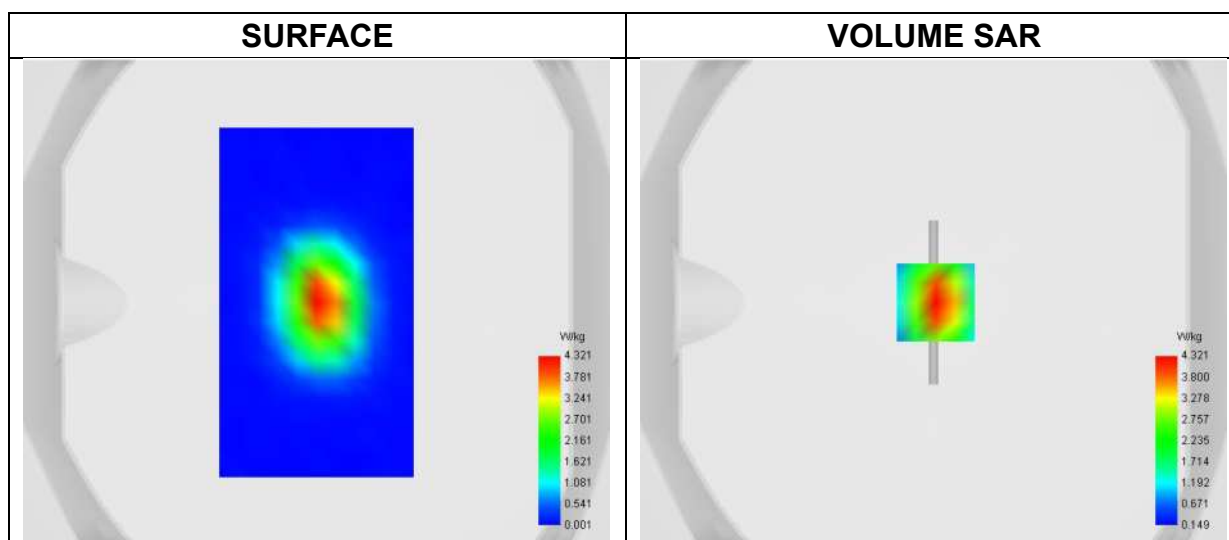


Maximum location: X=1.00, Y=1.00 ; SAR Peak: 6.42 W/kg

SAR 10g (W/Kg)	2.073
SAR 1g (W/Kg)	4.129



Z Axis Scan

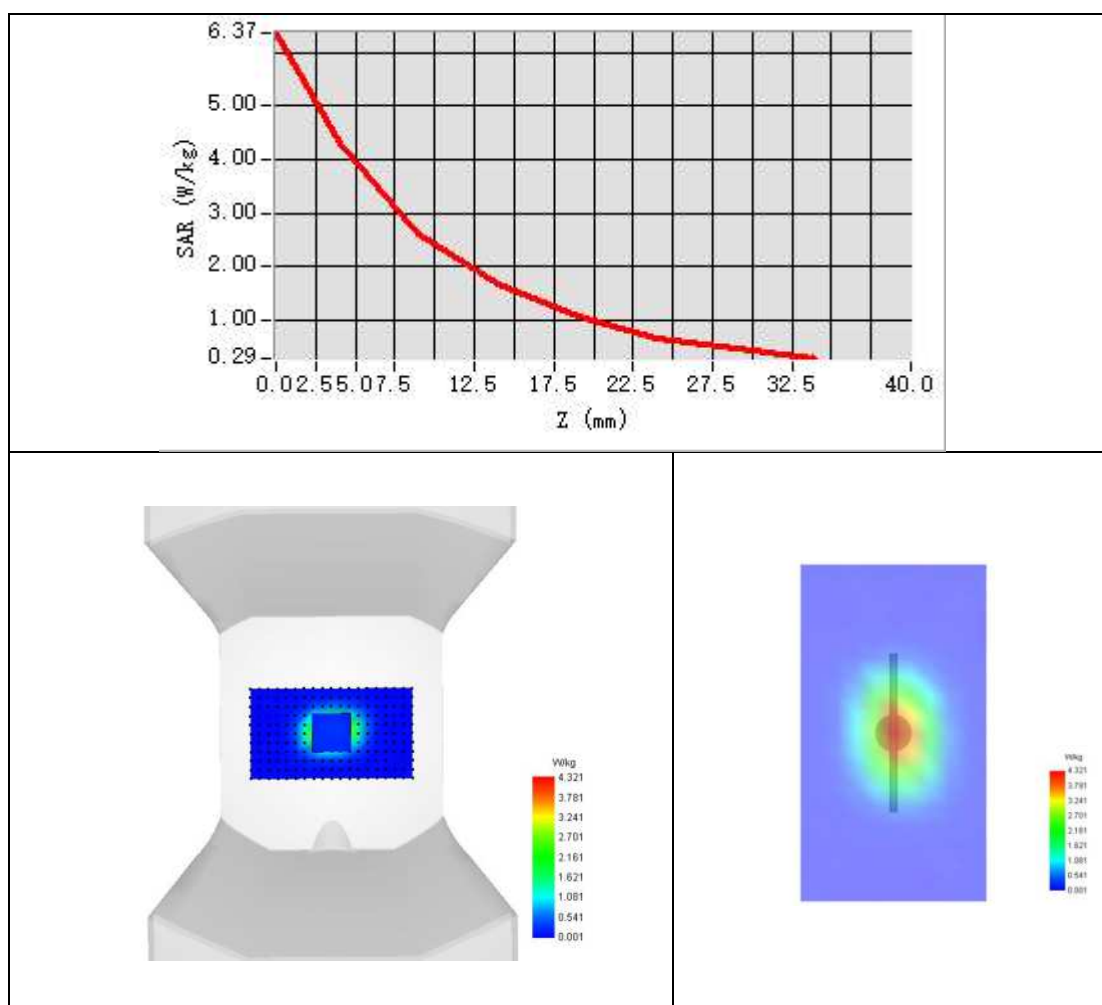



System Performance Check Data (2300MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement:2025-05-21

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW2300
Channels	Middle
Signal	CW
Frequency (MHz)	2300.000
Relative permittivity	40.00
Conductivity (S/m)	1.67
Probe	SN 04/22 EPGO364
ConvF	2.32
Crest factor:	1:1

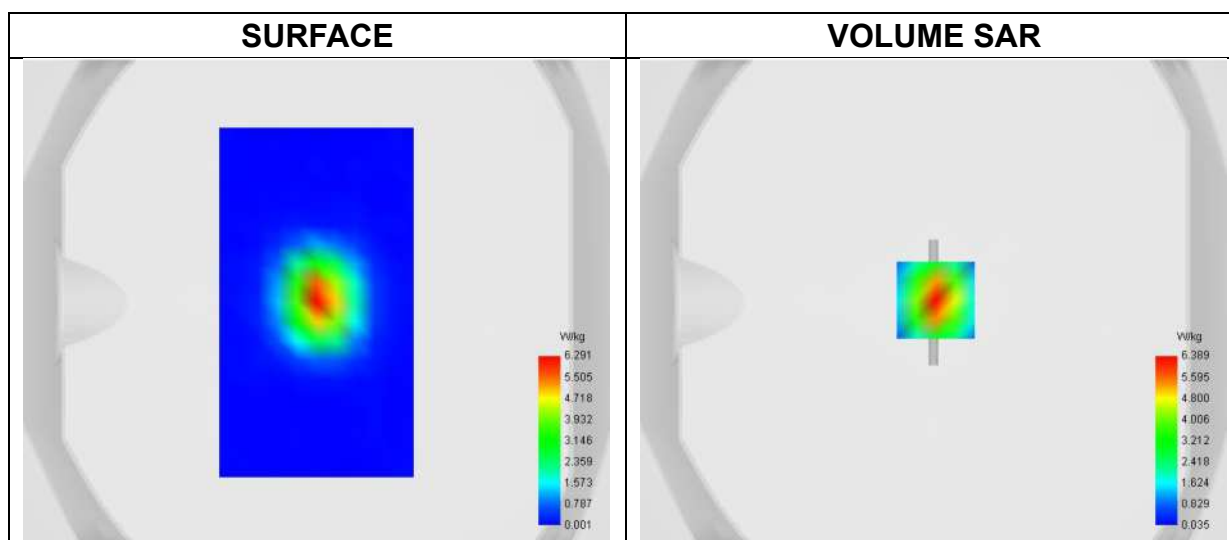


Maximum location: X=1.00, Y=1.00 ; SAR Peak: 9.94 W/kg

SAR 10g (W/Kg)	2.329
SAR 1g (W/Kg)	5.104



Z Axis Scan

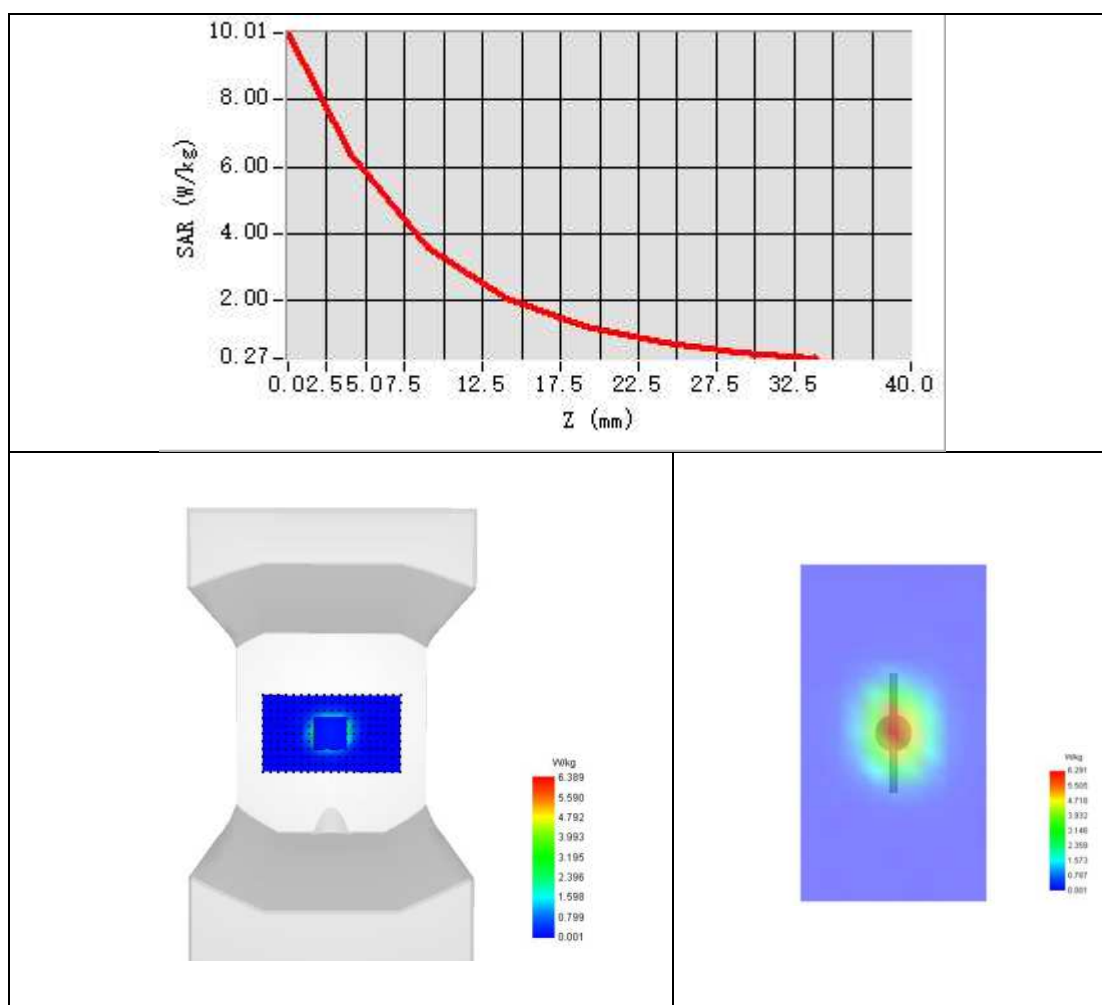



System Performance Check Data (2450MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement:2025-05-25

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Channels	Middle
Signal	CW
Frequency (MHz)	2450.000
Relative permittivity	39.61
Conductivity (S/m)	1.78
Probe	SN 04/22 EPGO364
ConvF	2.33
Crest factor:	1:1

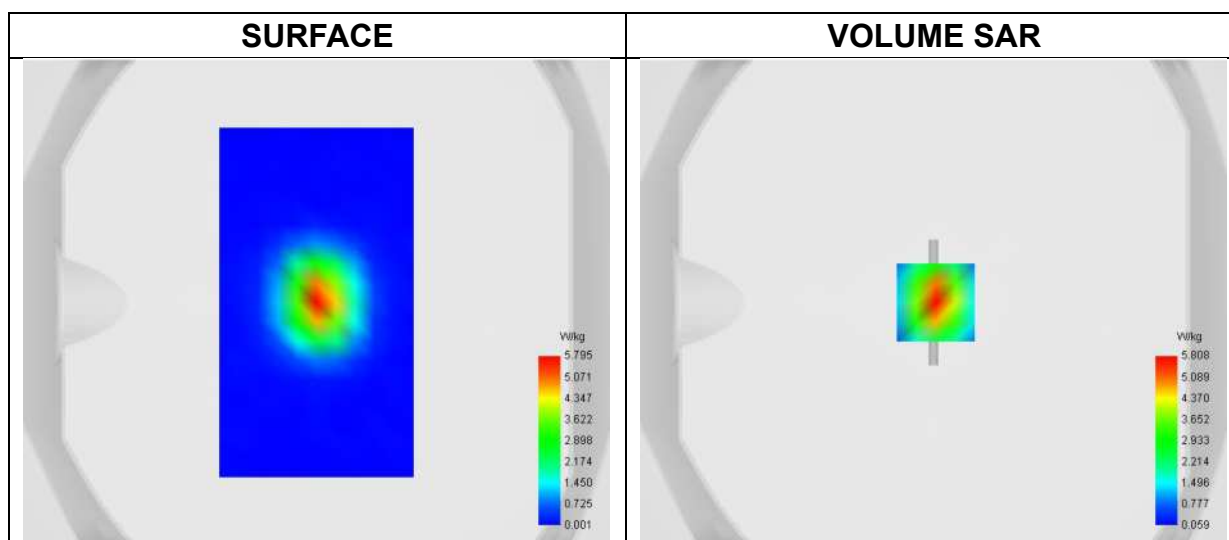


Maximum location: X=1.00, Y=0.00 ; SAR Peak: 8.91 W/kg

SAR 10g (W/Kg)	2.388
SAR 1g (W/Kg)	5.437



Z Axis Scan

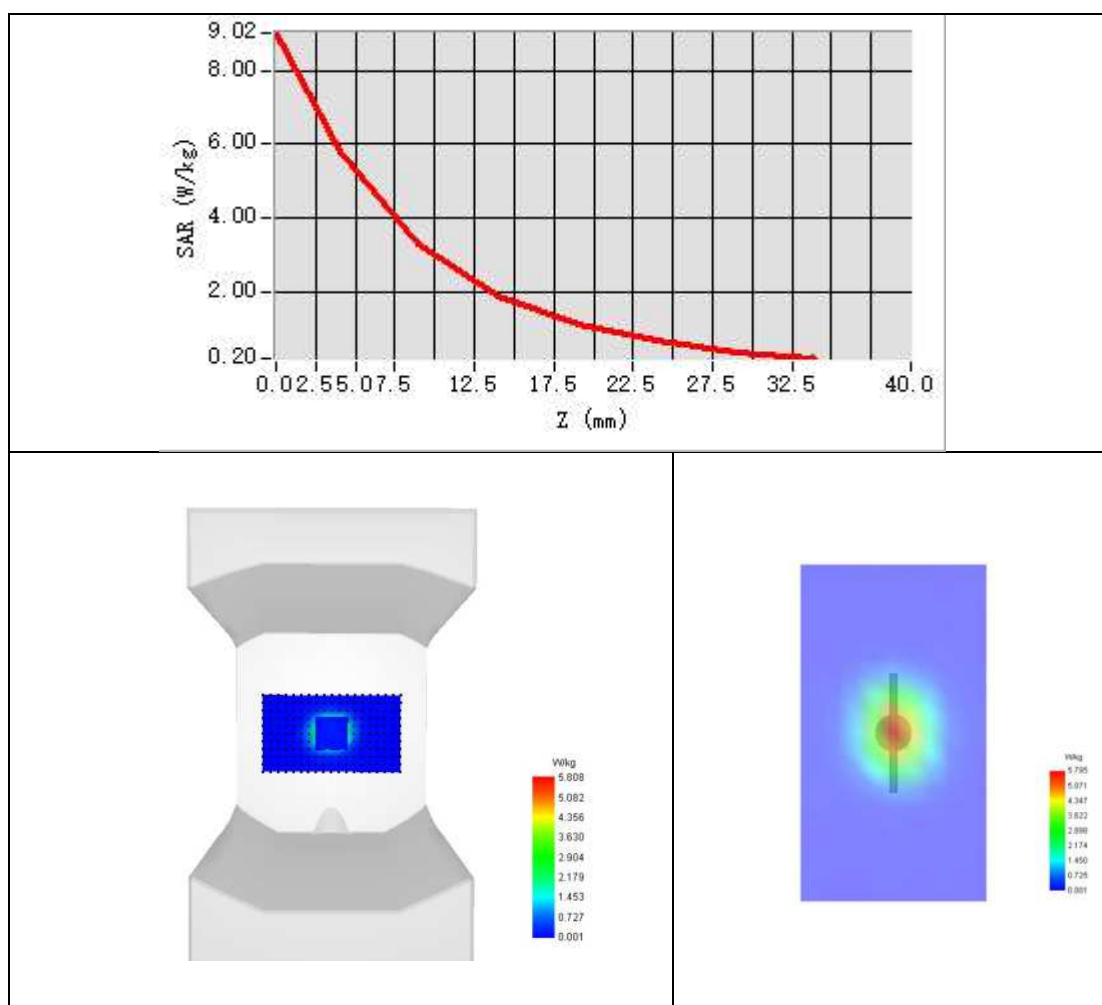



System Performance Check Data (2600MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement:2025-05-12

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Channels	Middle
Signal	CW
Frequency (MHz)	2600.000
Relative permittivity	39.74
Conductivity (S/m)	2.02
Probe	SN 04/22 EPGO364
ConvF	2.37
Crest factor:	1:1

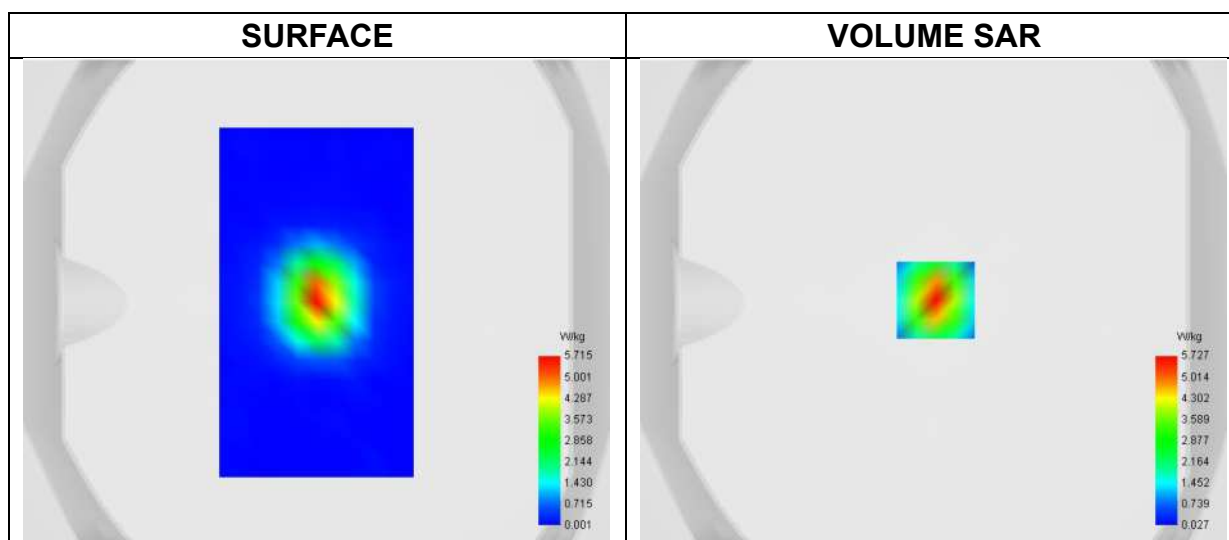


Maximum location: X=1.00, Y=1.00 ; SAR Peak: 8.88 W/kg

SAR 10g (W/Kg)	2.449
SAR 1g (W/Kg)	5.698



Z Axis Scan

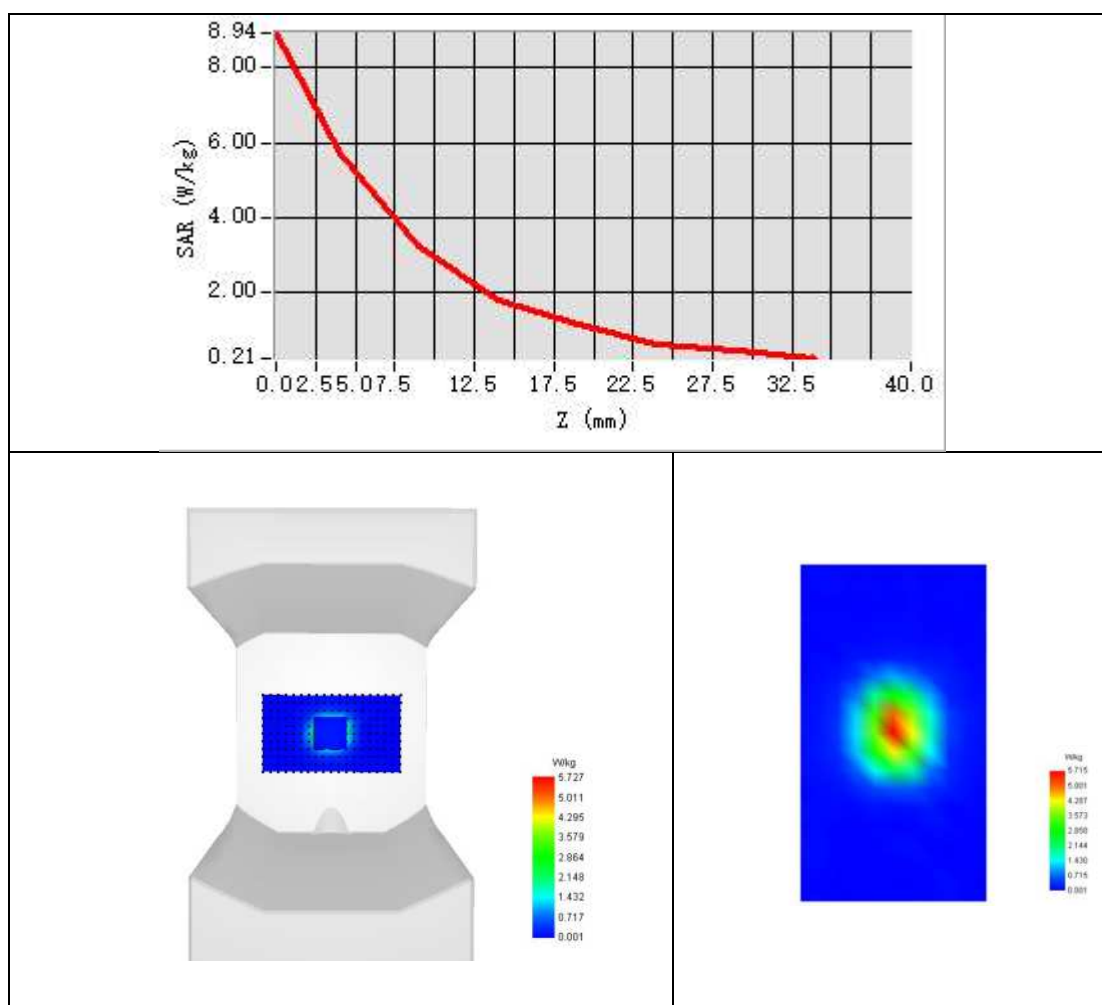



System Performance Check Data (2600MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement:2025-05-13

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Channels	Middle
Signal	CW
Frequency (MHz)	2600.000
Relative permittivity	39.33
Conductivity (S/m)	1.98
Probe	SN 04/22 EPGO364
ConvF	2.37
Crest factor:	1:1

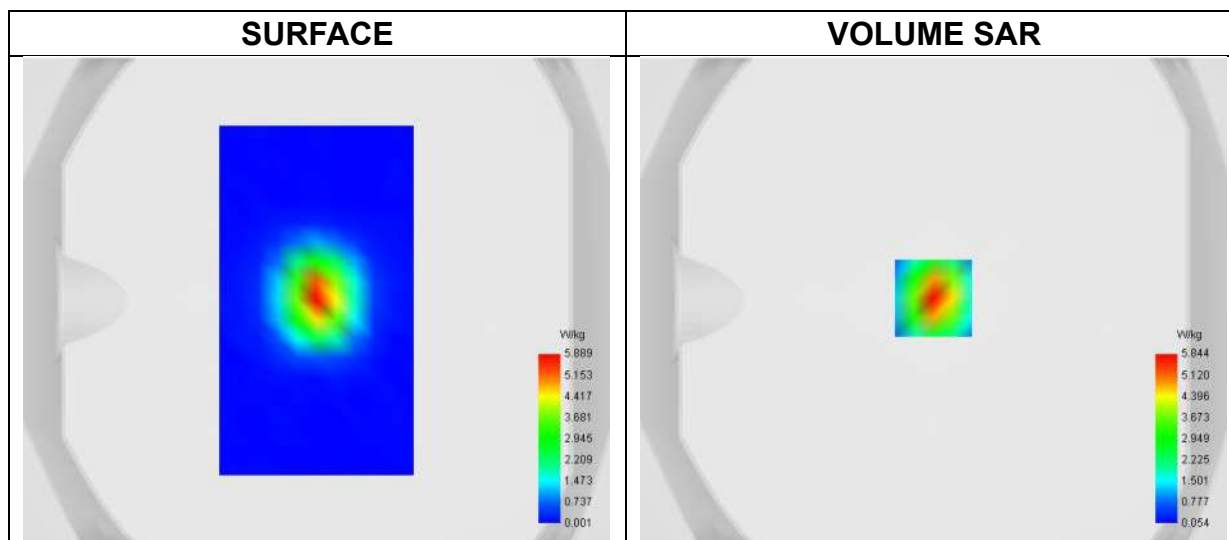


Maximum location: X=0.00, Y=1.00 ; SAR Peak: 9.02 W/kg

SAR 10g (W/Kg)	2.415
SAR 1g (W/Kg)	5.661



Z Axis Scan

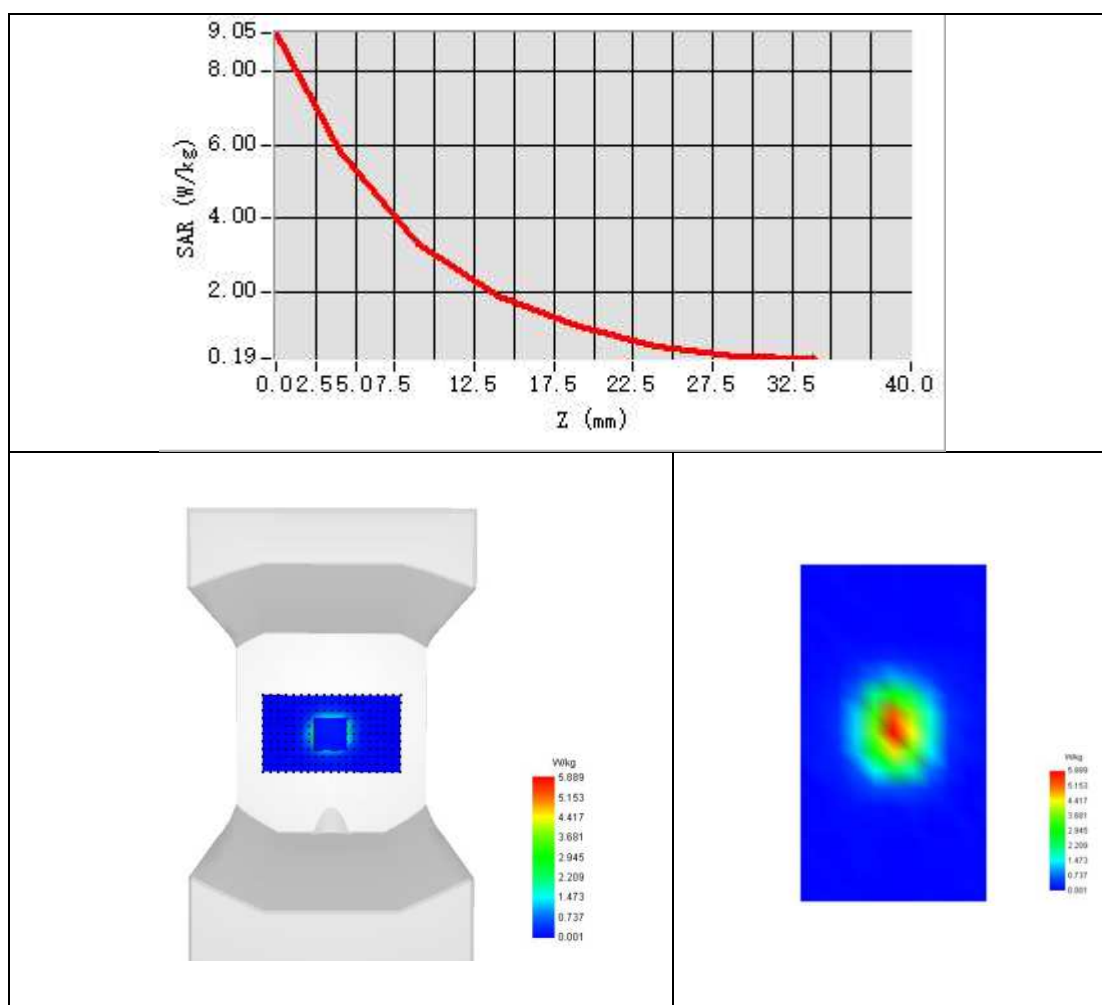



System Performance Check Data (2600MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement:2025-05-27

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Channels	Middle
Signal	CW
Frequency (MHz)	2600.000
Relative permittivity	40.18
Conductivity (S/m)	1.94
Probe	SN 04/22 EPGO364
ConvF	2.37
Crest factor:	1:1

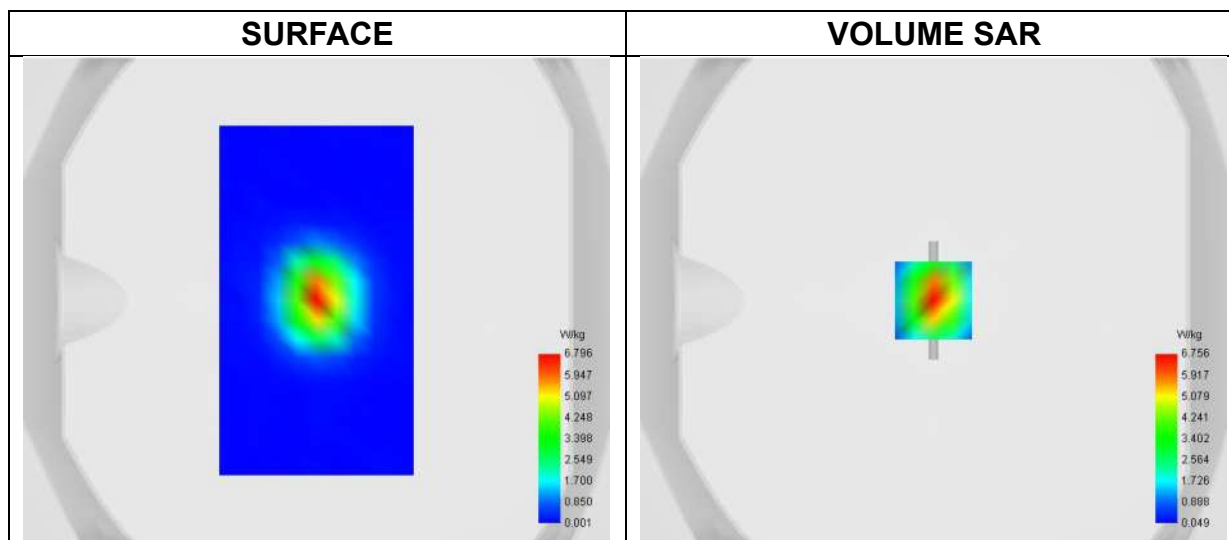


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 10.63W/kg

SAR 10g (W/Kg)	2.411
SAR 1g (W/Kg)	5.672



Z Axis Scan

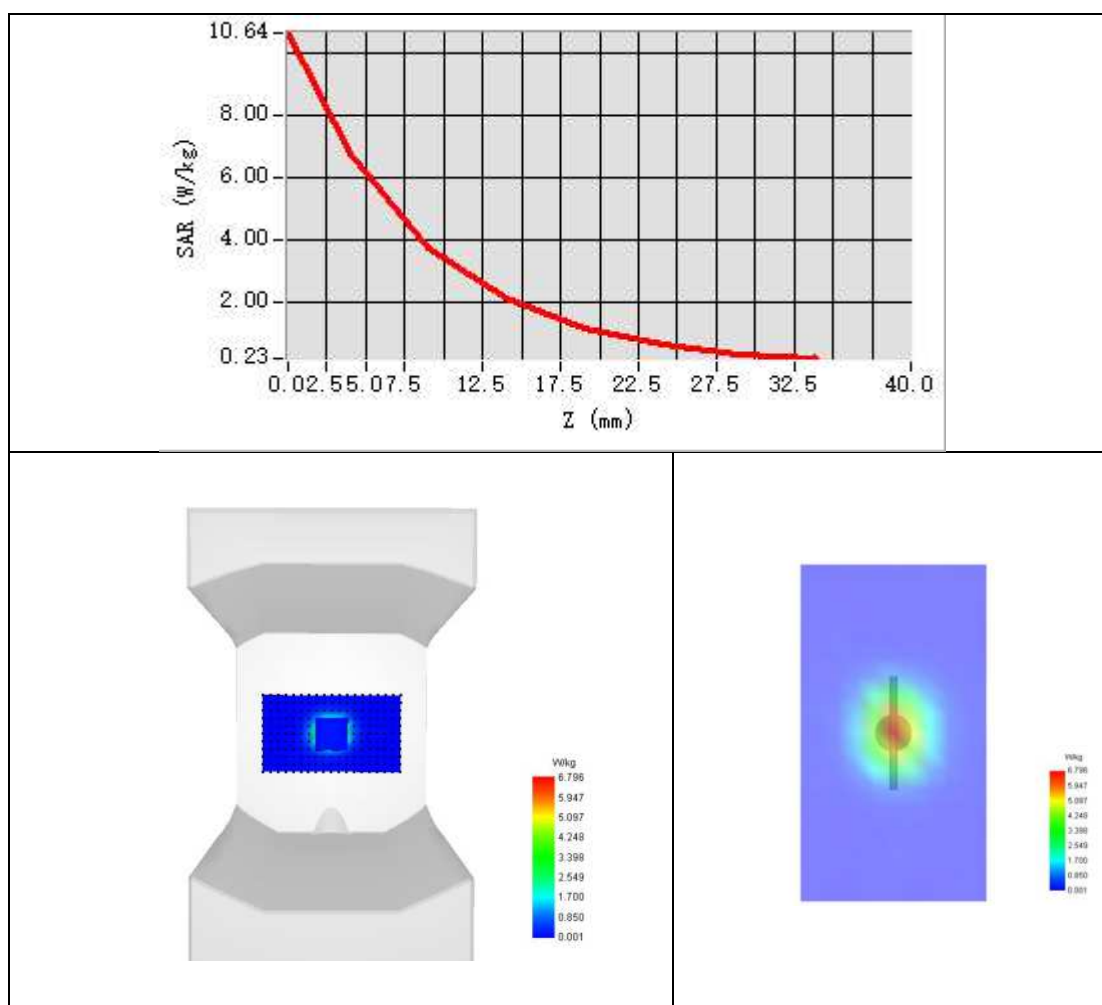



System Performance Check Data (3700MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=4mm, dy=4mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2025-05-26

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW3700
Channels	Middle
Signal	CW
Frequency (MHz)	3700.000
Relative permittivity	38.25
Conductivity (S/m)	3.09
Probe	SN 04/22 EPGO364
ConvF	1.81
Crest factor:	1:1

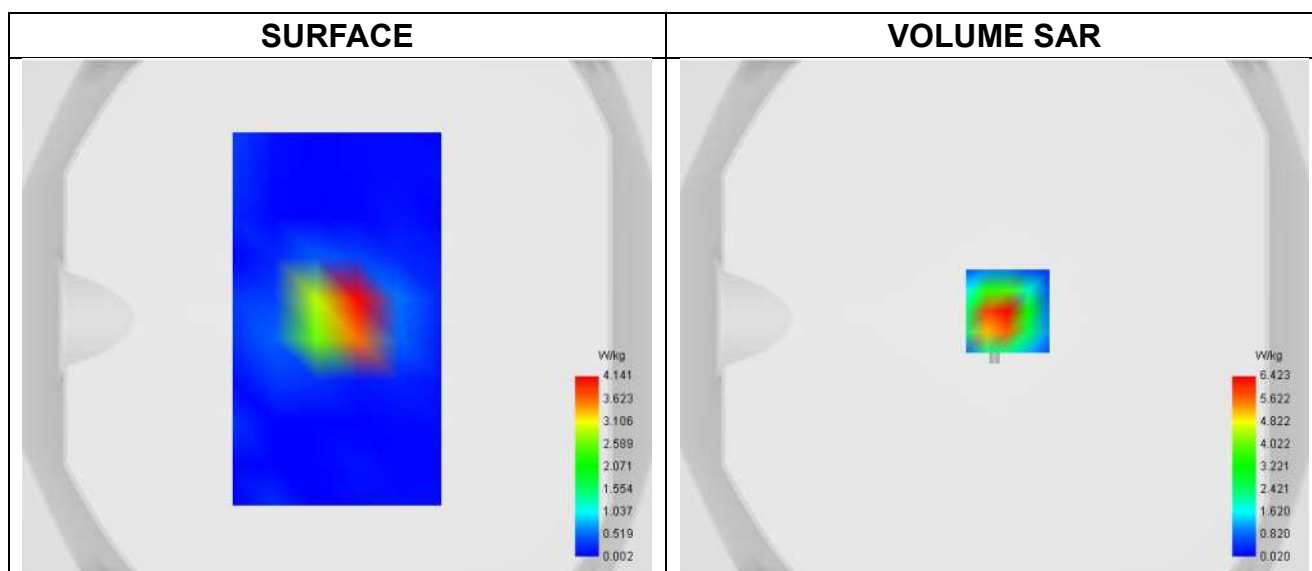


Maximum location: X=5.00, Y=3.00 ; SAR Peak: 14.05 W/kg

SAR 10g (W/Kg)	2.544
SAR 1g (W/Kg)	6.996



Z Axis Scan

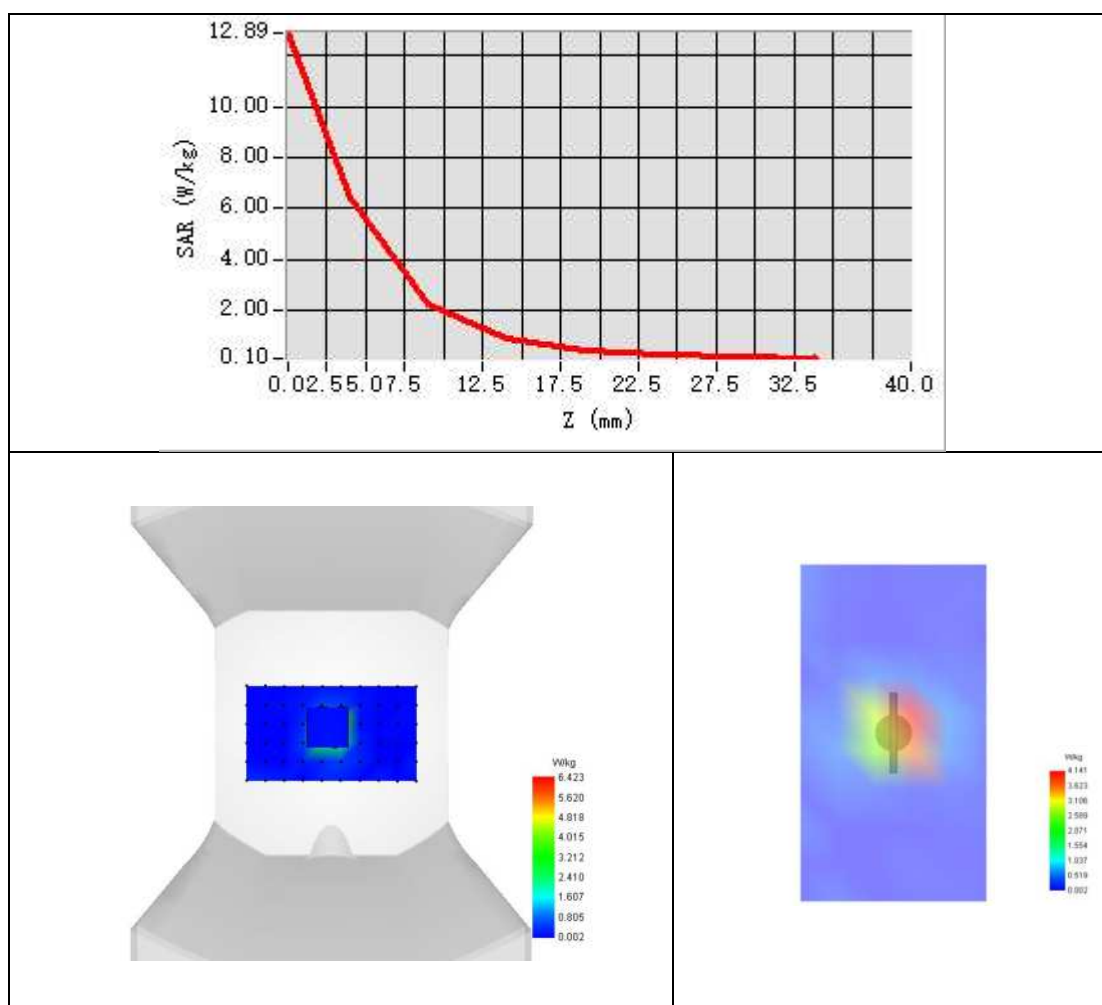



System Performance Check Data (3900MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=4mm, dy=4mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2025-05-26

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW3900
Channels	Middle
Signal	CW
Frequency (MHz)	3900.000
Relative permittivity	38.80
Conductivity (S/m)	3.25
Probe	SN 04/22 EPGO364
ConvF	1.81
Crest factor:	1:1

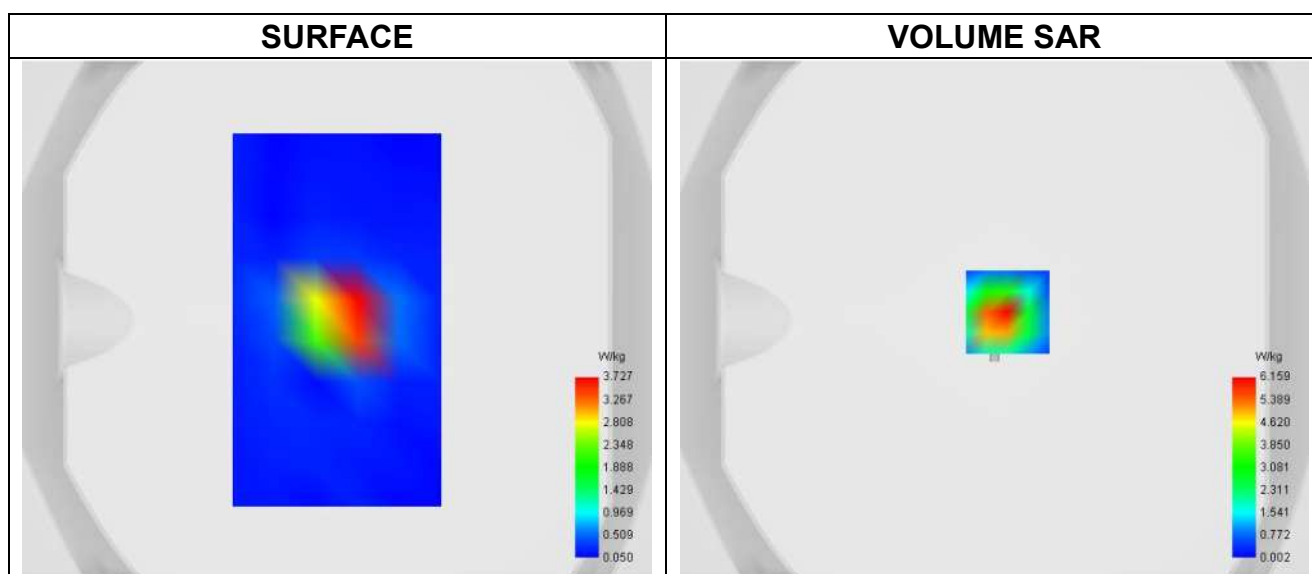


Maximum location: X=5.00, Y=3.00 ; SAR Peak: 13.15 W/kg

SAR 10g (W/Kg)	2.453
SAR 1g (W/Kg)	6.974



Z Axis Scan

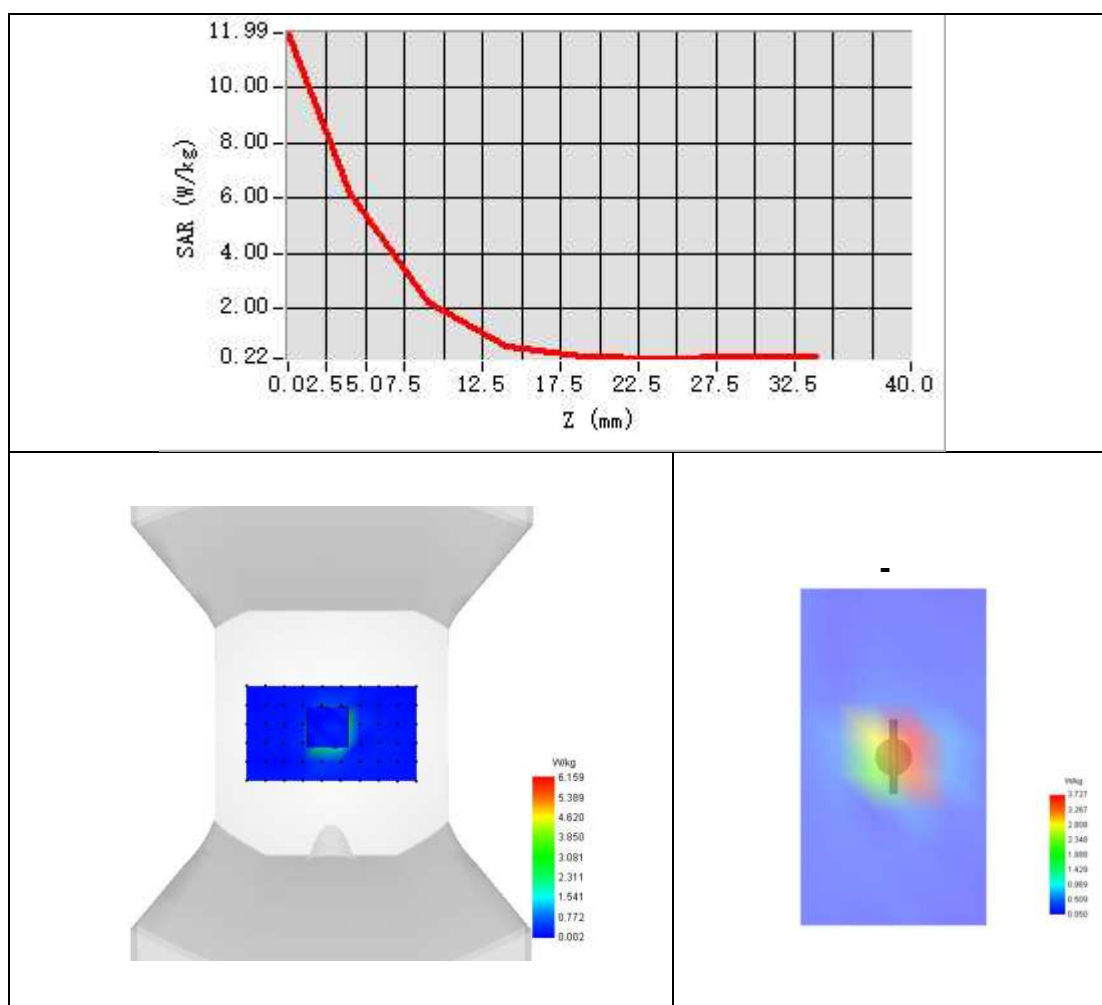



System Performance Check Data (5200MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=4mm, dy=4mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement:2025-05-28

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW5200
Channels	Middle
Signal	CW
Frequency (MHz)	5200.000
Relative permittivity	37.02
Conductivity (S/m)	4.61
Probe	SN 04/22 EPGO364
ConvF	1.99
Crest factor:	1:1

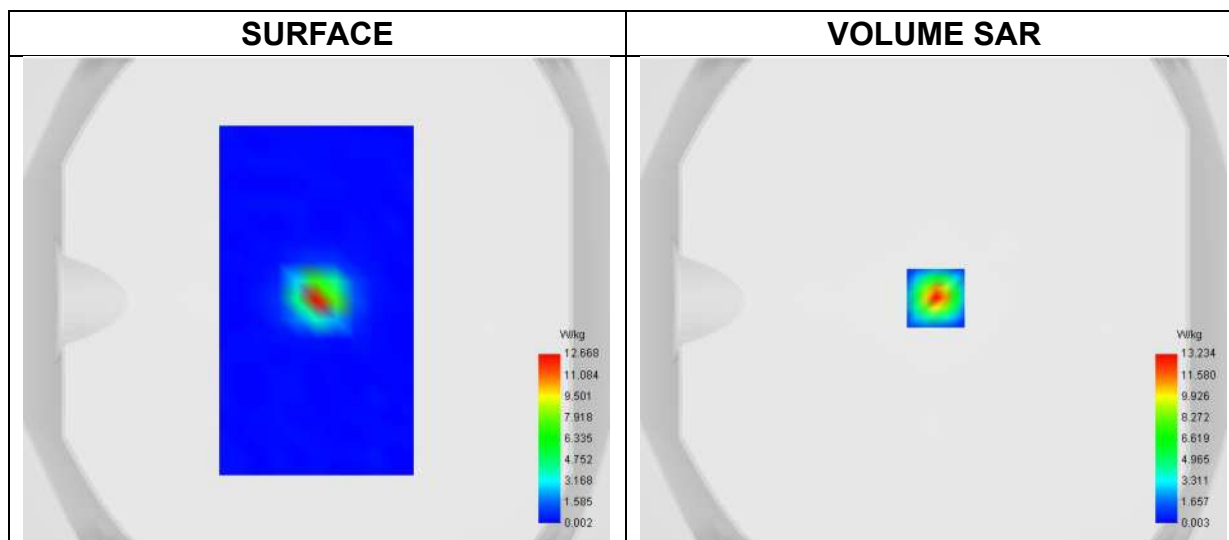


Maximum location: X=1.00, Y=1.00 ; SAR Peak: 21.64 W/kg

SAR 10g (W/Kg)	2.323
SAR 1g (W/Kg)	8.125



Z Axis Scan

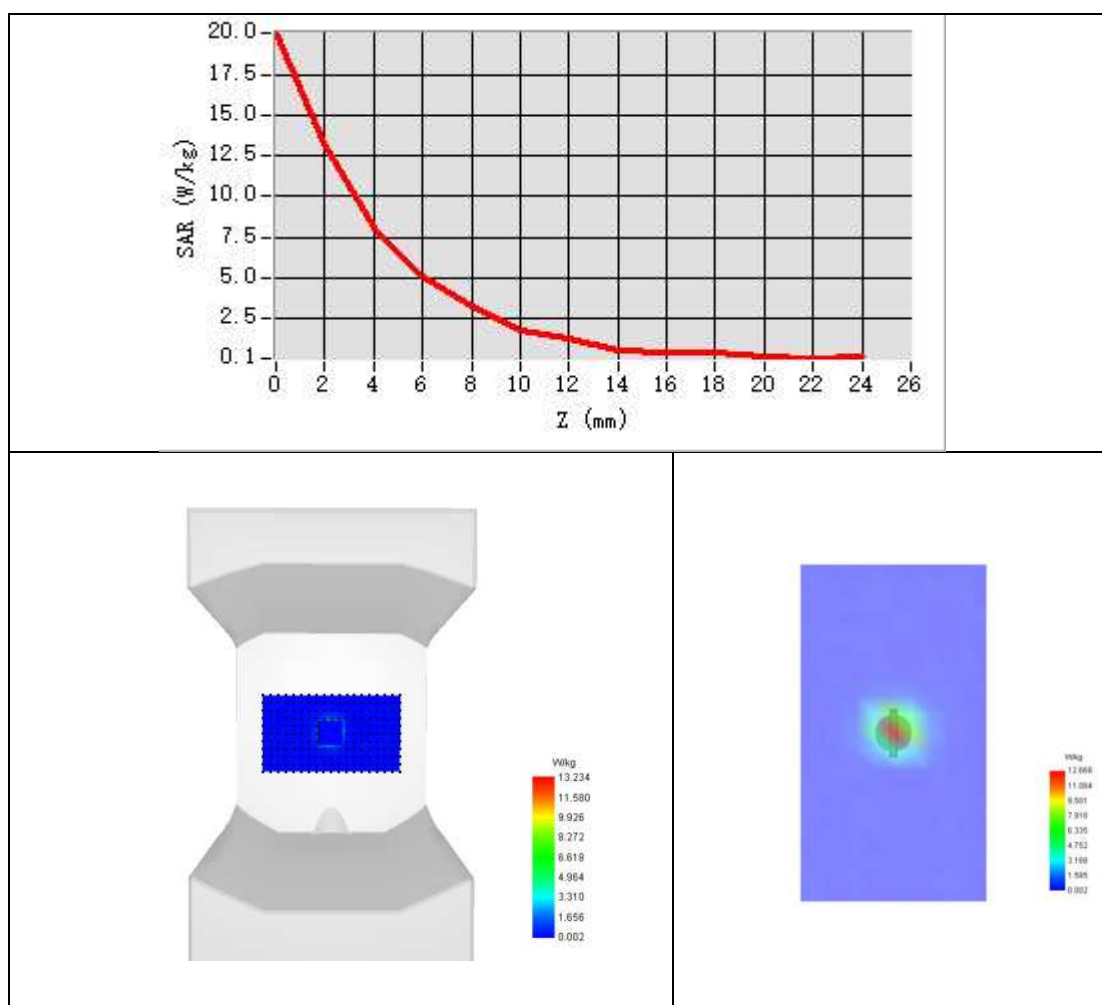



System Performance Check Data (5400MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=4mm, dy=4mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement:2025-05-29

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW5400
Channels	Middle
Signal	CW
Frequency (MHz)	5400.000
Relative permittivity	36.43
Conductivity (S/m)	4.89
Probe	SN 04/22 EPGO364
ConvF	1.87
Crest factor:	1:1

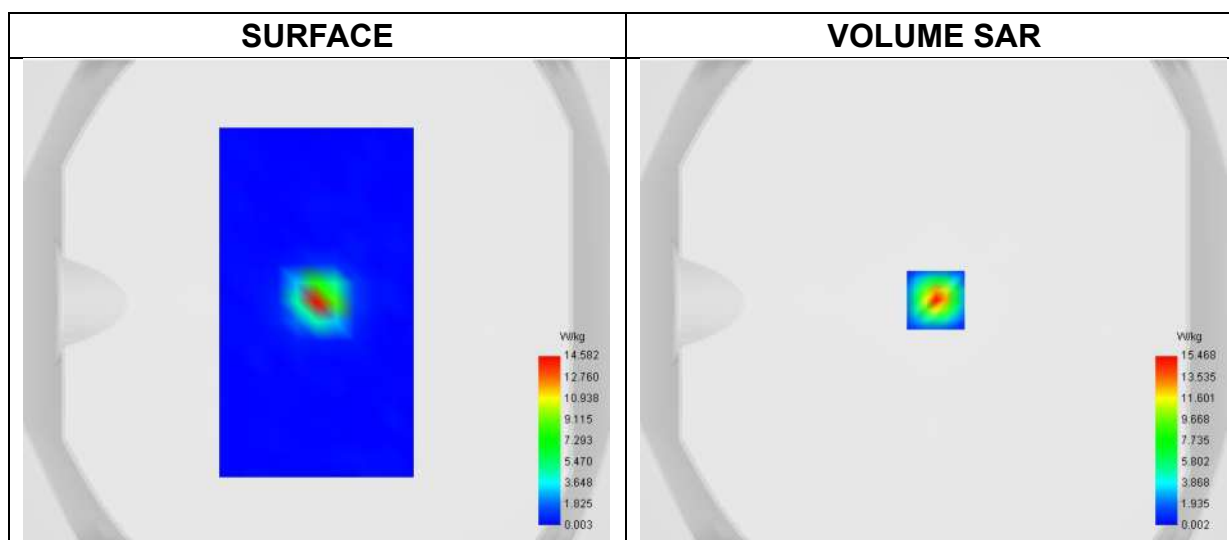


Maximum location: X=1.00, Y=1.00 ; SAR Peak: 23.97 W/kg

SAR 10g (W/Kg)	2.457
SAR 1g (W/Kg)	8.483



Z Axis Scan

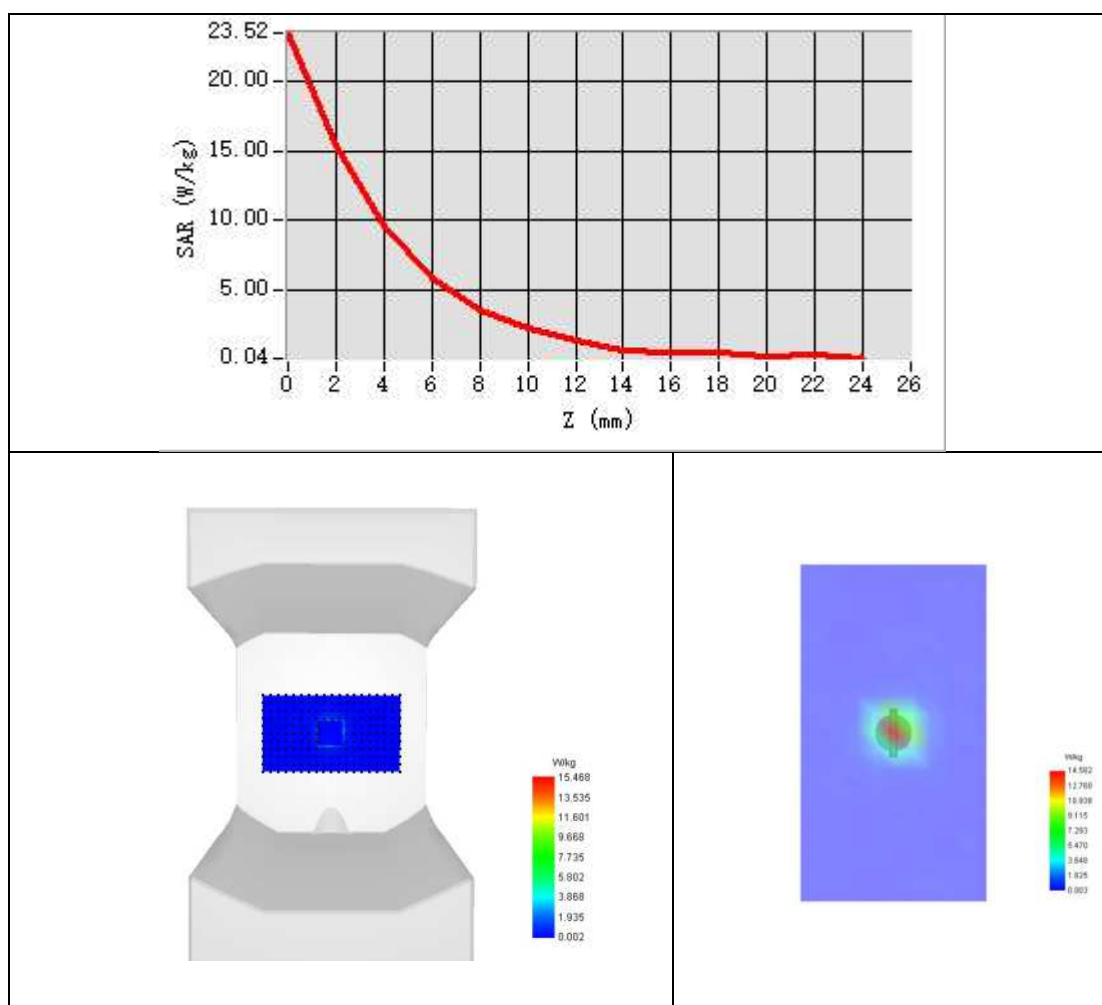



System Performance Check Data (5600MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=4mm, dy=4mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement:2025-05-30

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW5600
Channels	Middle
Signal	CW
Frequency (MHz)	5600.000
Relative permittivity	36.35
Conductivity (S/m)	5.02
Probe	SN 04/22 EPGO364
ConvF	1.87
Crest factor:	1:1

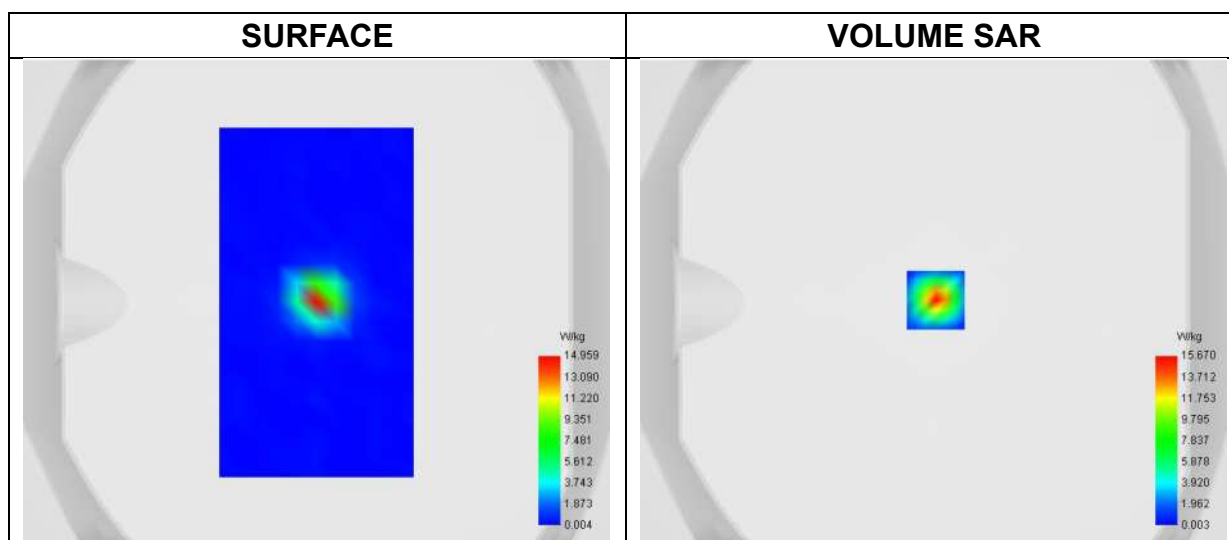


Maximum location: X=-5.00, Y=5.00 ; SAR Peak: 24.89 W/kg

SAR 10g (W/Kg)	2.325
SAR 1g (W/Kg)	8.199



Z Axis Scan

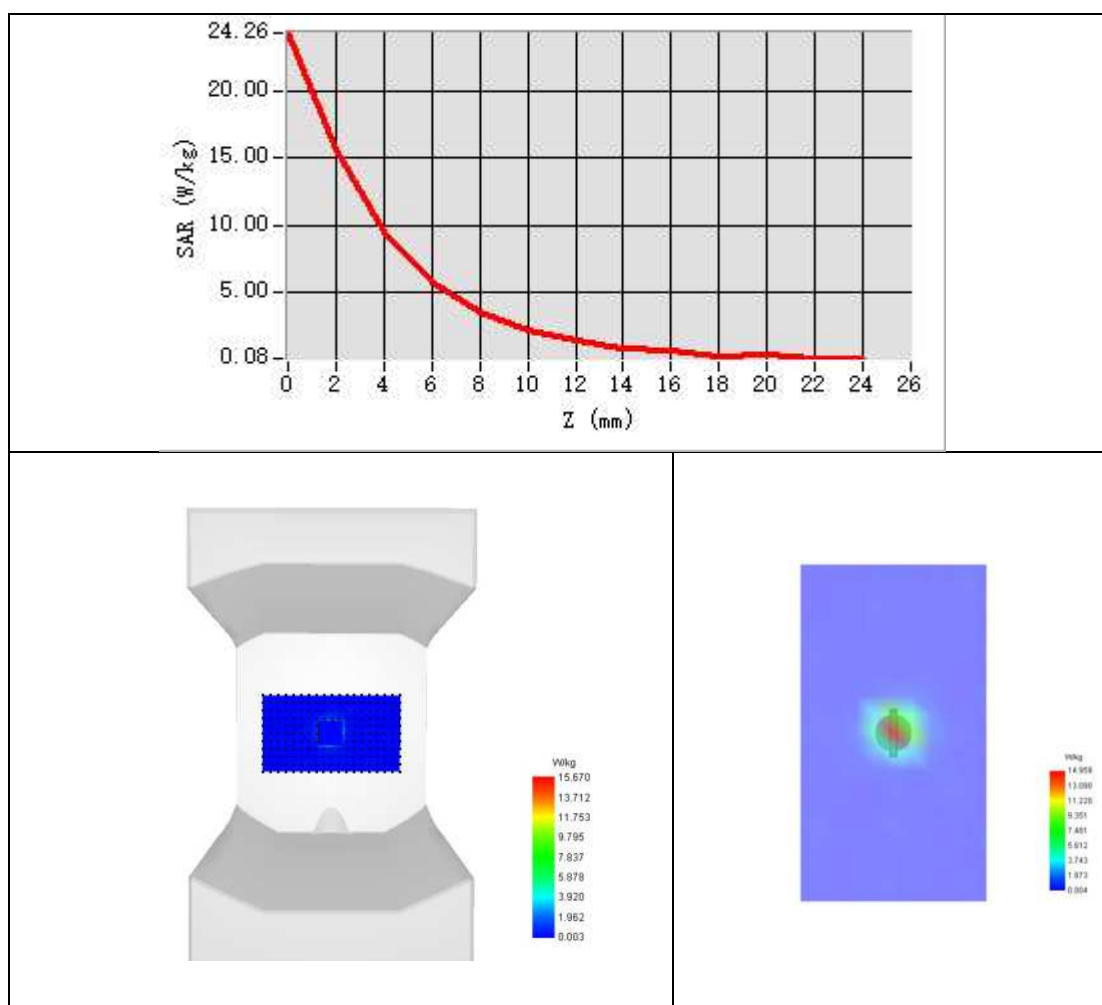



System Performance Check Data (5800MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=4mm, dy=4mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement:2025-05-31

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW5800
Channels	Middle
Signal	CW
Frequency (MHz)	5800.000
Relative permittivity	35.45
Conductivity (S/m)	5.26
Probe	SN 04/22 EPGO364
ConvF	1.70
Crest factor:	1:1

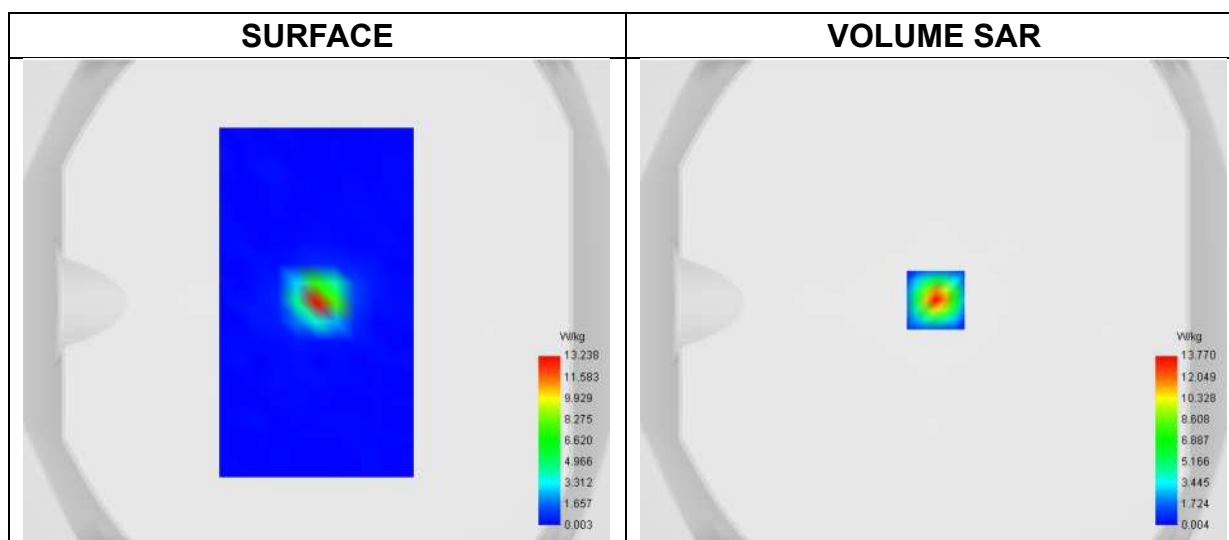


Maximum location: X=1.00, Y=1.00 ; SAR Peak: 21.18 W/kg

SAR 10g (W/Kg)	2.345
SAR 1g (W/Kg)	8.177



Z Axis Scan

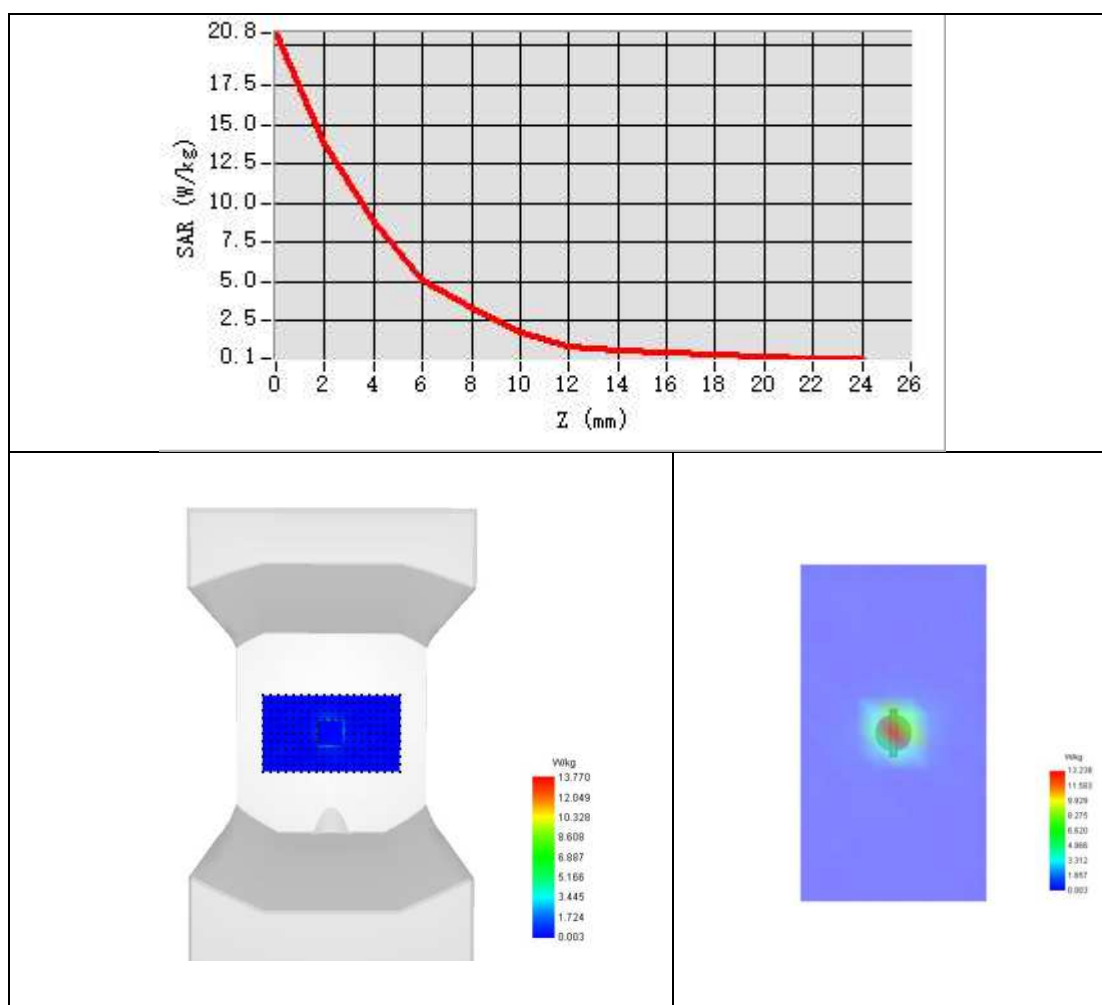




Appendix B. SAR Test Plots

Plot 1:

Test Date	2025-05-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	GPRS850
Signal	TDMA (GPRS)
Frequency	836.6
SAR 10g (W/Kg)	0.109
SAR 1g (W/Kg)	0.149
ConvF	1.72
Relative permittivity	42.09
Conductivity (S/m)	0.93

Maximum location: X=-33.00, Y=-33.00 ; SAR Peak: 0.49 W/kg

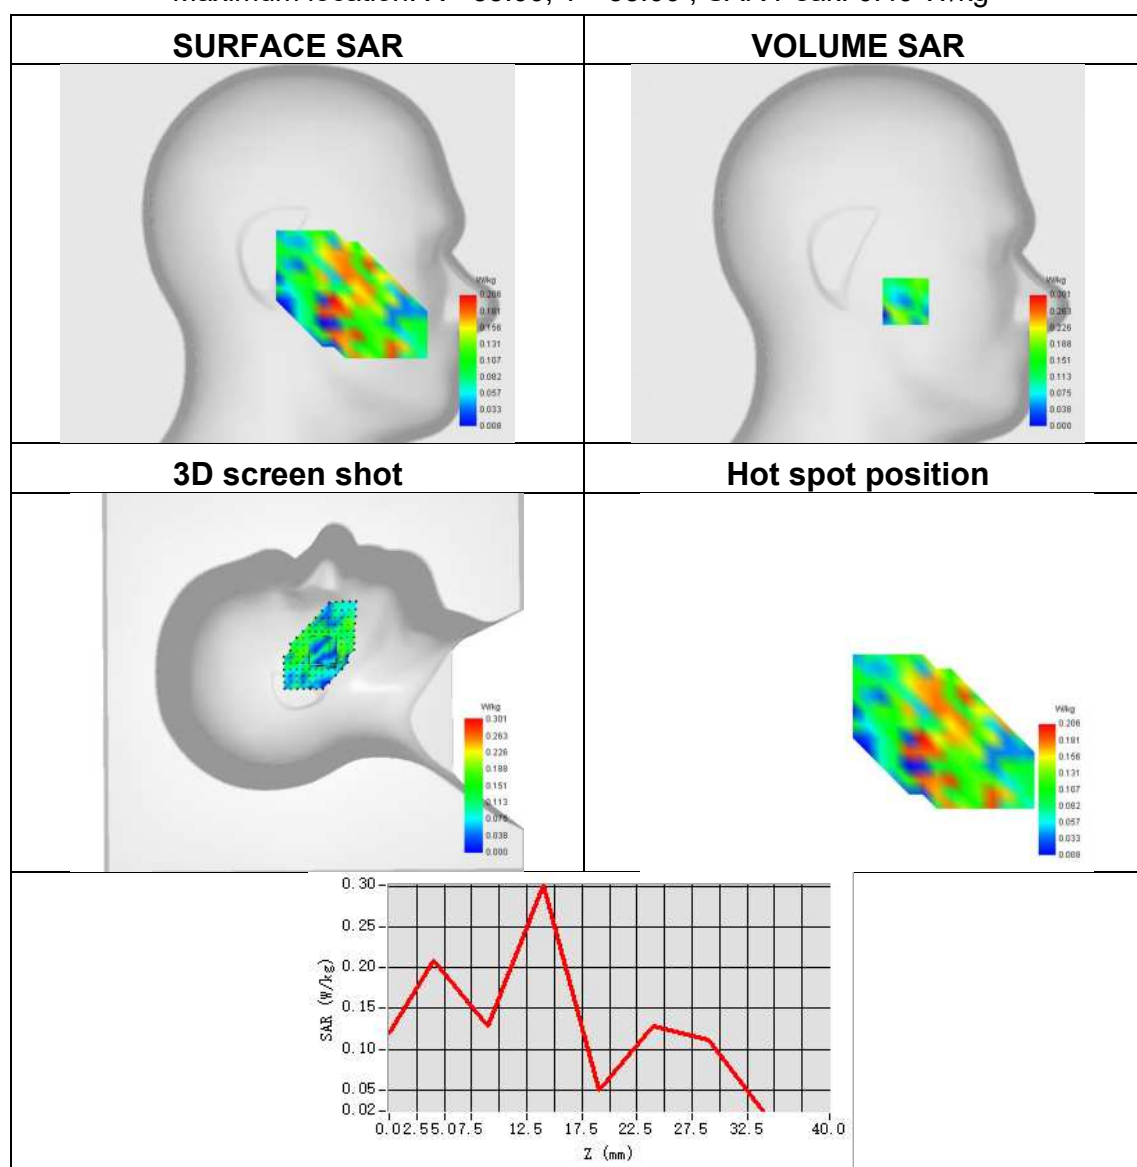




Plot 2:

Test Date	2025-05-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	GPRS850
Signal	TDMA (GPRS)
Frequency	836.6
SAR 10g (W/Kg)	0.343
SAR 1g (W/Kg)	0.635
ConvF	1.72
Relative permittivity	42.09
Conductivity (S/m)	0.93

Maximum location: X=6.00, Y=-2.00 ; SAR Peak: 1.25 W/kg

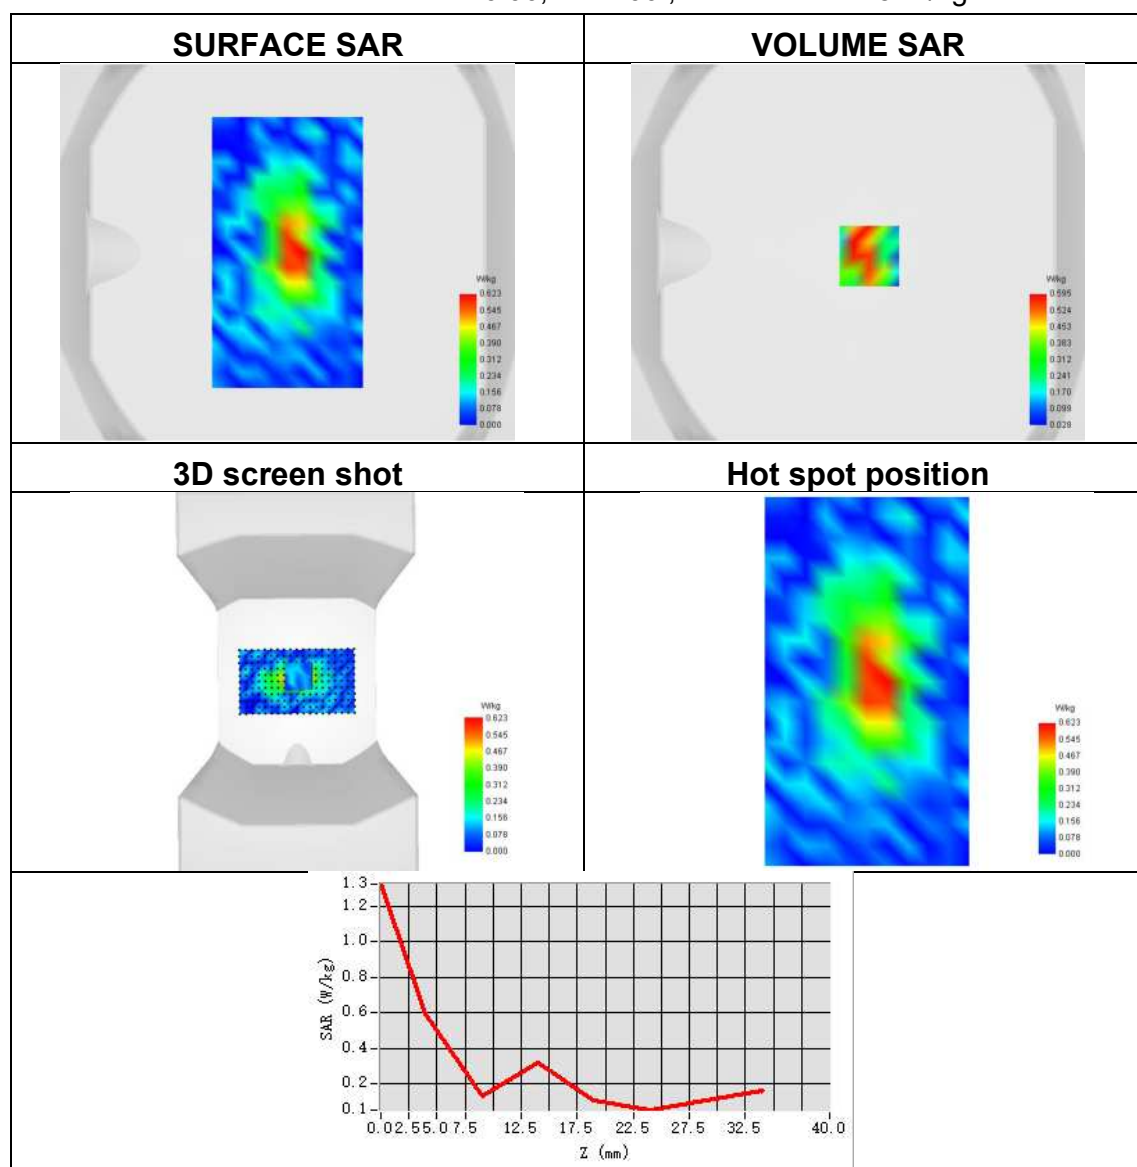




Plot 3:

Test Date	2025-05-17
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	GPRS1900
Signal	TDMA (GPRS)
Frequency	1850.2
SAR 10g (W/Kg)	0.102
SAR 1g (W/Kg)	0.178
ConvF	2.20
Relative permittivity	40.54
Conductivity (S/m)	1.39

Maximum location: X=-80.00, Y=-56.00 ; SAR Peak: 0.36 W/kg

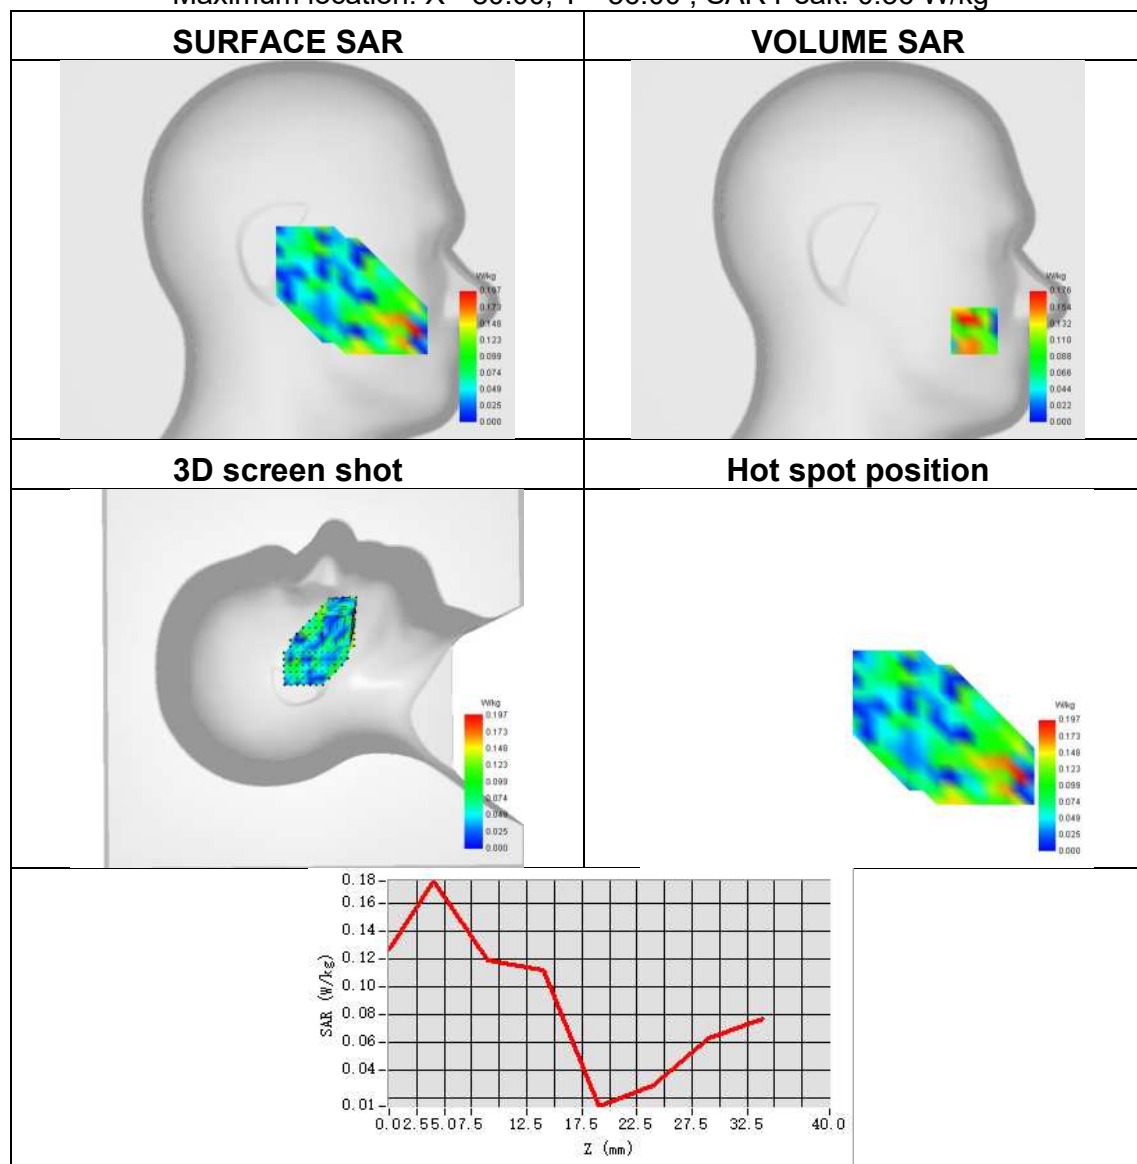




Plot 4:

Test Date	2025-05-17
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	GPRS1900
Signal	TDMA (GPRS)
Frequency	1880
SAR 10g (W/Kg)	0.435
SAR 1g (W/Kg)	0.769
ConvF	2.20
Relative permittivity	40.54
Conductivity (S/m)	1.39

Maximum location: X=7.00, Y=13.00 ; SAR Peak: 1.31 W/kg

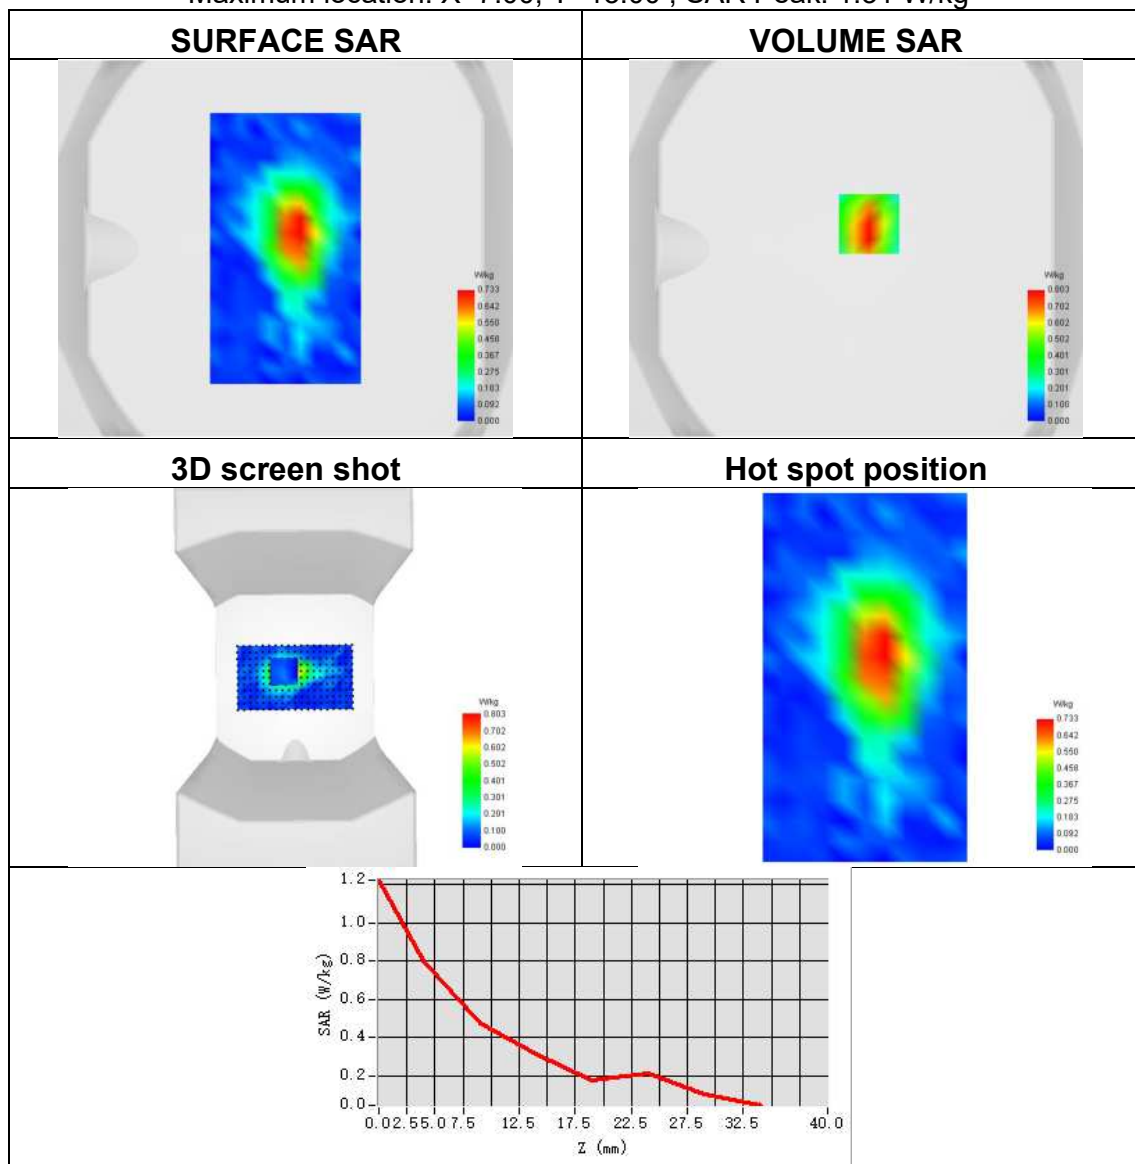




Plot 5:

Test Date	2025-05-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	Band 2 (1900)
Signal	HSDPA
Frequency	1907.6
SAR 10g (W/Kg)	0.468
SAR 1g (W/Kg)	0.883
ConvF	2.20
Relative permittivity	41.32
Conductivity (S/m)	1.38

Maximum location: X=-56.00, Y=-51.00 ; SAR Peak: 1.56 W/kg

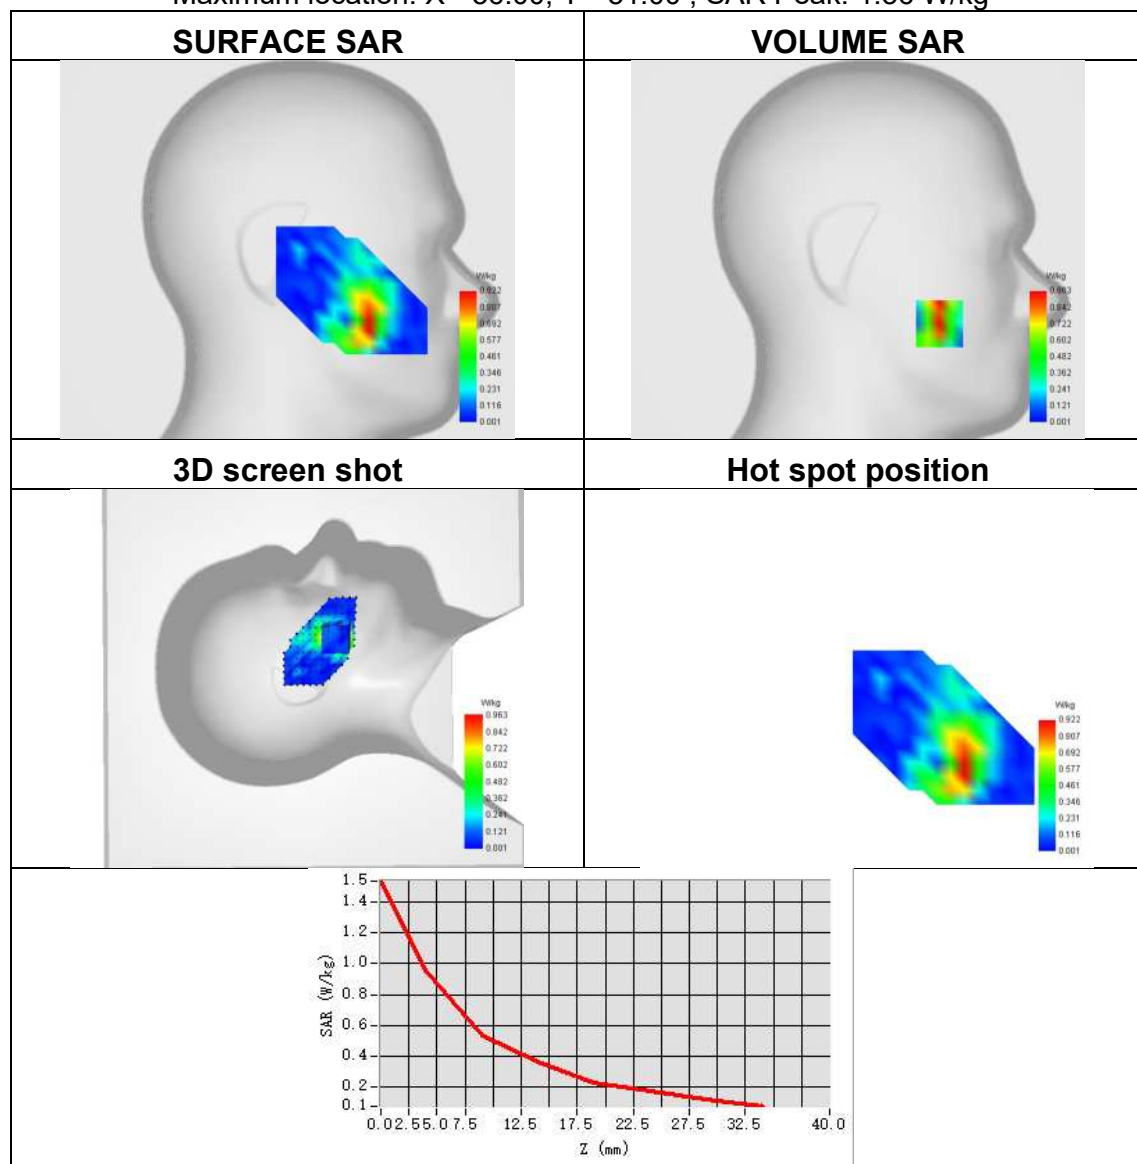




Plot 6:

Test Date	2025-05-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	Band 2 (1900)
Signal	HSDPA
Frequency	1907.6
SAR 10g (W/Kg)	0.371
SAR 1g (W/Kg)	0.689
ConvF	2.20
Relative permittivity	41.32
Conductivity (S/m)	1.38


Maximum location: X=8.00, Y=0.00 ; SAR Peak: 1.17 W/kg

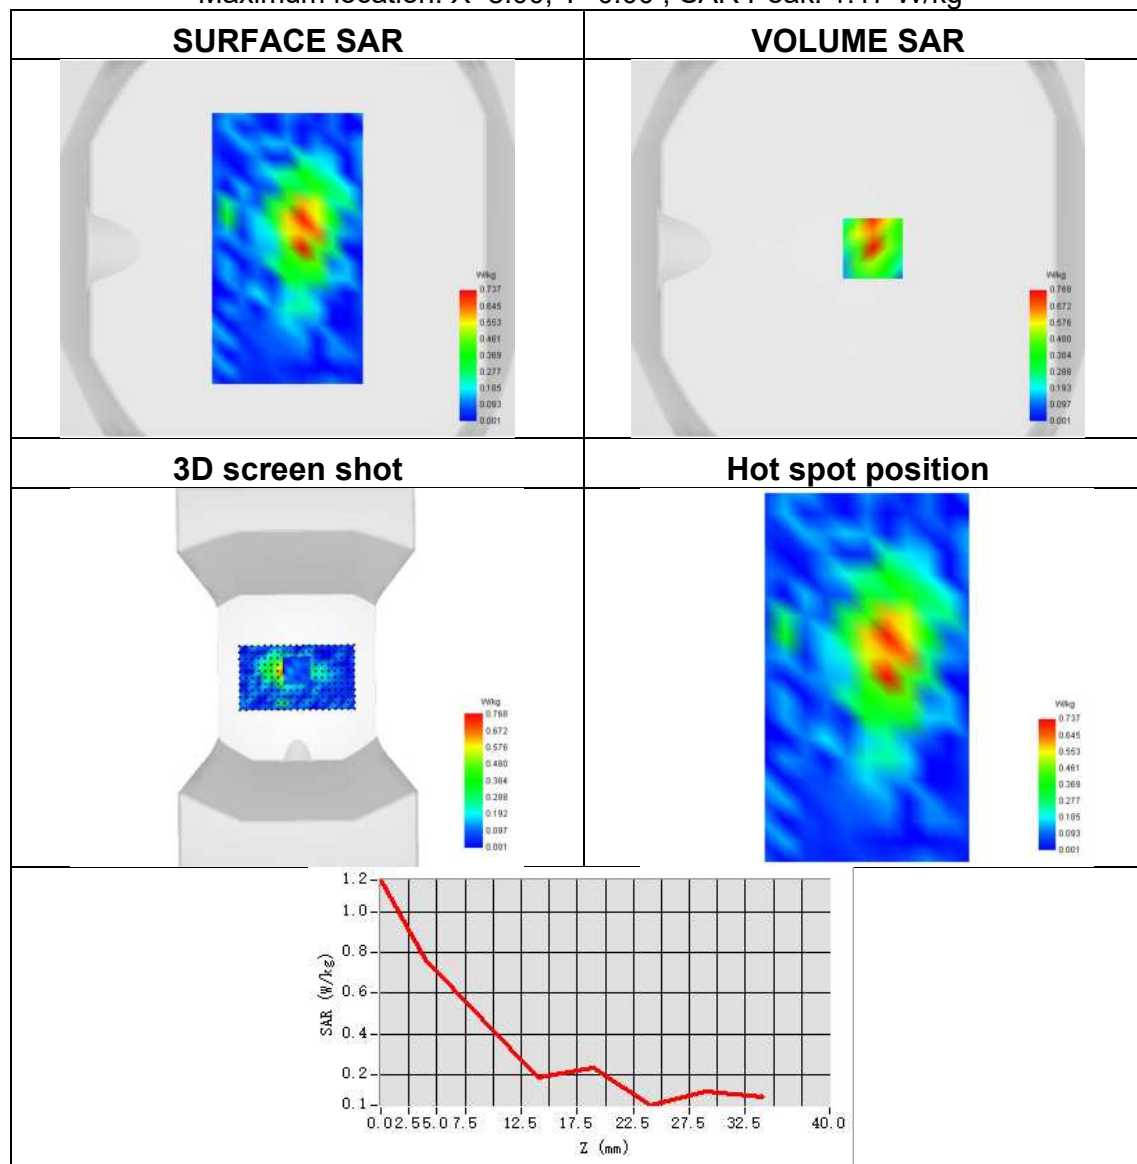

Plot 7:

Test Date	2025-05-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	Band 4 (1700)
Signal	HSDPA
Frequency	1712.6
SAR 10g (W/Kg)	0.149
SAR 1g (W/Kg)	0.281
ConvF	1.92
Relative permittivity	40.65
Conductivity (S/m)	1.35

Maximum location: X=-72.00, Y=-46.00 ; SAR Peak: 0.51 W/kg

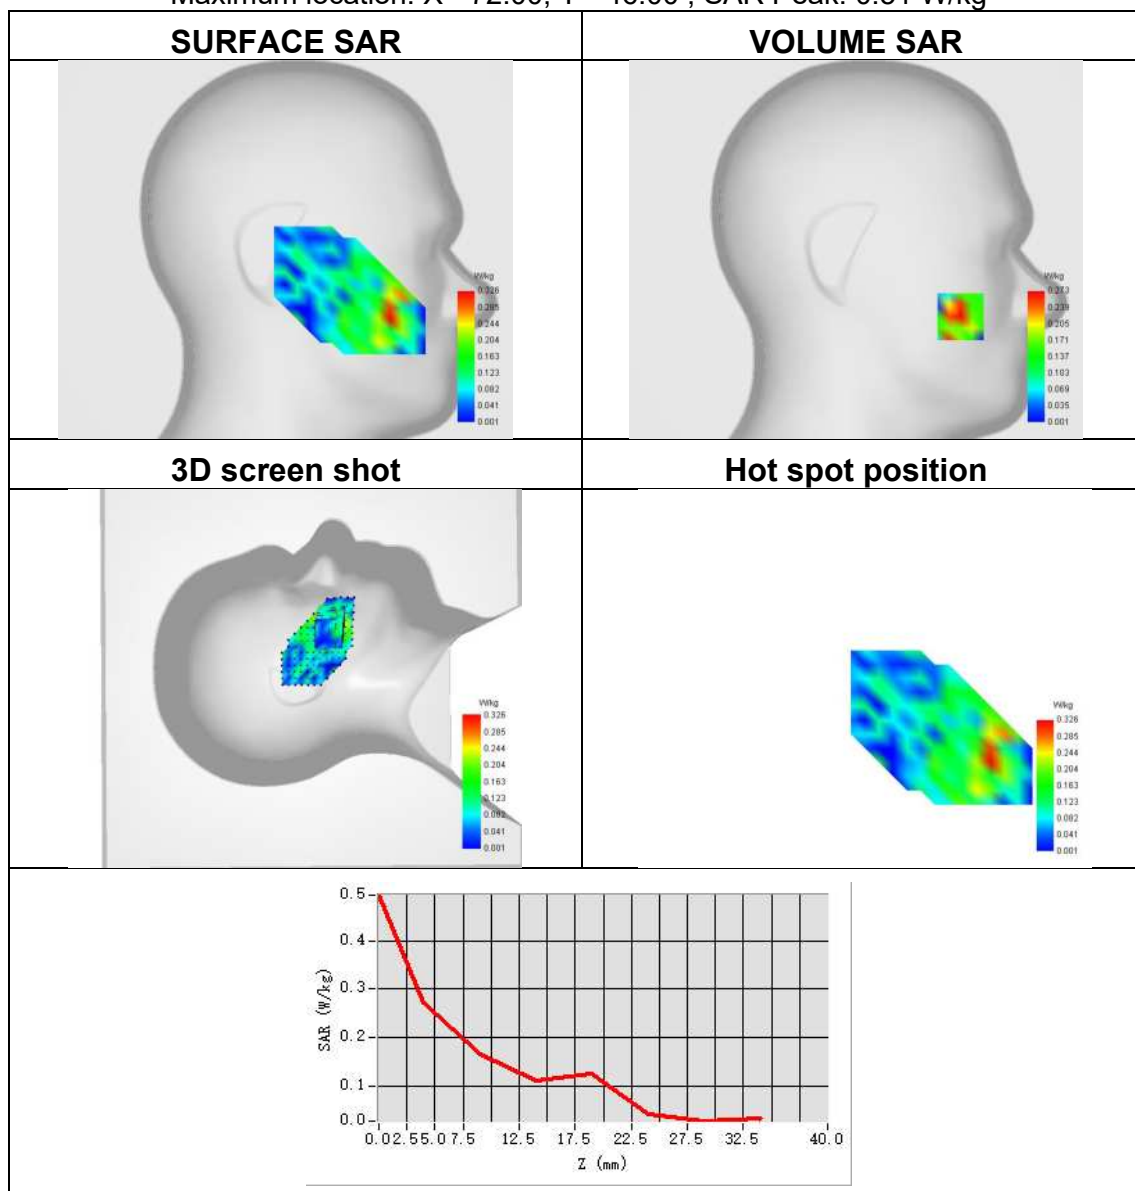




Plot 8:

Test Date	2025-05-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	Band 4 (1700)
Signal	HSDPA
Frequency	1712.6
SAR 10g (W/Kg)	0.387
SAR 1g (W/Kg)	0.703
ConvF	1.92
Relative permittivity	40.65
Conductivity (S/m)	1.35

Maximum location: X=7.00, Y=0.00 ; SAR Peak: 1.21 W/kg

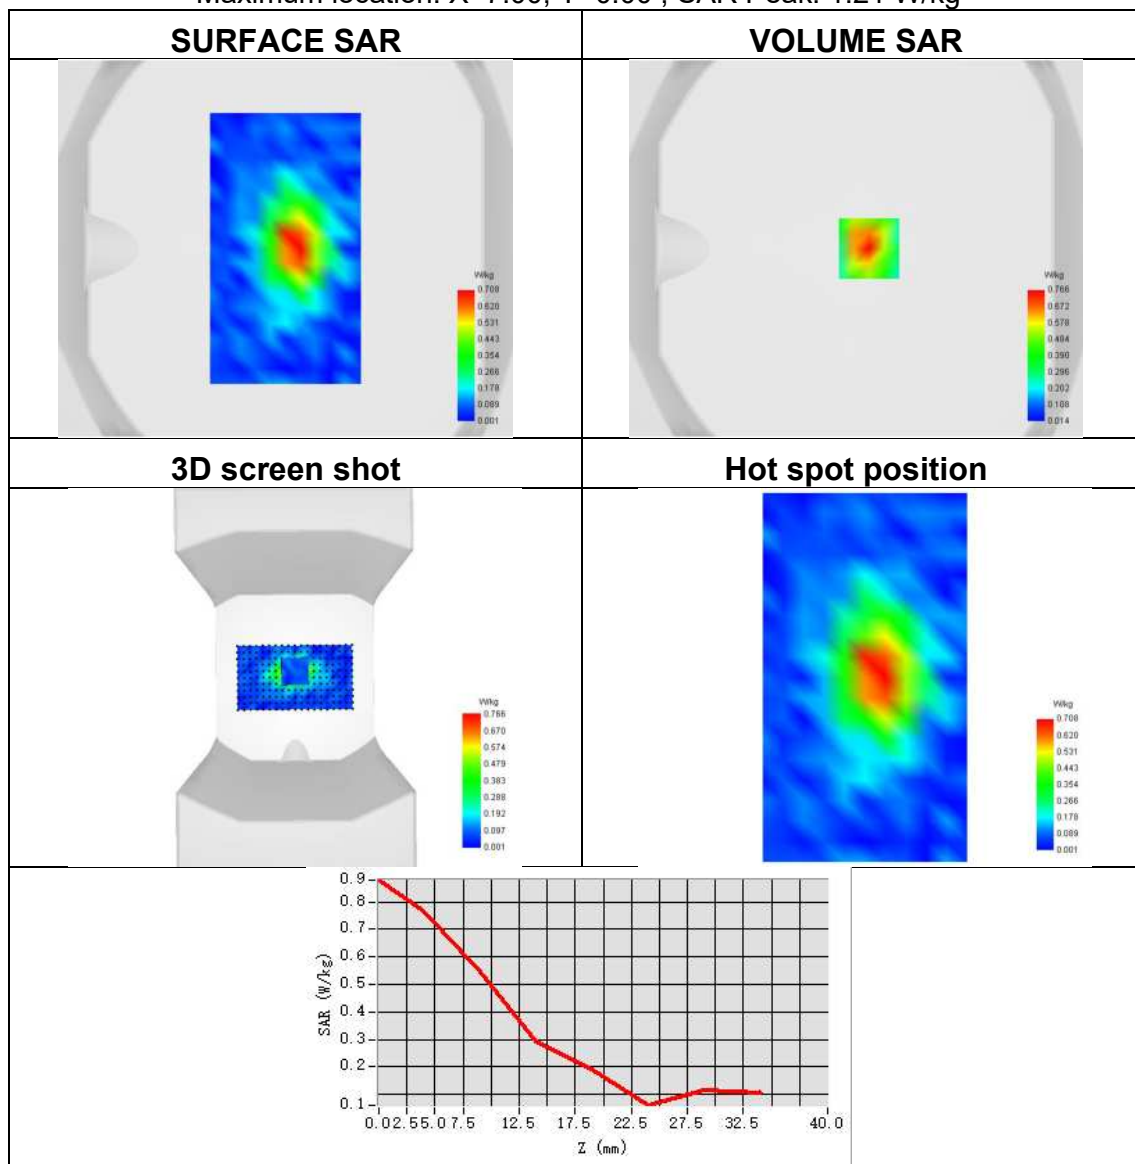




Plot 9:

Test Date	2025-05-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	Band 5 (850)
Signal	WCDMA
Frequency	846.6
SAR 10g (W/Kg)	0.342
SAR 1g (W/Kg)	0.551
ConvF	1.72
Relative permittivity	42.09
Conductivity (S/m)	0.93

Maximum location: X=-47.00, Y=-48.00 ; SAR Peak: 0.88 W/kg

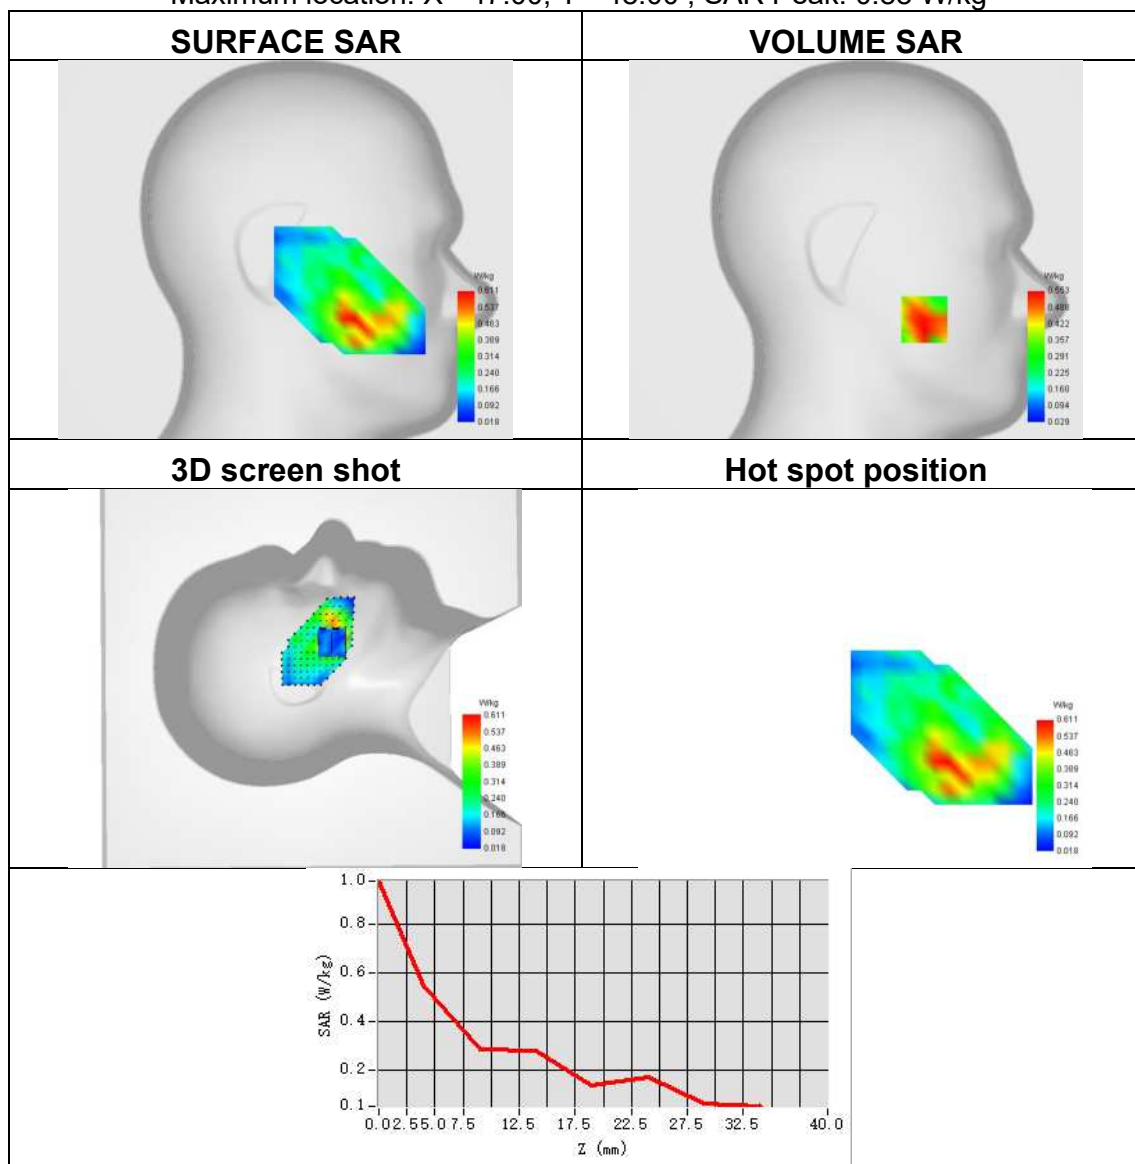




Plot 10:

Test Date	2025-05-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	Band 5 (850)
Signal	WCDMA
Frequency	846.6
SAR 10g (W/Kg)	0.224
SAR 1g (W/Kg)	0.447
ConvF	1.72
Relative permittivity	42.09
Conductivity (S/m)	0.93

Maximum location: X=6.00, Y=-8.00 ; SAR Peak: 0.92 W/kg

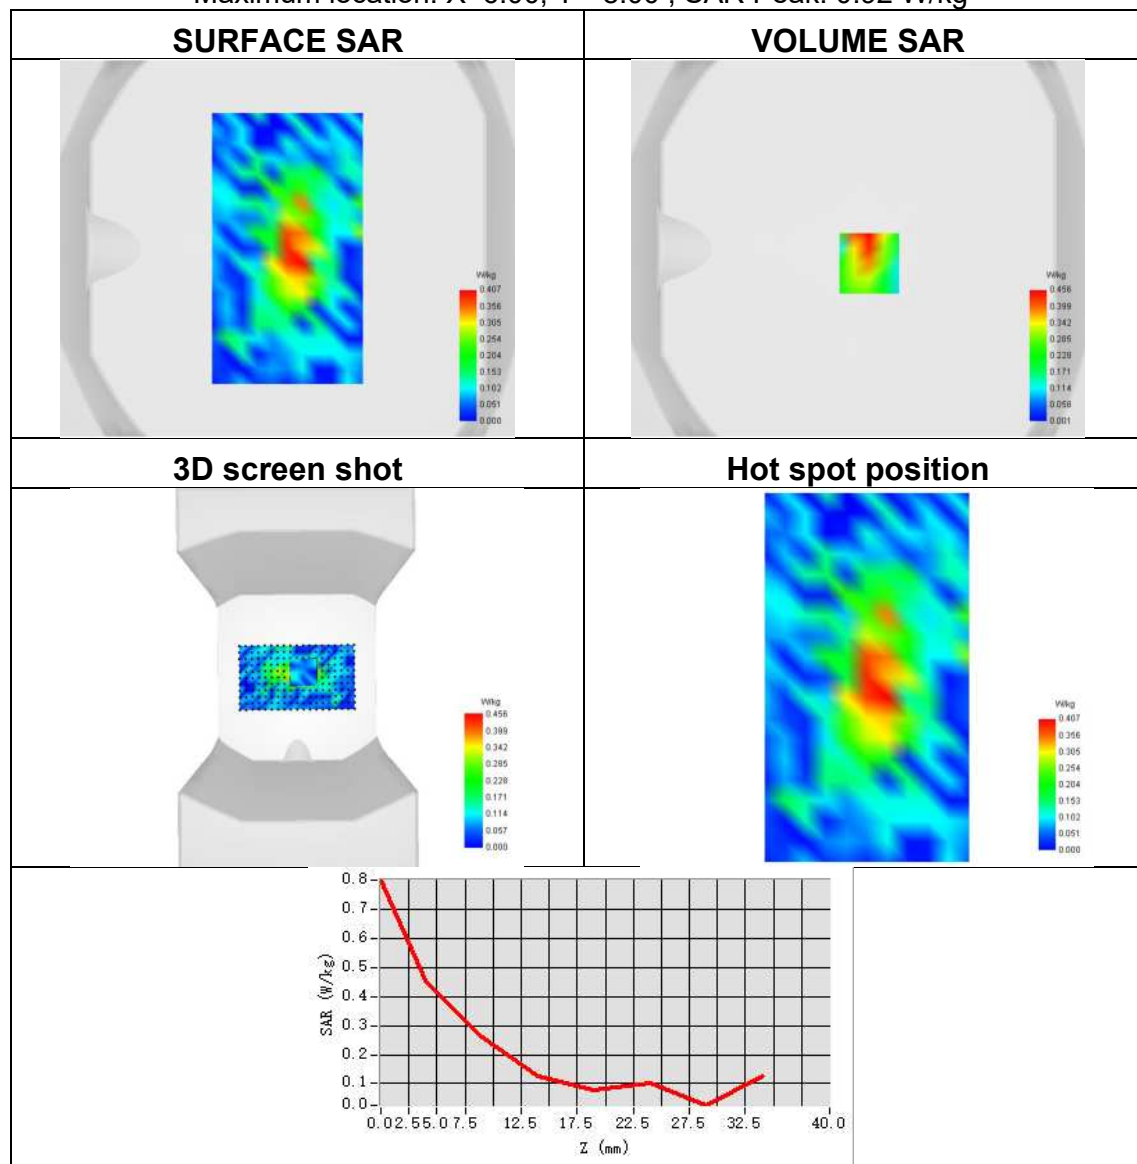




Plot 11:

Test Date	2025-05-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	ISM ANT 1
Signal	IEEE 802.11b
Frequency	2437
SAR 10g (W/Kg)	0.113
SAR 1g (W/Kg)	0.244
ConvF	2.33
Relative permittivity	39.61
Conductivity (S/m)	1.78

Maximum location: X=-16.00, Y=0.00 ; SAR Peak: 0.62 W/kg

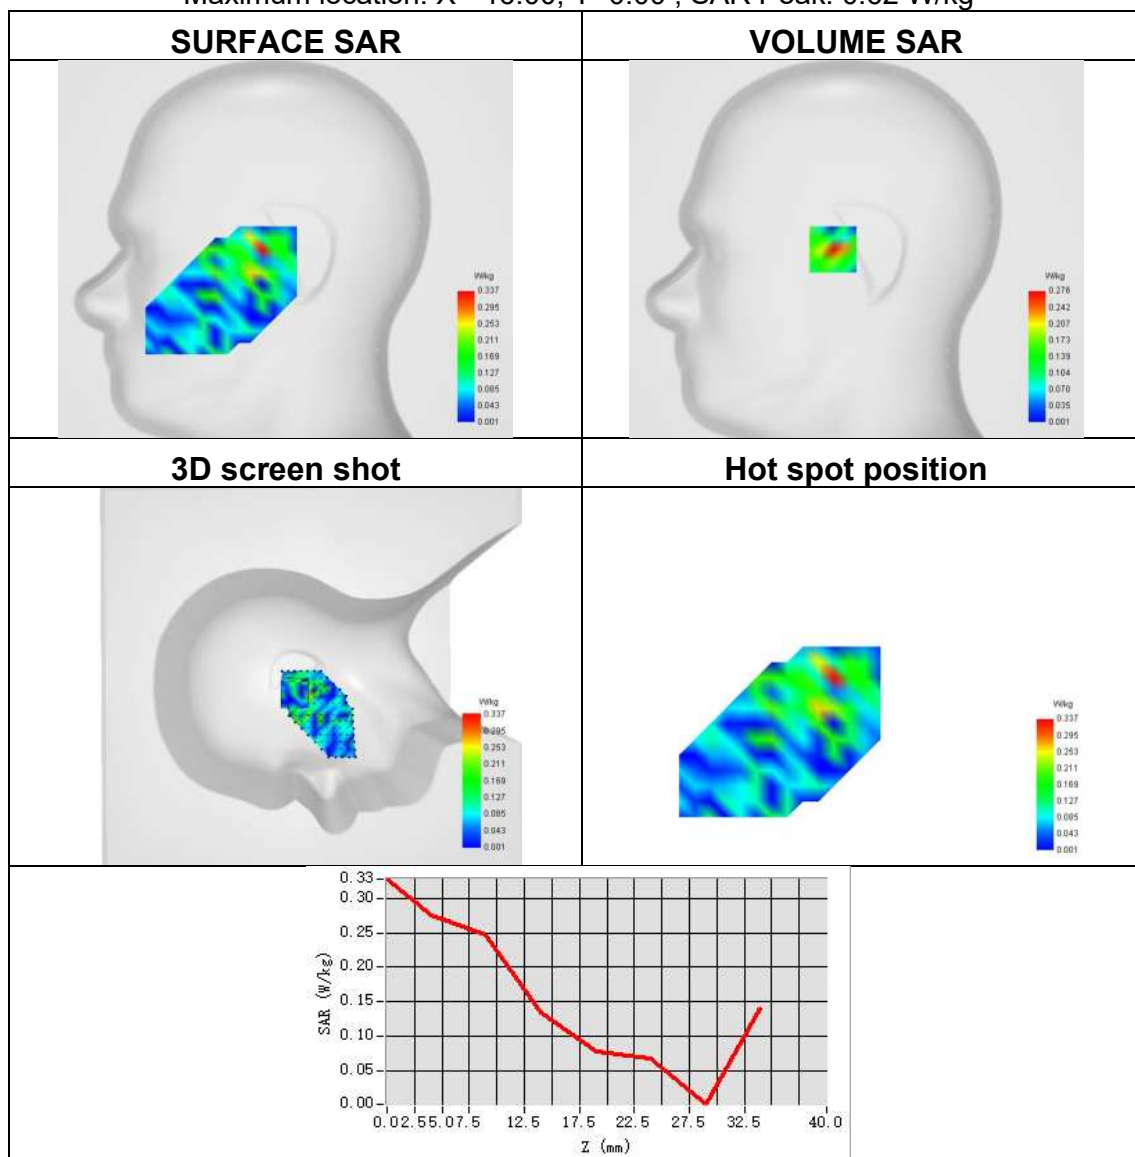




Plot 12:

Test Date	2025-05-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	ISM ANT 1
Signal	IEEE 802.11b
Frequency	2437
SAR 10g (W/Kg)	0.084
SAR 1g (W/Kg)	0.189
ConvF	2.33
Relative permittivity	39.61
Conductivity (S/m)	1.78

Maximum location: X=0.00, Y=24.00 ; SAR Peak: 0.52 W/kg

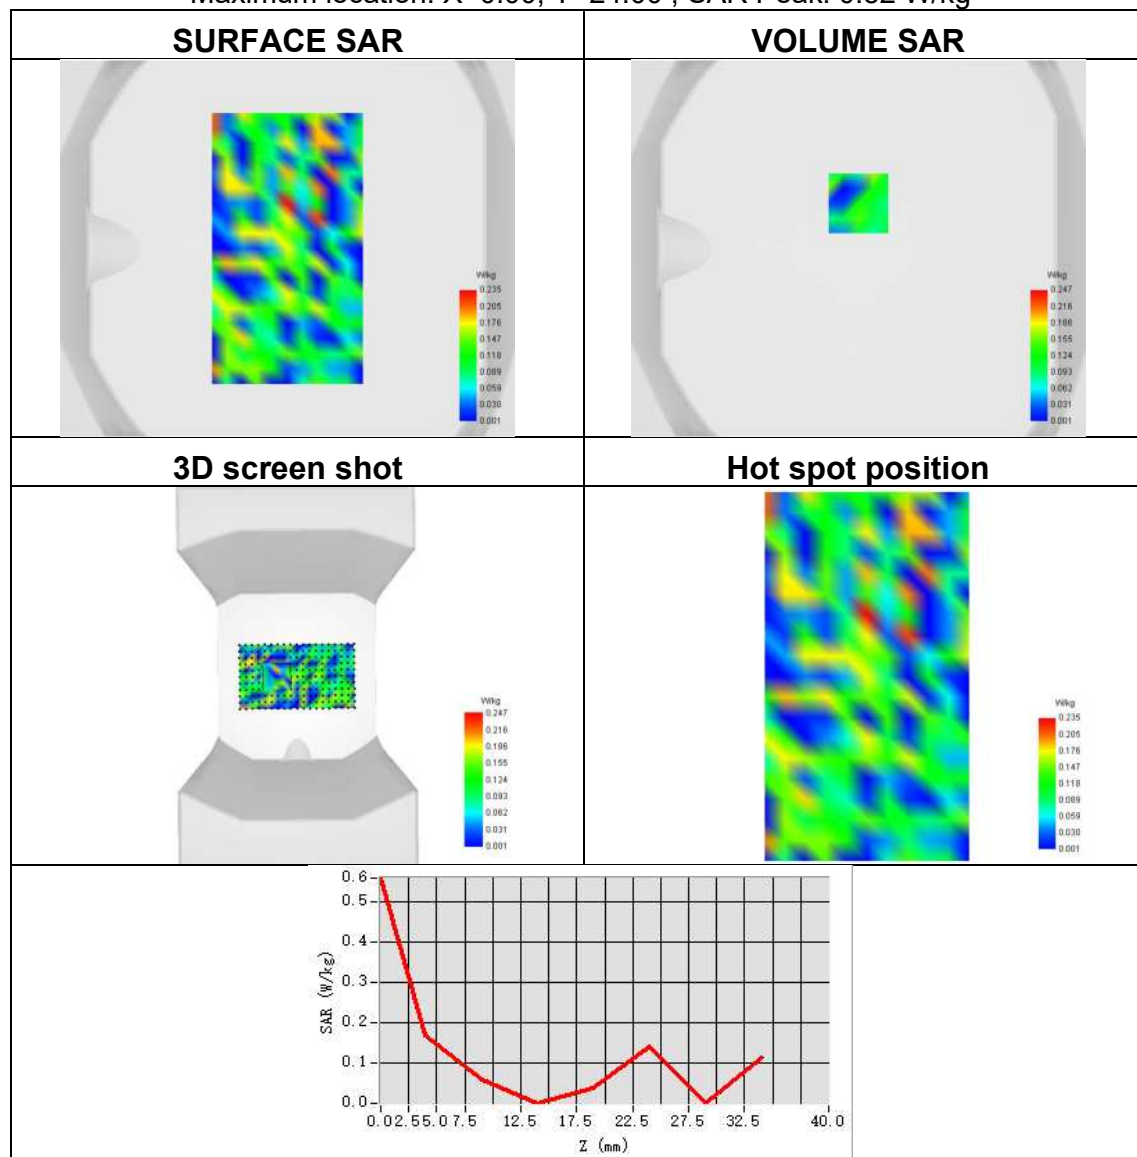




Plot 13:

Test Date	2025-05-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	ISM ANT 2
Signal	IEEE 802.11b
Frequency	2437
SAR 10g (W/Kg)	0.123
SAR 1g (W/Kg)	0.299
ConvF	2.33
Relative permittivity	39.61
Conductivity (S/m)	1.78

Maximum location: X=-33.00, Y=-2.00 ; SAR Peak: 0.82 W/kg

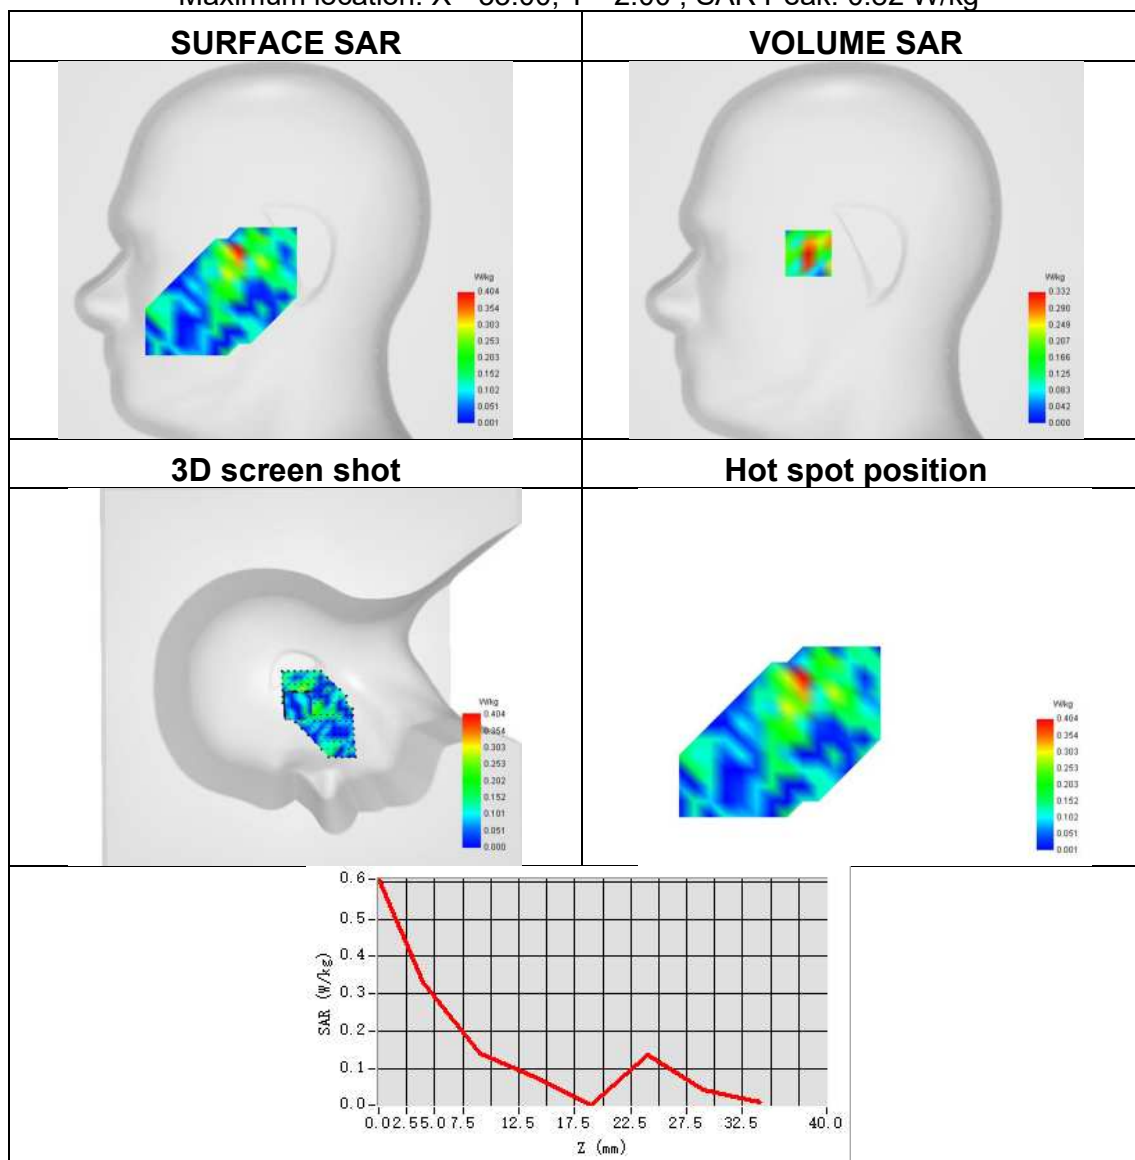




Plot 14:

Test Date	2025-05-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front Side
Band	ISM ANT 2
Signal	IEEE 802.11b
Frequency	2437
SAR 10g (W/Kg)	0.079
SAR 1g (W/Kg)	0.160
ConvF	2.33
Relative permittivity	39.61
Conductivity (S/m)	1.78

Maximum location: X=17.00, Y=40.00 ; SAR Peak: 0.61 W/kg

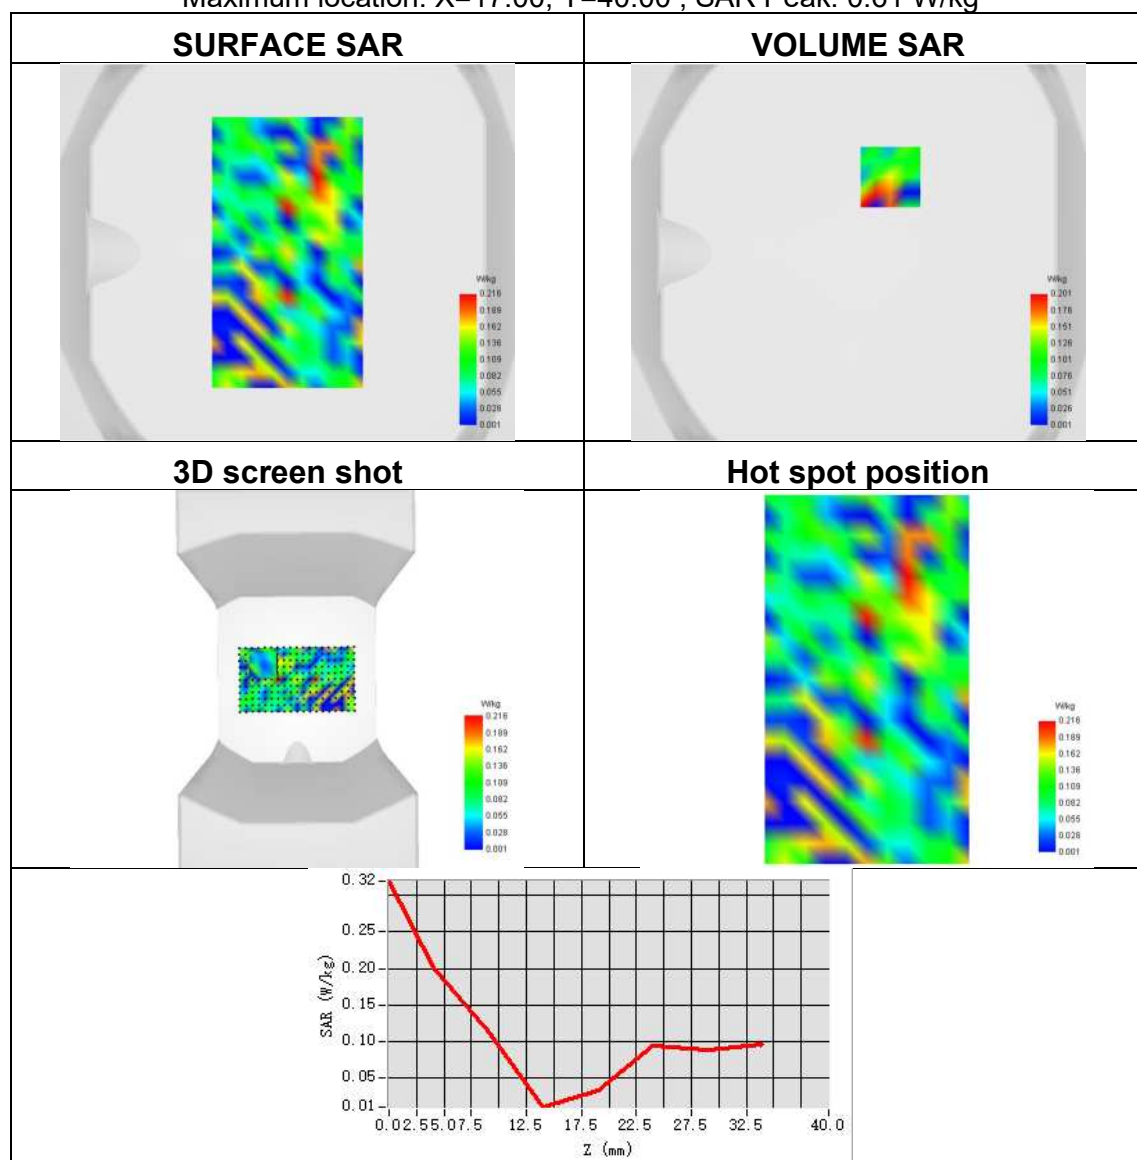




Plot 15:

Test Date	2025-05-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	ISM MIMO 1
Signal	IEEE 802.11ax
Frequency	2412
SAR 10g (W/Kg)	0.089
SAR 1g (W/Kg)	0.141
ConvF	2.33
Relative permittivity	39.61
Conductivity (S/m)	1.78

Maximum location: X=-31.00, Y=-8.00 ; SAR Peak: 0.41 W/kg

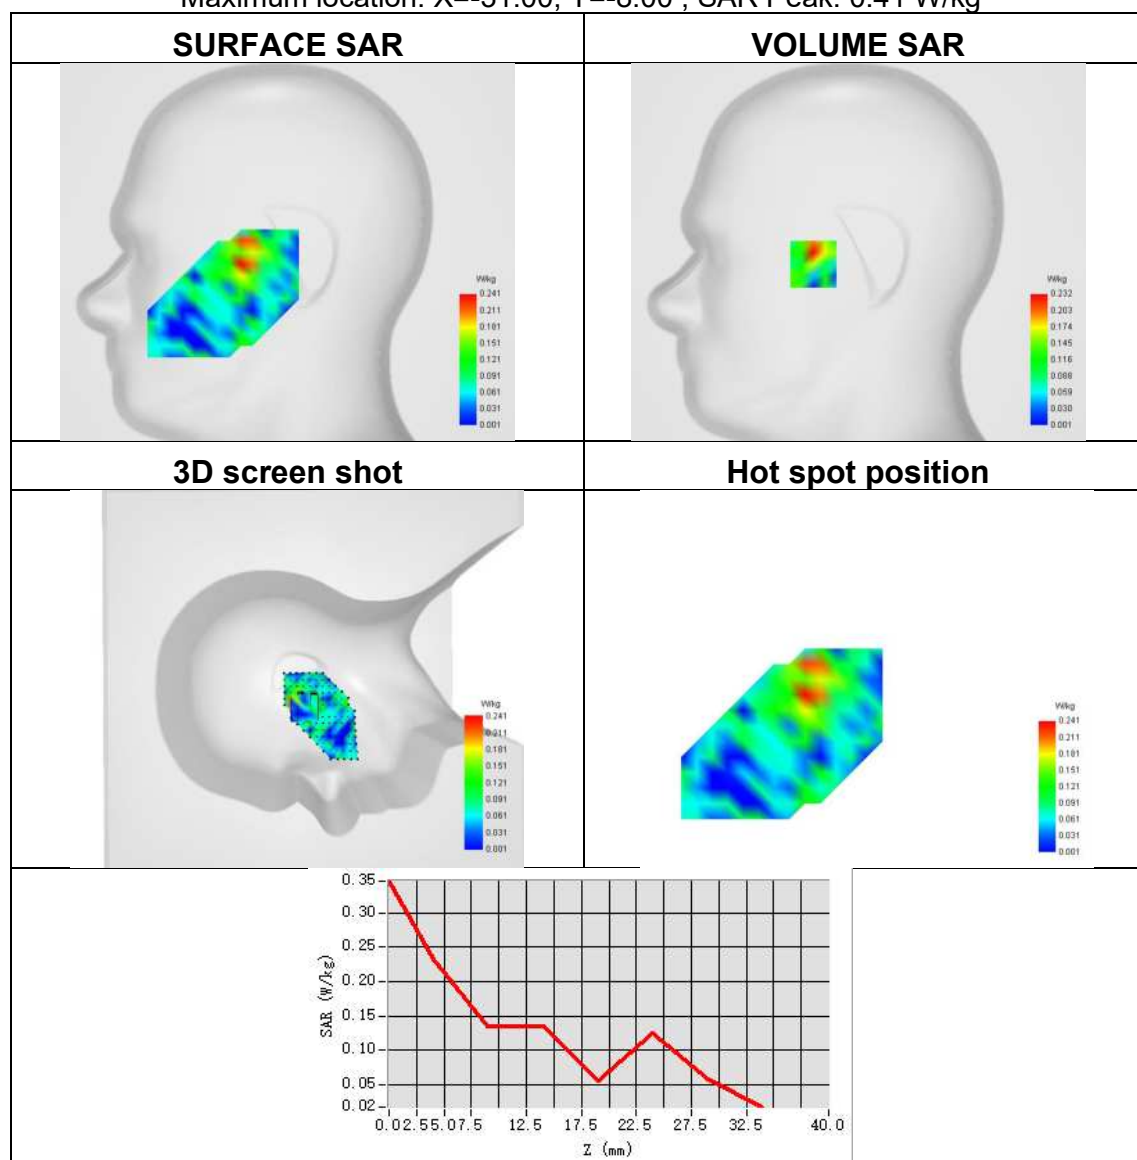




Plot 16:

Test Date	2025-05-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	ISM MIMO 1
Signal	IEEE 802.11ax
Frequency	2412
SAR 10g (W/Kg)	0.074
SAR 1g (W/Kg)	0.170
ConvF	2.33
Relative permittivity	39.61
Conductivity (S/m)	1.78

Maximum location: X=26.00, Y=57.00 ; SAR Peak: 0.48 W/kg

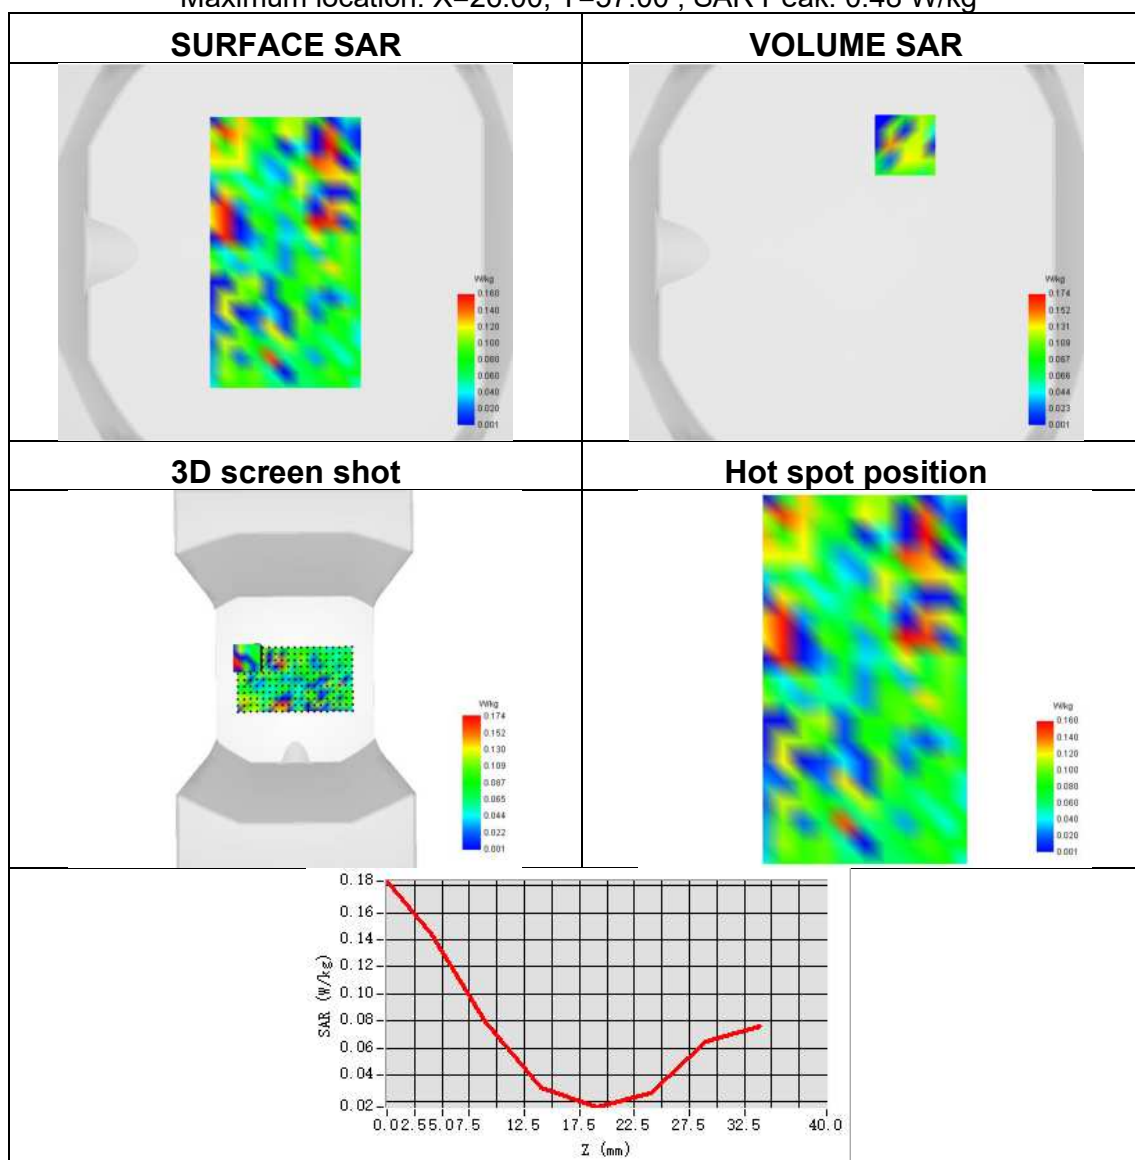




Plot 17:

Test Date	2025-05-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	ISM MIMO 2
Signal	IEEE 802.11ax
Frequency	2412
SAR 10g (W/Kg)	0.093
SAR 1g (W/Kg)	0.179
ConvF	2.33
Relative permittivity	39.61
Conductivity (S/m)	1.78

Maximum location: X=-23.00, Y=1.00 ; SAR Peak: 0.65 W/kg

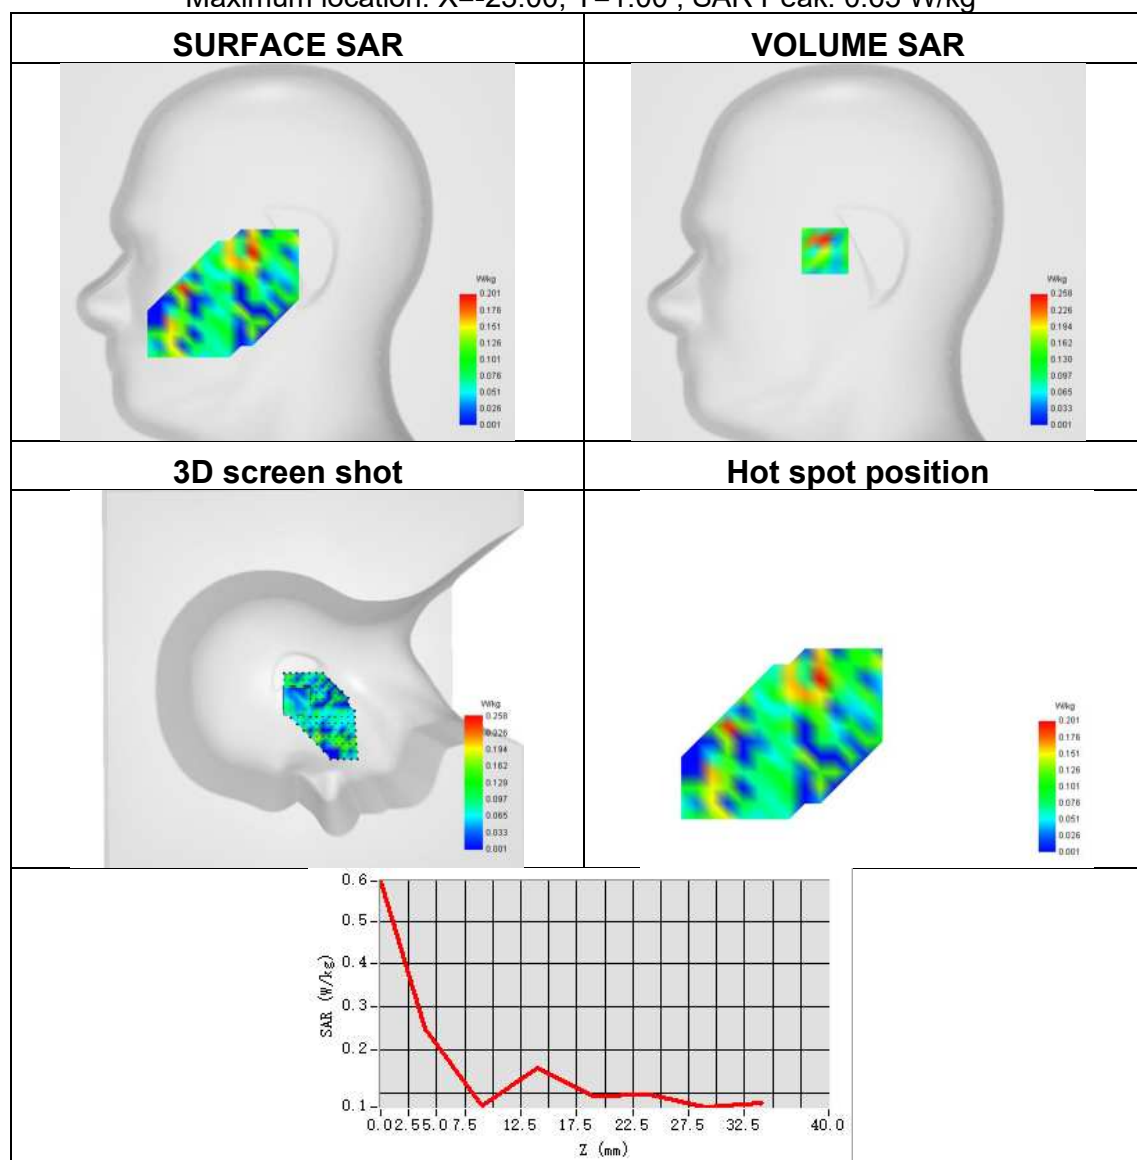




Plot 18:

Test Date	2025-05-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	ISM MIMO 2
Signal	IEEE 802.11ax
Frequency	2412
SAR 10g (W/Kg)	0.067
SAR 1g (W/Kg)	0.152
ConvF	2.33
Relative permittivity	39.61
Conductivity (S/m)	1.78

Maximum location: X=-8.00, Y=-8.00 ; SAR Peak: 0.45 W/kg

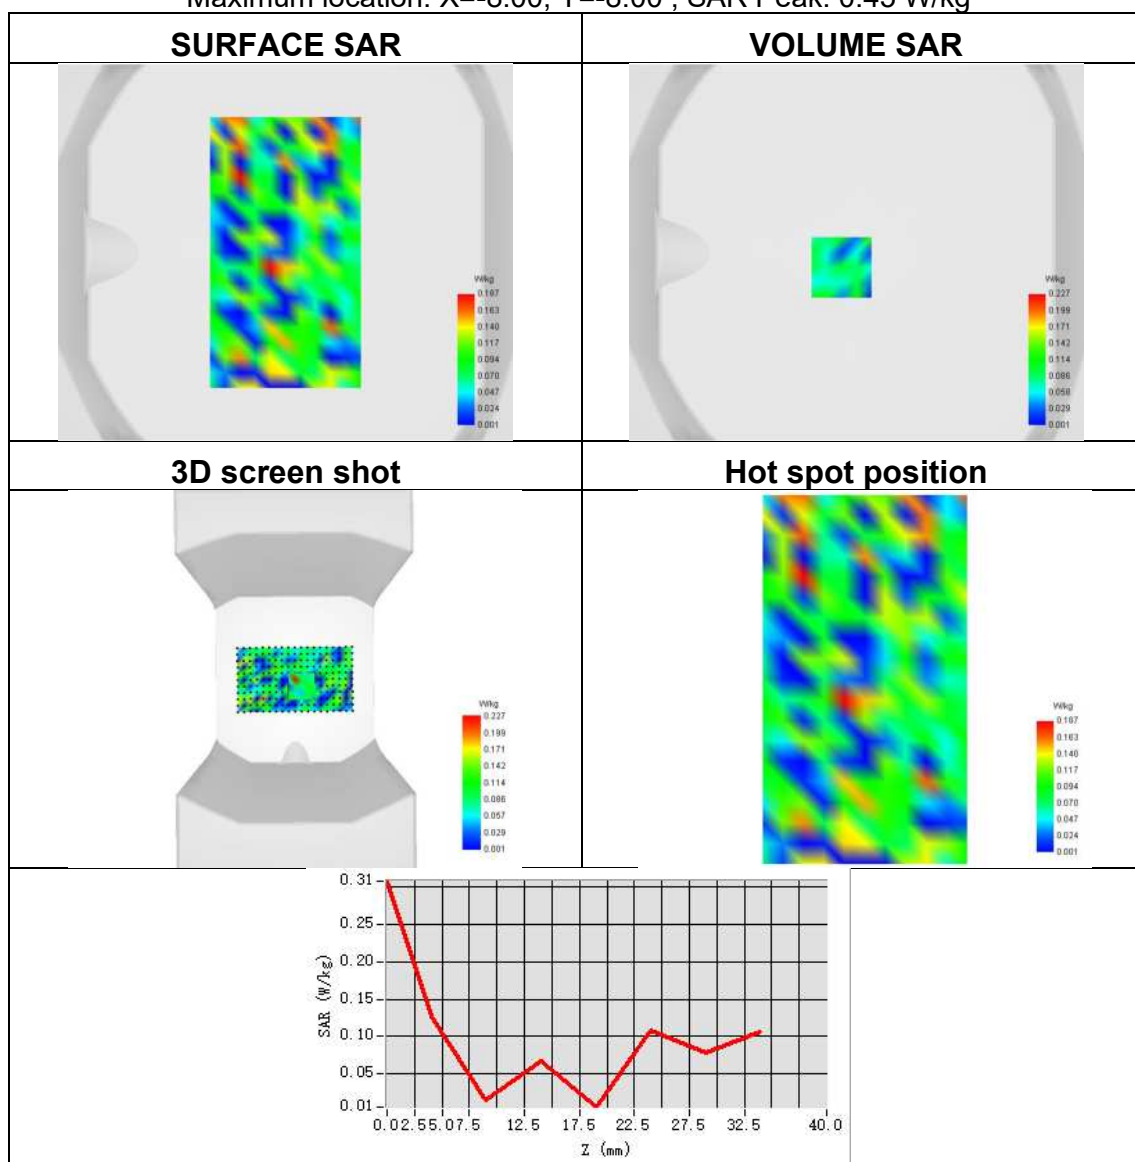




Plot 19:

Test Date	2025-05-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-1 ANT 1
Signal	IEEE 802.11a
Frequency	5240
SAR 10g (W/Kg)	0.132
SAR 1g (W/Kg)	0.279
ConvF	1.99
Relative permittivity	37.02
Conductivity (S/m)	4.61

Maximum location: X=-56.00, Y=-16.00 ; SAR Peak: 2.69 W/kg

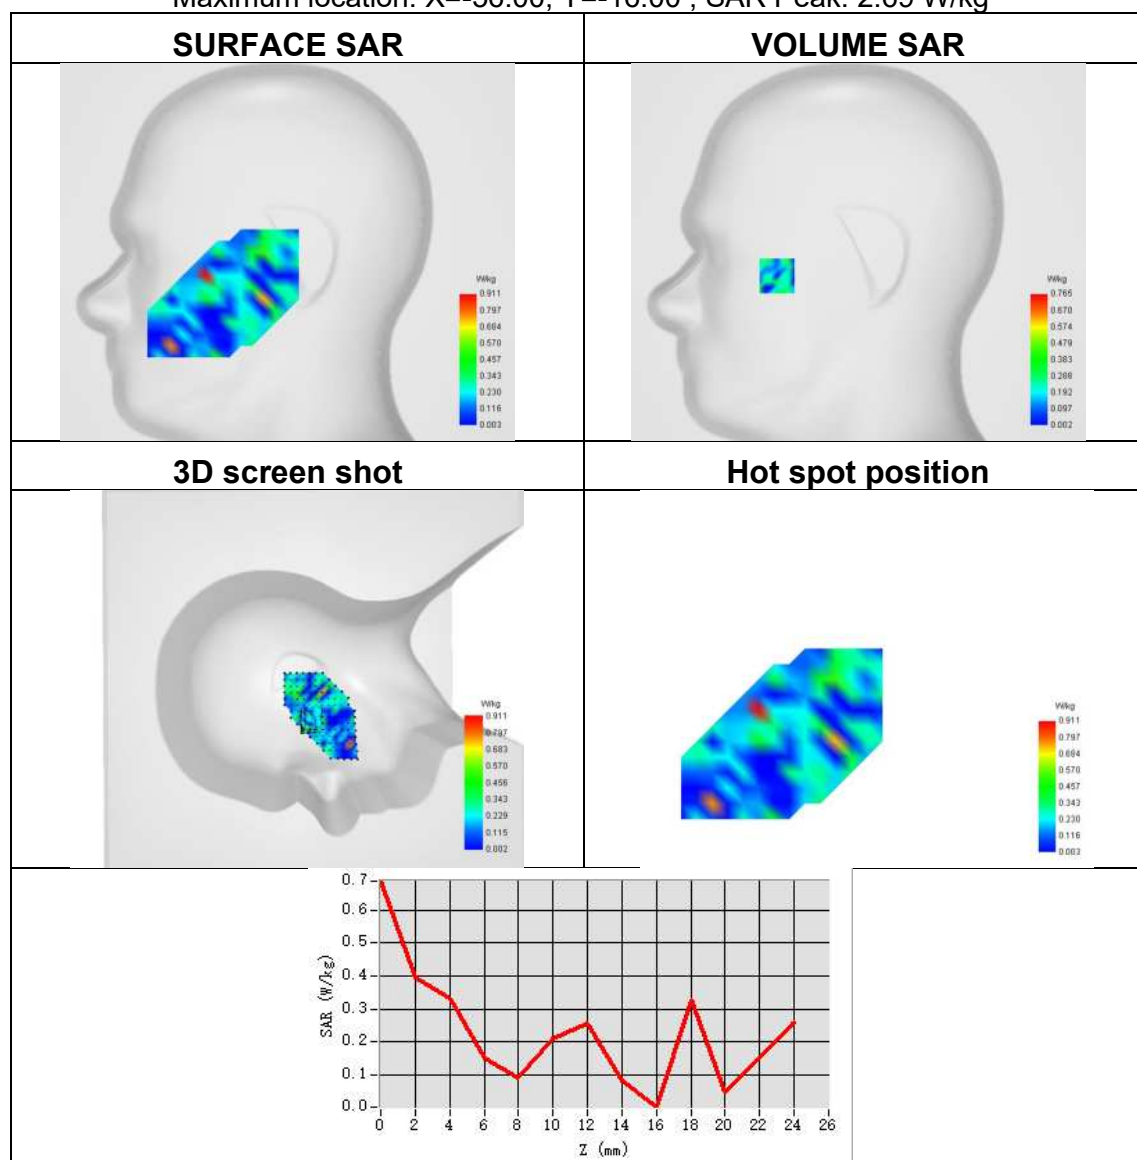




Plot 20:

Test Date	2025-05-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-1 ANT 1
Signal	IEEE 802.11a
Frequency	5240
SAR 10g (W/Kg)	0.147
SAR 1g (W/Kg)	0.313
ConvF	1.99
Relative permittivity	37.02
Conductivity (S/m)	4.61

Maximum location: X=-8.00, Y=10.00 ; SAR Peak: 2.43 W/kg

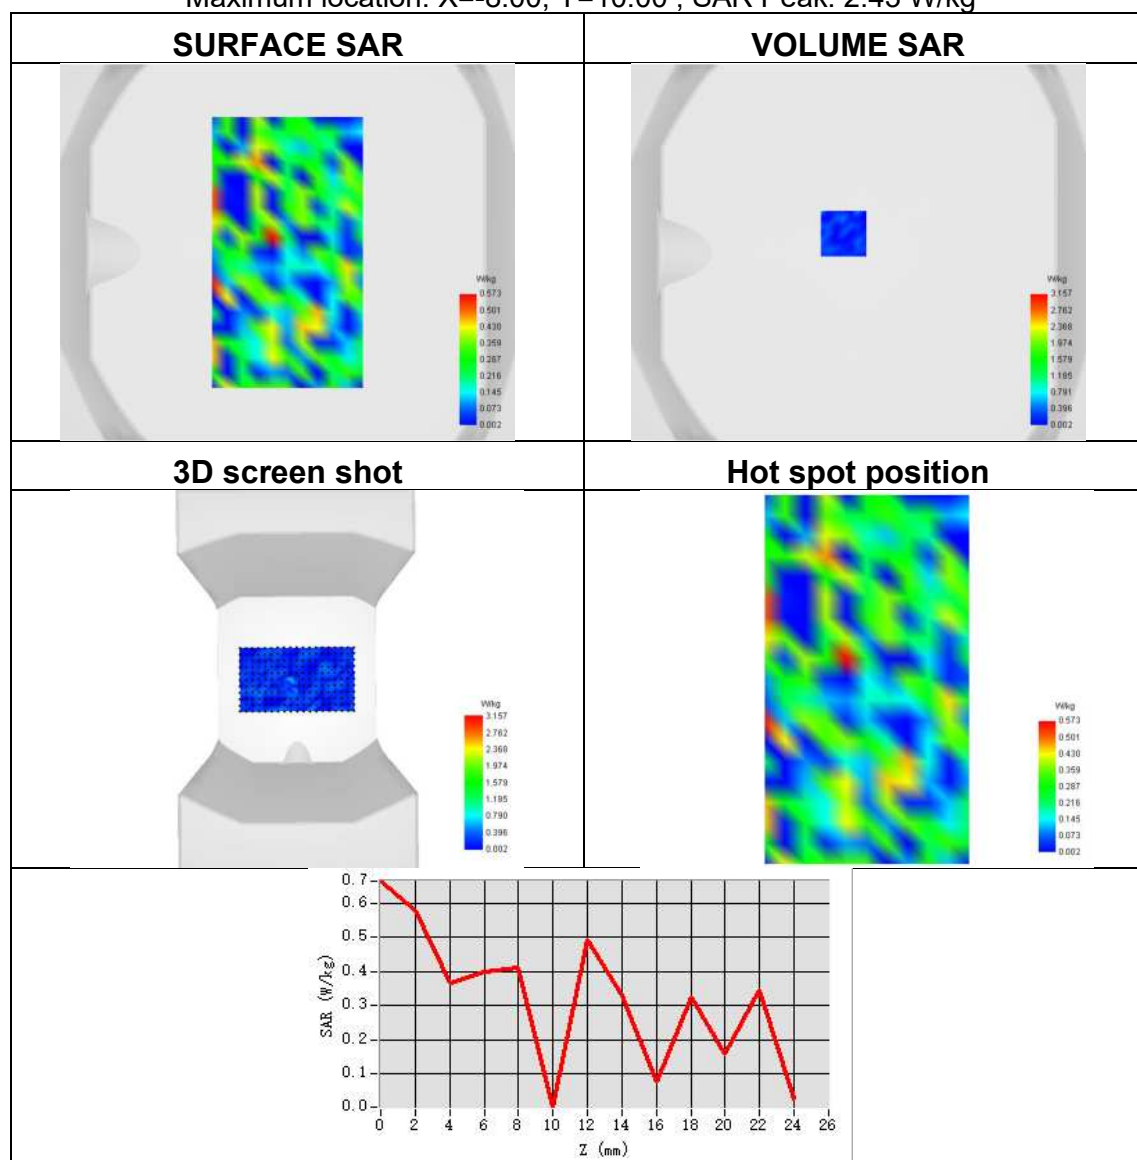




Plot 21:

Test Date	2025-05-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-1 ANT 2
Signal	IEEE 802.11a
Frequency	5200
SAR 10g (W/Kg)	0.152
SAR 1g (W/Kg)	0.322
ConvF	1.99
Relative permittivity	37.02
Conductivity (S/m)	4.61

Maximum location: X=-55.00, Y=-48.00 ; SAR Peak: 2.76 W/kg

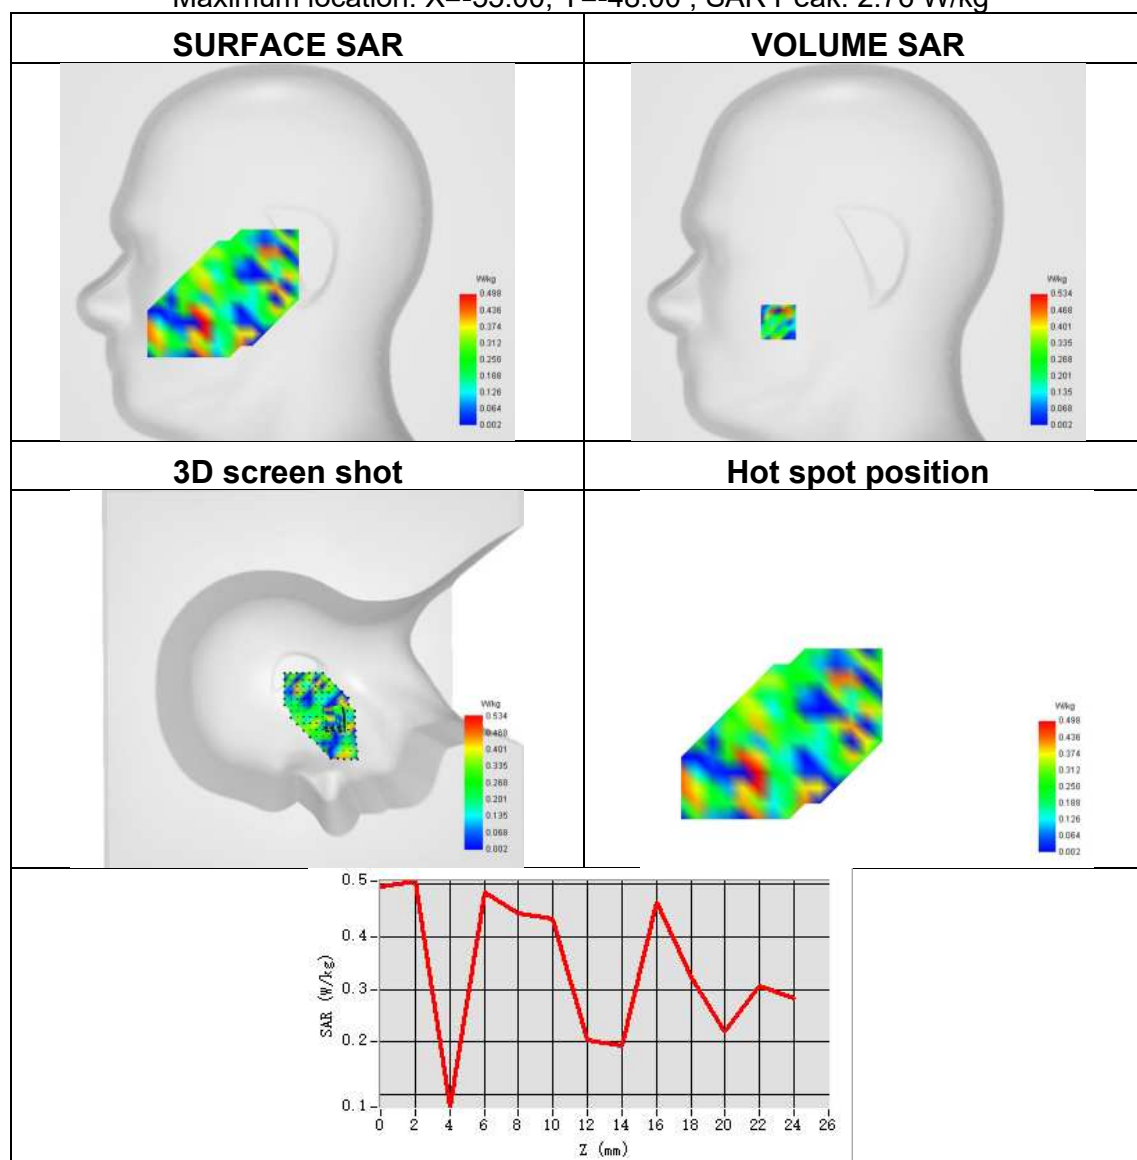




Plot 22:

Test Date	2025-05-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-1 ANT 2
Signal	IEEE 802.11a
Frequency	5200
SAR 10g (W/Kg)	0.134
SAR 1g (W/Kg)	0.186
ConvF	1.99
Relative permittivity	37.02
Conductivity (S/m)	4.61

Maximum location: X=-8.00, Y=32.00 ; SAR Peak: 1.87 W/kg

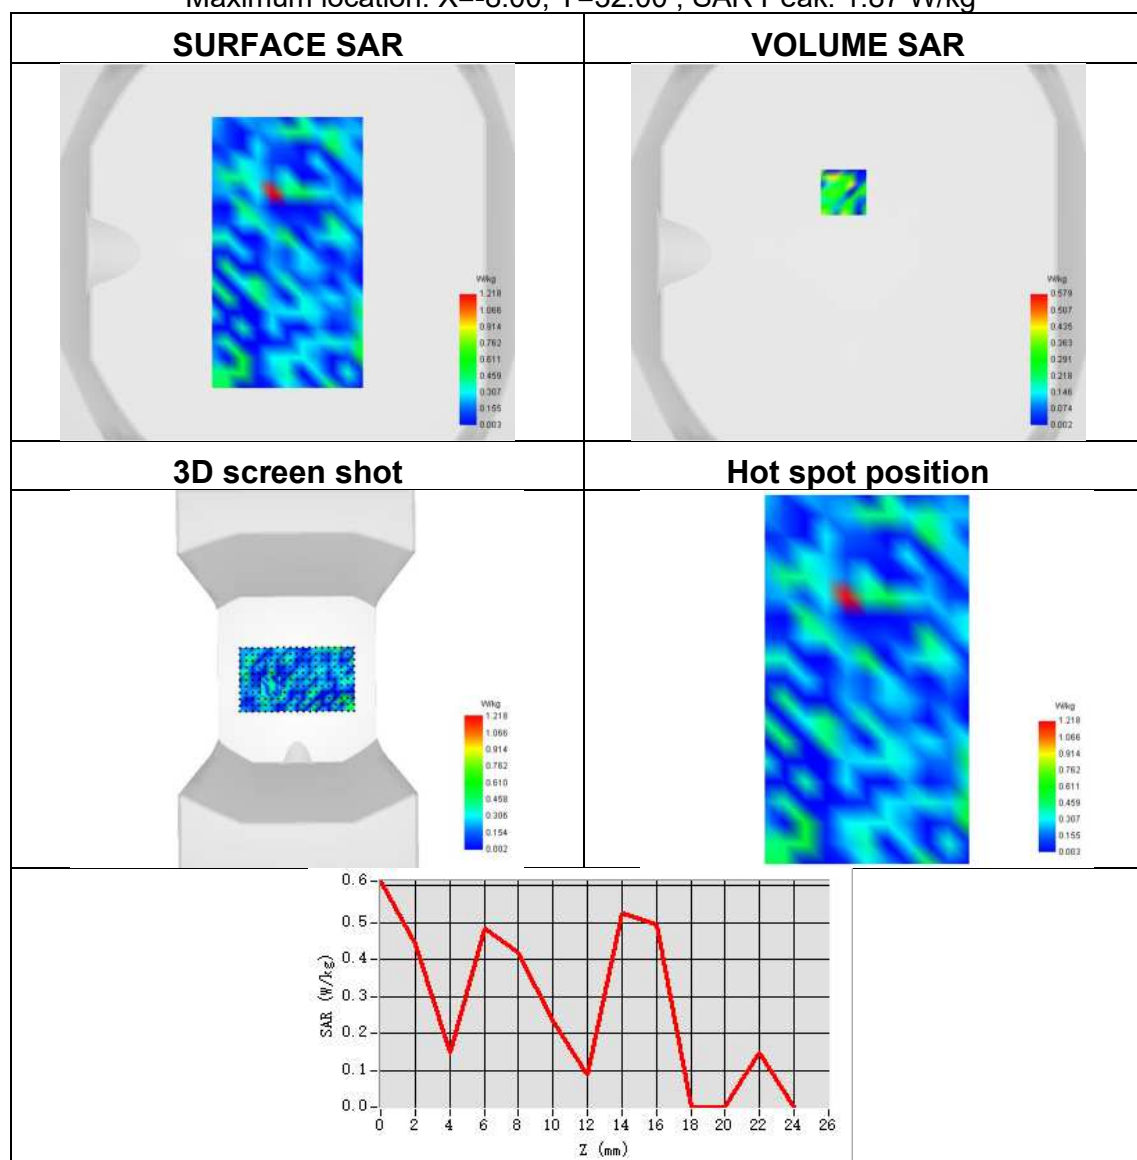




Plot 23:

Test Date	2025-05-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-1 MIMO 1
Signal	IEEE 802.11ax
Frequency	5230
SAR 10g (W/Kg)	0.162
SAR 1g (W/Kg)	0.371
ConvF	1.99
Relative permittivity	37.02
Conductivity (S/m)	4.61

Maximum location: X=-35.00, Y=-16.00 ; SAR Peak: 3.93 W/kg

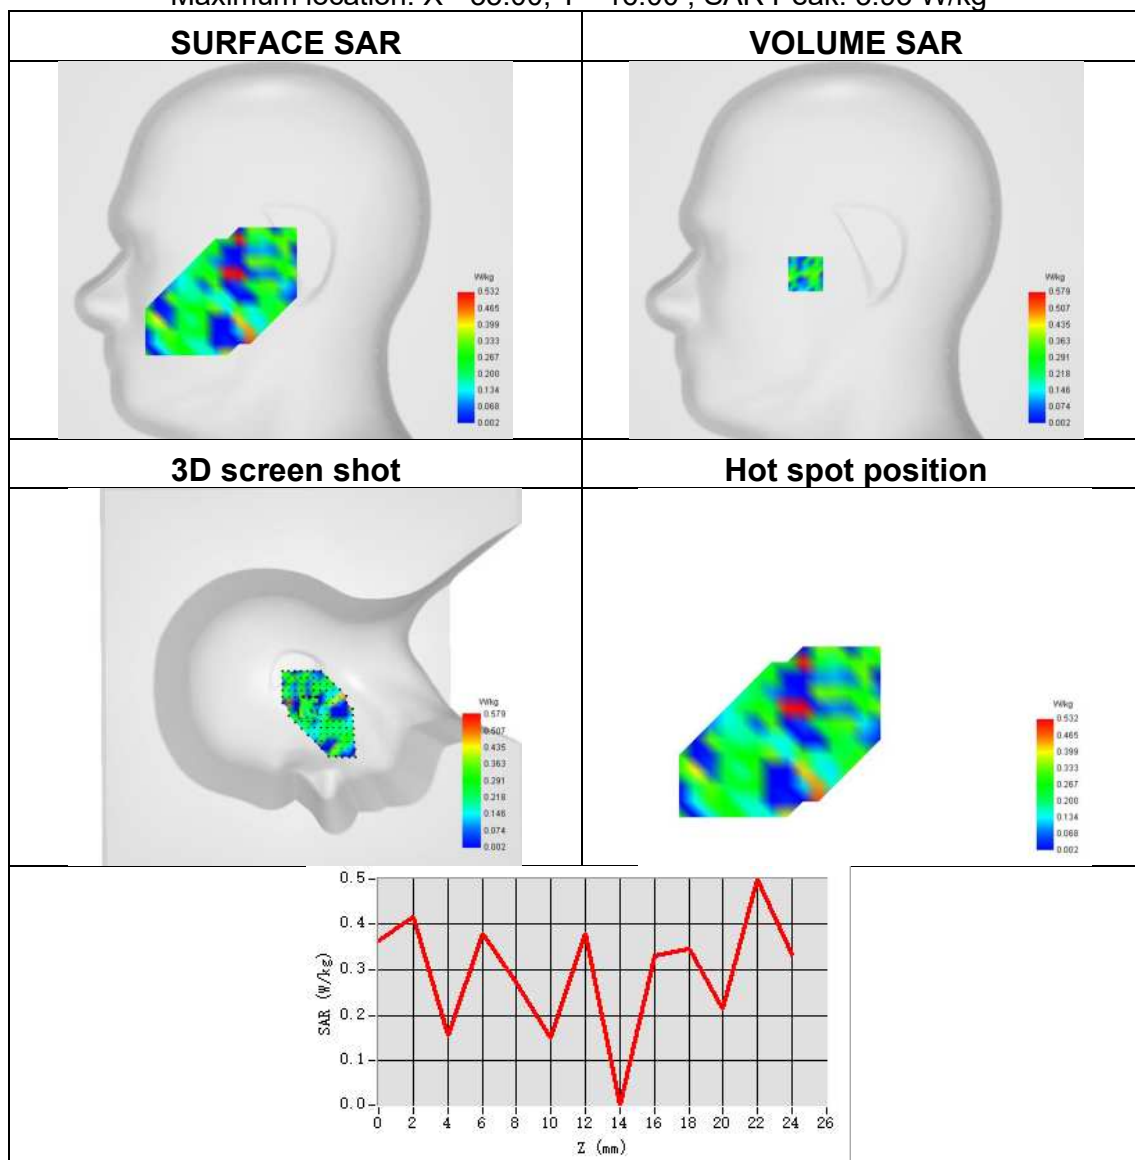




Plot 24:

Test Date	2025-05-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-1 MIMO 1
Signal	IEEE 802.11ax
Frequency	5230
SAR 10g (W/Kg)	0.095
SAR 1g (W/Kg)	0.149
ConvF	1.99
Relative permittivity	37.02
Conductivity (S/m)	4.61

Maximum location: X=15.00, Y=17.00 ; SAR Peak: 2.99 W/kg

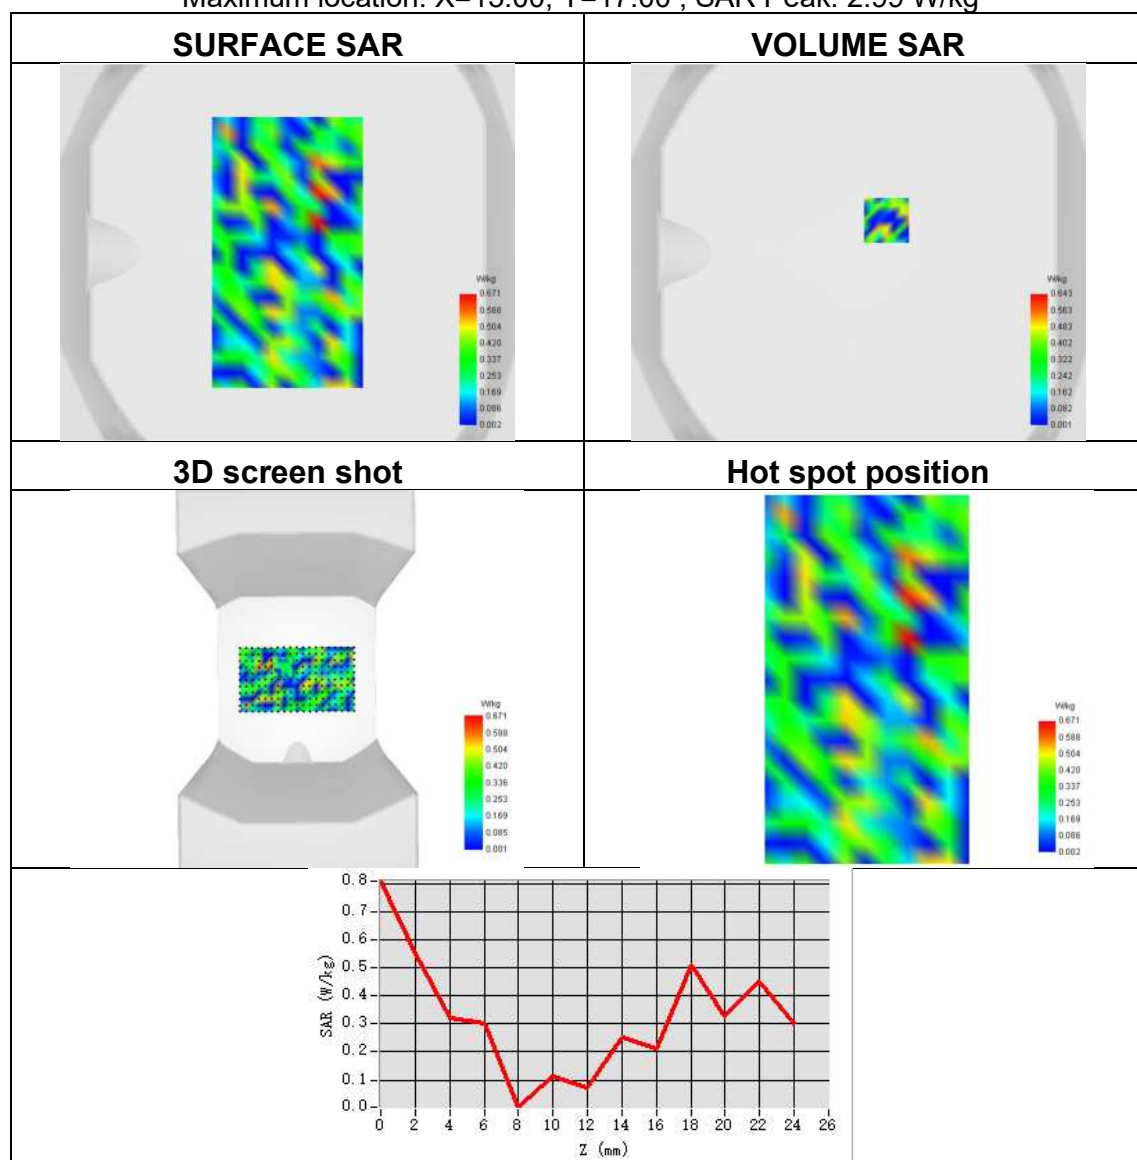




Plot 25:

Test Date	2025-05-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-1 MIMO 2
Signal	IEEE 802.11ax
Frequency	5230
SAR 10g (W/Kg)	0.105
SAR 1g (W/Kg)	0.162
ConvF	1.99
Relative permittivity	37.02
Conductivity (S/m)	4.61

Maximum location: X=-14.00, Y=-34.00 ; SAR Peak: 4.60 W/kg

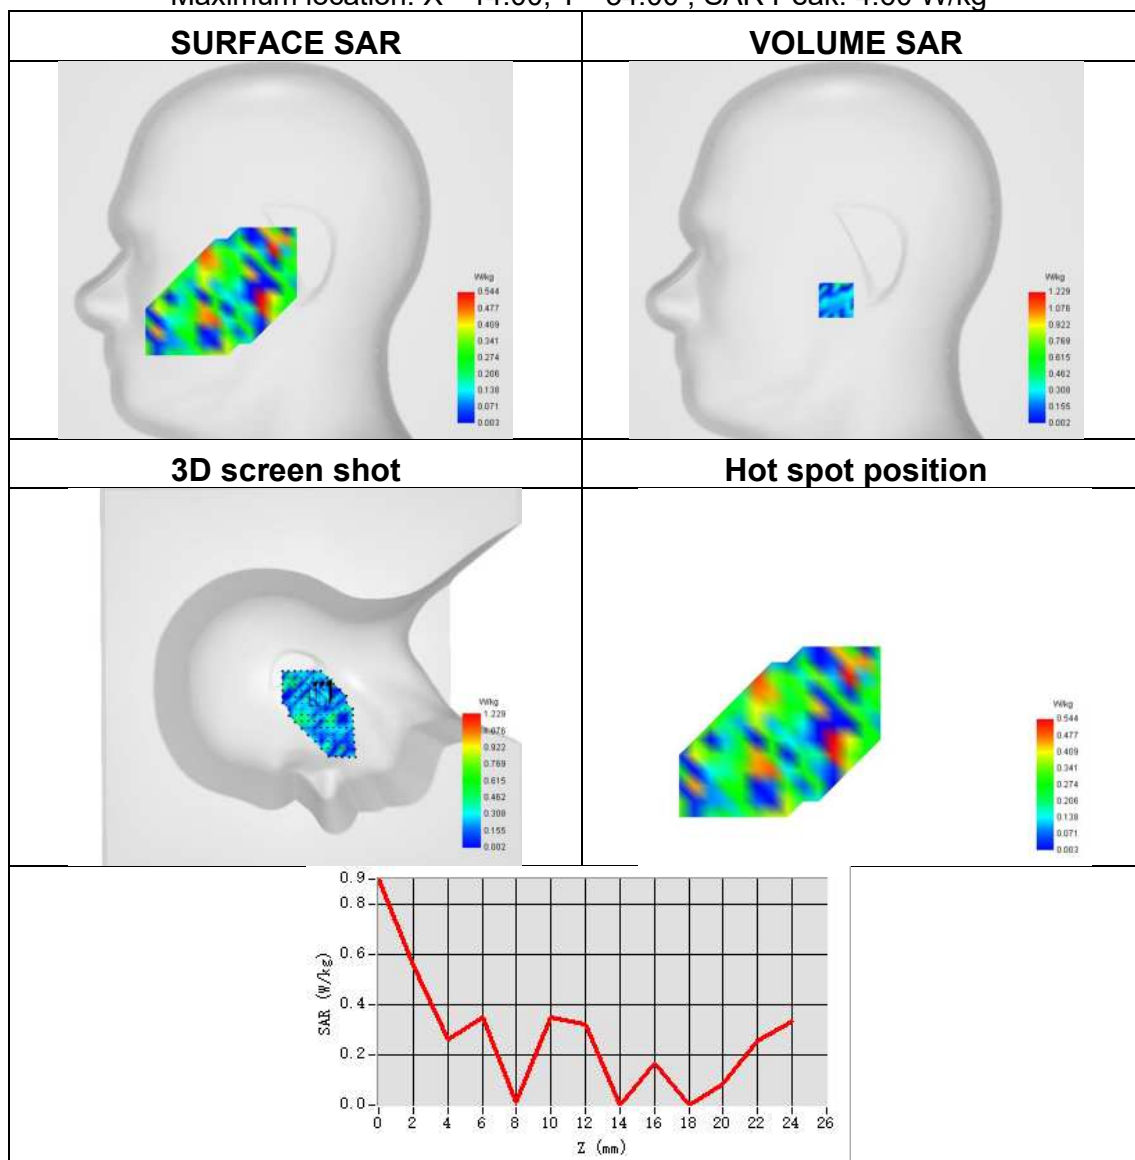




Plot 26:

Test Date	2025-05-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-1 MIMO 2
Signal	IEEE 802.11ax
Frequency	5230
SAR 10g (W/Kg)	0.109
SAR 1g (W/Kg)	0.177
ConvF	1.99
Relative permittivity	37.02
Conductivity (S/m)	4.61

Maximum location: X=16.00, Y=57.00 ; SAR Peak: 2.81 W/kg

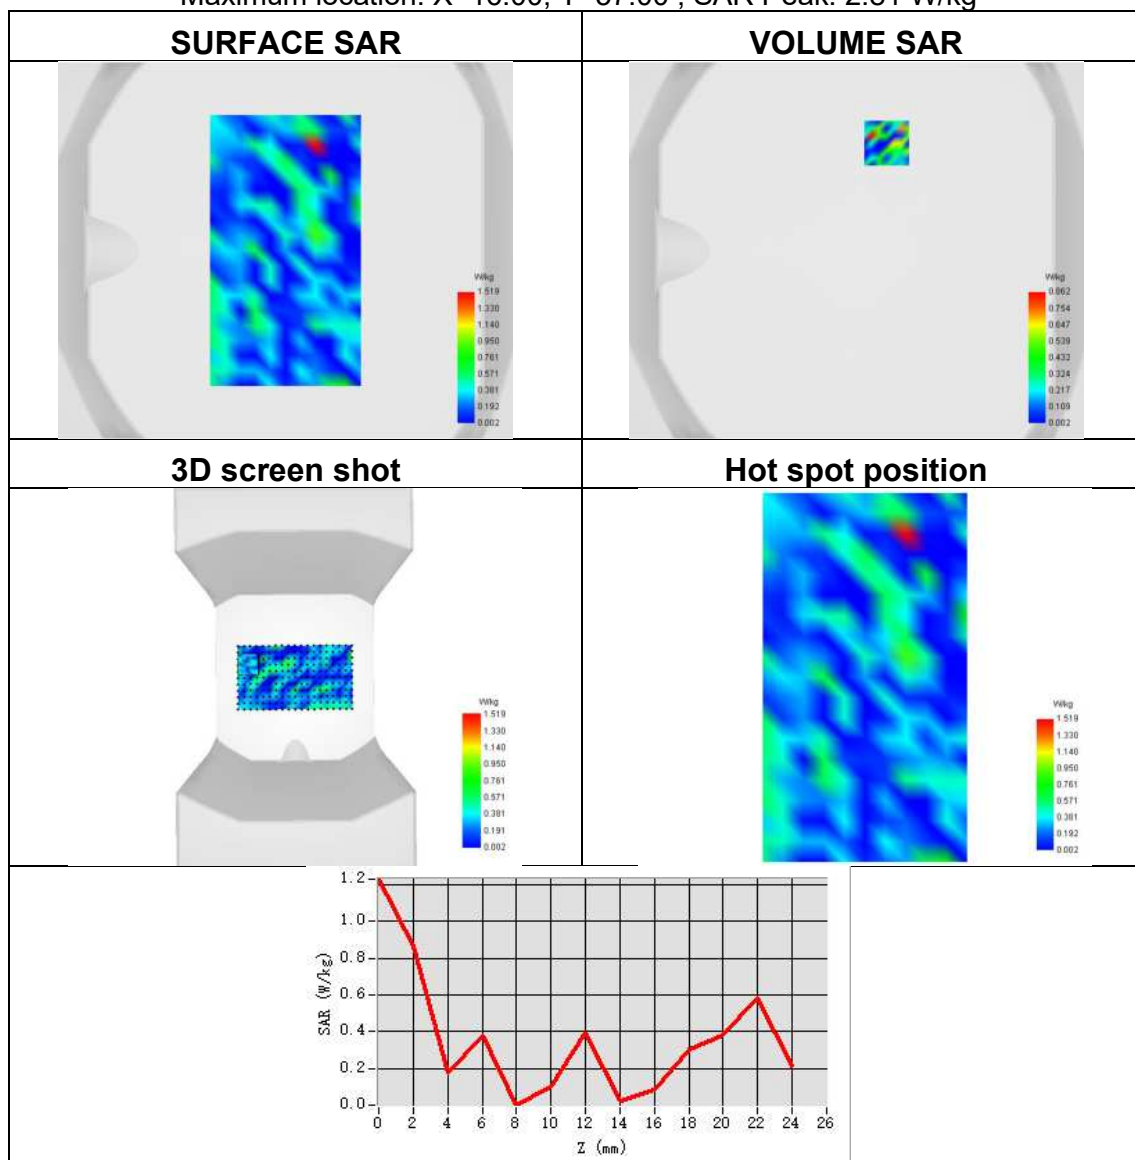




Plot 27:

Test Date	2025-05-29
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-2a ANT 1
Signal	IEEE 802.11a
Frequency	5260
SAR 10g (W/Kg)	0.256
SAR 1g (W/Kg)	0.596
ConvF	1.87
Relative permittivity	36.43
Conductivity (S/m)	4.89

Maximum location: X=-16.00, Y=-8.00 ; SAR Peak: 4.24 W/kg

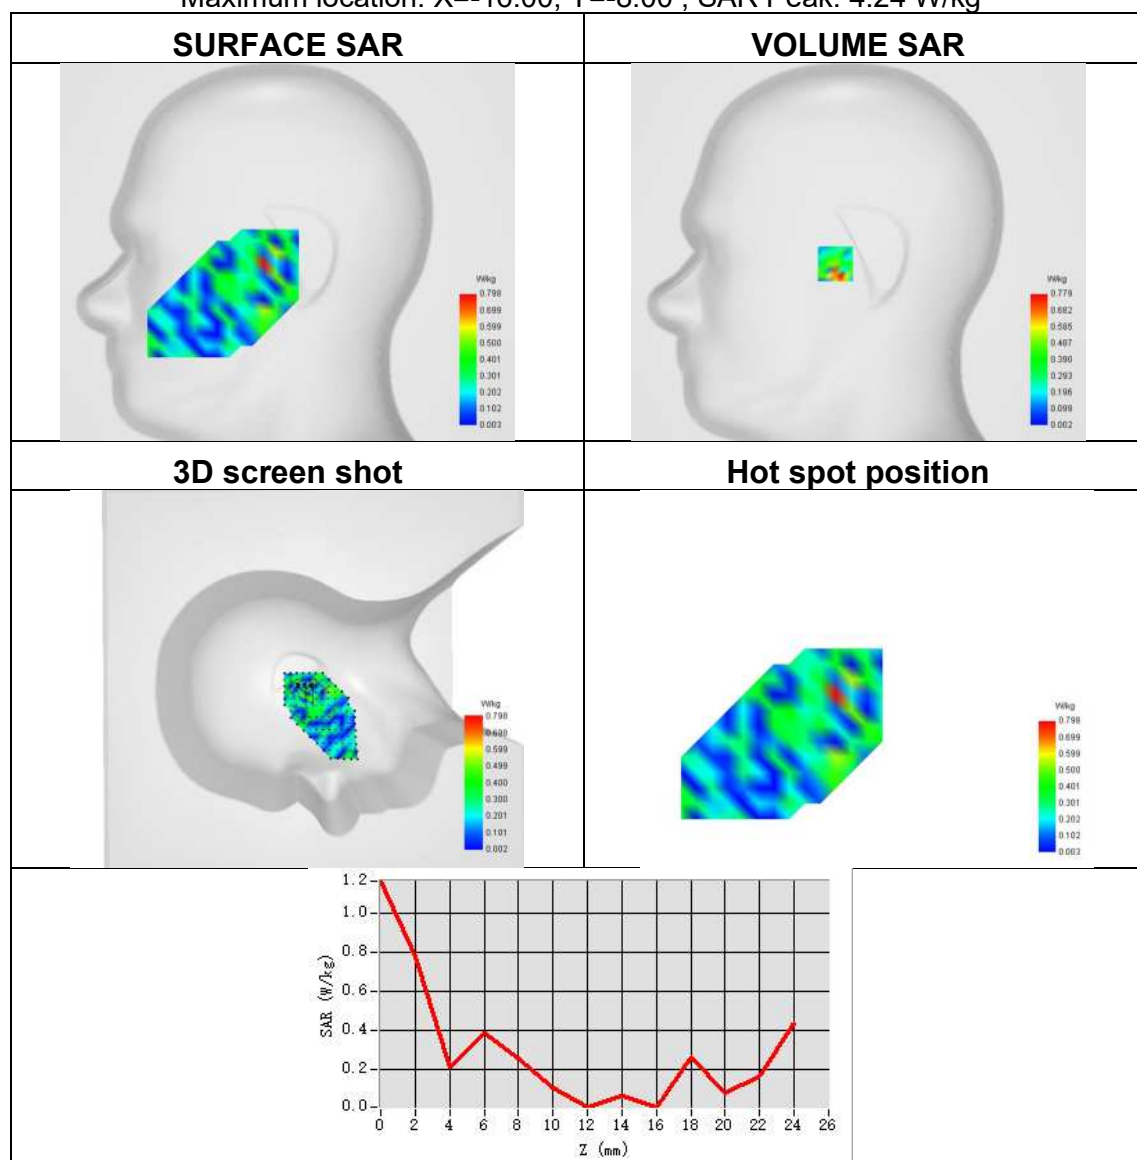




Plot 28:

Test Date	2025-05-29
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2a ANT 1
Signal	IEEE 802.11a
Frequency	5260
SAR 10g (W/Kg)	0.162
SAR 1g (W/Kg)	0.290
ConvF	1.87
Relative permittivity	36.43
Conductivity (S/m)	4.89

Maximum location: X=16.00, Y=24.00 ; SAR Peak: 2.90 W/kg

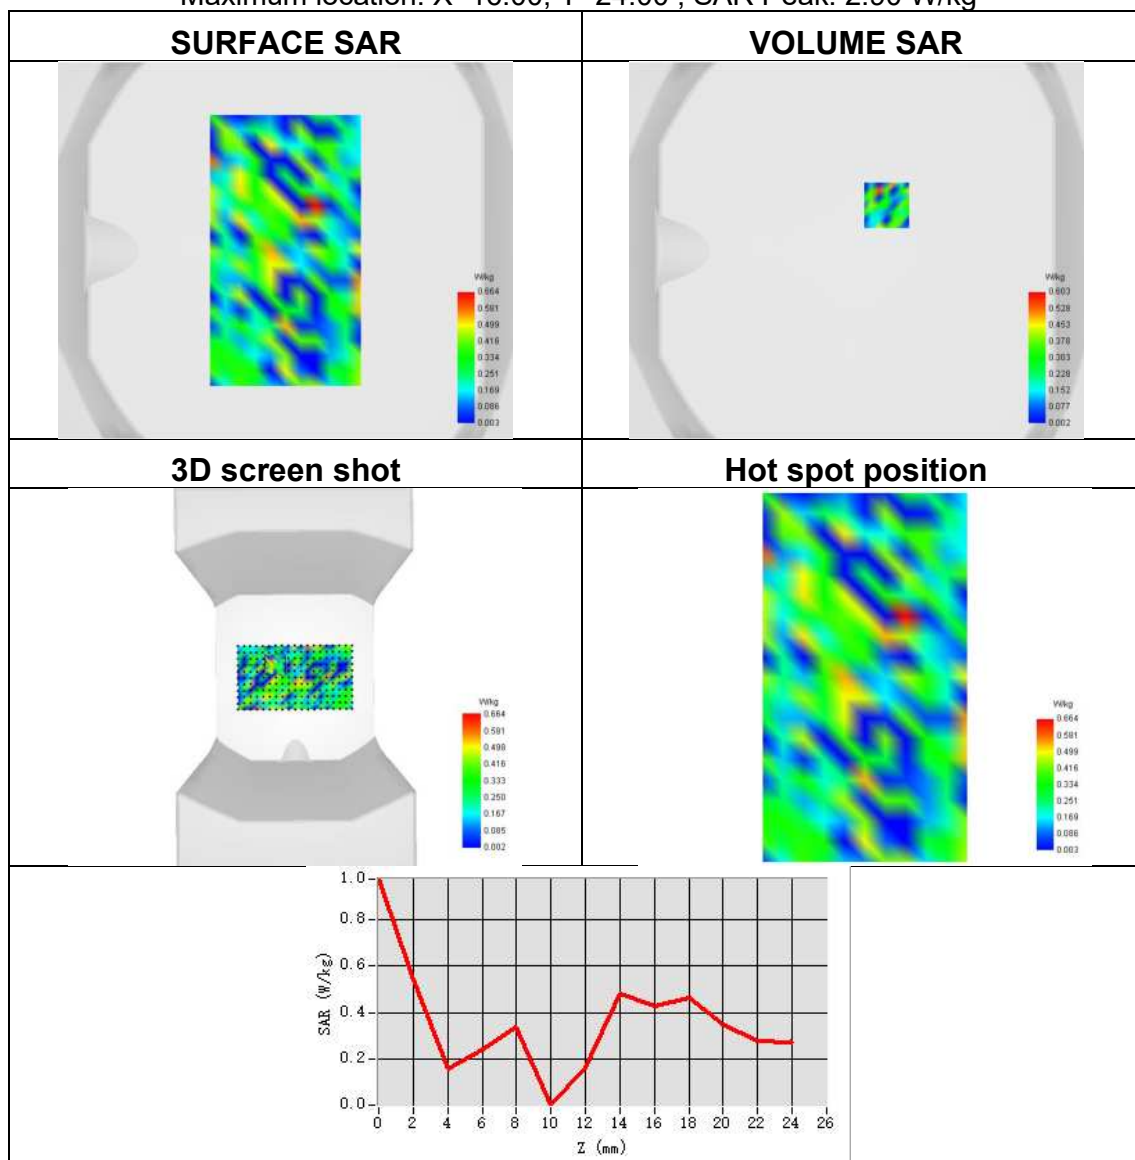




Plot 29:

Test Date	2025-05-29
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-2a ANT 2
Signal	IEEE 802.11a
Frequency	5300
SAR 10g (W/Kg)	0.143
SAR 1g (W/Kg)	0.294
ConvF	1.87
Relative permittivity	36.43
Conductivity (S/m)	4.89

Maximum location: X=-46.00, Y=-65.00 ; SAR Peak: 3.49 W/kg

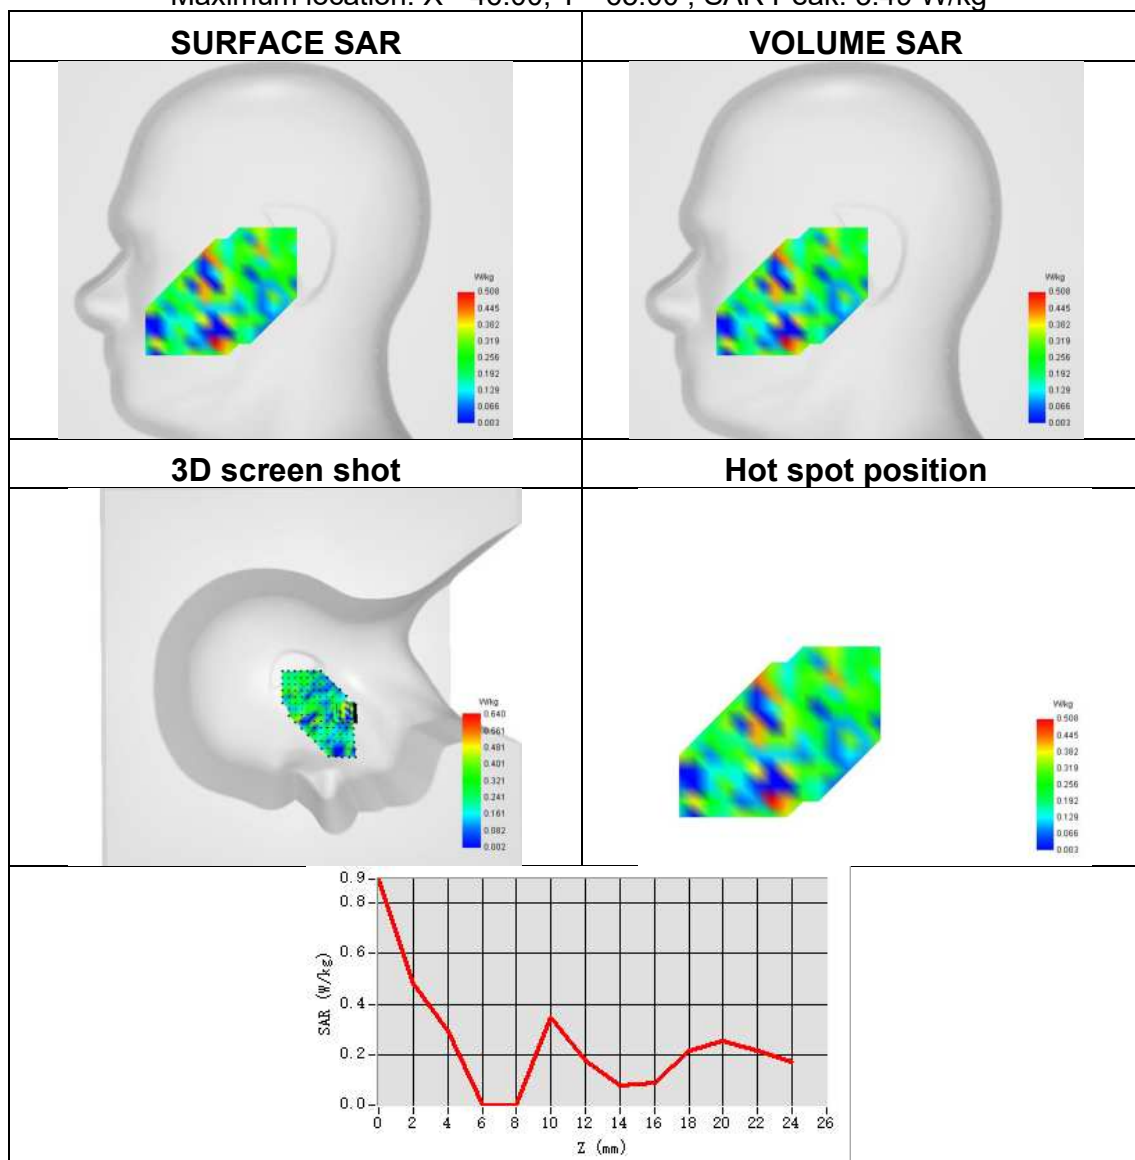




Plot 30:

Test Date	2025-05-29
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2a ANT 2
Signal	IEEE 802.11a
Frequency	5300
SAR 10g (W/Kg)	0.167
SAR 1g (W/Kg)	0.166
ConvF	1.87
Relative permittivity	36.43
Conductivity (S/m)	4.89

Maximum location: X=-8.00, Y=33.00 ; SAR Peak: 1.61 W/kg

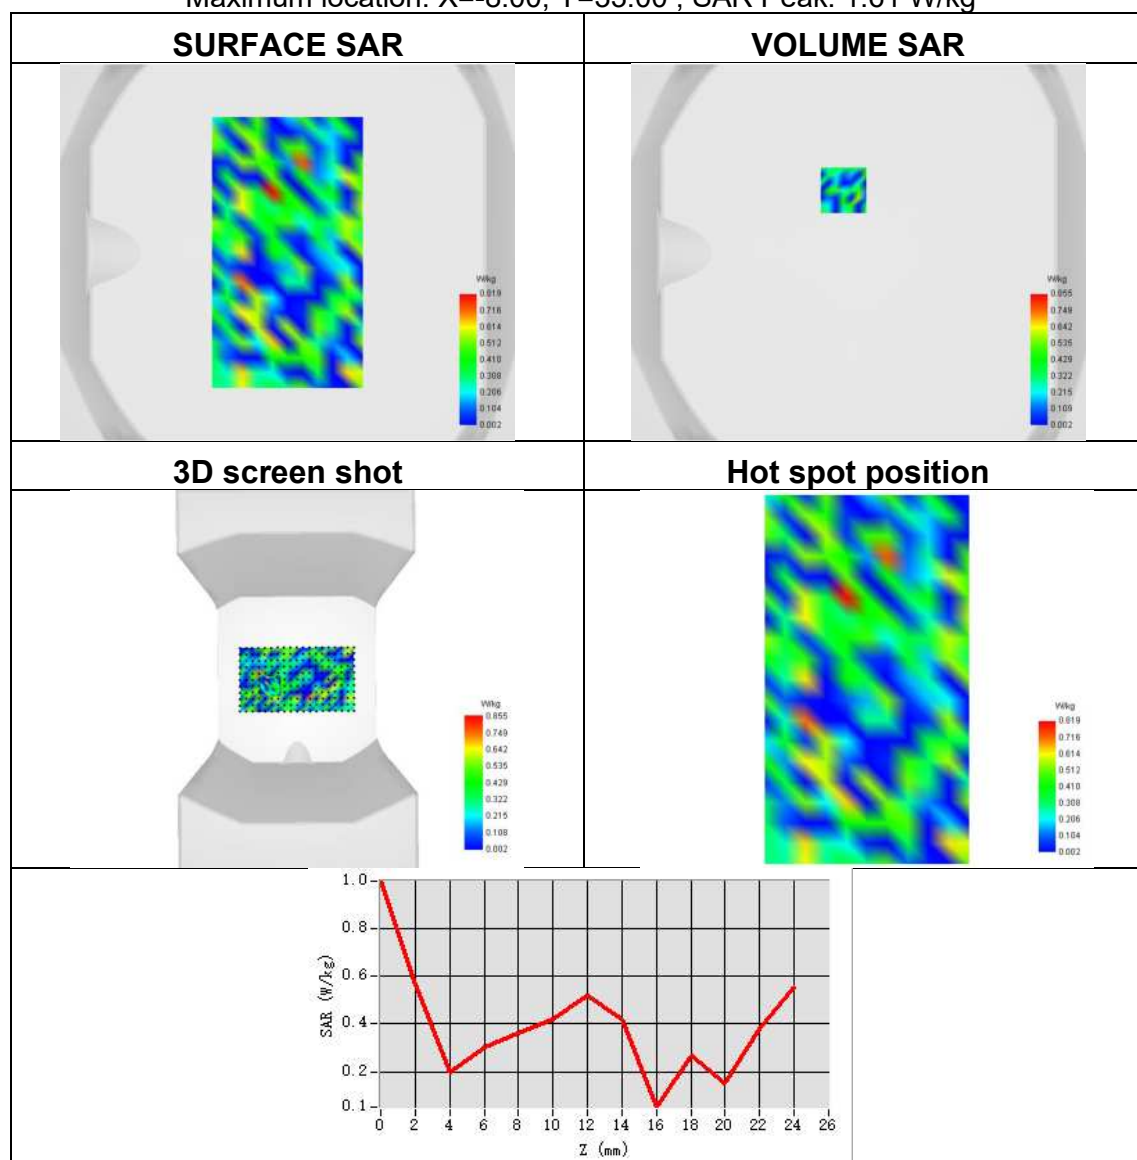




Plot 31:

Test Date	2025-05-29
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-2a MIMO 1
Signal	IEEE 802.11n
Frequency	5320
SAR 10g (W/Kg)	0.146
SAR 1g (W/Kg)	0.111
ConvF	1.87
Relative permittivity	36.43
Conductivity (S/m)	4.89

Maximum location: X=-24.00, Y=-29.00 ; SAR Peak: 4.00 W/kg

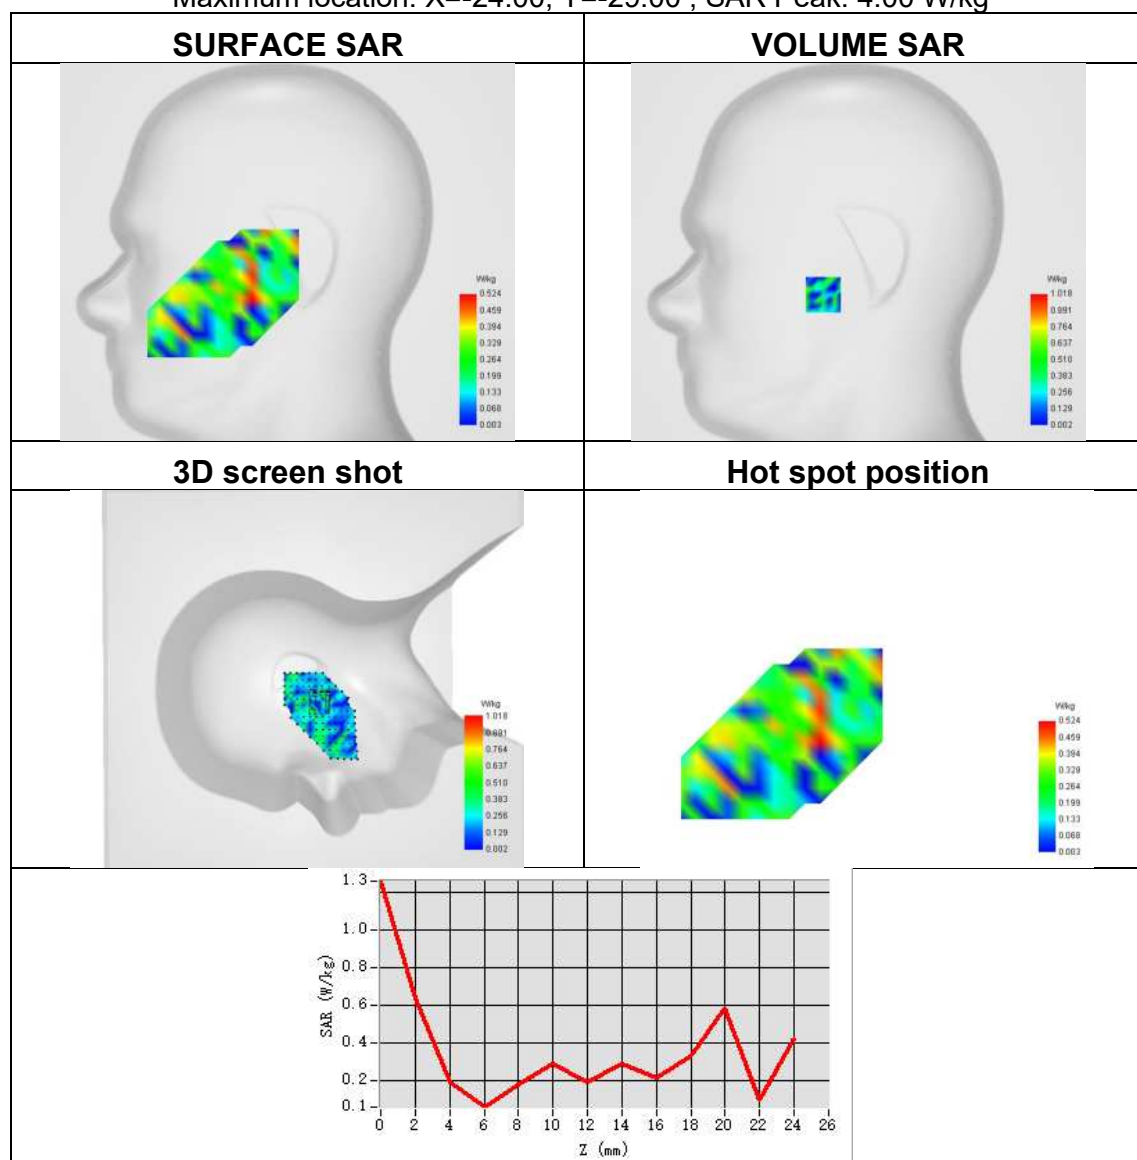




Plot 32:

Test Date	2025-05-29
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2a MIMO 1
Signal	IEEE 802.11n
Frequency	5320
SAR 10g (W/Kg)	0.076
SAR 1g (W/Kg)	0.138
ConvF	1.87
Relative permittivity	36.43
Conductivity (S/m)	4.89

Maximum location: X=-8.00, Y=8.00 ; SAR Peak: 2.65 W/kg

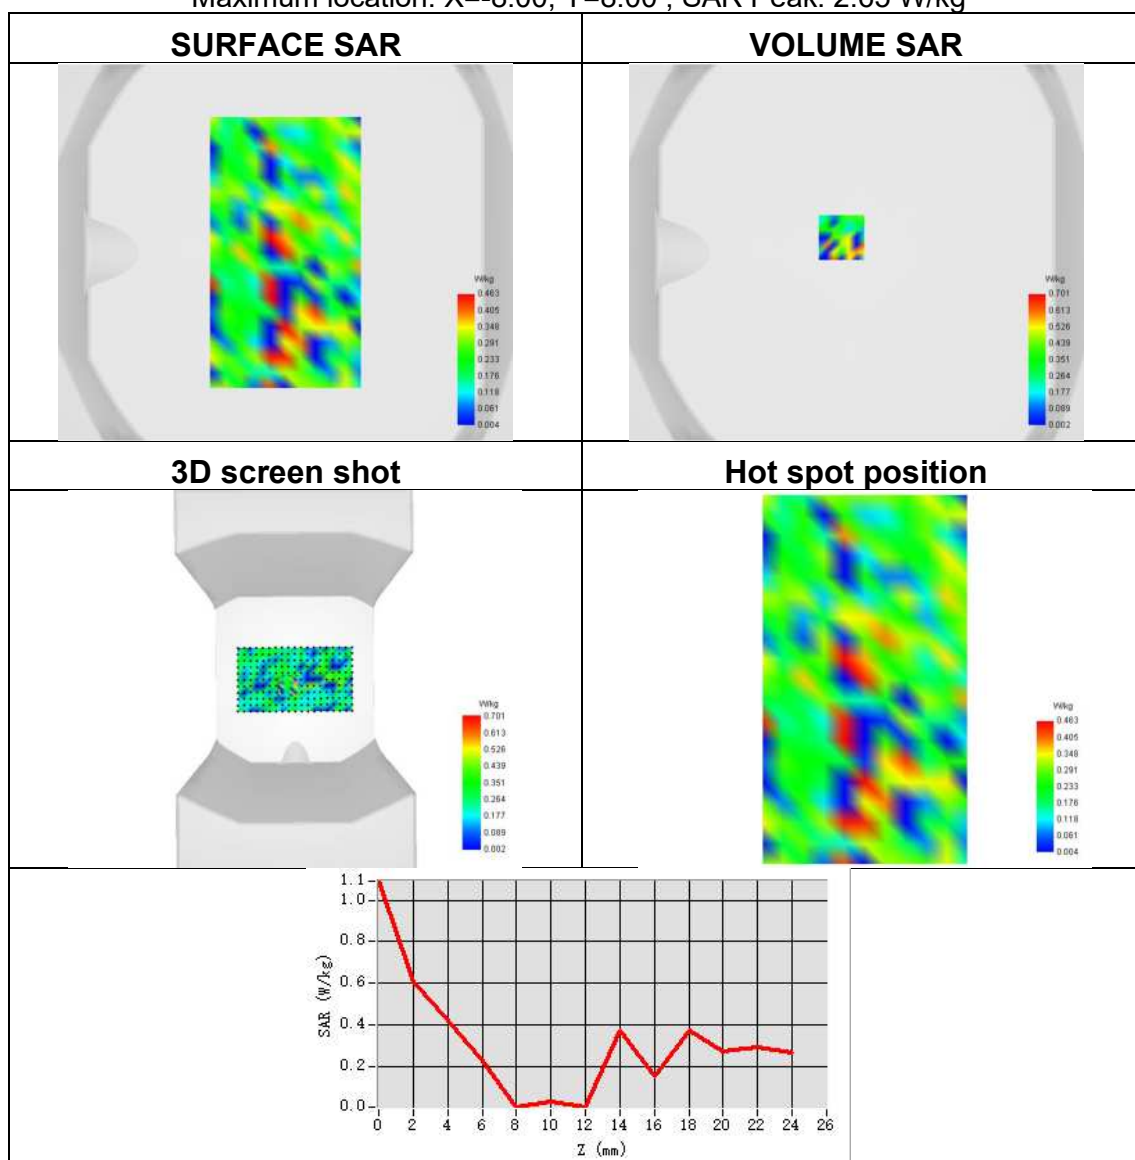




Plot 33:

Test Date	2025-05-29
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-2a MIMO 2
Signal	IEEE 802.11n
Frequency	5320
SAR 10g (W/Kg)	0.152
SAR 1g (W/Kg)	0.210
ConvF	1.87
Relative permittivity	36.43
Conductivity (S/m)	4.89

Maximum location: X=-31.00, Y=-1.00 ; SAR Peak: 4.32 W/kg

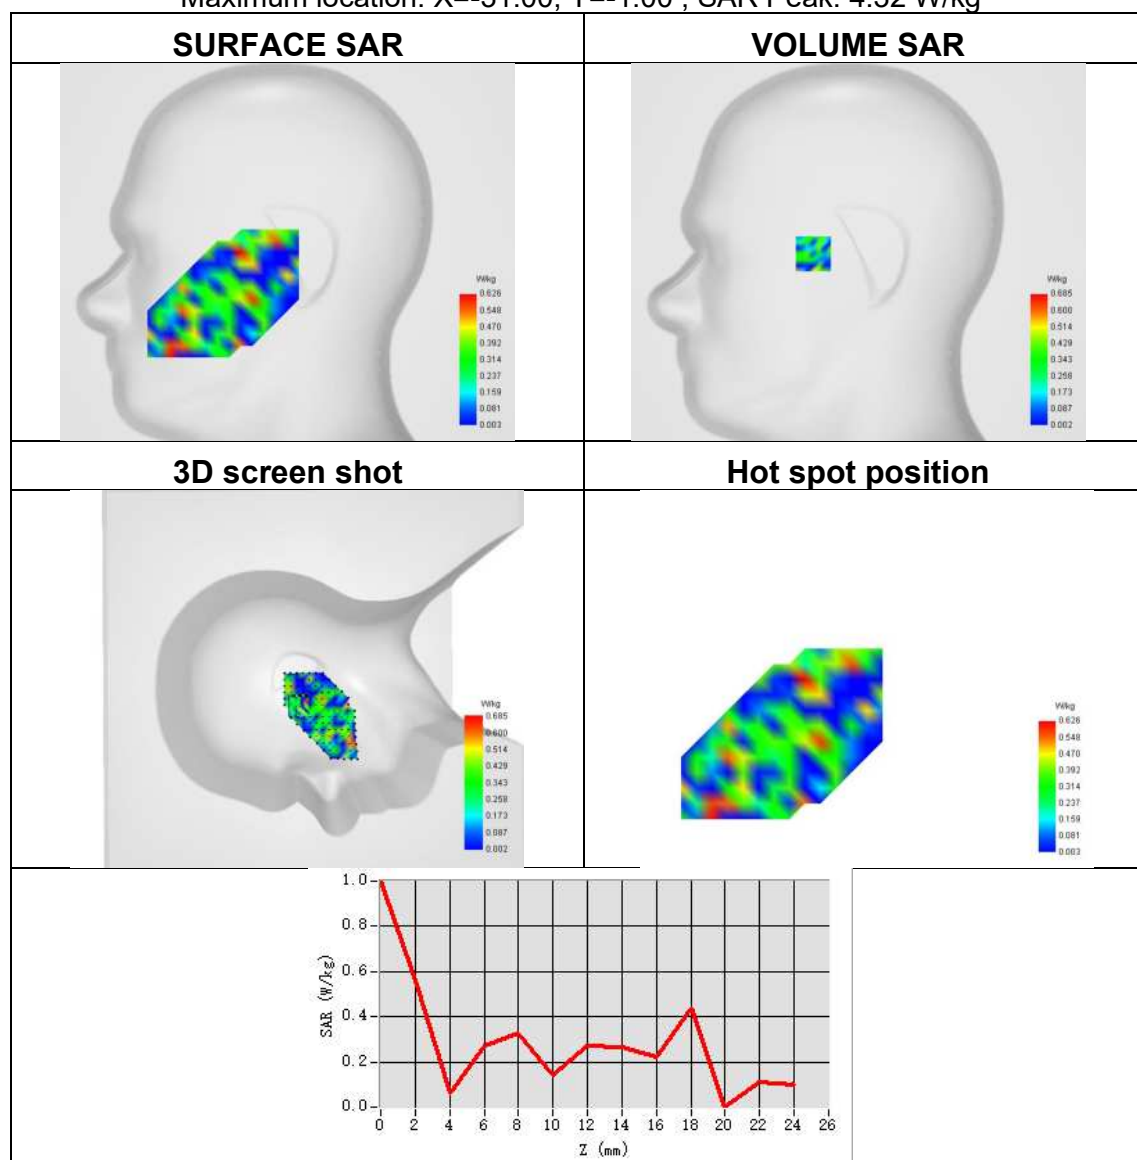




Plot 34:

Test Date	2025-05-29
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2a MIMO 2
Signal	IEEE 802.11n
Frequency	5320
SAR 10g (W/Kg)	0.091
SAR 1g (W/Kg)	0.148
ConvF	1.87
Relative permittivity	36.43
Conductivity (S/m)	4.89

Maximum location: X=7.00, Y=31.00 ; SAR Peak: 2.46 W/kg

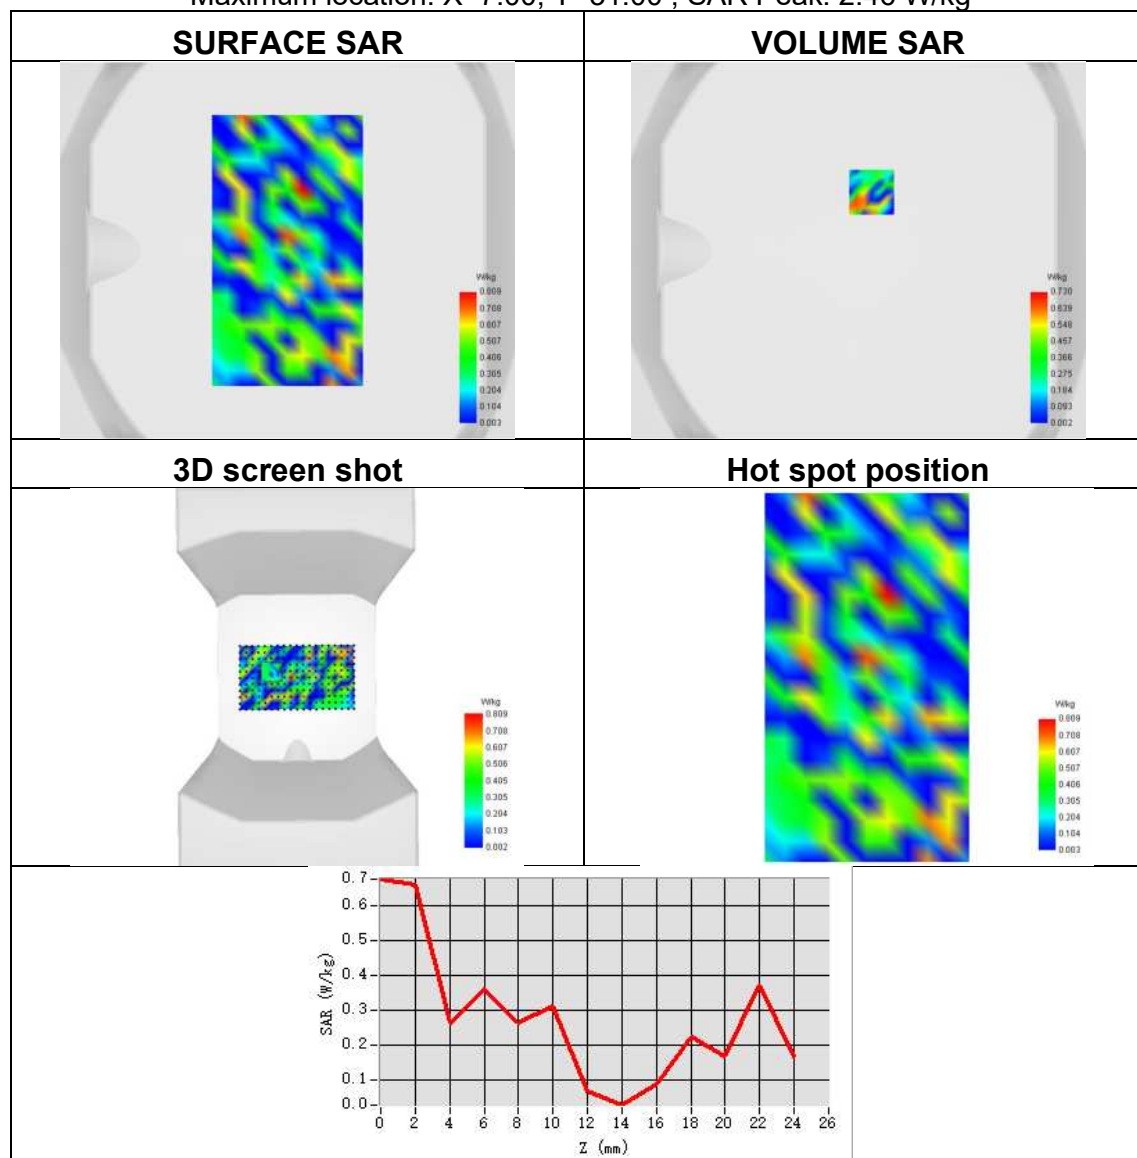




Plot 35:

Test Date	2025-05-30
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-2c ANT 1
Signal	IEEE 802.11a
Frequency	5580
SAR 10g (W/Kg)	0.112
SAR 1g (W/Kg)	0.240
ConvF	1.87
Relative permittivity	36.35
Conductivity (S/m)	5.02

Maximum location: X=-16.00, Y=0.00 ; SAR Peak: 5.71 W/kg

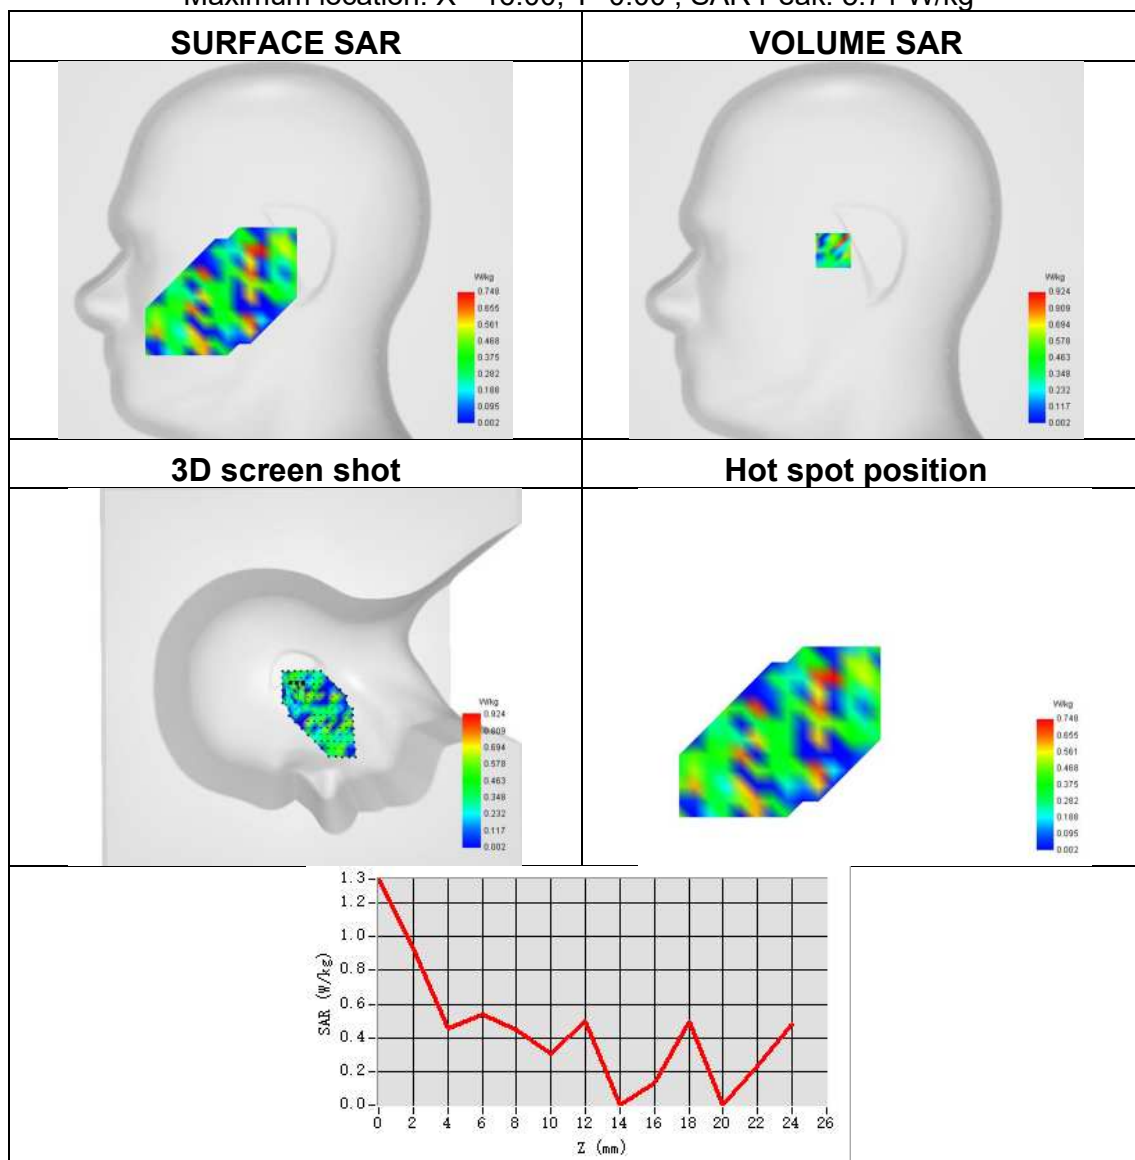




Plot 36:

Test Date	2025-05-30
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2c ANT 1
Signal	IEEE 802.11a
Frequency	5580
SAR 10g (W/Kg)	0.183
SAR 1g (W/Kg)	0.358
ConvF	1.87
Relative permittivity	36.35
Conductivity (S/m)	5.02

Maximum location: X=-17.00, Y=9.00 ; SAR Peak: 2.61 W/kg

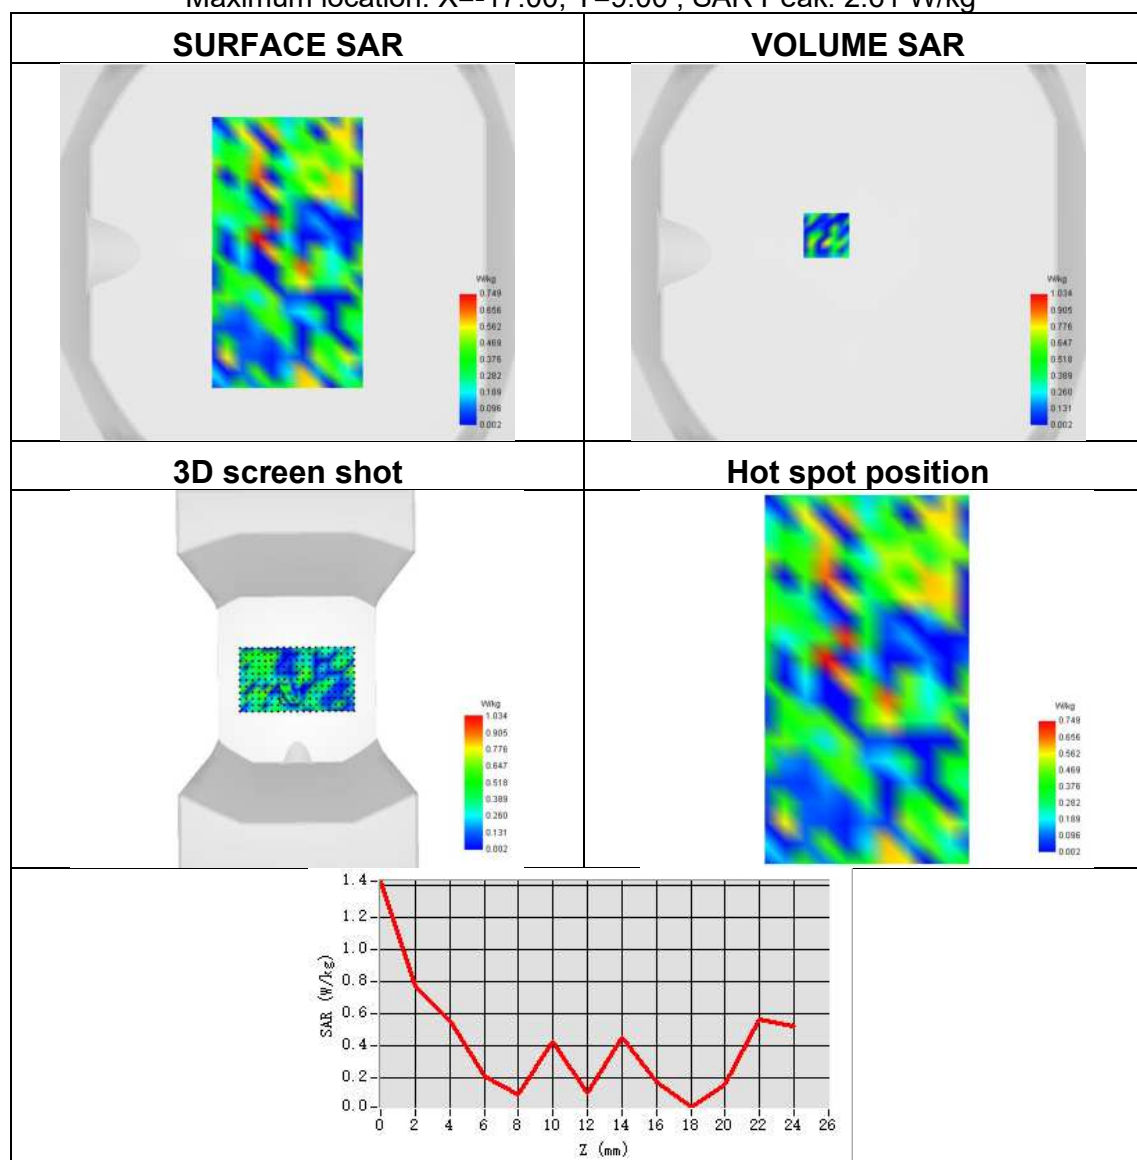




Plot 37:

Test Date	2025-05-30
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-2c ANT 2
Signal	IEEE 802.11a
Frequency	5700
SAR 10g (W/Kg)	0.123
SAR 1g (W/Kg)	0.233
ConvF	1.87
Relative permittivity	36.35
Conductivity (S/m)	5.02

Maximum location: X=-1.00, Y=-11.00 ; SAR Peak: 4.01 W/kg

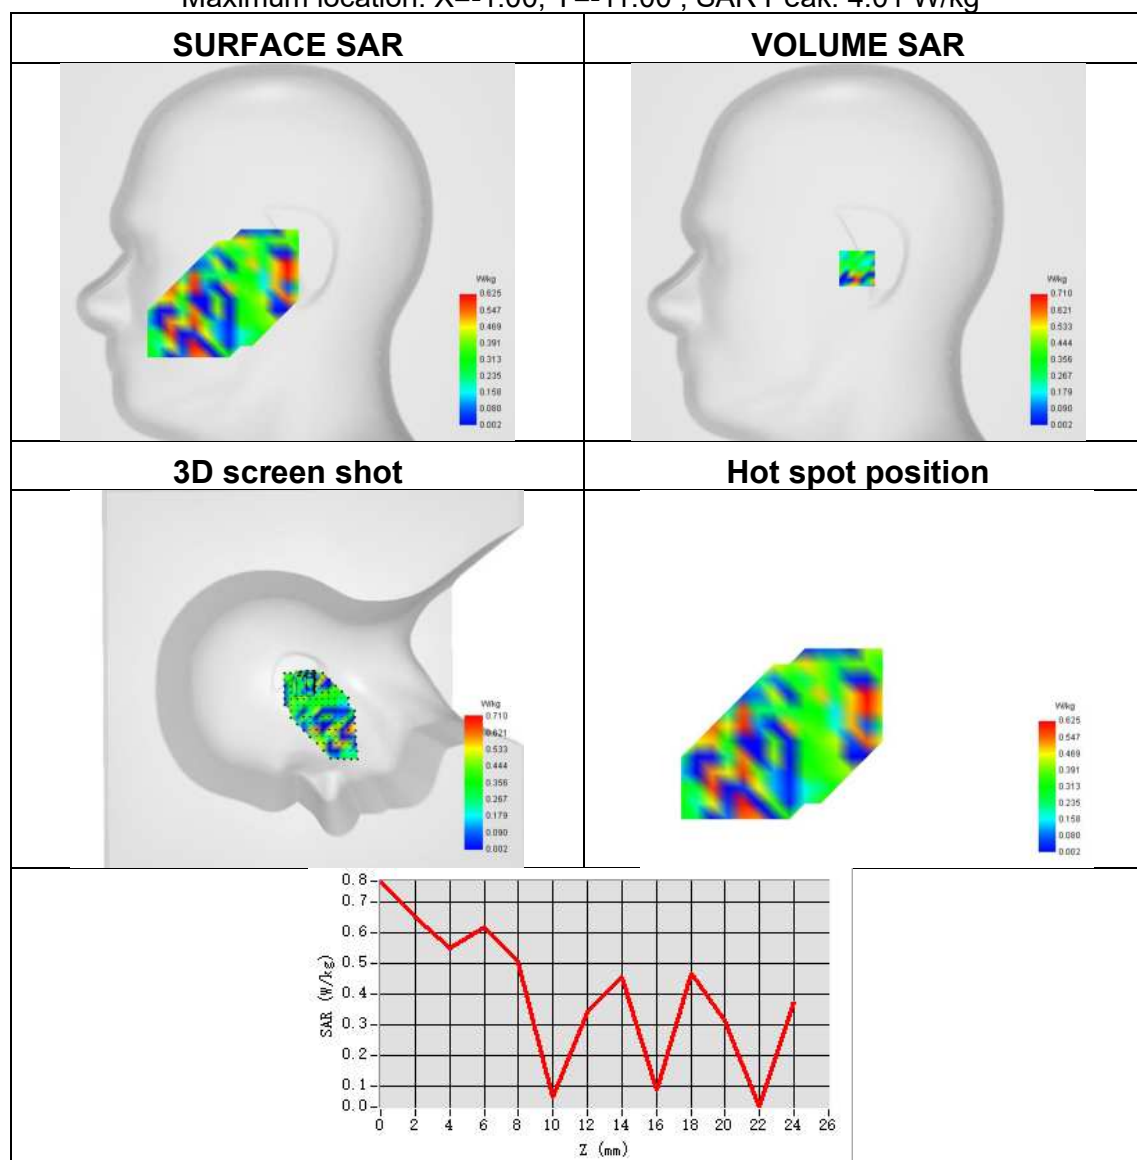




Plot 38:

Test Date	2025-05-30
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2c ANT 2
Signal	IEEE 802.11a
Frequency	5700
SAR 10g (W/Kg)	0.204
SAR 1g (W/Kg)	0.395
ConvF	1.87
Relative permittivity	36.35
Conductivity (S/m)	5.02

Maximum location: X=-8.00, Y=1.00 ; SAR Peak: 1.88 W/kg

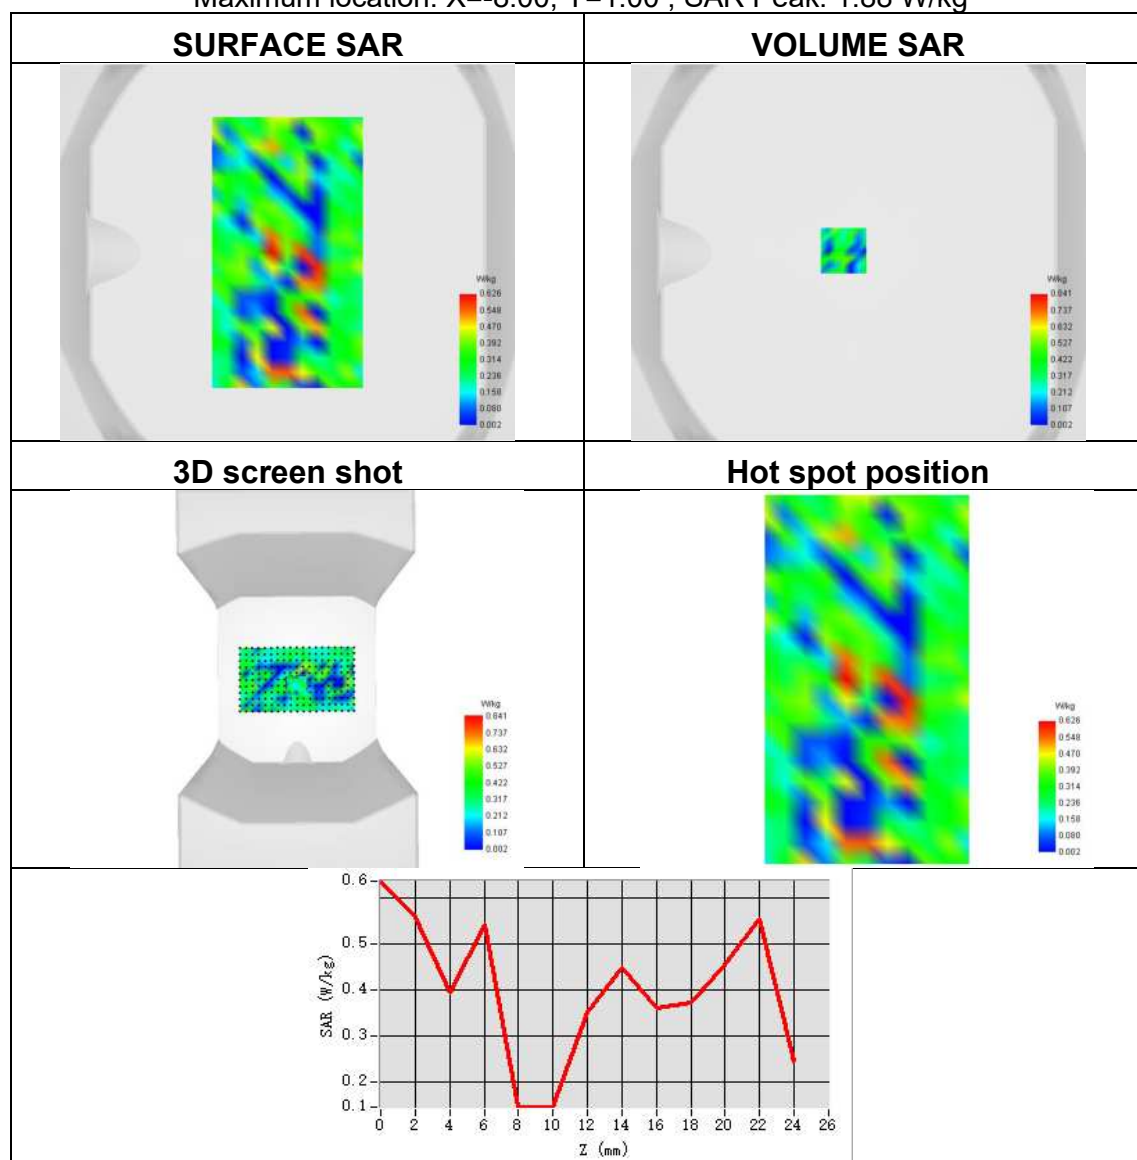




Plot 39:

Test Date	2025-05-30
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-2c MIMO 1
Signal	IEEE 802.11ax
Frequency	5700
SAR 10g (W/Kg)	0.137
SAR 1g (W/Kg)	0.251
ConvF	1.87
Relative permittivity	36.35
Conductivity (S/m)	5.02

Maximum location: X=-25.00, Y=-8.00 ; SAR Peak: 3.99 W/kg

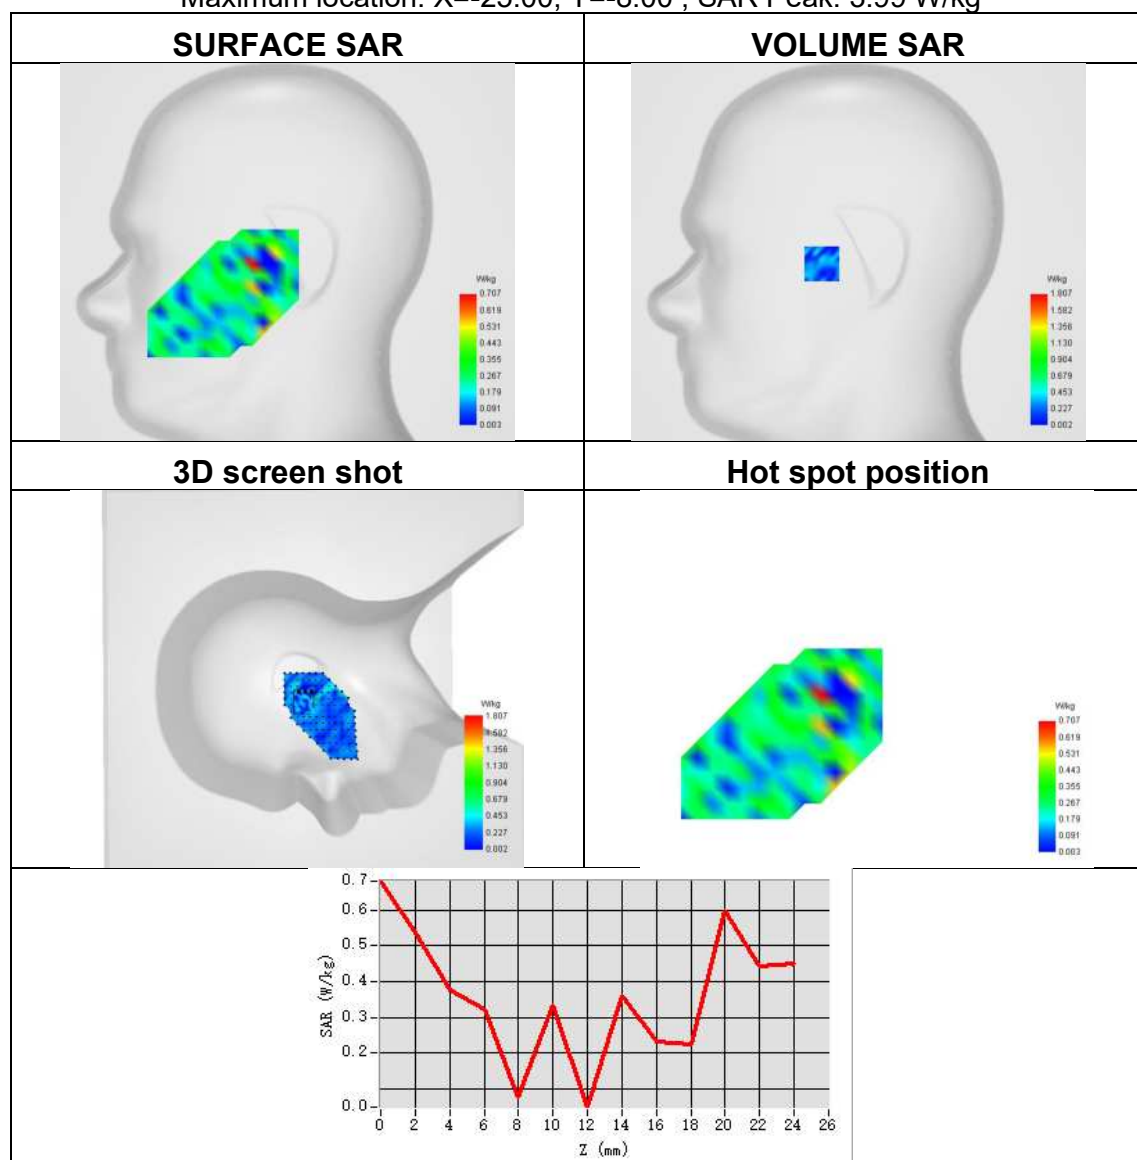




Plot 40:

Test Date	2025-05-30
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2c MIMO 1
Signal	IEEE 802.11ax
Frequency	5700
SAR 10g (W/Kg)	0.095
SAR 1g (W/Kg)	0.173
ConvF	1.87
Relative permittivity	36.35
Conductivity (S/m)	5.02

Maximum location: X=0.00, Y=-40.00 ; SAR Peak: 2.12 W/kg

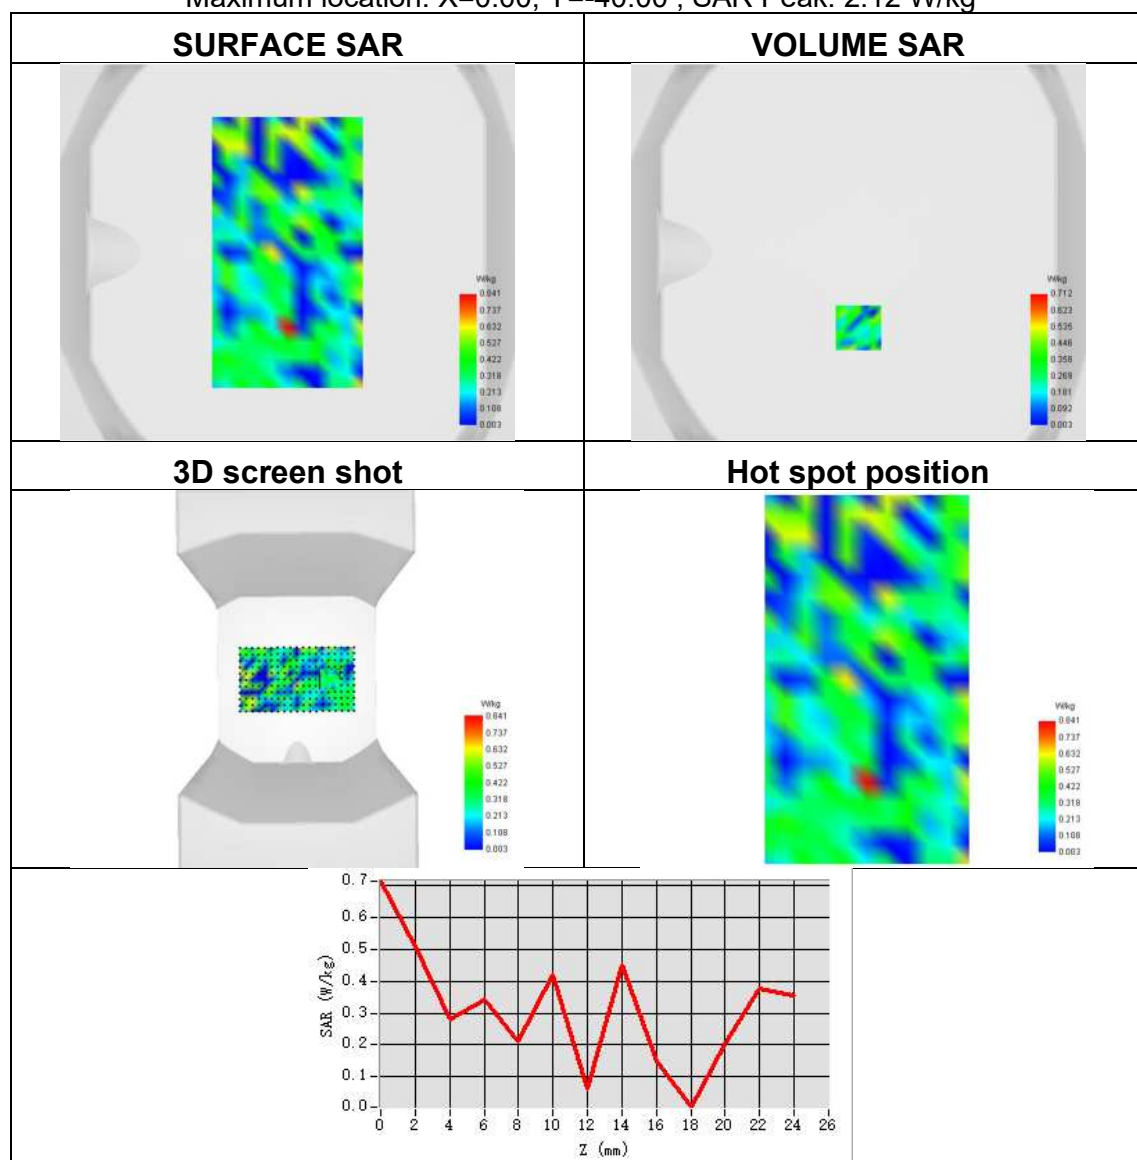




Plot 41:

Test Date	2025-05-30
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-2c MIMO 2
Signal	IEEE 802.11ax
Frequency	5700
SAR 10g (W/Kg)	0.180
SAR 1g (W/Kg)	0.166
ConvF	1.87
Relative permittivity	36.35
Conductivity (S/m)	5.02

Maximum location: X=-24.00, Y=1.00 ; SAR Peak: 3.07 W/kg

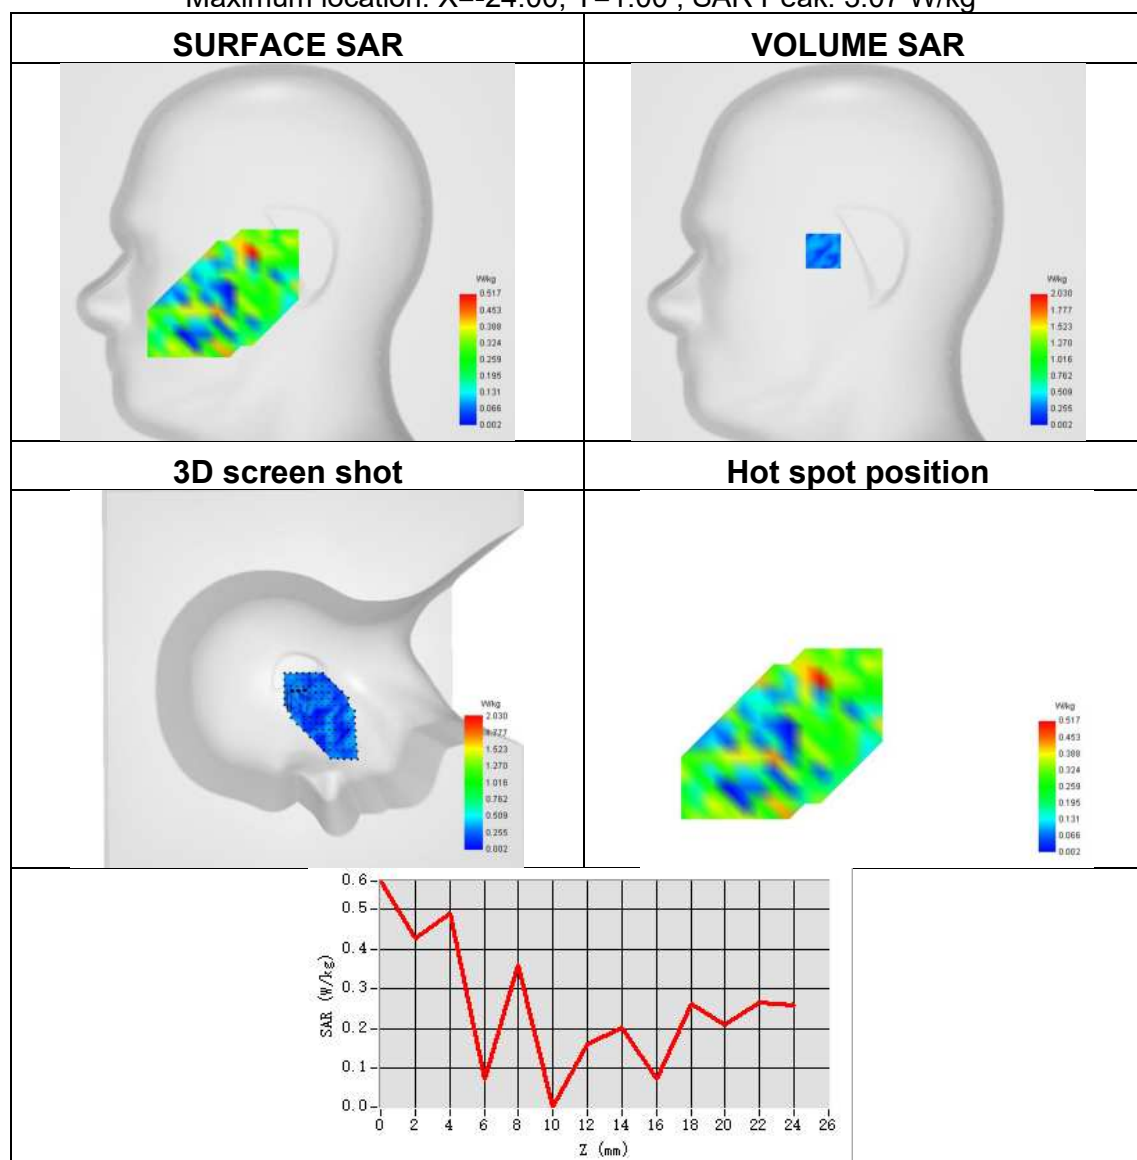




Plot 42:

Test Date	2025-05-30
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2c MIMO 2
Signal	IEEE 802.11ax
Frequency	5700
SAR 10g (W/Kg)	0.192
SAR 1g (W/Kg)	0.367
ConvF	1.87
Relative permittivity	36.35
Conductivity (S/m)	5.02

Maximum location: X=9.00, Y=-25.00 ; SAR Peak: 3.71 W/kg

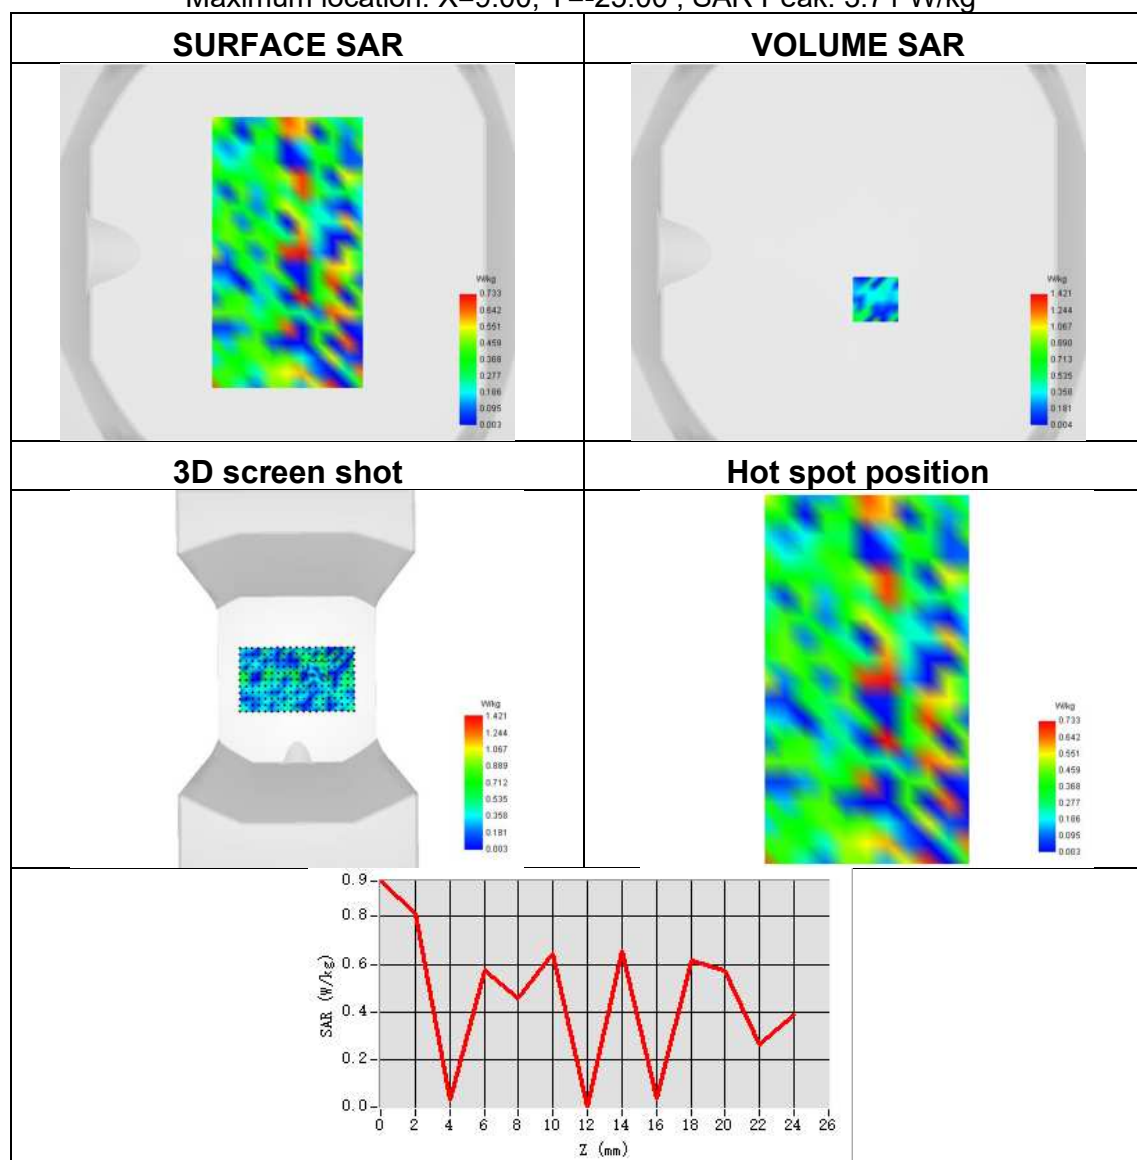




Plot 43:

Test Date	2025-05-31
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-3 ANT 1
Signal	IEEE 802.11a
Frequency	5785
SAR 10g (W/Kg)	0.128
SAR 1g (W/Kg)	0.226
ConvF	1.70
Relative permittivity	35.45
Conductivity (S/m)	5.26

Maximum location: X=-9.00, Y=2.00 ; SAR Peak: 2.85 W/kg

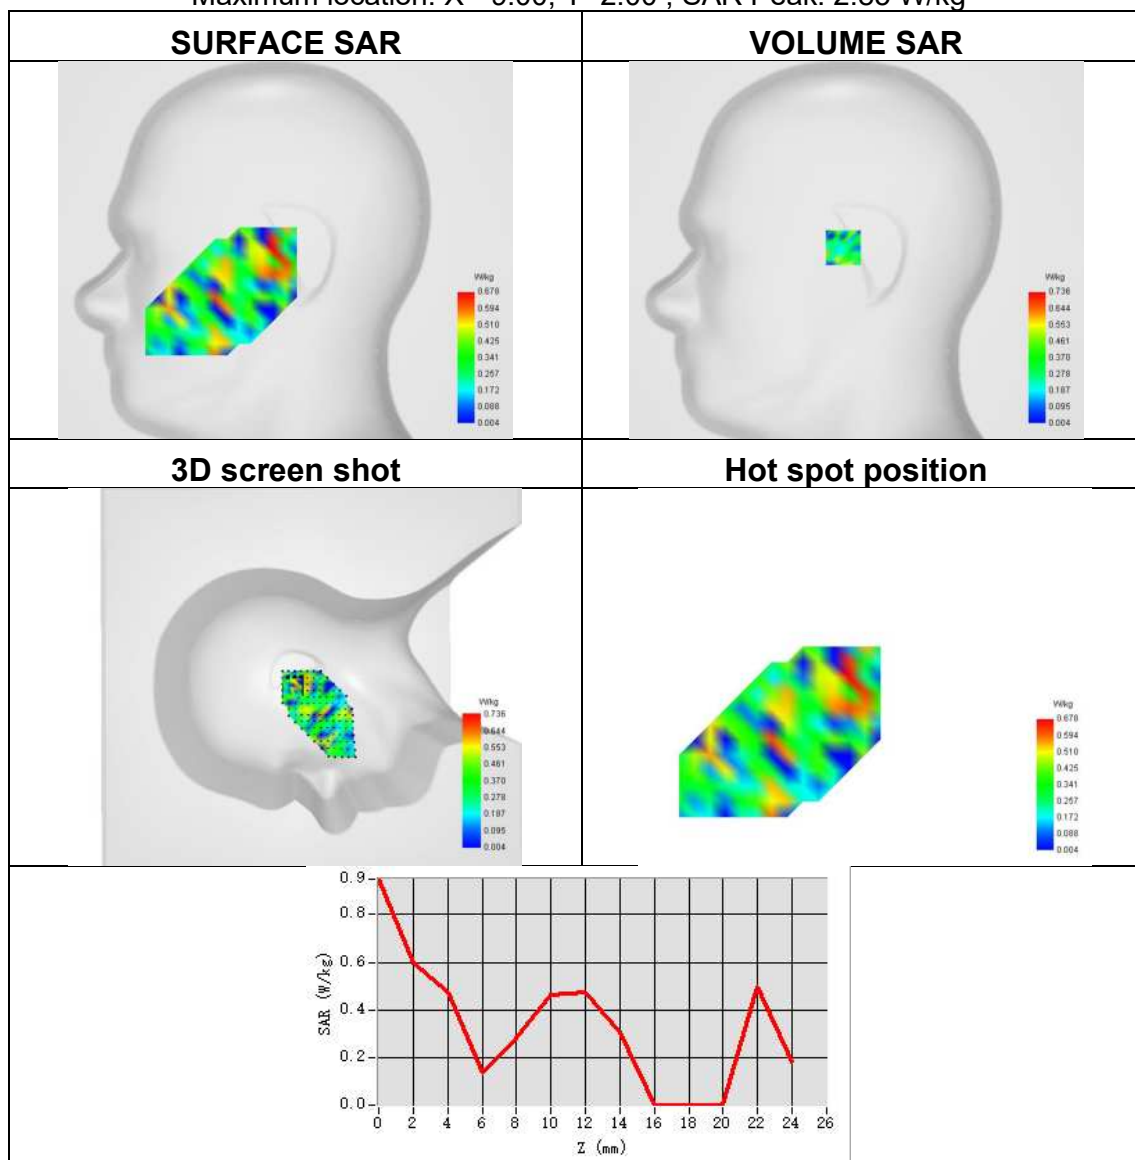




Plot 44:

Test Date	2025-05-31
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-3 ANT 1
Signal	IEEE 802.11a
Frequency	5785
SAR 10g (W/Kg)	0.138
SAR 1g (W/Kg)	0.290
ConvF	1.70
Relative permittivity	35.45
Conductivity (S/m)	5.26

Maximum location: X=-24.00, Y=-32.00 ; SAR Peak: 4.26 W/kg

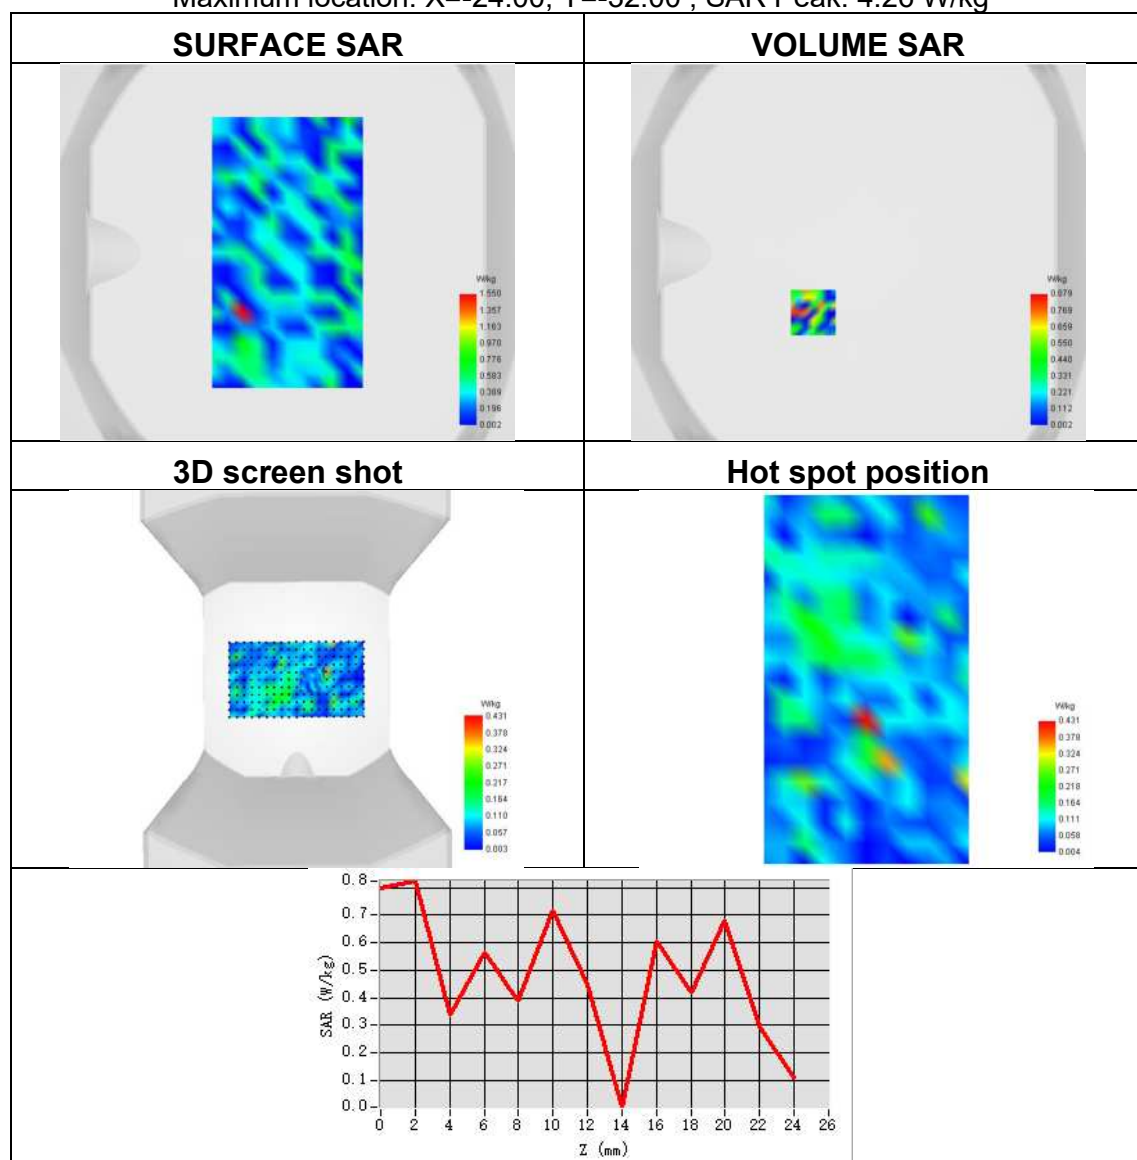




Plot 45:

Test Date	2025-05-31
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-3 ANT 2
Signal	IEEE 802.11a
Frequency	5785
SAR 10g (W/Kg)	0.137
SAR 1g (W/Kg)	0.258
ConvF	1.70
Relative permittivity	35.45
Conductivity (S/m)	5.26

Maximum location: X=-17.00, Y=-32.00 ; SAR Peak: 4.29 W/kg

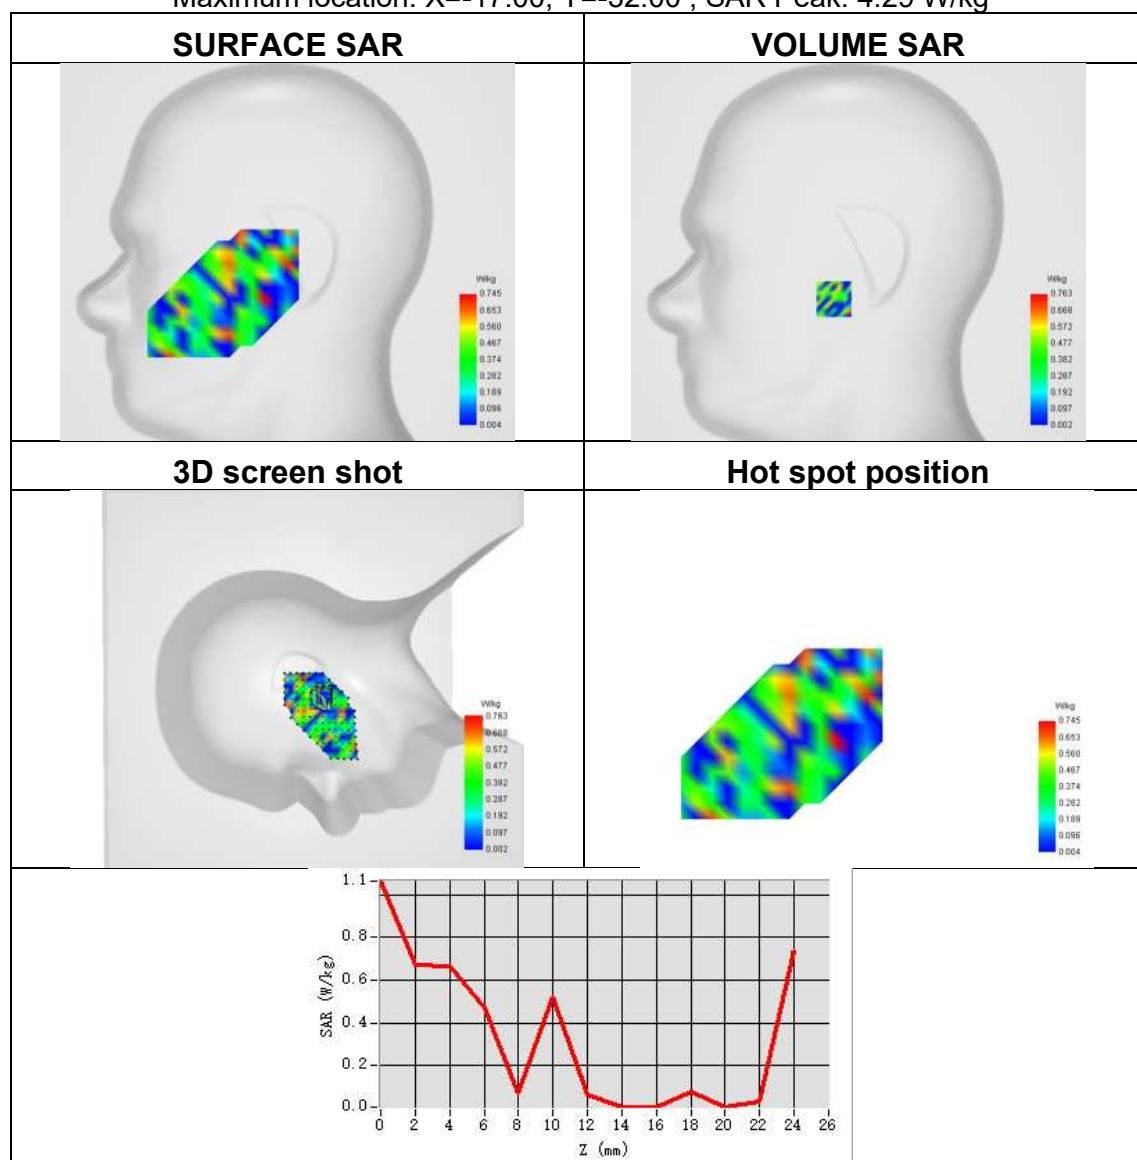




Plot 46:

Test Date	2025-05-31
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-3 ANT 2
Signal	IEEE 802.11a
Frequency	5785
SAR 10g (W/Kg)	0.192
SAR 1g (W/Kg)	0.380
ConvF	1.70
Relative permittivity	35.45
Conductivity (S/m)	5.26

Maximum location: X=24.00, Y=32.00 ; SAR Peak: 4.11 W/kg

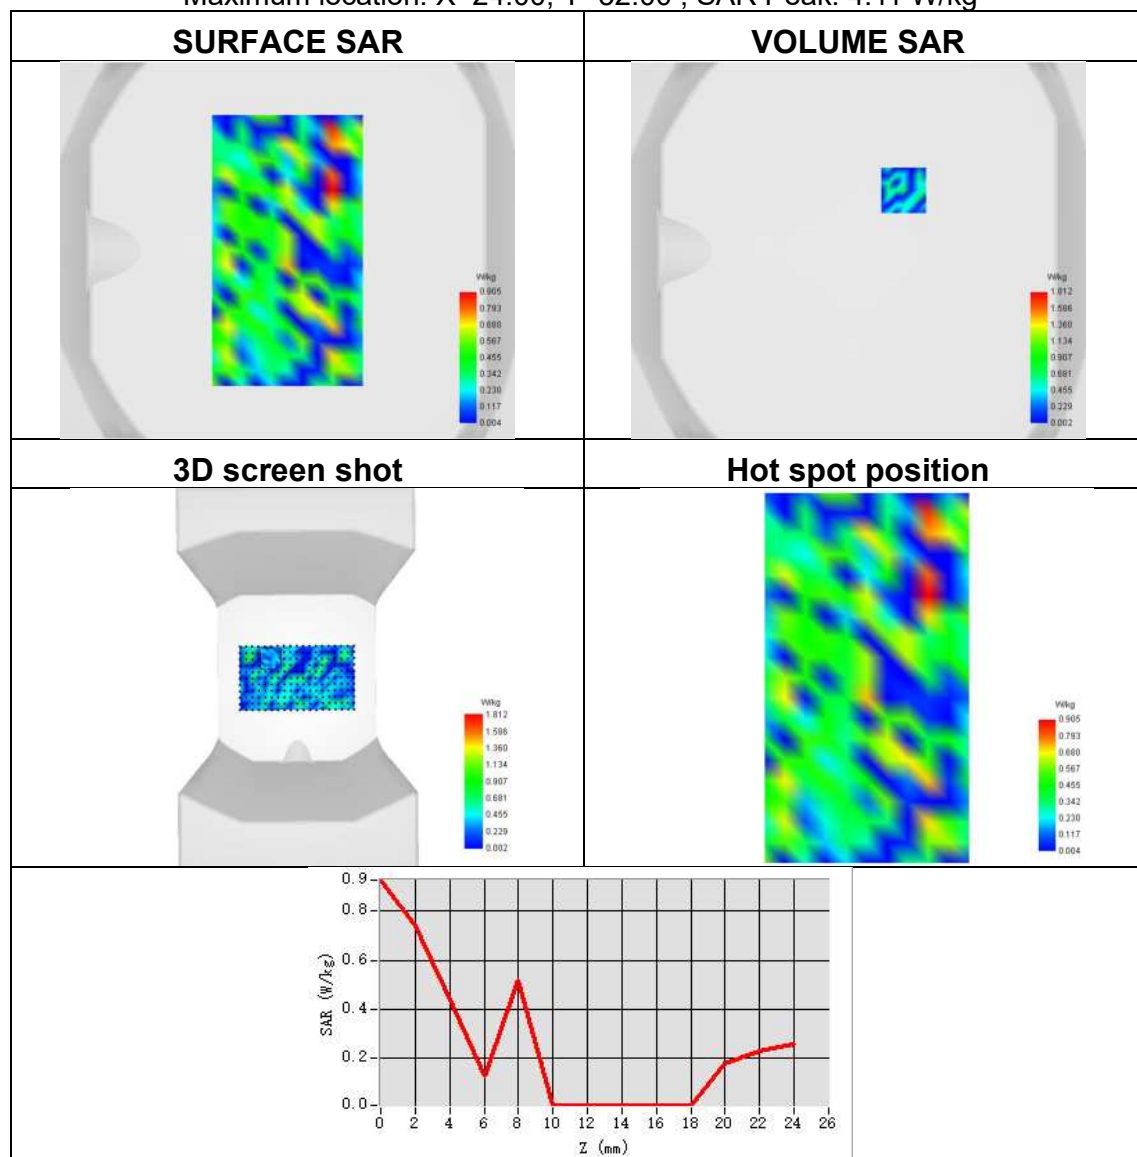




Plot 47:

Test Date	2025-05-31
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-3 MIMO 1
Signal	IEEE 802.11ax
Frequency	5825
SAR 10g (W/Kg)	0.119
SAR 1g (W/Kg)	0.289
ConvF	1.70
Relative permittivity	35.45
Conductivity (S/m)	5.26

Maximum location: X=-24.00, Y=-48.00 ; SAR Peak: 2.82 W/kg

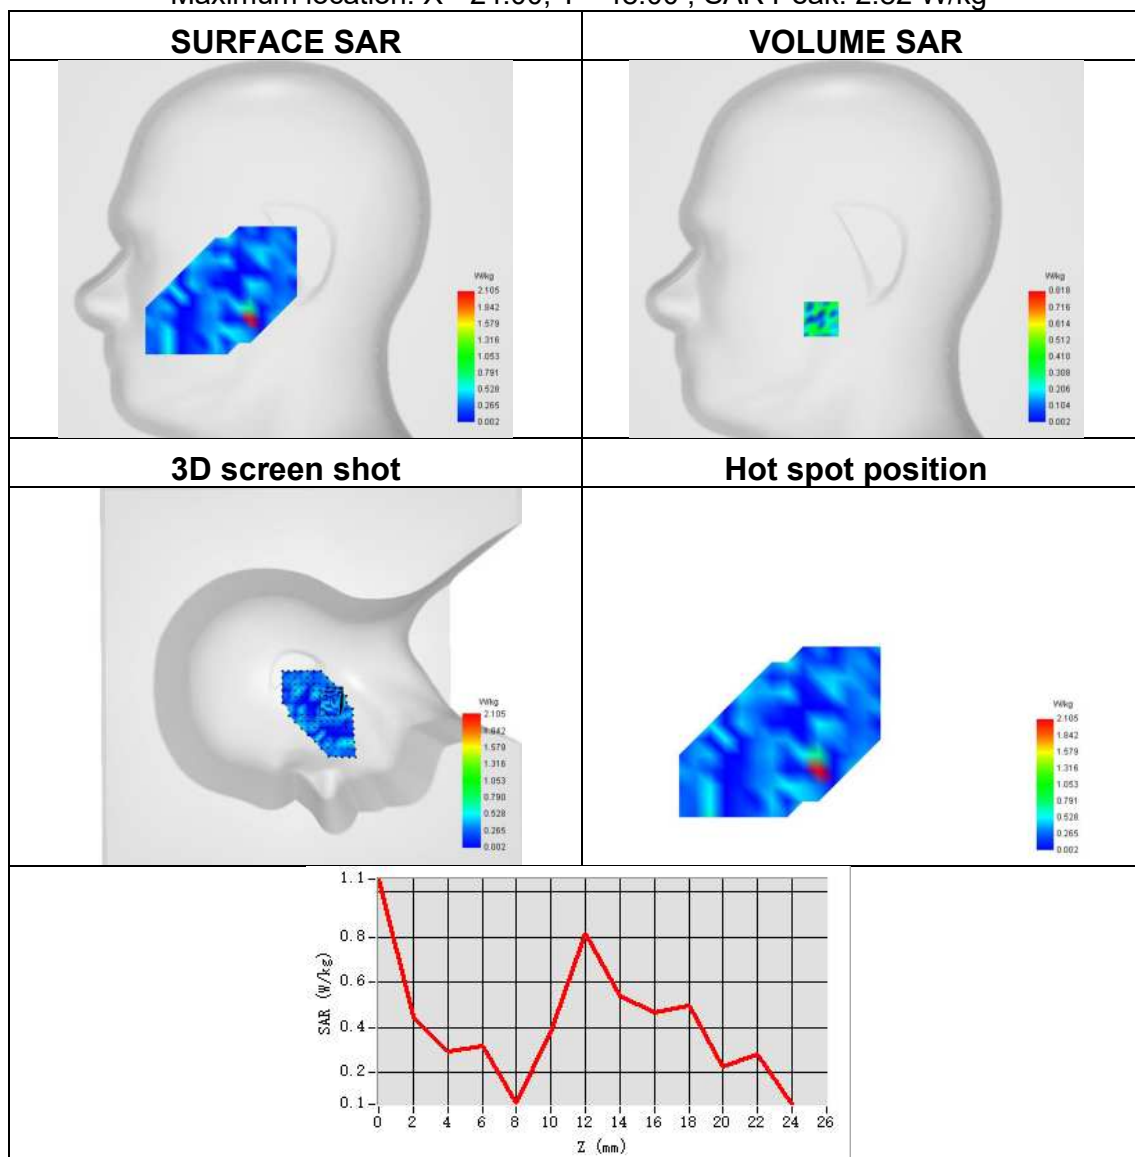




Plot 48:

Test Date	2025-05-31
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-3 MIMO 1
Signal	IEEE 802.11ax
Frequency	5825
SAR 10g (W/Kg)	0.140
SAR 1g (W/Kg)	0.231
ConvF	1.70
Relative permittivity	35.45
Conductivity (S/m)	5.26

Maximum location: X=-16.00, Y=-8.00 ; SAR Peak: 2.72 W/kg

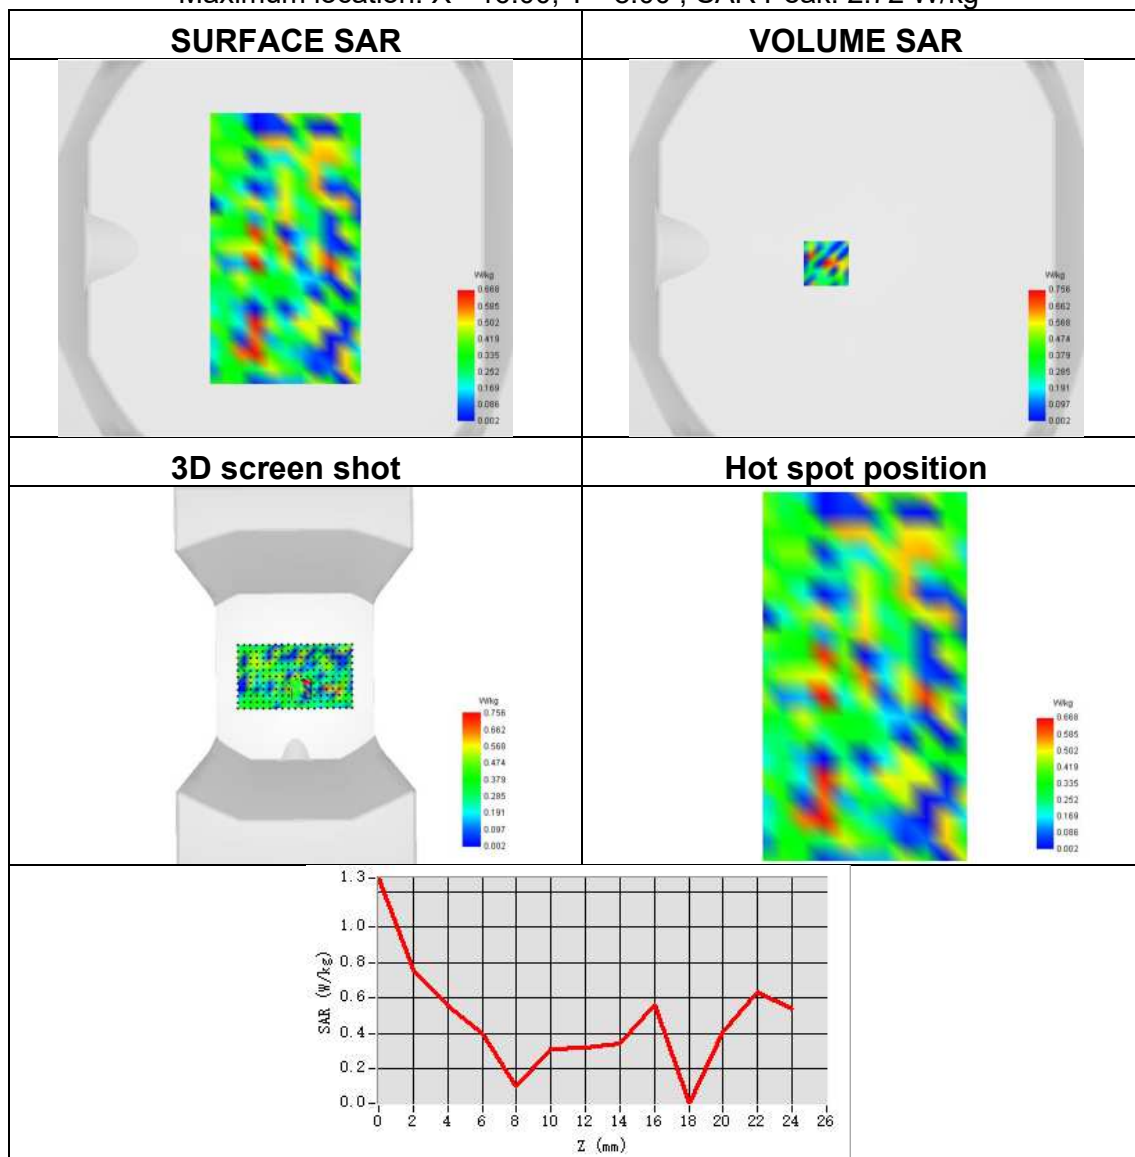




Plot 49:

Test Date	2025-05-31
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-3 MIMO 2
Signal	IEEE 802.11ax
Frequency	5825
SAR 10g (W/Kg)	0.093
SAR 1g (W/Kg)	0.152
ConvF	1.70
Relative permittivity	35.45
Conductivity (S/m)	5.26

Maximum location: X=-63.00, Y=-32.00 ; SAR Peak: 4.23 W/kg

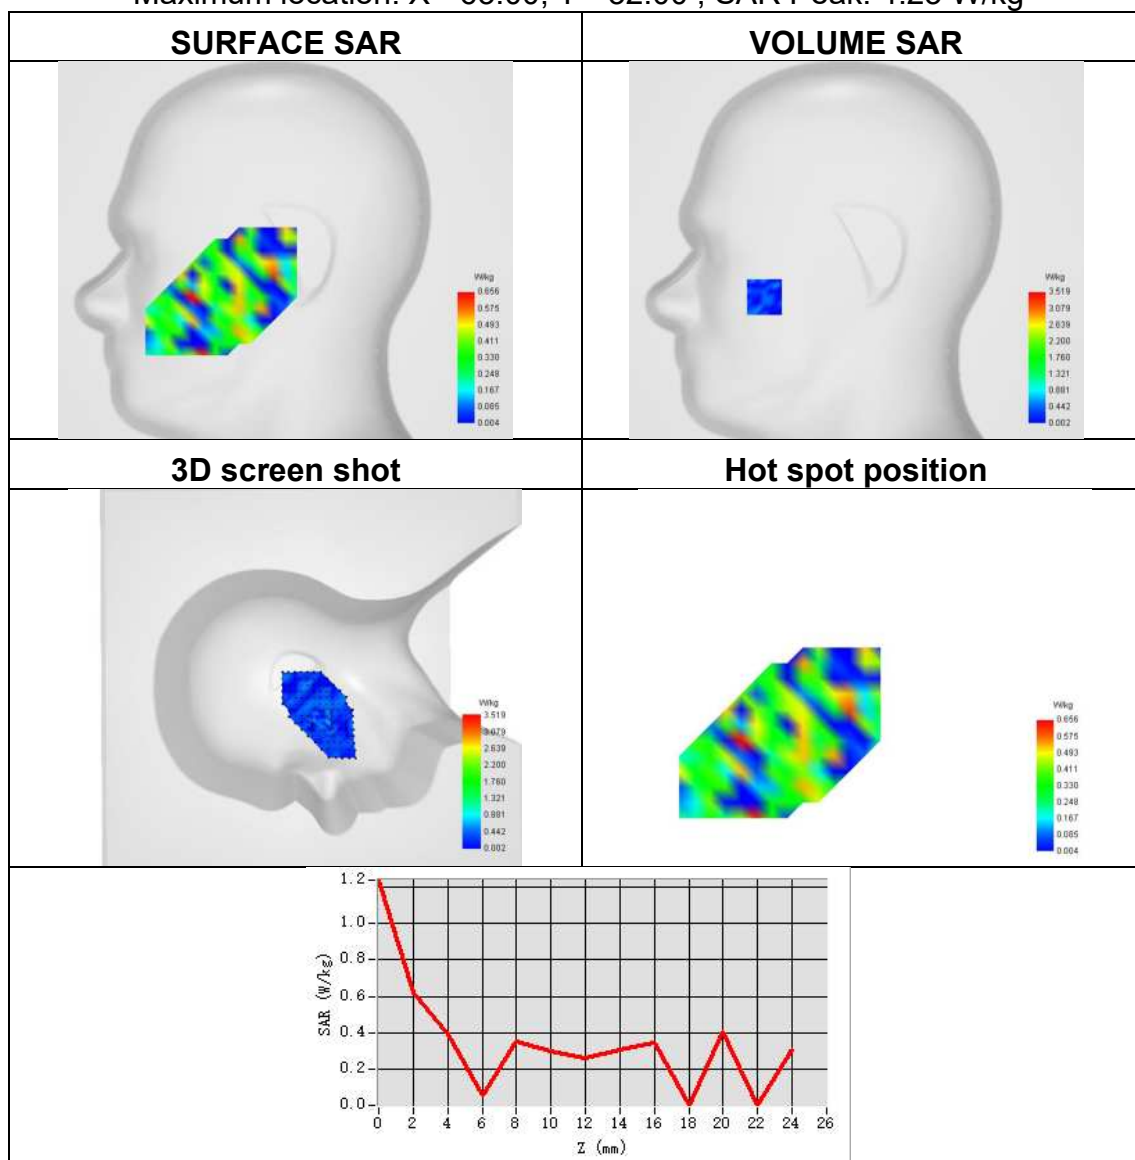




Plot 50:

Test Date	2025-05-31
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-3 MIMO 2
Signal	IEEE 802.11ax
Frequency	5825
SAR 10g (W/Kg)	0.098
SAR 1g (W/Kg)	0.164
ConvF	1.70
Relative permittivity	35.45
Conductivity (S/m)	5.26

Maximum location: X=6.00, Y=-26.00 ; SAR Peak: 1.45 W/kg

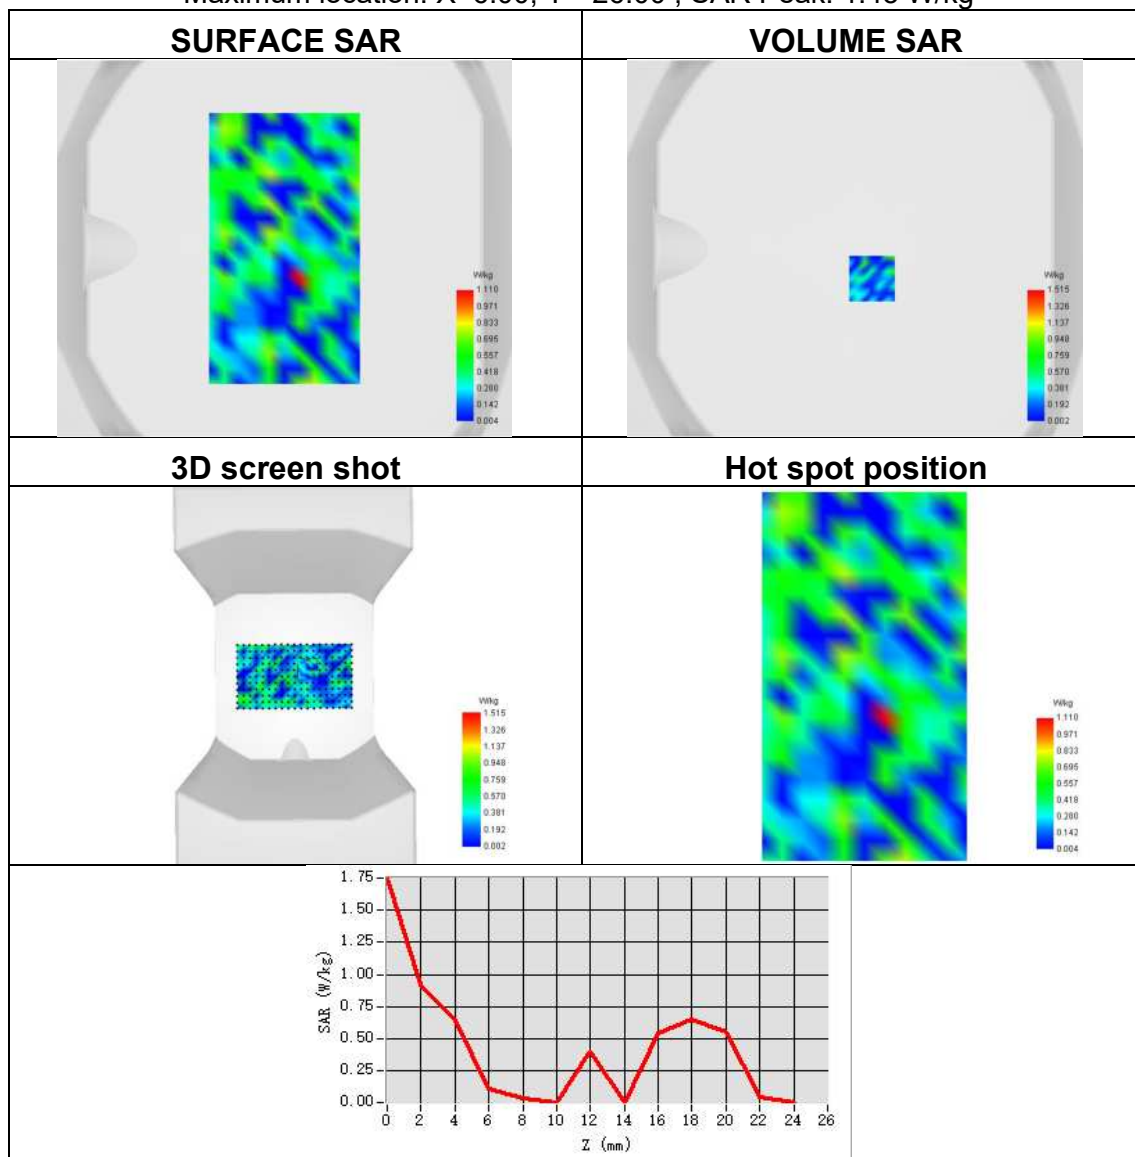




Plot 51:

Test Date	2025-05-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 2
Signal	LTE FDD
Frequency	1900
SAR 10g (W/Kg)	0.301
SAR 1g (W/Kg)	0.592
ConvF	2.20
Relative permittivity	40.28
Conductivity (S/m)	1.39

Maximum location: X=-58.00, Y=-40.00 ; SAR Peak: 1.13 W/kg

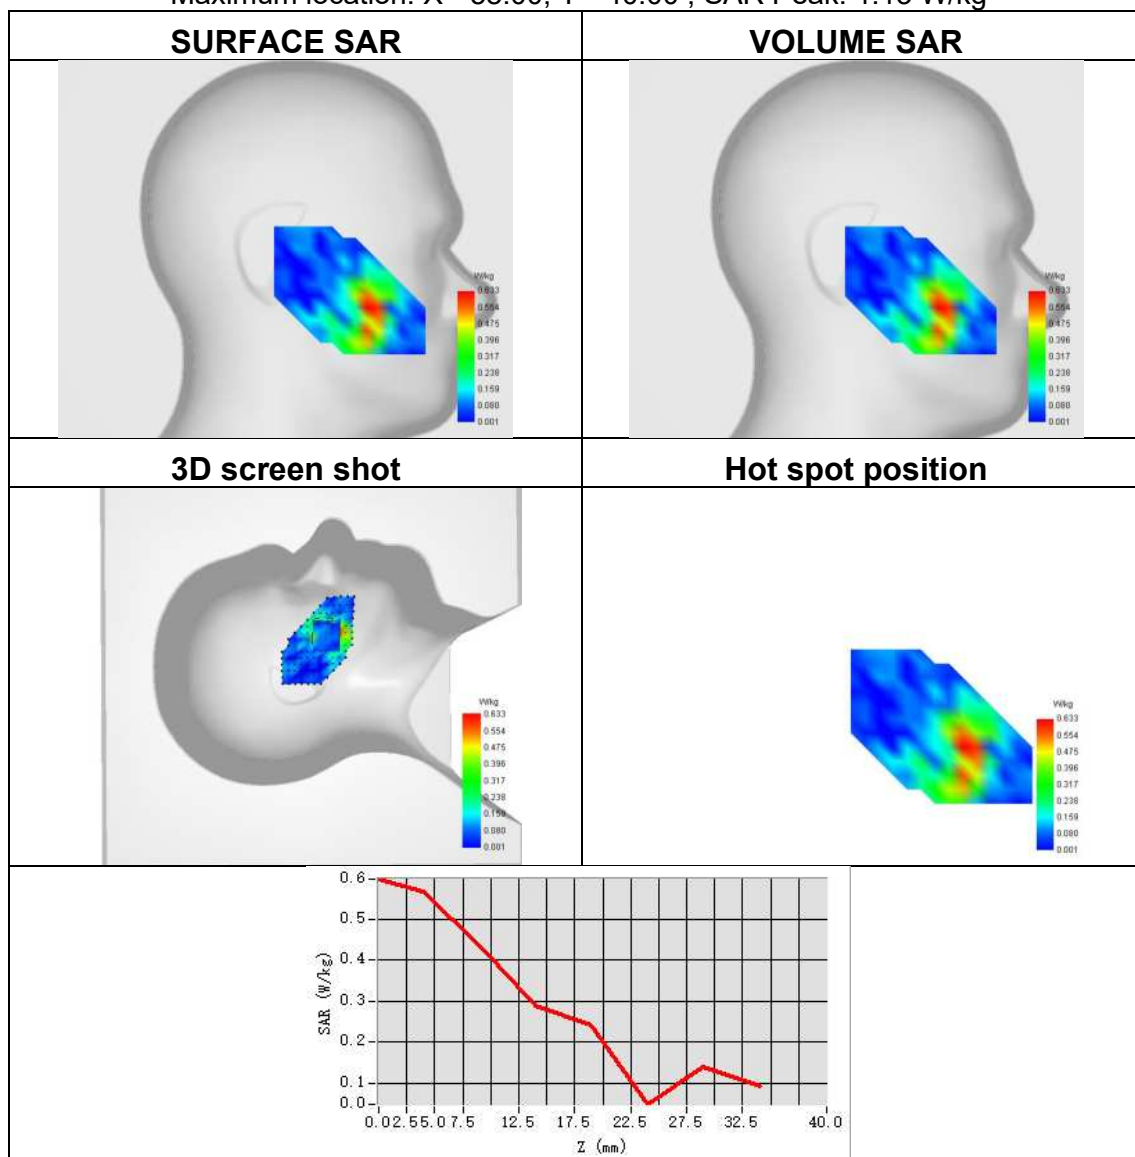




Plot 52:

Test Date	2025-05-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 2
Signal	LTE FDD
Frequency	1900
SAR 10g (W/Kg)	0.292
SAR 1g (W/Kg)	0.489
ConvF	2.20
Relative permittivity	40.28
Conductivity (S/m)	1.39

Maximum location: X=2.00, Y=12.00 ; SAR Peak: 0.80 W/kg

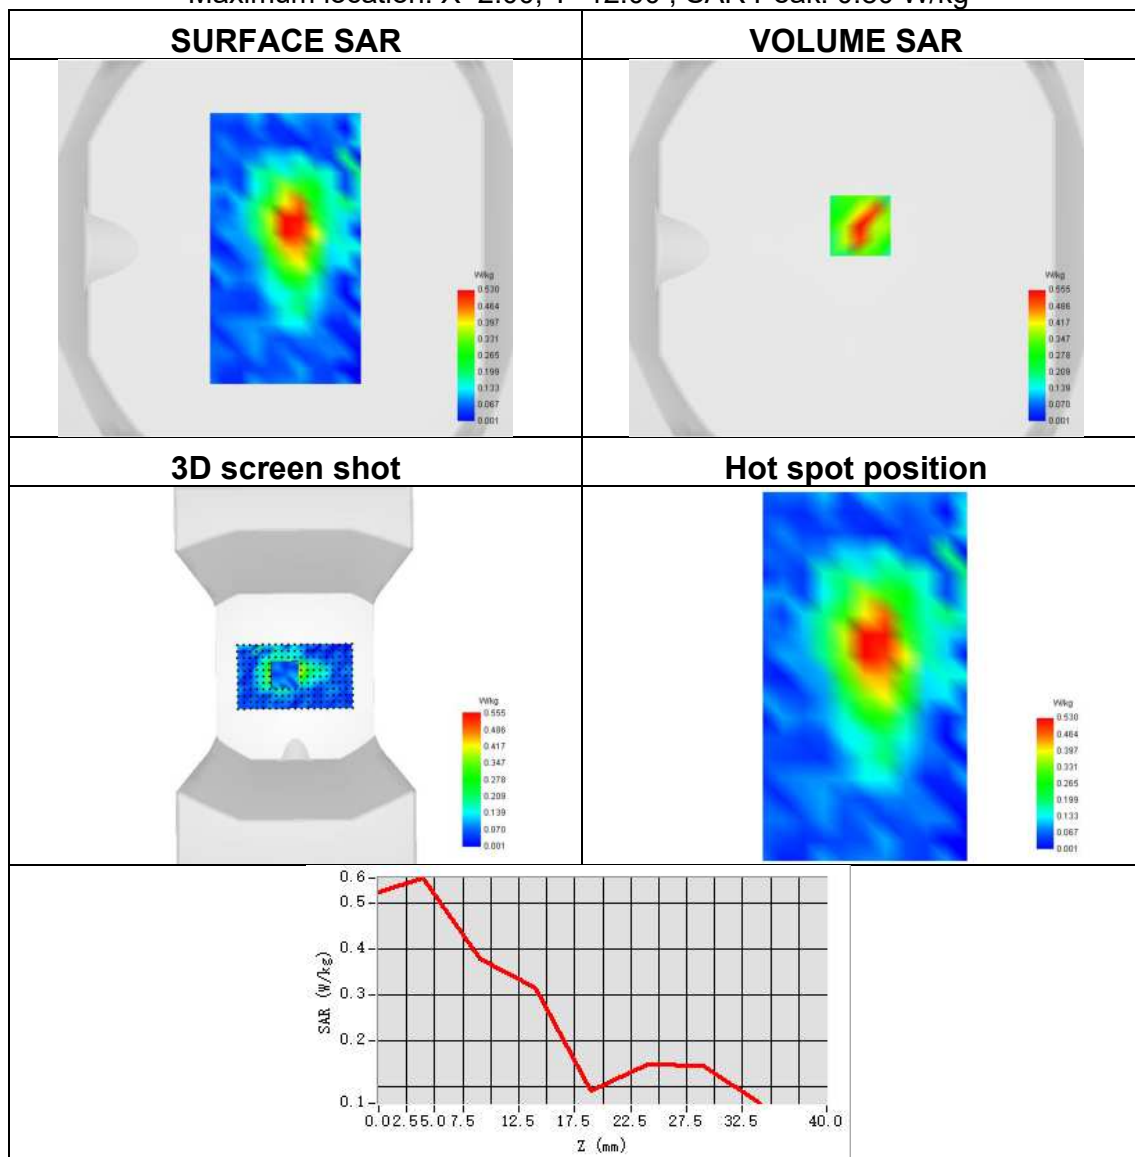




Plot 53:

Test Date	2025-05-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 4
Signal	LTE FDD
Frequency	1745
SAR 10g (W/Kg)	0.111
SAR 1g (W/Kg)	0.262
ConvF	1.92
Relative permittivity	40.65
Conductivity (S/m)	1.35

Maximum location: X=-74.00, Y=-48.00 ; SAR Peak: 0.53 W/kg

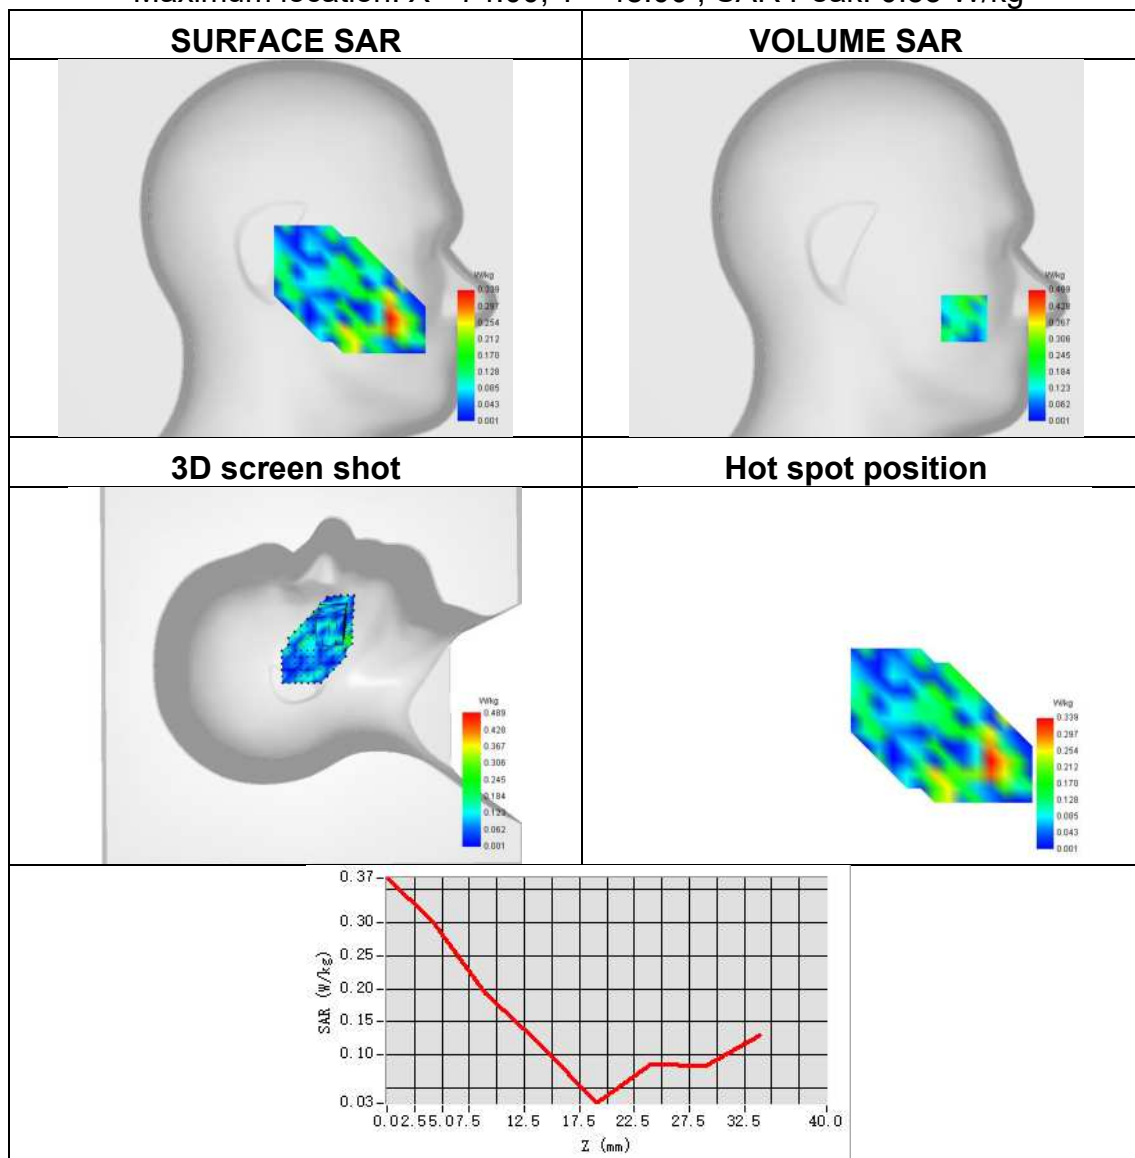




Plot 54:

Test Date	2025-05-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 4
Signal	LTE FDD
Frequency	1745
SAR 10g (W/Kg)	0.425
SAR 1g (W/Kg)	0.654
ConvF	1.92
Relative permittivity	40.65
Conductivity (S/m)	1.35

Maximum location: X=7.00, Y=1.00 ; SAR Peak: 0.90 W/kg

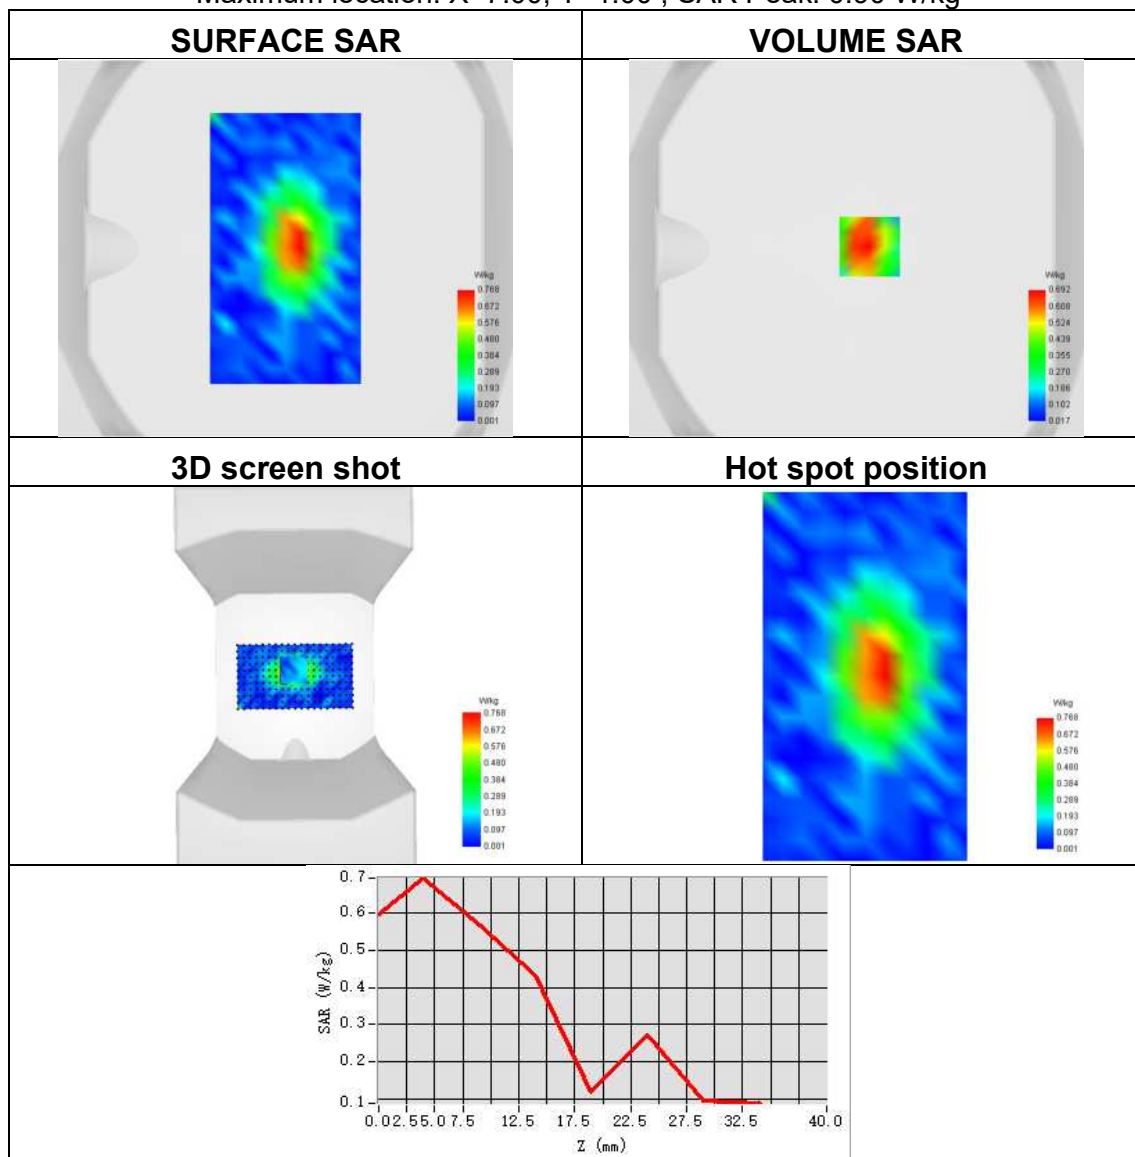




Plot 55:

Test Date	2025-05-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 5
Signal	LTE FDD
Frequency	836.5
SAR 10g (W/Kg)	0.122
SAR 1g (W/Kg)	0.211
ConvF	1.72
Relative permittivity	41.25
Conductivity (S/m)	0.92

Maximum location: X=-64.00, Y=-40.00 ; SAR Peak: 0.59 W/kg

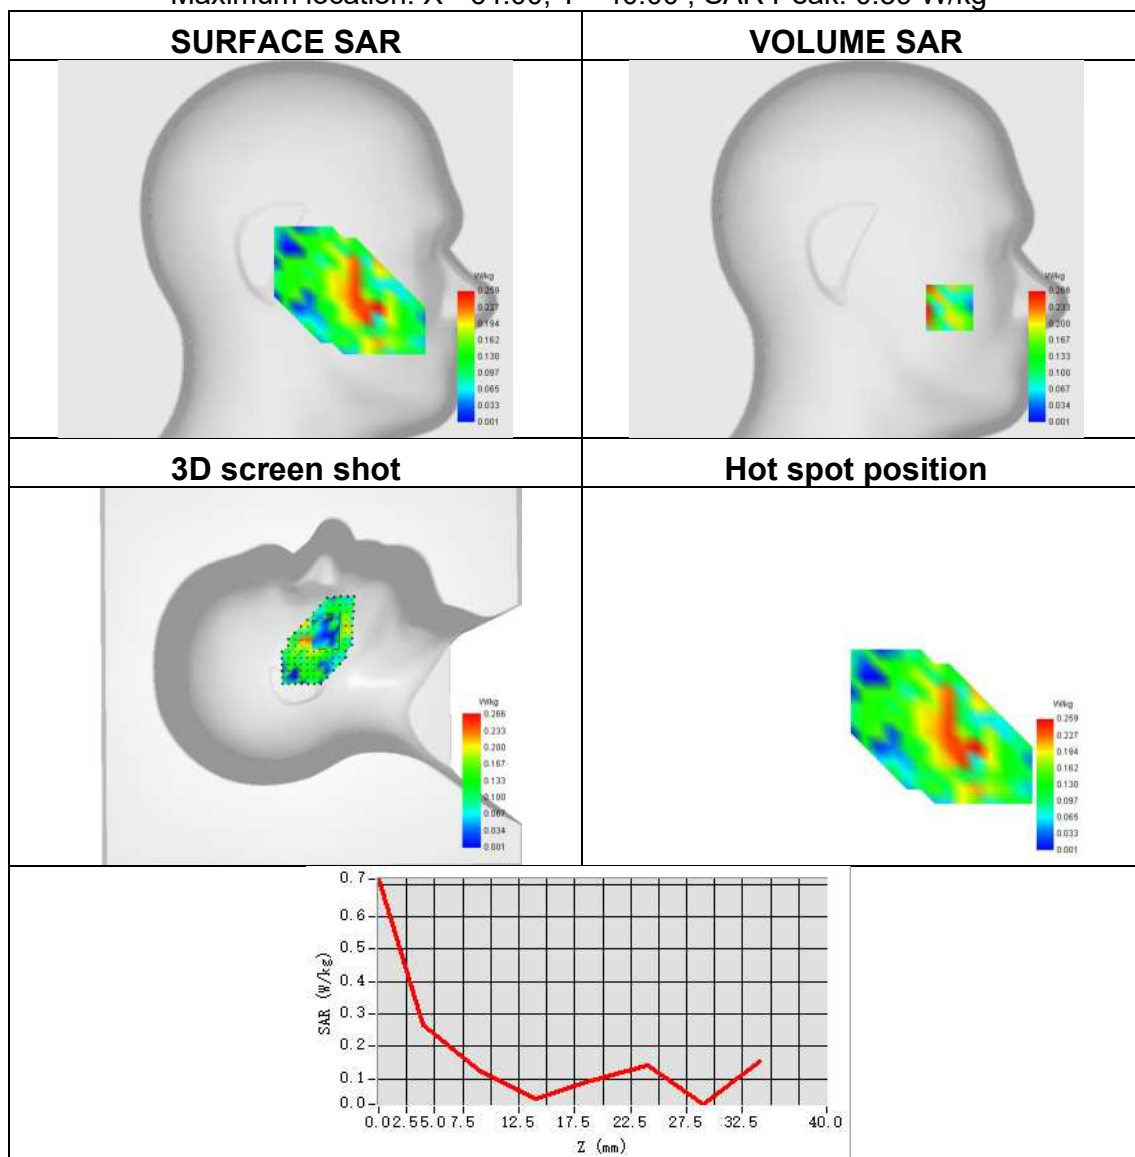




Plot 56:

Test Date	2025-05-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 5
Signal	LTE FDD
Frequency	836.5
SAR 10g (W/Kg)	0.256
SAR 1g (W/Kg)	0.426
ConvF	1.72
Relative permittivity	41.25
Conductivity (S/m)	0.92

Maximum location: X=2.00, Y=7.00 ; SAR Peak: 0.84 W/kg

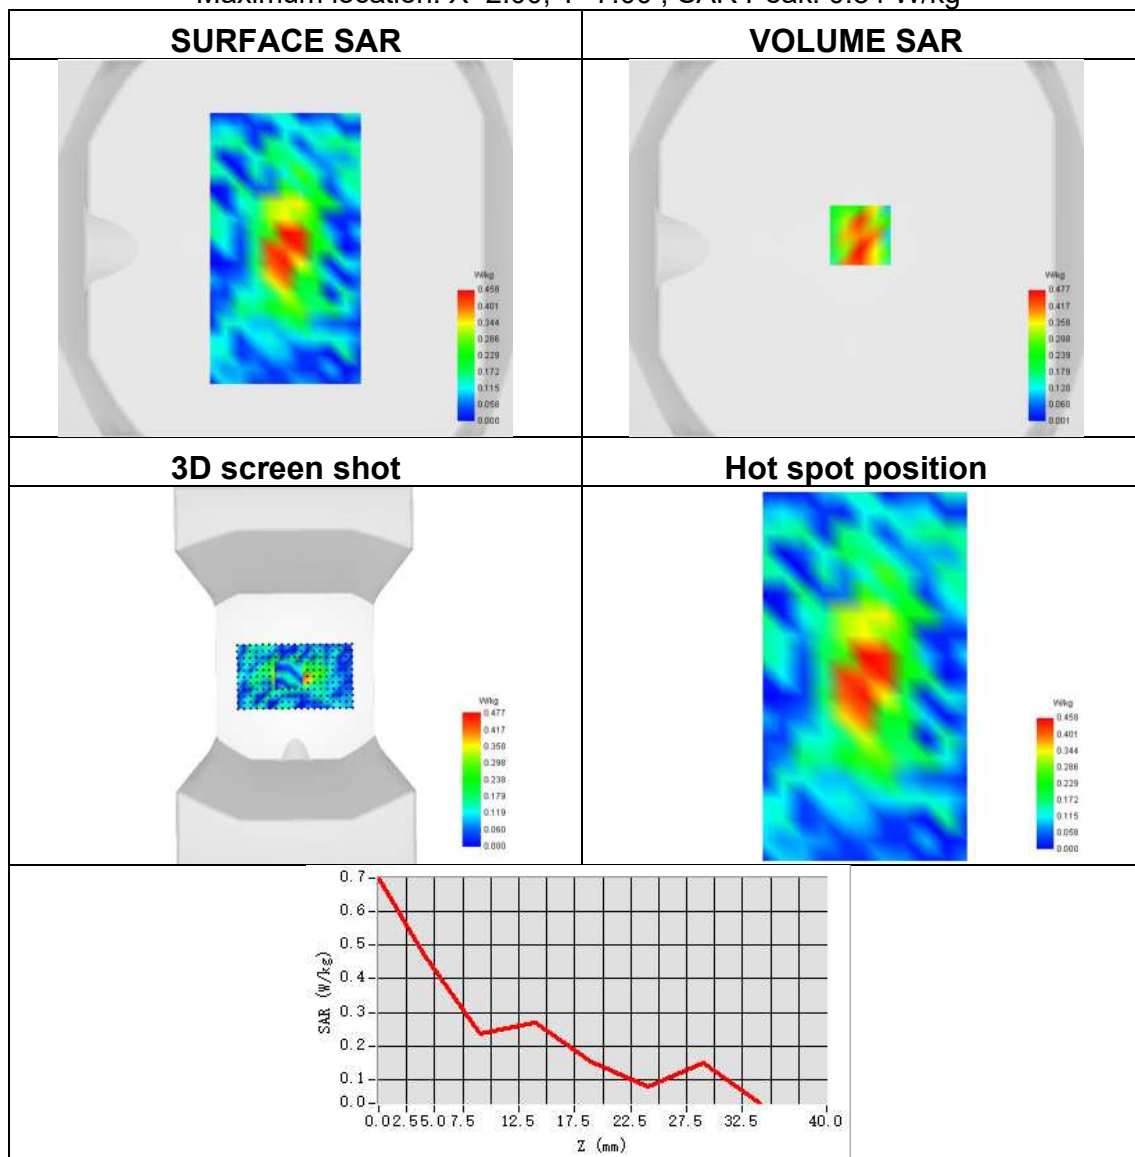




Plot 57:

Test Date	2025-05-12
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 7
Signal	LTE FDD
Frequency	2510
SAR 10g (W/Kg)	0.076
SAR 1g (W/Kg)	0.132
ConvF	2.37
Relative permittivity	39.74
Conductivity (S/m)	2.02

Maximum location: X=-49.00, Y=-35.00 ; SAR Peak: 0.64 W/kg

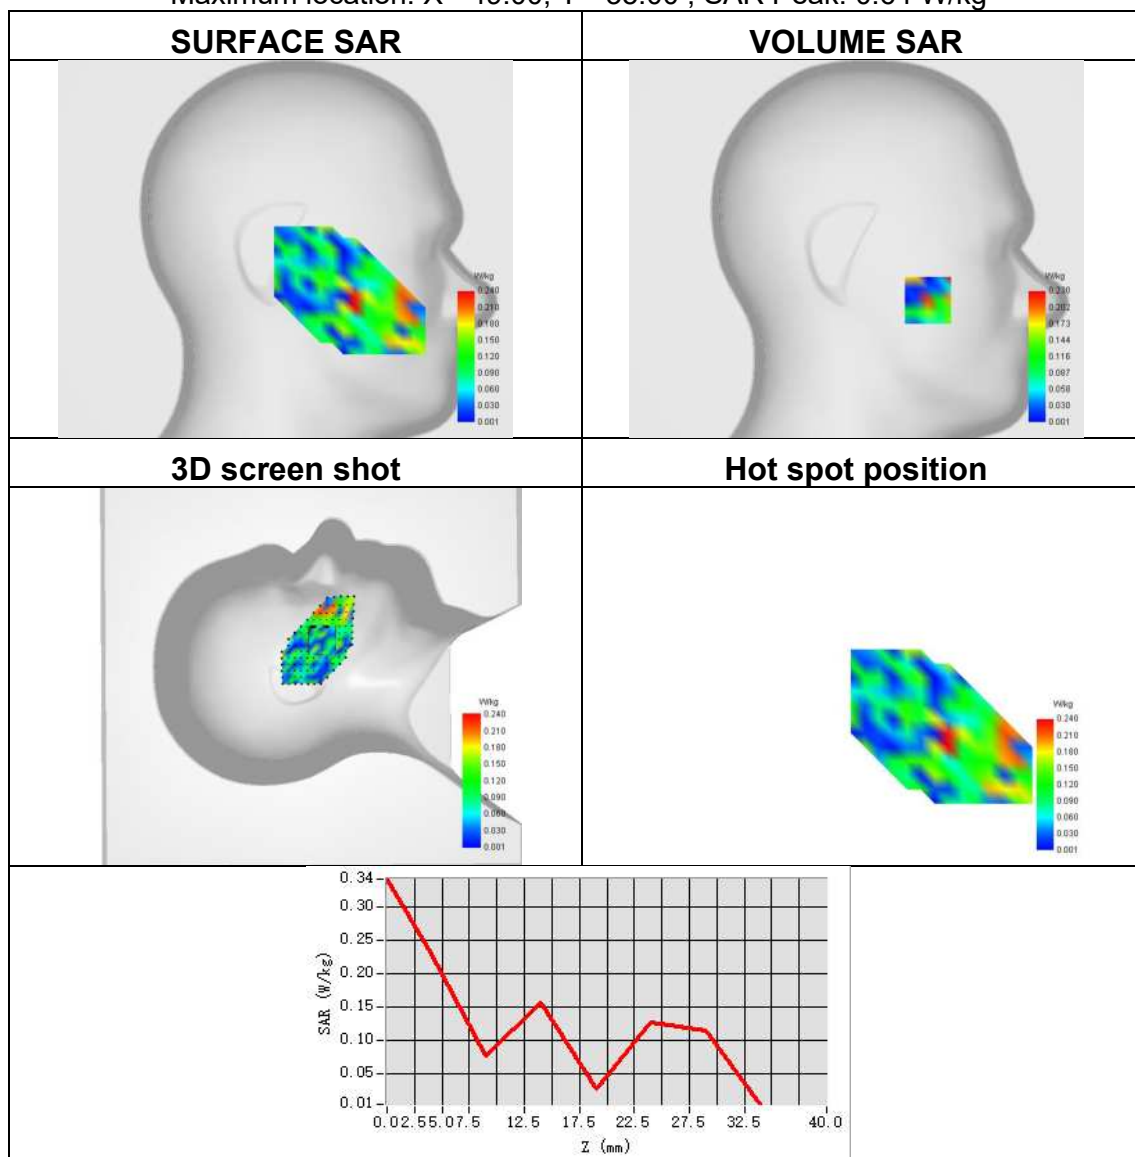




Plot 58:

Test Date	2025-05-12
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 7
Signal	LTE FDD
Frequency	2510
SAR 10g (W/Kg)	0.418
SAR 1g (W/Kg)	0.936
ConvF	2.37
Relative permittivity	39.74
Conductivity (S/m)	2.02


Maximum location: X=0.00, Y=-30.00 ; SAR Peak: 1.93 W/kg

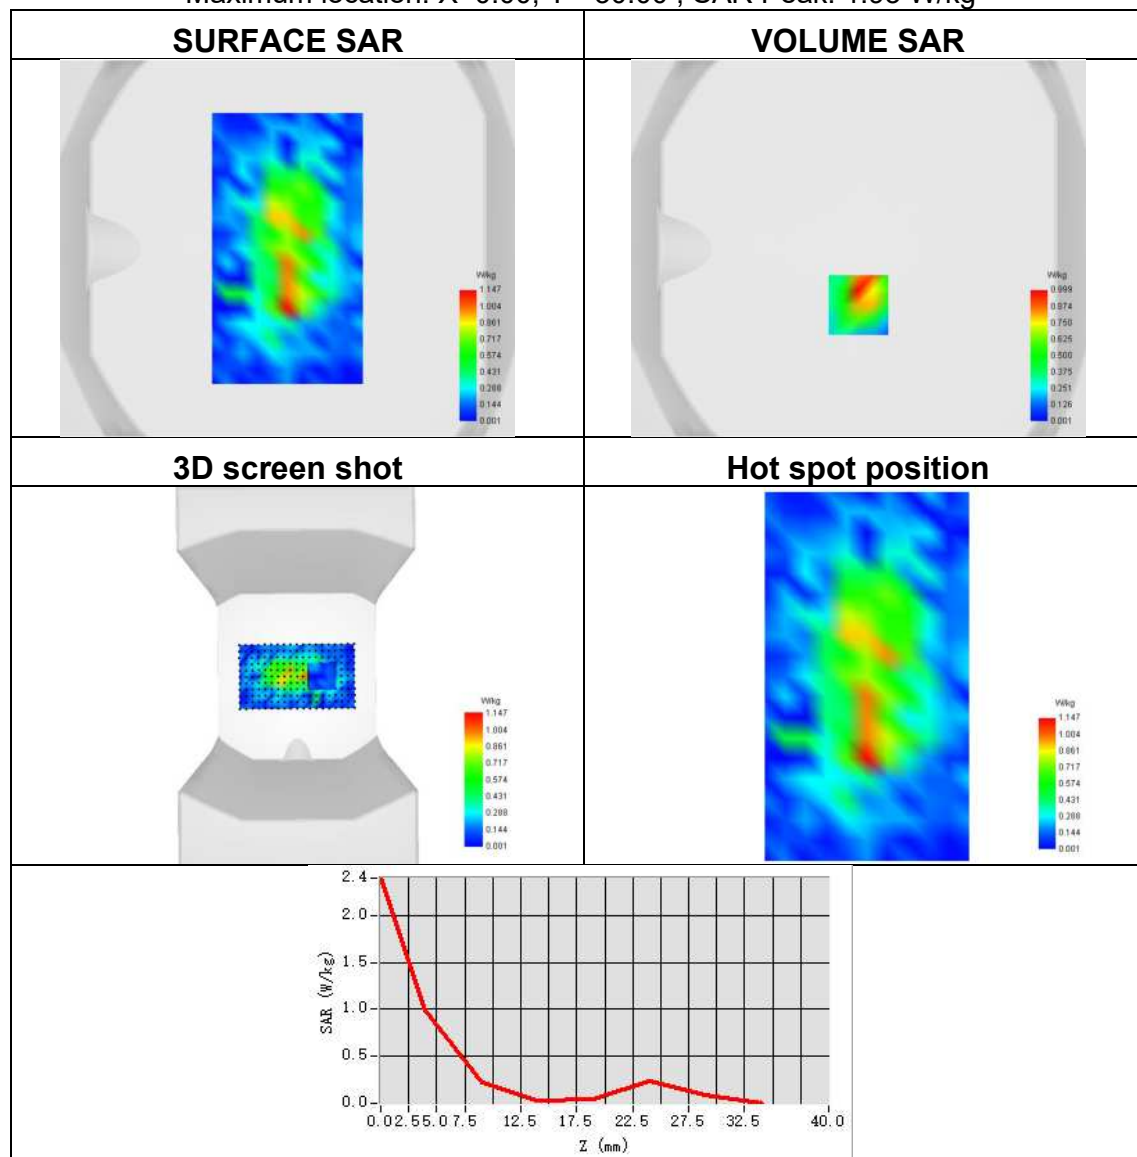

Plot 59:

Test Date	2025-05-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 12
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.151
SAR 1g (W/Kg)	0.276
ConvF	1.67
Relative permittivity	42.75
Conductivity (S/m)	0.91

Maximum location: X=-54.00, Y=-34.00 ; SAR Peak: 0.53 W/kg

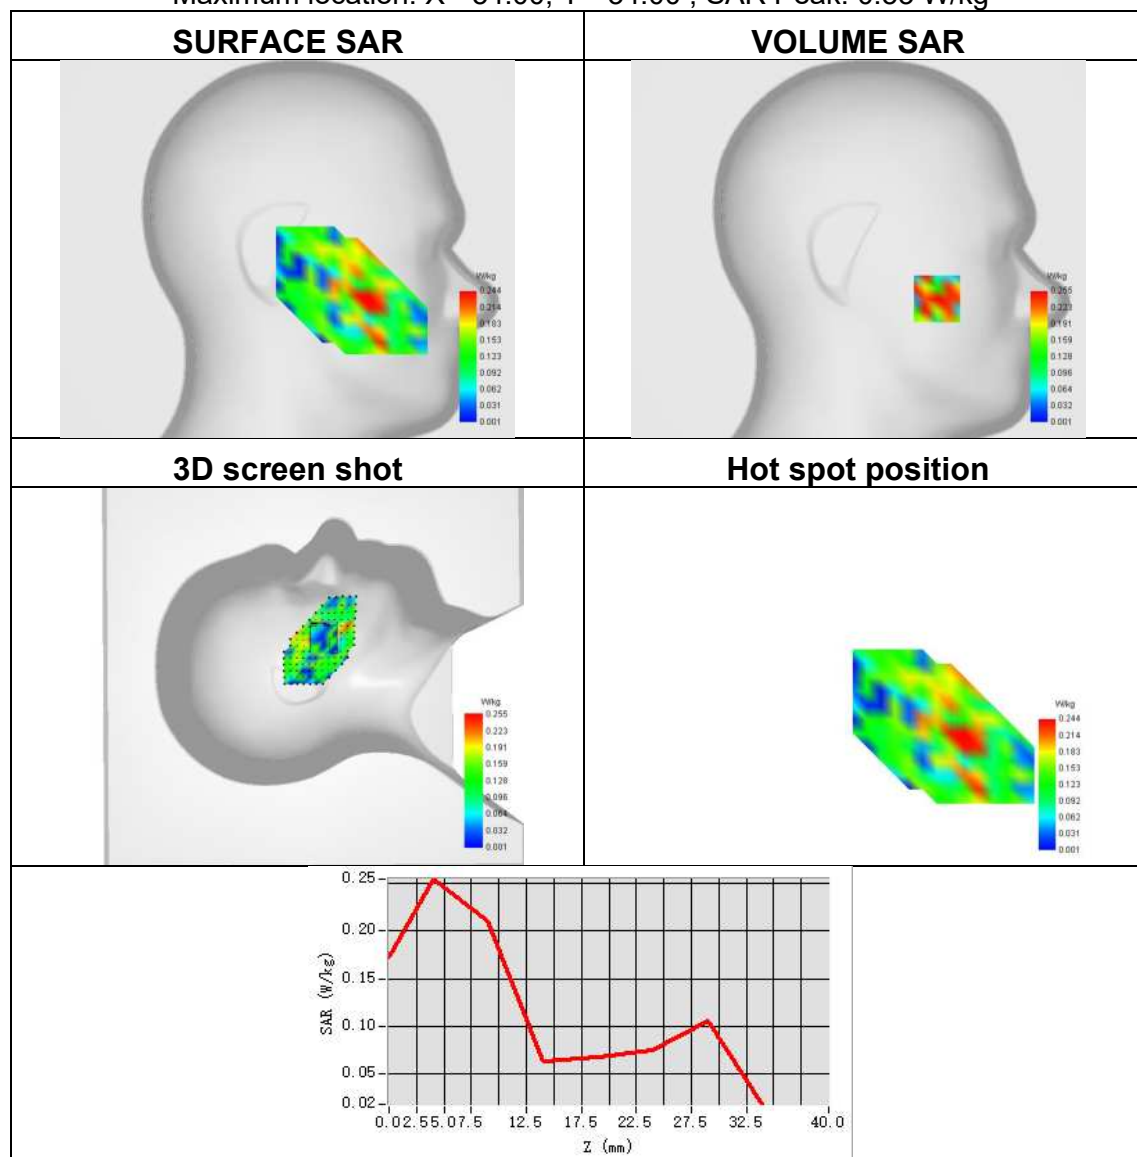




Plot 60:

Test Date	2025-05-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 12
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.131
SAR 1g (W/Kg)	0.281
ConvF	1.67
Relative permittivity	42.75
Conductivity (S/m)	0.91

Maximum location: X=-1.00, Y=8.00 ; SAR Peak: 0.68 W/kg

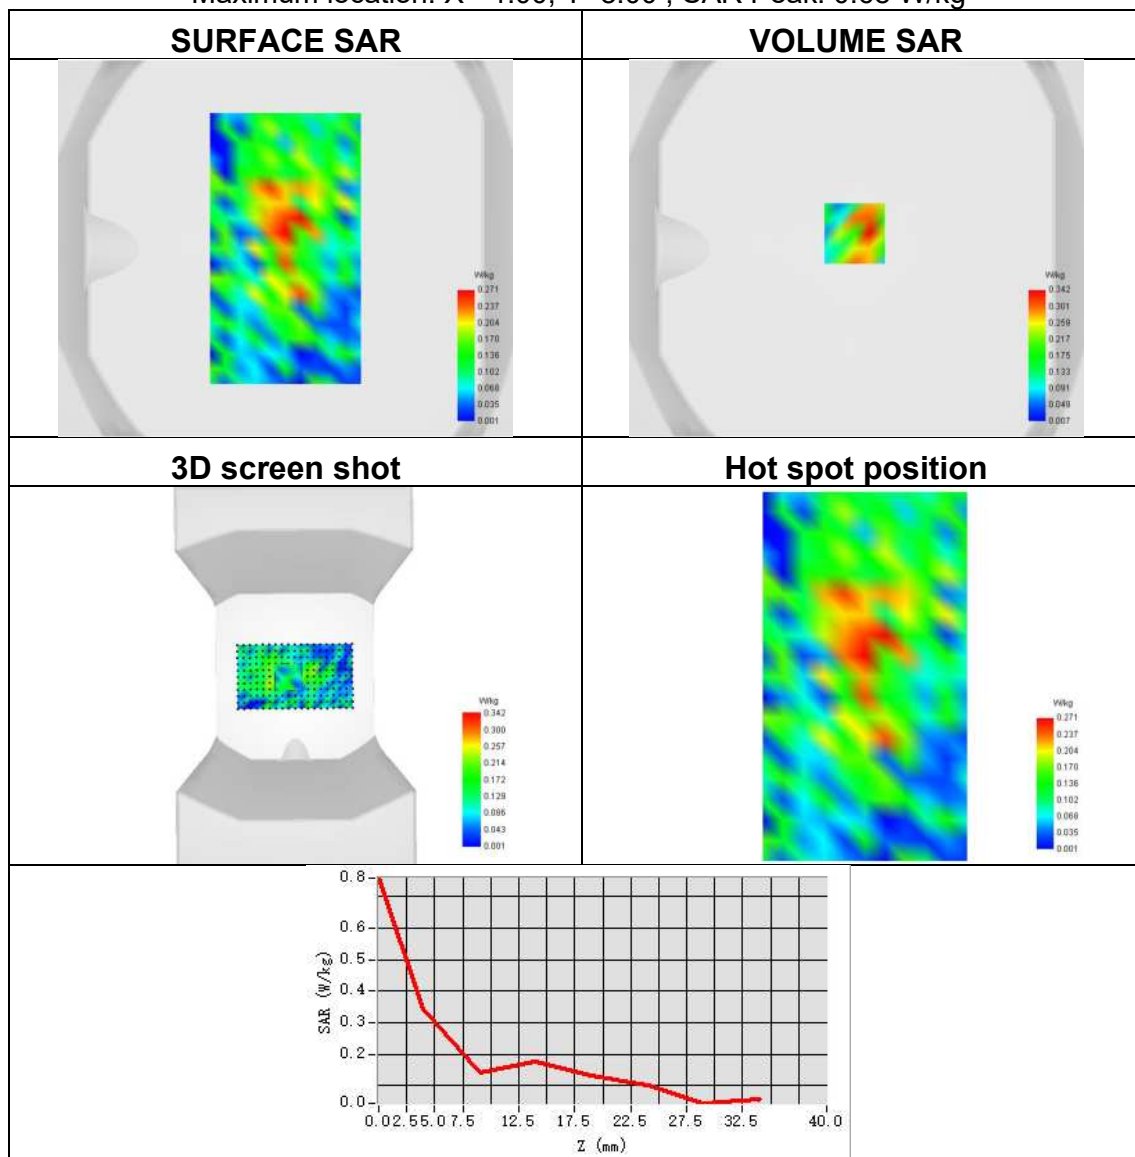




Plot 61:

Test Date	2025-05-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.163
SAR 1g (W/Kg)	0.367
ConvF	1.67
Relative permittivity	42.75
Conductivity (S/m)	0.91

Maximum location: X=-47.00, Y=-49.00 ; SAR Peak: 0.84 W/kg

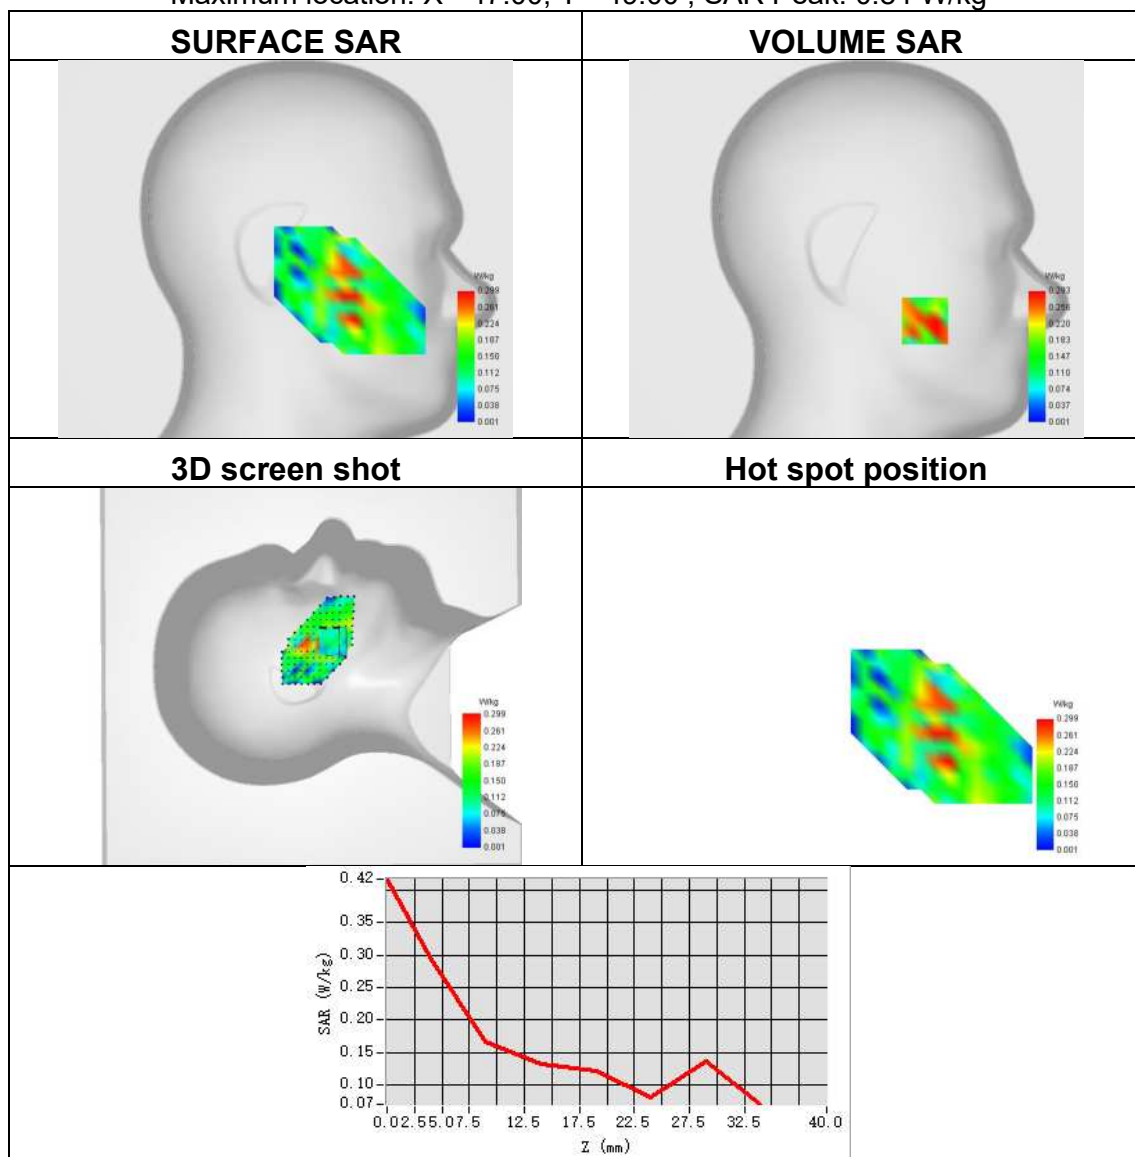




Plot 62:

Test Date	2025-05-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.207
SAR 1g (W/Kg)	0.392
ConvF	1.67
Relative permittivity	42.75
Conductivity (S/m)	0.91

Maximum location: X=1.00, Y=3.00 ; SAR Peak: 0.73 W/kg

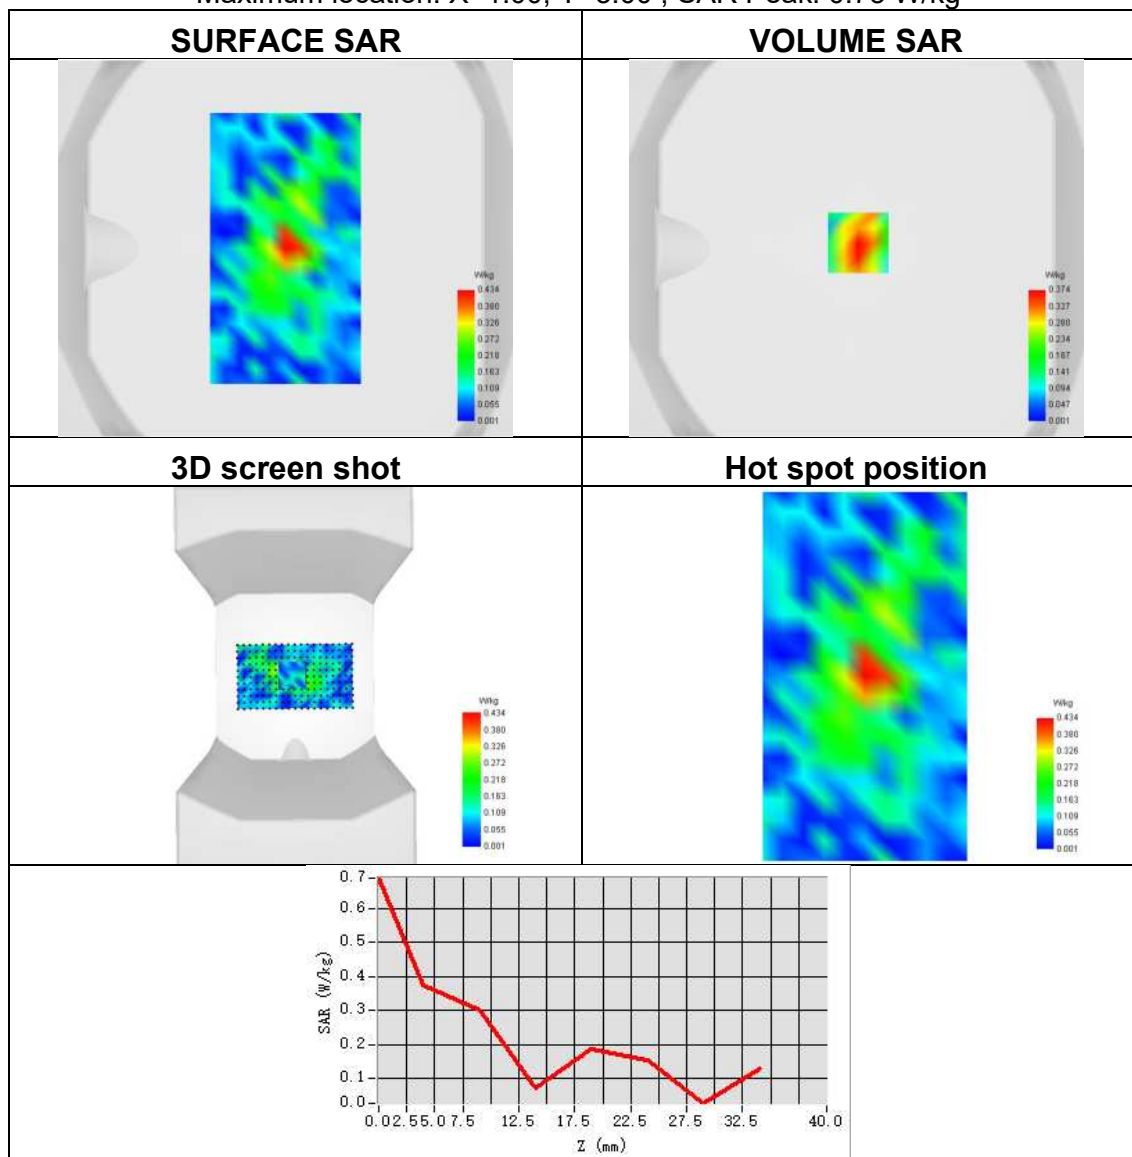




Plot 63:

Test Date	2025-05-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 17
Signal	LTE FDD
Frequency	710
SAR 10g (W/Kg)	0.130
SAR 1g (W/Kg)	0.226
ConvF	1.67
Relative permittivity	42.75
Conductivity (S/m)	0.91

Maximum location: X=-33.00, Y=-33.00 ; SAR Peak: 0.48 W/kg

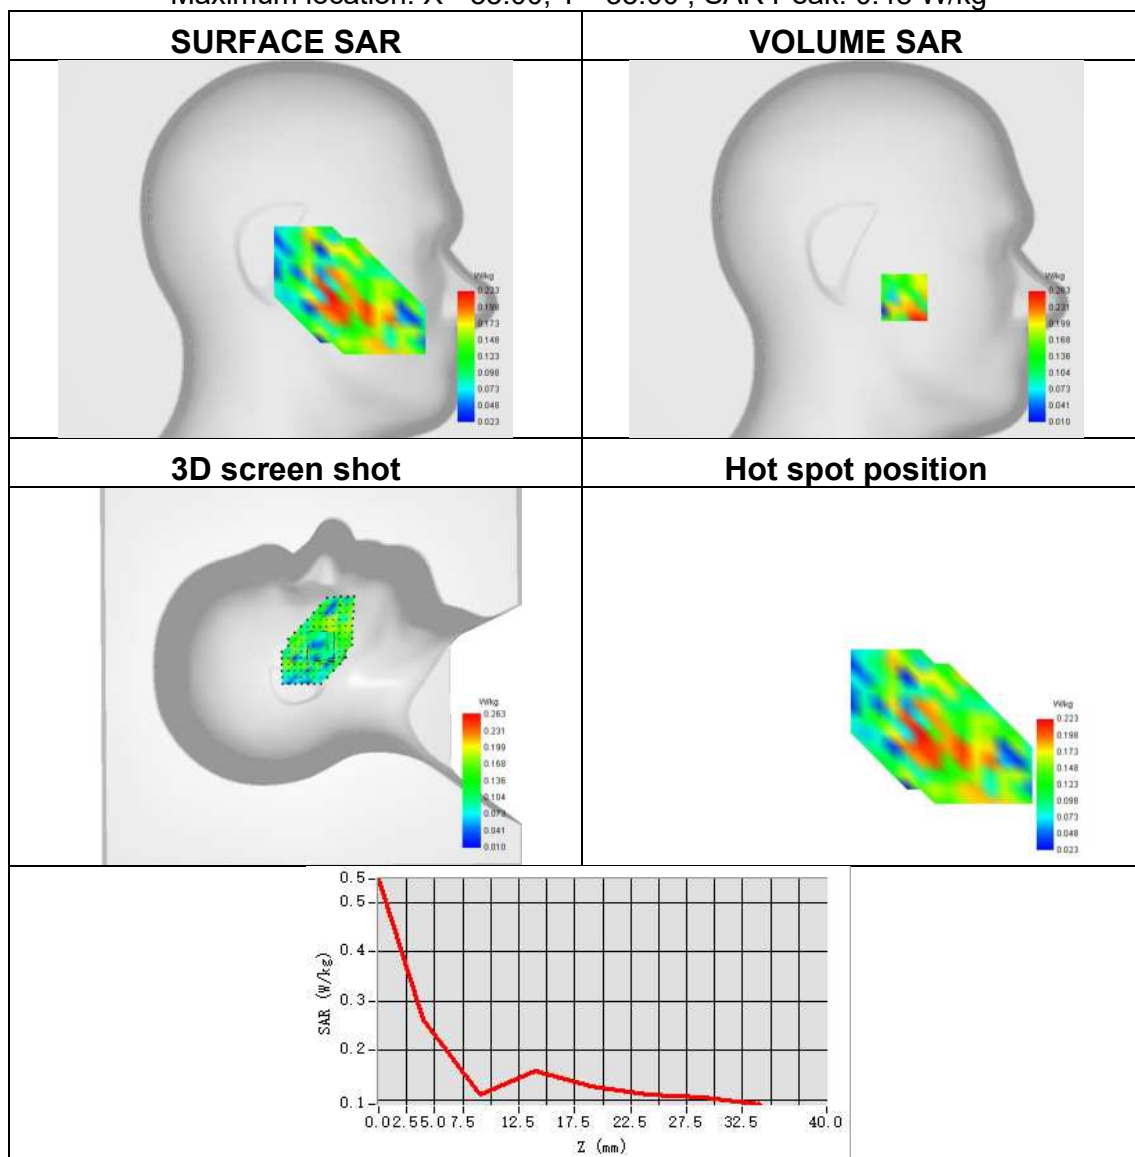




Plot 64:

Test Date	2025-05-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 17
Signal	LTE FDD
Frequency	710
SAR 10g (W/Kg)	0.147
SAR 1g (W/Kg)	0.244
ConvF	1.67
Relative permittivity	42.75
Conductivity (S/m)	0.91

Maximum location: X=7.00, Y=7.00 ; SAR Peak: 0.64 W/kg

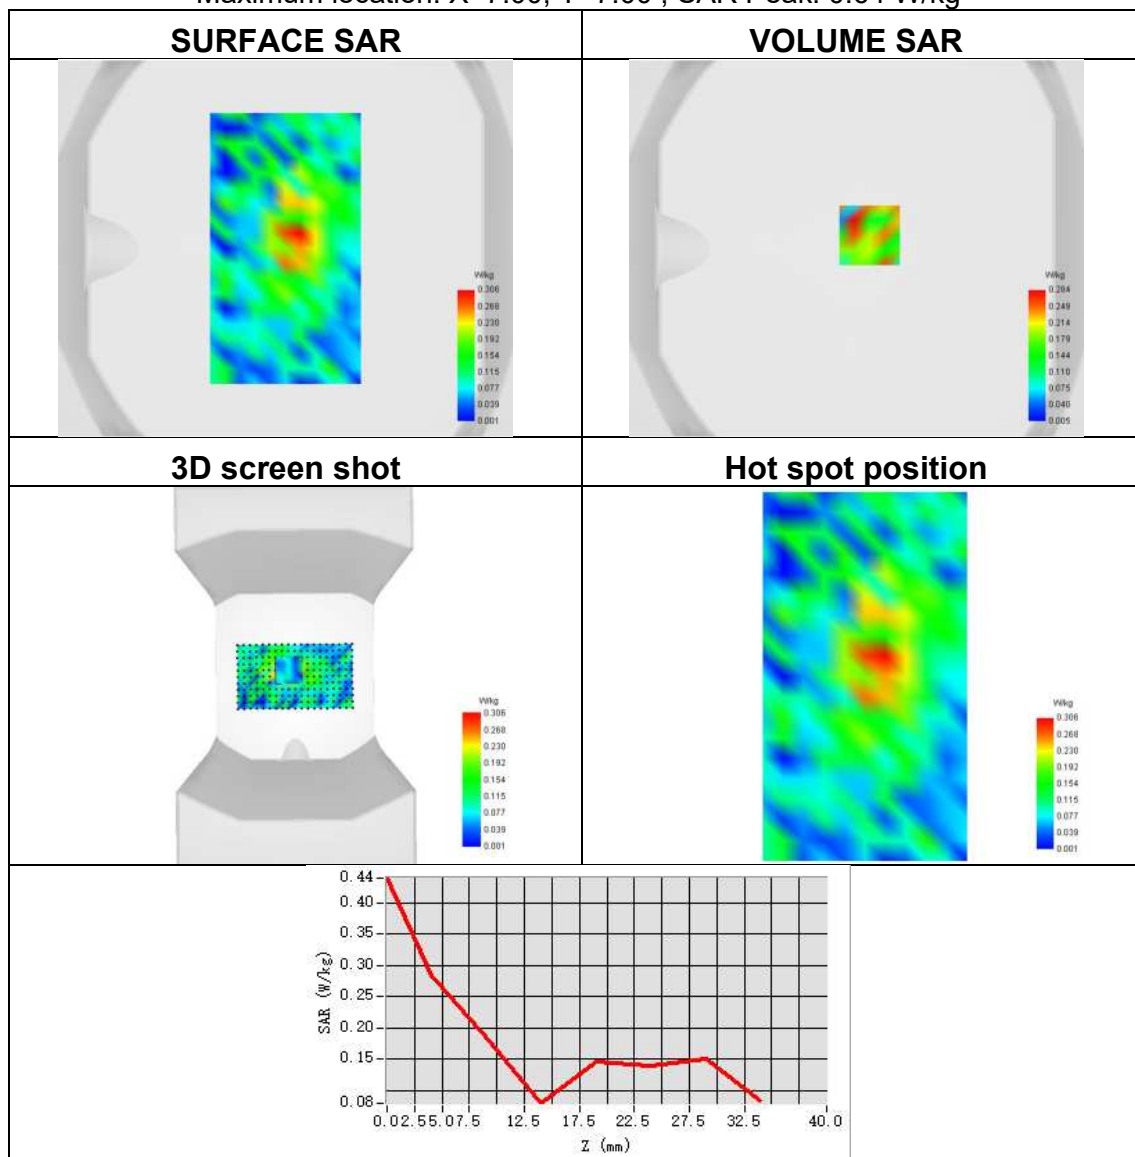




Plot 65:

Test Date	2025-05-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 25
Signal	LTE FDD
Frequency	1905
SAR 10g (W/Kg)	0.143
SAR 1g (W/Kg)	0.237
ConvF	2.20
Relative permittivity	40.28
Conductivity (S/m)	1.39

Maximum location: X=-73.00, Y=-47.00 ; SAR Peak: 0.44 W/kg

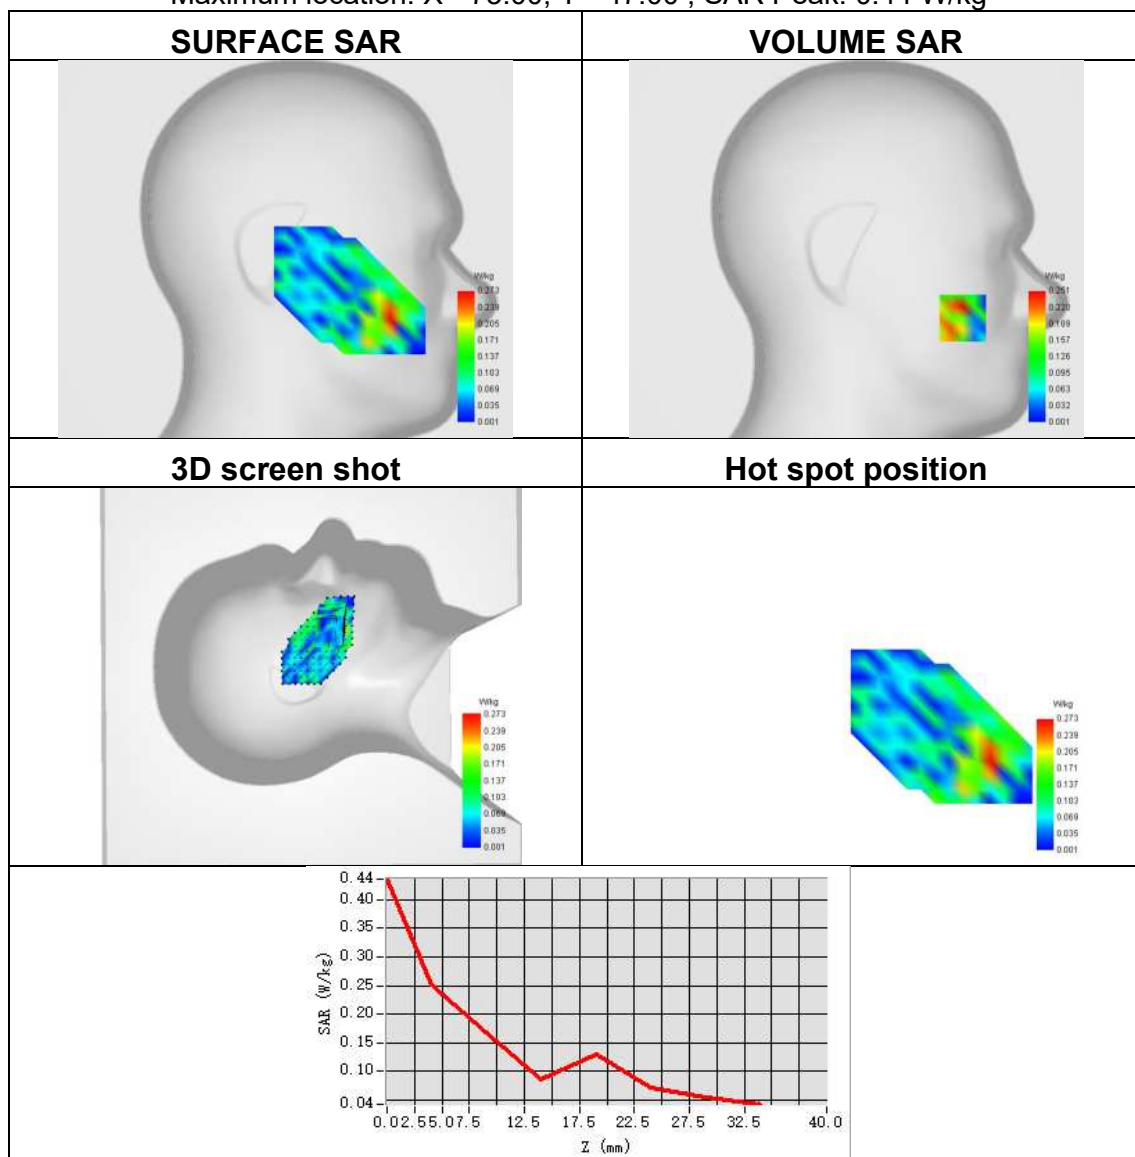




Plot 66:

Test Date	2025-05-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 25
Signal	LTE FDD
Frequency	1905
SAR 10g (W/Kg)	0.278
SAR 1g (W/Kg)	0.562
ConvF	2.20
Relative permittivity	40.28
Conductivity (S/m)	1.39


Maximum location: X=8.00, Y=-7.00 ; SAR Peak: 0.92 W/kg

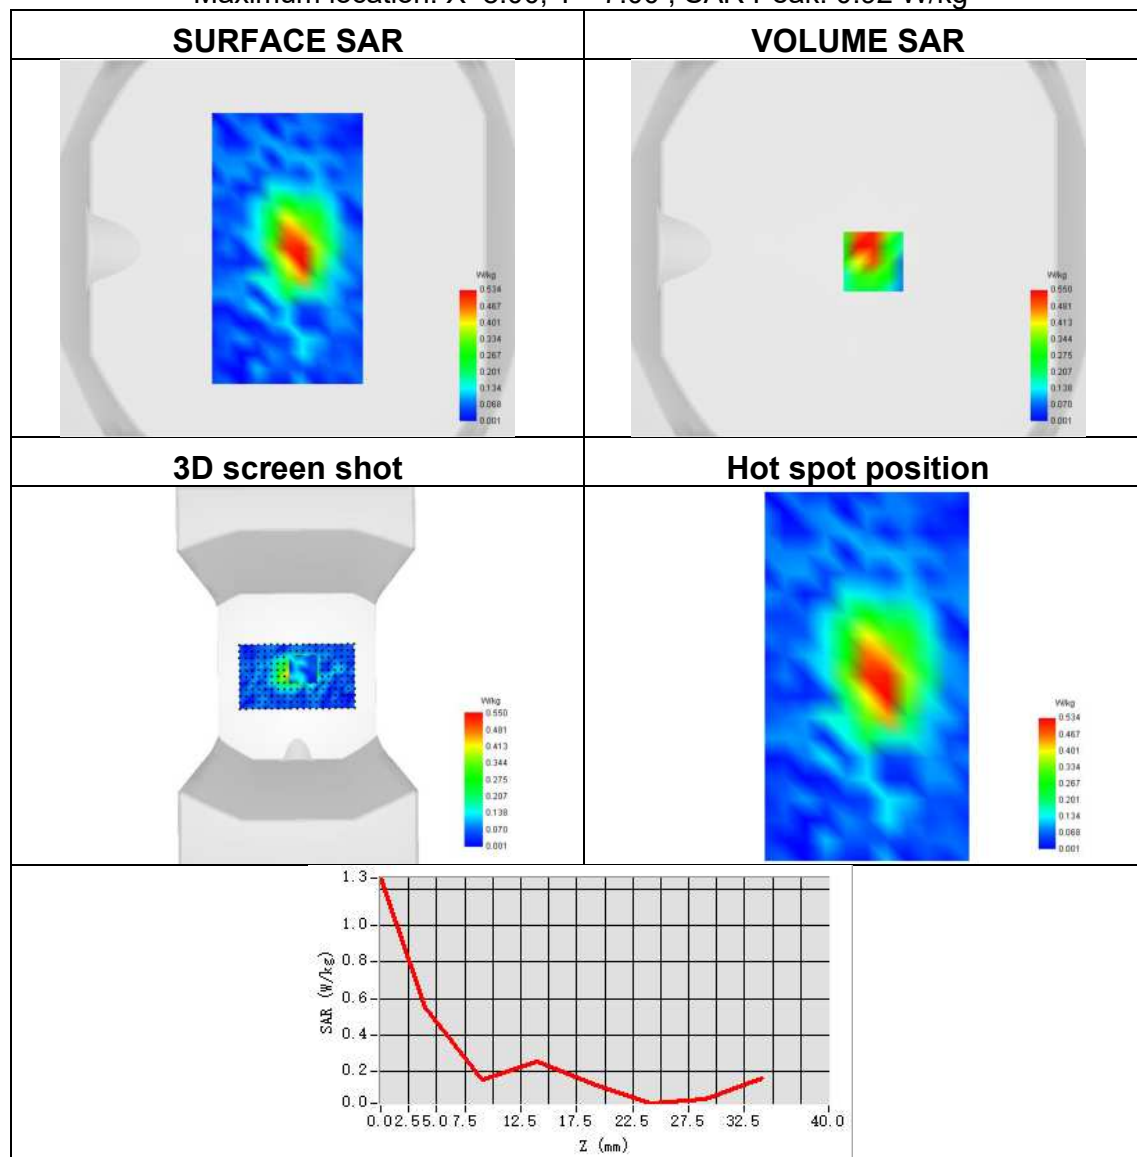

Plot 67:

Test Date	2025-05-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 26
Signal	LTE FDD
Frequency	831.5
SAR 10g (W/Kg)	0.159
SAR 1g (W/Kg)	0.291
ConvF	1.72
Relative permittivity	41.25
Conductivity (S/m)	0.92

Maximum location: X=-55.00, Y=-21.00 ; SAR Peak: 0.64 W/kg

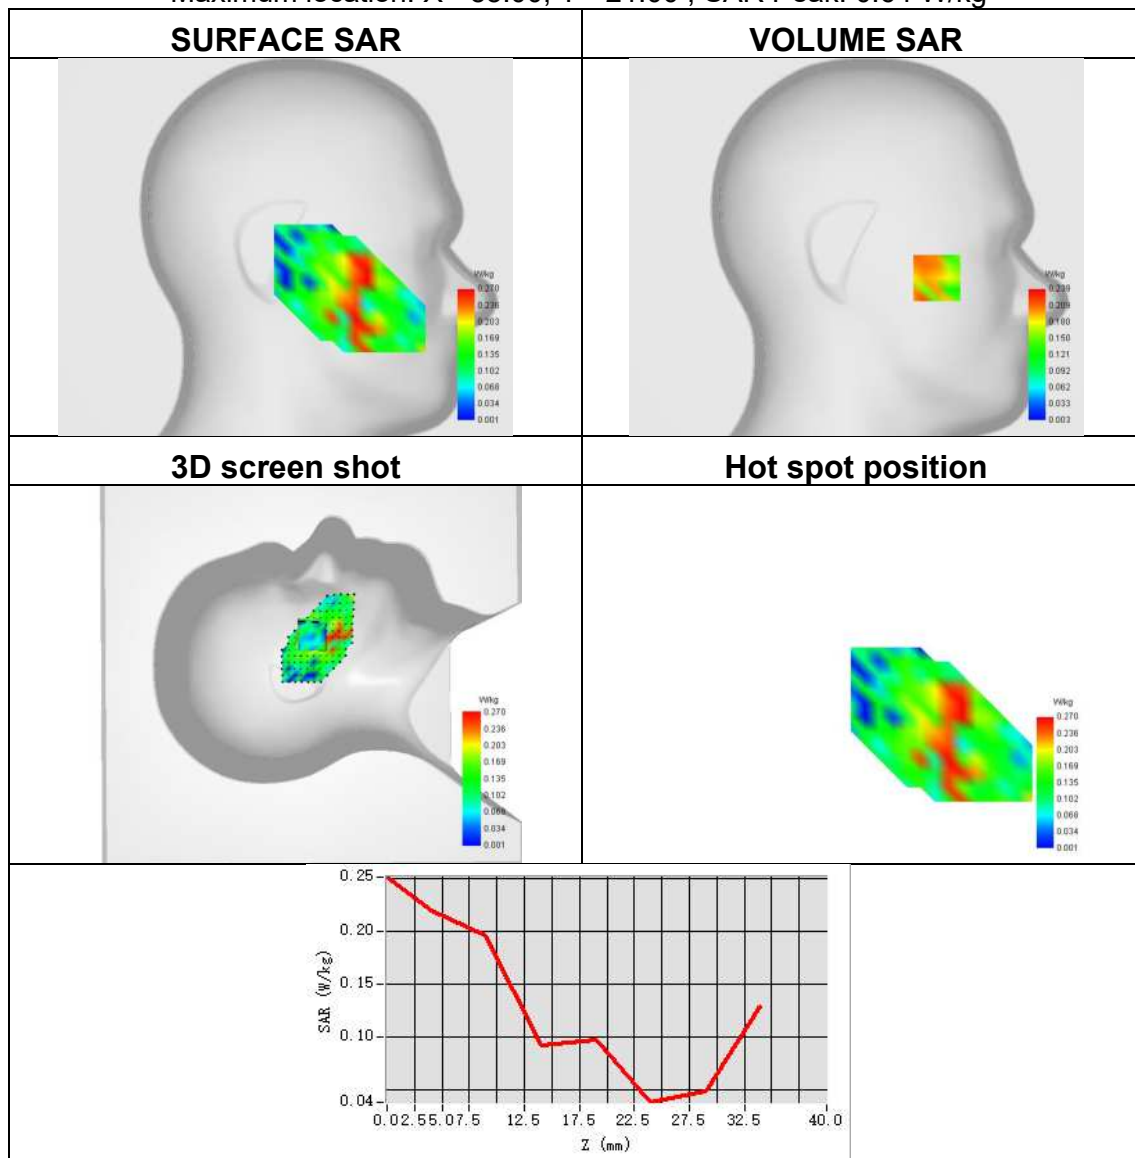




Plot 68:

Test Date	2025-05-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 26
Signal	LTE FDD
Frequency	831.5
SAR 10g (W/Kg)	0.278
SAR 1g (W/Kg)	0.554
ConvF	1.72
Relative permittivity	41.25
Conductivity (S/m)	0.92

Maximum location: X=9.00, Y=-8.00 ; SAR Peak: 0.94 W/kg

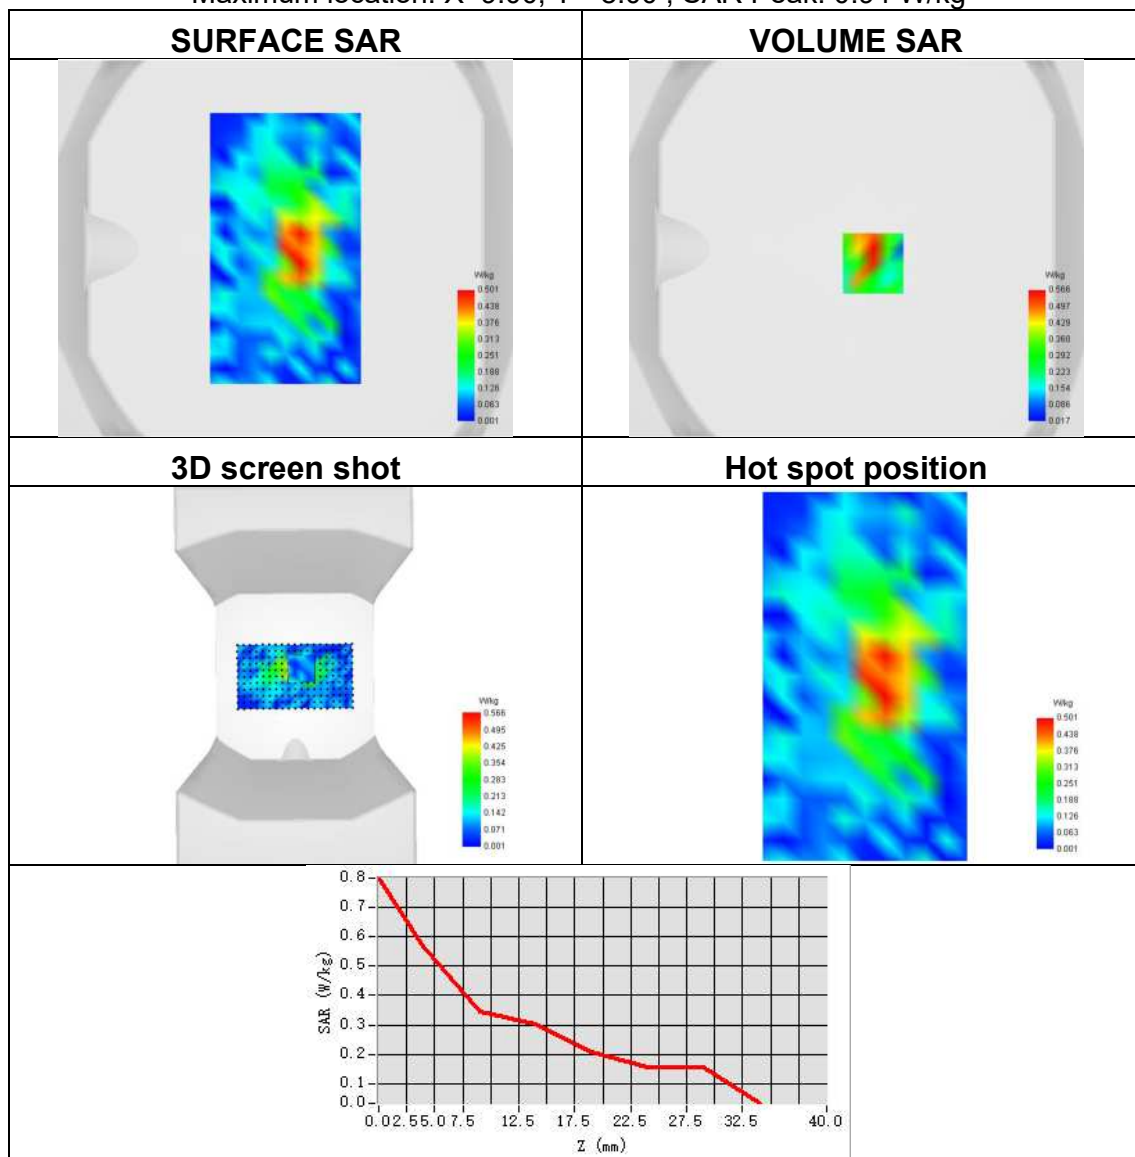




Plot 69:

Test Date	2025-05-13
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 38
Signal	LTE TDD
Frequency	2610
SAR 10g (W/Kg)	0.076
SAR 1g (W/Kg)	0.153
ConvF	2.37
Relative permittivity	39.33
Conductivity (S/m)	1.98

Maximum location: X=-48.00, Y=-30.00 ; SAR Peak: 0.50 W/kg

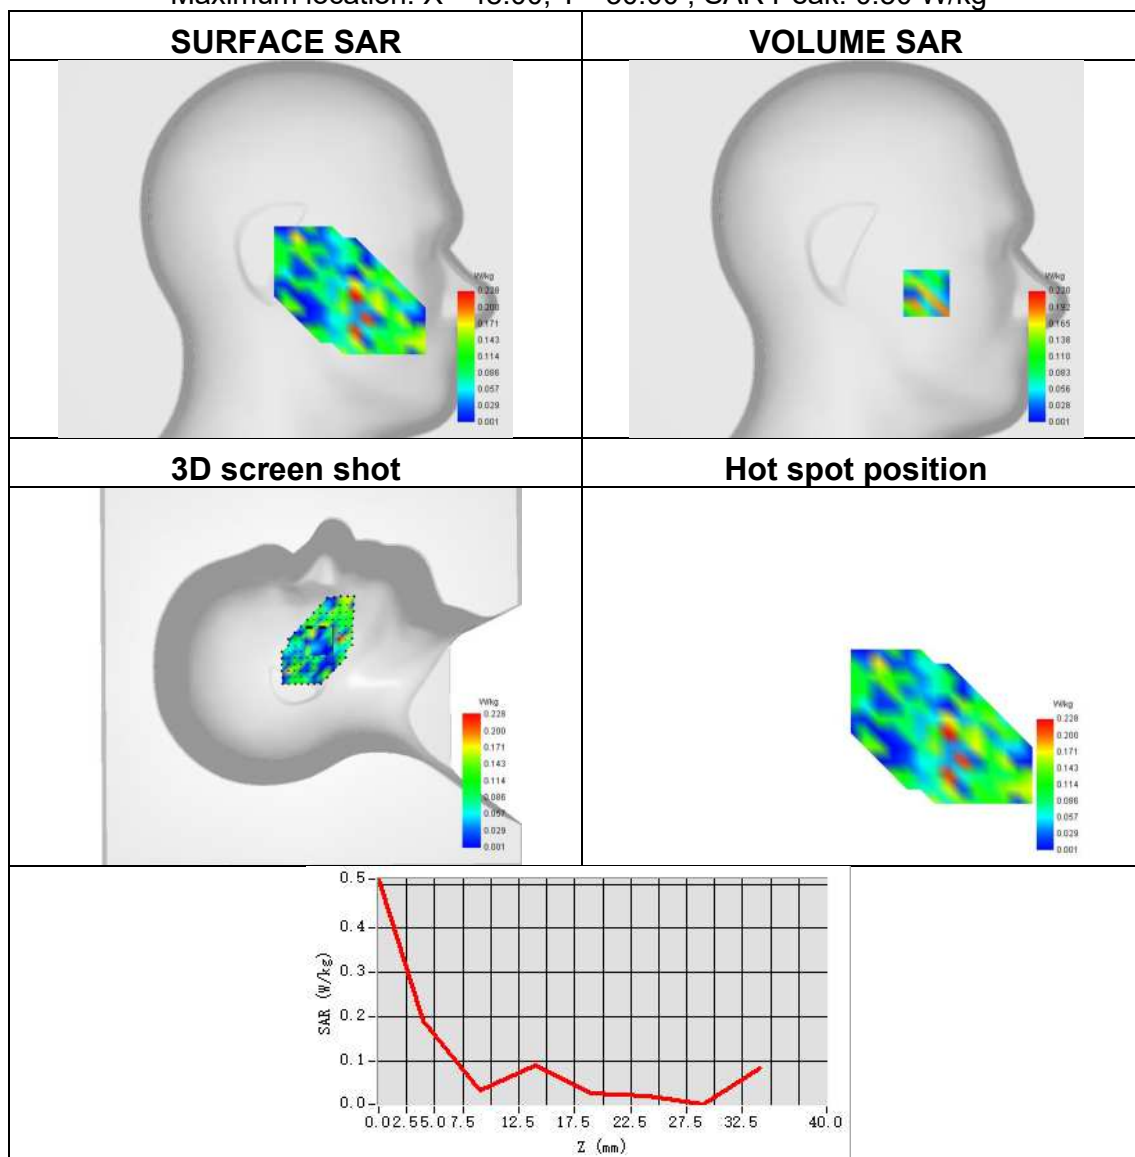




Plot 70:

Test Date	2025-05-13
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 38
Signal	LTE TDD
Frequency	2610
SAR 10g (W/Kg)	0.302
SAR 1g (W/Kg)	0.725
ConvF	2.37
Relative permittivity	39.33
Conductivity (S/m)	1.98

Maximum location: X=1.00, Y=-17.00 ; SAR Peak: 1.61 W/kg

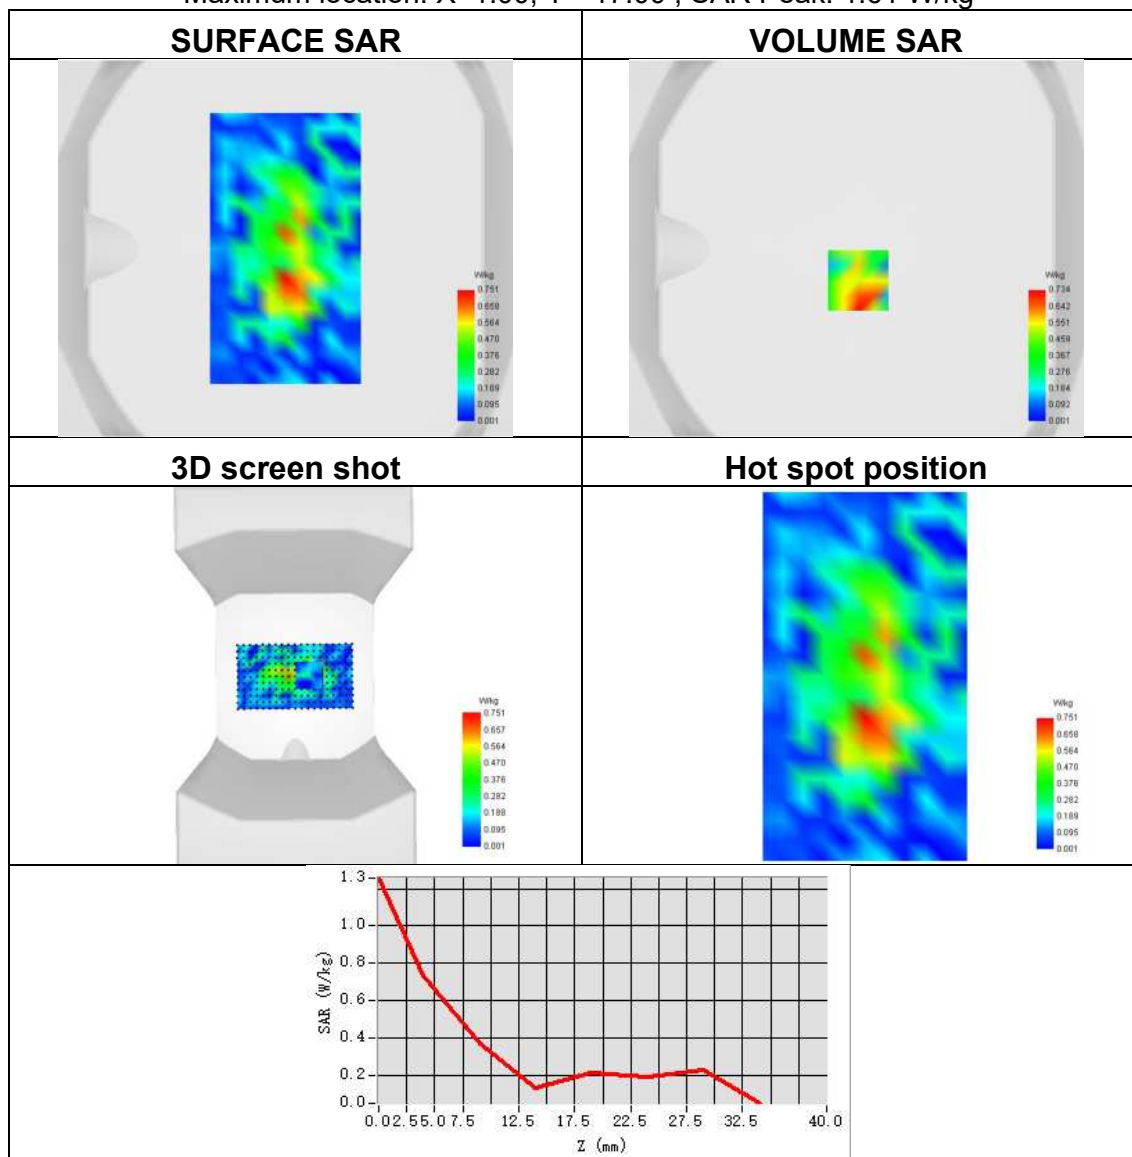




Plot 71:

Test Date	2025-05-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 40
Signal	LTE TDD
Frequency	2310
SAR 10g (W/Kg)	0.074
SAR 1g (W/Kg)	0.175
ConvF	2.33
Relative permittivity	40.00
Conductivity (S/m)	1.67

Maximum location: X=-70.00, Y=-33.00 ; SAR Peak: 0.55 W/kg

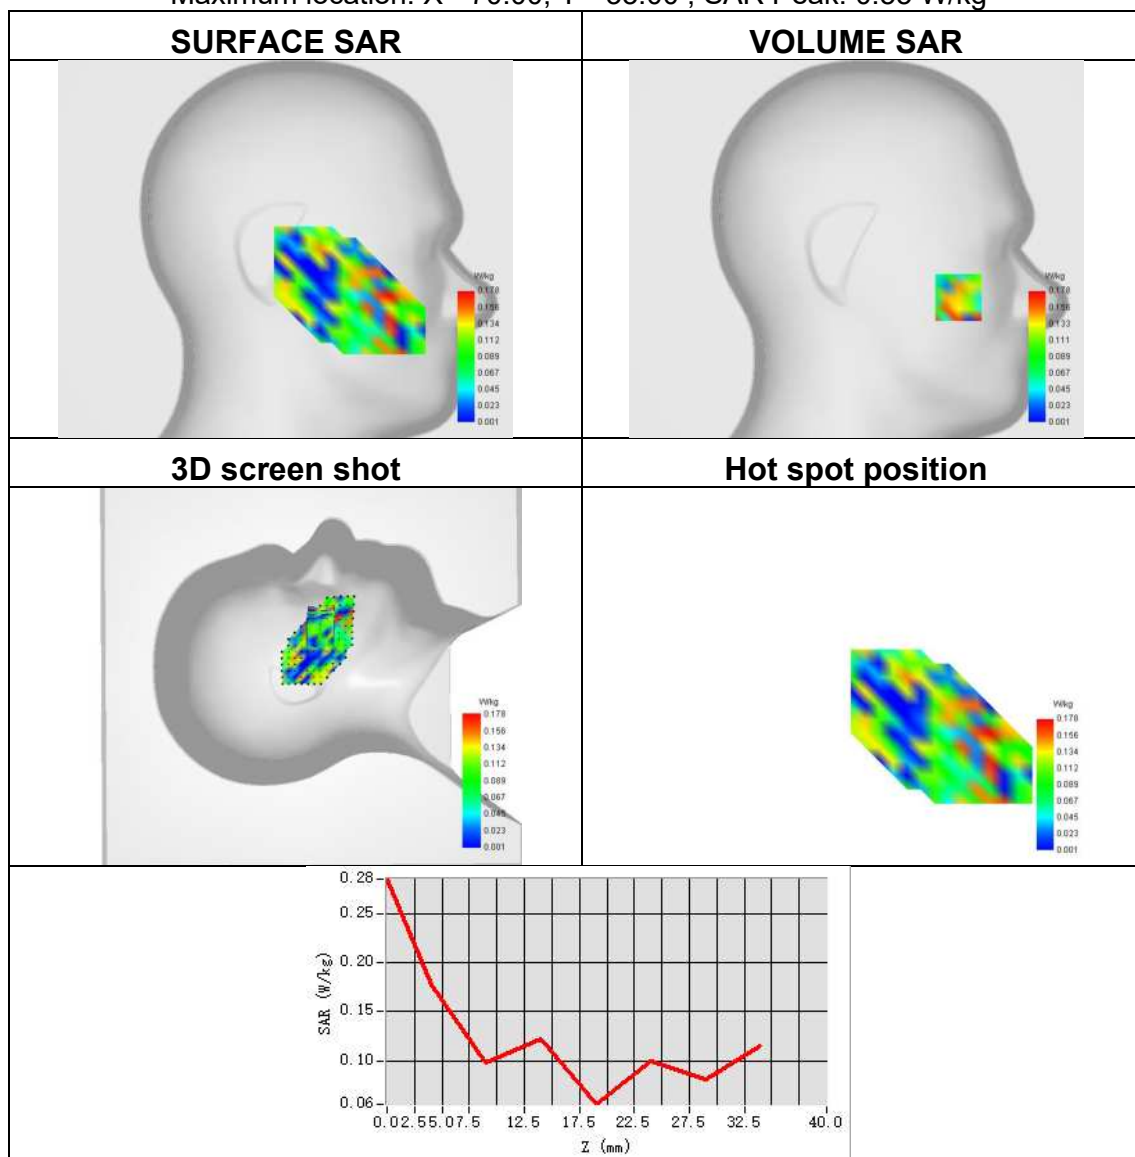




Plot 72:

Test Date	2025-05-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 40
Signal	LTE TDD
Frequency	2310
SAR 10g (W/Kg)	0.317
SAR 1g (W/Kg)	0.707
ConvF	2.33
Relative permittivity	40.00
Conductivity (S/m)	1.67

Maximum location: X=7.00, Y=8.00 ; SAR Peak: 1.46 W/kg

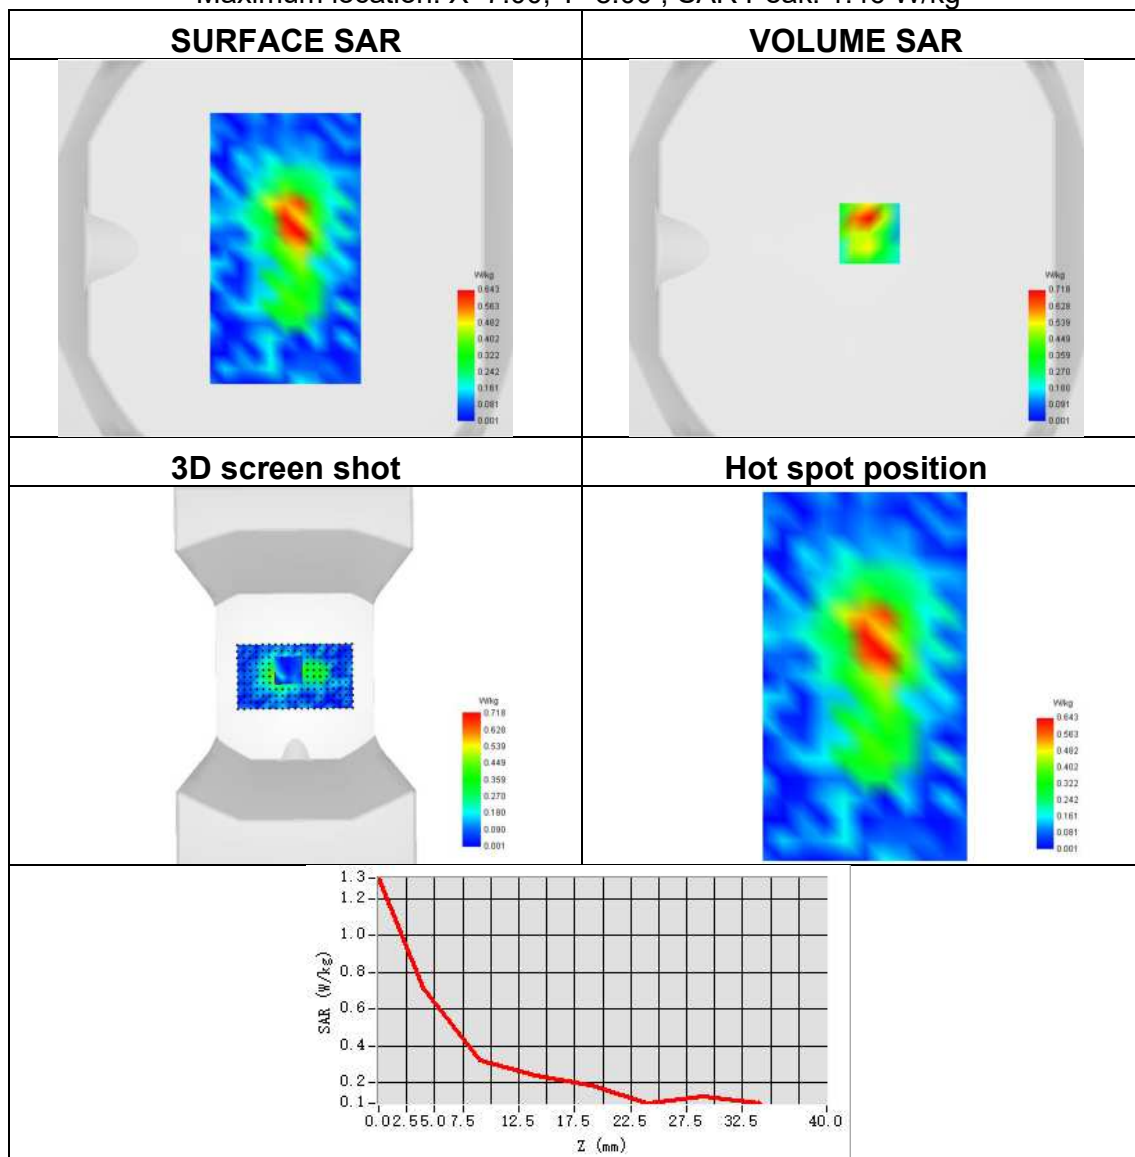




Plot 73:

Test Date	2025-05-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 41
Signal	LTE TDD
Frequency	2680
SAR 10g (W/Kg)	0.089
SAR 1g (W/Kg)	0.226
ConvF	2.37
Relative permittivity	40.18
Conductivity (S/m)	1.94

Maximum location: X=-64.00, Y=-49.00 ; SAR Peak: 0.59 W/kg

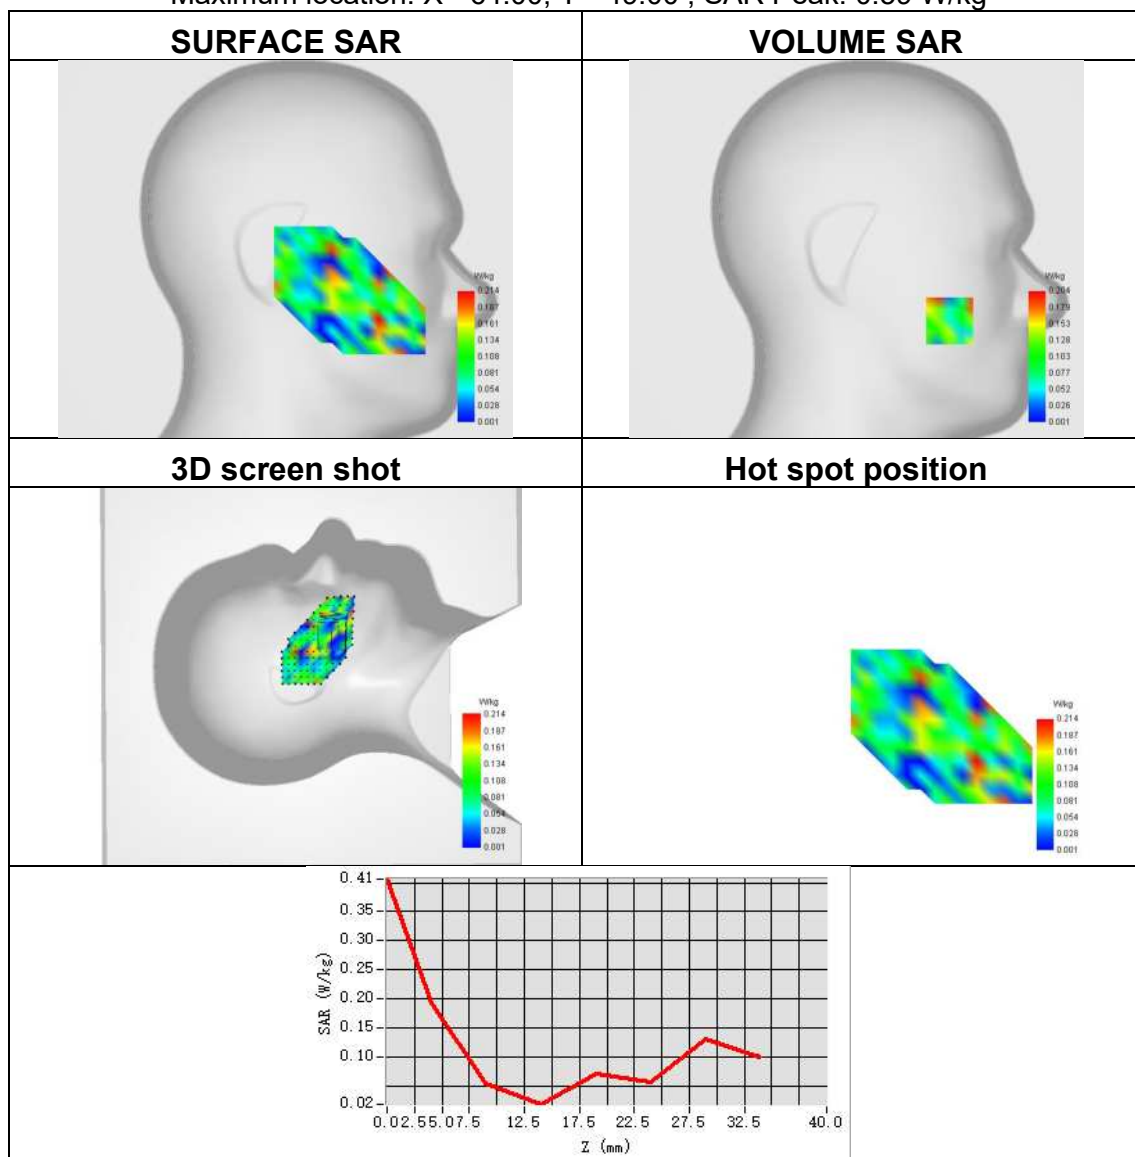




Plot 74:

Test Date	2025-05-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 41
Signal	LTE TDD
Frequency	2680
SAR 10g (W/Kg)	0.361
SAR 1g (W/Kg)	0.755
ConvF	2.37
Relative permittivity	40.18
Conductivity (S/m)	1.94

Maximum location: X=6.00, Y=-26.00 ; SAR Peak: 1.45 W/kg

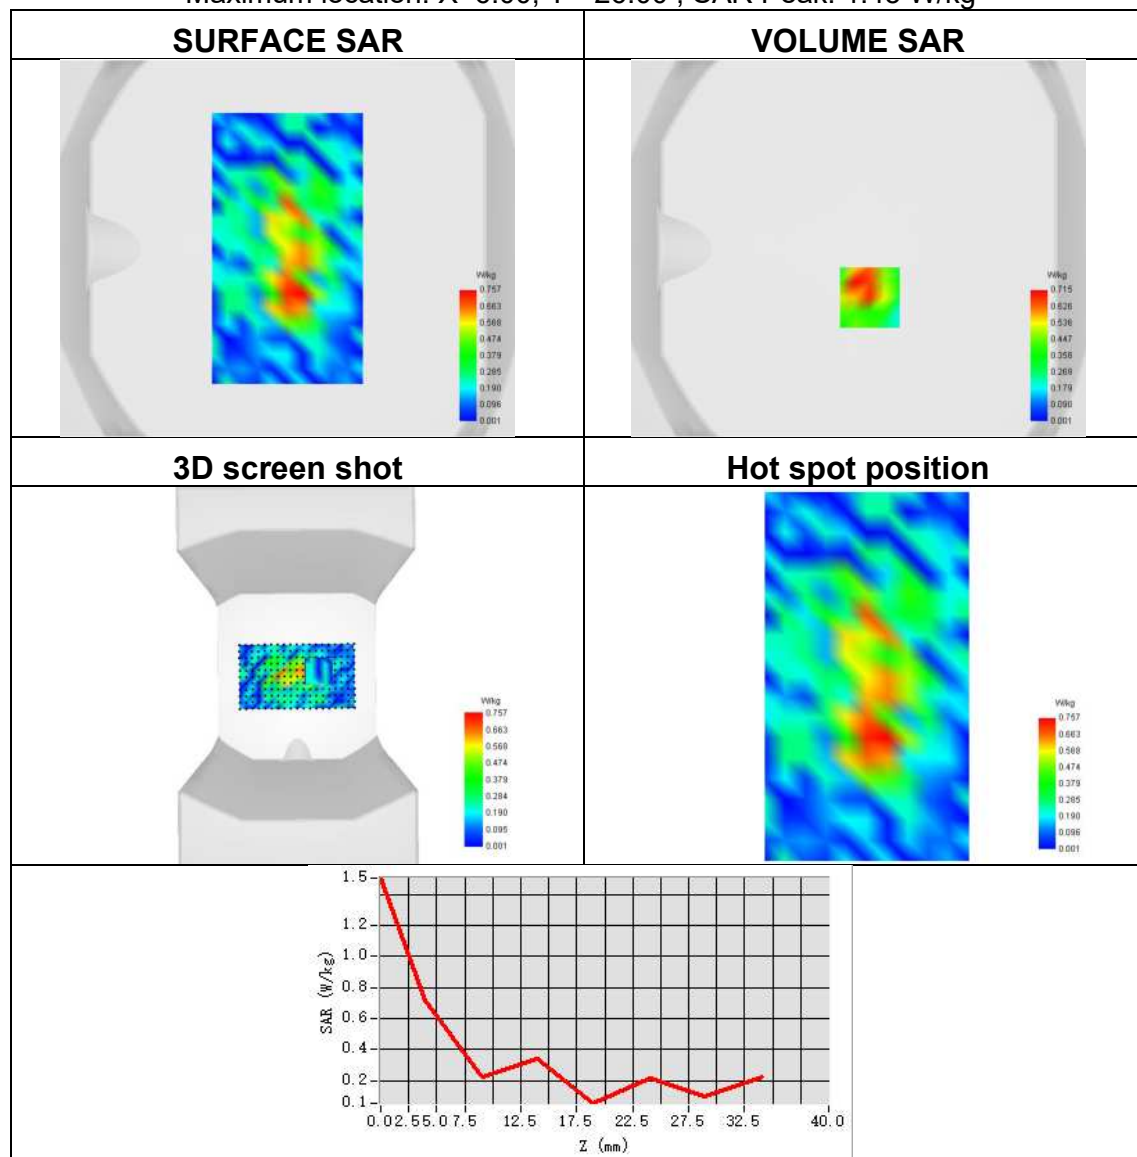




Plot 75:

Test Date	2025-05-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 66
Signal	LTE FDD
Frequency	1770
SAR 10g (W/Kg)	0.178
SAR 1g (W/Kg)	0.330
ConvF	1.92
Relative permittivity	40.27
Conductivity (S/m)	1.37

Maximum location: X=-64.00, Y=-48.00 ; SAR Peak: 0.70 W/kg

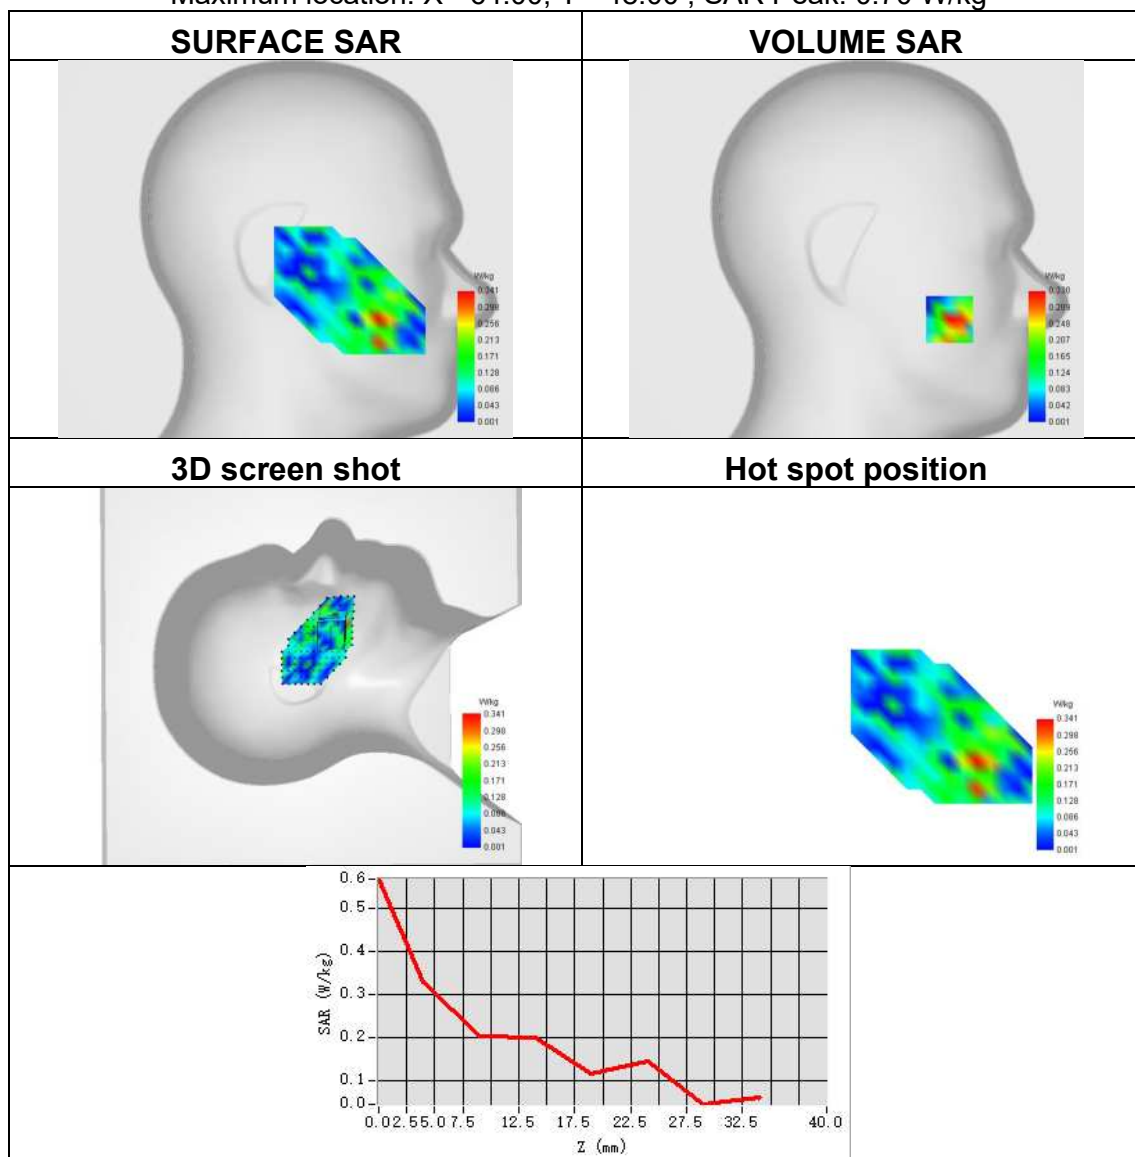




Plot 76:

Test Date	2025-05-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 66
Signal	LTE FDD
Frequency	1770
SAR 10g (W/Kg)	0.329
SAR 1g (W/Kg)	0.538
ConvF	1.92
Relative permittivity	40.27
Conductivity (S/m)	1.37

Maximum location: X=7.00, Y=9.00 ; SAR Peak: 0.95 W/kg

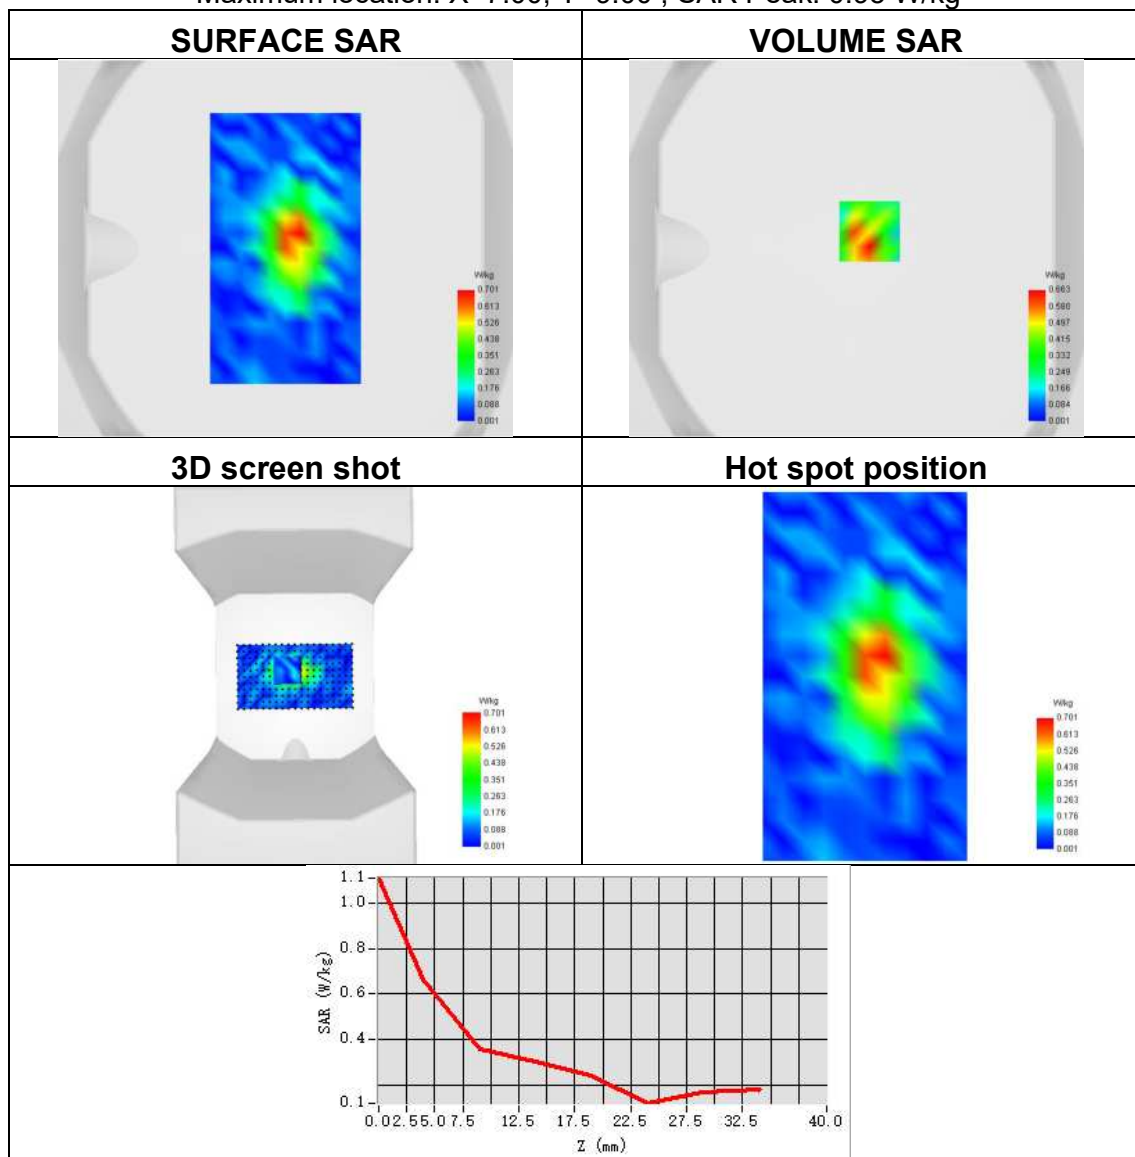




Plot 77:

Test Date	2025-05-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 71
Signal	LTE FDD
Frequency	688
SAR 10g (W/Kg)	0.147
SAR 1g (W/Kg)	0.250
ConvF	1.67
Relative permittivity	42.73
Conductivity (S/m)	0.93

Maximum location: X=-56.00, Y=-40.00 ; SAR Peak: 0.53 W/kg

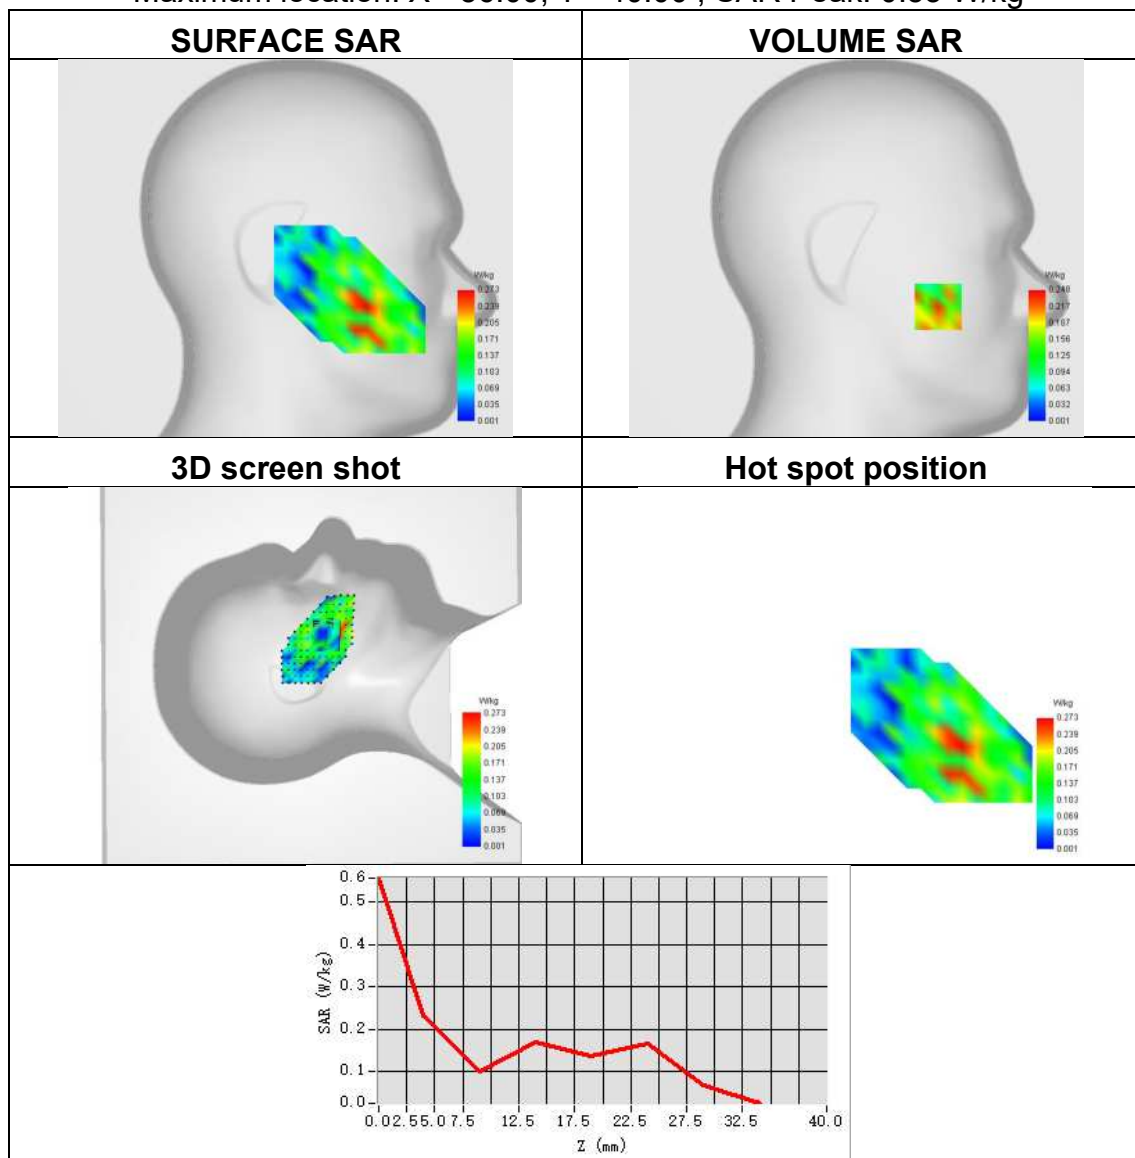




Plot 78:

Test Date	2025-05-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 71
Signal	LTE FDD
Frequency	688
SAR 10g (W/Kg)	0.158
SAR 1g (W/Kg)	0.335
ConvF	1.67
Relative permittivity	42.73
Conductivity (S/m)	0.93

Maximum location: X=1.00, Y=9.00 ; SAR Peak: 0.59 W/kg

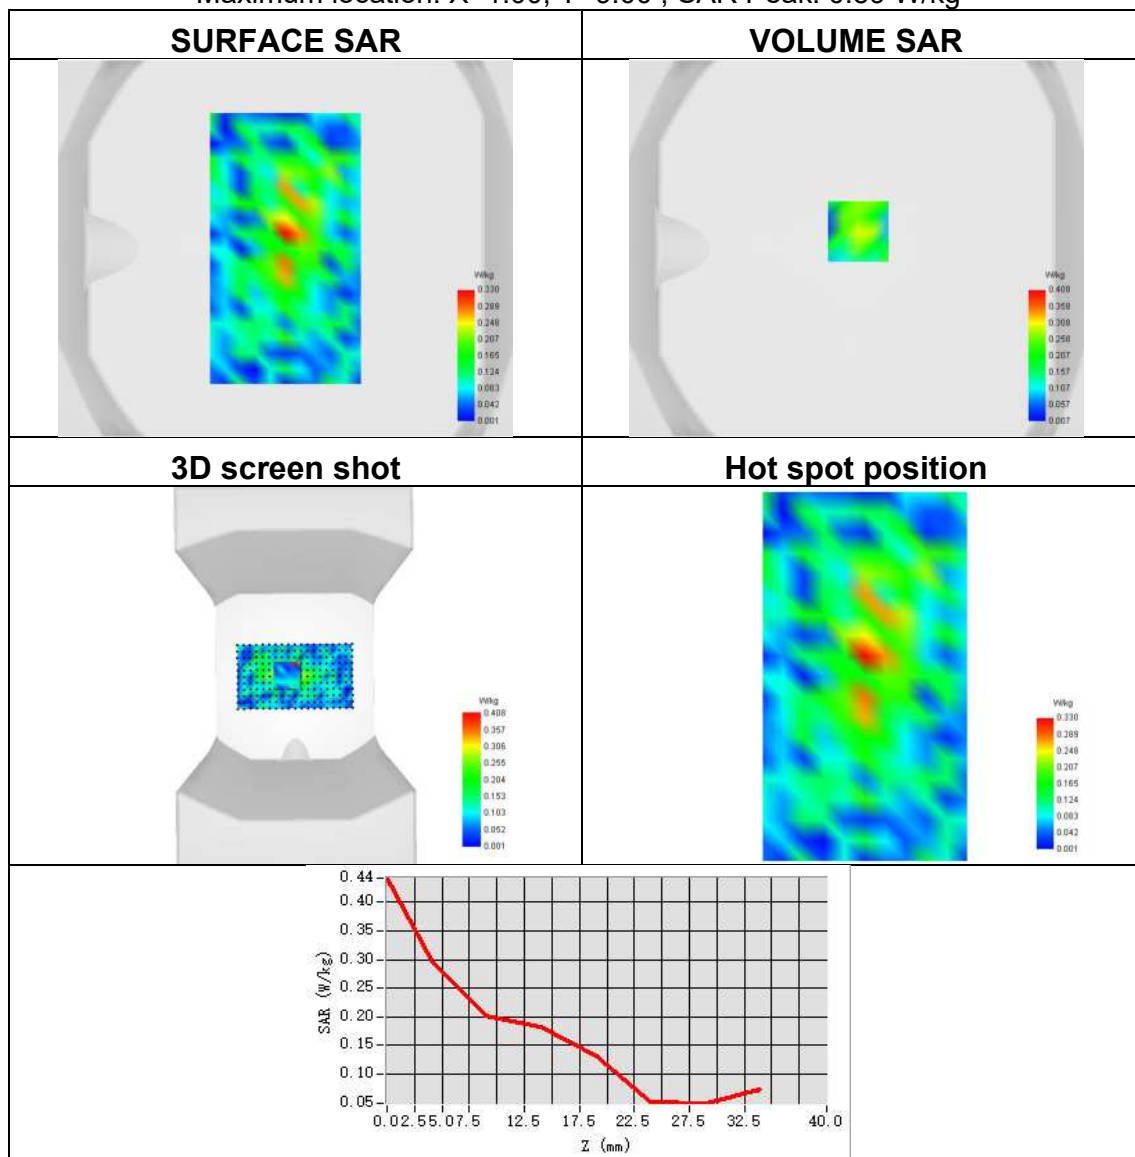




Plot 79:

Test Date	2025-05-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 2
Signal	NR FDD
Frequency	1900
SAR 10g (W/Kg)	0.428
SAR 1g (W/Kg)	0.799
ConvF	2.20
Relative permittivity	40.28
Conductivity (S/m)	1.39

Maximum location: X=-10.00, Y=-2.00 ; SAR Peak: 1.32 W/kg

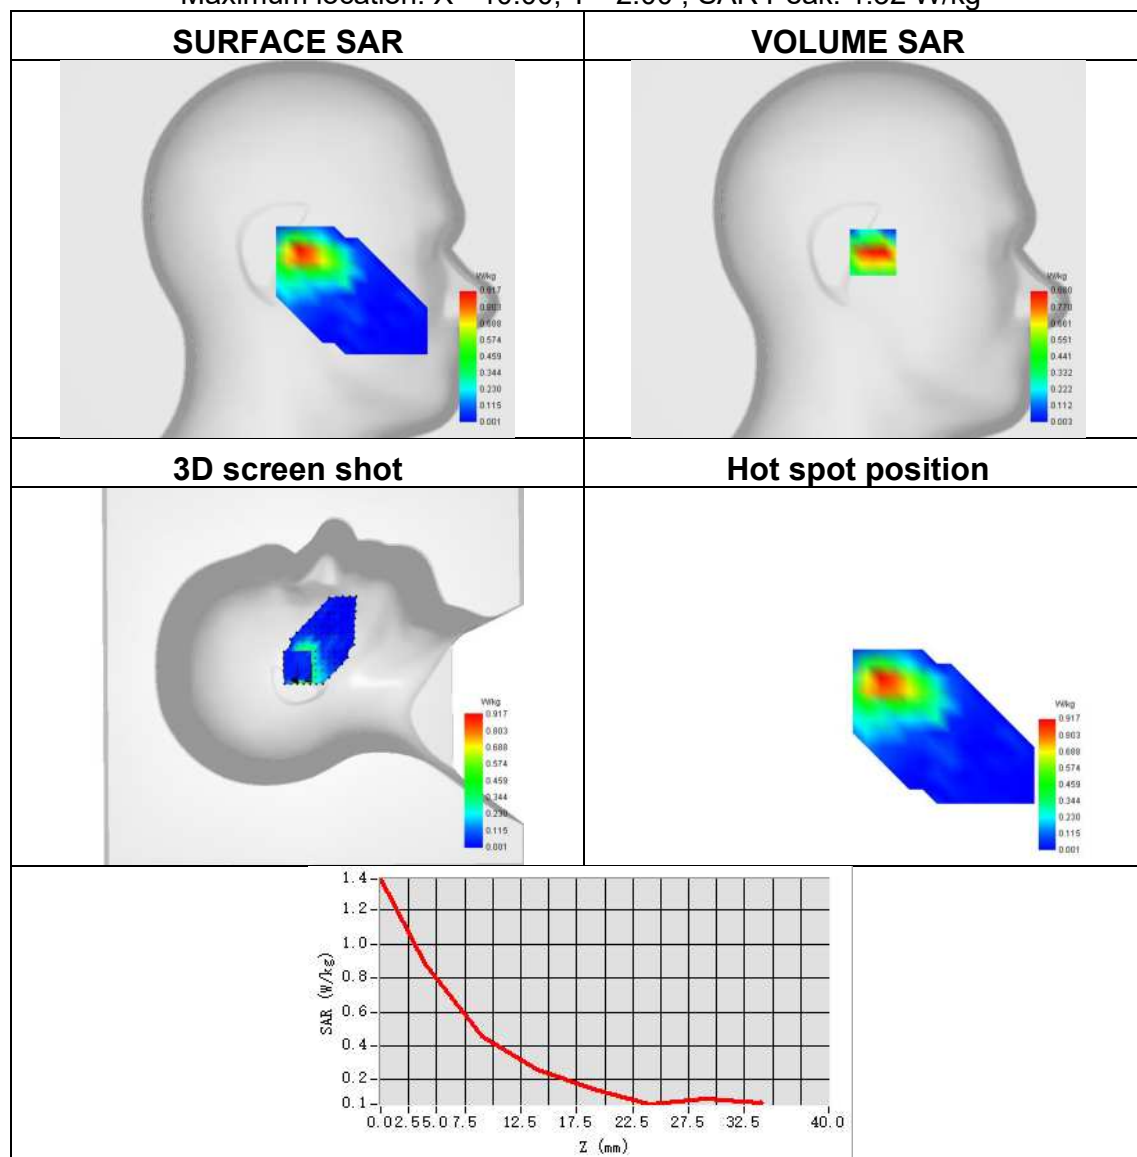




Plot 80:

Test Date	2025-05-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	NR band 2
Signal	NR FDD
Frequency	1900
SAR 10g (W/Kg)	0.248
SAR 1g (W/Kg)	0.558
ConvF	2.20
Relative permittivity	40.28
Conductivity (S/m)	1.39

Maximum location: X=2.00, Y=0.00 ; SAR Peak: 1.11 W/kg

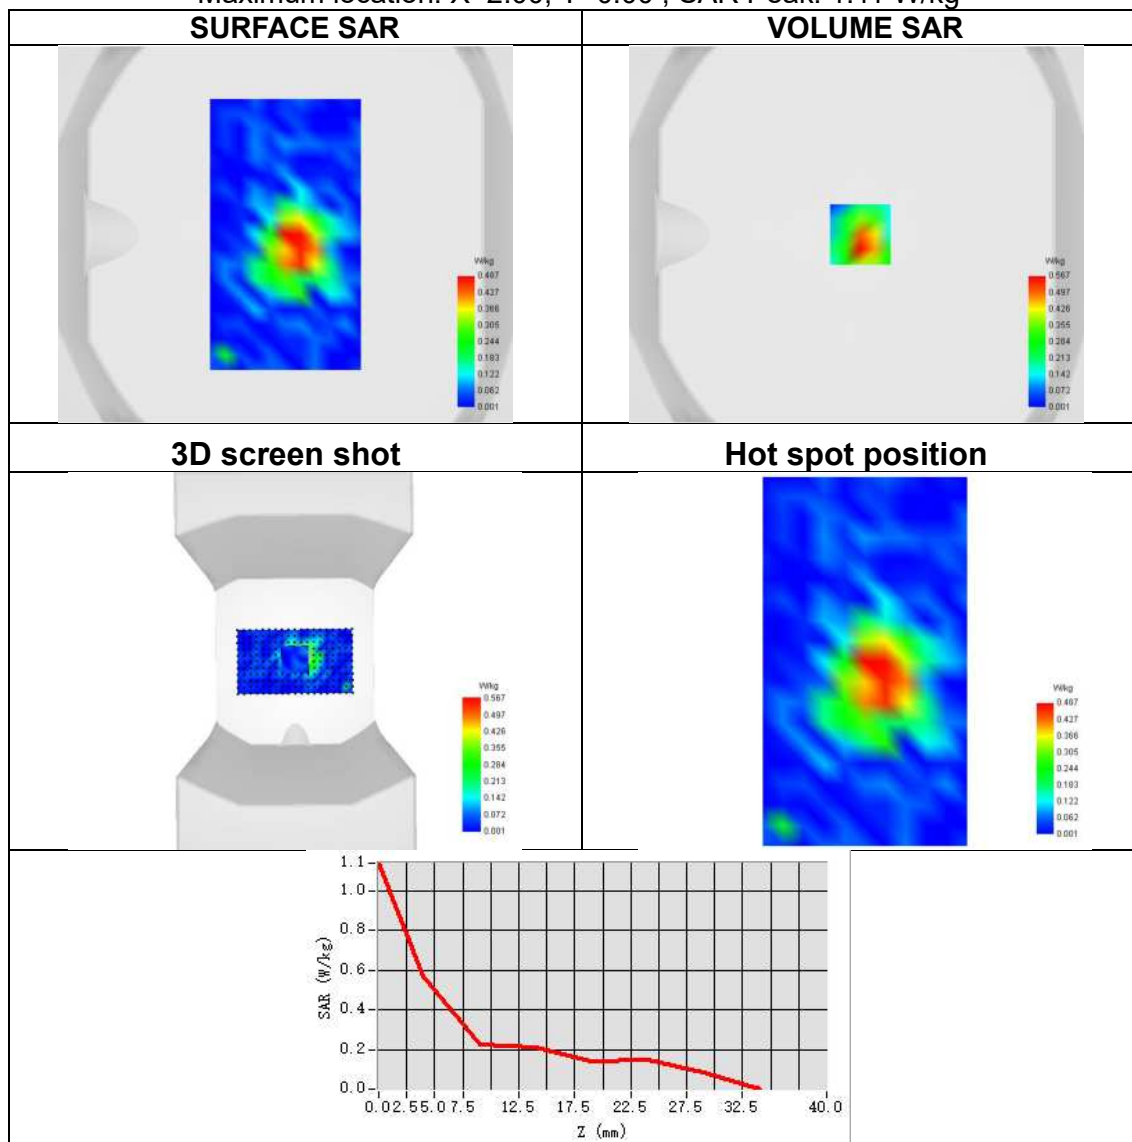




Plot 81:

Test Date	2025-05-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 5
Signal	NR FDD
Frequency	839
SAR 10g (W/Kg)	0.346
SAR 1g (W/Kg)	0.622
ConvF	1.72
Relative permittivity	42.09
Conductivity (S/m)	0.93

Maximum location: X=-48.00, Y=-55.00 ; SAR Peak: 1.00 W/kg

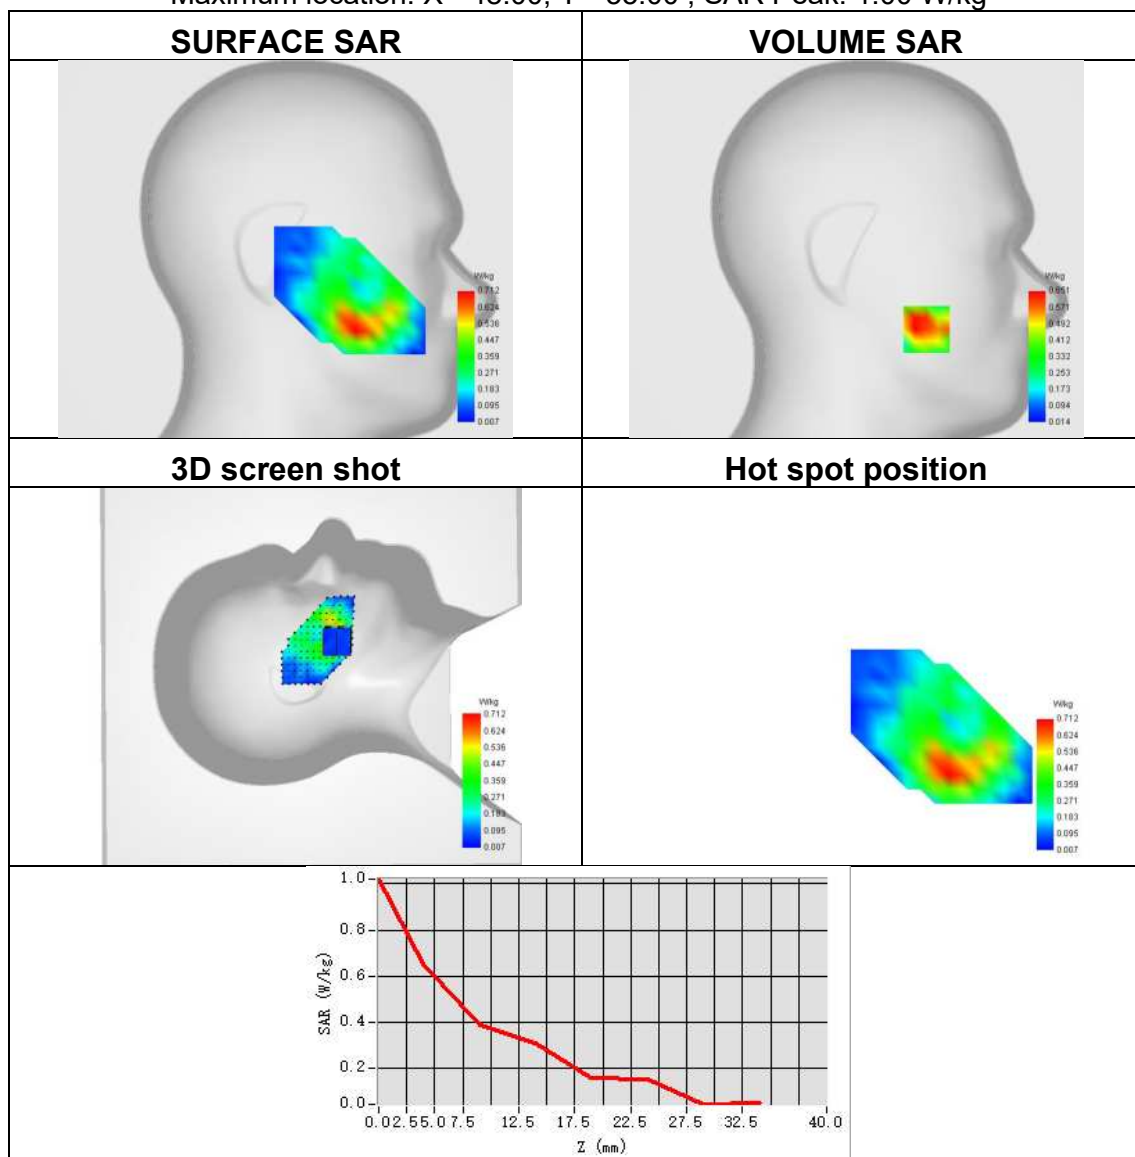




Plot 82:

Test Date	2025-05-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	NR band 5
Signal	NR FDD
Frequency	839
SAR 10g (W/Kg)	0.216
SAR 1g (W/Kg)	0.539
ConvF	1.72
Relative permittivity	42.09
Conductivity (S/m)	0.93

Maximum location: X=8.00, Y=0.00 ; SAR Peak: 1.29 W/kg

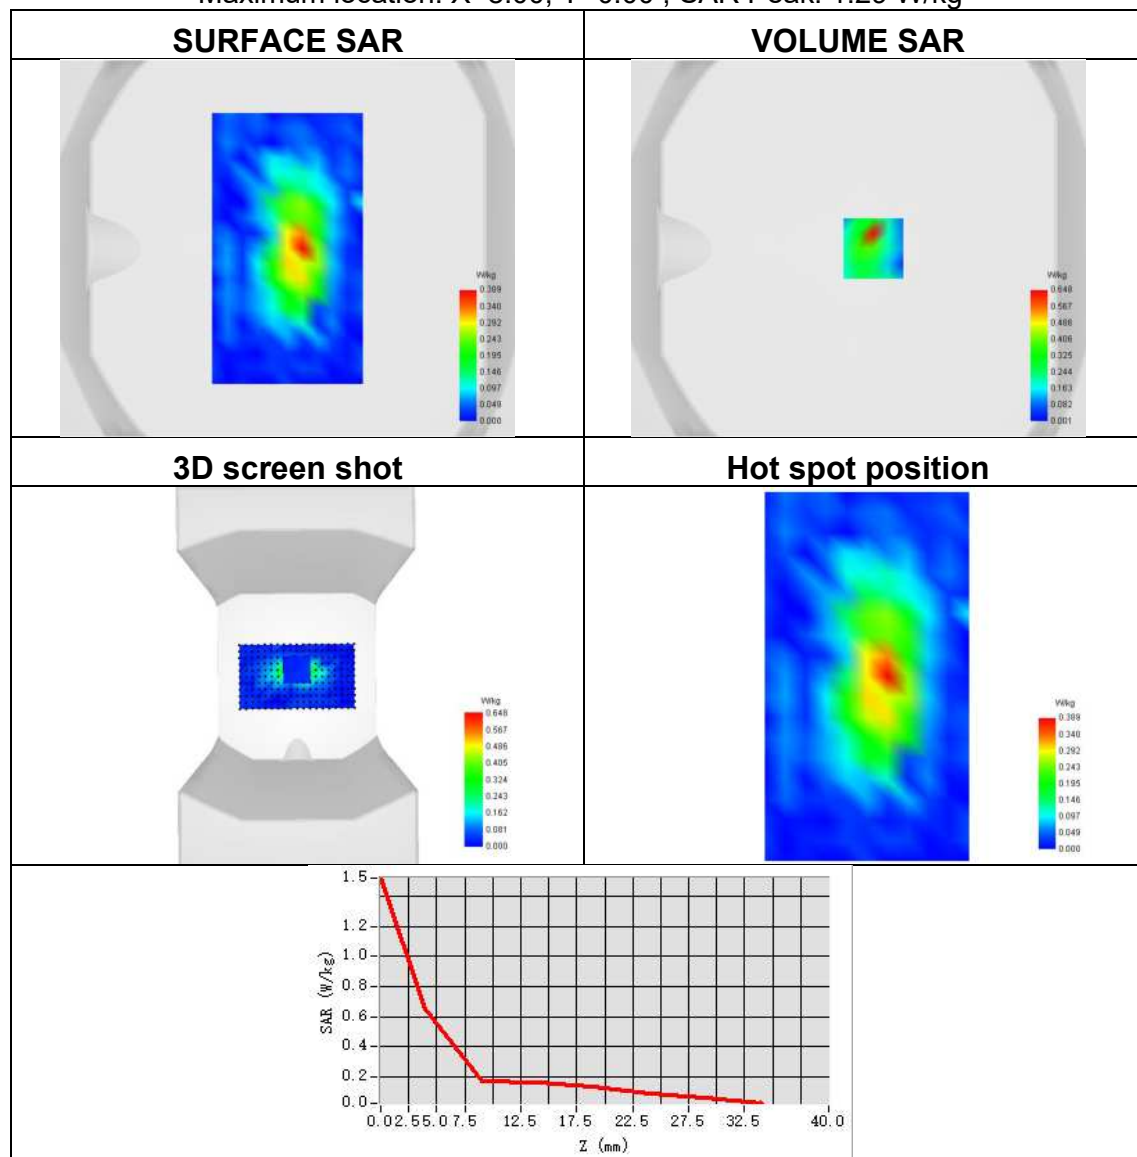




Plot 83:

Test Date	2025-05-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 7
Signal	NR FDD
Frequency	2560
SAR 10g (W/Kg)	0.375
SAR 1g (W/Kg)	0.844
ConvF	2.37
Relative permittivity	39.74
Conductivity (S/m)	2.02

Maximum location: X=-18.00, Y=6.00 ; SAR Peak: 1.77 W/kg

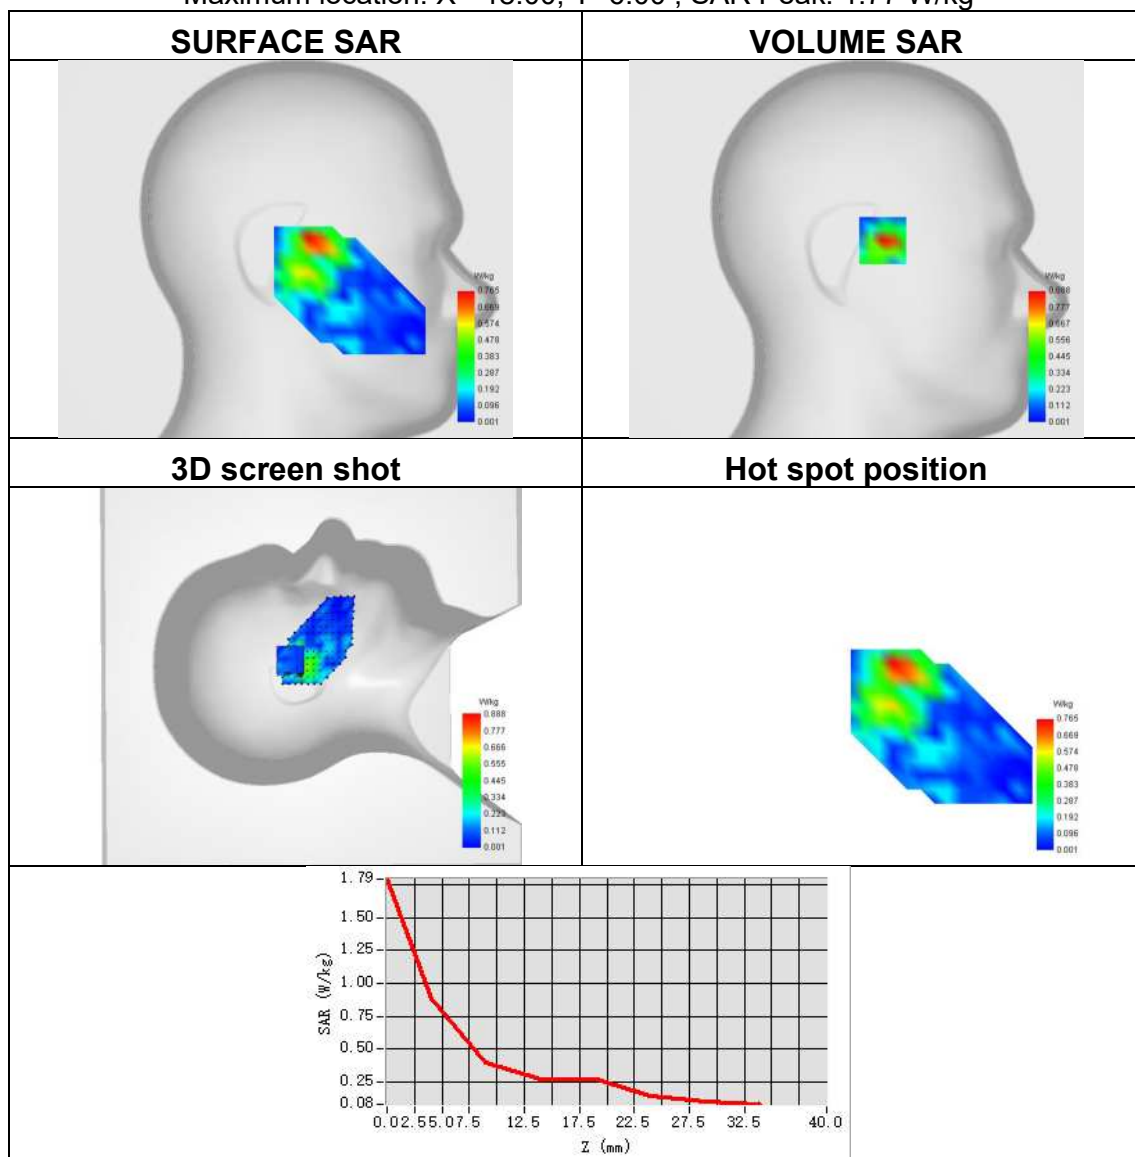




Plot 84:

Test Date	2025-05-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	NR band 7
Signal	NR FDD
Frequency	2560
SAR 10g (W/Kg)	0.347
SAR 1g (W/Kg)	0.554
ConvF	2.37
Relative permittivity	39.74
Conductivity (S/m)	2.02

Maximum location: X=8.00, Y=0.00 ; SAR Peak: 0.80 W/kg

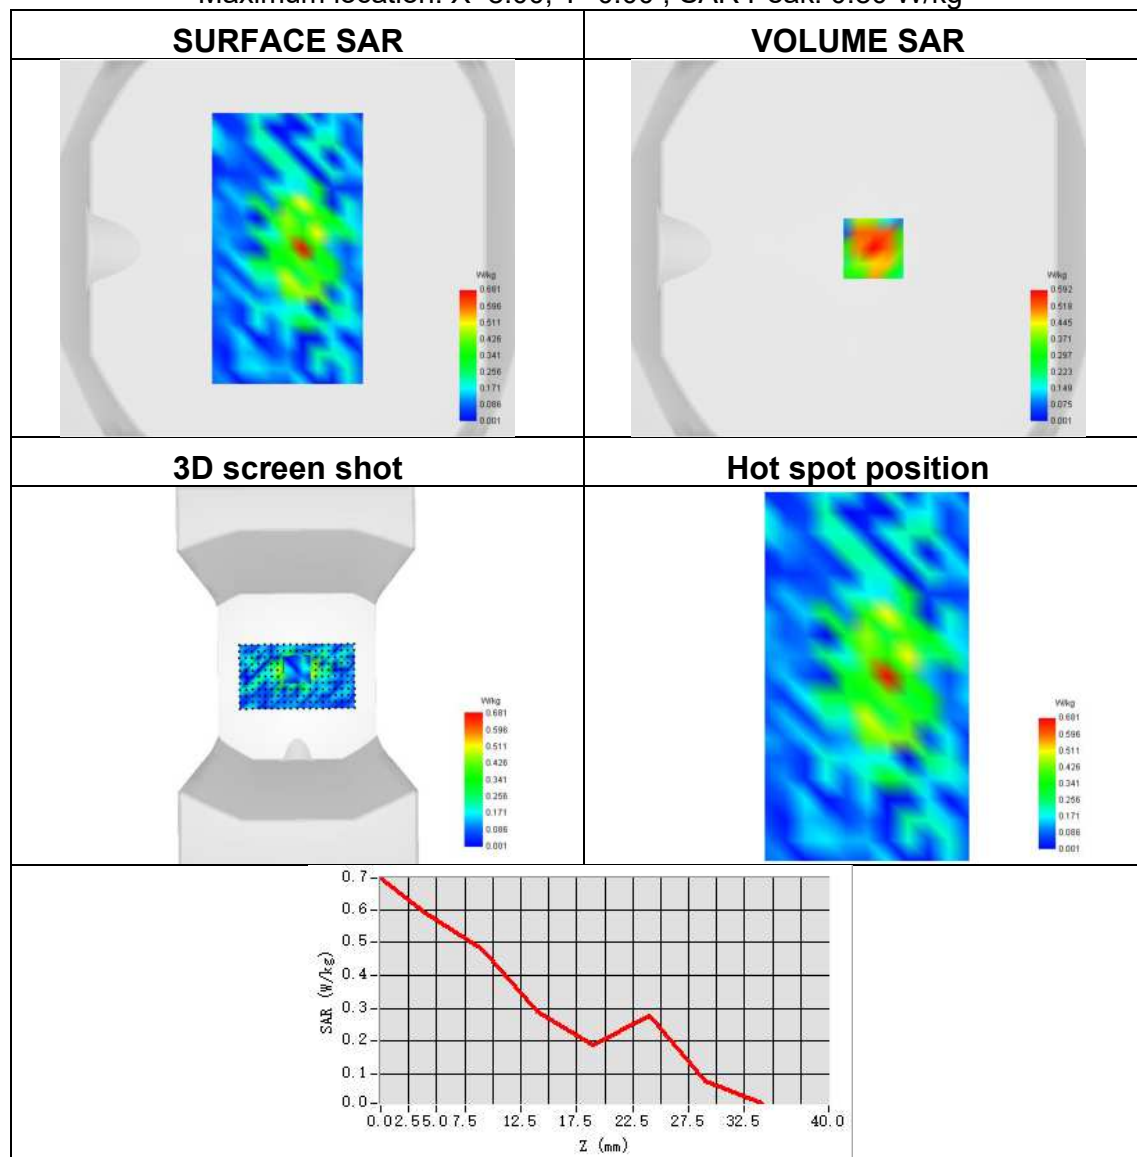




Plot 85:

Test Date	2025-05-17
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 25
Signal	NR FDD
Frequency	1860
SAR 10g (W/Kg)	0.439
SAR 1g (W/Kg)	0.916
ConvF	2.20
Relative permittivity	40.54
Conductivity (S/m)	1.39

Maximum location: X=-25.00, Y=-8.00 ; SAR Peak: 1.59 W/kg

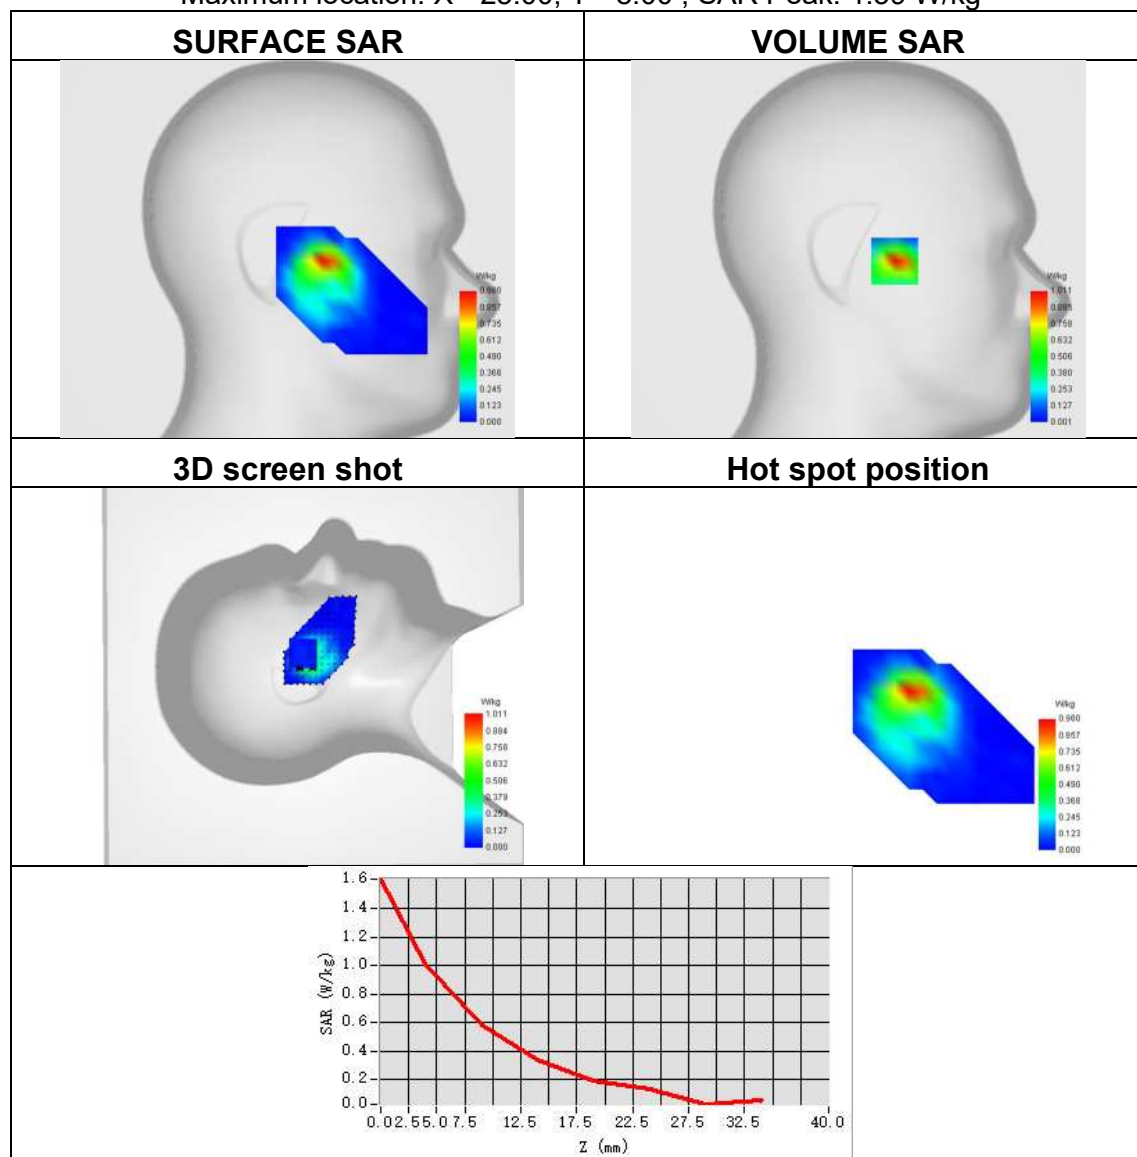




Plot 86:

Test Date	2025-05-17
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	NR band 25
Signal	NR FDD
Frequency	1860
SAR 10g (W/Kg)	0.254
SAR 1g (W/Kg)	0.522
ConvF	2.20
Relative permittivity	40.54
Conductivity (S/m)	1.39

Maximum location: X=2.00, Y=-1.00 ; SAR Peak: 0.97 W/kg

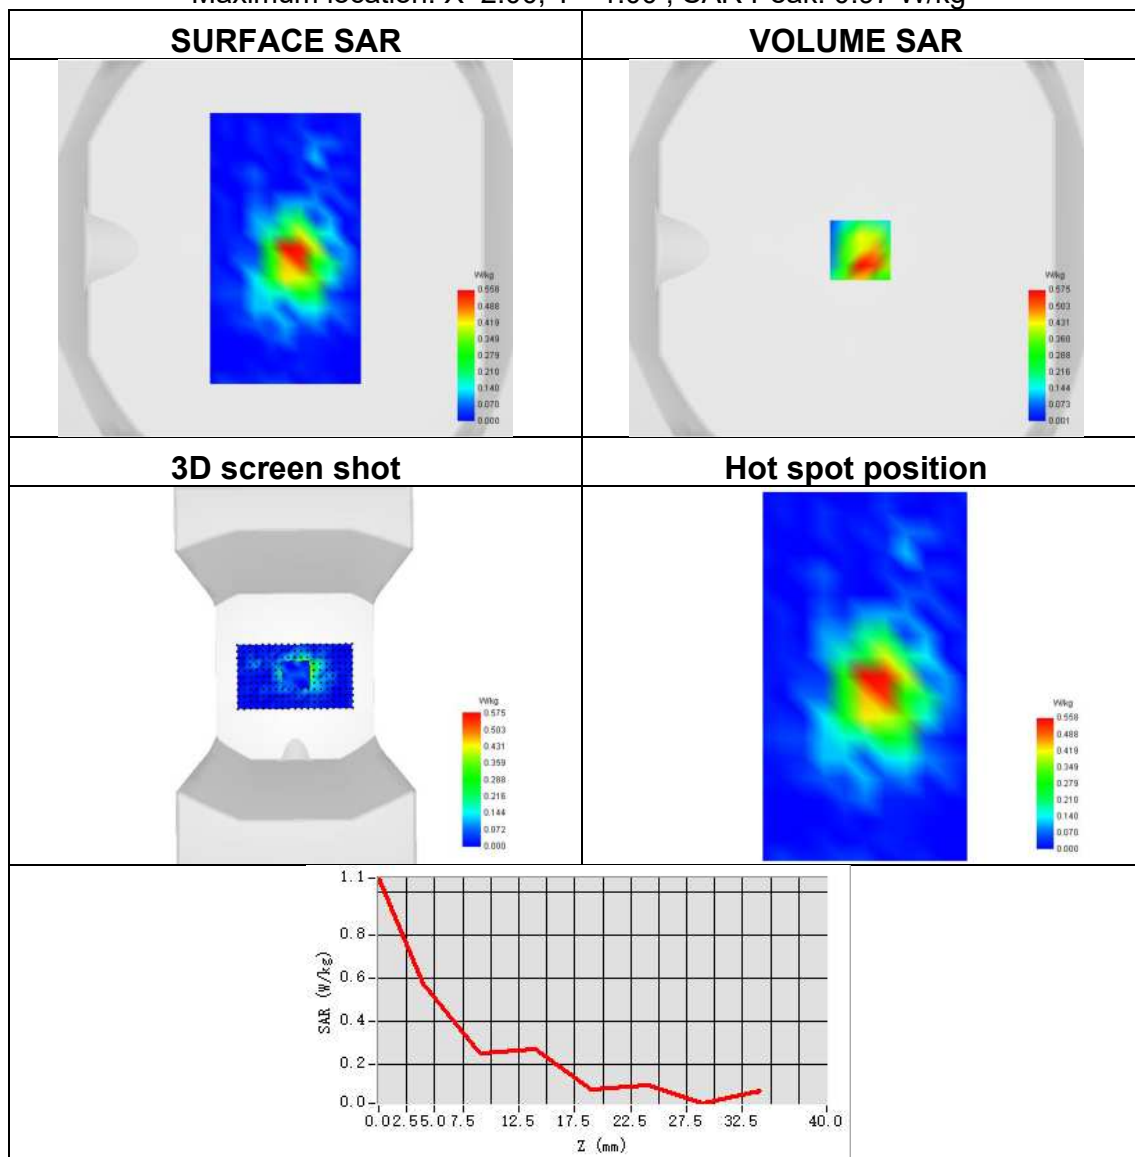




Plot 87:

Test Date	2025-05-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 26
Signal	NR FDD
Frequency	814.32
SAR 10g (W/Kg)	0.379
SAR 1g (W/Kg)	0.647
ConvF	1.72
Relative permittivity	41.25
Conductivity (S/m)	0.92

Maximum location: X=-46.00, Y=-49.00 ; SAR Peak: 1.07 W/kg

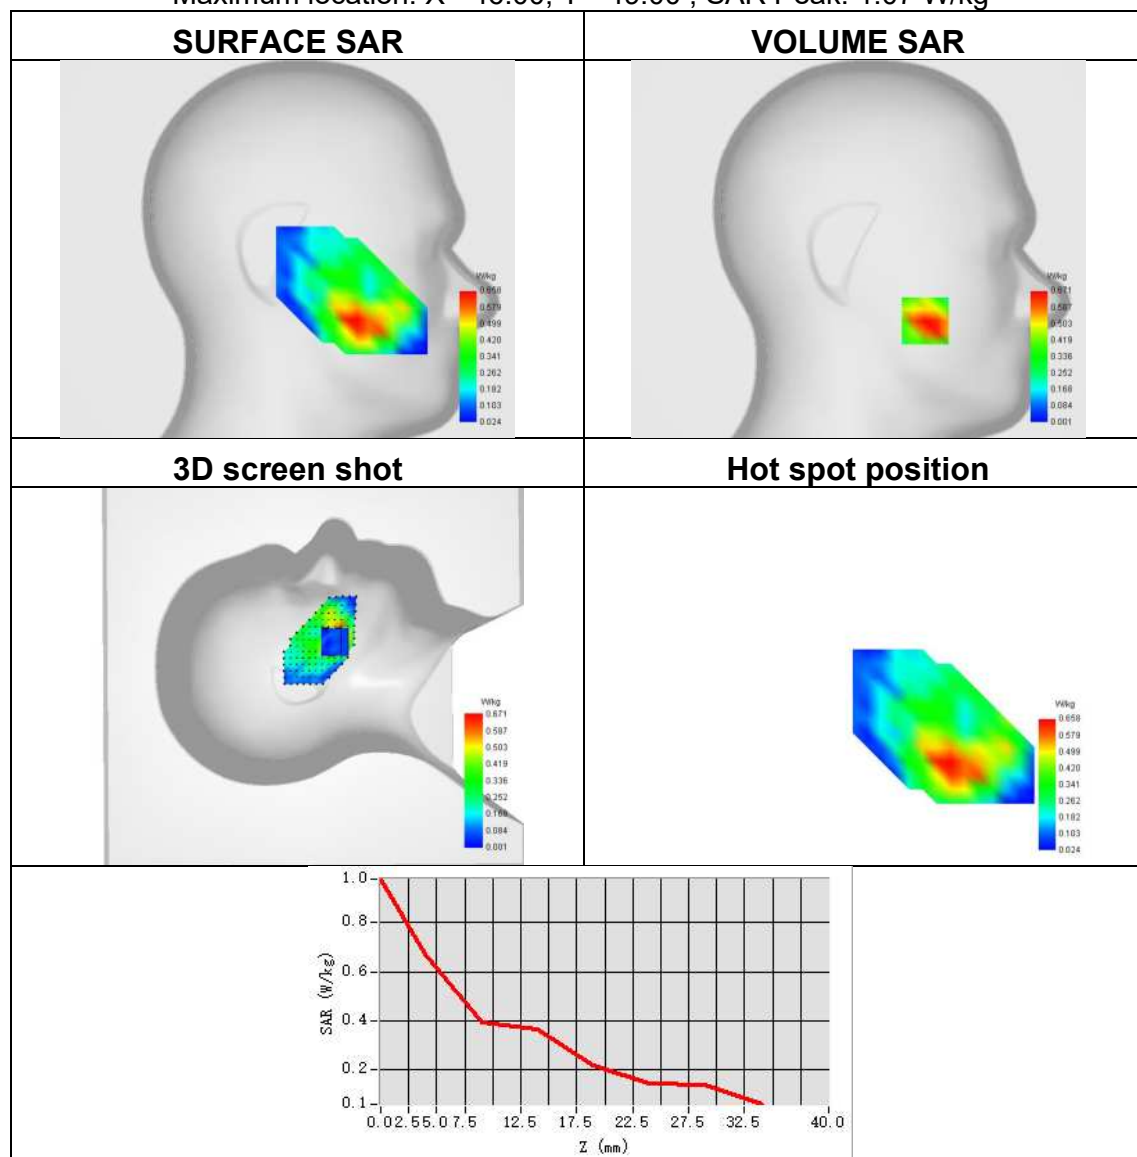




Plot 88:

Test Date	2025-05-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	NR band 26
Signal	NR FDD
Frequency	814.32
SAR 10g (W/Kg)	0.232
SAR 1g (W/Kg)	0.483
ConvF	1.72
Relative permittivity	41.25
Conductivity (S/m)	0.92

Maximum location: X=9.00, Y=1.00 ; SAR Peak: 0.96 W/kg

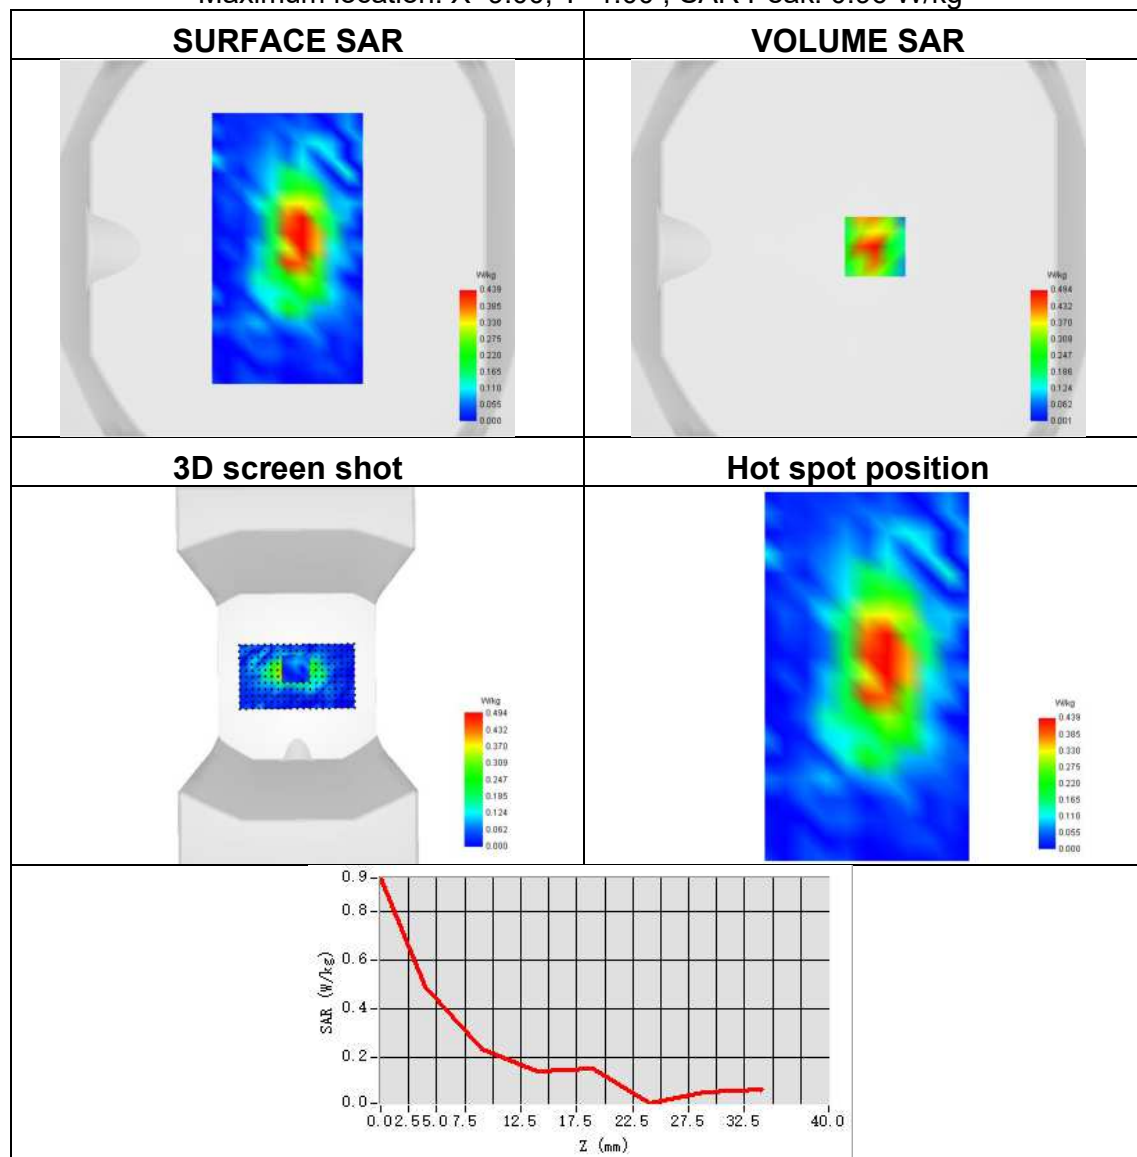




Plot 89:

Test Date	2025-05-13
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 38
Signal	NR TDD
Frequency	2600
SAR 10g (W/Kg)	0.357
SAR 1g (W/Kg)	0.781
ConvF	2.37
Relative permittivity	39.33
Conductivity (S/m)	1.98

Maximum location: X=-24.00, Y=0.00 ; SAR Peak: 1.45 W/kg

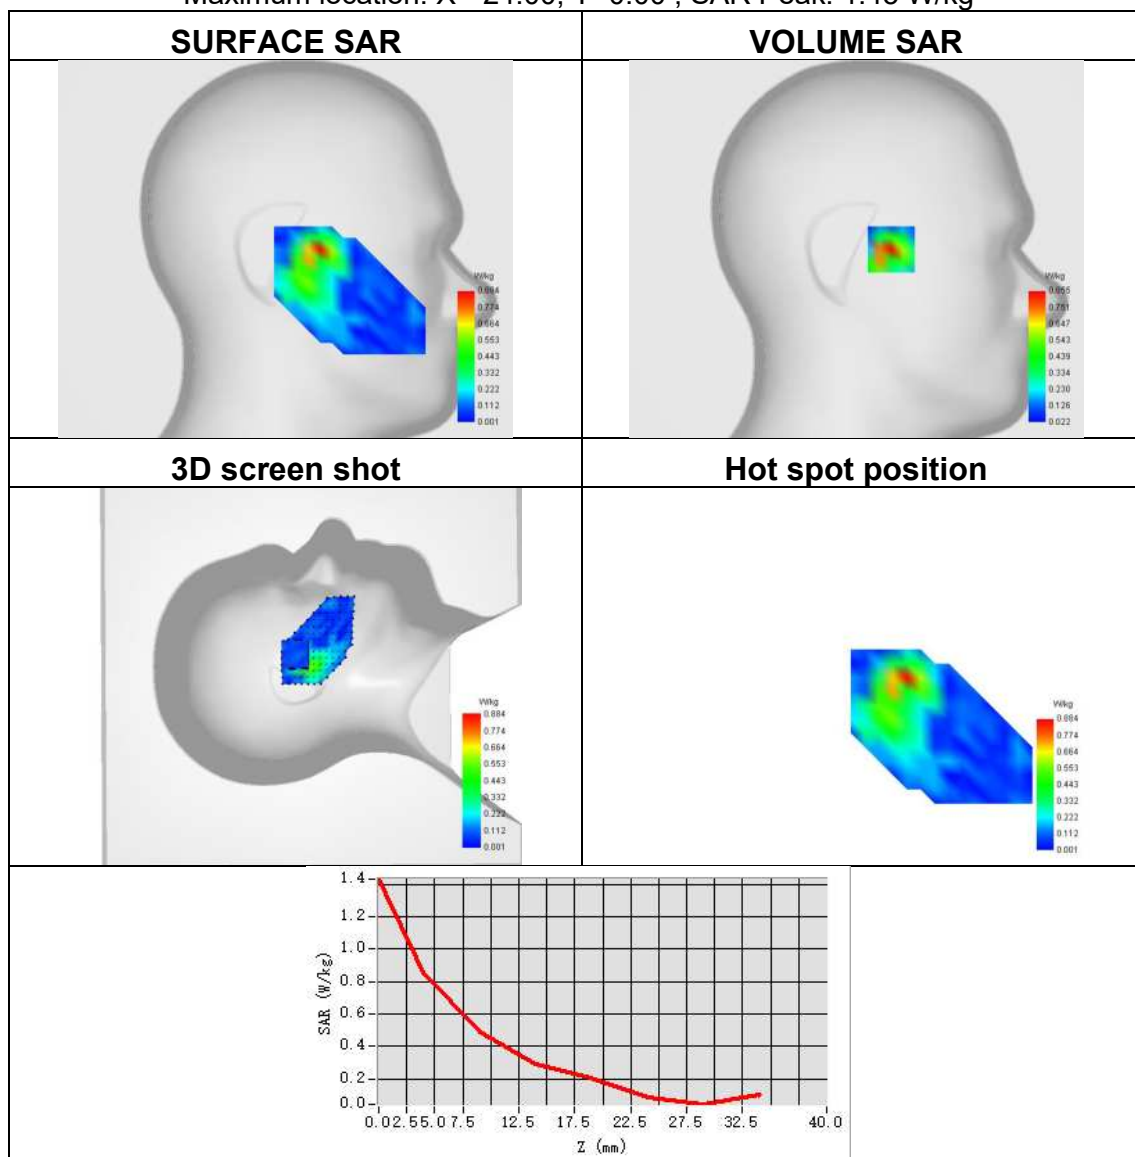




Plot 90:

Test Date	2025-05-13
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	NR band 38
Signal	NR TDD
Frequency	2600
SAR 10g (W/Kg)	0.298
SAR 1g (W/Kg)	0.570
ConvF	2.37
Relative permittivity	39.33
Conductivity (S/m)	1.98

Maximum location: X=12.00, Y=-2.00 ; SAR Peak: 1.03 W/kg

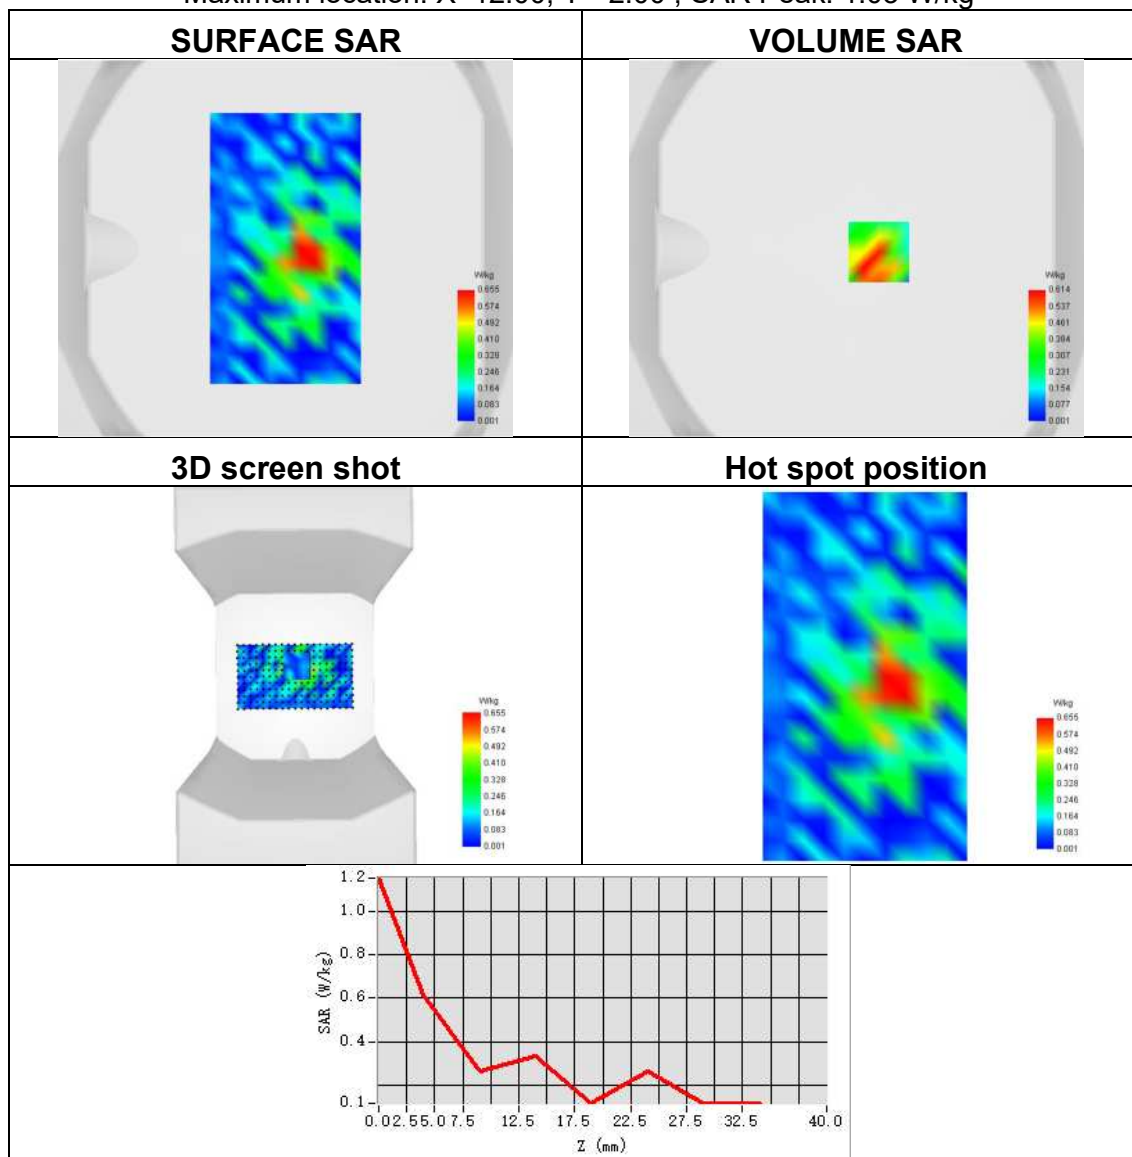




Plot 91:

Test Date	2025-05-13
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 41
Signal	NR TDD
Frequency	2640
SAR 10g (W/Kg)	0.167
SAR 1g (W/Kg)	0.301
ConvF	2.37
Relative permittivity	39.33
Conductivity (S/m)	1.98

Maximum location: X=-22.00, Y=1.00 ; SAR Peak: 1.06 W/kg

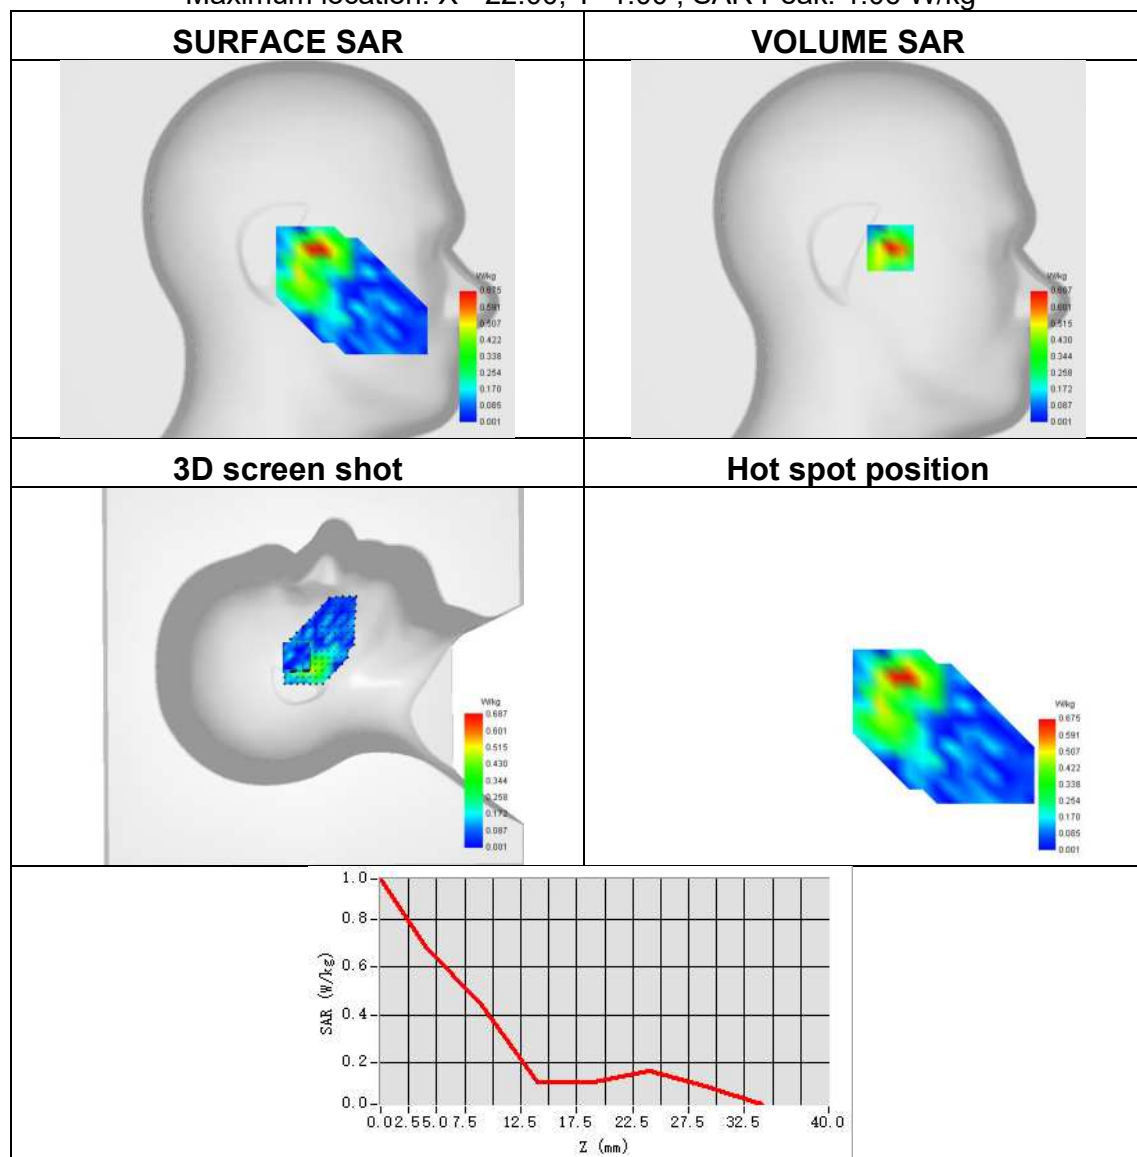




Plot 92:

Test Date	2025-05-13
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	NR band 41
Signal	NR TDD
Frequency	2640
SAR 10g (W/Kg)	0.182
SAR 1g (W/Kg)	0.321
ConvF	2.37
Relative permittivity	39.33
Conductivity (S/m)	1.98

Maximum location: X=8.00, Y=15.00 ; SAR Peak: 1.05 W/kg

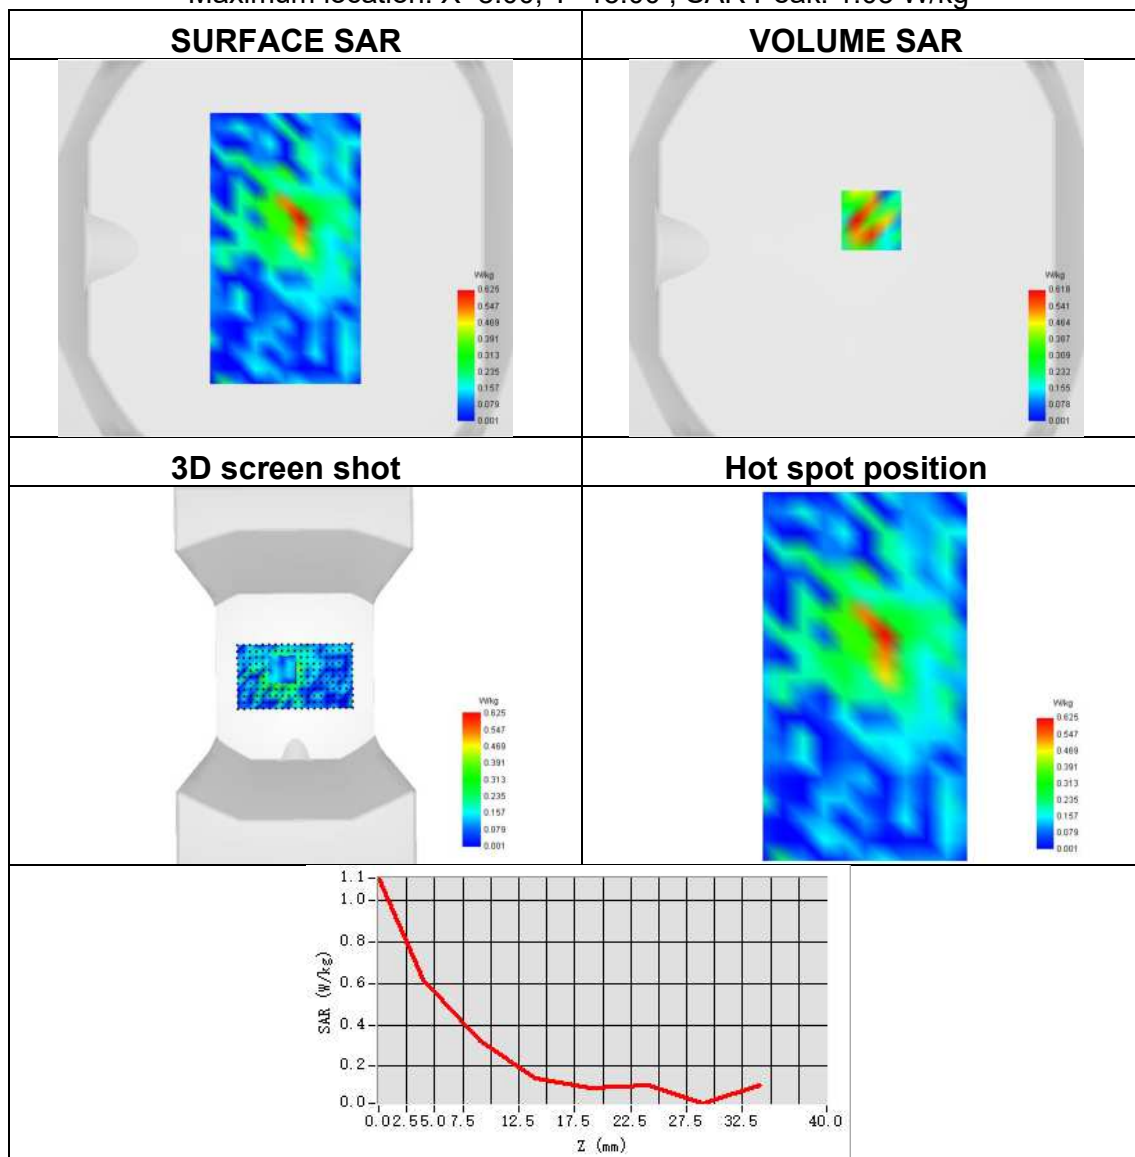




Plot 93:

Test Date	2025-05-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	NR band 66
Signal	NR FDD
Frequency	1712.5
SAR 10g (W/Kg)	0.418
SAR 1g (W/Kg)	0.900
ConvF	1.92
Relative permittivity	40.65
Conductivity (S/m)	1.35

Maximum location: X=-18.00, Y=-7.00 ; SAR Peak: 1.65 W/kg

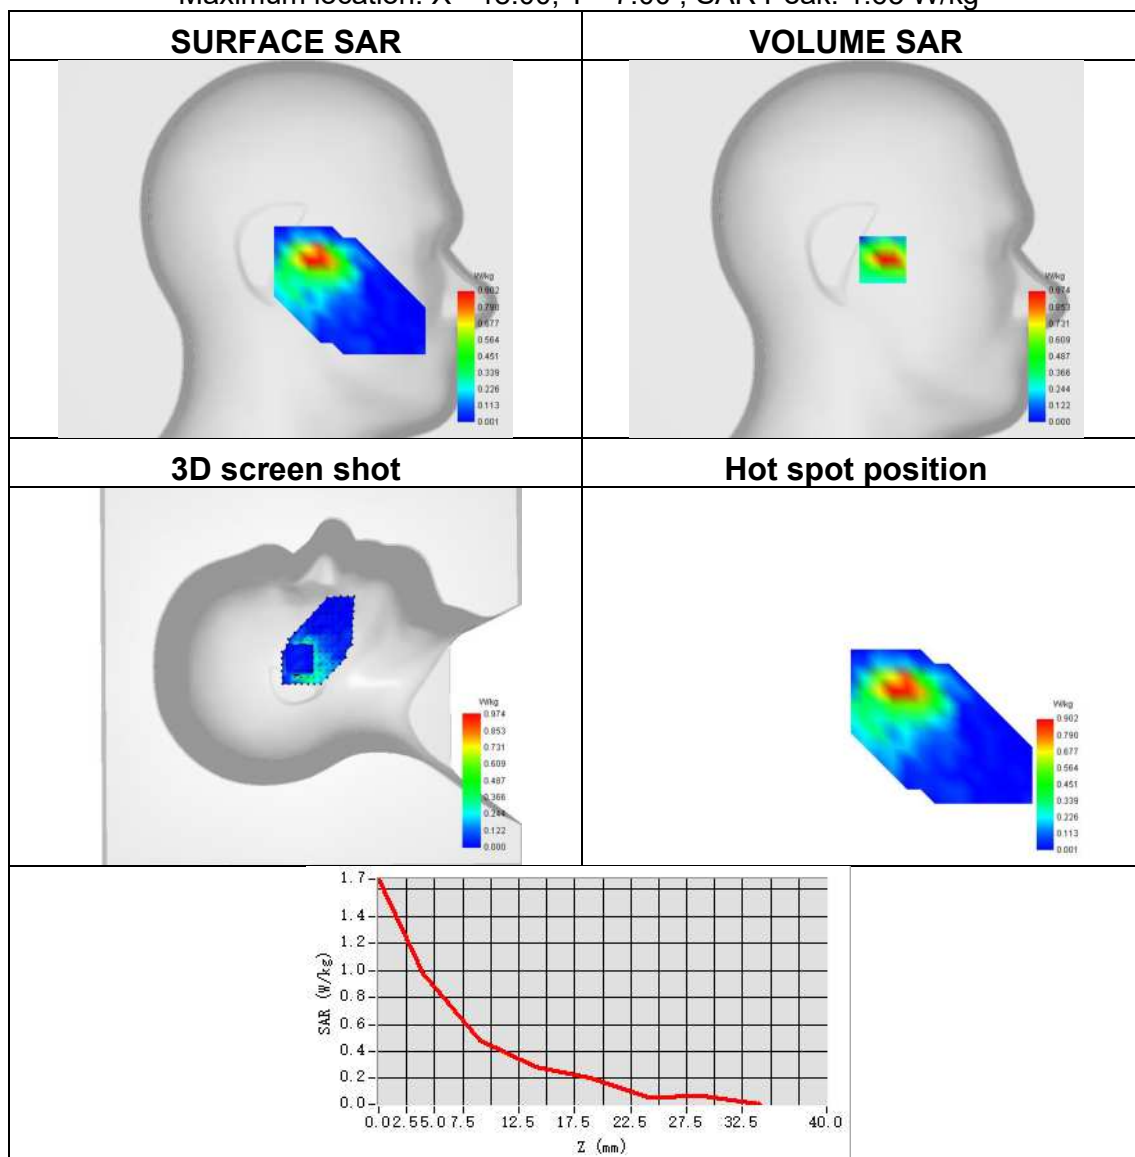




Plot 94:

Test Date	2025-05-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	NR band 66
Signal	NR FDD
Frequency	1712.5
SAR 10g (W/Kg)	0.137
SAR 1g (W/Kg)	0.304
ConvF	1.92
Relative permittivity	40.65
Conductivity (S/m)	1.35

Maximum location: X=1.00, Y=-14.00 ; SAR Peak: 0.59 W/kg

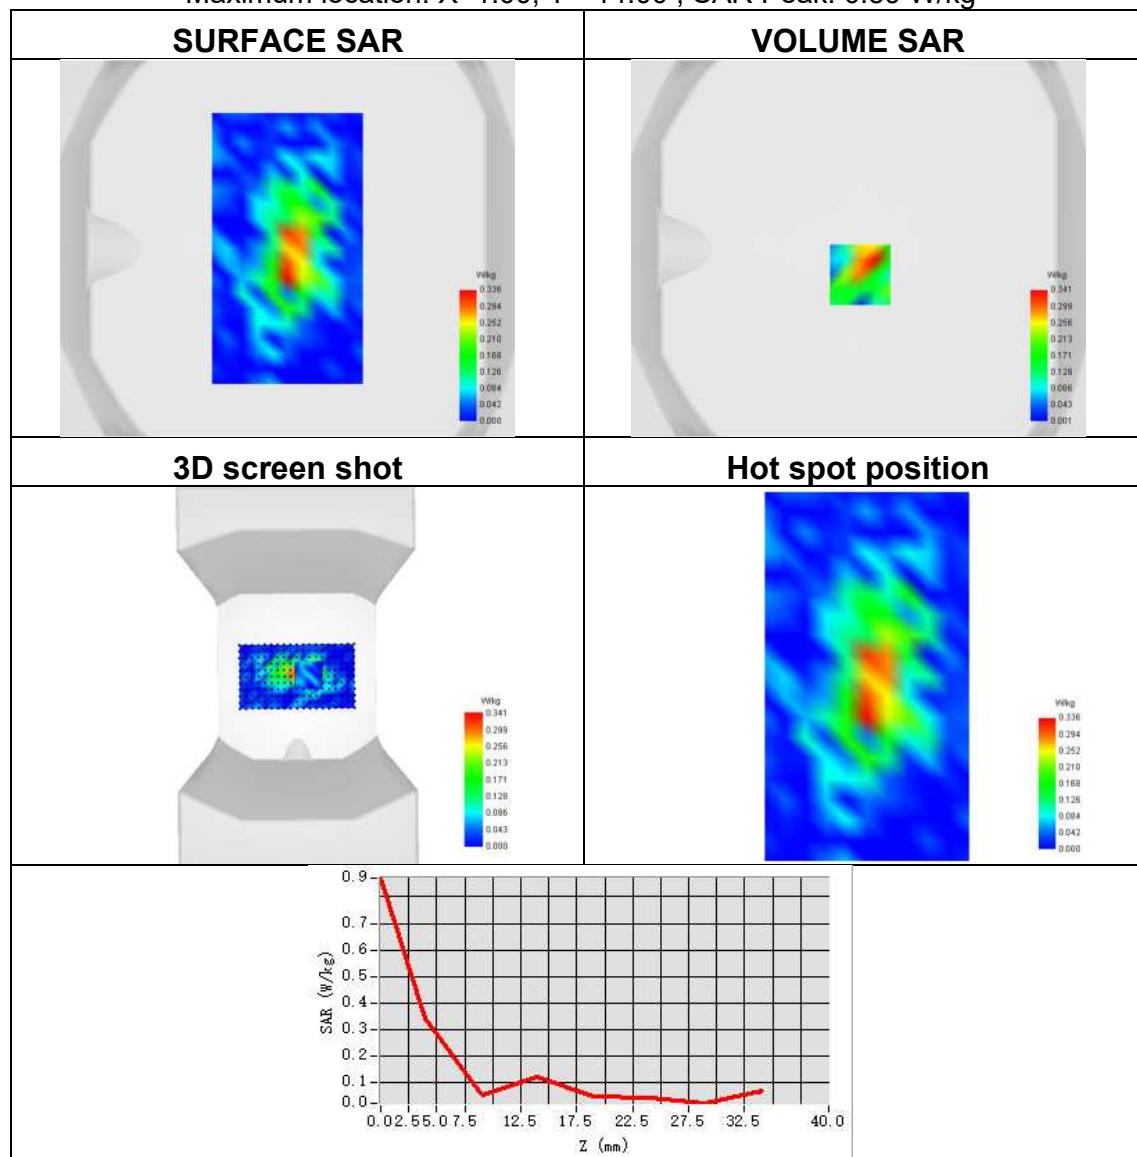




Plot 95:

Test Date	2025-05-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 71
Signal	NR FDD
Frequency	680.5
SAR 10g (W/Kg)	0.298
SAR 1g (W/Kg)	0.619
ConvF	1.67
Relative permittivity	42.73
Conductivity (S/m)	0.93

Maximum location: X=-56.00, Y=-23.00 ; SAR Peak: 1.05 W/kg

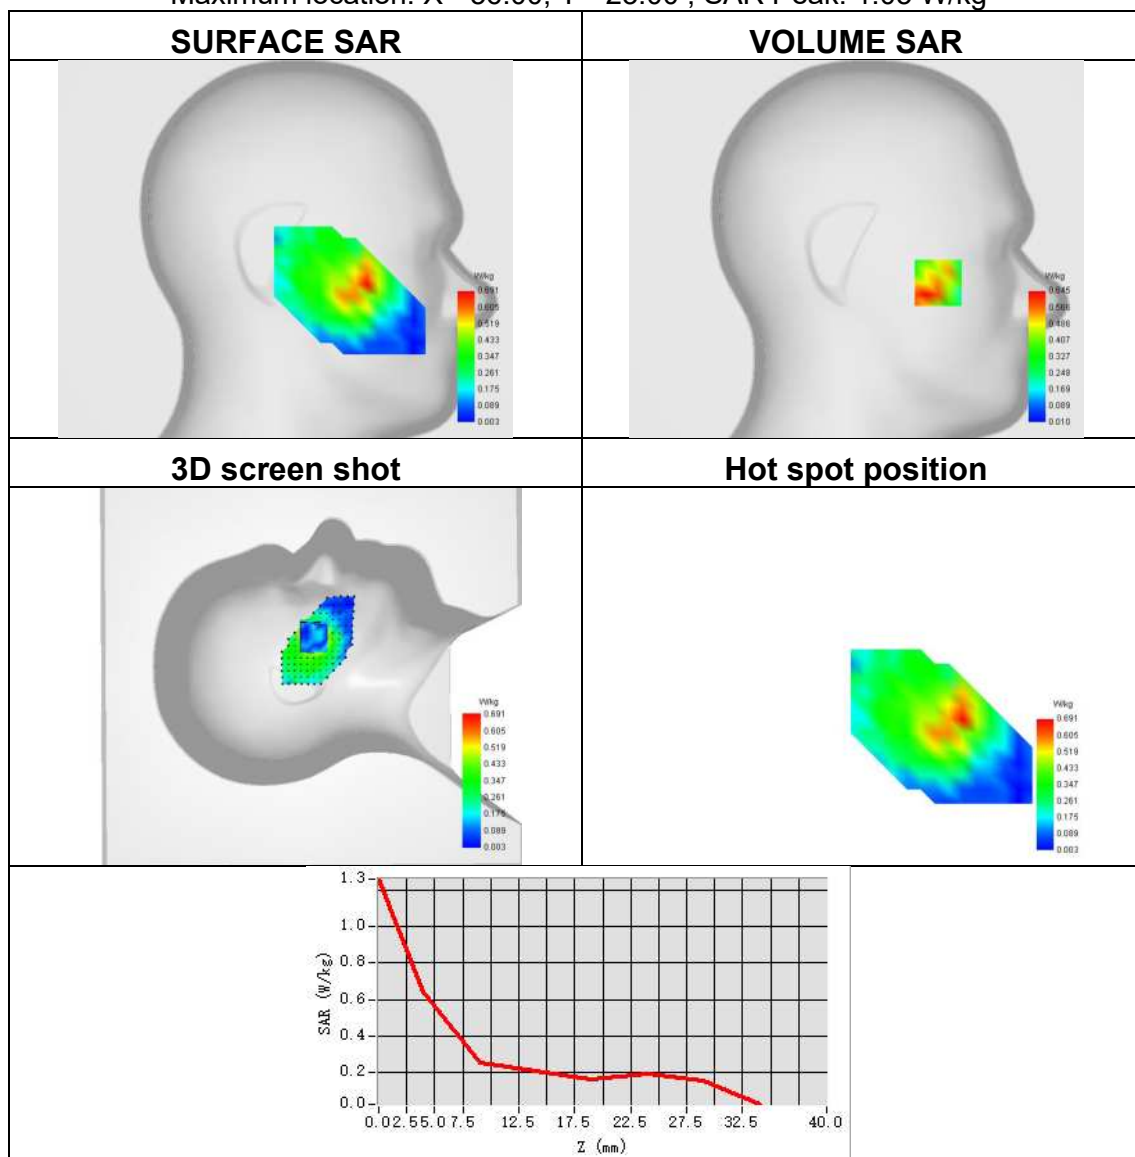




Plot 96:

Test Date	2025-05-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	NR band 71
Signal	NR FDD
Frequency	680.5
SAR 10g (W/Kg)	0.106
SAR 1g (W/Kg)	0.275
ConvF	1.67
Relative permittivity	42.73
Conductivity (S/m)	0.93

Maximum location: X=1.00, Y=0.00 ; SAR Peak: 0.72 W/kg

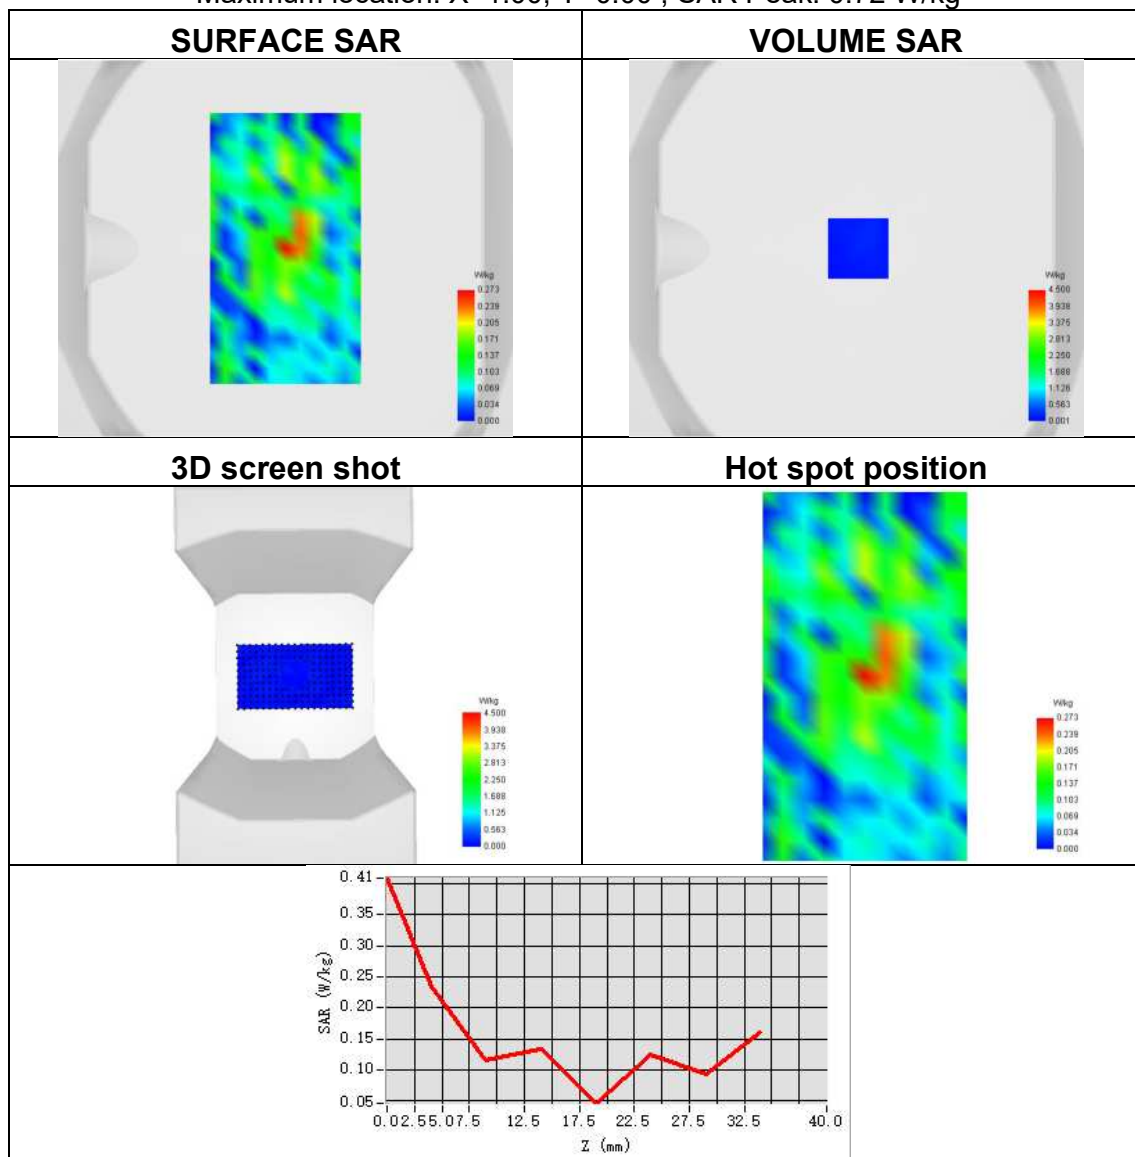




Plot 97:

Test Date	2025-05-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	NR band 77
Signal	NR TDD
Frequency	3840
SAR 10g (W/Kg)	0.272
SAR 1g (W/Kg)	0.671
ConvF	1.81
Relative permittivity	38.80
Conductivity (S/m)	3.25

Maximum location: X=-46.00, Y=-14.00 ; SAR Peak: 2.04 W/kg

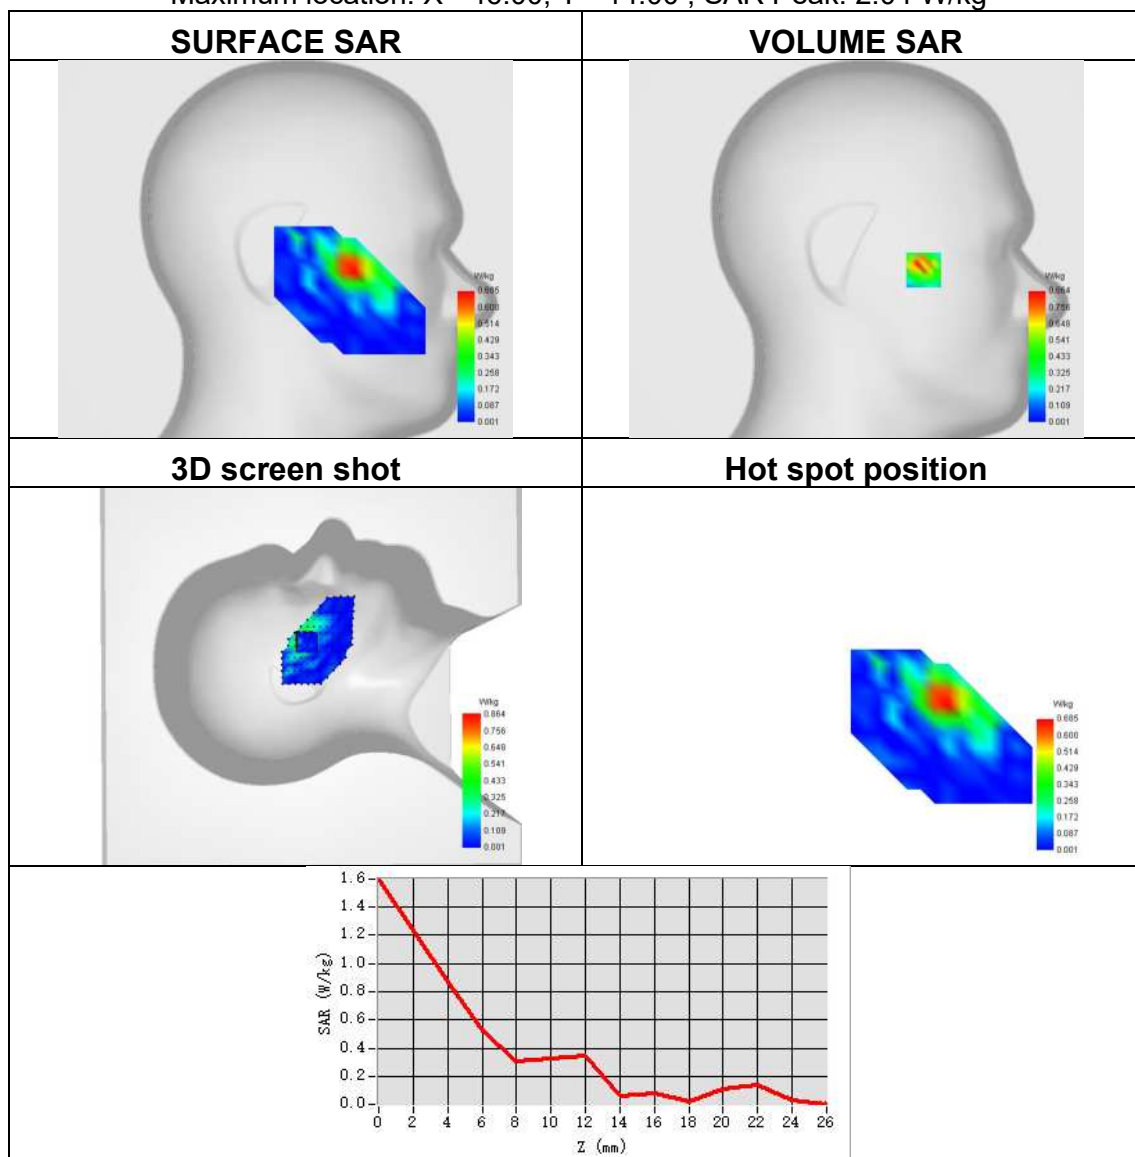




Plot 98:

Test Date	2025-05-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	NR band 77
Signal	NR TDD
Frequency	3840
SAR 10g (W/Kg)	0.326
SAR 1g (W/Kg)	0.695
ConvF	1.81
Relative permittivity	38.80
Conductivity (S/m)	3.25

Maximum location: X=5.00, Y=-31.00 ; SAR Peak: 2.54 W/kg

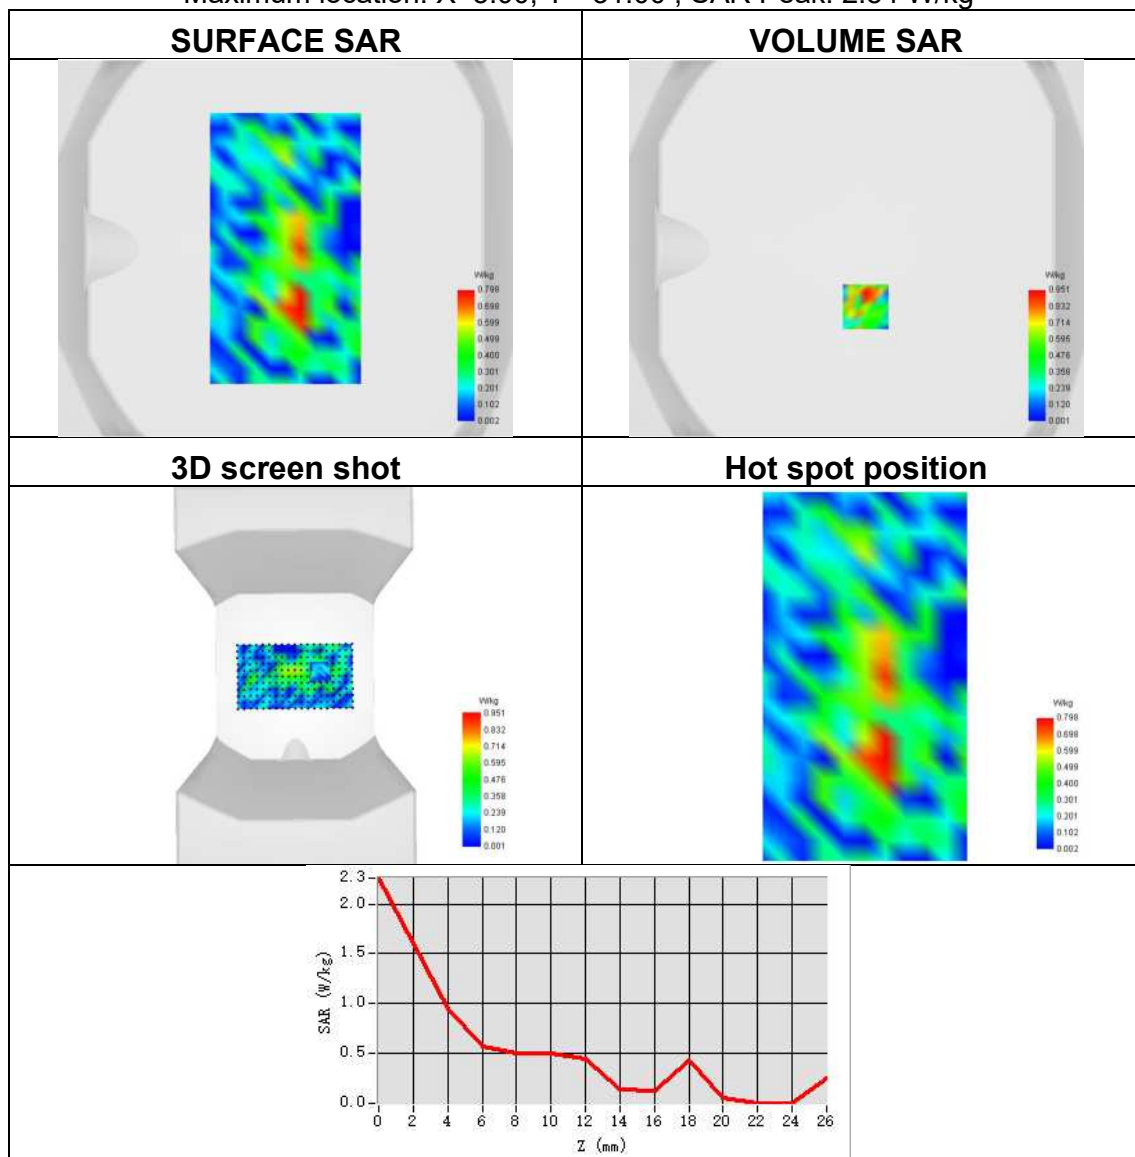




Plot 99:

Test Date	2025-05-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	NR band 78
Signal	NR TDD
Frequency	3750
SAR 10g (W/Kg)	0.099
SAR 1g (W/Kg)	0.218
ConvF	1.81
Relative permittivity	38.25
Conductivity (S/m)	3.09

Maximum location: X=-56.00, Y=-49.00 ; SAR Peak: 1.66 W/kg

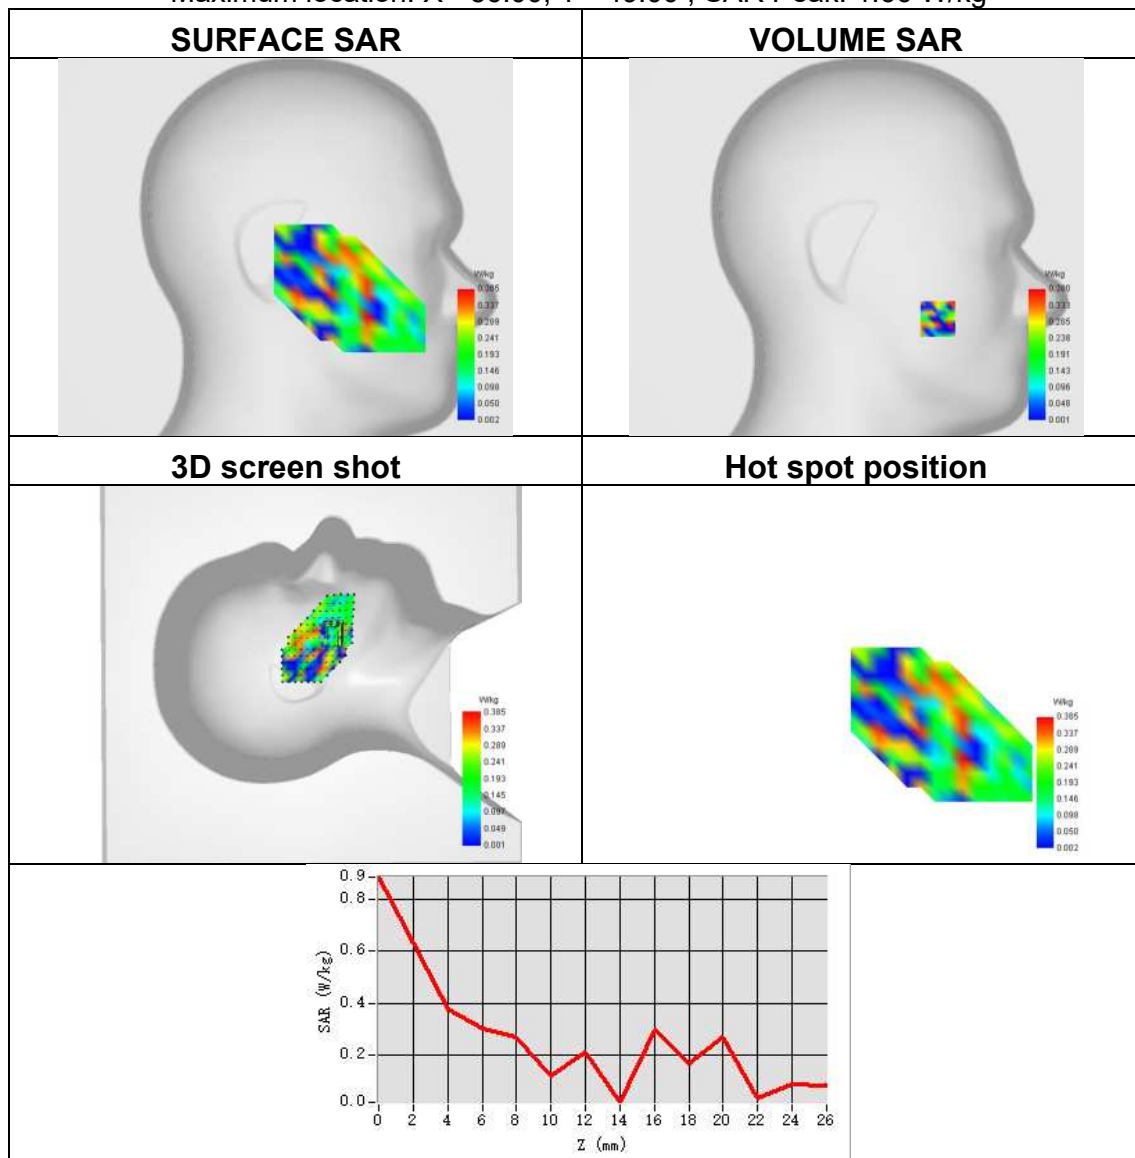




Plot 100:

Test Date	2025-05-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	NR band 78
Signal	NR TDD
Frequency	3750
SAR 10g (W/Kg)	0.289
SAR 1g (W/Kg)	0.724
ConvF	1.81
Relative permittivity	38.25
Conductivity (S/m)	3.09

Maximum location: X=11.00, Y=-31.00 ; SAR Peak: 2.04 W/kg

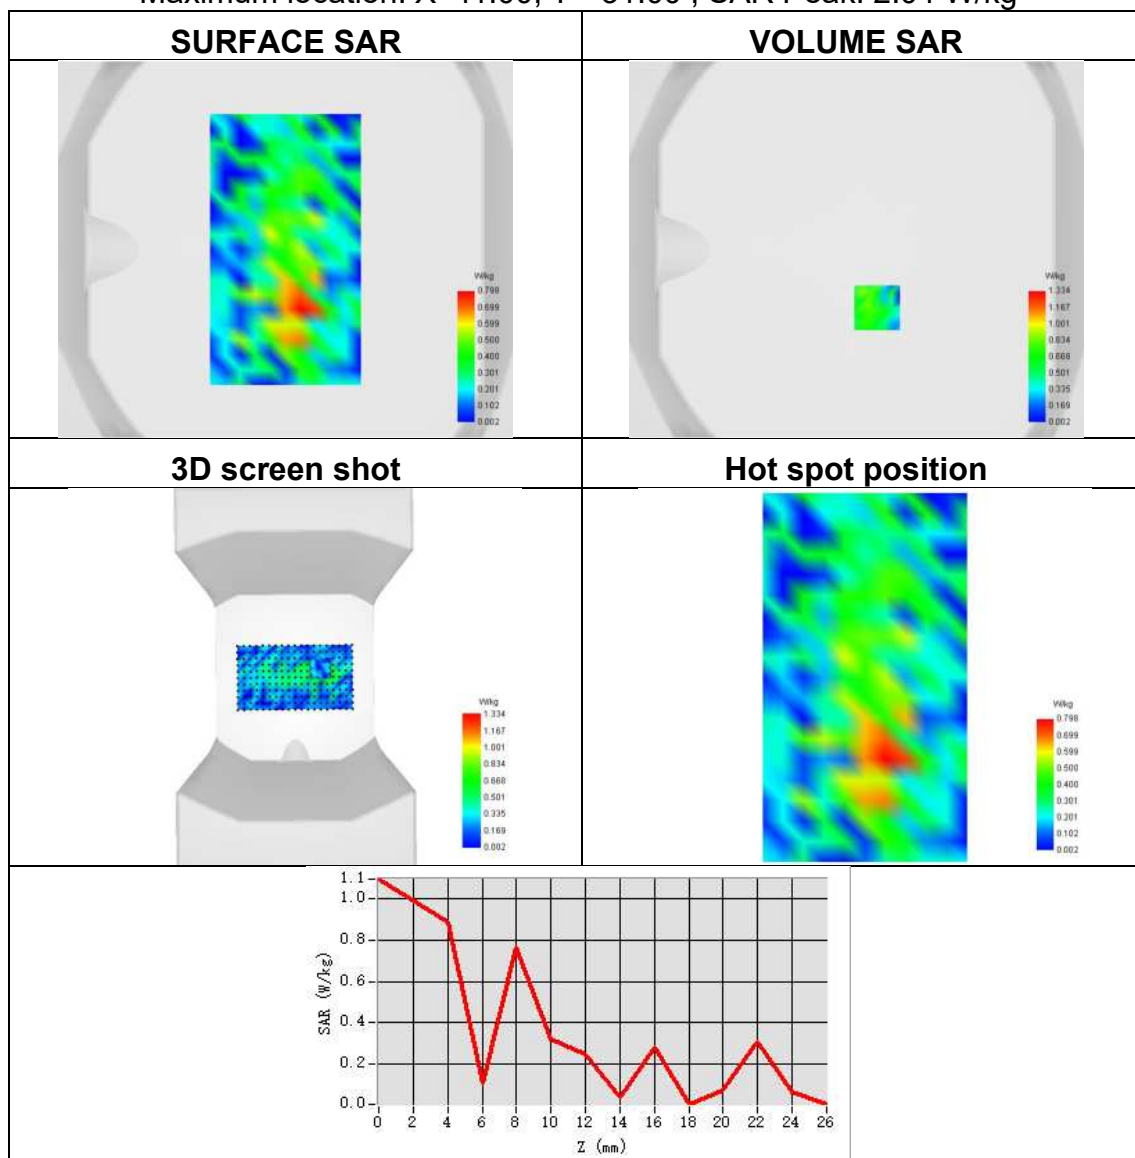



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※※END OF THE REPORT※※※※※