

EMC TEST REPORT

FCC 47 CFR Part 15B Industry Canada ICES-003

Electromagnetic compatibility - Unintentional radiators

Report Reference No. G0M-1703-6374-EF0115B-V01

Testing Laboratory: Eurofins Product Service GmbH

Address: Storkower Str. 38c

15526 Reichenwalde

Germany

Accreditation:





A2LA Accredited Testing Laboratory, Certificate No.: 1983.01

FCC Filed Test Laboratory, Reg.-No.: 96970 IC OATS Filing assigned code: 3470A

Applicant's name: Liftup A/S

Address: Hagensvej 21

DK-9530 Støvring

DENMARK

Test specification:

Standard.....: 47 CFR Part 15 Subpart B

ICES-003, Issue 6:2016

ANSI C63.4:2014

Equipment under test (EUT):

Product description Remote

Model No. 104016

Additional Models None

Hardware version D

Firmware / Software version 1

FCC-ID: 2AK8H-REMOTE1 IC: 22516-REMOTE1

Test result Passed



-							-
	OCCI	hl	toc	+ 0-	1001	IAMA	icts:
	0551	LJIE		1 1.0	150 1	/e/()	11.15

- not applicable to test object N/A

- test object does meet the requirement..... P (Pass)

- test object does not meet the requirement..... F (Fail)

Testing:

Date of receipt of test item 2017-03-27

Compiled by: Matthias Handrik

Tested by (+ signature).....: Matthias Handrik

Approved by (+ signature):

Deputy Head of Lab

Jens Marquardt

Date of issue : 2017-04-07

Total number of pages: 23

General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:



Version History

Version	Issue Date	Remarks	Revised by
V01	2017-04-07	Initial Release	



REPORT INDEX

1	EQUIPMENT (TEST ITEM) DESCRIPTION	5
1.1	Photos – Equipment external	6
1.2	Photos – Equipment internal	7
1.3	Photos – Test setup	8
1.4	Supporting Equipment Used During Testing	9
1.5	Input / Output Ports	9
1.6	Operating Modes and Configurations	10
1.7	Test Equipment Used During Testing	11
1.8	Sample emission level calculation	12
2	RESULT SUMMARY	13
3	TEST CONDITIONS AND RESULTS	14
3.1	Test Conditions and Results – Radiated emissions	14



1 Equipment (Test item) Description

Description	Remote
Model	104016
Additional Models	None
Serial number	None
Hardware version	D
Software / Firmware version	1
Contains FCC-ID	2AK8H-REMOTE1
Contains IC	22516-REMOTE1
Power supply	3V DC (non-rechargeable battery)
AC/DC-Adaptor	None
Manufacturer	Liftup A/S Hagensvej 21 DK- 9530 Støvring DENMARK
Highest emission frequency	> 1000 MHz (up to 5th Harm)
Device classification	Class B
Equipment type	Tabletop
Number of tested samples	1




1.1 Photos – Equipment external









1.2 Photos – Equipment internal

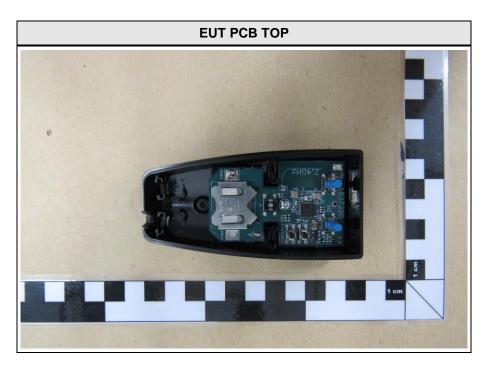

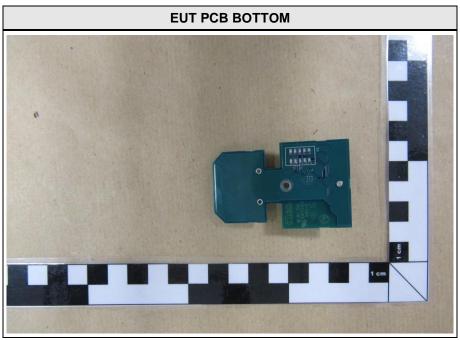



1.3 Photos – Test setup

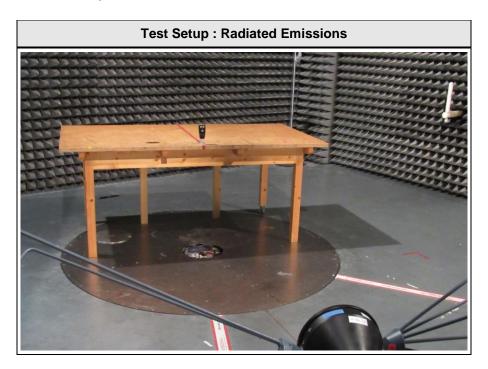



1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments (e.g. serial no.)					
	None								
*Note: Use	*Note: Use the following abbreviations:								
AE:	AE : Auxiliary/Associated Equipment, or								
SIM:	SIM : Simulator (Not Subjected to Test)								
CABL:	Connecting cables								

1.5 Input / Output Ports

Port #	Name	Type*	Max. Cable Length	Cable Shielded	Comments (e.g. Cat. of Cable)			
1	-	-	-	-	-			
4.8.1								

*Note: Use the following abbreviations:

AC : AC power port
DC : DC power port
N/E : Non electrical

I/O : Signal input or output port

TP : Telecommunication port



1.6 Operating Modes and Configurations

Mode #	Description
1	Active transmit in the 2.4GHz ISM Band

Configuration #	EUT Configuration
1	EUT is placed inside the measurement chamber. The transmit button on the EUT is permanently pressed.



1.7 Test Equipment Used During Testing

Measurement Software					
Description Manufacturer		Name	Version		
EMC Test Software	EMC Test Software Dare Instruments		2016.1.10		

Radiated emissions AC1								
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due			
Biconical Antenna	R&S	HK 116	EF00030	2016-04	2019-04			
LPD Antenna	R&S	HL 223	EF00187	2016-05	2019-05			
Horn antenna	Schwarzbeck	BBHA 9120D	EF00018	2016-09	2019-09			
MXE EMI Receiver	Keysight Technologies	N9038A- 526/WXP	EF01070	2016-08	2017-08			
RF Cable			-	System Cal.	System Cal			
RF Cable			-	System Cal.	System Cal			



1.8 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in $dB\mu V$. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

Reading on Analyzer (dB μ V) + A.F. (dB) = Net field strength (dB μ V/m)

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of $dB\mu V/m$). The FCC limits are given in units of $\mu V/m$. The following formula is used to convert the units of $\mu V/m$ to $dB\mu V/m$:

Limit $(dB\mu V/m) = 20*log (\mu V/m)$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF = Net Reading : Net reading - FCC limit = Margin 21.5 dB μ V + 26 dB = 47.5 dB μ V/m : 47.5 dB μ V/m - 57.0 dB μ V/m = -9.5 dB



2 Result Summary

FCC 47 CFR Part 15B, Industry Canada ICES-003						
Remarks	Result	Reference Method	Requirement – Test	Product Specific Standard		
	PASS	ANSI C 63.4	Radiated emissions	47 CFR 15.109 ICES-003 Item 6.2		
	N/A	ANSI C63.4	AC power line conducted emissions	47 CFR 15.107 ICES-003 Item 6.1		
	IV/A	AINSI C03.4	Δί nower line conducted emissions			



3 Test Conditions and Results

3.1 Test Conditions and Results - Radiated emissions

Radiated emission	ons acc. FCC 47 C	FR 15.109	9 / ICES-003		Verdict:	PASS	
Laboratory	Parameters:	Requir	ed prior to the test	During the test			
Ambient T	emperature		15 to 35 °C		23°C		
Relative	Humidity		30 to 60 %		32%		
Test accordi	ng referenced		Reference	e Metho	d		
stan	dards		ANSI	C63.4			
Sample is tested	with respect to the		Equipmo	ent class			
requirements of the	ne equipment class		Cla	ss B			
Test frequency ran	ge determined from		Highest emiss	sion freq	uency		
highest emiss	sion frequency	> 1000 MHz (up to 5th Harm)					
Fully configured sa	ample scanned over	Frequency range					
the following fi	requency range	30 MHz to 13 GHz					
Operati	ng mode	1					
Config	juration	1					
	L	imits and	results Class B				
Frequency [MHz]	Quasi-Peak [dBµV/r	n] Result	Average [dBµV/m]	Result	Peak [dBµV/m]	Result	
30 – 88	40	PASS	-		-	-	
88 – 216	43.5	PASS	-		-	-	
216 – 960	46	PASS	-		-	-	
960 – 1000	54	PASS	-		-	-	
> 1000	-	-	54	PASS	74	PASS	
Comments:							



Test Procedure:

The test site is in accordance with ANSI C63-4:2014 requirements and is listed by FCC. The measurement procedure is as follows:

Exploratory measurement:

- The EUT was placed on a non-conductive table at a height of 0.8m.
- The EUT and support equipment, if needed, were set up to simulate typical usage.
- Cables, of type and length specified by the manufacturer, were connected to at least one port of each type and were terminated by a device or simulating load of actual usage.
- The antenna was placed at a distance of 3 or 10 m.
- The received signal was monitored at the measurement receiver.
 - Cables not bundled were manipulated within the range of likely arrangements to produce the highest emission amplitude
 - To maximize the suspected emissions the EUT is rotated 360 degrees. If the signal exceeds the previous amplitude, go back to the corresponding azimuth and manipulate the cables again for maximizing the emissions if possible.
 - Move the antenna from 1 to 4m to maximize the suspected highest amplitude signal.
- This procedure has to be performed in both antenna polarizations, horizontal and vertical.
- The arrangement of the equipment with the maximum emission level is shown on the setup picture at item 1.3.

Final measurement:

- The EUT was placed on a 0.8 m non-conductive table at a 3 m distance from the receive antenna. The antenna output was connected to the measurement receiver
- A biconical antenna was used for the frequency range 30 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast
- The EUT and cable arrangement were based on the exploratory measurement results
- Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded.
- The test data of the worst-case conditions were recorded and shown on the next pages.



Project number: G0M-1703-6374

Applicant: Liftup A/S EUT Name: Remote Model: 104016

Test Site: Eurofins Product Service GmbH


Operator: Mr. Handrik

Test Conditions: Tnom: 23°C, Unom: 3.0V

Antenna: Rohde & Schwarz HK 116, Vertical

Measurement distance: 3m Mode: Mode#1 Test Date: 2017-04-06

Note:

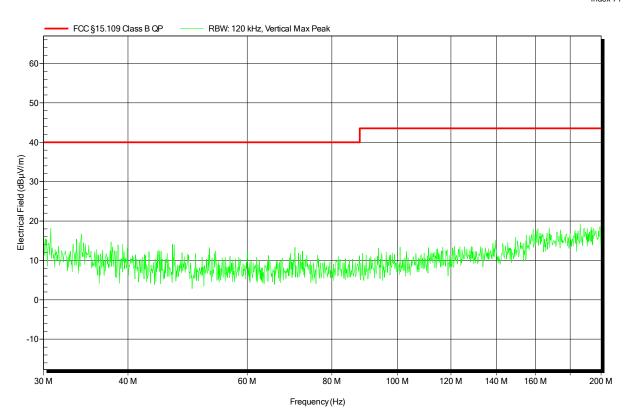



Project number: G0M-1703-6374

Applicant: Liftup A/S EUT Name: Remote Model: 104016

Test Site: Eurofins Product Service GmbH


Operator: Mr. Handrik

Test Conditions: Tnom: 23°C, Unom: 3.0V

Antenna: Rohde & Schwarz HK 116, Horizontal

Measurement distance: 3m Mode: Mode#1 Test Date: 2017-04-06

Note:

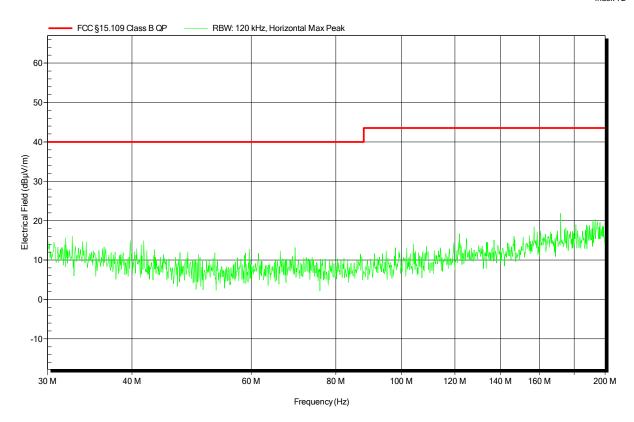



Project number: G0M-1703-6374

Applicant: Liftup A/S EUT Name: Remote Model: 104016

Test Site: Eurofins Product Service GmbH


Operator: Mr. Handrik

Test Conditions: Tnom: 23°C, Unom: 3.0V

Antenna: Rohde & Schwarz HL 223, Vertical

Measurement distance: 3m Mode: Mode#1 Test Date: 2017-04-06

Note:

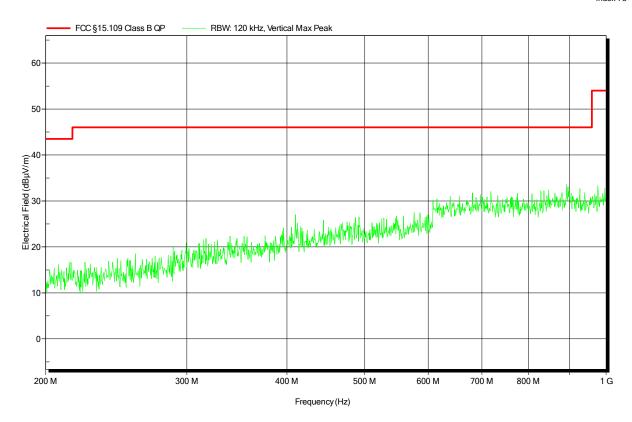



Project number: G0M-1703-6374

Applicant: Liftup A/S EUT Name: Remote Model: 104016

Test Site: Eurofins Product Service GmbH


Operator: Mr. Handrik

Test Conditions: Tnom: 23°C, Unom: 3.0V

Antenna: Rohde & Schwarz HL 223, Horizontal

Measurement distance: 3m Mode: Mode#1 Test Date: 2017-04-06

Note:

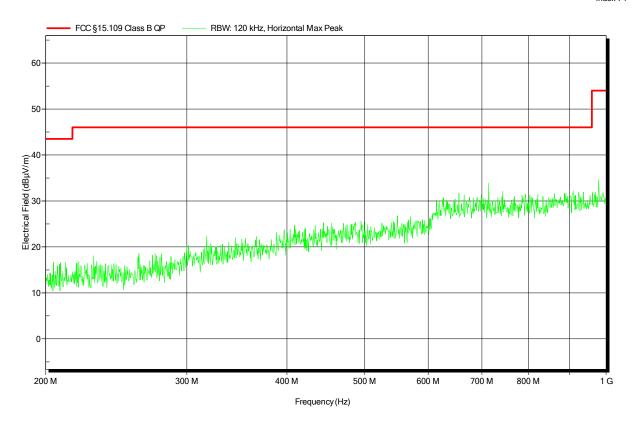



Project number: G0M-1703-6374

Applicant: Liftup A/S EUT Name: Remote Model: 104016

Test Site: Eurofins Product Service GmbH

Operator: Mr. Handrik


Test Conditions: Tnom: 23°C, Unom: 3.0V

Antenna: Schwarzbeck BBHA 9120D, Vertical

Measurement distance: 3m Mode: Mode#1 Test Date: 2017-04-06

Note:

Index 76

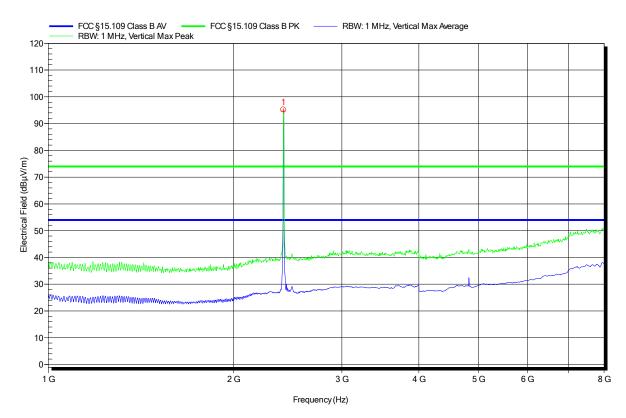

 Peak Number
 Frequency
 Average
 Average Limit
 Average Difference
 Average Status
 Angle
 Height

 1
 2.41 GHz
 Carrier



Project number: G0M-1703-6374

Applicant: Liftup A/S EUT Name: Remote Model: 104016

Test Site: Eurofins Product Service GmbH


Operator: Mr. Handrik

Test Conditions: Tnom: 23°C, Unom: 3.0V

Antenna: Schwarzbeck BBHA 9120D, Horizontal

Measurement distance: 3m Mode: Mode#1 Test Date: 2017-04-06

Note:

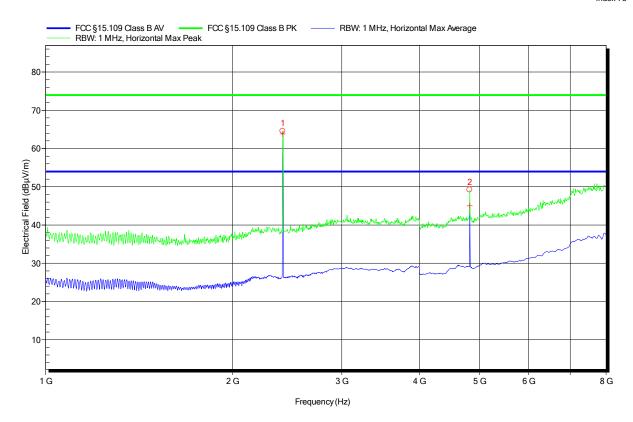

Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status	Angle	Height
1 2	2.41 GHz 4.82 GHz	Carrier 2 nd harmonic					



Spurious emissions according to FCC Part 15b

Project number: G0M-1703-6374

Applicant: Liftup A/S EUT Name: Remote Model: 104016

Test Site: Eurofins Product Service GmbH

Operator: Mr. Handrik


Test Conditions: Tnom: 23°C, Vnom: 3.0V

Antenna: Schwarzbeck BBHA 9120D, Vertical

Measurement distance: 1 m corrected to 3m

Mode: Mode#1
Test Date: 2017-04-06

Note:

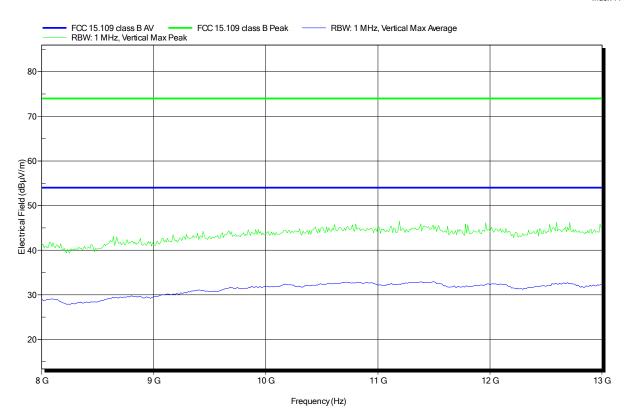



Spurious emissions according to FCC Part 15b

Project number: G0M-1703-6374

Applicant: Liftup A/S EUT Name: Remote Model: 104016

Test Site: Eurofins Product Service GmbH

Operator: Mr. Handrik

Test Conditions: Tnom: 23°C, Vnom: 3.0V

Antenna: Schwarzbeck BBHA 9120D, Horizontal

Measurement distance: 1 m corrected to 3m

Mode: Mode#1
Test Date: 2017-04-06

Note:

