

TEST REPORT

Applicant: Shanghai Mobiletek Communication Ltd.
Address: Part 6H3 Factory No.17 No.33 Xiya Rd.
China(Shanghai) Pilot Free Trade Zone
Equipment Type: LTE Module
Model Name: L511-2
Brand Name: LYNQ
FCC ID: 2AK9DL511-2
Test Standard: 47 CFR Part 2
(Others refer to chapter 3.1)
Sample Arrival Date: Dec.30,2024
Test Date: Dec.30,2024 - Jan.2,2025
Date of Issue: Jan.7,2025

ISSUED BY:

Shanghai Tejet Communications Technology Co., Ltd. Testing Center

Tested by: She Junyang

Checked by: Zhu Feng

Approved by: Chen Zidong
(Technical Director)

She Junyang

Zhu Feng

Chen Zidong

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Jan.7,2025</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

TABLE OF CONTENTS	2
1 GENERAL INFORMATION	4
1.1 Test Laboratory	4
1.2 Test Location	4
2 PRODUCT INFORMATION	5
2.1Applicant Information	5
2.2Manufacturer Information	5
2.3Factory Information	5
2.4General Description for Equipment under Test (EUT)	5
2.5Technical Information	6
3 SUMMARY OF TEST RESULTS	7
3.1 Test Standards	7
3.2Test Verdict	8
3.3Decision Rule	9
4 GENERAL TEST CONFIGURATIONS	10
4.1Test Environments	10
4.2Test Equipment List	10
4.3Test Configurations	12
4.4Test Setup	16
5 TEST ITEMS	18
5.1Transmitter Radiated Power (EIRP/ERP)	18
5.2 Peak to Average Ratio	21
5.3 Occupied Bandwidth	23
5.4 Frequency Stability	25
5.5 Spurious Emission at Antenna Terminals	27

5.6 Band Edge	31
5.7 Field Strength of Spurious Radiation	35
ANNEX A TEST RESULTS	39
A.1 Transmitter Radiated Power (EIRP/ERP)	39
A.2 Peak to Average Ratio	70
A.3 Frequency Stability	72
A.4 Spurious Emission at Antenna Terminals	81
A.5 Occupied Bandwidth	87
A.6 Band Edge	93
A.7 Field Strength of Spurious Radiation	101
ANNEX B EUT EXTERNAL PHOTOS	102
ANNEX C EUT EXTERNAL PHOTOS	102
ANNEX D EUT INTERNAL PHOTOS	102

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shanghai Tejet Communications Technology Co., Ltd. Testing Center
Address	1-2/F., Building 1, No.222, Xuanlan Road, Xuanqiao, Pudong New District, Shanghai, China

1.2 Test Location

Name	Shanghai Tejet Communications Technology Co., Ltd. Testing Center
Location	1-2/F., Building 1, No.222, Xuanlan Road, Xuanqiao, Pudong New District, Shanghai, China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory.The designation number is CN1352

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Shanghai Mobiletek Communication Ltd.
Address	Part 6H3 Factory No.17 No.33 Xiya Rd. China(Shanghai) Pilot Free Trade Zone

2.2 Manufacturer Information

Manufacturer	Shanghai Mobiletek Communication Ltd.
Address	Part 6H3 Factory No.17 No.33 Xiya Rd. China(Shanghai) Pilot Free Trade Zone

2.3 Factory Information

Factory	N/A
Address	N/A

2.4 General Description for Equipment under Test (EUT)

EUT Name	LTE Module
Model Name Under Test	L511-2
Series Model Name	N/A
Description of Model name differentiation	N/A
Sample Number	BL-SH24C1024-S01
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Technical Information

All Network and Wireless connectivity for EUT	4G Network FDD LTE Band1/2/3/4/5/7/8/28/66 TDD LTE Band40 GPS+GLONASS+BDS
About the Product	The equipment is LTE Module Terminal, intended for used with information technology equipment.

The following is the technical information of the EUT tested frequency bands in this report.

Operating Bands		FDD LTE Band 2/4/5/7/66	
Modulation Type		LTE	QPSK/16QAM
Antenna Type		PIFA Antenna	
Antenna Gain		FDD LTE Band 2: 2.3 dBi FDD LTE Band 4: 2.3 dBi FDD LTE Band 5: 2.3 dBi FDD LTE Band 7: 2.3 dBi FDD LTE Band 66: 2.3 dBi	
The Max RF Output Power (EIRP/ERP)		FDD LTE Band 2: 22.85 dBm FDD LTE Band 4: 24.28 dBm FDD LTE Band 5: 22.17 dBm FDD LTE Band 7: 22.22 dBm FDD LTE Band 66: 22.87 dBm	
Band	Power Class	Tx Frequency Range	Rx Frequency Range
LTE B2	3	1850 MHz ~ 1910 MHz	1930 MHz ~ 1990 MHz
LTE B4	3	1710 MHz ~ 1755 MHz	2110 MHz ~ 2155 MHz
LTE B5	3	824 MHz ~ 849 MHz	869 MHz ~ 894 MHz
LTE B7	3	2500 MHz ~ 2570 MHz	2620 MHz ~ 2690 MHz
LTE B66	3	1710 MHz ~ 1780 MHz	2110 MHz ~ 2200 MHz

Note1: The EUT information provided by the applicant, except for The Max RF Conducted Power. For more detailed band specifications and features description, please refer to the manufacturer's specifications or user's manual.

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 22 Subpart H	Cellular Radiotelephone Service
3	47 CFR Part 24 Subpart E	Broadband PCS
4	47 CFR Part 27	Miscellaneous Wireless Communications Services
5	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
6	KDB 971168 D01 v03	Measurement Guidance for Certification of Licensed Digital Transmitters

3.2 Test Verdict

No.	Test Description	FCC Part No.	Test Result	Test Verdict
1	Conducted RF Output Power	2.1046	Reporting only (ANNEX A.1)	Pass
2	Effective (Isotropic) Radiated Power	2.1046 22.913 24.232 27.50	ANNEX A.1	Pass
3	Peak to Average Ratio	2.1046 22.913(d) 24.232(d) 27.50(d)	ANNEX A.2	Pass
4	Frequency Stability	2.1049 22.917 24.238 27.53	ANNEX A.3	Pass
5	Spurious Emission at Antenna Terminals	2.1055 22.355 24.235 27.54	ANNEX A.4	Pass
6	Occupied Bandwidth	2.1051 22.917 24.238 27.53	ANNEX A.5	Pass
7	Band Edge	2.1051 22.917 24.238 27.53	ANNEX A.6	Pass
8	Field Strength of Spurious Radiation	2.1053 22.917 24.238 27.53	ANNEX A.7	Pass

Note:

configuration1	configuration2	configuration3	configuration4
with GNSS	with GNSS	without GNSS	without GNSS
4MB flash	2MB flash	4MB flash	2MB flash

The product has four configurations, all tests are performed on configuration1. Other configurations verify the compliance, The test data in the report is the configuration1 status.

3.3 Decision Rule

☐ No Need

☒ Use General conformity decision rule (Consider uncertainty or not ☒ No ☐ Yes)

☐ Use Special Conformity Decision Rule (Consider uncertainty or not ☐ No ☐ Yes)

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the environmental conditions were within the listed ranges:

Relative Humidity		25% to 75%
Atmospheric Pressure		98 kPa to 102 kPa
Test Voltage of the EUT	NV (Normal Voltage)	3.8 V
	LV (Low Voltage)	3.3 V
	HV (High Voltage)	4.5 V
Test Temperature of the EUT	NT (Normal Temperature)	15°C to 35°C
	LT (Low Temperature)	-40°C
	HT (High Temperature)	85°C

4.2 Test Equipment List

Description	Manufacturer	Model	Equipment No.	Software /Firmware Version	Cal. Date	Cal. Due
BL410 2G/3G/4G RF Test System						
Wideband Radio Communication Tester	R&S	CMW 500	BH-EMC-L094	V3.7.172	2024/2/22	2025/2/21
Spectrum Analyzer	Agilent	E4440A	BH-EMC-L027	A.11.21	2024/2/21	2025/2/20
Spectrum Analyzer	Keysight	N9020A	BH-EMC-L066	A.17.05	2024/2/22	2025/2/21
Temperature Chamber	ESPEC	ECT	BH-EMC-L068	NA	2024/4/18	2025/4/17
DC Power Supply	ITECH	IT6863A	BH-EMC-L113	NA	2024/2/22	2025/2/21
Vector Signal Generator	Agilent	E4438C	BH-EMC-L028	C.05.76	2024/2/22	2025/2/21
Analog Signal Generator	Keysight	N5173B	BH-EMC-L074	B.01.90	2024/2/19	2025/2/18
Test Software	BALUN	BL410R	NA	V3.0.1.539	N/A	N/A
Radiated Test System						
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9163	BH-EMC-L008	NA	2024/3/11	2027/3/10

Test Antenna-Horn	Schwarzbeck	BBHA 9120D	BH-EMC-L04 4	NA	2024/3/11	2027/3/10
Anechoic Chamber	YIHENG	9m*6m*6m	BH-EMC-L00 1	NA	2024/4/14	2027/4/13
EMI Receiver	KEYSIGHT	N9038A	BH-EMC-L01 5	A.21.06	2024/2/21	2025/2/20
Wideband Radio Communication Tester	R&S	CMW 500	BH-EMC-L09 4	V3.7.172	2024/2/22	2025/2/21
Test Software	BALUN	BL410-E	NA	V21.919	N/A	N/A

4.3 Test Configurations

LTE Band	Bandwidth (MHz)						Modulation Type		RB#			Test Channel		
	1.4	3	5	10	15	20	QPSK	16-QAM	1	Half	Full	LCH	MCH	HCH
Effective (Isotropic) Radiated Power														
2	v	v	v	v	v	v	v	v	v	v	v	v	v	v
4	v	v	v	v	v	v	v	v	v	v	v	v	v	v
5	v	v	v	v	n	n	v	v	v	v	v	v	v	v
7	n	n	v	v	v	v	v	v	v	v	v	v	v	v
66	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak to Average Ratio														
2	--	--	--	--	--	v	v	v	v	--	v	v	v	v
4	--	--	--	--	--	v	v	v	v	--	v	v	v	v
5	--	--	--	v	n	n	v	v	v	--	v	v	v	v
7	n	n	--	--	--	v	v	v	v	--	v	v	v	v
66	--	--	--	--	--	v	v	v	v	--	v	v	v	v
Occupied Bandwidth														
2	v	v	v	v	v	v	v	v	--	--	v	v	v	v
4	v	v	v	v	v	v	v	v	--	--	v	v	v	v
5	v	v	v	v	n	n	v	v	--	--	v	v	v	v
7	n	n	v	v	v	v	v	v	--	--	v	v	v	v
66	v	v	v	v	v	v	v	v	--	--	v	v	v	v
Frequency Stability														
2	--	--	--	v	--	--	v	v	--	--	v	--	v	--
4	--	--	--	v	--	--	v	v	--	--	v	--	v	--
5	--	--	--	v	n	n	v	v	--	--	v	--	v	--
7	n	n	--	v	--	--	v	v	--	--	v	--	v	--
66	--	--	--	v	--	--	v	v	--	--	v	--	v	--
Spurious Emission at Antenna Terminals														
2	v	v	v	v	v	v	v	v	v	--	--	v	v	v
4	v	v	v	v	v	v	v	v	v	--	--	v	v	v
5	v	v	v	v	n	n	v	v	v	--	--	v	v	v
7	n	n	v	v	v	v	v	v	v	--	--	v	v	v
66	v	v	v	v	v	v	v	v	v	--	--	v	v	v
Band Edge														
2	v	v	v	v	v	v	v	v	v	--	v	v	--	v
4	v	v	v	v	v	v	v	v	v	--	v	v	--	v
5	v	v	v	v	n	n	v	v	v	--	v	v	--	v
7	n	n	v	v	v	v	v	v	v	--	v	v	--	v
66	v	v	v	v	v	v	v	v	v	--	v	v	--	v
Field Strength of Spurious Radiation														
2	Worst case													
4	Worst case													


LTE Band	Bandwidth (MHz)						Modulation Type		RB#			Test Channel		
	1.4	3	5	10	15	20	QPSK	16-QAM	1	Half	Full	LCH	MCH	HCH
5	Worst case													
7	Worst case													
66	Worst case													
Note 1: The mark “v” means that this configuration is chosen for testing.														
Note 2: The mark “n” means that this bandwidth is not supported.														

Test Mode	UL Channel	Channel Bandwidth (MHz)	UL Channel No.	UL Frequency (MHz)
LTE Band 2	Low Range	1.4	18607	1850.7
		3	18615	1851.5
		5	18625	1852.5
		10	18650	1855
		15	18675	1857.5
		20	18700	1860
	Middle Range	1.4/3/5/10/15/20	18900	1880
	High Range	1.4	19193	1909.3
		3	19185	1908.5
		5	19175	1907.5
		10	19150	1905
		15	19125	1902.5
		20	19100	1900
LTE Band 4	Low Range	1.4	19957	1710.7
		3	19965	1711.5
		5	19975	1712.5
		10	20000	1715
		15	20025	1717.5
		20	20050	1720
	Middle Range	1.4/3/5/10/15/20	20175	1732.5
	High Range	1.4	20393	1754.3
		3	20385	1753.5
		5	20375	1752.5
		10	20350	1750
		15	20325	1747.5
		20	20300	1745
LTE Band 5	Low Range	1.4	20407	824.7
		3	20415	825.5
		5	20425	826.5
		10	20450	829
	Middle Range	1.4/3/5/10	20525	836.5
	High Range	1.4	20643	848.3
		3	20635	847.5
		5	20625	846.5
10		20600	844	
LTE Band 7	Low Range	5	20775	2502.5
		10	20800	2505
		15	20825	2507.5
		20	20850	2510
	Middle Range	5/10/15/20	21100	2535

Test Mode	UL Channel	Channel Bandwidth (MHz)	UL Channel No.	UL Frequency (MHz)
	High Range	5	21425	2567.5
		10	21400	2565
		15	21375	2562.5
		20	21350	2560
LTE Band 66	Low Range	1.4	131979	1710.7
		3	131987	1711.5
		5	131997	1712.5
		10	132022	1715
		15	132047	1717.5
		20	132072	1720
	Middle Range	1.4/3/5/10/15/20	132422	1745
	High Range	1.4	132665	1755
		3	132657	1779.3
		5	132647	1778.5
		10	132622	1777.5
		15	132597	1772.5
		20	132572	1770


4.4 Test Setup

4.4.1 For Antenna Port Test

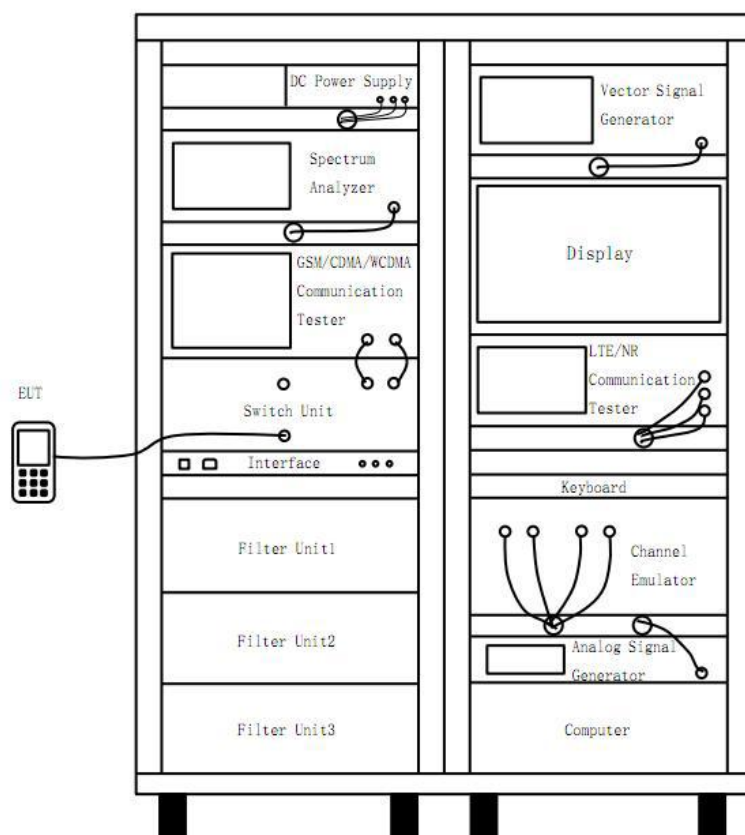


(Diagram 1)

4.4.2 For Frequency Stability Test

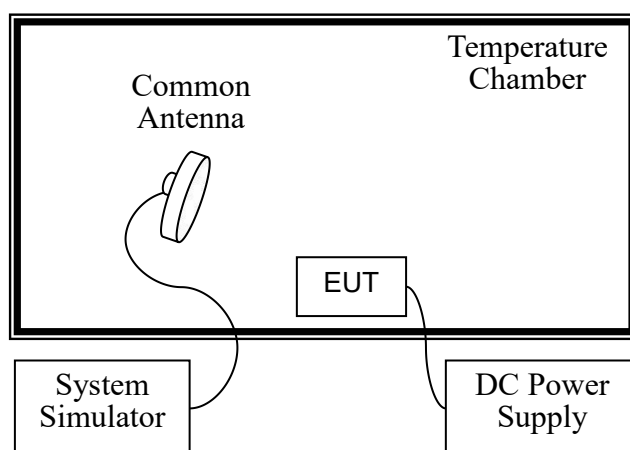


(Diagram 2)

4.4.3 For Radiated Test (30 MHz ~ 1 GHz)

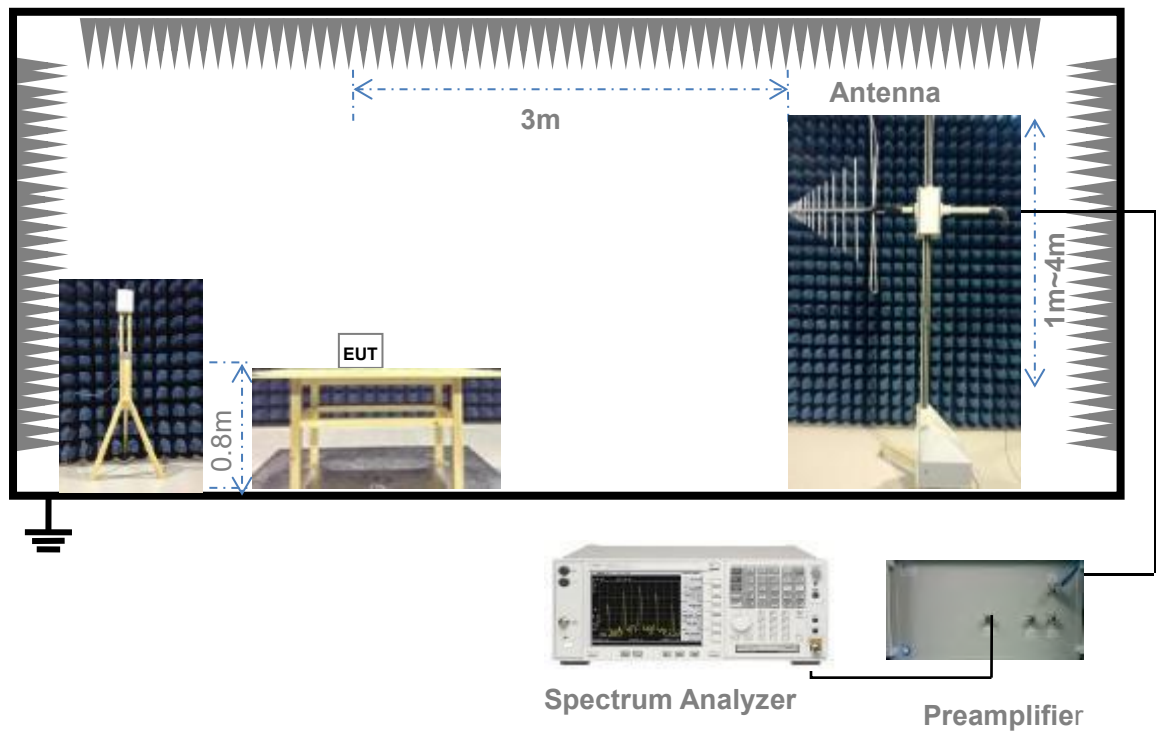

(Diagram 3)

4.4.4 For Radiated Test (Above 1 GHz)

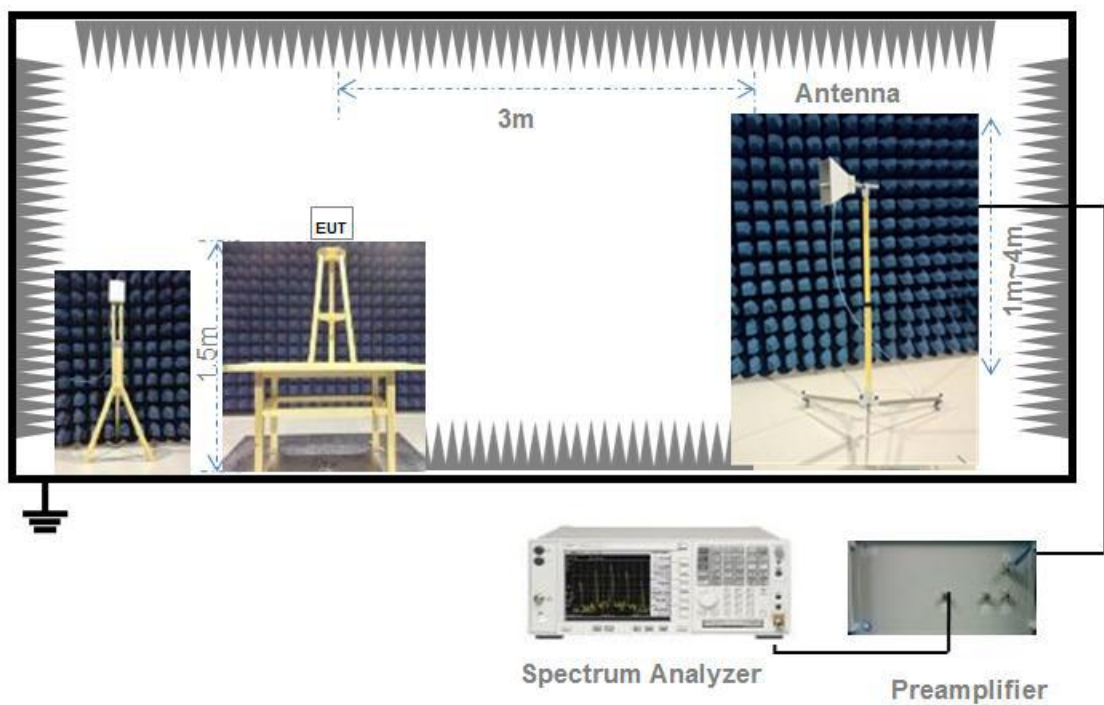

(Diagram 4)

5 TEST ITEMS

5.1 Transmitter Radiated Power (EIRP/ERP)

5.1.1 Limit

FCC § 2.1046 & 22.913(a) & 24.232(c) & 27.50(a) & 27.50(b) & 27.50(c) & 27.50(d) & 27.50(h) & 27.50(j) & 27.50(k)

According to FCC section 22.913(a) (5), the Effective Radiated Power (ERP) of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC section 24.232(c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to FCC section 27.50(a) (3), for mobile and portable stations transmitting in the 2305-2315MHz band or the 2350-2360MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands.

FCC section 27.50(b) (10), portable stations (hand-held devices) transmitting in the 746-757MHz, 776-788MHz, and 805-806MHz bands are limited to 3 watts ERP.

FCC section 27.50(c) (10), portable stations (hand-held devices) in the 600MHz uplink band and the 698-746MHz band, and fixed and mobile stations in the 600MHz uplink band are limited to 3 watts ERP.

FCC section 27.50(d) (4), fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

Fixed, mobile, and portable (hand-held) stations operating in the 2000-2020 MHz band are limited to 2 watts EIRP.

And FCC section 27.50(h) (2), for mobile and other user stations, mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

FCC section 27.50(j) (3), for mobile, and portable (hand-held) stations operating in the 3700-3980 MHz band are limited to 1 watt EIRP.

FCC section 27.50(k) (3), Mobile devices are limited to 1Watt (30 dBm) EIRP in the 3450-3550 MHz band.

5.1.2 Test Setup

The section 4.4.1 (Diagram 1) test setup description is used for conducted test, and the section 4.4.3 and 4.4.4 (Diagram 3, 4) test setup description is used for radiated test. The photo of test setup please refer to

ANNEX B.

5.1.3 Test Procedure

Description of the Conducted Output Power Measurement

The EUT is coupled to the SS with attenuator through power splitter; the RF load attached to EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. A system simulator is used to establish communication with the EUT, and its parameters are set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The relevant equation for determining the conducted measured value is:

$$\text{Conducted Output Power Value (dBm)} = \text{Measured Value (dBm)} + \text{Path Loss (dB)}$$

where:

Conducted Output Power Value = final conducted measured value in the conducted power test, in dBm;

Measured Value = measured conducted power received by spectrum analyzer or power meter, in dBm;

Path Loss = signal attenuation in the connecting cable between the transmitter and spectrum analyzer or power meter, including external cable loss, in dB;

During the test, the data of Path Loss (dB) is added in the spectrum analyzer or power meter, so Measured Value (dBm) is the final values which contains the data of Path Loss (dB).

For example:

In the conducted output power test, when measured value for GSM850 is 24.7 dBm, and path loss is 8.5 dB, then final conducted output power value is:

$$\text{Conducted Output Power Value (dBm)} = 24.7 \text{ dBm} + 8.5 \text{ dB} = 33.2 \text{ dBm}$$

Description of the Transmitter Radiated Power Measurement

In many cases, the RF output power limits for licensed digital transmission devices is specified in terms of effective radiated power (ERP) or equivalent isotropic radiated power (EIRP). Typically, ERP is specified when the operating frequency is less than or equal to 1 GHz and EIRP is specified when the operating frequency is greater than 1 GHz. Both are determined by adding the transmit antenna gain to the conducted RF output power with the primary difference between the two being that when determining the ERP, the transmit antenna gain is referenced to a dipole antenna (i.e., dBd) whereas when determining

the EIRP, the transmit antenna gain is referenced to an isotropic antenna (dBi).

Final measurement calculation as below:

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP/EIRP} = \text{PMeas} + \text{GT} - \text{LC}$$

where:

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm);

PMeas = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

dBd (ERP)=dBi (EIRP) -2.15 dB

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

For example:

In the EIRP test, when PMeas value for GSM1900 is 30.2 dBm, LC is 0.6 dB, and GT is -3.4 dB, then final EIRP value is:

$$\text{EIRP for GSM1900} = 30.2 \text{ dBm} - 3.4 \text{ dBi} - 0.6 \text{ dB} = 26.2 \text{ dBm}$$

The relevant equation for determining the ERP/EIRP from the radiated RF output power is:

$$\text{ERP/EIRP (dBm)} = \text{SA Read Value (dBm)} + \text{Correction Factor (dB)}$$

where:

ERP/EIRP = effective or equivalent radiated power, in dBm;

SA Read Value = measured transmitter power received by EMI receiver or spectrum analyzer, in dBm;

Correction Factor = total correction factor including cable loss, in dB;

During the test, the data of Correction Factor (dB) is added in the EMI receiver or spectrum analyzer, so SA Read Value (dBm) is the final values which contains the data of Correction Factor (dB).

For example:

In the ERP test, when SA read value for GSM850 is 21dBm, and correction factor is 8dB, then final ERP value for GSM850 is:

$$\text{ERP (dBm)} = 21\text{dBm} + 8\text{dB} = 29\text{dBm}$$

5.1.4 Test Result

Please refer to ANNEX A.1.

5.2 Peak to Average Ratio

5.2.1 Limit

FCC § 2.1046 & 22.913(d) & 24.232(d) & 27.50(d) & 27.50(j) & 27.50(k)

In addition, when the transmitter power is measured in terms of average value, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.

According to 22.913(d), Measurement of the ERP of Cellular base transmitters and repeaters must be made using an average power measurement technique. The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB.

According to FCC section 24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with 24.232 (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

FCC section 24.232(e), peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

According to FCC section 27.50(d) (5) & 27.50(j) & 27.50(k), in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13dB.

5.2.2 Test Setup

The section 4.4.1 (Diagram 1) test setup description is used for this test. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

Here the lowest, middle and highest channels are selected to perform testing to verify the peak-to-average ratio.

According to KDB 971168 D01, there is CCDF procedure for PAPR:

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;

d) Set the measurement interval as follows:

1) for continuous transmissions, set to 1 ms,

2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.

e) Record the maximum PAPR level associated with a probability of 0.1%.

Alternate procedure for PAPR:

Use one of the procedures presented in 4.1 to measure the total peak power and record as PPk. Use one of the applicable procedures presented 4.2 to measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR (dB)} = \text{PPk (dBm)} - \text{PAvg (dBm)}.$$

5.2.4 Test Result

Please refer to ANNEX A.2.

5.3 Occupied Bandwidth

5.3.1 Limit

FCC § 2.1049

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Many of the individual rule parts specify a relative OBW in lieu of the 99% OBW. In such cases, the OBW is defined as the width of the signal between two points, one below the carrier center frequency and on above the carrier center frequency, outside of which all emissions are attenuated by at least X dB below the transmitter power, where the value of X is typically specified as 26.

5.3.2 Test Setup

The section 4.4.1 (Diagram 1) test setup description is used for this test. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The following procedure shall be used for measuring power bandwidth.

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the anticipated OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least 10log (OBW / RBW) below the reference level.
- d) NOTE—Steps a) through c) may require iteration to adjust within the specified tolerances.
- e) For -26 dB OBW, the dynamic range of the spectrum analyzer at the selected RBW shall be at least 10dB below the target “-X dB down” requirement, e.g. -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be 36dB below the reference value.
- f) Set the detection mode to peak, and the trace mode to max hold.
- g) For 99% OBW, use the 99 % power bandwidth function of the spectrum analyzer (if available) and report the measured bandwidth.

If the instrument does not have a 99 % power bandwidth function, the trace data points are to be recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is

recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99 % power bandwidth is the difference between these two frequencies.

h) For -26 dB OBW, determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).

Determine the “-X dB down amplitude” as equal to (reference value -X). Alternatively, this calculation can be performed by the analyzer by using the marker-delta function.

Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below “-X dB down amplitude” determined in step g). If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.

i) The OBW shall be reported by providing plot(s) of the measuring instrument display. The frequency and amplitude axes and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

j) Change variable modulations, coding, or channel bandwidth settings, then repeat above test procedures.

5.3.4 Test Result

Please refer to ANNEX A.5.

5.4 Frequency Stability

5.4.1 Limit

FCC § 2.1055 & 22.355 & 24.235 & 27.54

FCC § 2.1055

The frequency stability shall be measured with variation of ambient temperature as follows:

- (1) The temperature is varied from -40°C to +85°C.
- (2) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10°C through the range.

The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than carried battery equipment.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating and point which shall be specified by the manufacture.
- (3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

FCC § 22.355

Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.

Table C-1—Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929	5.0	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10.0	n/a	n/a

FCC § 24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

FCC § 27.54

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

5.4.2 Test Setup

The section 4.4.2 (Diagram 2) test setup description is used for this test. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

1. The EUT is placed in a temperature chamber.
2. The temperature is set to 25°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured.
3. The temperature is increased by not more than 10 degrees, allowed to stabilize and soak, and then repeat the frequency error measurement.
4. Repeat procedure 3 until +85°C and -40°C is reached.
5. Change supply voltage, and repeat measurement until extreme voltage is reached.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Spurious Emission at Antenna Terminals

5.5.1 Limit

FCC § 2.1051 & 22.917(a) & 24.238(a) & 27.53(a) & 27.53(c) & 27.53(f) & 27.53(g) & 27.53(h) & 27.53(l) & 27.53(m) & 27.53(n)

In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC § 22.917(a) & 24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. This is calculated to be -13 dBm.

FCC § 27.53(a) (4)

For mobile and portable stations operating in the 2305-2315MHz and 2350-2360MHz bands:

(1) By a factor of not less than: $43 + 10 \log(P)$ dB on all frequencies between 2305 and 2320MHz and on all frequencies between 2345 and 2360MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log(P)$ dB on all frequencies between 2320 and 2324MHz and on all frequencies between 2341 and 2345MHz, not less than $61 + 10 \log(P)$ dB on all frequencies between 2324 and 2328MHz and on all frequencies between 2337 and 2341MHz, and not less than $67 + 10 \log(P)$ dB on all frequencies between 2328 and 2337MHz.

(2) By a factor of not less than $43 + 10 \log(P)$ dB on all frequencies between 2300 and 2305MHz, $55 + 10 \log(P)$ dB on all frequencies between 2296 and 2300MHz, $61 + 10 \log(P)$ dB on all frequencies between 2292 and 2296MHz, $67 + 10 \log(P)$ dB on all frequencies between 2288 and 2292MHz, and $70 + 10 \log(P)$ dB below 2288MHz.

(3) By a factor of not less than $43 + 10 \log(P)$ dB on all frequencies between 2360 and 2365MHz, and not less than $70 + 10 \log(P)$ dB above 2365MHz.

FCC § 27.53(c)

For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the

band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

(2) On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the

band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(3) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth

of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

FCC § 27.53(f)

For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to - 70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

FCC § 27.53(g)

For operations in the 600MHz band and the 698-746MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43+10*\log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

FCC § 27.53(h) (1)

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

FCC § 27.53(l) (2)

For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

FCC § 27.53(m) (4)

For mobile digital stations (BRS and EBS stations), the attenuation factor shall be not less than:

- $40 + 10 \log P$ dB (-10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge.
- $43 + 10 \log P$ dB (-13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge,
- $55 + 10 \log P$ dB (-25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB).

In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

FCC § 27.53(n) (2)

For mobile operations in the 3450 - 3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

5.5.2 Test Setup

The section 4.4.1 (Diagram 1) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency blocks a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

1. The EUT is coupled to the system simulator and spectrum analyzer; the RF load attached to EUT antenna terminal is 50Ω ; the path loss as the factor is calibrated to correct the reading.
2. Base Station is used to establish communication with the EUT, and its parameters are set to force the EUT transmitting at maximum output power.

3. The RF output of the transmitter is connected to the input of the spectrum analyzer through sufficient attenuation.
4. Spurious emissions are tested with 0.001MHz RBW for frequency less than 150kHz, 0.01MHz RBW for frequency less than 30MHz, 0.1MHz RBW for frequency less than 1GHz, and 1MHz RBW for frequency above 1GHz. And sweep point number are at least 401, referring to following formula.

Sweep point number = Span/RBW

VBW=3*RBW

Detector Mode=mean or average power

5. Record the frequencies and levels of spurious emissions.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Band Edge

5.6.1 Limit

FCC § 2.1051 & 22.917(a) & 24.238(a) & 27.53(a) & 27.53(c) & 27.53(g) & 27.53(h) & 27.53(l) & 27.53(m) & 27.53(n)

In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC § 22.917(a) & 24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. This is calculated to be -13 dBm.

FCC § 27.53(a) (4)

For mobile and portable stations operating in the 2305-2315MHz and 2350-2360MHz bands:

(1) By a factor of not less than: $43 + 10 \log(P)$ dB on all frequencies between 2305 and 2320MHz and on all frequencies between 2345 and 2360MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log(P)$ dB on all frequencies between 2320 and 2324MHz and on all frequencies between 2341 and 2345MHz, not less than $61 + 10 \log(P)$ dB on all frequencies between 2324 and 2328MHz and on all frequencies between 2337 and 2341MHz, and not less than $67 + 10 \log(P)$ dB on all frequencies between 2328 and 2337MHz.

(2) By a factor of not less than $43 + 10 \log(P)$ dB on all frequencies between 2300 and 2305MHz, $55 + 10 \log(P)$ dB on all frequencies between 2296 and 2300MHz, $61 + 10 \log(P)$ dB on all frequencies between 2292 and 2296MHz, $67 + 10 \log(P)$ dB on all frequencies between 2288 and 2292MHz, and $70 + 10 \log(P)$ dB below 2288MHz.

(3) By a factor of not less than $43 + 10 \log(P)$ dB on all frequencies between 2360 and 2365MHz, and not less than $70 + 10 \log(P)$ dB above 2365MHz.

FCC § 27.53(c)

For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the

band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

(2) On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the

band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(3) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth

of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

FCC § 27.53(g)

For operations in the 600MHz band and the 698-746MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43+10*\log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

FCC § 27.53(h) (1)

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

FCC § 27.53(l) (2)

For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

FCC § 27.53(m) (4)

For mobile digital stations (BRS and EBS stations), the attenuation factor shall be not less than:

- $40+10\log P$ dB (-10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge.
- $43+10\log P$ dB (-13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge,

- $55+10\log P$ dB (-25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB).

In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

FCC § 27.53(n) (2)

For mobile operations in the 3450 - 3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

5.6.2 Test Setup

The section 4.4.1 (Diagram 1) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading.

1. The EUT is coupled to the system simulator and spectrum analyzer; the RF load attached to EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading.

2. Base Station is used to establish communication with the EUT, and its parameters are set to force the EUT transmitting at maximum output power.

3. The RF output of the transmitter is connected to the input of the spectrum analyzer through sufficient attenuation.

4. The center of the spectrum analyzer was set to block edge frequency.

5. Band edge are tested with $1\% \text{cBW}$ (RBW), and sweep point number referred to following formula.

$$\text{Sweep point number} = 2 \times \text{Span} / \text{RBW}$$

$$\text{VBW} = 3 \text{RBW}$$

6. Record the frequencies and levels of spurious emissions.

For mobile and portable stations, on all frequencies between 763 – 775 MHz and 793 – 805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment. Since it was not possible to set the resolution bandwidth to 6.25 kHz with the available equipment, a bandwidth of 10 kHz was used instead to show compliance. By using a 10 kHz bandwidth on the spectrum analyzer.

$$10 \cdot \log(10 \text{ kHz} / 6.25 \text{ kHz}) = 2.04 \text{ dB}$$

$$\text{Limit Line} = -35 \text{ dBm} + 2.04 \text{ dB} = -32.96 \text{ dBm}$$

5.6.4 Test Result

Please refer to ANNEX A.6.

5.7 Field Strength of Spurious Radiation

5.7.1 Limit

FCC § 2.1053 & 22.917(a) & 24.238(a) & 27.53(a) & 27.53(c) & 27.53(f) & 27.53(g) & 27.53(h) & 27.53(l) & 27.53(m) & 27.53(n)

FCC § 22.917(a) & 24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. This is calculated to be -13 dBm.

FCC § 27.53(a) (4)

For mobile and portable stations operating in the 2305-2315MHz and 2350-2360MHz bands:

(1) By a factor of not less than: $43 + 10 \log(P)$ dB on all frequencies between 2305 and 2320MHz and on all frequencies between 2345 and 2360MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log(P)$ dB on all frequencies between 2320 and 2324MHz and on all frequencies between 2341 and 2345MHz, not less than $61 + 10 \log(P)$ dB on all frequencies between 2324 and 2328MHz and on all frequencies between 2337 and 2341MHz, and not less than $67 + 10 \log(P)$ dB on all frequencies between 2328 and 2337MHz.

(2) By a factor of not less than $43 + 10 \log(P)$ dB on all frequencies between 2300 and 2305MHz, $55 + 10 \log(P)$ dB on all frequencies between 2296 and 2300MHz, $61 + 10 \log(P)$ dB on all frequencies between 2292 and 2296MHz, $67 + 10 \log(P)$ dB on all frequencies between 2288 and 2292MHz, and $70 + 10 \log(P)$ dB below 2288MHz.

(3) By a factor of not less than $43 + 10 \log(P)$ dB on all frequencies between 2360 and 2365MHz, and not less than $70 + 10 \log(P)$ dB above 2365MHz.

FCC § 27.53(c)

For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the

band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

(2) On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the

band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

(3) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $76 + 10 \log(P)$ dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of

measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth

of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

FCC § 27.53(f)

For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to - 70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

FCC § 27.53(g)

For operations in the 600MHz band and the 698-746MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43+10\log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

FCC § 27.53(h) (1)

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

FCC § 27.53(i) (2)

For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

FCC § 27.53(m) (4)

For mobile digital stations (BRS and EBS stations), the attenuation factor shall be not less than:

- $40+10\log P$ dB (-10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge.
- $43+10\log P$ dB (-13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge,
- $55+10\log P$ dB (-25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB).

In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service

licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

FCC § 27.53(n) (2)

For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

5.7.2 Test Setup

The section 4.4.3 and 4.4.4 (Diagram 3, 4) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

1. On a test site, the EUT shall be placed at 80cm height on a turn table, and in the position close to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to correspond to the fundamental frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the peak detector is used for the measurement.
4. During the measurement of the EUT, the resolution bandwidth was to 1 MHz and the average bandwidth was set to 1 MHz.
5. The transmitter shall be switched on; the measuring receiver shall be tuned to the frequency of the transmitter under test.
6. The test antenna shall be raised and lowered through the specified range of height until the maximum signal level is detected by the measuring receiver.
7. The transmitter shall be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
8. The test antenna shall be raised and lowered again through the specified range of height until the maximum signal level is detected by the measuring receiver.
9. The maximum signal level detected by the measuring receiver shall be noted.
10. The EUT was replaced by half-wave dipole (824 ~ 849 MHz) or horn antenna (1 850 ~ 1 910 MHz) connected to a signal generator.
11. In necessary, the input attenuator setting on the measuring receiver shall be adjusted in order to

increase

the sensitivity of the measuring receiver.

12. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.

13. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, which is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.

14. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.

15. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.

Final measurement calculation as below:

The relevant equation for determining the ERP/EIRP from the radiated RF output power is:

$$\text{ERP/EIRP (dBm)} = \text{SA Read Value (dBm)} + \text{Correction Factor (dB)}$$

where:

ERP/EIRP = effective or equivalent radiated power, in dBm;

SA Read Value = measured transmitter power received by EMI receiver or spectrum analyzer, in dBm;

Correction Factor = total correction factor including cable loss, in dB;

During the test, the data of Correction Factor (dB) is added in the EMI receiver or spectrum analyzer, so SA Read Value (dBm) is the final values which contains the data of Correction Factor (dB).

For example:

In the ERP test, when SA read value for GSM850 is 21dBm, and correction factor is 8dB, then final ERP value for GSM850 is:

$$\text{ERP (dBm)} = 21\text{dBm} + 8\text{dB} = 29\text{dBm}$$

5.7.4 Test Result

Please refer to ANNEX A.7.

ANNEX A TEST RESULTS

A.1 Transmitter Radiated Power (EIRP/ERP)

LTE Mode Test Data

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
LTE BAND 2									
1.4 MHz	LCH	QPSK	RB1#LOW	21.93	2.3	24.23	0.265	2.000	Pass
			RB1#MID	21.79	2.3	24.09	0.256	2.000	Pass
			RB1#HIGH	21.74	2.3	24.04	0.254	2.000	Pass
			RB3#LOW	21.78	2.3	24.08	0.256	2.000	Pass
			RB3#MID	21.81	2.3	24.11	0.258	2.000	Pass
			RB3#HIGH	21.83	2.3	24.13	0.259	2.000	Pass
		16-QAM	RB6#LOW	20.84	2.3	23.14	0.206	2.000	Pass
			RB1#LOW	21.11	2.3	23.41	0.219	2.000	Pass
			RB1#MID	21.12	2.3	23.42	0.220	2.000	Pass
			RB1#HIGH	21.05	2.3	23.35	0.216	2.000	Pass
			RB3#LOW	21.06	2.3	23.36	0.217	2.000	Pass
			RB3#MID	21.07	2.3	23.37	0.217	2.000	Pass
			RB3#HIGH	21.05	2.3	23.35	0.216	2.000	Pass
			RB6#LOW	20.35	2.3	22.65	0.184	2.000	Pass
	MCH	QPSK	RB1#LOW	22.02	2.3	24.32	0.270	2.000	Pass
			RB1#MID	21.88	2.3	24.18	0.262	2.000	Pass
			RB1#HIGH	21.93	2.3	24.23	0.265	2.000	Pass
			RB3#LOW	21.85	2.3	24.15	0.260	2.000	Pass
			RB3#MID	21.94	2.3	24.24	0.265	2.000	Pass
			RB3#HIGH	21.92	2.3	24.22	0.264	2.000	Pass
		16-QAM	RB6#LOW	21.08	2.3	23.38	0.218	2.000	Pass
			RB1#LOW	21.54	2.3	23.84	0.242	2.000	Pass
			RB1#MID	21.5	2.3	23.80	0.240	2.000	Pass
			RB1#HIGH	21.48	2.3	23.78	0.239	2.000	Pass
			RB3#LOW	21.35	2.3	23.65	0.232	2.000	Pass
			RB3#MID	21.29	2.3	23.59	0.229	2.000	Pass
			RB3#HIGH	21.31	2.3	23.61	0.230	2.000	Pass
			RB6#LOW	20.02	2.3	22.32	0.171	2.000	Pass
	HCH	QPSK	RB1#LOW	21.17	2.3	23.47	0.222	2.000	Pass
			RB1#MID	20.93	2.3	23.23	0.210	2.000	Pass
			RB1#HIGH	20.82	2.3	23.12	0.205	2.000	Pass
			RB3#LOW	20.99	2.3	23.29	0.213	2.000	Pass
			RB3#MID	20.99	2.3	23.29	0.213	2.000	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
LTE BAND 2									
			RB3#HIGH	20.94	2.3	23.24	0.211	2.000	Pass
			RB6#LOW	20.05	2.3	22.35	0.172	2.000	Pass
		16-QAM	RB1#LOW	20.3	2.3	22.60	0.182	2.000	Pass
			RB1#MID	20.16	2.3	22.46	0.176	2.000	Pass
			RB1#HIGH	20.1	2.3	22.40	0.174	2.000	Pass
			RB3#LOW	20.37	2.3	22.67	0.185	2.000	Pass
			RB3#MID	20.3	2.3	22.60	0.182	2.000	Pass
			RB3#HIGH	20.24	2.3	22.54	0.179	2.000	Pass
			RB6#LOW	19.44	2.3	21.74	0.149	2.000	Pass
3 MHz	LCH	QPSK	RB1#LOW	22.28	2.3	24.58	0.287	2.000	Pass
			RB1#MID	22.08	2.3	24.38	0.274	2.000	Pass
			RB1#HIGH	21.86	2.3	24.16	0.261	2.000	Pass
			RB8#LOW	21.22	2.3	23.52	0.225	2.000	Pass
			RB8#MID	21.2	2.3	23.50	0.224	2.000	Pass
			RB8#HIGH	21.15	2.3	23.45	0.221	2.000	Pass
			RB15#LOW	21.18	2.3	23.48	0.223	2.000	Pass
		16-QAM	RB1#LOW	21.15	2.3	23.45	0.221	2.000	Pass
			RB1#MID	21.11	2.3	23.41	0.219	2.000	Pass
			RB1#HIGH	20.93	2.3	23.23	0.210	2.000	Pass
			RB8#LOW	20.53	2.3	22.83	0.192	2.000	Pass
			RB8#MID	20.48	2.3	22.78	0.190	2.000	Pass
			RB8#HIGH	20.41	2.3	22.71	0.187	2.000	Pass
			RB15#LOW	20.44	2.3	22.74	0.188	2.000	Pass
	MCH	QPSK	RB1#LOW	22.33	2.3	24.63	0.290	2.000	Pass
			RB1#MID	22.34	2.3	24.64	0.291	2.000	Pass
			RB1#HIGH	22.1	2.3	24.40	0.275	2.000	Pass
			RB8#LOW	21.36	2.3	23.66	0.232	2.000	Pass
			RB8#MID	21.34	2.3	23.64	0.231	2.000	Pass
			RB8#HIGH	21.36	2.3	23.66	0.232	2.000	Pass
			RB15#LOW	21.29	2.3	23.59	0.229	2.000	Pass
		16-QAM	RB1#LOW	21.66	2.3	23.96	0.249	2.000	Pass
			RB1#MID	21.71	2.3	24.01	0.252	2.000	Pass
			RB1#HIGH	21.55	2.3	23.85	0.243	2.000	Pass
			RB8#LOW	20.45	2.3	22.75	0.188	2.000	Pass
			RB8#MID	20.57	2.3	22.87	0.194	2.000	Pass
			RB8#HIGH	20.5	2.3	22.80	0.191	2.000	Pass
			RB15#LOW	20.45	2.3	22.75	0.188	2.000	Pass
	HCH	QPSK	RB1#LOW	21.81	2.3	24.11	0.258	2.000	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
LTE BAND 2									
			RB1#MID	21.38	2.3	23.68	0.233	2.000	Pass
			RB1#HIGH	20.93	2.3	23.23	0.210	2.000	Pass
			RB8#LOW	20.62	2.3	22.92	0.196	2.000	Pass
			RB8#MID	20.55	2.3	22.85	0.193	2.000	Pass
			RB8#HIGH	20.33	2.3	22.63	0.183	2.000	Pass
			RB15#LOW	20.51	2.3	22.81	0.191	2.000	Pass
		16-QAM	RB1#LOW	20.83	2.3	23.13	0.206	2.000	Pass
			RB1#MID	20.52	2.3	22.82	0.191	2.000	Pass
			RB1#HIGH	20.12	2.3	22.42	0.175	2.000	Pass
			RB8#LOW	19.82	2.3	22.12	0.163	2.000	Pass
			RB8#MID	19.68	2.3	21.98	0.158	2.000	Pass
			RB8#HIGH	19.5	2.3	21.80	0.151	2.000	Pass
			RB15#LOW	19.64	2.3	21.94	0.156	2.000	Pass
5 MHz	LCH	QPSK	RB1#LOW	22.56	2.3	24.86	0.306	2.000	Pass
			RB1#MID	22.16	2.3	24.46	0.279	2.000	Pass
			RB1#HIGH	21.95	2.3	24.25	0.266	2.000	Pass
			RB12#LOW	21.12	2.3	23.42	0.220	2.000	Pass
			RB12#MID	21.14	2.3	23.44	0.221	2.000	Pass
			RB12#HIGH	20.99	2.3	23.29	0.213	2.000	Pass
			RB25#LOW	21.12	2.3	23.42	0.220	2.000	Pass
		16-QAM	RB1#LOW	21.63	2.3	23.93	0.247	2.000	Pass
			RB1#MID	21.42	2.3	23.72	0.236	2.000	Pass
			RB1#HIGH	21.29	2.3	23.59	0.229	2.000	Pass
			RB12#LOW	20.47	2.3	22.77	0.189	2.000	Pass
			RB12#MID	20.51	2.3	22.81	0.191	2.000	Pass
			RB12#HIGH	20.43	2.3	22.73	0.187	2.000	Pass
			RB25#LOW	20.42	2.3	22.72	0.187	2.000	Pass
	MCH	QPSK	RB1#LOW	22.62	2.3	24.92	0.310	2.000	Pass
			RB1#MID	22.5	2.3	24.80	0.302	2.000	Pass
			RB1#HIGH	22.33	2.3	24.63	0.290	2.000	Pass
			RB12#LOW	21.38	2.3	23.68	0.233	2.000	Pass
			RB12#MID	21.48	2.3	23.78	0.239	2.000	Pass
			RB12#HIGH	21.33	2.3	23.63	0.231	2.000	Pass
			RB25#LOW	21.39	2.3	23.69	0.234	2.000	Pass
		16-QAM	RB1#LOW	22.07	2.3	24.37	0.274	2.000	Pass
			RB1#MID	22.04	2.3	24.34	0.272	2.000	Pass
			RB1#HIGH	21.89	2.3	24.19	0.262	2.000	Pass
			RB12#LOW	20.67	2.3	22.97	0.198	2.000	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict	
LTE BAND 2										
			RB12#MID	20.69	2.3	22.99	0.199	2.000	Pass	
			RB12#HIGH	20.64	2.3	22.94	0.197	2.000	Pass	
			RB25#LOW	20.54	2.3	22.84	0.192	2.000	Pass	
	HCH	QPSK	RB1#LOW	22.38	2.3	24.68	0.294	2.000	Pass	
			RB1#MID	21.89	2.3	24.19	0.262	2.000	Pass	
			RB1#HIGH	21.23	2.3	23.53	0.225	2.000	Pass	
			RB12#LOW	21.09	2.3	23.39	0.218	2.000	Pass	
			RB12#MID	20.94	2.3	23.24	0.211	2.000	Pass	
			RB12#HIGH	20.6	2.3	22.90	0.195	2.000	Pass	
			RB25#LOW	20.88	2.3	23.18	0.208	2.000	Pass	
			16-QAM	RB1#LOW	21.59	2.3	23.89	0.245	2.000	Pass
				RB1#MID	21.12	2.3	23.42	0.220	2.000	Pass
		RB1#HIGH		20.58	2.3	22.88	0.194	2.000	Pass	
		RB12#LOW		20.26	2.3	22.56	0.180	2.000	Pass	
		RB12#MID		20.14	2.3	22.44	0.175	2.000	Pass	
		RB12#HIGH	19.78	2.3	22.08	0.161	2.000	Pass		
		RB25#LOW	19.95	2.3	22.25	0.168	2.000	Pass		
10 MHz	LCH	QPSK	RB1#LOW	22.42	2.3	24.72	0.296	2.000	Pass	
			RB1#MID	22.07	2.3	24.37	0.274	2.000	Pass	
			RB1#HIGH	21.85	2.3	24.15	0.260	2.000	Pass	
			RB25#LOW	21.07	2.3	23.37	0.217	2.000	Pass	
			RB25#MID	21.12	2.3	23.42	0.220	2.000	Pass	
			RB25#HIGH	20.98	2.3	23.28	0.213	2.000	Pass	
			RB50#LOW	21.1	2.3	23.40	0.219	2.000	Pass	
		16-QAM	RB1#LOW	21.35	2.3	23.65	0.232	2.000	Pass	
			RB1#MID	21.14	2.3	23.44	0.221	2.000	Pass	
			RB1#HIGH	21.04	2.3	23.34	0.216	2.000	Pass	
			RB25#LOW	20.31	2.3	22.61	0.182	2.000	Pass	
			RB25#MID	20.34	2.3	22.64	0.184	2.000	Pass	
			RB25#HIGH	20.16	2.3	22.46	0.176	2.000	Pass	
			RB50#LOW	21.61	2.3	23.91	0.246	2.000	Pass	
	MCH	QPSK	RB1#LOW	22.72	2.3	25.02	0.318	2.000	Pass	
			RB1#MID	22.43	2.3	24.73	0.297	2.000	Pass	
			RB1#HIGH	22.2	2.3	24.50	0.282	2.000	Pass	
			RB25#LOW	21.46	2.3	23.76	0.238	2.000	Pass	
			RB25#MID	21.51	2.3	23.81	0.240	2.000	Pass	
			RB25#HIGH	21.28	2.3	23.58	0.228	2.000	Pass	
			RB50#LOW	21.33	2.3	23.63	0.231	2.000	Pass	

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
LTE BAND 2									
		16-QAM	RB1#LOW	22.1	2.3	24.40	0.275	2.000	Pass
			RB1#MID	22.03	2.3	24.33	0.271	2.000	Pass
			RB1#HIGH	21.69	2.3	23.99	0.251	2.000	Pass
			RB25#LOW	20.58	2.3	22.88	0.194	2.000	Pass
			RB25#MID	20.68	2.3	22.98	0.199	2.000	Pass
			RB25#HIGH	20.46	2.3	22.76	0.189	2.000	Pass
			RB50#LOW	22.26	2.3	24.56	0.286	2.000	Pass
	HCH	QPSK	RB1#LOW	22.49	2.3	24.79	0.301	2.000	Pass
			RB1#MID	22.36	2.3	24.66	0.292	2.000	Pass
			RB1#HIGH	21.3	2.3	23.60	0.229	2.000	Pass
			RB25#LOW	21.27	2.3	23.57	0.228	2.000	Pass
			RB25#MID	21.49	2.3	23.79	0.239	2.000	Pass
			RB25#HIGH	20.97	2.3	23.27	0.212	2.000	Pass
			RB50#LOW	21.26	2.3	23.56	0.227	2.000	Pass
		16-QAM	RB1#LOW	21.63	2.3	23.93	0.247	2.000	Pass
			RB1#MID	21.56	2.3	23.86	0.243	2.000	Pass
			RB1#HIGH	20.45	2.3	22.75	0.188	2.000	Pass
			RB25#LOW	20.51	2.3	22.81	0.191	2.000	Pass
			RB25#MID	20.61	2.3	22.91	0.195	2.000	Pass
			RB25#HIGH	20.08	2.3	22.38	0.173	2.000	Pass
			RB50#LOW	21.57	2.3	23.87	0.244	2.000	Pass
15 MHz	LCH	QPSK	RB1#LOW	22.38	2.3	24.68	0.294	2.000	Pass
			RB1#MID	21.93	2.3	24.23	0.265	2.000	Pass
			RB1#HIGH	22.23	2.3	24.53	0.284	2.000	Pass
			RB36#LOW	21.19	2.3	23.49	0.223	2.000	Pass
			RB36#MID	21.22	2.3	23.52	0.225	2.000	Pass
			RB36#HIGH	21.22	2.3	23.52	0.225	2.000	Pass
			RB75#LOW	21.93	2.3	24.23	0.265	2.000	Pass
		16-QAM	RB1#LOW	21.43	2.3	23.73	0.236	2.000	Pass
			RB1#MID	21.3	2.3	23.60	0.229	2.000	Pass
			RB1#HIGH	21.47	2.3	23.77	0.238	2.000	Pass
			RB36#LOW	22.19	2.3	24.49	0.281	2.000	Pass
			RB36#MID	22.17	2.3	24.47	0.280	2.000	Pass
			RB36#HIGH	22.17	2.3	24.47	0.280	2.000	Pass
			RB75#LOW	22.18	2.3	24.48	0.281	2.000	Pass
	MCH	QPSK	RB1#LOW	22.74	2.3	25.04	0.319	2.000	Pass
			RB1#MID	22.59	2.3	24.89	0.308	2.000	Pass
			RB1#HIGH	22.18	2.3	24.48	0.281	2.000	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
LTE BAND 2									
			RB36#LOW	21.86	2.3	24.16	0.261	2.000	Pass
			RB36#MID	21.8	2.3	24.10	0.257	2.000	Pass
			RB36#HIGH	21.54	2.3	23.84	0.242	2.000	Pass
			RB75#LOW	22.08	2.3	24.38	0.274	2.000	Pass
		16-QAM	RB1#LOW	22.17	2.3	24.47	0.280	2.000	Pass
			RB1#MID	22.17	2.3	24.47	0.280	2.000	Pass
			RB1#HIGH	21.71	2.3	24.01	0.252	2.000	Pass
			RB36#LOW	22.21	2.3	24.51	0.282	2.000	Pass
			RB36#MID	22.2	2.3	24.50	0.282	2.000	Pass
			RB36#HIGH	22.23	2.3	24.53	0.284	2.000	Pass
			RB75#LOW	22.21	2.3	24.51	0.282	2.000	Pass
	HCH	QPSK	RB1#LOW	22.15	2.3	24.45	0.279	2.000	Pass
			RB1#MID	22.62	2.3	24.92	0.310	2.000	Pass
			RB1#HIGH	21.52	2.3	23.82	0.241	2.000	Pass
			RB36#LOW	21.64	2.3	23.94	0.248	2.000	Pass
			RB36#MID	21.68	2.3	23.98	0.250	2.000	Pass
			RB36#HIGH	21.45	2.3	23.75	0.237	2.000	Pass
			RB75#LOW	21.92	2.3	24.22	0.264	2.000	Pass
		16-QAM	RB1#LOW	21.66	2.3	23.96	0.249	2.000	Pass
			RB1#MID	22.23	2.3	24.53	0.284	2.000	Pass
			RB1#HIGH	21.13	2.3	23.43	0.220	2.000	Pass
			RB36#LOW	22.1	2.3	24.40	0.275	2.000	Pass
			RB36#MID	22.08	2.3	24.38	0.274	2.000	Pass
			RB36#HIGH	22.12	2.3	24.42	0.277	2.000	Pass
			RB75#LOW	22.11	2.3	24.41	0.276	2.000	Pass
20 MHz	LCH	QPSK	RB1#LOW	22.6	2.3	24.90	0.309	2.000	Pass
			RB1#MID	22.26	2.3	24.56	0.286	2.000	Pass
			RB1#HIGH	22.61	2.3	24.91	0.310	2.000	Pass
			RB50#LOW	21.23	2.3	23.53	0.225	2.000	Pass
			RB50#MID	21.41	2.3	23.71	0.235	2.000	Pass
			RB50#HIGH	21.52	2.3	23.82	0.241	2.000	Pass
		16-QAM	RB100#LOW	21.8	2.3	24.10	0.257	2.000	Pass
			RB1#LOW	22.01	2.3	24.31	0.270	2.000	Pass
			RB1#MID	21.92	2.3	24.22	0.264	2.000	Pass
			RB1#HIGH	22.27	2.3	24.57	0.286	2.000	Pass
			RB50#LOW	22.13	2.3	24.43	0.277	2.000	Pass
			RB50#MID	22.1	2.3	24.40	0.275	2.000	Pass
			RB50#HIGH	22.09	2.3	24.39	0.275	2.000	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
LTE BAND 2									
	MCH	QPSK	RB100#LOW	22.09	2.3	24.39	0.275	2.000	Pass
			RB1#LOW	22.85	2.3	25.15	0.327	2.000	Pass
			RB1#MID	22.74	2.3	25.04	0.319	2.000	Pass
			RB1#HIGH	22.24	2.3	24.54	0.284	2.000	Pass
			RB50#LOW	21.77	2.3	24.07	0.255	2.000	Pass
			RB50#MID	21.81	2.3	24.11	0.258	2.000	Pass
			RB50#HIGH	21.43	2.3	23.73	0.236	2.000	Pass
		16-QAM	RB100#LOW	21.8	2.3	24.10	0.257	2.000	Pass
			RB1#LOW	22.27	2.3	24.57	0.286	2.000	Pass
			RB1#MID	22.3	2.3	24.60	0.288	2.000	Pass
			RB1#HIGH	21.73	2.3	24.03	0.253	2.000	Pass
			RB50#LOW	22.11	2.3	24.41	0.276	2.000	Pass
			RB50#MID	22.1	2.3	24.40	0.275	2.000	Pass
			RB50#HIGH	22.09	2.3	24.39	0.275	2.000	Pass
			RB100#LOW	22.08	2.3	24.38	0.274	2.000	Pass
	HCH	QPSK	RB1#LOW	22.14	2.3	24.44	0.278	2.000	Pass
			RB1#MID	22.59	2.3	24.89	0.308	2.000	Pass
			RB1#HIGH	21.38	2.3	23.68	0.233	2.000	Pass
			RB50#LOW	21.16	2.3	23.46	0.222	2.000	Pass
			RB50#MID	21.59	2.3	23.89	0.245	2.000	Pass
			RB50#HIGH	21.4	2.3	23.70	0.234	2.000	Pass
			RB100#LOW	21.89	2.3	24.19	0.262	2.000	Pass
		16-QAM	RB1#LOW	21.41	2.3	23.71	0.235	2.000	Pass
			RB1#MID	22.2	2.3	24.50	0.282	2.000	Pass
			RB1#HIGH	20.9	2.3	23.20	0.209	2.000	Pass
			RB50#LOW	22.31	2.3	24.61	0.289	2.000	Pass
			RB50#MID	22.27	2.3	24.57	0.286	2.000	Pass
			RB50#HIGH	22.25	2.3	24.55	0.285	2.000	Pass
			RB100#LOW	22.24	2.3	24.54	0.284	2.000	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
LTE BAND 4									
1.4 MHz	LCH	QPSK	RB1#LOW	21.4	2.3	23.70	0.234	1.000	Pass
			RB1#MID	21.5	2.3	23.80	0.240	1.000	Pass
			RB1#HIGH	21.64	2.3	23.94	0.248	1.000	Pass
			RB3#LOW	21.54	2.3	23.84	0.242	1.000	Pass
			RB3#MID	21.67	2.3	23.97	0.249	1.000	Pass
			RB3#HIGH	21.74	2.3	24.04	0.254	1.000	Pass
			RB6#LOW	20.7	2.3	23.00	0.200	1.000	Pass
		16-QAM	RB1#LOW	20.74	2.3	23.04	0.201	1.000	Pass
			RB1#MID	20.96	2.3	23.26	0.212	1.000	Pass
			RB1#HIGH	21.07	2.3	23.37	0.217	1.000	Pass
			RB3#LOW	20.79	2.3	23.09	0.204	1.000	Pass
			RB3#MID	20.99	2.3	23.29	0.213	1.000	Pass
			RB3#HIGH	21.04	2.3	23.34	0.216	1.000	Pass
			RB6#LOW	20.1	2.3	22.40	0.174	1.000	Pass
	MCH	QPSK	RB1#LOW	22.81	2.3	25.11	0.324	1.000	Pass
			RB1#MID	22.66	2.3	24.96	0.313	1.000	Pass
			RB1#HIGH	22.64	2.3	24.94	0.312	1.000	Pass
			RB3#LOW	22.71	2.3	25.01	0.317	1.000	Pass
			RB3#MID	22.77	2.3	25.07	0.321	1.000	Pass
			RB3#HIGH	22.71	2.3	25.01	0.317	1.000	Pass
			RB6#LOW	21.75	2.3	24.05	0.254	1.000	Pass
		16-QAM	RB1#LOW	22.23	2.3	24.53	0.284	1.000	Pass
			RB1#MID	22.19	2.3	24.49	0.281	1.000	Pass
			RB1#HIGH	22.28	2.3	24.58	0.287	1.000	Pass
			RB3#LOW	22.03	2.3	24.33	0.271	1.000	Pass
			RB3#MID	22.08	2.3	24.38	0.274	1.000	Pass
			RB3#HIGH	22.06	2.3	24.36	0.273	1.000	Pass
			RB6#LOW	20.85	2.3	23.15	0.207	1.000	Pass
	HCH	QPSK	RB1#LOW	22.91	2.3	25.21	0.332	1.000	Pass
			RB1#MID	22.88	2.3	25.18	0.330	1.000	Pass
			RB1#HIGH	22.96	2.3	25.26	0.336	1.000	Pass
			RB3#LOW	22.91	2.3	25.21	0.332	1.000	Pass
			RB3#MID	22.96	2.3	25.26	0.336	1.000	Pass
			RB3#HIGH	22.97	2.3	25.27	0.337	1.000	Pass
			RB6#LOW	22.09	2.3	24.39	0.275	1.000	Pass
		16-QAM	RB1#LOW	22.1	2.3	24.40	0.275	1.000	Pass
			RB1#MID	22.23	2.3	24.53	0.284	1.000	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict	
LTE BAND 4										
			RB1#HIGH	22.3	2.3	24.60	0.288	1.000	Pass	
			RB3#LOW	22.31	2.3	24.61	0.289	1.000	Pass	
			RB3#MID	22.38	2.3	24.68	0.294	1.000	Pass	
			RB3#HIGH	22.39	2.3	24.69	0.294	1.000	Pass	
			RB6#LOW	21.44	2.3	23.74	0.237	1.000	Pass	
3 MHz	LCH	QPSK	RB1#LOW	22.03	2.3	24.33	0.271	1.000	Pass	
			RB1#MID	22.4	2.3	24.70	0.295	1.000	Pass	
			RB1#HIGH	22.5	2.3	24.80	0.302	1.000	Pass	
			RB8#LOW	21.32	2.3	23.62	0.230	1.000	Pass	
			RB8#MID	21.58	2.3	23.88	0.244	1.000	Pass	
			RB8#HIGH	21.66	2.3	23.96	0.249	1.000	Pass	
			RB15#LOW	21.49	2.3	23.79	0.239	1.000	Pass	
		16-QAM	RB1#LOW	21.12	2.3	23.42	0.220	1.000	Pass	
			RB1#MID	21.57	2.3	23.87	0.244	1.000	Pass	
			RB1#HIGH	21.69	2.3	23.99	0.251	1.000	Pass	
			RB8#LOW	20.58	2.3	22.88	0.194	1.000	Pass	
			RB8#MID	20.81	2.3	23.11	0.205	1.000	Pass	
			RB8#HIGH	20.91	2.3	23.21	0.209	1.000	Pass	
			RB15#LOW	20.68	2.3	22.98	0.199	1.000	Pass	
		MCH	QPSK	RB1#LOW	23.01	2.3	25.31	0.340	1.000	Pass
				RB1#MID	22.96	2.3	25.26	0.336	1.000	Pass
	RB1#HIGH			22.86	2.3	25.16	0.328	1.000	Pass	
	RB8#LOW			22.09	2.3	24.39	0.275	1.000	Pass	
	RB8#MID			22.09	2.3	24.39	0.275	1.000	Pass	
	RB8#HIGH			22.09	2.3	24.39	0.275	1.000	Pass	
	RB15#LOW			22.05	2.3	24.35	0.272	1.000	Pass	
	16-QAM		RB1#LOW	22.37	2.3	24.67	0.293	1.000	Pass	
			RB1#MID	22.51	2.3	24.81	0.303	1.000	Pass	
			RB1#HIGH	22.41	2.3	24.71	0.296	1.000	Pass	
			RB8#LOW	21.23	2.3	23.53	0.225	1.000	Pass	
			RB8#MID	21.27	2.3	23.57	0.228	1.000	Pass	
			RB8#HIGH	21.3	2.3	23.60	0.229	1.000	Pass	
			RB15#LOW	21.25	2.3	23.55	0.226	1.000	Pass	
	HCH		QPSK	RB1#LOW	22.98	2.3	25.28	0.337	1.000	Pass
				RB1#MID	23.09	2.3	25.39	0.346	1.000	Pass
				RB1#HIGH	23.06	2.3	25.36	0.344	1.000	Pass
		RB8#LOW		22.17	2.3	24.47	0.280	1.000	Pass	
		RB8#MID		22.28	2.3	24.58	0.287	1.000	Pass	

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
LTE BAND 4									
5 MHz		16-QAM	RB8#HIGH	22.32	2.3	24.62	0.290	1.000	Pass
			RB15#LOW	22.27	2.3	24.57	0.286	1.000	Pass
			RB1#LOW	22.16	2.3	24.46	0.279	1.000	Pass
			RB1#MID	22.33	2.3	24.63	0.290	1.000	Pass
			RB1#HIGH	22.39	2.3	24.69	0.294	1.000	Pass
			RB8#LOW	21.36	2.3	23.66	0.232	1.000	Pass
			RB8#MID	21.46	2.3	23.76	0.238	1.000	Pass
			RB8#HIGH	21.49	2.3	23.79	0.239	1.000	Pass
			RB15#LOW	21.38	2.3	23.68	0.233	1.000	Pass
	LCH	QPSK	RB1#LOW	22.56	2.3	24.86	0.306	1.000	Pass
			RB1#MID	23.04	2.3	25.34	0.342	1.000	Pass
			RB1#HIGH	23.35	2.3	25.65	0.367	1.000	Pass
			RB12#LOW	21.67	2.3	23.97	0.249	1.000	Pass
			RB12#MID	22.04	2.3	24.34	0.272	1.000	Pass
			RB12#HIGH	22.17	2.3	24.47	0.280	1.000	Pass
			RB25#LOW	21.98	2.3	24.28	0.268	1.000	Pass
		16-QAM	RB1#LOW	21.78	2.3	24.08	0.256	1.000	Pass
			RB1#MID	22.43	2.3	24.73	0.297	1.000	Pass
			RB1#HIGH	22.7	2.3	25.00	0.316	1.000	Pass
			RB12#LOW	20.89	2.3	23.19	0.208	1.000	Pass
			RB12#MID	21.27	2.3	23.57	0.228	1.000	Pass
			RB12#HIGH	21.4	2.3	23.70	0.234	1.000	Pass
			RB25#LOW	21.12	2.3	23.42	0.220	1.000	Pass
	MCH	QPSK	RB1#LOW	23.2	2.3	25.50	0.355	1.000	Pass
			RB1#MID	23.19	2.3	25.49	0.354	1.000	Pass
			RB1#HIGH	23.17	2.3	25.47	0.352	1.000	Pass
			RB12#LOW	22.21	2.3	24.51	0.282	1.000	Pass
			RB12#MID	22.31	2.3	24.61	0.289	1.000	Pass
			RB12#HIGH	22.21	2.3	24.51	0.282	1.000	Pass
			RB25#LOW	22.26	2.3	24.56	0.286	1.000	Pass
		16-QAM	RB1#LOW	22.81	2.3	25.11	0.324	1.000	Pass
			RB1#MID	22.85	2.3	25.15	0.327	1.000	Pass
			RB1#HIGH	22.8	2.3	25.10	0.324	1.000	Pass
			RB12#LOW	21.46	2.3	23.76	0.238	1.000	Pass
			RB12#MID	21.56	2.3	23.86	0.243	1.000	Pass
			RB12#HIGH	21.52	2.3	23.82	0.241	1.000	Pass
			RB25#LOW	21.43	2.3	23.73	0.236	1.000	Pass
	HCH	QPSK	RB1#LOW	23.28	2.3	25.58	0.361	1.000	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
LTE BAND 4									
			RB1#MID	23.3	2.3	25.60	0.363	1.000	Pass
			RB1#HIGH	23.43	2.3	25.73	0.374	1.000	Pass
			RB12#LOW	22.27	2.3	24.57	0.286	1.000	Pass
			RB12#MID	22.42	2.3	24.72	0.296	1.000	Pass
			RB12#HIGH	22.44	2.3	24.74	0.298	1.000	Pass
			RB25#LOW	22.41	2.3	24.71	0.296	1.000	Pass
		16-QAM	RB1#LOW	22.44	2.3	24.74	0.298	1.000	Pass
			RB1#MID	22.66	2.3	24.96	0.313	1.000	Pass
			RB1#HIGH	22.77	2.3	25.07	0.321	1.000	Pass
			RB12#LOW	21.54	2.3	23.84	0.242	1.000	Pass
			RB12#MID	21.72	2.3	24.02	0.252	1.000	Pass
			RB12#HIGH	21.74	2.3	24.04	0.254	1.000	Pass
			RB25#LOW	21.56	2.3	23.86	0.243	1.000	Pass
10 MHz	LCH	QPSK	RB1#LOW	22.58	2.3	24.88	0.308	1.000	Pass
			RB1#MID	23.51	2.3	25.81	0.381	1.000	Pass
			RB1#HIGH	23.72	2.3	26.02	0.400	1.000	Pass
			RB25#LOW	21.99	2.3	24.29	0.269	1.000	Pass
			RB25#MID	22.61	2.3	24.91	0.310	1.000	Pass
			RB25#HIGH	22.69	2.3	24.99	0.316	1.000	Pass
			RB50#LOW	22.38	2.3	24.68	0.294	1.000	Pass
		16-QAM	RB1#LOW	21.71	2.3	24.01	0.252	1.000	Pass
			RB1#MID	22.65	2.3	24.95	0.313	1.000	Pass
			RB1#HIGH	22.86	2.3	25.16	0.328	1.000	Pass
			RB25#LOW	21.21	2.3	23.51	0.224	1.000	Pass
			RB25#MID	21.73	2.3	24.03	0.253	1.000	Pass
			RB25#HIGH	21.84	2.3	24.14	0.259	1.000	Pass
			RB50#LOW	22.91	2.3	25.21	0.332	1.000	Pass
	MCH	QPSK	RB1#LOW	23.36	2.3	25.66	0.368	1.000	Pass
			RB1#MID	23.28	2.3	25.58	0.361	1.000	Pass
			RB1#HIGH	23.15	2.3	25.45	0.351	1.000	Pass
			RB25#LOW	22.13	2.3	24.43	0.277	1.000	Pass
			RB25#MID	22.33	2.3	24.63	0.290	1.000	Pass
			RB25#HIGH	22.22	2.3	24.52	0.283	1.000	Pass
			RB50#LOW	22.17	2.3	24.47	0.280	1.000	Pass
		16-QAM	RB1#LOW	22.8	2.3	25.10	0.324	1.000	Pass
			RB1#MID	22.79	2.3	25.09	0.323	1.000	Pass
			RB1#HIGH	22.73	2.3	25.03	0.318	1.000	Pass
			RB25#LOW	21.32	2.3	23.62	0.230	1.000	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
LTE BAND 4									
15 MHz	HCH		RB25#MID	21.55	2.3	23.85	0.243	1.000	Pass
			RB25#HIGH	21.4	2.3	23.70	0.234	1.000	Pass
			RB50#LOW	23.01	2.3	25.31	0.340	1.000	Pass
		QPSK	RB1#LOW	23.18	2.3	25.48	0.353	1.000	Pass
			RB1#MID	23.24	2.3	25.54	0.358	1.000	Pass
			RB1#HIGH	23.4	2.3	25.70	0.372	1.000	Pass
			RB25#LOW	22.16	2.3	24.46	0.279	1.000	Pass
			RB25#MID	22.36	2.3	24.66	0.292	1.000	Pass
			RB25#HIGH	22.34	2.3	24.64	0.291	1.000	Pass
			RB50#LOW	22.24	2.3	24.54	0.284	1.000	Pass
		16-QAM	RB1#LOW	22.44	2.3	24.74	0.298	1.000	Pass
			RB1#MID	22.54	2.3	24.84	0.305	1.000	Pass
			RB1#HIGH	22.72	2.3	25.02	0.318	1.000	Pass
			RB25#LOW	21.46	2.3	23.76	0.238	1.000	Pass
			RB25#MID	21.66	2.3	23.96	0.249	1.000	Pass
			RB25#HIGH	21.62	2.3	23.92	0.247	1.000	Pass
			RB50#LOW	22.87	2.3	25.17	0.329	1.000	Pass
15 MHz	LCH	QPSK	RB1#LOW	22.92	2.3	25.22	0.333	1.000	Pass
			RB1#MID	23.87	2.3	26.17	0.414	1.000	Pass
			RB1#HIGH	23.85	2.3	26.15	0.412	1.000	Pass
			RB36#LOW	22.57	2.3	24.87	0.307	1.000	Pass
			RB36#MID	23.1	2.3	25.40	0.347	1.000	Pass
			RB36#HIGH	23.13	2.3	25.43	0.349	1.000	Pass
			RB75#LOW	23.54	2.3	25.84	0.384	1.000	Pass
		16-QAM	RB1#LOW	22.03	2.3	24.33	0.271	1.000	Pass
			RB1#MID	23.1	2.3	25.40	0.347	1.000	Pass
			RB1#HIGH	23.01	2.3	25.31	0.340	1.000	Pass
			RB36#LOW	23.67	2.3	25.97	0.395	1.000	Pass
			RB36#MID	23.64	2.3	25.94	0.393	1.000	Pass
			RB36#HIGH	23.67	2.3	25.97	0.395	1.000	Pass
			RB75#LOW	23.67	2.3	25.97	0.395	1.000	Pass
	MCH	QPSK	RB1#LOW	23.83	2.3	26.13	0.410	1.000	Pass
			RB1#MID	23.5	2.3	25.80	0.380	1.000	Pass
			RB1#HIGH	23.38	2.3	25.68	0.370	1.000	Pass
			RB36#LOW	22.51	2.3	24.81	0.303	1.000	Pass
			RB36#MID	22.57	2.3	24.87	0.307	1.000	Pass
			RB36#HIGH	22.56	2.3	24.86	0.306	1.000	Pass
			RB75#LOW	23.23	2.3	25.53	0.357	1.000	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
LTE BAND 4									
20 MHz	HCH	16-QAM	RB1#LOW	23.25	2.3	25.55	0.359	1.000	Pass
			RB1#MID	23.09	2.3	25.39	0.346	1.000	Pass
			RB1#HIGH	23.05	2.3	25.35	0.343	1.000	Pass
			RB36#LOW	23.49	2.3	25.79	0.379	1.000	Pass
			RB36#MID	23.47	2.3	25.77	0.378	1.000	Pass
			RB36#HIGH	23.46	2.3	25.76	0.377	1.000	Pass
			RB75#LOW	23.5	2.3	25.80	0.380	1.000	Pass
		QPSK	RB1#LOW	23.43	2.3	25.73	0.374	1.000	Pass
			RB1#MID	23.51	2.3	25.81	0.381	1.000	Pass
			RB1#HIGH	23.71	2.3	26.01	0.399	1.000	Pass
			RB36#LOW	22.55	2.3	24.85	0.305	1.000	Pass
			RB36#MID	22.62	2.3	24.92	0.310	1.000	Pass
			RB36#HIGH	22.68	2.3	24.98	0.315	1.000	Pass
			RB75#LOW	23.61	2.3	25.91	0.390	1.000	Pass
		16-QAM	RB1#LOW	23.13	2.3	25.43	0.349	1.000	Pass
			RB1#MID	23.21	2.3	25.51	0.356	1.000	Pass
			RB1#HIGH	23.38	2.3	25.68	0.370	1.000	Pass
			RB36#LOW	23.75	2.3	26.05	0.403	1.000	Pass
			RB36#MID	23.72	2.3	26.02	0.400	1.000	Pass
			RB36#HIGH	23.76	2.3	26.06	0.404	1.000	Pass
			RB75#LOW	23.75	2.3	26.05	0.403	1.000	Pass
20 MHz	LCH	QPSK	RB1#LOW	23.13	2.3	25.43	0.349	1.000	Pass
			RB1#MID	24.28	2.3	26.58	0.455	1.000	Pass
			RB1#HIGH	23.55	2.3	25.85	0.385	1.000	Pass
			RB50#LOW	22.91	2.3	25.21	0.332	1.000	Pass
			RB50#MID	23.33	2.3	25.63	0.366	1.000	Pass
			RB50#HIGH	23.06	2.3	25.36	0.344	1.000	Pass
			RB100#LOW	23.15	2.3	25.45	0.351	1.000	Pass
		16-QAM	RB1#LOW	22.71	2.3	25.01	0.317	1.000	Pass
			RB1#MID	23.92	2.3	26.22	0.419	1.000	Pass
			RB1#HIGH	23.27	2.3	25.57	0.361	1.000	Pass
			RB50#LOW	23.47	2.3	25.77	0.378	1.000	Pass
			RB50#MID	23.45	2.3	25.75	0.376	1.000	Pass
			RB50#HIGH	23.45	2.3	25.75	0.376	1.000	Pass
			RB100#LOW	23.44	2.3	25.74	0.375	1.000	Pass
	MCH	QPSK	RB1#LOW	24	2.3	26.30	0.427	1.000	Pass
			RB1#MID	23.68	2.3	25.98	0.396	1.000	Pass
			RB1#HIGH	23.4	2.3	25.70	0.372	1.000	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
LTE BAND 4									
			RB50#LOW	22.63	2.3	24.93	0.311	1.000	Pass
			RB50#MID	22.65	2.3	24.95	0.313	1.000	Pass
			RB50#HIGH	22.59	2.3	24.89	0.308	1.000	Pass
			RB100#LOW	23.17	2.3	25.47	0.352	1.000	Pass
		16-QAM	RB1#LOW	23.57	2.3	25.87	0.386	1.000	Pass
			RB1#MID	23.35	2.3	25.65	0.367	1.000	Pass
			RB1#HIGH	23.12	2.3	25.42	0.348	1.000	Pass
			RB50#LOW	23.55	2.3	25.85	0.385	1.000	Pass
			RB50#MID	23.54	2.3	25.84	0.384	1.000	Pass
			RB50#HIGH	23.53	2.3	25.83	0.383	1.000	Pass
			RB100#LOW	23.53	2.3	25.83	0.383	1.000	Pass
	HCH	QPSK	RB1#LOW	23.41	2.3	25.71	0.372	1.000	Pass
			RB1#MID	23.57	2.3	25.87	0.386	1.000	Pass
			RB1#HIGH	23.62	2.3	25.92	0.391	1.000	Pass
			RB50#LOW	22.56	2.3	24.86	0.306	1.000	Pass
			RB50#MID	22.6	2.3	24.90	0.309	1.000	Pass
			RB50#HIGH	22.49	2.3	24.79	0.301	1.000	Pass
			RB100#LOW	23.3	2.3	25.60	0.363	1.000	Pass
		16-QAM	RB1#LOW	22.89	2.3	25.19	0.330	1.000	Pass
			RB1#MID	23.09	2.3	25.39	0.346	1.000	Pass
			RB1#HIGH	23.15	2.3	25.45	0.351	1.000	Pass
			RB50#LOW	23.64	2.3	25.94	0.393	1.000	Pass
			RB50#MID	23.61	2.3	25.91	0.390	1.000	Pass
			RB50#HIGH	23.6	2.3	25.90	0.389	1.000	Pass
			RB100#LOW	23.68	2.3	25.98	0.396	1.000	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
LTE BAND 5										
1.4 MHz	LCH	QPSK	RB1#LOW	21.96	2.3	0.15	22.11	0.163	7.000	Pass
			RB1#MID	21.92	2.3	0.15	22.07	0.161	7.000	Pass
			RB1#HIGH	21.94	2.3	0.15	22.09	0.162	7.000	Pass
			RB3#LOW	21.87	2.3	0.15	22.02	0.159	7.000	Pass
			RB3#MID	21.92	2.3	0.15	22.07	0.161	7.000	Pass
			RB3#HIGH	21.92	2.3	0.15	22.07	0.161	7.000	Pass
			RB6#LOW	20.83	2.3	0.15	20.98	0.125	7.000	Pass
		16-QAM	RB1#LOW	20.87	2.3	0.15	21.02	0.126	7.000	Pass
			RB1#MID	20.97	2.3	0.15	21.12	0.129	7.000	Pass
			RB1#HIGH	21.01	2.3	0.15	21.16	0.131	7.000	Pass
			RB3#LOW	20.84	2.3	0.15	20.99	0.126	7.000	Pass
			RB3#MID	20.92	2.3	0.15	21.07	0.128	7.000	Pass
			RB3#HIGH	20.94	2.3	0.15	21.09	0.129	7.000	Pass
			RB6#LOW	20.04	2.3	0.15	20.19	0.104	7.000	Pass
	MCH	QPSK	RB1#LOW	22.09	2.3	0.15	22.24	0.167	7.000	Pass
			RB1#MID	22.02	2.3	0.15	22.17	0.165	7.000	Pass
			RB1#HIGH	22.05	2.3	0.15	22.20	0.166	7.000	Pass
			RB3#LOW	21.98	2.3	0.15	22.13	0.163	7.000	Pass
			RB3#MID	22.01	2.3	0.15	22.16	0.164	7.000	Pass
			RB3#HIGH	21.99	2.3	0.15	22.14	0.164	7.000	Pass
			RB6#LOW	21.01	2.3	0.15	21.16	0.131	7.000	Pass
		16-QAM	RB1#LOW	21.36	2.3	0.15	21.51	0.142	7.000	Pass
			RB1#MID	21.37	2.3	0.15	21.52	0.142	7.000	Pass
			RB1#HIGH	21.4	2.3	0.15	21.55	0.143	7.000	Pass
			RB3#LOW	21.21	2.3	0.15	21.36	0.137	7.000	Pass
			RB3#MID	21.18	2.3	0.15	21.33	0.136	7.000	Pass
			RB3#HIGH	21.2	2.3	0.15	21.35	0.136	7.000	Pass
			RB6#LOW	19.94	2.3	0.15	20.09	0.102	7.000	Pass
	HCH	QPSK	RB1#LOW	21.69	2.3	0.15	21.84	0.153	7.000	Pass
			RB1#MID	21.61	2.3	0.15	21.76	0.150	7.000	Pass
			RB1#HIGH	21.57	2.3	0.15	21.72	0.149	7.000	Pass
			RB3#LOW	21.61	2.3	0.15	21.76	0.150	7.000	Pass
			RB3#MID	21.6	2.3	0.15	21.75	0.150	7.000	Pass
			RB3#HIGH	21.59	2.3	0.15	21.74	0.149	7.000	Pass
			RB6#LOW	20.59	2.3	0.15	20.74	0.119	7.000	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
LTE BAND 5										
		16-QAM	RB1#LOW	20.64	2.3	0.15	20.79	0.120	7.000	Pass
			RB1#MID	20.64	2.3	0.15	20.79	0.120	7.000	Pass
			RB1#HIGH	20.65	2.3	0.15	20.80	0.120	7.000	Pass
			RB3#LOW	20.79	2.3	0.15	20.94	0.124	7.000	Pass
			RB3#MID	20.79	2.3	0.15	20.94	0.124	7.000	Pass
			RB3#HIGH	20.78	2.3	0.15	20.93	0.124	7.000	Pass
			RB6#LOW	19.85	2.3	0.15	20.00	0.100	7.000	Pass
3 MHz	LCH	QPSK	RB1#LOW	21.82	2.3	0.15	21.97	0.157	7.000	Pass
			RB1#MID	21.93	2.3	0.15	22.08	0.161	7.000	Pass
			RB1#HIGH	21.8	2.3	0.15	21.95	0.157	7.000	Pass
			RB8#LOW	20.86	2.3	0.15	21.01	0.126	7.000	Pass
			RB8#MID	20.97	2.3	0.15	21.12	0.129	7.000	Pass
			RB8#HIGH	20.94	2.3	0.15	21.09	0.129	7.000	Pass
			RB15#LOW	20.9	2.3	0.15	21.05	0.127	7.000	Pass
		16-QAM	RB1#LOW	20.62	2.3	0.15	20.77	0.119	7.000	Pass
			RB1#MID	20.86	2.3	0.15	21.01	0.126	7.000	Pass
			RB1#HIGH	20.75	2.3	0.15	20.90	0.123	7.000	Pass
			RB8#LOW	19.99	2.3	0.15	20.14	0.103	7.000	Pass
			RB8#MID	20.11	2.3	0.15	20.26	0.106	7.000	Pass
			RB8#HIGH	20.1	2.3	0.15	20.25	0.106	7.000	Pass
			RB15#LOW	19.98	2.3	0.15	20.13	0.103	7.000	Pass
	MCH	QPSK	RB1#LOW	22.02	2.3	0.15	22.17	0.165	7.000	Pass
			RB1#MID	22.08	2.3	0.15	22.23	0.167	7.000	Pass
			RB1#HIGH	21.92	2.3	0.15	22.07	0.161	7.000	Pass
			RB8#LOW	20.95	2.3	0.15	21.10	0.129	7.000	Pass
			RB8#MID	20.99	2.3	0.15	21.14	0.130	7.000	Pass
			RB8#HIGH	21	2.3	0.15	21.15	0.130	7.000	Pass
			RB15#LOW	20.96	2.3	0.15	21.11	0.129	7.000	Pass
		16-QAM	RB1#LOW	21.2	2.3	0.15	21.35	0.136	7.000	Pass
			RB1#MID	21.37	2.3	0.15	21.52	0.142	7.000	Pass
			RB1#HIGH	21.24	2.3	0.15	21.39	0.138	7.000	Pass
			RB8#LOW	20.12	2.3	0.15	20.27	0.106	7.000	Pass
			RB8#MID	20.15	2.3	0.15	20.30	0.107	7.000	Pass
			RB8#HIGH	20.12	2.3	0.15	20.27	0.106	7.000	Pass
			RB15#LOW	20.05	2.3	0.15	20.20	0.105	7.000	Pass
	HCH	QPSK	RB1#LOW	21.84	2.3	0.15	21.99	0.158	7.000	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
LTE BAND 5										
			RB1#MID	21.69	2.3	0.15	21.84	0.153	7.000	Pass
			RB1#HIGH	21.48	2.3	0.15	21.63	0.146	7.000	Pass
			RB8#LOW	20.71	2.3	0.15	20.86	0.122	7.000	Pass
			RB8#MID	20.72	2.3	0.15	20.87	0.122	7.000	Pass
			RB8#HIGH	20.63	2.3	0.15	20.78	0.120	7.000	Pass
			RB15#LOW	20.7	2.3	0.15	20.85	0.122	7.000	Pass
		16-QAM	RB1#LOW	20.77	2.3	0.15	20.92	0.124	7.000	Pass
			RB1#MID	20.69	2.3	0.15	20.84	0.121	7.000	Pass
			RB1#HIGH	20.53	2.3	0.15	20.68	0.117	7.000	Pass
			RB8#LOW	19.77	2.3	0.15	19.92	0.098	7.000	Pass
			RB8#MID	19.75	2.3	0.15	19.90	0.098	7.000	Pass
			RB8#HIGH	19.71	2.3	0.15	19.86	0.097	7.000	Pass
			RB15#LOW	19.68	2.3	0.15	19.83	0.096	7.000	Pass
5 MHz	LCH	QPSK	RB1#LOW	22.04	2.3	0.15	22.19	0.166	7.000	Pass
			RB1#MID	22.02	2.3	0.15	22.17	0.165	7.000	Pass
			RB1#HIGH	22.09	2.3	0.15	22.24	0.167	7.000	Pass
			RB12#LOW	20.88	2.3	0.15	21.03	0.127	7.000	Pass
			RB12#MID	21.02	2.3	0.15	21.17	0.131	7.000	Pass
			RB12#HIGH	20.96	2.3	0.15	21.11	0.129	7.000	Pass
			RB25#LOW	20.92	2.3	0.15	21.07	0.128	7.000	Pass
		16-QAM	RB1#LOW	21	2.3	0.15	21.15	0.130	7.000	Pass
			RB1#MID	21.19	2.3	0.15	21.34	0.136	7.000	Pass
			RB1#HIGH	21.15	2.3	0.15	21.30	0.135	7.000	Pass
			RB12#LOW	19.99	2.3	0.15	20.14	0.103	7.000	Pass
			RB12#MID	20.14	2.3	0.15	20.29	0.107	7.000	Pass
			RB12#HIGH	20.09	2.3	0.15	20.24	0.106	7.000	Pass
			RB25#LOW	20.01	2.3	0.15	20.16	0.104	7.000	Pass
	MCH	QPSK	RB1#LOW	22.16	2.3	0.15	22.31	0.170	7.000	Pass
			RB1#MID	22.06	2.3	0.15	22.21	0.166	7.000	Pass
			RB1#HIGH	22.09	2.3	0.15	22.24	0.167	7.000	Pass
			RB12#LOW	20.91	2.3	0.15	21.06	0.128	7.000	Pass
			RB12#MID	21.05	2.3	0.15	21.20	0.132	7.000	Pass
			RB12#HIGH	20.97	2.3	0.15	21.12	0.129	7.000	Pass
			RB25#LOW	20.95	2.3	0.15	21.10	0.129	7.000	Pass
		16-QAM	RB1#LOW	21.44	2.3	0.15	21.59	0.144	7.000	Pass
			RB1#MID	21.55	2.3	0.15	21.70	0.148	7.000	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
LTE BAND 5										
	HCH		RB1#HIGH	21.52	2.3	0.15	21.67	0.147	7.000	Pass
			RB12#LOW	20.08	2.3	0.15	20.23	0.105	7.000	Pass
			RB12#MID	20.23	2.3	0.15	20.38	0.109	7.000	Pass
			RB12#HIGH	20.16	2.3	0.15	20.31	0.107	7.000	Pass
			RB25#LOW	20.08	2.3	0.15	20.23	0.105	7.000	Pass
		QPSK	RB1#LOW	22.17	2.3	0.15	22.32	0.171	7.000	Pass
			RB1#MID	21.83	2.3	0.15	21.98	0.158	7.000	Pass
			RB1#HIGH	21.69	2.3	0.15	21.84	0.153	7.000	Pass
			RB12#LOW	20.88	2.3	0.15	21.03	0.127	7.000	Pass
			RB12#MID	20.86	2.3	0.15	21.01	0.126	7.000	Pass
			RB12#HIGH	20.68	2.3	0.15	20.83	0.121	7.000	Pass
			RB25#LOW	20.78	2.3	0.15	20.93	0.124	7.000	Pass
		16-QAM	RB1#LOW	21.11	2.3	0.15	21.26	0.134	7.000	Pass
			RB1#MID	20.95	2.3	0.15	21.10	0.129	7.000	Pass
			RB1#HIGH	20.76	2.3	0.15	20.91	0.123	7.000	Pass
			RB12#LOW	19.94	2.3	0.15	20.09	0.102	7.000	Pass
			RB12#MID	19.93	2.3	0.15	20.08	0.102	7.000	Pass
			RB12#HIGH	19.76	2.3	0.15	19.91	0.098	7.000	Pass
			RB25#LOW	19.78	2.3	0.15	19.93	0.098	7.000	Pass
10 MHz	LCH	QPSK	RB1#LOW	22.04	2.3	0.15	22.19	0.166	7.000	Pass
			RB1#MID	22	2.3	0.15	22.15	0.164	7.000	Pass
			RB1#HIGH	21.97	2.3	0.15	22.12	0.163	7.000	Pass
			RB25#LOW	20.77	2.3	0.15	20.92	0.124	7.000	Pass
			RB25#MID	20.96	2.3	0.15	21.11	0.129	7.000	Pass
			RB25#HIGH	20.83	2.3	0.15	20.98	0.125	7.000	Pass
			RB50#LOW	20.79	2.3	0.15	20.94	0.124	7.000	Pass
		16-QAM	RB1#LOW	20.76	2.3	0.15	20.91	0.123	7.000	Pass
			RB1#MID	20.93	2.3	0.15	21.08	0.128	7.000	Pass
			RB1#HIGH	20.87	2.3	0.15	21.02	0.126	7.000	Pass
			RB25#LOW	19.87	2.3	0.15	20.02	0.100	7.000	Pass
			RB25#MID	19.98	2.3	0.15	20.13	0.103	7.000	Pass
			RB25#HIGH	19.85	2.3	0.15	20.00	0.100	7.000	Pass
			RB50#LOW	21.39	2.3	0.15	21.54	0.143	7.000	Pass
	MCH	QPSK	RB1#LOW	22.11	2.3	0.15	22.26	0.168	7.000	Pass
			RB1#MID	22.08	2.3	0.15	22.23	0.167	7.000	Pass
			RB1#HIGH	22.05	2.3	0.15	22.20	0.166	7.000	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Limit (W)	Verdict
LTE BAND 5										
			RB25#LOW	20.77	2.3	0.15	20.92	0.124	7.000	Pass
			RB25#MID	20.99	2.3	0.15	21.14	0.130	7.000	Pass
			RB25#HIGH	20.86	2.3	0.15	21.01	0.126	7.000	Pass
			RB50#LOW	20.81	2.3	0.15	20.96	0.125	7.000	Pass
		16-QAM	RB1#LOW	21.2	2.3	0.15	21.35	0.136	7.000	Pass
			RB1#MID	21.38	2.3	0.15	21.53	0.142	7.000	Pass
			RB1#HIGH	21.27	2.3	0.15	21.42	0.139	7.000	Pass
			RB25#LOW	19.85	2.3	0.15	20.00	0.100	7.000	Pass
			RB25#MID	20.07	2.3	0.15	20.22	0.105	7.000	Pass
			RB25#HIGH	19.95	2.3	0.15	20.10	0.102	7.000	Pass
			RB50#LOW	21.45	2.3	0.15	21.60	0.145	7.000	Pass
	HCH	QPSK	RB1#LOW	22.15	2.3	0.15	22.30	0.170	7.000	Pass
			RB1#MID	22.05	2.3	0.15	22.20	0.166	7.000	Pass
			RB1#HIGH	21.75	2.3	0.15	21.90	0.155	7.000	Pass
			RB25#LOW	20.88	2.3	0.15	21.03	0.127	7.000	Pass
			RB25#MID	21.01	2.3	0.15	21.16	0.131	7.000	Pass
			RB25#HIGH	20.73	2.3	0.15	20.88	0.122	7.000	Pass
			RB50#LOW	20.81	2.3	0.15	20.96	0.125	7.000	Pass
		16-QAM	RB1#LOW	21	2.3	0.15	21.15	0.130	7.000	Pass
			RB1#MID	21.03	2.3	0.15	21.18	0.131	7.000	Pass
			RB1#HIGH	20.62	2.3	0.15	20.77	0.119	7.000	Pass
			RB25#LOW	19.98	2.3	0.15	20.13	0.103	7.000	Pass
			RB25#MID	20.11	2.3	0.15	20.26	0.106	7.000	Pass
			RB25#HIGH	19.83	2.3	0.15	19.98	0.100	7.000	Pass
			RB50#LOW	21.35	2.3	0.15	21.50	0.141	7.000	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
LTE BAND 7									
5 MHz	LCH	QPSK	RB1#LOW	22.12	2.3	24.42	0.277	2.000	Pass
			RB1#MID	22.09	2.3	24.39	0.275	2.000	Pass
			RB1#HIGH	22.11	2.3	24.41	0.276	2.000	Pass
			RB12#LOW	21	2.3	23.30	0.214	2.000	Pass
			RB12#MID	21.07	2.3	23.37	0.217	2.000	Pass
			RB12#HIGH	21.04	2.3	23.34	0.216	2.000	Pass
			RB25#LOW	20.99	2.3	23.29	0.213	2.000	Pass
		16-QcA M	RB1#LOW	21.31	2.3	23.61	0.230	2.000	Pass
			RB1#MID	21.32	2.3	23.62	0.230	2.000	Pass
			RB1#HIGH	21.32	2.3	23.62	0.230	2.000	Pass
			RB12#LOW	20.3	2.3	22.60	0.182	2.000	Pass
			RB12#MID	20.35	2.3	22.65	0.184	2.000	Pass
			RB12#HIGH	20.32	2.3	22.62	0.183	2.000	Pass
			RB25#LOW	20.23	2.3	22.53	0.179	2.000	Pass
	MCH	QPSK	RB1#LOW	22.22	2.3	24.52	0.283	2.000	Pass
			RB1#MID	22.08	2.3	24.38	0.274	2.000	Pass
			RB1#HIGH	22.07	2.3	24.37	0.274	2.000	Pass
			RB12#LOW	20.99	2.3	23.29	0.213	2.000	Pass
			RB12#MID	21.02	2.3	23.32	0.215	2.000	Pass
			RB12#HIGH	21.02	2.3	23.32	0.215	2.000	Pass
			RB25#LOW	21.03	2.3	23.33	0.215	2.000	Pass
		16-QAM	RB1#LOW	21.61	2.3	23.91	0.246	2.000	Pass
			RB1#MID	21.56	2.3	23.86	0.243	2.000	Pass
			RB1#HIGH	21.68	2.3	23.98	0.250	2.000	Pass
			RB12#LOW	20.32	2.3	22.62	0.183	2.000	Pass
			RB12#MID	20.46	2.3	22.76	0.189	2.000	Pass
			RB12#HIGH	20.4	2.3	22.70	0.186	2.000	Pass
			RB25#LOW	20.35	2.3	22.65	0.184	2.000	Pass
	HCH	QPSK	RB1#LOW	22.01	2.3	24.31	0.270	2.000	Pass
			RB1#MID	21.82	2.3	24.12	0.258	2.000	Pass
			RB1#HIGH	21.69	2.3	23.99	0.251	2.000	Pass
			RB12#LOW	20.78	2.3	23.08	0.203	2.000	Pass
			RB12#MID	20.78	2.3	23.08	0.203	2.000	Pass
			RB12#HIGH	20.74	2.3	23.04	0.201	2.000	Pass
			RB25#LOW	20.81	2.3	23.11	0.205	2.000	Pass
		16-QAM	RB1#LOW	21.18	2.3	23.48	0.223	2.000	Pass
			RB1#MID	21	2.3	23.30	0.214	2.000	Pass
			RB1#HIGH	20.93	2.3	23.23	0.210	2.000	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
LTE BAND 7									
10 MHz			RB12#LOW	20.08	2.3	22.38	0.173	2.000	Pass
			RB12#MID	20.11	2.3	22.41	0.174	2.000	Pass
			RB12#HIGH	19.92	2.3	22.22	0.167	2.000	Pass
			RB25#LOW	19.91	2.3	22.21	0.166	2.000	Pass
	LCH	QPSK	RB1#LOW	22.03	2.3	24.33	0.271	2.000	Pass
			RB1#MID	21.96	2.3	24.26	0.267	2.000	Pass
			RB1#HIGH	21.91	2.3	24.21	0.264	2.000	Pass
			RB25#LOW	20.92	2.3	23.22	0.210	2.000	Pass
			RB25#MID	21.04	2.3	23.34	0.216	2.000	Pass
			RB25#HIGH	20.93	2.3	23.23	0.210	2.000	Pass
			RB50#LOW	20.89	2.3	23.19	0.208	2.000	Pass
		16-QAM	RB1#LOW	21	2.3	23.30	0.214	2.000	Pass
			RB1#MID	21.1	2.3	23.40	0.219	2.000	Pass
			RB1#HIGH	20.95	2.3	23.25	0.211	2.000	Pass
			RB25#LOW	20.11	2.3	22.41	0.174	2.000	Pass
			RB25#MID	20.3	2.3	22.60	0.182	2.000	Pass
			RB25#HIGH	20.19	2.3	22.49	0.177	2.000	Pass
			RB50#LOW	21.5	2.3	23.80	0.240	2.000	Pass
	MCH	QPSK	RB1#LOW	22.1	2.3	24.40	0.275	2.000	Pass
			RB1#MID	22.04	2.3	24.34	0.272	2.000	Pass
			RB1#HIGH	22.01	2.3	24.31	0.270	2.000	Pass
			RB25#LOW	20.84	2.3	23.14	0.206	2.000	Pass
			RB25#MID	21.03	2.3	23.33	0.215	2.000	Pass
			RB25#HIGH	20.92	2.3	23.22	0.210	2.000	Pass
			RB50#LOW	20.94	2.3	23.24	0.211	2.000	Pass
		16-QAM	RB1#LOW	21.39	2.3	23.69	0.234	2.000	Pass
			RB1#MID	21.41	2.3	23.71	0.235	2.000	Pass
			RB1#HIGH	21.46	2.3	23.76	0.238	2.000	Pass
			RB25#LOW	20.16	2.3	22.46	0.176	2.000	Pass
			RB25#MID	20.36	2.3	22.66	0.185	2.000	Pass
			RB25#HIGH	20.2	2.3	22.50	0.178	2.000	Pass
			RB50#LOW	21.68	2.3	23.98	0.250	2.000	Pass
	HCH	QPSK	RB1#LOW	22.07	2.3	24.37	0.274	2.000	Pass
			RB1#MID	21.97	2.3	24.27	0.267	2.000	Pass
			RB1#HIGH	21.74	2.3	24.04	0.254	2.000	Pass
			RB25#LOW	20.65	2.3	22.95	0.197	2.000	Pass
			RB25#MID	20.99	2.3	23.29	0.213	2.000	Pass
			RB25#HIGH	20.73	2.3	23.03	0.201	2.000	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
LTE BAND 7									
		16-QAM	RB50#LOW	20.85	2.3	23.15	0.207	2.000	Pass
			RB1#LOW	21	2.3	23.30	0.214	2.000	Pass
			RB1#MID	21.04	2.3	23.34	0.216	2.000	Pass
			RB1#HIGH	20.78	2.3	23.08	0.203	2.000	Pass
			RB25#LOW	19.98	2.3	22.28	0.169	2.000	Pass
			RB25#MID	20.2	2.3	22.50	0.178	2.000	Pass
			RB25#HIGH	19.94	2.3	22.24	0.167	2.000	Pass
			RB50#LOW	21.5	2.3	23.80	0.240	2.000	Pass
	LCH	QPSK	RB1#LOW	22.08	2.3	24.38	0.274	2.000	Pass
			RB1#MID	22	2.3	24.30	0.269	2.000	Pass
			RB1#HIGH	22.1	2.3	24.40	0.275	2.000	Pass
			RB36#LOW	21.07	2.3	23.37	0.217	2.000	Pass
			RB36#MID	21.1	2.3	23.40	0.219	2.000	Pass
			RB36#HIGH	21.15	2.3	23.45	0.221	2.000	Pass
			RB75#LOW	21.83	2.3	24.13	0.259	2.000	Pass
		16-QAM	RB1#LOW	21.09	2.3	23.39	0.218	2.000	Pass
			RB1#MID	21.05	2.3	23.35	0.216	2.000	Pass
			RB1#HIGH	21.21	2.3	23.51	0.224	2.000	Pass
			RB36#LOW	22.09	2.3	24.39	0.275	2.000	Pass
			RB36#MID	22.07	2.3	24.37	0.274	2.000	Pass
			RB36#HIGH	22.1	2.3	24.40	0.275	2.000	Pass
			RB75#LOW	22.09	2.3	24.39	0.275	2.000	Pass
15 MHz	MCH	QPSK	RB1#LOW	22.1	2.3	24.40	0.275	2.000	Pass
			RB1#MID	22.07	2.3	24.37	0.274	2.000	Pass
			RB1#HIGH	22.09	2.3	24.39	0.275	2.000	Pass
			RB36#LOW	21.09	2.3	23.39	0.218	2.000	Pass
			RB36#MID	21.15	2.3	23.45	0.221	2.000	Pass
			RB36#HIGH	21.11	2.3	23.41	0.219	2.000	Pass
			RB75#LOW	21.77	2.3	24.07	0.255	2.000	Pass
		16-QAM	RB1#LOW	21.56	2.3	23.86	0.243	2.000	Pass
			RB1#MID	21.55	2.3	23.85	0.243	2.000	Pass
			RB1#HIGH	21.48	2.3	23.78	0.239	2.000	Pass
			RB36#LOW	22.04	2.3	24.34	0.272	2.000	Pass
			RB36#MID	22.05	2.3	24.35	0.272	2.000	Pass
			RB36#HIGH	22.04	2.3	24.34	0.272	2.000	Pass
			RB75#LOW	22.04	2.3	24.34	0.272	2.000	Pass
	HCH	QPSK	RB1#LOW	22.09	2.3	24.39	0.275	2.000	Pass
			RB1#MID	21.9	2.3	24.20	0.263	2.000	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
LTE BAND 7									
			RB1#HIGH	21.79	2.3	24.09	0.256	2.000	Pass
			RB36#LOW	21.04	2.3	23.34	0.216	2.000	Pass
			RB36#MID	21	2.3	23.30	0.214	2.000	Pass
			RB36#HIGH	20.97	2.3	23.27	0.212	2.000	Pass
			RB75#LOW	21.67	2.3	23.97	0.249	2.000	Pass
		16-QAM	RB1#LOW	21.59	2.3	23.89	0.245	2.000	Pass
			RB1#MID	21.46	2.3	23.76	0.238	2.000	Pass
			RB1#HIGH	21.33	2.3	23.63	0.231	2.000	Pass
			RB36#LOW	21.91	2.3	24.21	0.264	2.000	Pass
			RB36#MID	21.89	2.3	24.19	0.262	2.000	Pass
			RB36#HIGH	21.93	2.3	24.23	0.265	2.000	Pass
			RB75#LOW	21.98	2.3	24.28	0.268	2.000	Pass
20 MHz	LCH	QPSK	RB1#LOW	22.05	2.3	24.35	0.272	2.000	Pass
			RB1#MID	22.1	2.3	24.40	0.275	2.000	Pass
			RB1#HIGH	22.03	2.3	24.33	0.271	2.000	Pass
			RB50#LOW	21.04	2.3	23.34	0.216	2.000	Pass
			RB50#MID	21.16	2.3	23.46	0.222	2.000	Pass
			RB50#HIGH	21.16	2.3	23.46	0.222	2.000	Pass
			RB100#LOW	21.61	2.3	23.91	0.246	2.000	Pass
		16-QAM	RB1#LOW	21.56	2.3	23.86	0.243	2.000	Pass
			RB1#MID	21.75	2.3	24.05	0.254	2.000	Pass
			RB1#HIGH	21.64	2.3	23.94	0.248	2.000	Pass
			RB50#LOW	21.96	2.3	24.26	0.267	2.000	Pass
			RB50#MID	21.94	2.3	24.24	0.265	2.000	Pass
			RB50#HIGH	21.97	2.3	24.27	0.267	2.000	Pass
			RB100#LOW	21.96	2.3	24.26	0.267	2.000	Pass
	MCH	QPSK	RB1#LOW	22.03	2.3	24.33	0.271	2.000	Pass
			RB1#MID	22.13	2.3	24.43	0.277	2.000	Pass
			RB1#HIGH	21.96	2.3	24.26	0.267	2.000	Pass
			RB50#LOW	21	2.3	23.30	0.214	2.000	Pass
			RB50#MID	21.2	2.3	23.50	0.224	2.000	Pass
			RB50#HIGH	21.08	2.3	23.38	0.218	2.000	Pass
			RB100#LOW	21.63	2.3	23.93	0.247	2.000	Pass
		16-QAM	RB1#LOW	21.53	2.3	23.83	0.242	2.000	Pass
			RB1#MID	21.63	2.3	23.93	0.247	2.000	Pass
			RB1#HIGH	21.55	2.3	23.85	0.243	2.000	Pass
			RB50#LOW	22.01	2.3	24.31	0.270	2.000	Pass
			RB50#MID	22.04	2.3	24.34	0.272	2.000	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
LTE BAND 7									
	HCH		RB50#HIGH	22.03	2.3	24.33	0.271	2.000	Pass
			RB100#LOW	22.03	2.3	24.33	0.271	2.000	Pass
		QPSK	RB1#LOW	21.96	2.3	24.26	0.267	2.000	Pass
			RB1#MID	22.05	2.3	24.35	0.272	2.000	Pass
			RB1#HIGH	21.73	2.3	24.03	0.253	2.000	Pass
			RB50#LOW	20.99	2.3	23.29	0.213	2.000	Pass
			RB50#MID	21.06	2.3	23.36	0.217	2.000	Pass
			RB50#HIGH	20.96	2.3	23.26	0.212	2.000	Pass
			RB100#LOW	21.48	2.3	23.78	0.239	2.000	Pass
		16-QAM	RB1#LOW	21.41	2.3	23.71	0.235	2.000	Pass
			RB1#MID	21.51	2.3	23.81	0.240	2.000	Pass
			RB1#HIGH	21.19	2.3	23.49	0.223	2.000	Pass
			RB50#LOW	21.99	2.3	24.29	0.269	2.000	Pass
			RB50#MID	21.97	2.3	24.27	0.267	2.000	Pass
			RB50#HIGH	21.96	2.3	24.26	0.267	2.000	Pass
			RB100#LOW	22.04	2.3	24.34	0.272	2.000	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
LTE BAND 66									
1.4 MHz	LCH	QPSK	RB1#LOW	22.52	2.3	24.82	0.303	1.000	Pass
			RB1#MID	22.55	2.3	24.85	0.305	1.000	Pass
			RB1#HIGH	22.57	2.3	24.87	0.307	1.000	Pass
			RB3#LOW	22.4	2.3	24.70	0.295	1.000	Pass
			RB3#MID	22.52	2.3	24.82	0.303	1.000	Pass
			RB3#HIGH	22.52	2.3	24.82	0.303	1.000	Pass
			RB6#LOW	21.48	2.3	23.78	0.239	1.000	Pass
		16-QcA M	RB1#LOW	21.59	2.3	23.89	0.245	1.000	Pass
			RB1#MID	21.71	2.3	24.01	0.252	1.000	Pass
			RB1#HIGH	21.79	2.3	24.09	0.256	1.000	Pass
			RB3#LOW	21.57	2.3	23.87	0.244	1.000	Pass
			RB3#MID	21.62	2.3	23.92	0.247	1.000	Pass
			RB3#HIGH	21.68	2.3	23.98	0.250	1.000	Pass
			RB6#LOW	20.74	2.3	23.04	0.201	1.000	Pass
	MCH	QPSK	RB1#LOW	22.54	2.3	24.84	0.305	1.000	Pass
			RB1#MID	22.45	2.3	24.75	0.299	1.000	Pass
			RB1#HIGH	22.42	2.3	24.72	0.296	1.000	Pass
			RB3#LOW	22.32	2.3	24.62	0.290	1.000	Pass
			RB3#MID	22.37	2.3	24.67	0.293	1.000	Pass
			RB3#HIGH	22.34	2.3	24.64	0.291	1.000	Pass
			RB6#LOW	21.32	2.3	23.62	0.230	1.000	Pass
		16-QAM	RB1#LOW	21.71	2.3	24.01	0.252	1.000	Pass
			RB1#MID	21.74	2.3	24.04	0.254	1.000	Pass
			RB1#HIGH	21.74	2.3	24.04	0.254	1.000	Pass
			RB3#LOW	21.58	2.3	23.88	0.244	1.000	Pass
			RB3#MID	21.57	2.3	23.87	0.244	1.000	Pass
			RB3#HIGH	21.68	2.3	23.98	0.250	1.000	Pass
			RB6#LOW	20.47	2.3	22.77	0.189	1.000	Pass
	HCH	QPSK	RB1#LOW	22.48	2.3	24.78	0.301	1.000	Pass
			RB1#MID	22.44	2.3	24.74	0.298	1.000	Pass
			RB1#HIGH	22.39	2.3	24.69	0.294	1.000	Pass
			RB3#LOW	22.39	2.3	24.69	0.294	1.000	Pass
			RB3#MID	22.41	2.3	24.71	0.296	1.000	Pass
			RB3#HIGH	22.41	2.3	24.71	0.296	1.000	Pass
			RB6#LOW	21.44	2.3	23.74	0.237	1.000	Pass
		16-QAM	RB1#LOW	21.49	2.3	23.79	0.239	1.000	Pass
			RB1#MID	21.51	2.3	23.81	0.240	1.000	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict	
LTE BAND 66										
			RB1#HIGH	21.55	2.3	23.85	0.243	1.000	Pass	
			RB3#LOW	21.65	2.3	23.95	0.248	1.000	Pass	
			RB3#MID	21.68	2.3	23.98	0.250	1.000	Pass	
			RB3#HIGH	21.67	2.3	23.97	0.249	1.000	Pass	
			RB6#LOW	20.79	2.3	23.09	0.204	1.000	Pass	
3 MHz	LCH	QPSK	RB1#LOW	22.43	2.3	24.73	0.297	1.000	Pass	
			RB1#MID	22.58	2.3	24.88	0.308	1.000	Pass	
			RB1#HIGH	22.61	2.3	24.91	0.310	1.000	Pass	
			RB8#LOW	21.49	2.3	23.79	0.239	1.000	Pass	
			RB8#MID	21.65	2.3	23.95	0.248	1.000	Pass	
			RB8#HIGH	21.73	2.3	24.03	0.253	1.000	Pass	
			RB15#LOW	21.61	2.3	23.91	0.246	1.000	Pass	
		16-QAM	RB1#LOW	21.36	2.3	23.66	0.232	1.000	Pass	
			RB1#MID	21.65	2.3	23.95	0.248	1.000	Pass	
			RB1#HIGH	21.71	2.3	24.01	0.252	1.000	Pass	
			RB8#LOW	20.74	2.3	23.04	0.201	1.000	Pass	
			RB8#MID	20.91	2.3	23.21	0.209	1.000	Pass	
			RB8#HIGH	20.9	2.3	23.20	0.209	1.000	Pass	
			RB15#LOW	20.79	2.3	23.09	0.204	1.000	Pass	
		MCH	QPSK	RB1#LOW	22.4	2.3	24.70	0.295	1.000	Pass
				RB1#MID	22.42	2.3	24.72	0.296	1.000	Pass
	RB1#HIGH			22.32	2.3	24.62	0.290	1.000	Pass	
	RB8#LOW			21.34	2.3	23.64	0.231	1.000	Pass	
	RB8#MID			21.4	2.3	23.70	0.234	1.000	Pass	
	RB8#HIGH			21.38	2.3	23.68	0.233	1.000	Pass	
	RB15#LOW			21.37	2.3	23.67	0.233	1.000	Pass	
	16-QAM		RB1#LOW	21.64	2.3	23.94	0.248	1.000	Pass	
			RB1#MID	21.8	2.3	24.10	0.257	1.000	Pass	
			RB1#HIGH	21.7	2.3	24.00	0.251	1.000	Pass	
			RB8#LOW	20.59	2.3	22.89	0.195	1.000	Pass	
			RB8#MID	20.68	2.3	22.98	0.199	1.000	Pass	
			RB8#HIGH	20.58	2.3	22.88	0.194	1.000	Pass	
			RB15#LOW	20.58	2.3	22.88	0.194	1.000	Pass	
	HCH		QPSK	RB1#LOW	22.58	2.3	24.88	0.308	1.000	Pass
				RB1#MID	22.46	2.3	24.76	0.299	1.000	Pass
				RB1#HIGH	22.31	2.3	24.61	0.289	1.000	Pass
		RB8#LOW		21.52	2.3	23.82	0.241	1.000	Pass	
		RB8#MID		21.55	2.3	23.85	0.243	1.000	Pass	

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
LTE BAND 66									
		16-QAM	RB8#HIGH	21.48	2.3	23.78	0.239	1.000	Pass
			RB15#LOW	21.53	2.3	23.83	0.242	1.000	Pass
			RB1#LOW	21.61	2.3	23.91	0.246	1.000	Pass
			RB1#MID	21.55	2.3	23.85	0.243	1.000	Pass
			RB1#HIGH	21.44	2.3	23.74	0.237	1.000	Pass
			RB8#LOW	20.72	2.3	23.02	0.200	1.000	Pass
			RB8#MID	20.72	2.3	23.02	0.200	1.000	Pass
			RB8#HIGH	20.68	2.3	22.98	0.199	1.000	Pass
			RB15#LOW	20.65	2.3	22.95	0.197	1.000	Pass
5 MHz	LCH	QPSK	RB1#LOW	22.6	2.3	24.90	0.309	1.000	Pass
			RB1#MID	22.87	2.3	25.17	0.329	1.000	Pass
			RB1#HIGH	22.86	2.3	25.16	0.328	1.000	Pass
			RB12#LOW	21.5	2.3	23.80	0.240	1.000	Pass
			RB12#MID	21.76	2.3	24.06	0.255	1.000	Pass
			RB12#HIGH	21.88	2.3	24.18	0.262	1.000	Pass
			RB25#LOW	21.74	2.3	24.04	0.254	1.000	Pass
		16-QAM	RB1#LOW	21.65	2.3	23.95	0.248	1.000	Pass
			RB1#MID	22.08	2.3	24.38	0.274	1.000	Pass
			RB1#HIGH	22.15	2.3	24.45	0.279	1.000	Pass
			RB12#LOW	20.77	2.3	23.07	0.203	1.000	Pass
			RB12#MID	21.04	2.3	23.34	0.216	1.000	Pass
			RB12#HIGH	21.11	2.3	23.41	0.219	1.000	Pass
			RB25#LOW	20.89	2.3	23.19	0.208	1.000	Pass
	MCH	QPSK	RB1#LOW	22.53	2.3	24.83	0.304	1.000	Pass
			RB1#MID	22.5	2.3	24.80	0.302	1.000	Pass
			RB1#HIGH	22.42	2.3	24.72	0.296	1.000	Pass
			RB12#LOW	21.31	2.3	23.61	0.230	1.000	Pass
			RB12#MID	21.45	2.3	23.75	0.237	1.000	Pass
			RB12#HIGH	21.38	2.3	23.68	0.233	1.000	Pass
			RB25#LOW	21.38	2.3	23.68	0.233	1.000	Pass
		16-QAM	RB1#LOW	21.88	2.3	24.18	0.262	1.000	Pass
			RB1#MID	21.96	2.3	24.26	0.267	1.000	Pass
			RB1#HIGH	21.87	2.3	24.17	0.261	1.000	Pass
			RB12#LOW	20.59	2.3	22.89	0.195	1.000	Pass
			RB12#MID	20.75	2.3	23.05	0.202	1.000	Pass
			RB12#HIGH	20.63	2.3	22.93	0.196	1.000	Pass
			RB25#LOW	20.63	2.3	22.93	0.196	1.000	Pass
	HCH	QPSK	RB1#LOW	22.67	2.3	24.97	0.314	1.000	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
LTE BAND 66									
			RB1#MID	22.6	2.3	24.90	0.309	1.000	Pass
			RB1#HIGH	22.34	2.3	24.64	0.291	1.000	Pass
			RB12#LOW	21.69	2.3	23.99	0.251	1.000	Pass
			RB12#MID	21.66	2.3	23.96	0.249	1.000	Pass
			RB12#HIGH	21.51	2.3	23.81	0.240	1.000	Pass
			RB25#LOW	21.61	2.3	23.91	0.246	1.000	Pass
		16-QAM	RB1#LOW	21.91	2.3	24.21	0.264	1.000	Pass
			RB1#MID	21.8	2.3	24.10	0.257	1.000	Pass
			RB1#HIGH	21.7	2.3	24.00	0.251	1.000	Pass
			RB12#LOW	20.89	2.3	23.19	0.208	1.000	Pass
			RB12#MID	20.88	2.3	23.18	0.208	1.000	Pass
			RB12#HIGH	20.72	2.3	23.02	0.200	1.000	Pass
			RB25#LOW	20.64	2.3	22.94	0.197	1.000	Pass
10 MHz	LCH	QPSK	RB1#LOW	22.48	2.3	24.78	0.301	1.000	Pass
			RB1#MID	22.78	2.3	25.08	0.322	1.000	Pass
			RB1#HIGH	22.68	2.3	24.98	0.315	1.000	Pass
			RB25#LOW	21.6	2.3	23.90	0.245	1.000	Pass
			RB25#MID	21.89	2.3	24.19	0.262	1.000	Pass
			RB25#HIGH	21.75	2.3	24.05	0.254	1.000	Pass
		16-QAM	RB50#LOW	21.67	2.3	23.97	0.249	1.000	Pass
			RB1#LOW	21.41	2.3	23.71	0.235	1.000	Pass
			RB1#MID	21.97	2.3	24.27	0.267	1.000	Pass
			RB1#HIGH	21.75	2.3	24.05	0.254	1.000	Pass
			RB25#LOW	20.76	2.3	23.06	0.202	1.000	Pass
			RB25#MID	21.07	2.3	23.37	0.217	1.000	Pass
			RB25#HIGH	20.93	2.3	23.23	0.210	1.000	Pass
			RB50#LOW	21.73	2.3	24.03	0.253	1.000	Pass
	MCH	QPSK	RB1#LOW	22.37	2.3	24.67	0.293	1.000	Pass
			RB1#MID	22.33	2.3	24.63	0.290	1.000	Pass
			RB1#HIGH	22.3	2.3	24.60	0.288	1.000	Pass
			RB25#LOW	21.15	2.3	23.45	0.221	1.000	Pass
			RB25#MID	21.36	2.3	23.66	0.232	1.000	Pass
			RB25#HIGH	21.29	2.3	23.59	0.229	1.000	Pass
		16-QAM	RB50#LOW	21.24	2.3	23.54	0.226	1.000	Pass
			RB1#LOW	21.58	2.3	23.88	0.244	1.000	Pass
			RB1#MID	21.8	2.3	24.10	0.257	1.000	Pass
			RB1#HIGH	21.77	2.3	24.07	0.255	1.000	Pass
			RB25#LOW	20.38	2.3	22.68	0.185	1.000	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
LTE BAND 66									
15 MHz	HCH		RB25#MID	20.6	2.3	22.90	0.195	1.000	Pass
			RB25#HIGH	20.44	2.3	22.74	0.188	1.000	Pass
			RB50#LOW	21.78	2.3	24.08	0.256	1.000	Pass
		QPSK	RB1#LOW	22.66	2.3	24.96	0.313	1.000	Pass
			RB1#MID	22.75	2.3	25.05	0.320	1.000	Pass
			RB1#HIGH	22.27	2.3	24.57	0.286	1.000	Pass
			RB25#LOW	21.63	2.3	23.93	0.247	1.000	Pass
			RB25#MID	21.78	2.3	24.08	0.256	1.000	Pass
			RB25#HIGH	21.48	2.3	23.78	0.239	1.000	Pass
			RB50#LOW	21.54	2.3	23.84	0.242	1.000	Pass
		16-QAM	RB1#LOW	21.7	2.3	24.00	0.251	1.000	Pass
			RB1#MID	21.82	2.3	24.12	0.258	1.000	Pass
			RB1#HIGH	21.41	2.3	23.71	0.235	1.000	Pass
			RB25#LOW	20.77	2.3	23.07	0.203	1.000	Pass
			RB25#MID	20.94	2.3	23.24	0.211	1.000	Pass
			RB25#HIGH	20.66	2.3	22.96	0.198	1.000	Pass
			RB50#LOW	22.03	2.3	24.33	0.271	1.000	Pass
15 MHz	LCH	QPSK	RB1#LOW	22.4	2.3	24.70	0.295	1.000	Pass
			RB1#MID	22.68	2.3	24.98	0.315	1.000	Pass
			RB1#HIGH	22.76	2.3	25.06	0.321	1.000	Pass
			RB36#LOW	21.75	2.3	24.05	0.254	1.000	Pass
			RB36#MID	21.86	2.3	24.16	0.261	1.000	Pass
			RB36#HIGH	21.7	2.3	24.00	0.251	1.000	Pass
			RB75#LOW	22.21	2.3	24.51	0.282	1.000	Pass
		16-QAM	RB1#LOW	21.45	2.3	23.75	0.237	1.000	Pass
			RB1#MID	21.86	2.3	24.16	0.261	1.000	Pass
			RB1#HIGH	21.87	2.3	24.17	0.261	1.000	Pass
			RB36#LOW	22.48	2.3	24.78	0.301	1.000	Pass
			RB36#MID	22.45	2.3	24.75	0.299	1.000	Pass
			RB36#HIGH	22.44	2.3	24.74	0.298	1.000	Pass
			RB75#LOW	22.43	2.3	24.73	0.297	1.000	Pass
	MCH	QPSK	RB1#LOW	22.44	2.3	24.74	0.298	1.000	Pass
			RB1#MID	22.43	2.3	24.73	0.297	1.000	Pass
			RB1#HIGH	22.34	2.3	24.64	0.291	1.000	Pass
			RB36#LOW	21.32	2.3	23.62	0.230	1.000	Pass
			RB36#MID	21.42	2.3	23.72	0.236	1.000	Pass
			RB36#HIGH	21.43	2.3	23.73	0.236	1.000	Pass
			RB75#LOW	22.23	2.3	24.53	0.284	1.000	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
LTE BAND 66									
20 MHz	HCH	16-QAM	RB1#LOW	21.72	2.3	24.02	0.252	1.000	Pass
			RB1#MID	21.8	2.3	24.10	0.257	1.000	Pass
			RB1#HIGH	21.72	2.3	24.02	0.252	1.000	Pass
			RB36#LOW	22.53	2.3	24.83	0.304	1.000	Pass
			RB36#MID	22.5	2.3	24.80	0.302	1.000	Pass
			RB36#HIGH	22.52	2.3	24.82	0.303	1.000	Pass
			RB75#LOW	22.51	2.3	24.81	0.303	1.000	Pass
		QPSK	RB1#LOW	22.69	2.3	24.99	0.316	1.000	Pass
			RB1#MID	22.73	2.3	25.03	0.318	1.000	Pass
			RB1#HIGH	22.26	2.3	24.56	0.286	1.000	Pass
			RB36#LOW	21.7	2.3	24.00	0.251	1.000	Pass
			RB36#MID	21.8	2.3	24.10	0.257	1.000	Pass
			RB36#HIGH	21.67	2.3	23.97	0.249	1.000	Pass
			RB75#LOW	22.35	2.3	24.65	0.292	1.000	Pass
		16-QAM	RB1#LOW	22.19	2.3	24.49	0.281	1.000	Pass
			RB1#MID	22.26	2.3	24.56	0.286	1.000	Pass
			RB1#HIGH	21.87	2.3	24.17	0.261	1.000	Pass
			RB36#LOW	22.63	2.3	24.93	0.311	1.000	Pass
			RB36#MID	22.6	2.3	24.90	0.309	1.000	Pass
			RB36#HIGH	22.6	2.3	24.90	0.309	1.000	Pass
			RB75#LOW	22.6	2.3	24.90	0.309	1.000	Pass
20 MHz	LCH	QPSK	RB1#LOW	22.47	2.3	24.77	0.300	1.000	Pass
			RB1#MID	22.58	2.3	24.88	0.308	1.000	Pass
			RB1#HIGH	22.48	2.3	24.78	0.301	1.000	Pass
			RB50#LOW	21.68	2.3	23.98	0.250	1.000	Pass
			RB50#MID	21.75	2.3	24.05	0.254	1.000	Pass
			RB50#HIGH	21.64	2.3	23.94	0.248	1.000	Pass
			RB100#LOW	21.99	2.3	24.29	0.269	1.000	Pass
		16-QAM	RB1#LOW	21.96	2.3	24.26	0.267	1.000	Pass
			RB1#MID	22.37	2.3	24.67	0.293	1.000	Pass
			RB1#HIGH	22.03	2.3	24.33	0.271	1.000	Pass
			RB50#LOW	22.38	2.3	24.68	0.294	1.000	Pass
			RB50#MID	22.35	2.3	24.65	0.292	1.000	Pass
			RB50#HIGH	22.34	2.3	24.64	0.291	1.000	Pass
			RB100#LOW	22.33	2.3	24.63	0.290	1.000	Pass
	MCH	QPSK	RB1#LOW	22.35	2.3	24.65	0.292	1.000	Pass
			RB1#MID	22.47	2.3	24.77	0.300	1.000	Pass
			RB1#HIGH	22.38	2.3	24.68	0.294	1.000	Pass

Test BW	Test Channel	Test Mode	Test RB (Size#Offset)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Limit (W)	Verdict
LTE BAND 66									
			RB50#LOW	21.25	2.3	23.55	0.226	1.000	Pass
			RB50#MID	21.38	2.3	23.68	0.233	1.000	Pass
			RB50#HIGH	21.38	2.3	23.68	0.233	1.000	Pass
			RB100#LOW	22.08	2.3	24.38	0.274	1.000	Pass
		16-QAM	RB1#LOW	21.79	2.3	24.09	0.256	1.000	Pass
			RB1#MID	22	2.3	24.30	0.269	1.000	Pass
			RB1#HIGH	21.84	2.3	24.14	0.259	1.000	Pass
			RB50#LOW	22.58	2.3	24.88	0.308	1.000	Pass
			RB50#MID	22.57	2.3	24.87	0.307	1.000	Pass
			RB50#HIGH	22.56	2.3	24.86	0.306	1.000	Pass
			RB100#LOW	22.55	2.3	24.85	0.305	1.000	Pass
	HCH	QPSK	RB1#LOW	22.47	2.3	24.77	0.300	1.000	Pass
			RB1#MID	22.53	2.3	24.83	0.304	1.000	Pass
			RB1#HIGH	22.08	2.3	24.38	0.274	1.000	Pass
			RB50#LOW	21.57	2.3	23.87	0.244	1.000	Pass
			RB50#MID	21.78	2.3	24.08	0.256	1.000	Pass
			RB50#HIGH	21.58	2.3	23.88	0.244	1.000	Pass
			RB100#LOW	22.26	2.3	24.56	0.286	1.000	Pass
		16-QAM	RB1#LOW	21.89	2.3	24.19	0.262	1.000	Pass
			RB1#MID	22.18	2.3	24.48	0.281	1.000	Pass
			RB1#HIGH	21.66	2.3	23.96	0.249	1.000	Pass
			RB50#LOW	22.8	2.3	25.10	0.324	1.000	Pass
			RB50#MID	22.78	2.3	25.08	0.322	1.000	Pass
			RB50#HIGH	22.77	2.3	25.07	0.321	1.000	Pass
			RB100#LOW	22.77	2.3	25.07	0.321	1.000	Pass

A.2 Peak to Average Ratio

Note 1: For average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Note 2: Test plots please refer to the document “Annex No.: BL-SH24C1024-501 Data Part 1.pdf”.

LTE Mode Test Data

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Peak to Average Ratio (dB)	Limit (dB)	Refer to PlotNote2	Verdict
LTE Band 2	20 MHz	LCH	QPSK	RB1#Low	4.87	13	1.1	Pass
				RB100#Low	5.81	13	1.2	Pass
			16-QAM	RB1#Low	5.48	13	1.3	Pass
				RB100#Low	4.69	13	1.4	Pass
		MCH	QPSK	RB1#Low	5.34	13	1.5	Pass
				RB100#Low	5.58	13	1.6	Pass
			16-QAM	RB1#Low	6.00	13	1.7	Pass
				RB100#Low	4.36	13	1.8	Pass
		HCH	QPSK	RB1#Low	5.91	13	1.9	Pass
				RB100#Low	5.62	13	1.10	Pass
			16-QAM	RB1#Low	6.98	13	1.11	Pass
				RB100#Low	3.89	13	1.12	Pass
LTE Band 4	20 MHz	LCH	QPSK	RB1#Low	5.77	13	2.1	Pass
				RB100#Low	5.48	13	2.2	Pass
			16-QAM	RB1#Low	6.14	13	2.3	Pass
				RB100#Low	3.61	13	2.4	Pass
		MCH	QPSK	RB1#Low	5.62	13	2.5	Pass
				RB100#Low	5.67	13	2.6	Pass
			16-QAM	RB1#Low	6.28	13	2.7	Pass
				RB100#Low	3.94	13	2.8	Pass
		HCH	QPSK	RB1#Low	6.37	13	2.9	Pass
				RB100#Low	5.86	13	2.10	Pass
			16-QAM	RB1#Low	7.45	13	2.11	Pass
				RB100#Low	3.66	13	2.12	Pass
LTE Band 5	10 MHz	LCH	QPSK	RB1#Low	4.87	13	3.1	Pass
				RB50#Low	5.39	13	3.2	Pass
			16-QAM	RB1#Low	5.72	13	3.3	Pass
				RB50#Low	3.42	13	3.4	Pass
		MCH	QPSK	RB1#Low	5.2	13	3.5	Pass
				RB50#Low	5.39	13	3.6	Pass
			16-QAM	RB1#Low	6.09	13	3.7	Pass
				RB50#Low	3.47	13	3.8	Pass
		HCH	QPSK	RB1#Low	4.55	13	3.9	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Peak to Average Ratio (dB)	Limit (dB)	Refer to PlotNote2	Verdict
			16-QAM	RB50#Low	5.25	13	3.10	Pass
				RB1#Low	5.2	13	3.11	Pass
				RB50#Low	3.42	13	3.12	Pass
LTE Band 7	20 MHz	LCH	QPSK	RB1#Low	4.97	13	4.1	Pass
				RB100#Low	5.39	13	4.2	Pass
			16-QAM	RB1#Low	5.48	13	4.3	Pass
				RB100#Low	3.66	13	4.4	Pass
		MCH	QPSK	RB1#Low	4.92	13	4.5	Pass
				RB100#Low	5.48	13	4.6	Pass
			16-QAM	RB1#Low	5.62	13	4.7	Pass
				RB100#Low	3.56	13	4.8	Pass
		HCH	QPSK	RB1#Low	5.25	13	4.9	Pass
				RB100#Low	5.48	13	4.10	Pass
			16-QAM	RB1#Low	6.19	13	4.11	Pass
				RB100#Low	3.84	13	4.12	Pass
LTE Band 66	20 MHz	LCH	QPSK	RB1#Low	5.72	13	5.1	Pass
				RB100#Low	5.48	13	5.2	Pass
			16-QAM	RB1#Low	6.14	13	5.3	Pass
				RB100#Low	3.75	13	5.4	Pass
		MCH	QPSK	RB1#Low	6.23	13	5.5	Pass
				RB100#Low	5.72	13	5.6	Pass
			16-QAM	RB1#Low	6.7	13	5.7	Pass
				RB100#Low	3.8	13	5.8	Pass
		HCH	QPSK	RB1#Low	5.58	13	5.9	Pass
				RB100#Low	5.44	13	5.10	Pass
			16-QAM	RB1#Low	6.61	13	5.11	Pass
				RB100#Low	3.66	13	5.12	Pass

A.3 Frequency Stability

LTE Band 2 QPSK 10 MHz

Test Conditions		Frequency Deviation		Verdict
Power (VDC)	Temperature (°C)	MCH 1880 MHz		
		Value(Hz)	Limits (Hz)	
3.8	-40	20.18	±4700	Pass
	-30	22.08		
	-20	15.98		
	-10	16.31		
	0	20.48		
	+10	22.86		
	+20	19.02		
	+25	18.28		
	+30	13.4		
	+40	14.5		
	+50	17.84		
	+60	21.09		
	+70	20.58		
	+80	16.07		
	+85	15.47		
4.2	+25	16.78		
3.6	+25	20.89		

LTE Band 2 16QAM 10 MHz

Test Conditions		Frequency Deviation		Verdict
Power (VDC)	Temperature (°C)	MCH 1880 MHz		
		Value(Hz)	Limits (Hz)	
3.8	-40	18.01	±4700	Pass
	-30	12.85		
	-20	16.45		
	-10	14.96		
	0	14.44		
	+10	11.52		
	+20	19.09		
	+25	16.21		
	+30	15.92		
	+40	15.75		
	+50	16.24		
	+60	13.82		

Test Conditions		Frequency Deviation		Verdict
Power (VDC)	Temperature (°C)	MCH 1880 MHz		
		Value(Hz)	Limits (Hz)	
	+70	14.81		
	+80	15.99		
	+85	19.31		
4.2	+25	19.94		
3.6	+25	11.82		

LTE Band 4 QPSK 10 MHz

Test Conditions		Frequency Deviation		Verdict
Power (VDC)	Temperature (°C)	MCH 1732.5 MHz		
		Value(Hz)	Limits (Hz)	
3.8	-40	19.88	±4331.25	Pass
	-30	17.08		
	-20	13.38		
	-10	11.96		
	0	16.08		
	+10	18.61		
	+20	20.55		
	+25	15.98		
	+30	14.85		
	+40	15.39		
	+50	12.19		
	+60	18.5		
	+70	14.78		
	+80	14.43		
	+85	16.68		
4.2	+25	12.46		
3.6	+25	18.93		

LTE Band 4 16QAM 10 MHz

Test Conditions		Frequency Deviation		Verdict
Power (VDC)	Temperature (°C)	MCH 1732.5 MHz		
		Value(Hz)	Limits (Hz)	
3.8	-40	5.66	±4331.25	Pass
	-30	4.88		
	-20	6.25		
	-10	3.55		
	0	4.39		
	+10	2.37		
	+20	9.53		
	+25	4.95		
	+30	3.57		
	+40	2.01		
	+50	7.41		
	+60	0.06		
	+70	3.21		
	+80	2.64		

Test Conditions		Frequency Deviation		Verdict
Power (VDC)	Temperature (°C)	MCH 1732.5 MHz		
		Value(Hz)	Limits (Hz)	
	+85	5.29		
4.2	+25	7.27		
3.6	+25	3.84		

LTE Band 5 QPSK 10 MHz

Test Conditions		Frequency Deviation		Verdict
Power (VDC)	Temperature (°C)	MCH 836.5 MHz		
		Value(Hz)	Limits (Hz)	
3.8	-40	5.16	±2091.25	Pass
	-30	1.46		
	-20	0.76		
	-10	0.88		
	0	6.76		
	+10	3.62		
	+20	5.36		
	+25	1.86		
	+30	0.41		
	+40	0.11		
	+50	-2.73		
	+60	2.2		
	+70	2.56		
	+80	1.68		
	+85	1.47		
4.2	+25	-2.49		
3.6	+25	5.27		

LTE Band 5 16QAM 10 MHz

Test Conditions		Frequency Deviation		Verdict
Power (VDC)	Temperature (°C)	MCH 836.5 MHz		
		Value(Hz)	Limits (Hz)	
3.8	-40	4.84	±2091.25	Pass
	-30	11.31		
	-20	10.59		
	-10	7.85		
	0	5.64		
	+10	5.31		
	+20	12.08		
	+25	8.81		
	+30	6.86		
	+40	8.36		
	+50	10.81		
	+60	8.59		
	+70	6.64		
	+80	10.41		

Test Conditions		Frequency Deviation		Verdict
Power (VDC)	Temperature (°C)	MCH 836.5 MHz		
		Value(Hz)	Limits (Hz)	
	+85	13.71		
4.2	+25	12.65		
3.6	+25	6.36		

LTE Band 7 QPSK 10 MHz

Test Conditions		Frequency Deviation		Verdict
Power (VDC)	Temperature (°C)	MCH 2535 MHz		
		Value(Hz)	Limits (Hz)	
3.8	-40	19.72	±6337.5	Pass
	-30	19.32		
	-20	14.12		
	-10	16.3		
	0	18.22		
	+10	20.49		
	+20	20.68		
	+25	16.42		
	+30	11.8		
	+40	12.85		
	+50	16.05		
	+60	19.41		
	+70	13.17		
	+80	20.52		
	+85	18.59		
4.2	+25	15.81		
3.6	+25	19		

LTE Band 7 16-QAM 10 MHz

Test Conditions		Frequency Deviation		Verdict
Power (VDC)	Temperature (° C)	MCH 2535 MHz		
		Value(Hz)	Limits (Hz)	
3.8	-40	10.08	±6337.5	Pass
	-30	10.14		
	-20	16.11		
	-10	11.62		
	0	9.42		
	+10	11.94		
	+20	15.76		
	+25	13.75		
	+30	11.56		
	+40	9.87		
	+50	17.05		
	+60	11.42		
	+70	9.35		
	+80	11.41		
	+85	18.35		
4.2	+25	16.62		
3.6	+25	11.36		

LTE Band 66 QPSK 10 MHz

Test Conditions		Frequency Deviation		Verdict
Power (VDC)	Temperature (°C)	MCH 1745 MHz		
		Value(Hz)	Limits (Hz)	
3.8	-40	19.09	±4362.5	Pass
	-30	18.39		
	-20	14.29		
	-10	11.53		
	0	20.49		
	+10	16.52		
	+20	17.87		
	+25	15.49		
	+30	12.66		
	+40	14.28		
	+50	14.78		
	+60	19.56		
	+70	10.69		
	+80	13.71		
	+85	17.42		
4.2	+25	13.29		
3.6	+25	18.76		

LTE Band 66 16QAM 10 MHz

Test Conditions		Frequency Deviation		Verdict
Power (VDC)	Temperature (°C)	MCH 1745 MHz		
		Value(Hz)	Limits (Hz)	
3.8	-40	8.59	±4362.5	Pass
	-30	15.62		
	-20	13.22		
	-10	10.61		
	0	10.96		
	+10	7.45		
	+20	16.51		
	+25	12.12		
	+30	9.83		
	+40	7.4		
	+50	16.58		
	+60	7.37		
	+70	11.03		

Test Conditions		Frequency Deviation		Verdict
Power (VDC)	Temperature (°C)	MCH 1745 MHz		
		Value(Hz)	Limits (Hz)	
	+80	15.72		
	+85	13.34		
4.2	+25	15.69		
3.6	+25	12		

A.4 Spurious Emission at Antenna Terminals

Note 1: GSM and EGPRS modes have been verified, and only the worst data with different bandwidth for LTE are shown here.

Note 2: The frequencies of verdict which are marked by "N/A" should be ignored because they are UE carrier frequency.

Note 3: Test plots please refer to the document "Annex No.: BL-SH24C1024-501 Data Part 3.pdf".

Note 4: The disturbance above 26.5GHz was very low, and the above harmonics were the highest point could be found when testing, so only the worst case data displayed in this report.

LTE Mode Test Verdict

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Refer to PlotNote3	Verdict
Band 2	1.4 MHz	LCH	QPSK	RB1#Low	1.1	Pass
			16-QAM	RB1#Low	1.2	Pass
		MCH	QPSK	RB1#Low	1.3	Pass
			16-QAM	RB1#Low	1.4	Pass
		HCH	QPSK	RB1#Low	1.5	Pass
			16-QAM	RB1#Low	1.6	Pass
	3 MHz	LCH	QPSK	RB1#Low	1.7	Pass
			16-QAM	RB1#Low	1.8	Pass
		MCH	QPSK	RB1#Low	1.9	Pass
			16-QAM	RB1#Low	1.10	Pass
		HCH	QPSK	RB1#Low	1.11	Pass
			16-QAM	RB1#Low	1.12	Pass
	5 MHz	LCH	QPSK	RB1#Low	1.13	Pass
			16-QAM	RB1#Low	1.14	Pass
		MCH	QPSK	RB1#Low	1.15	Pass
			16-QAM	RB1#Low	1.16	Pass
		HCH	QPSK	RB1#Low	1.17	Pass
			16-QAM	RB1#Low	1.18	Pass
	10 MHz	LCH	QPSK	RB1#Low	1.19	Pass
			16-QAM	RB1#Low	1.20	Pass
		MCH	QPSK	RB1#Low	1.21	Pass
			16-QAM	RB1#Low	1.22	Pass
		HCH	QPSK	RB1#Low	1.23	Pass
			16-QAM	RB1#Low	1.24	Pass
	15 MHz	LCH	QPSK	RB1#Low	1.25	Pass
			16-QAM	RB1#Low	1.26	Pass
		MCH	QPSK	RB1#Low	1.27	Pass
			16-QAM	RB1#Low	1.28	Pass
		HCH	QPSK	RB1#Low	1.29	Pass
			16-QAM	RB1#Low	1.30	Pass
	20 MHz	LCH	QPSK	RB1#Low	1.31	Pass
			16-QAM	RB1#Low	1.32	Pass
		MCH	QPSK	RB1#Low	1.33	Pass
			16-QAM	RB1#Low	1.34	Pass
		HCH	QPSK	RB1#Low	1.35	Pass
			16-QAM	RB1#Low	1.36	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Refer to PlotNote3	Verdict
Band 4	1.4 MHz	LCH	QPSK	RB1#Low	2.1	Pass
			16-QAM	RB1#Low	2.2	Pass
		MCH	QPSK	RB1#Low	2.3	Pass
			16-QAM	RB1#Low	2.4	Pass
		HCH	QPSK	RB1#Low	2.5	Pass
			16-QAM	RB1#Low	2.6	Pass
	3 MHz	LCH	QPSK	RB1#Low	2.7	Pass
			16-QAM	RB1#Low	2.8	Pass
		MCH	QPSK	RB1#Low	2.9	Pass
			16-QAM	RB1#Low	2.10	Pass
		HCH	QPSK	RB1#Low	2.11	Pass
			16-QAM	RB1#Low	2.12	Pass
	5 MHz	LCH	QPSK	RB1#Low	2.13	Pass
			16-QAM	RB1#Low	2.14	Pass
		MCH	QPSK	RB1#Low	2.15	Pass
			16-QAM	RB1#Low	2.16	Pass
		HCH	QPSK	RB1#Low	2.17	Pass
			16-QAM	RB1#Low	2.18	Pass
	10 MHz	LCH	QPSK	RB1#Low	2.19	Pass
			16-QAM	RB1#Low	2.20	Pass
		MCH	QPSK	RB1#Low	2.21	Pass
			16-QAM	RB1#Low	2.22	Pass
		HCH	QPSK	RB1#Low	2.23	Pass
			16-QAM	RB1#Low	2.24	Pass
	15 MHz	LCH	QPSK	RB1#Low	2.25	Pass
			16-QAM	RB1#Low	2.26	Pass
		MCH	QPSK	RB1#Low	2.27	Pass
			16-QAM	RB1#Low	2.28	Pass
		HCH	QPSK	RB1#Low	2.29	Pass
			16-QAM	RB1#Low	2.30	Pass
	20 MHz	LCH	QPSK	RB1#Low	2.31	Pass
			16-QAM	RB1#Low	2.32	Pass
		MCH	QPSK	RB1#Low	2.33	Pass
			16-QAM	RB1#Low	2.34	Pass
		HCH	QPSK	RB1#Low	2.35	Pass
			16-QAM	RB1#Low	2.36	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Refer to PlotNote3	Verdict
Band 5	1.4 MHz	LCH	QPSK	RB1#Low	3.1	Pass
			16-QAM	RB1#Low	3.2	Pass
		MCH	QPSK	RB1#Low	3.3	Pass
			16-QAM	RB1#Low	3.4	Pass
		HCH	QPSK	RB1#Low	3.5	Pass
			16-QAM	RB1#Low	3.6	Pass
	3 MHz	LCH	QPSK	RB1#Low	3.7	Pass
			16-QAM	RB1#Low	3.8	Pass
		MCH	QPSK	RB1#Low	3.9	Pass
			16-QAM	RB1#Low	3.10	Pass
		HCH	QPSK	RB1#Low	3.11	Pass
			16-QAM	RB1#Low	3.12	Pass
	5 MHz	LCH	QPSK	RB1#Low	3.13	Pass
			16-QAM	RB1#Low	3.14	Pass
		MCH	QPSK	RB1#Low	3.15	Pass
			16-QAM	RB1#Low	3.16	Pass
		HCH	QPSK	RB1#Low	3.17	Pass
			16-QAM	RB1#Low	3.18	Pass
	10 MHz	LCH	QPSK	RB1#Low	3.19	Pass
			16-QAM	RB1#Low	3.20	Pass
		MCH	QPSK	RB1#Low	3.21	Pass
			16-QAM	RB1#Low	3.22	Pass
		HCH	QPSK	RB1#Low	3.23	Pass
			16-QAM	RB1#Low	3.24	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Refer to PlotNote3	Verdict
Band 7	5 MHz	LCH	QPSK	RB1#Low	4.1	Pass
			16-QAM	RB1#Low	4.2	Pass
		MCH	QPSK	RB1#Low	4.3	Pass
			16-QAM	RB1#Low	4.4	Pass
		HCH	QPSK	RB1#Low	4.5	Pass
			16-QAM	RB1#Low	4.6	Pass
	10 MHz	LCH	QPSK	RB1#Low	4.7	Pass
			16-QAM	RB1#Low	4.8	Pass
		MCH	QPSK	RB1#Low	4.9	Pass
			16-QAM	RB1#Low	4.10	Pass
		HCH	QPSK	RB1#Low	4.11	Pass
			16-QAM	RB1#Low	4.12	Pass
	15 MHz	LCH	QPSK	RB1#Low	4.13	Pass
			16-QAM	RB1#Low	4.14	Pass
		MCH	QPSK	RB1#Low	4.15	Pass
			16-QAM	RB1#Low	4.16	Pass
		HCH	QPSK	RB1#Low	4.17	Pass
			16-QAM	RB1#Low	4.18	Pass
	20 MHz	LCH	QPSK	RB1#Low	4.19	Pass
			16-QAM	RB1#Low	4.20	Pass
		MCH	QPSK	RB1#Low	4.21	Pass
			16-QAM	RB1#Low	4.22	Pass
		HCH	QPSK	RB1#Low	4.23	Pass
			16-QAM	RB1#Low	4.24	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Refer to PlotNote3	Verdict
Band 66	1.4 MHz	LCH	QPSK	RB1#Low	5.1	Pass
			16-QAM	RB1#Low	5.2	Pass
		MCH	QPSK	RB1#Low	5.3	Pass
			16-QAM	RB1#Low	5.4	Pass
		HCH	QPSK	RB1#Low	5.5	Pass
			16-QAM	RB1#Low	5.6	Pass
	3 MHz	LCH	QPSK	RB1#Low	5.7	Pass
			16-QAM	RB1#Low	5.8	Pass
		MCH	QPSK	RB1#Low	5.9	Pass
			16-QAM	RB1#Low	5.10	Pass
		HCH	QPSK	RB1#Low	5.11	Pass
			16-QAM	RB1#Low	5.12	Pass
	5 MHz	LCH	QPSK	RB1#Low	5.13	Pass
			16-QAM	RB1#Low	5.14	Pass
		MCH	QPSK	RB1#Low	5.15	Pass
			16-QAM	RB1#Low	5.16	Pass
		HCH	QPSK	RB1#Low	5.17	Pass
			16-QAM	RB1#Low	5.18	Pass
	10 MHz	LCH	QPSK	RB1#Low	5.19	Pass
			16-QAM	RB1#Low	5.20	Pass
		MCH	QPSK	RB1#Low	5.21	Pass
			16-QAM	RB1#Low	5.22	Pass
		HCH	QPSK	RB1#Low	5.23	Pass
			16-QAM	RB1#Low	5.24	Pass
	15 MHz	LCH	QPSK	RB1#Low	5.25	Pass
			16-QAM	RB1#Low	5.26	Pass
		MCH	QPSK	RB1#Low	5.27	Pass
			16-QAM	RB1#Low	5.28	Pass
		HCH	QPSK	RB1#Low	5.29	Pass
			16-QAM	RB1#Low	5.30	Pass
	20 MHz	LCH	QPSK	RB1#Low	5.31	Pass
			16-QAM	RB1#Low	5.32	Pass
		MCH	QPSK	RB1#Low	5.33	Pass
			16-QAM	RB1#Low	5.34	Pass
		HCH	QPSK	RB1#Low	5.35	Pass
			16-QAM	RB1#Low	5.36	Pass

A.5 Occupied Bandwidth

Note 1: All modes were tested, but only the typical data were reported in this report.

Note 2: Test plots please refer to the document “Annex No.: BL-SH24C1024-501 Data Part 2.pdf”.

LTE Mode Test Data

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Measured 99% Occupied Bandwidth (MHz)	Measured -26 dB Occupied Bandwidth (MHz)	Refer to PlotNote2
Band 2	1.4 MHz	LCH	QPSK	RB6#Low	1.086	1.261	1.1
			16-QAM	RB6#Low	1.089	1.277	1.2
		MCH	QPSK	RB6#Low	1.086	1.269	1.3
			16-QAM	RB6#Low	1.084	1.264	1.4
		HCH	QPSK	RB6#Low	1.089	1.26	1.5
			16-QAM	RB6#Low	1.092	1.271	1.6
	3 MHz	LCH	QPSK	RB15#Low	2.699	2.938	1.7
			16-QAM	RB15#Low	2.691	2.946	1.8
		MCH	QPSK	RB15#Low	2.698	2.948	1.9
			16-QAM	RB15#Low	2.692	2.947	1.10
		HCH	QPSK	RB15#Low	2.703	2.955	1.11
			16-QAM	RB15#Low	2.693	2.955	1.12
	5 MHz	LCH	QPSK	RB25#Low	4.506	4.953	1.13
			16-QAM	RB25#Low	4.491	4.934	1.14
		MCH	QPSK	RB25#Low	4.489	4.933	1.15
			16-QAM	RB25#Low	4.499	4.945	1.16
		HCH	QPSK	RB25#Low	4.494	4.9	1.17
			16-QAM	RB25#Low	4.49	4.967	1.18
	10 MHz	LCH	QPSK	RB50#Low	8.966	9.794	1.19
			16-QAM	RB50#Low	8.813	9.411	1.20
		MCH	QPSK	RB50#Low	8.928	9.744	1.21
			16-QAM	RB50#Low	8.794	9.267	1.22
		HCH	QPSK	RB50#Low	8.947	9.776	1.23
			16-QAM	RB50#Low	8.793	9.268	1.24
	15 MHz	LCH	QPSK	RB75#Low	13.446	14.575	1.25
			16-QAM	RB75#Low	13.201	13.843	1.26
		MCH	QPSK	RB75#Low	13.388	14.471	1.27
			16-QAM	RB75#Low	13.21	13.822	1.28
		HCH	QPSK	RB75#Low	13.392	14.469	1.29
			16-QAM	RB75#Low	13.219	13.842	1.30
	20 MHz	LCH	QPSK	RB100#Low	17.908	19.153	1.31
			16-QAM	RB100#Low	17.414	18.097	1.32
		MCH	QPSK	RB100#Low	17.875	19.173	1.33
			16-QAM	RB100#Low	17.49	18.102	1.34
		HCH	QPSK	RB100#Low	17.861	19.127	1.35
			16-QAM	RB100#Low	17.43	18.055	1.36

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Measured 99% Occupied Bandwidth (MHz)	Measured -26 dB Occupied Bandwidth (MHz)	Refer to PlotNote2
Band 4	1.4 MHz	LCH	QPSK	RB6#Low	1.084	1.258	2.1
			16-QAM	RB6#Low	1.088	1.277	2.2
		MCH	QPSK	RB6#Low	1.088	1.278	2.3
			16-QAM	RB6#Low	1.084	1.264	2.4
		HCH	QPSK	RB6#Low	1.09	1.261	2.5
			16-QAM	RB6#Low	1.089	1.271	2.6
	3 MHz	LCH	QPSK	RB15#Low	2.7	2.939	2.7
			16-QAM	RB15#Low	2.687	2.923	2.8
		MCH	QPSK	RB15#Low	2.698	2.948	2.9
			16-QAM	RB15#Low	2.694	2.952	2.10
		HCH	QPSK	RB15#Low	2.7	2.953	2.11
			16-QAM	RB15#Low	2.692	2.943	2.12
	5 MHz	LCH	QPSK	RB25#Low	4.502	4.956	2.13
			16-QAM	RB25#Low	4.483	4.922	2.14
		MCH	QPSK	RB25#Low	4.491	4.963	2.15
			16-QAM	RB25#Low	4.49	4.938	2.16
		HCH	QPSK	RB25#Low	4.489	4.92	2.17
			16-QAM	RB25#Low	4.496	4.979	2.18
	10 MHz	LCH	QPSK	RB50#Low	8.946	9.769	2.19
			16-QAM	RB50#Low	8.815	9.294	2.20
		MCH	QPSK	RB50#Low	8.929	9.748	2.21
			16-QAM	RB50#Low	8.798	9.367	2.22
		HCH	QPSK	RB50#Low	8.956	9.774	2.23
			16-QAM	RB50#Low	8.807	9.353	2.24
	15 MHz	LCH	QPSK	RB75#Low	13.405	14.534	2.25
			16-QAM	RB75#Low	13.224	13.843	2.26
		MCH	QPSK	RB75#Low	13.407	14.537	2.27
			16-QAM	RB75#Low	13.213	13.857	2.28
		HCH	QPSK	RB75#Low	13.429	14.553	2.29
			16-QAM	RB75#Low	13.237	13.859	2.30
	20 MHz	LCH	QPSK	RB100#Low	17.826	19.075	2.31
			16-QAM	RB100#Low	17.415	18.166	2.32
		MCH	QPSK	RB100#Low	17.904	19.127	2.33
			16-QAM	RB100#Low	17.474	18.104	2.34
		HCH	QPSK	RB100#Low	17.893	19.259	2.35
			16-QAM	RB100#Low	17.435	18.103	2.36

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Measured 99% Occupied Bandwidth (MHz)	Measured -26 dB Occupied Bandwidth (MHz)	Refer to PlotNote2
Band 5	1.4 MHz	LCH	QPSK	RB6#Low	1.087	1.256	3.1
			16-QAM	RB6#Low	1.089	1.267	3.2
		MCH	QPSK	RB6#Low	1.085	1.264	3.3
			16-QAM	RB6#Low	1.084	1.248	3.4
		HCH	QPSK	RB6#Low	1.089	1.253	3.5
			16-QAM	RB6#Low	1.087	1.262	3.6
	3 MHz	LCH	QPSK	RB15#Low	2.696	2.926	3.7
			16-QAM	RB15#Low	2.692	2.95	3.8
		MCH	QPSK	RB15#Low	2.696	2.943	3.9
			16-QAM	RB15#Low	2.689	2.942	3.10
		HCH	QPSK	RB15#Low	2.697	2.953	3.11
			16-QAM	RB15#Low	2.691	2.949	3.12
	5 MHz	LCH	QPSK	RB25#Low	4.505	4.949	3.13
			16-QAM	RB25#Low	4.492	4.927	3.14
		MCH	QPSK	RB25#Low	4.491	4.939	3.15
			16-QAM	RB25#Low	4.489	4.957	3.16
		HCH	QPSK	RB25#Low	4.489	4.937	3.17
			16-QAM	RB25#Low	4.493	4.979	3.18
	10 MHz	LCH	QPSK	RB50#Low	8.948	9.8	3.19
			16-QAM	RB50#Low	8.806	9.335	3.20
		MCH	QPSK	RB50#Low	8.93	9.767	3.21
			16-QAM	RB50#Low	8.811	9.388	3.22
		HCH	QPSK	RB50#Low	8.935	9.748	3.23
			16-QAM	RB50#Low	8.804	9.312	3.24

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Measured 99% Occupied Bandwidth (MHz)	Measured -26 dB Occupied Bandwidth (MHz)	Refer to PlotNote2
Band 7	5 MHz	LCH	QPSK	RB25#Low	4.495	4.949	4.1
			16-QAM	RB25#Low	4.491	4.94	4.2
		MCH	QPSK	RB25#Low	4.489	4.945	4.3
			16-QAM	RB25#Low	4.496	4.956	4.4
		HCH	QPSK	RB25#Low	4.485	4.928	4.5
			16-QAM	RB25#Low	4.495	4.94	4.6
	10 MHz	LCH	QPSK	RB50#Low	8.957	9.766	4.7
			16-QAM	RB50#Low	8.81	9.28	4.8
		MCH	QPSK	RB50#Low	8.946	9.738	4.9
			16-QAM	RB50#Low	8.793	9.259	4.10
		HCH	QPSK	RB50#Low	8.946	9.752	4.11
			16-QAM	RB50#Low	8.788	9.293	4.12
	15 MHz	LCH	QPSK	RB75#Low	13.448	14.567	4.13
			16-QAM	RB75#Low	13.203	13.825	4.14
		MCH	QPSK	RB75#Low	13.41	14.505	4.15
			16-QAM	RB75#Low	13.218	13.853	4.16
		HCH	QPSK	RB75#Low	13.401	14.599	4.17
			16-QAM	RB75#Low	13.225	13.811	4.18
	20 MHz	LCH	QPSK	RB100#Low	17.868	19.13	4.19
			16-QAM	RB100#Low	17.4	18.254	4.20
		MCH	QPSK	RB100#Low	17.879	19.122	4.21
			16-QAM	RB100#Low	17.467	18.172	4.22
		HCH	QPSK	RB100#Low	17.876	19.148	4.23
			16-QAM	RB100#Low	17.383	18.135	4.24

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Measured 99% Occupied Bandwidth (MHz)	Measured -26 dB Occupied Bandwidth (MHz)	Refer to PlotNote2
Band 66	1.4 MHz	LCH	QPSK	RB6#Low	1.086	1.262	5.1
			16-QAM	RB6#Low	1.091	1.281	5.2
		MCH	QPSK	RB6#Low	1.087	1.279	5.3
			16-QAM	RB6#Low	1.084	1.264	5.4
		HCH	QPSK	RB6#Low	1.094	1.255	5.5
			16-QAM	RB6#Low	1.088	1.275	5.6
	3 MHz	LCH	QPSK	RB15#Low	2.694	2.933	5.7
			16-QAM	RB15#Low	2.692	2.931	5.8
		MCH	QPSK	RB15#Low	2.697	2.937	5.9
			16-QAM	RB15#Low	2.691	2.955	5.10
		HCH	QPSK	RB15#Low	2.694	2.952	5.11
			16-QAM	RB15#Low	2.69	2.948	5.12
	5 MHz	LCH	QPSK	RB25#Low	4.495	4.961	5.13
			16-QAM	RB25#Low	4.485	4.93	5.14
		MCH	QPSK	RB25#Low	4.49	4.957	5.15
			16-QAM	RB25#Low	4.5	4.946	5.16
		HCH	QPSK	RB25#Low	4.49	4.932	5.17
			16-QAM	RB25#Low	4.49	4.964	5.18
	10 MHz	LCH	QPSK	RB50#Low	8.944	9.756	5.19
			16-QAM	RB50#Low	8.814	9.273	5.20
		MCH	QPSK	RB50#Low	8.949	9.755	5.21
			16-QAM	RB50#Low	8.791	9.308	5.22
		HCH	QPSK	RB50#Low	8.94	9.732	5.23
			16-QAM	RB50#Low	8.788	9.248	5.24
	15 MHz	LCH	QPSK	RB75#Low	13.405	14.532	5.25
			16-QAM	RB75#Low	13.188	13.765	5.26
		MCH	QPSK	RB75#Low	13.401	14.506	5.27
			16-QAM	RB75#Low	13.193	13.882	5.28
		HCH	QPSK	RB75#Low	13.392	14.481	5.29
			16-QAM	RB75#Low	13.227	13.867	5.30
	20 MHz	LCH	QPSK	RB100#Low	17.85	19.074	5.31
			16-QAM	RB100#Low	17.4	18.23	5.32
		MCH	QPSK	RB100#Low	17.863	19.203	5.33
			16-QAM	RB100#Low	17.475	18.176	5.34
		HCH	QPSK	RB100#Low	17.856	19.228	5.35
			16-QAM	RB100#Low	17.416	18.204	5.36

A.6 Band Edge

Note 1: Test plots please refer to the document “Annex No.: BL-SH24C1024-501 Data Part 4.pdf”.

LTE Mode Test Verdict

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Refer to PlotNote1	Verdict
Band 2	1.4 MHz	LCH	QPSK	RB1#Low	1.1	Pass
				RB6#Low	1.2	Pass
			16-QAM	RB1#Low	1.3	Pass
				RB6#Low	1.4	Pass
		HCH	QPSK	RB1#High	1.5	Pass
				RB6#High	1.6	Pass
			16-QAM	RB1#High	1.7	Pass
				RB6#High	1.8	Pass
	3 MHz	LCH	QPSK	RB1#Low	1.9	Pass
				RB15#Low	1.10	Pass
			16-QAM	RB1#Low	1.11	Pass
				RB15#Low	1.12	Pass
		HCH	QPSK	RB1#High	1.13	Pass
				RB15#High	1.14	Pass
			16-QAM	RB1#High	1.15	Pass
				RB15#High	1.16	Pass
	5 MHz	LCH	QPSK	RB1#Low	1.17	Pass
				RB25#Low	1.18	Pass
			16-QAM	RB1#Low	1.19	Pass
				RB25#Low	1.20	Pass
		HCH	QPSK	RB1#High	1.21	Pass
				RB25#High	1.22	Pass
			16-QAM	RB1#High	1.23	Pass
				RB25#High	1.24	Pass
	10 MHz	LCH	QPSK	RB1#Low	1.25	Pass
				RB50#Low	1.26	Pass
			16-QAM	RB1#Low	1.27	Pass
				RB50#Low	1.28	Pass
		HCH	QPSK	RB1#High	1.29	Pass
				RB50#High	1.30	Pass
			16-QAM	RB1#High	1.31	Pass
				RB50#High	1.32	Pass
	15 MHz	LCH	QPSK	RB1#Low	1.33	Pass
				RB75#Low	1.34	Pass
			16-QAM	RB1#Low	1.35	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Refer to PlotNote1	Verdict
		HCH	QPSK	RB75#Low	1.36	Pass
				RB1#High	1.37	Pass
			16-QAM	RB75#High	1.38	Pass
				RB1#High	1.39	Pass
				RB75#High	1.40	Pass
	20 MHz	LCH	QPSK	RB1#Low	1.41	Pass
				RB100#Low	1.42	Pass
			16-QAM	RB1#Low	1.43	Pass
				RB100#Low	1.44	Pass
		HCH	QPSK	RB1#High	1.45	Pass
				RB100#High	1.46	Pass
			16-QAM	RB1#High	1.47	Pass
				RB100#High	1.48	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Refer to PlotNote1	Verdict
Band 4	1.4 MHz	LCH	QPSK	RB1#Low	2.1	Pass
				RB6#Low	2.2	Pass
			16-QAM	RB1#Low	2.3	Pass
				RB6#Low	2.4	Pass
		HCH	QPSK	RB1#High	2.5	Pass
				RB6#High	2.6	Pass
			16-QAM	RB1#High	2.7	Pass
				RB6#High	2.8	Pass
	3 MHz	LCH	QPSK	RB1#Low	2.9	Pass
				RB15#Low	2.10	Pass
			16-QAM	RB1#Low	2.11	Pass
				RB15#Low	2.12	Pass
		HCH	QPSK	RB1#High	2.13	Pass
				RB15#High	2.14	Pass
			16-QAM	RB1#High	2.15	Pass
				RB15#High	2.16	Pass
	5 MHz	LCH	QPSK	RB1#Low	2.17	Pass
				RB25#Low	2.18	Pass
			16-QAM	RB1#Low	2.19	Pass
				RB25#Low	2.20	Pass
		HCH	QPSK	RB1#High	2.21	Pass
				RB25#High	2.22	Pass
			16-QAM	RB1#High	2.23	Pass
				RB25#High	2.24	Pass
	10 MHz	LCH	QPSK	RB1#Low	2.25	Pass
				RB50#Low	2.26	Pass
			16-QAM	RB1#Low	2.27	Pass
				RB50#Low	2.28	Pass
		HCH	QPSK	RB1#High	2.29	Pass
				RB50#High	2.30	Pass
			16-QAM	RB1#High	2.31	Pass
				RB50#High	2.32	Pass
	15 MHz	LCH	QPSK	RB1#Low	2.33	Pass
				RB75#Low	2.34	Pass
			16-QAM	RB1#Low	2.35	Pass
				RB75#Low	2.36	Pass
		HCH	QPSK	RB1#High	2.37	Pass
				RB75#High	2.38	Pass
			16-QAM	RB1#High	2.39	Pass
				RB75#High	2.40	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Refer to PlotNote1	Verdict
	20 MHz	LCH	QPSK	RB1#Low	2.41	Pass
				RB100#Low	2.42	Pass
			16-QAM	RB1#Low	2.43	Pass
				RB100#Low	2.44	Pass
		HCH	QPSK	RB1#High	2.45	Pass
				RB100#High	2.46	Pass
			16-QAM	RB1#High	2.47	Pass
				RB100#High	2.48	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Refer to PlotNote1	Verdict
Band 5	1.4 MHz	LCH	QPSK	RB1#Low	3.1	Pass
				RB6#Low	3.2	Pass
			16-QAM	RB1#Low	3.3	Pass
				RB6#Low	3.4	Pass
		HCH	QPSK	RB1#High	3.5	Pass
				RB6#High	3.6	Pass
			16-QAM	RB1#High	3.7	Pass
				RB6#High	3.8	Pass
	3 MHz	LCH	QPSK	RB1#Low	3.9	Pass
				RB15#Low	3.10	Pass
			16-QAM	RB1#Low	3.11	Pass
				RB15#Low	3.12	Pass
		HCH	QPSK	RB1#High	3.13	Pass
				RB15#High	3.14	Pass
			16-QAM	RB1#High	3.15	Pass
				RB15#High	3.16	Pass
	5 MHz	LCH	QPSK	RB1#Low	3.17	Pass
				RB25#Low	3.18	Pass
			16-QAM	RB1#Low	3.19	Pass
				RB25#Low	3.20	Pass
		HCH	QPSK	RB1#High	3.21	Pass
				RB25#High	3.22	Pass
			16-QAM	RB1#High	3.23	Pass
				RB25#High	3.24	Pass
	10 MHz	LCH	QPSK	RB1#Low	3.25	Pass
				RB50#Low	3.26	Pass
			16-QAM	RB1#Low	3.27	Pass
				RB50#Low	3.28	Pass
		HCH	QPSK	RB1#High	3.29	Pass
				RB50#High	3.30	Pass
			16-QAM	RB1#High	3.31	Pass
				RB50#High	3.32	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Refer to PlotNote1	Verdict
Band 7	5 MHz	LCH	QPSK	RB1#Low	4.1	Pass
				RB25#Low	4.2	Pass
			16-QAM	RB1#Low	4.3	Pass
				RB25#Low	4.4	Pass
		HCH	QPSK	RB1#Low	4.5	Pass
				RB25#Low	4.6	Pass
			16-QAM	RB1#Low	4.7	Pass
				RB25#Low	4.8	Pass
	10 MHz	LCH	QPSK	RB1#Low	4.9	Pass
				RB50#Low	4.10	Pass
			16-QAM	RB1#Low	4.11	Pass
				RB50#Low	4.12	Pass
		HCH	QPSK	RB1#Low	4.13	Pass
				RB50#Low	4.14	Pass
			16-QAM	RB1#Low	4.15	Pass
				RB50#Low	4.16	Pass
	15 MHz	LCH	QPSK	RB1#Low	4.17	Pass
				RB75#Low	4.18	Pass
			16-QAM	RB1#Low	4.19	Pass
				RB75#Low	4.20	Pass
		HCH	QPSK	RB1#Low	4.21	Pass
				RB75#Low	4.22	Pass
			16-QAM	RB1#Low	4.23	Pass
				RB75#Low	4.24	Pass
	20 MHz	LCH	QPSK	RB1#Low	4.25	Pass
				RB100#Low	4.26	Pass
			16-QAM	RB1#Low	4.27	Pass
				RB100#Low	4.28	Pass
		HCH	QPSK	RB1#Low	4.29	Pass
				RB100#Low	4.30	Pass
			16-QAM	RB1#Low	4.31	Pass
				RB100#Low	4.32	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Refer to PlotNote1	Verdict
Band 66	1.4 MHz	LCH	QPSK	RB1#Low	5.1	Pass
				RB6#Low	5.2	Pass
			16-QAM	RB1#Low	5.3	Pass
				RB6#Low	5.4	Pass
		HCH	QPSK	RB1#High	5.5	Pass
				RB6#High	5.6	Pass
			16-QAM	RB1#High	5.7	Pass
				RB6#High	5.8	Pass
	3 MHz	LCH	QPSK	RB1#Low	5.9	Pass
				RB15#Low	5.10	Pass
			16-QAM	RB1#Low	5.11	Pass
				RB15#Low	5.12	Pass
		HCH	QPSK	RB1#High	5.13	Pass
				RB15#High	5.14	Pass
			16-QAM	RB1#High	5.15	Pass
				RB15#High	5.16	Pass
	5 MHz	LCH	QPSK	RB1#Low	5.17	Pass
				RB25#Low	5.18	Pass
			16-QAM	RB1#Low	5.19	Pass
				RB25#Low	5.20	Pass
		HCH	QPSK	RB1#High	5.21	Pass
				RB25#High	5.22	Pass
			16-QAM	RB1#High	5.23	Pass
				RB25#High	5.24	Pass
	10 MHz	LCH	QPSK	RB1#Low	5.25	Pass
				RB50#Low	5.26	Pass
			16-QAM	RB1#Low	5.27	Pass
				RB50#Low	5.28	Pass
		HCH	QPSK	RB1#High	5.29	Pass
				RB50#High	5.30	Pass
			16-QAM	RB1#High	5.31	Pass
				RB50#High	5.32	Pass
	15 MHz	LCH	QPSK	RB1#Low	5.33	Pass
				RB75#Low	5.34	Pass
			16-QAM	RB1#Low	5.35	Pass
				RB75#Low	5.36	Pass
		HCH	QPSK	RB1#High	5.37	Pass
				RB75#High	5.38	Pass
			16-QAM	RB1#High	5.39	Pass
				RB75#High	5.40	Pass
	20 MHz	LCH	QPSK	RB1#Low	5.41	Pass

Test Band	Test Bandwidth	Test Channel	Test Mode	Test RB (Size#Offset)	Refer to PlotNote1	Verdict
			16-QAM	RB100#Low	5.42	Pass
				RB1#Low	5.43	Pass
				RB100#Low	5.44	Pass
		HCH	QPSK	RB1#High	5.45	Pass
				RB100#High	5.46	Pass
			16-QAM	RB1#High	5.47	Pass
				RB100#High	5.48	Pass

A.7 Field Strength of Spurious Radiation

Note 1: All modes have been tested, and only the worst case data are shown here.

Note 2: The frequencies of verdict which are marked by "N/A" should be ignored because they are UE carrier frequency.

Note 3: Test plots please refer to the document "Annex No.: BL-SH24C1024-501 Data Part 5.pdf".

Note 4: The disturbance above 26.5GHz was very low, and the above harmonics were the highest point could be found when testing, so only the worst case data displayed in this report.

LTE Mode Test Verdict

Test Band	Test Bandwidth	Test Channel	Refer to PlotNote3	Verdict
Band 2	20 MHz	MCH	1.1	Pass
Band 4	20 MHz	LCH	1.2	Pass
Band 5	5 MHz	HCH	1.3	Pass
Band 7	5 MHz	MCH	1.4	Pass
Band 66	5 MHz	LCH	1.5	Pass

ANNEX B EUT EXTERNAL PHOTOS

Please refer to the document “BL-SH24C1024-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer to the document “BL-SH24C1024-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer to the document “BL-SH24C1024-AI.PDF”.

Statement

1. The Testing Center guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. For the report with Accreditation Symbol, the items marked with "☆" are not within the accredited scope.
3. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the test report stamp.
4. The test data and results are only valid for the tested samples provided by the customer.
5. This report shall not be partially reproduced without the written permission of the Testing Center.
6. Any objection shall be raised to the Testing Center within 30 days after receiving the report.

--END OF REPORT--