

# **FCC Part 15C Measurement and Test Report**

### For

# Shenzhen Nage Sci & Tech Co., LTD

2/F C Building FuXing Industry Park, GuiYue Road No.110 GuanLan Town,

Shenzhen, China

FCC ID:2AKBQWM-1300

FCC Rule(s): FCC Part 15.247

**Product Description:** Bluetooth speaker

**Tested Model:** <u>WM-1300</u>

**Report No.:** STR16118034I

**Tested Date:** 2016-11-03 to 2016-12-19

**Issued Date:** 2016-12-20

Tested By: Leo Lee / Engineer

Leo Lee Silin chen Silin Chen / EMC Manager **Reviewed By:** 

**Approved & Authorized By:** Jandy So / PSQ Manager

**Prepared By:** 

Shenzhen SEM.Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,

Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

REPORT NO.: STR16118034I **PAGE 1 OF 54** FCC PART 15.247




# TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	
1.2 TEST STANDARDS	
1.3 TEST METHODOLOGY	
1.4 TEST FACILITY	
1.6 MEASUREMENT UNCERTAINTY	
1.7 TEST EQUIPMENT LIST AND DETAILS	7
2. SUMMARY OF TEST RESULTS	8
3. RF EXPOSURE	9
3.1 STANDARD APPLICABLE	
3.2 TEST RESULT.	
4. ANTENNA REQUIREMENT	10
4.1 STANDARD APPLICABLE	
4.2 Evaluation Information	10
5. FREQUENCY HOPPING SYSTEM REQUIREMENTS	11
5.1 STANDARD APPLICABLE	
5.2 FREQUENCY HOPPING SYSTEM	
5.3 EUT PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	
6. QUANTITY OF HOPPING CHANNELS AND CHANNEL SEPARATION	
6.1 STANDARD APPLICABLE	
6.2 TEST PROCEDURE	
6.3 ENVIRONMENTAL CONDITIONS	
7. DWELL TIME OF HOPPING CHANNEL	
7.1 STANDARD APPLICABLE	
7.1 STANDARD APPLICABLE	
7.3 ENVIRONMENTAL CONDITIONS	
7.4 SUMMARY OF TEST RESULTS/PLOTS	19
8. 20DB BANDWIDTH	29
8.1 STANDARD APPLICABLE	
8.2 Test Procedure	
8.3 ENVIRONMENTAL CONDITIONS	
9. RF OUTPUT POWER	
9.1 Standard Applicable	
9.3 ENVIRONMENTAL CONDITIONS	
9.4 SUMMARY OF TEST RESULTS/PLOTS	
10. FIELD STRENGTH OF SPURIOUS EMISSIONS	35
10.1 Standard Applicable	
10.2 Test Procedure	35
10.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	
10.4 Environmental Conditions	
11. OUT OF BAND EMISSIONS	
11.1 Standard Applicable	
11.2 TEST PROCEDURE	
11.4 Summary of Test Results/Plots	
12. CONDUCTED EMISSIONS	51
12.1 Test Procedure	



12.2 Basic Test Setup Block Diagram	51
12.3 Environmental Conditions	51
12.4 Test Receiver Setup	52
12.5 SUMMARY OF TEST RESULTS/PLOTS	52
12 6 CONDUCTED EMISSIONS TEST DATA	52





### 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

**Client Information** 

Applicant: Shenzhen Nage Sci & Tech Co., LTD

Address of applicant: 2/F C Building FuXing Industry Park, GuiYue Road

No.110 GuanLan Town, Shenzhen, China

Manufacturer: Shenzhen Nage Sci & Tech Co., LTD

Address of manufacturer: 2/F C Building FuXing Industry Park, GuiYue Road

No.110 GuanLan Town, Shenzhen, China

General Description of EUT	
Product Name:	Bluetooth speaker
Trade Name:	nage
Model No.:	WM-1300
Adding Model(s):	WM-1100, WM-1200, WM-800
Rated Voltage:	DC 3.7V Battery
Battery Capacity:	1200mAh
	·

Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model WM-1300, but the circuit and the electronic construction do not change, declared by the manufacturer.

Technical Characteristics of EUT	
Bluetooth Version:	V3.0
Frequency Range:	2402-2480MHz
RF Output Power:	0.405dBm (Conducted)
Data Rate:	1Mbps, 2Mbps, 3Mbps
Modulation:	GFSK, Pi/4 QDPSK, 8DPSK
Quantity of Channels:	79
Channel Separation:	1MHz
Type of Antenna:	PCB
Antenna Gain:	1.2dBi
Lowest Internal Frequency of EUT:	32.768KHz

REPORT NO.: STR16118034I PAGE 4 OF 54 FCC PART 15.247



#### 1.2 Test Standards

The following report is prepared on behalf of the Shenzhen Nage Sci & Tech Co., LTD in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

### 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The measurement guide DA 00-705 for frequency hopping spread spectrum systems shall be performed also.

### 1.4 Test Facility

#### FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

### Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

### **CNAS Registration No.: L4062**

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2<sup>nd</sup> Road, Bao'an District, Shenzhen, P.R.C (518101).

REPORT NO.: STR16118034I PAGE 5 OF 54 FCC PART 15.247

# 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:


Test Mode L	ist	
Test Mode	Description	Remark
TM1	Low Channel	2402MHz
TM2	Middle Channel	2441MHz
TM3	High Channel	2480MHz
TM4	Hopping	2402-2480MHz

Modulation Configure			
Modulation	Packet	Packet Type	Packet Size
	DH1	4	27
GFSK	DH3	11	183
	DH5	15	339
	2DH1	20	54
Pi/4 DQPSK	2DH3	26	367
	2DH5	30	379
	3DH1	24	83
8DPSK	3DH3	27	552
	3DH5	31	1021

Normal mode: the Bluetooth has been tested on the modulation of GFSK, (Pi/4)DQPSK and 8DPSK, compliance test and record the worst case.

Accessories Equipment List and Details			
Description	Manufacturer	Model No.	Serial Number
Adapter	Apple	A1425	/
Accessories Cable List	and Details		
Cable Description	Length (m)	Shielded/Unshielded	With Core/Without Core
/	/	/	/
<b>EUT Cable List and D</b>	EUT Cable List and Details		
Cable Description	Length (m)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

REPORT NO.: STR16118034I PAGE 6 OF 54 FCC PART 15.247





# 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	±0.42dB
Occupied Bandwidth	Conducted	±1.5%
Conducted Spurious Emission	Conducted	±2.17dB
Conducted Emissions	Conducted	±2.88dB
Transmitter Spurious Emissions	Radiated	±5.1dB

# 1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	<b>Due Date</b>
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2016-06-04	2017-06-03
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2016-06-04	2017-06-03
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2016-06-04	2017-06-03
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2016-06-04	2017-06-03
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2016-06-04	2017-06-03
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2016-06-04	2017-06-03
SEMT-1042	Horn Antenna	ETS	3117	00086197	2016-06-04	2017-06-03
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2016-06-04	2017-06-03
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2016-06-04	2017-06-03
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2016-06-04	2017-06-03
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2016-06-04	2017-06-03
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2016-06-04	2017-06-03

REPORT NO.: STR16118034I PAGE 7 OF 54 FCC PART 15.247



# 2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.209(a)	Radiated Spurious Emissions	Compliant
§ 15.247(a)(1)(iii)	Quantity of Hopping Channel	Compliant
§ 15.247(a)(1)	Channel Separation	Compliant
§ 15.247(a)(1)(iii)	Time of Occupancy (Dwell time)	Compliant
§ 15.247(a)	20dB Bandwidth	Compliant
§ 15.247(b)(1)	RF Power Output	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant
§ 15.247(a)(1)	Frequency Hopping Sequence	Compliant
§ 15.247(g), (h)	Frequency Hopping System	Compliant

N/A: not applicable



# 3. RF Exposure

# 3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

### 3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

REPORT NO.: STR16118034I PAGE 9 OF 54 FCC PART 15.247



# 4. Antenna Requirement

### **4.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **4.2 Evaluation Information**

This product has A PCB antenna, fulfill the requirement of this section.

REPORT NO.: STR16118034I PAGE 10 OF 54 FCC PART 15.247



# 5. Frequency Hopping System Requirements

### 5.1 Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

- (g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.
- (h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

## **5.2 Frequency Hopping System**

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

REPORT NO.: STR16118034I PAGE 11 OF 54 FCC PART 15.247



This device was tested with an bluetooth system receiver to check that the device maintained hopping synchronization, and the device complied with these requirements for DA 00-705 and FCC Part 15.247 rule.

### **5.3 EUT Pseudorandom Frequency Hopping Sequence**

Pseudorandom Frequency Hopping Sequence Table as below:

Channel: 08, 24, 40, 56, 40, 56, 72, 09, 01, 09, 33, 41, 33, 41, 65, 73, 53, 69, 06, 22, 04, 20, 36, 52, 38, 46, 70, 78, 68, 76, 21, 29, 10, 26, 42, 58, 44, 60, 76, 13, 03, 11, 35, 43, 37, 45, 69, 77, 55, 71, 08, 24, 08, 24, 40, 56, 40, 48, 72, 01, 72, 01, 25, 33, 12, 28, 44, 60, 42, 58, 74, 11, 05, 13, 37, 45 etc.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding ransmitters and shift frequencies in synchronization with the transmitted signals.

REPORT NO.: STR16118034I PAGE 12 OF 54 FCC PART 15.247



# 6. Quantity of Hopping Channels and Channel Separation

### **6.1 Standard Applicable**

According to FCC 15.247(a)(1), frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, and frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

#### **6.2 Test Procedure**

According to the DA 00-705, the number of hopping frequencies test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = the frequency band of operation (2400MHz to 2483.5MHz)

 $RBW \ge 1\%$  of the span

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize, observed the band of 2400MHz to 2483.5MHz, than count it out the number of channels for comparing with the FCC rules.

The channel spacing test method as follows:

Set span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span

Video (or Average) Bandwidth (VBW) ≥ RBW

Sweep = auto; Detector function = peak; Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

#### **6.3 Environmental Conditions**


Temperature:	24 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

REPORT NO.: STR16118034I PAGE 13 OF 54 FCC PART 15.247




# 6.4 Summary of Test Results/Plots

No. of Channel = 79

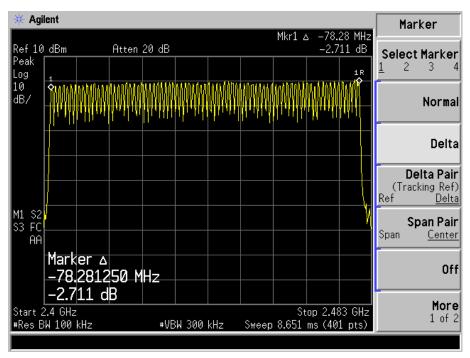


For GFSK mode Channel Spacing (Low CH=1MHz)

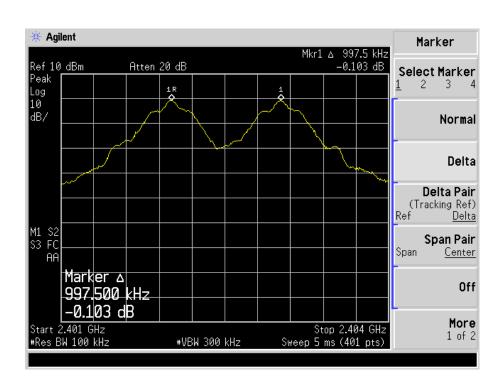




### Channel Spacing (Middle CH=1MHz)

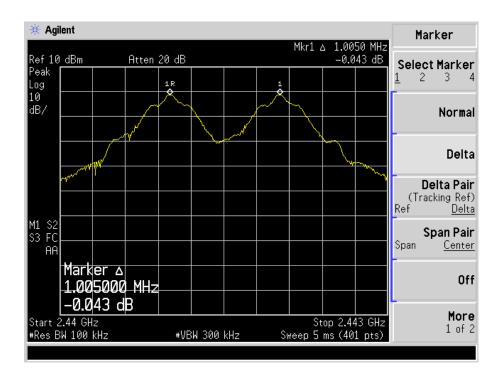


### Channel Spacing (High CH=1MHz)

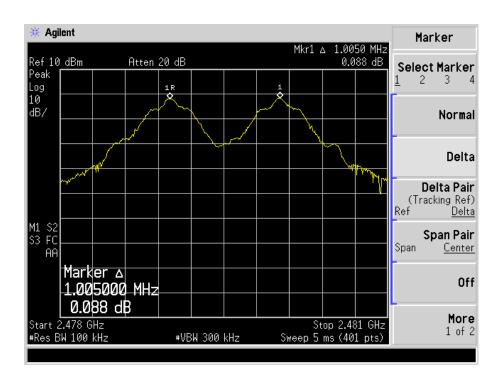


REPORT NO.: STR16118034I PAGE 15 OF 54 FCC PART 15.247



# For 8DPSK mode Channel Spacing (Low CH=1MHz)

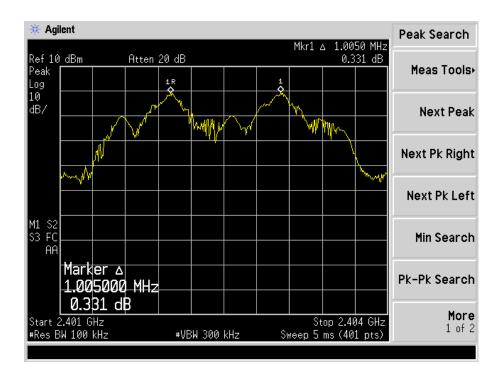


### Channel Spacing (Middle CH=1MHz)

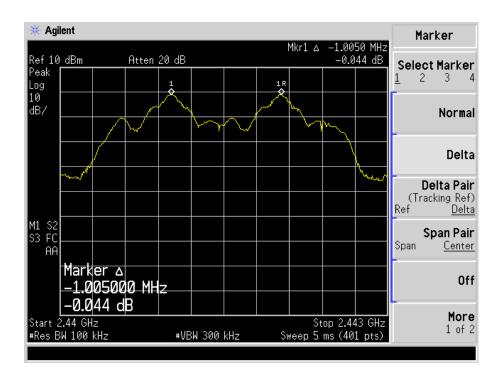

REPORT NO.: STR16118034I PAGE 16 OF 54 FCC PART 15.247



# Channel Spacing (High CH=1MHz)

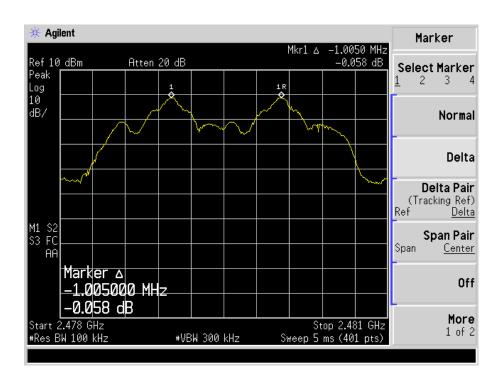



# 7. Dwell Time of Hopping Channel

## 7.1 Standard Applicable

According to 15.247(a)(1)(iii), Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 7.2 Test Procedure

According to the DA 00-705, the dwell time of a hopping channel test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Span = zero span, centered on a hopping channel

RBW = 1 MHz

VBW ≥ RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak


Trace = max hold

Use the marker-delta function to determine the dwell time

### 7.3 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

REPORT NO.: STR16118034I PAGE 18 OF 54 FCC PART 15.247





# 7.4 Summary of Test Results/Plots

The dwell time within a period in data mode is independent from the packet type (packet length). Test data is corrected with the worse case, which the packet length is DH1, DH3, and DH5.

The test period: T = 0.4 Second \* 79 Channel = 31.6 s

Dwell time = time slot length \* (Hopping rate / Number of hopping channels) \* Period


Modulation Test Channel		Packet	Time Slot Length	<b>Dwell Time</b>	Limit
Modulation	rest Channel	racket	ms	ms	ms
	2402MHz	DH1	0.48	153.60	400
		DH3	1.74	278.40	400
		DH5	2.99	318.93	400
		DH1	0.48	153.60	400
GFSK	2441MHz	DH3	1.74	278.40	400
		DH5	2.98	317.87	400
	2480MHz	DH1	0.49	156.80	400
		DH3	1.75	280.00	400
		DH5	2.99	318.93	400
	2402MHz	3DH1	0.49	156.80	400
		3DH3	1.75	280.00	400
		3DH5	2.99	318.93	400
	2441MHz	3DH1	0.49	156.80	400
8DPSK		3DH3	1.75	280.00	400
		3DH5	3.00	320.00	400
	2480MHz	3DH1	0.49	156.80	400
		3DH3	1.75	280.00	400
		3DH5	3.00	320.00	400


Please refer to the test plots as below:

REPORT NO.: STR16118034I PAGE 19 OF 54 FCC PART 15.247




#### DH1 time slot (Low, Middle, High Channels)

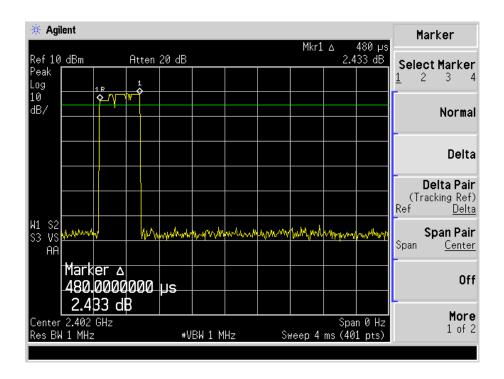

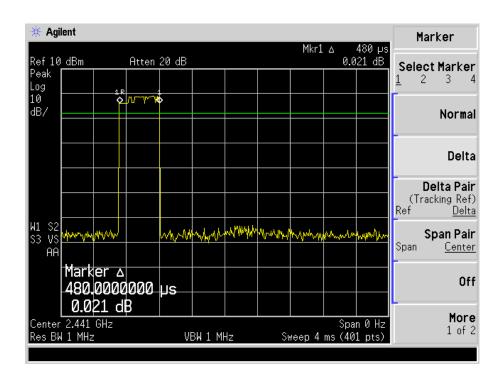


REPORT NO.: STR16118034I PAGE 20 OF 54 FCC PART 15.247




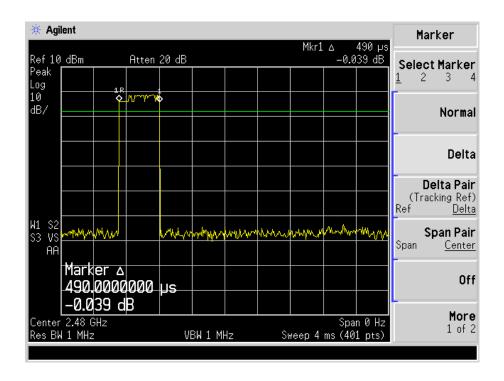


DH3 time slot (Low, Middle, High Channels)

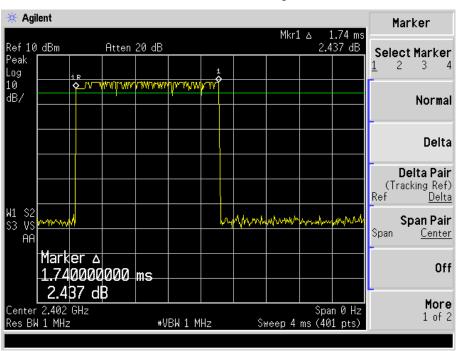




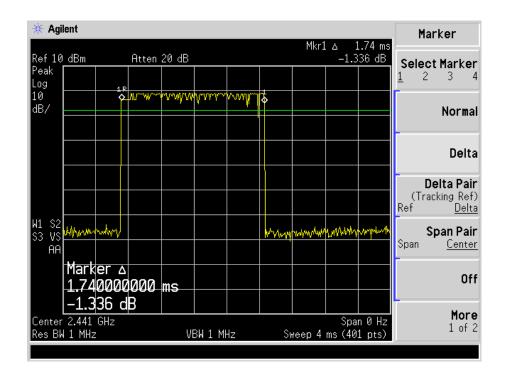


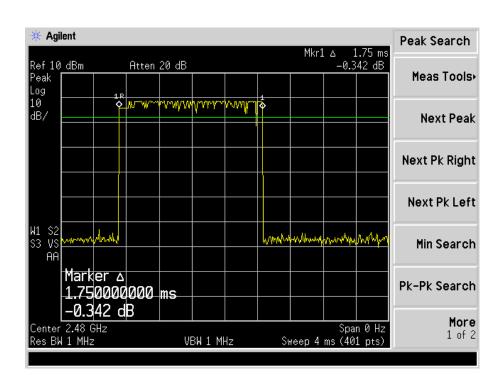






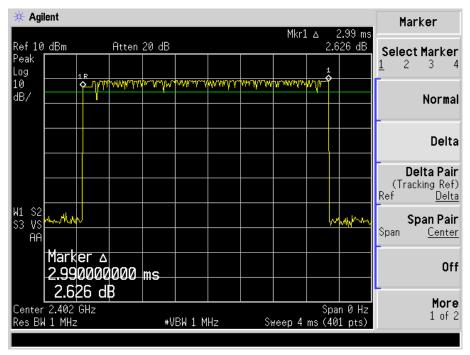


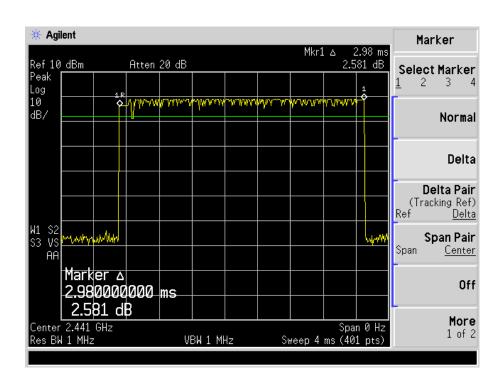




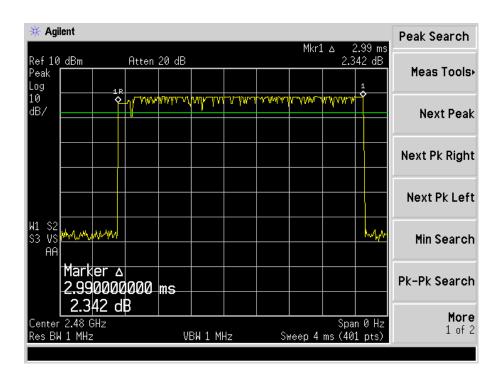


3DH1 time slot (Low, Middle, High Channels)

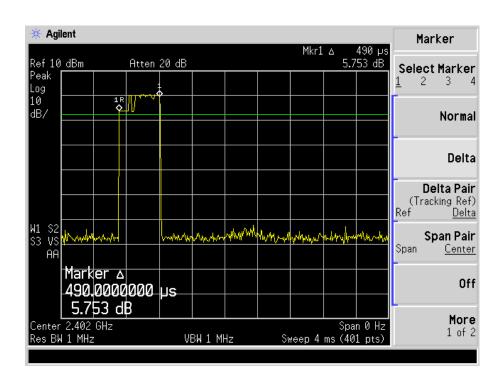




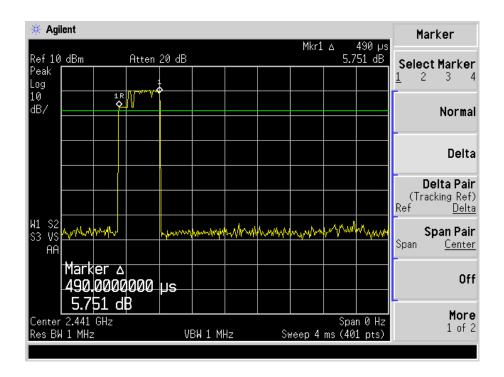


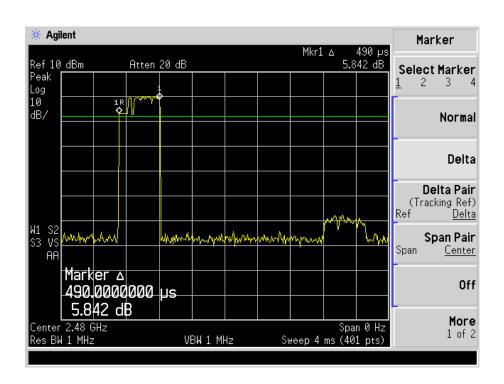






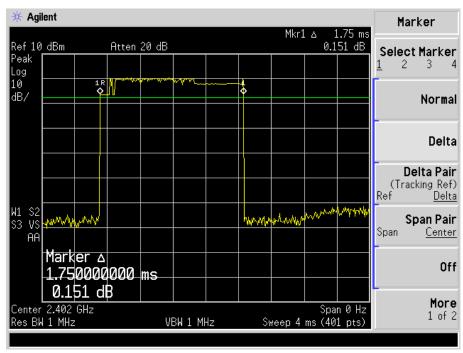


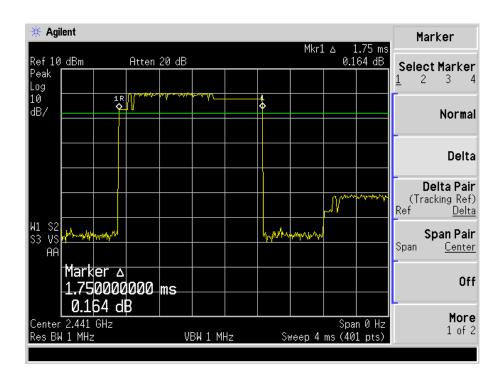




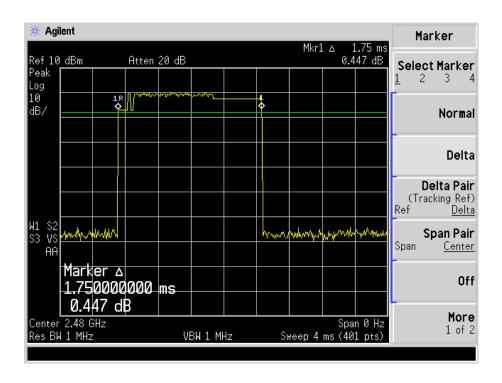


3DH5 time slot (Low, Middle, High Channels)

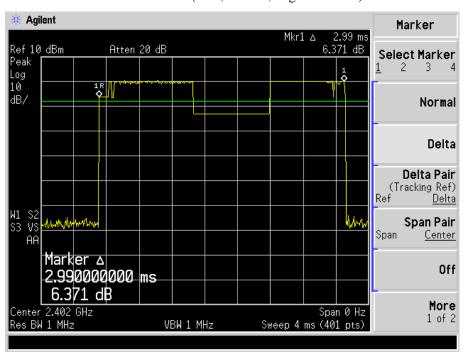



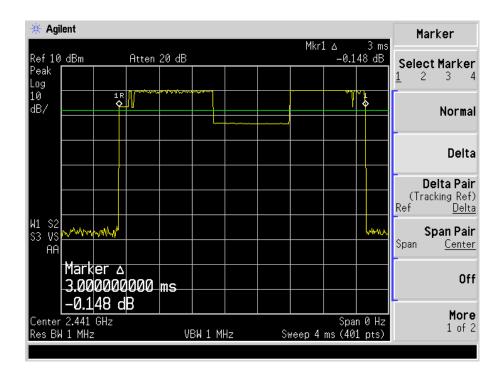

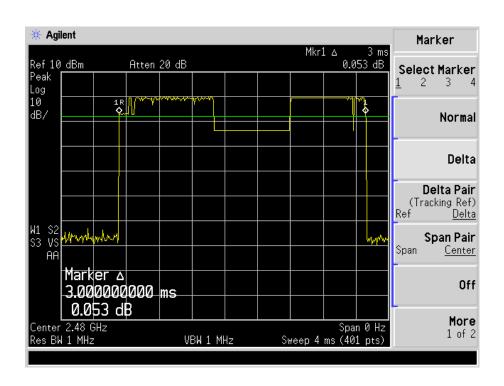



### 8. 20dB Bandwidth

## 8.1 Standard Applicable

According to 15.247(a) and 15.215(c). 20dB bandwidth is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

### **8.2 Test Procedure**

According to the DA 00-705, the 20dB bandwidth test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW  $\geq$  1% of the 20 dB bandwidth

VBW ≥ RBW

Sweep = auto; Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down bandwidth of the emission.

### **8.3 Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1018 mbar


# 8.4 Summary of Test Results/Plots

Test Mode	Test Channel MHz	20 dB Bandwidth kHz	99% Bandwidth kHz	Result
	2402	1024	985.7984	Pass
GFSK	2441	1013	983.3134	Pass
	2480	1020	981.6336	Pass
	2402	1041	1005.2	Pass
8DPSK	2441	1048	1004.5	Pass
	2480	1039	1007.3	Pass


REPORT NO.: STR16118034I PAGE 29 OF 54 FCC PART 15.247



# For GFSK Low Channel:

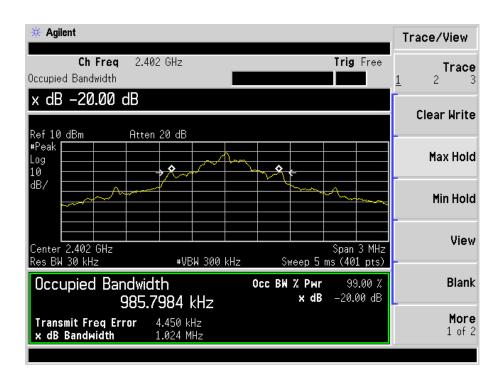


### Middle Channel:

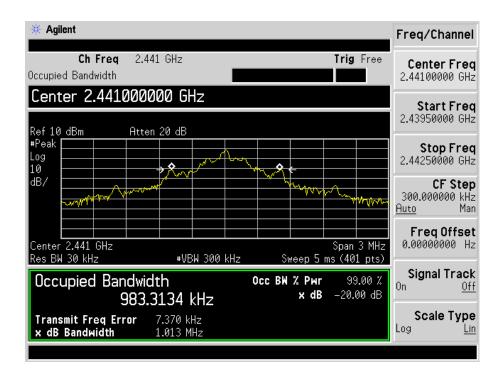




#### High Channel:

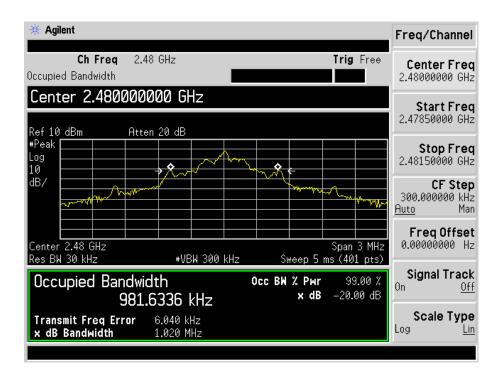


# For 8DPSK Low Channel:

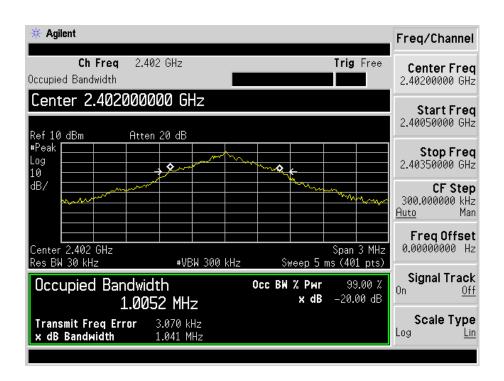




#### Middle Channel:

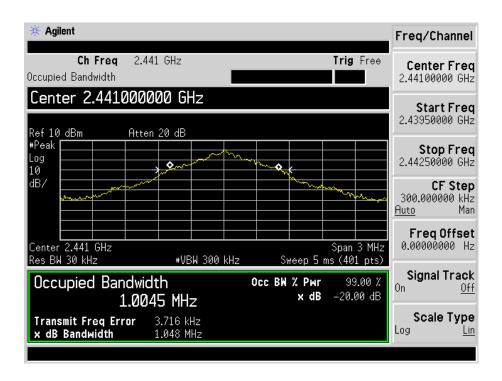

#### High Channel:

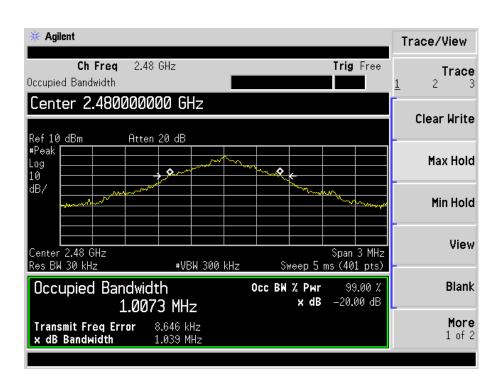



# 9. RF Output Power

## 9.1 Standard Applicable

According to 15.247(b)(1). For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### 9.2 Test Procedure

According to the DA 00-705, the peak output power test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

 $VBW \geqslant RBW$ 

Sweep = auto

Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, the indicated level is the peak output power (the external attenuation and cable loss shall be considered).

### 9.3 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	55%
ATM Pressure:	1011 mbar

# 9.4 Summary of Test Results/Plots

REPORT NO.: STR16118034I PAGE 33 OF 54 FCC PART 15.247



### For GFSK

Channel	Frequency	Measured Value	Output Power	Limit
Channel	MHz	dBm	mW	mW
Low Channel	2402	-0.957	0.80	1000
Middle Channel	2441	-1.118	0.77	1000
High Channel	2480	-1.460	0.71	1000

# For Pi/4 QDPSK

Channel	Frequency MHz	Measured Value dBm	Output Power mW	Limit mW
Low Channel	2402	0.155	1.04	1000
Middle Channel	2441	-0.183	0.96	1000
High Channel	2480	-0.436	0.90	1000

### For 8DPSK

Channel	Frequency MHz	Measured Value dBm	Output Power mW	Limit mW
Low Channel	2402	0.405	1.10	1000
Middle Channel	2441	0.215	1.05	1000
High Channel	2480	-0.045	0.99	1000

Note: the antenna gain of 1.2dBi less than 6dBi maximum permission antenna gain value based on 1 watt peak output power limit.

REPORT NO.: STR16118034I PAGE 34 OF 54 FCC PART 15.247

# 10. Field Strength of Spurious Emissions

### 10.1 Standard Applicable


According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


#### **10.2 Test Procedure**

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

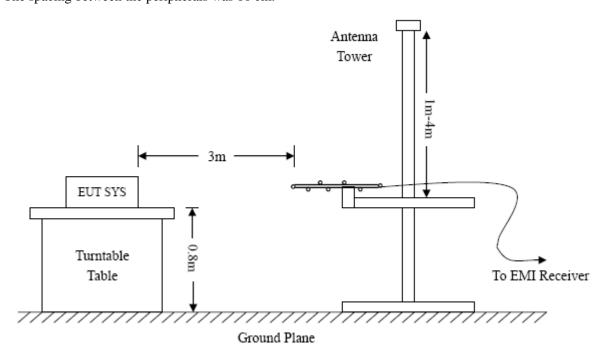

REPORT NO.: STR16118034I PAGE 35 OF 54 FCC PART 15.247

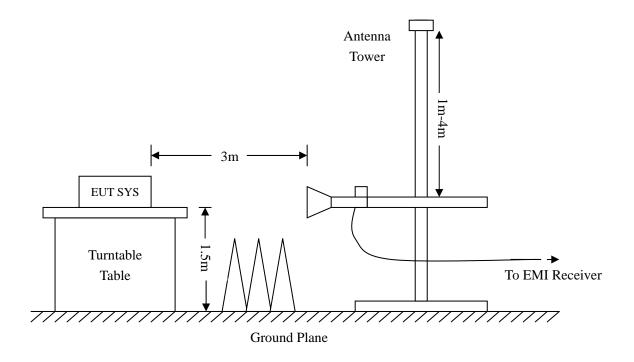

Frequency :9kHz-30MHz Frequency :30MHz-1GHz Frequency :Above 1GHz

RBW=10KHz, RBW=120KHz, RBW=1MHz,

VBW=30KHz VBW=300KHz VBW=3MHz(Peak), 10Hz(AV)

Detector function = peak Detector function = peak, QP Detector function = peak, AV

## 10.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of  $-6dB\mu V$  means the emission is  $6dB\mu V$  below the maximum limit. The equation for margin calculation is as follows:

### **10.4 Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

REPORT NO.: STR16118034I PAGE 36 OF 54 FCC PART 15.247



# 10.5 Summary of Test Results/Plots

According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst cases:

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

## Plot of Radiated Emissions Test Data (30MHz to 1GHz)


EUT: Bluetooth speaker

Tested Model: WM-1300

Operating Condition: Transmitting Low Channel (2402MHz)

Comment: DC 3.7V by battery

Test Specification: Horizontal

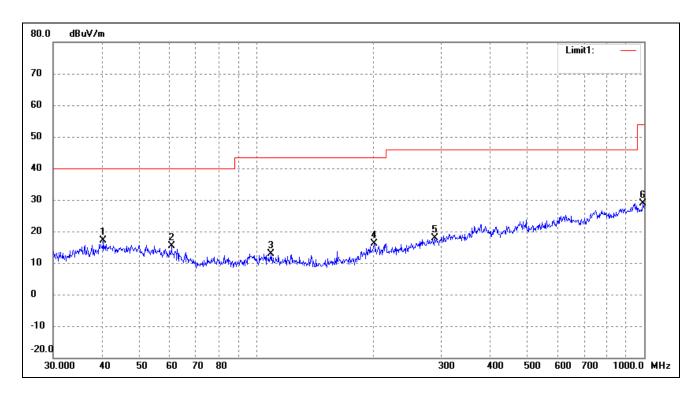


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	40.4172	24.72	-7.70	17.02	40.00	-22.98	75	100	peak
2	60.4919	25.21	-9.74	15.47	40.00	-24.53	195	100	peak
3	109.4116	24.11	-11.15	12.96	43.50	-30.54	143	100	peak
4	201.3930	24.75	-8.66	16.09	43.50	-27.41	114	100	peak
5	289.0021	23.67	-5.90	17.77	46.00	-28.23	326	100	peak
6	993.0114	24.48	4.49	28.97	54.00	-25.03	197	100	peak

REPORT NO.: STR16118034I PAGE 37 OF 54 FCC PART 15.247



Test Specification: Vertical

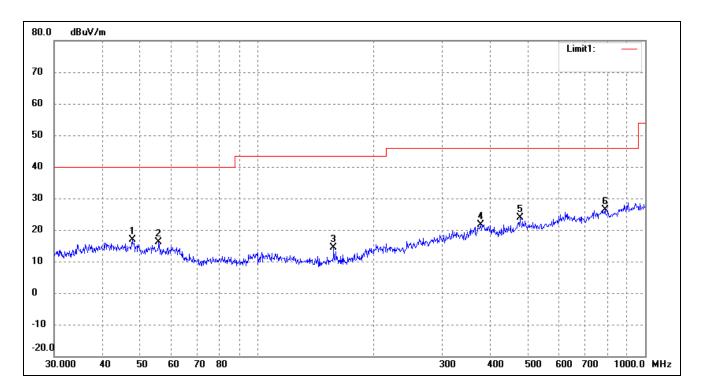


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	47.6586	24.93	-8.17	16.76	40.00	-23.24	83	100	peak
2	55.8047	25.30	-9.05	16.25	40.00	-23.75	130	100	peak
3	157.5589	26.61	-12.31	14.30	43.50	-29.20	142	100	peak
4	377.2591	23.94	-2.26	21.68	46.00	-24.32	138	100	peak
5	475.4991	25.28	-1.42	23.86	46.00	-22.14	178	100	peak
6	787.8513	23.83	2.51	26.34	46.00	-19.66	201	100	peak



Operating Condition: Transmitting Middle Channel (2441MHz)

Comment: DC 3.7V by battery

Test Specification: Horizontal

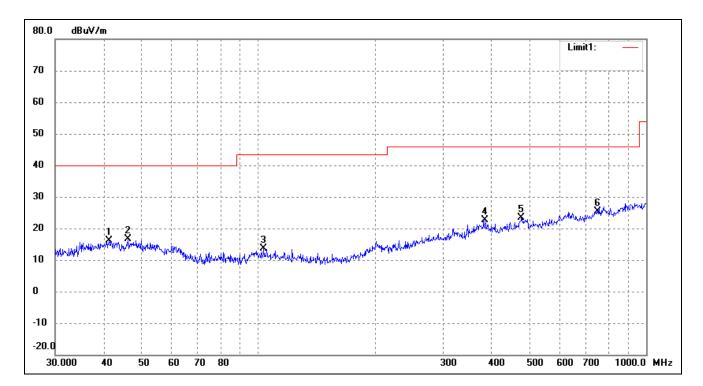


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	41.2765	23.86	-7.75	16.11	40.00	-23.89	227	100	peak
2	46.1780	24.81	-8.07	16.74	40.00	-23.26	131	100	peak
3	103.4421	24.51	-10.99	13.52	43.50	-29.98	95	100	peak
4	383.9318	24.96	-2.30	22.66	46.00	-23.34	100	100	peak
5	477.1694	24.60	-1.27	23.33	46.00	-22.67	107	100	peak
6	750.1083	23.37	1.95	25.32	46.00	-20.68	240	100	peak

REPORT NO.: STR16118034I PAGE 39 OF 54 FCC PART 15.247



Test Specification: Vertical

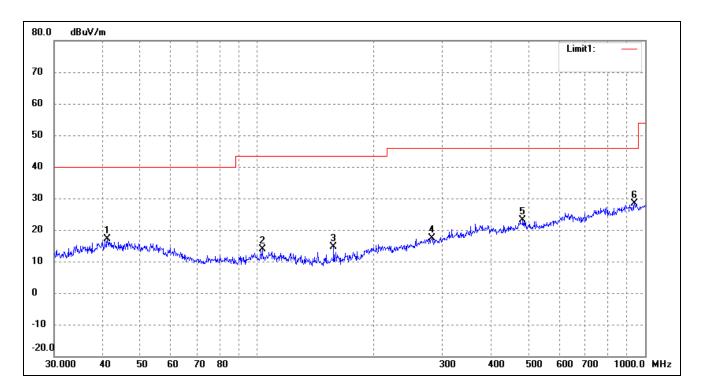


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	41.1320	24.93	-7.74	17.19	40.00	-22.81	186	100	peak
2	103.0800	24.84	-10.97	13.87	43.50	-29.63	284	100	peak
3	157.5589	27.04	-12.31	14.73	43.50	-28.77	74	100	peak
4	281.9946	23.44	-6.06	17.38	46.00	-28.62	127	100	peak
5	483.9094	24.51	-1.27	23.24	46.00	-22.76	290	100	peak
6	938.8326	24.22	4.24	28.46	46.00	-17.54	333	100	peak



Operating Condition: Transmitting High Channel (2480MHz)

Comment: DC 3.7V by battery

Test Specification: Horizontal

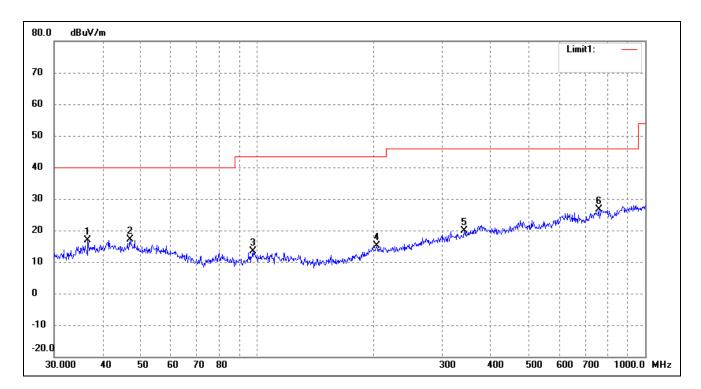


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	36.6375	25.59	-8.59	17.00	40.00	-23.00	123	100	peak
2	46.9948	25.23	-8.13	17.10	40.00	-22.90	218	100	peak
3	97.4560	24.82	-11.42	13.40	43.50	-30.10	56	100	peak
4	203.5228	23.86	-8.68	15.18	43.50	-28.32	140	100	peak
5	341.9787	24.70	-4.82	19.88	46.00	-26.12	78	100	peak
6	760.7036	24.85	1.84	26.69	46.00	-19.31	256	100	peak


REPORT NO.: STR16118034I PAGE 41 OF 54 FCC PART 15.247



Test Specification: Vertical

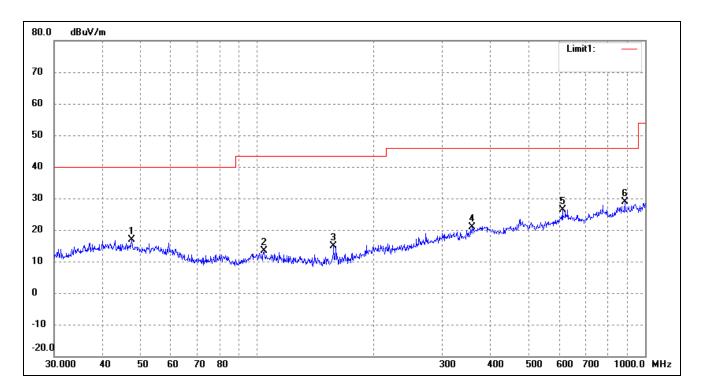

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	47.4918	25.01	-8.16	16.85	40.00	-23.15	145	100	peak
2	104.1701	24.47	-11.01	13.46	43.50	-30.04	92	100	peak
3	157.5589	27.27	-12.31	14.96	43.50	-28.54	323	100	peak
4	357.9287	24.19	-3.43	20.76	46.00	-25.24	96	100	peak
5	612.0642	25.81	0.68	26.49	46.00	-19.51	167	100	peak
6	887.6099	25.69	3.15	28.84	46.00	-17.16	224	100	peak





## Spurious Emissions Above 1GHz

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
			Low Chann	el-2402MHz			
4804	50.37	-3.59	46.78	74	-27.22	Н	PK
4804	36.89	-3.59	33.30	54	-20.70	Н	AV
7206	48.53	-0.52	48.01	74	-25.99	Н	PK
7206	33.67	-0.52	33.15	54	-20.85	Н	AV
4804	49.31	-3.59	45.72	74	-28.28	V	PK
4804	34.97	-3.59	31.38	54	-22.62	V	AV
7206	52.19	-0.52	51.67	74	-22.33	V	PK
7206	37.59	-0.52	37.07	54	-16.93	V	AV
			Middle Chan	nel-2441MHz			
4882	53.27	-3.49	49.78	74	-24.22	Н	PK
4882	41.64	-3.49	38.15	54	-15.85	Н	AV
7323	52.59	-0.47	52.12	74	-21.88	Н	PK
7323	38.73	-0.47	38.26	54	-15.74	Н	AV
4882	51.26	-3.49	47.77	74	-26.23	V	PK
4882	41.37	-3.49	37.88	54	-16.12	V	AV
7323	51.92	-0.47	51.45	74	-22.55	V	PK
7323	39.73	-0.47	39.26	54	-14.74	V	AV
			High Chann	el-2480MHz			
4960	53.49	-3.41	50.08	74	-23.92	Н	PK
4960	41.57	-3.41	38.16	54	-15.84	Н	AV
7440	50.62	-0.42	50.20	74	-23.80	Н	PK
7440	41.97	-0.42	41.55	54	-12.45	Н	AV
4960	51.54	-3.41	48.13	74	-25.87	V	PK
4960	38.61	-3.41	35.20	54	-18.80	V	AV
7440	51.82	-0.42	51.40	74	-22.60	V	PK
7440	39.67	-0.42	39.25	54	-14.75	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

REPORT NO.: STR16118034I PAGE 43 OF 54 FCC PART 15.247



TEST Model: WM-1300

### 11. Out of Band Emissions

### 11.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 11.2 Test Procedure

According to the DA 00-705, the band-edge radiated test method as follows.

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2410MHz for low bandedge, 2470MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation porduct outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the DA 00-705, the band-edge conducted test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2380MHz to 2410MHz for low bandedge, 2470MHz to 2500MHz for the high bandedge)

RBW = 100kHz, VBW = 300kHz

Sweep = auto; Detector function = peak; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation porduct outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the limit specified in this section (at least 20dB attenuation).

REPORT NO.: STR16118034I PAGE 44 OF 54 FCC PART 15.247

## 11.3 Environmental Conditions


Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

# 11.4 Summary of Test Results/Plots

Restricted Bandedge (Radiated)

Lowest Bandedge

Horizontal (Worst case)

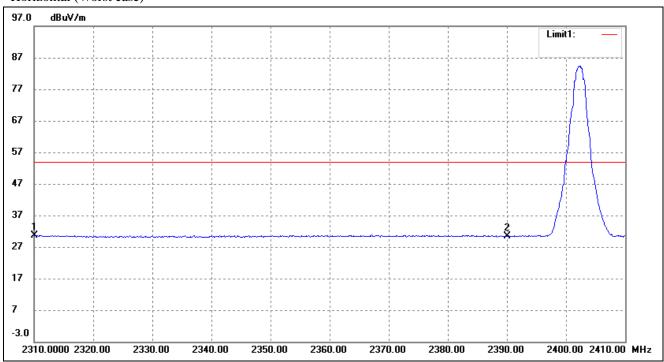


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2310.000	34.23	-3.69	30.54	54.00	-23.46	Average Detector
	2310.000	46.81	-3.69	43.12	74.00	-30.88	Peak Detector
2	2390.000	33.89	-3.49	30.40	54.00	-23.60	Average Detector
	2390.000	46.85	-3.49	43.36	74.00	-30.64	Peak Detector

REPORT NO.: STR16118034I PAGE 45 OF 54 FCC PART 15.247



# Highest Bandedge

## Horizontal (Worst case)

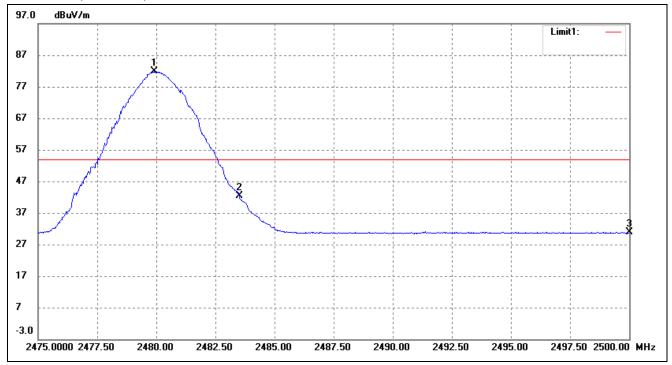



No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2479.900	85.08	-3.25	81.83	/	/	Average Detector
	2480.125	95.86	-3.25	92.61	/	/	Peak Detector
2	2483.500	45.53	-3.25	42.28	54.00	-11.72	Average Detector
	2483.500	52.25	-3.25	49.00	74.00	-25.00	Peak Detector
3	2500.000	34.00	-3.20	30.80	54.00	-23.20	Average Detector
	2500.000	45.82	-3.20	42.62	74.00	-31.38	Peak Detector

REPORT NO.: STR16118034I PAGE 46 OF 54 FCC PART 15.247




Worst mode DH1
Out of Bandedge and Spurious Emission (Conducted)
Lowest

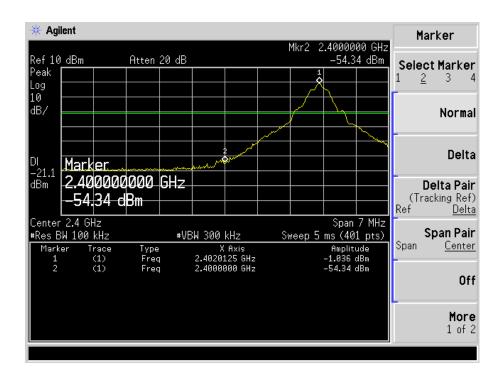


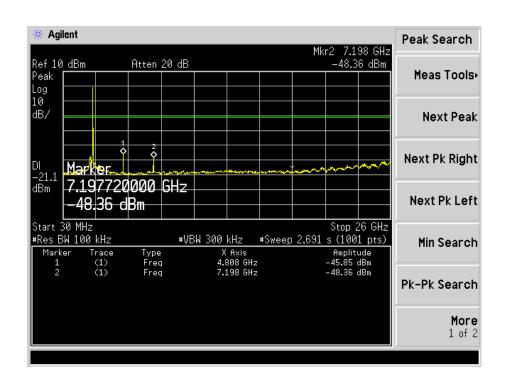




#### Middle Channel

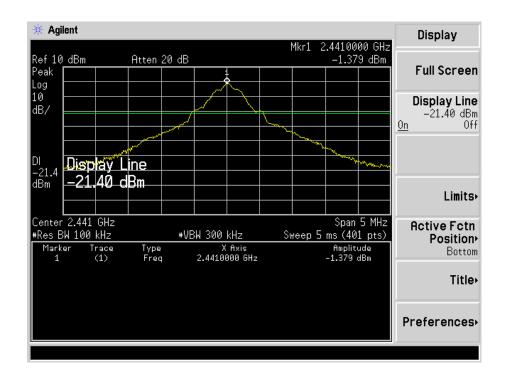


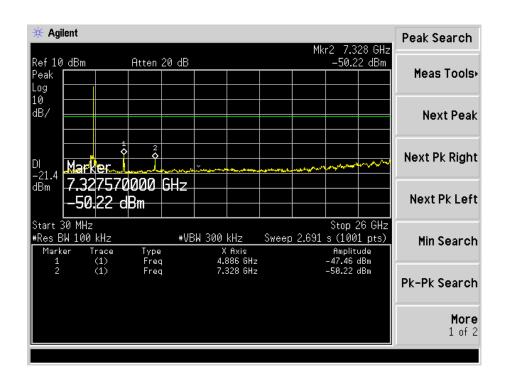




### Highest

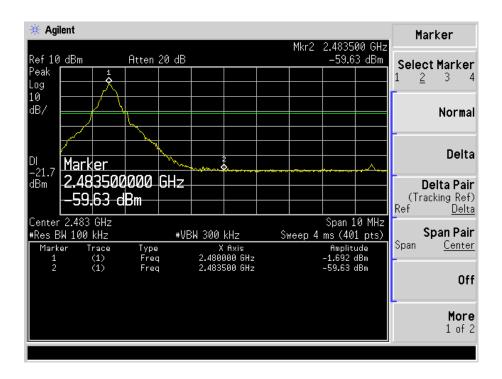

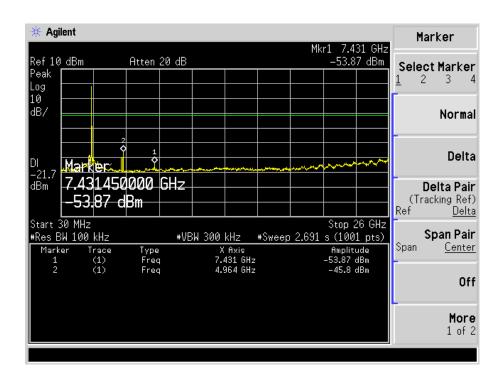




# Out of Bandedge with Hopping on: Lowest Bandedge

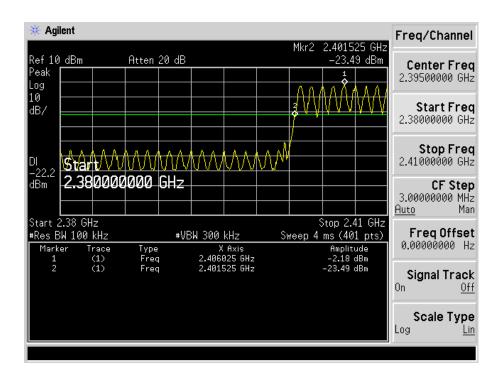

### Highest Bandedge

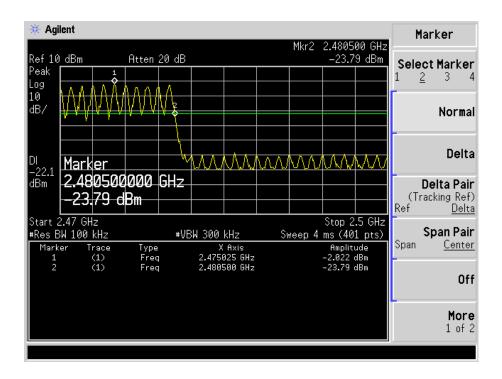


## 12. Conducted Emissions

### **12.1 Test Procedure**

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

## 12.2 Basic Test Setup Block Diagram

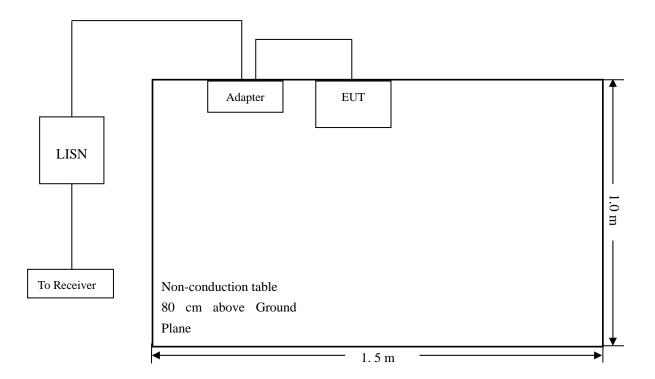

### 12.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

REPORT NO.: STR16118034I PAGE 51 OF 54 FCC PART 15.247



# 12.4 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency	30 MHz
Sweep Speed	Auto
IF Bandwidth	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode	Normal


# 12.5 Summary of Test Results/Plots

According to the data in section 12.6, the EUT <u>complied with the FCC Part 15.207</u> Conducted margin for this device, with the *worst* margin reading of:

-16.64 dB at 0.1540 MHz in the Neutral mode, Average detector, 0.15-30MHz

# 12.6 Conducted Emissions Test Data

REPORT NO.: STR16118034I PAGE 52 OF 54 FCC PART 15.247





## **Plot of Conducted Emissions Test Data**


EUT: Bluetooth speaker

Tested Model: WM-1300

Operating Condition: BT Transmitting

Comment: AC 120V/60Hz; Adapter DC 5V

Test Specification: Neutral

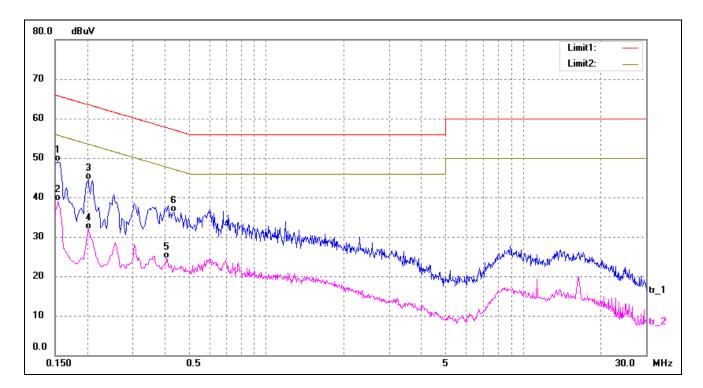


No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB/m)	(dBuV)	(dBuV)	(dB)	
1	0.1540	39.25	9.85	49.10	65.78	-16.68	QP
2*	0.1540	29.29	9.85	39.14	55.78	-16.64	AVG
3	0.2020	34.73	9.80	44.53	63.53	-19.00	QP
4	0.2020	22.06	9.80	31.86	53.53	-21.67	AVG
5	0.4100	14.65	9.80	24.45	47.65	-23.20	AVG
6	0.4340	26.50	9.80	36.30	57.18	-20.88	QP

REPORT NO.: STR16118034I PAGE 53 OF 54 FCC PART 15.247



Test Specification: Line

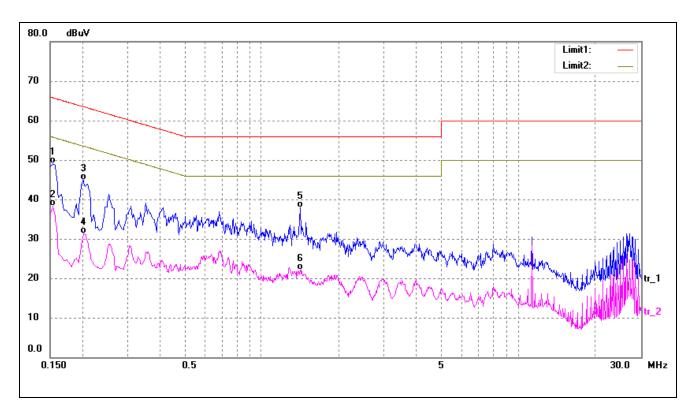

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB/m)	(dBuV)	(dBuV)	(dB)	
1*	0.1540	39.26	9.85	49.11	65.78	-16.67	QP
2	0.1540	28.42	9.85	38.27	55.78	-17.51	AVG
3	0.2020	35.06	9.80	44.86	63.53	-18.67	QP
4	0.2020	21.58	9.80	31.38	53.53	-22.15	AVG
5	1.4140	28.22	9.75	37.97	56.00	-18.03	QP
6	1.4140	12.41	9.75	22.16	46.00	-23.84	AVG

\*\*\*\*\* END OF REPORT \*\*\*\*\*

REPORT NO.: STR16118034I PAGE 54 OF 54 FCC PART 15.247