


RADIATED EMISSION BELOW 1GHZ

EUT	WIRELESS USB ADAPTER	Model Name	6B24
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal

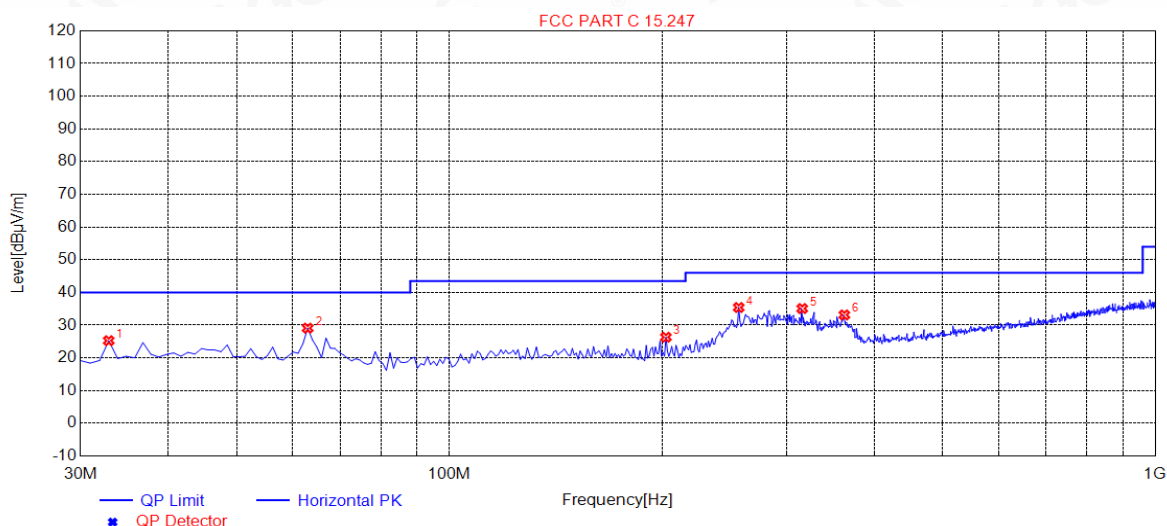

Suspected Data List								
NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	32.9100	25.27	13.36	40.00	14.73	100	142	Horizontal
2	62.9800	29.10	13.42	40.00	10.90	100	70	Horizontal
3	202.660	26.33	12.23	43.50	17.17	100	356	Horizontal
4	256.980	35.42	14.60	46.00	10.58	100	314	Horizontal
5	316.150	35.09	16.52	46.00	10.91	100	169	Horizontal
6	362.710	33.14	18.34	46.00	12.86	100	179	Horizontal

RESULT: PASS



Attestation of Global Compliance

Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118

EUT	WIRELESS USB ADAPTER	Model Name	6B24
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Vertical

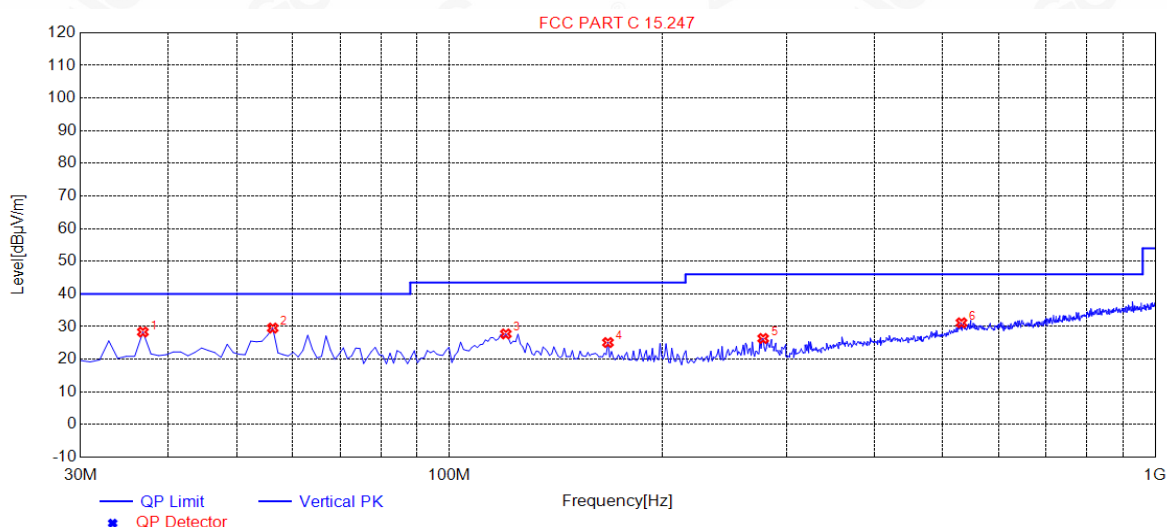

Suspected Data List								
NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	36.7900	28.34	14.16	40.00	11.66	100	355	Vertical
2	56.1900	29.55	14.20	40.00	10.45	100	318	Vertical
3	120.210	27.76	13.48	43.50	15.74	100	96	Vertical
4	167.740	25.11	14.17	43.50	18.39	100	321	Vertical
5	278.320	26.36	16.14	46.00	19.64	100	331	Vertical
6	531.490	31.16	22.88	46.00	14.84	100	53	Vertical

RESULT: PASS

Note: All test channels had been tested. The 802.11a20 at 5180MHz is the worst case and recorded in the test report.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Limit-Level.

The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION ABOVE 1GHZ

EUT	WIRELESS USB ADAPTER	Model Name	6B24
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ–Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
10360.042	50.00	9.14	59.14	74.00	-14.86	peak
10360.042	39.04	9.14	48.18	54.00	-5.82	AVG
15540.063	51.17	10.22	61.39	74.00	-12.61	peak
15540.063	37.52	10.22	47.74	54.00	-6.26	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RADIATED EMISSION ABOVE 1GHZ–Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
10360.042	48.48	9.14	57.62	74.00	-16.38	peak
10360.042	38.03	9.14	47.17	54.00	-6.83	AVG
15540.063	44.97	10.22	55.19	74.00	-18.81	peak
15540.063	35.06	10.22	45.28	54.00	-8.72	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Attestation of Global Compliance

Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118

EUT	WIRELESS USB ADAPTER	Model Name	6B24
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5240MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ–Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
10480.042	45.39	9.27	54.66	74.00	-19.34	peak
10480.042	37.04	9.27	46.31	54.00	-7.69	AVG
15720.063	42.83	10.38	53.21	74.00	-20.79	peak
15720.063	35.46	10.38	45.84	54.00	-8.16	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RADIATED EMISSION ABOVE 1GHZ–Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
10480.042	48.71	9.27	57.98	74.00	-16.02	peak
10480.042	37.29	9.27	46.56	54.00	-7.44	AVG
15720.063	45.54	10.38	55.92	74.00	-18.08	peak
15720.063	36.01	10.38	46.39	54.00	-7.61	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Note: All the case had been tested. The 802.11a modulation is the worst case and recorded in the test report.
Other frequencies radiation emission from 1GHz to 40GHz at least have 20dB margin and not recorded in the test report.
Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Limit-Level.
The “Factor” value can be calculated automatically by software of measurement system.

12. BAND EDGE EMISSION


12.1. MEASUREMENT PROCEDURE

1. The EUT operates at transmitting mode. The operate channel is tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
2. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=1MHz, VBW=3MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz ; VBW=1/on time(1KHz) / Sweep=AUTO
3. Other procedures refer to clause 11.2.

Note:

1. Factor=Antenna Factor + Cable loss - Amplifier gain. Field Strength=Factor + Reading level
2. The factor had been edited in the "Input Correction" of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB(μ V) to represent the Amplitude. Use the F dB(μ V/m) to represent the Field Strength. So A=F.
3. Only the data of band edge emission at the restricted band 4.5GHz-5.15GHz record in the report. Other restricted band 5.35GHz-5.46GHz and 7.25GHz-7.77GHz were considered as ambient noise. No recording in the test report.


12.2. TEST SET-UP

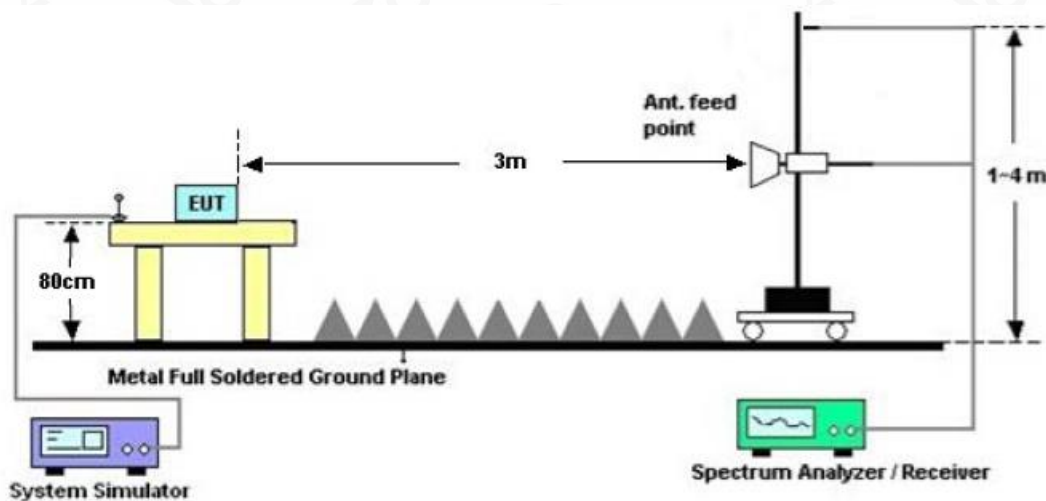


12.3. TEST RESULT

EUT	WIRELESS USB ADAPTER	Model Name	6B24
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal

PK Value

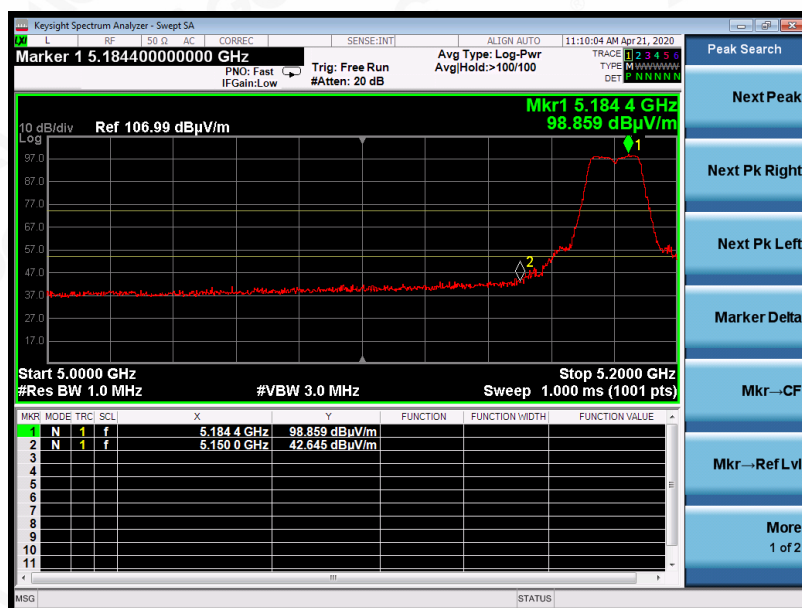

AV Value

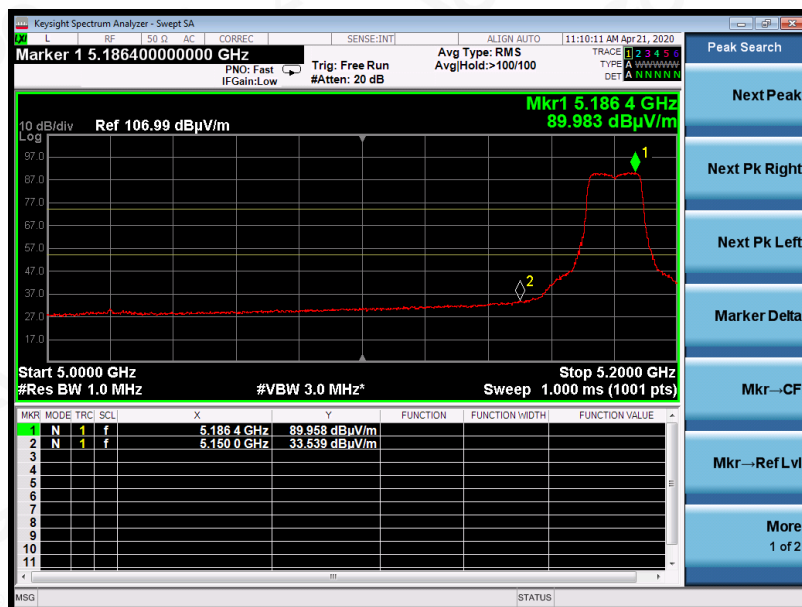

Attestation of Global Compliance

Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China


Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com


Service Hotline: 400 089 2118

EUT	WIRELESS USB ADAPTER	Model Name	6B24
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Vertical

PK Value

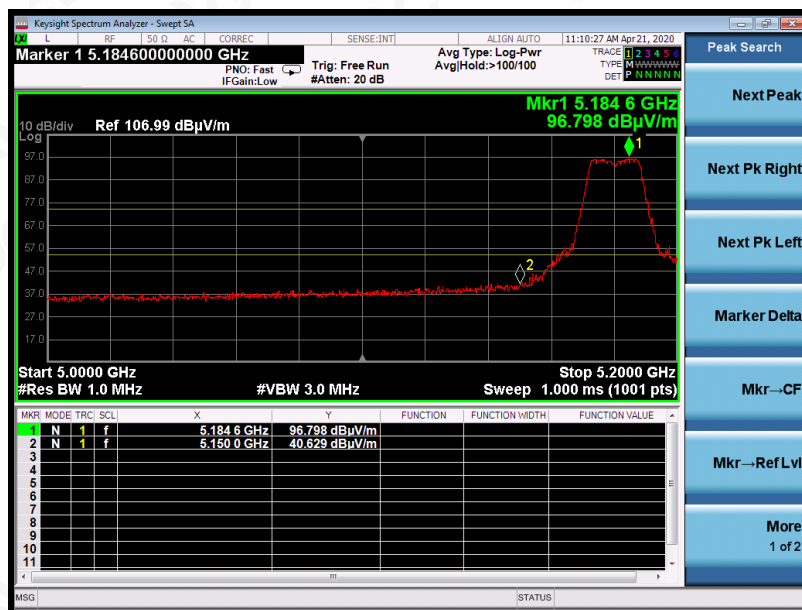

AV Value

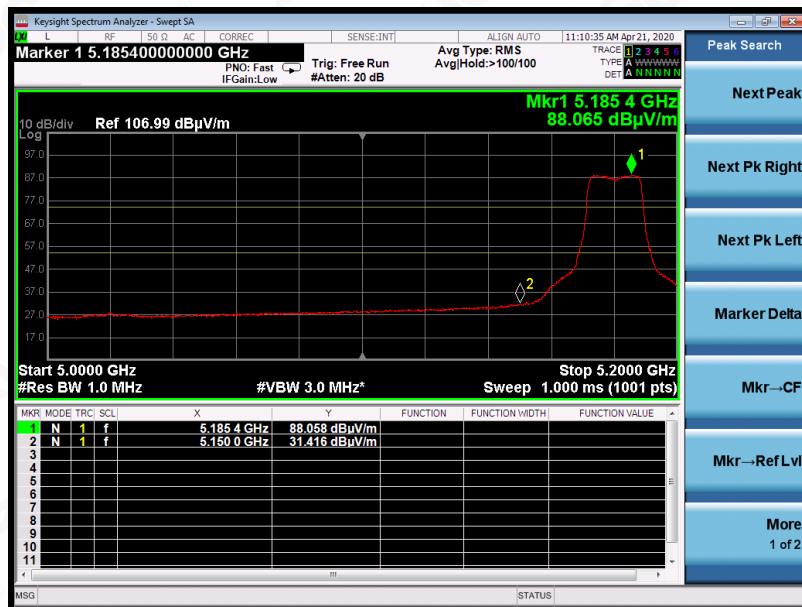

Attestation of Global Compliance

Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China


Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118

EUT	WIRELESS USB ADAPTER	Model Name	6B24
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5190MHz	Antenna	Horizontal

PK Value

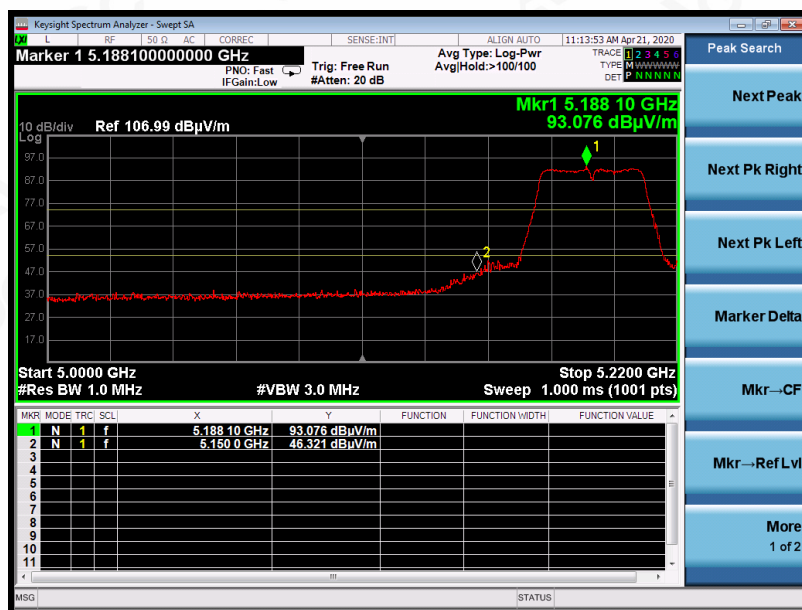

AV Value



Attestation of Global Compliance

Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China


Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118

EUT	WIRELESS USB ADAPTER	Model Name	6B24
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5190MHz	Antenna	Vertical

PK Value

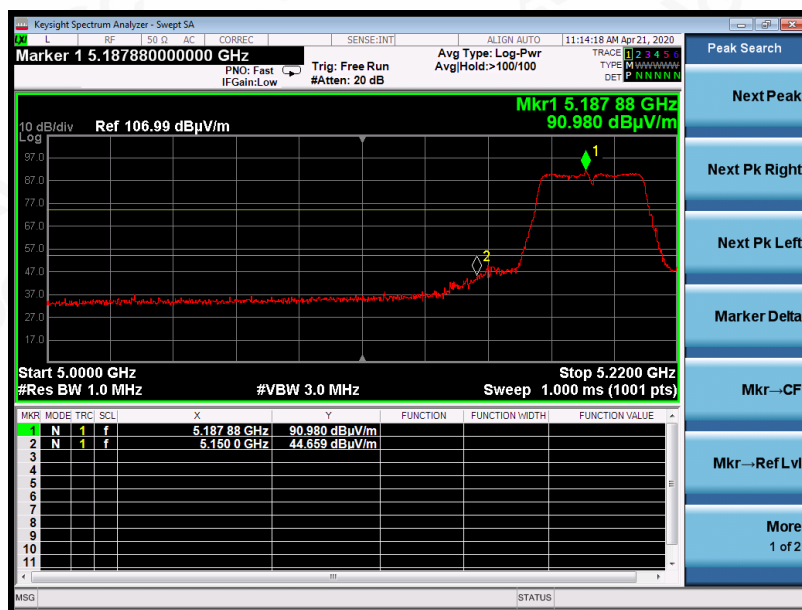

AV Value



EUT	WIRELESS USB ADAPTER	Model Name	6B24
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5210MHz	Antenna	Horizontal

PK Value




AV Value



EUT	WIRELESS USB ADAPTER	Model Name	6B24
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5210MHz	Antenna	Vertical

PK Value

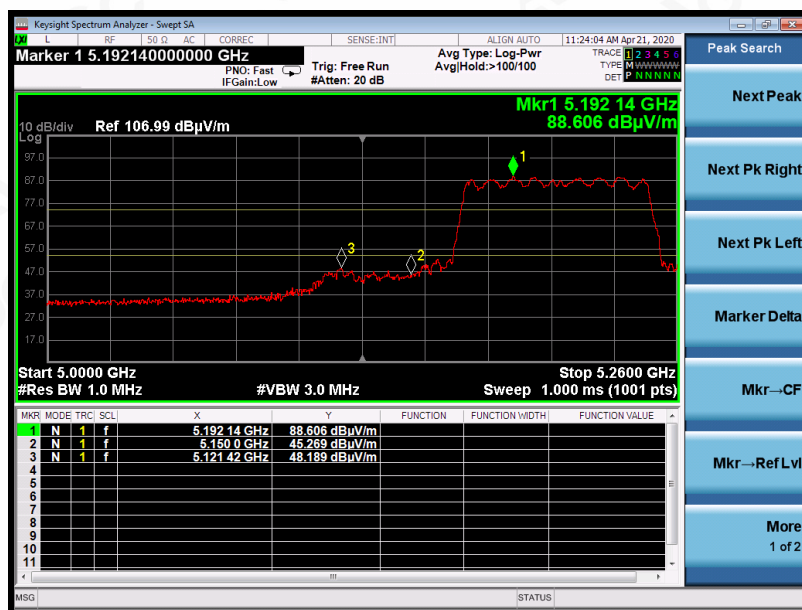

AV Value



RESULT: PASS


Note: All the 20MHz bandwidth modulation had been tested, the 802.11a20 was the worst case and record in his test report. All the 40MHz bandwidth modulation had been tested, the 802.11N40 was the worst case and record in his test report.

13. FREQUENCY STABILITY

13.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the operation frequency.
3. Set SPA Centre Frequency = Operation Frequency. SPAN=enough to measure the emission is maintained within the band
4. Set SPA Trace 1 Max hold, then View.
5. Extreme temperature rule is -10°C~60°C.

13.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

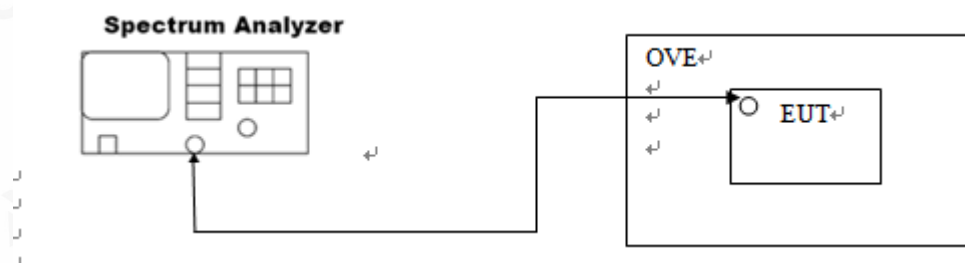

13.3. MEASUREMENT RESULTS

Test Mode	Temperature	Measurement Frequency (MHz)	Result	Conclusion
802.11a	- 10℃	5180	within the band	PASS
	0℃	5180	within the band	PASS
	10℃	5180	within the band	PASS
	20℃	5180	within the band	PASS
	30℃	5180	within the band	PASS
	40℃	5180	within the band	PASS
	50℃	5180	within the band	PASS
	60℃	5180	within the band	PASS
	- 10℃	5240	within the band	PASS
	0℃	5240	within the band	PASS
	10℃	5240	within the band	PASS
	20℃	5240	within the band	PASS
	30℃	5240	within the band	PASS
	40℃	5240	within the band	PASS
	50℃	5240	within the band	PASS
	60℃	5240	within the band	PASS

Test Mode	Temperature	Measurement Frequency (MHz)	Result	Conclusion
802.11n20	- 10℃	5180	within the band	PASS
	0℃	5180	within the band	PASS
	10℃	5180	within the band	PASS
	20℃	5180	within the band	PASS
	30℃	5180	within the band	PASS
	40℃	5180	within the band	PASS
	50℃	5180	within the band	PASS
	60℃	5180	within the band	PASS
	- 10℃	5240	within the band	PASS
	0℃	5240	within the band	PASS
	10℃	5240	within the band	PASS
	20℃	5240	within the band	PASS
	30℃	5240	within the band	PASS
	40℃	5240	within the band	PASS
	50℃	5240	within the band	PASS
	60℃	5240	within the band	PASS

Test Mode	Temperature	Measurement Frequency (MHz)	Result	Conclusion
802.11ac20	- 10℃	5180	within the band	PASS
	0℃	5180	within the band	PASS
	10℃	5180	within the band	PASS
	20℃	5180	within the band	PASS
	30℃	5180	within the band	PASS
	40℃	5180	within the band	PASS
	50℃	5180	within the band	PASS
	60℃	5180	within the band	PASS
	- 10℃	5240	within the band	PASS
	0℃	5240	within the band	PASS
	10℃	5240	within the band	PASS
	20℃	5240	within the band	PASS
	30℃	5240	within the band	PASS
	40℃	5240	within the band	PASS
	50℃	5240	within the band	PASS
	60℃	5240	within the band	PASS

Test Mode	Temperature	Measurement Frequency (MHz)	Result	Conclusion
802.11n40	- 10℃	5190	within the band	PASS
	0℃	5190	within the band	PASS
	10℃	5190	within the band	PASS
	20℃	5190	within the band	PASS
	30℃	5190	within the band	PASS
	40℃	5190	within the band	PASS
	50℃	5190	within the band	PASS
	60℃	5190	within the band	PASS
	- 10℃	5230	within the band	PASS
	0℃	5230	within the band	PASS
	10℃	5230	within the band	PASS
	20℃	5230	within the band	PASS
	30℃	5230	within the band	PASS
	40℃	5230	within the band	PASS
	50℃	5230	within the band	PASS
	60℃	5230	within the band	PASS

Test Mode	Temperature	Measurement Frequency (MHz)	Result	Conclusion
802.11ac40	- 10℃	5190	within the band	PASS
	0℃	5190	within the band	PASS
	10℃	5190	within the band	PASS
	20℃	5190	within the band	PASS
	30℃	5190	within the band	PASS
	40℃	5190	within the band	PASS
	50℃	5190	within the band	PASS
	60℃	5190	within the band	PASS
	- 10℃	5230	within the band	PASS
	0℃	5230	within the band	PASS
	10℃	5230	within the band	PASS
	20℃	5230	within the band	PASS
	30℃	5230	within the band	PASS
	40℃	5230	within the band	PASS
	50℃	5230	within the band	PASS
	60℃	5230	within the band	PASS

Test Mode	Temperature	Measurement Frequency (MHz)	Result	Conclusion
802.11ac80	- 10℃	5210	within the band	PASS
	0℃	5210	within the band	PASS
	10℃	5210	within the band	PASS
	20℃	5210	within the band	PASS
	30℃	5210	within the band	PASS
	40℃	5210	within the band	PASS
	50℃	5210	within the band	PASS
	60℃	5210	within the band	PASS

14. FCC LINE CONDUCTED EMISSION TEST


14.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

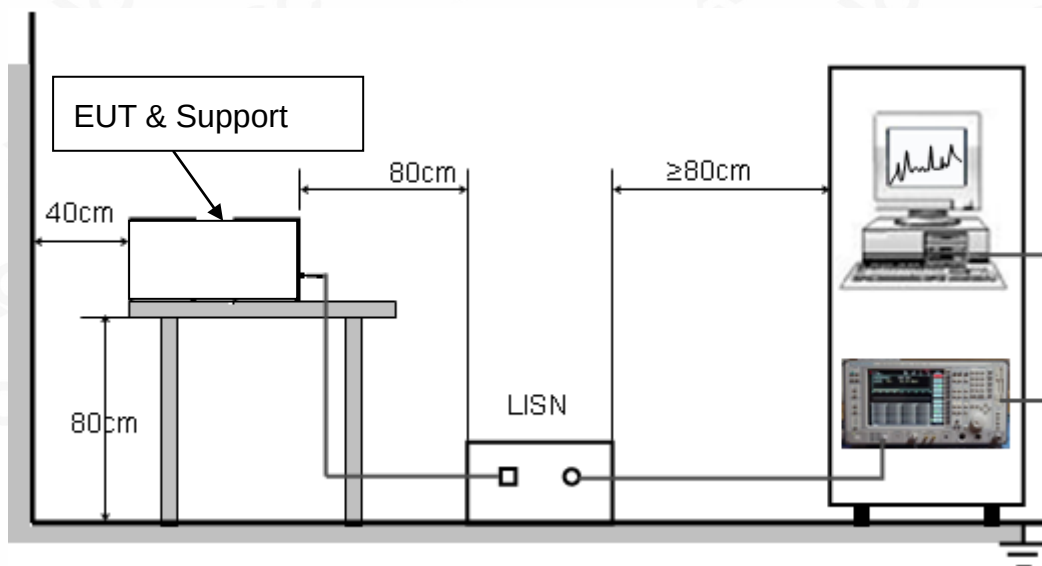

14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received charging voltage by adapter which received 120V/60Hz power by a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

LINE CONDUCTED EMISSION TEST-L

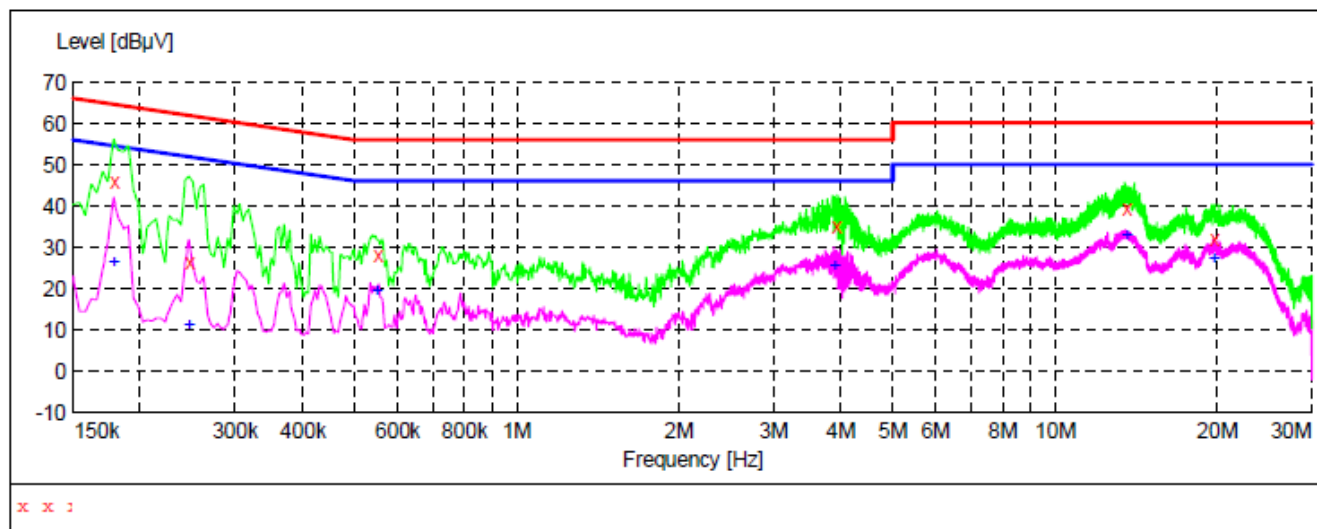


MEASUREMENT RESULT

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line
0.178000	46.10	10.3	65	18.5	QP	L1
0.246000	26.50	10.3	62	35.4	QP	L1
0.550000	28.20	11.0	56	27.8	QP	L1
3.902000	35.10	11.1	56	20.9	QP	L1
13.562000	39.40	11.1	60	20.6	QP	L1
19.718000	32.20	12.4	60	27.8	QP	L1

MEASUREMENT RESULT

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line
0.178000	26.70	10.3	55	27.9	AV	L1
0.246000	11.40	10.3	52	40.5	AV	L1
0.550000	19.50	11.0	46	26.5	AV	L1
3.898000	25.60	11.1	46	20.4	AV	L1
13.562000	33.10	11.1	50	16.9	AV	L1
19.710000	27.30	12.4	50	22.7	AV	L1

LINE CONDUCTED EMISSION TEST-N

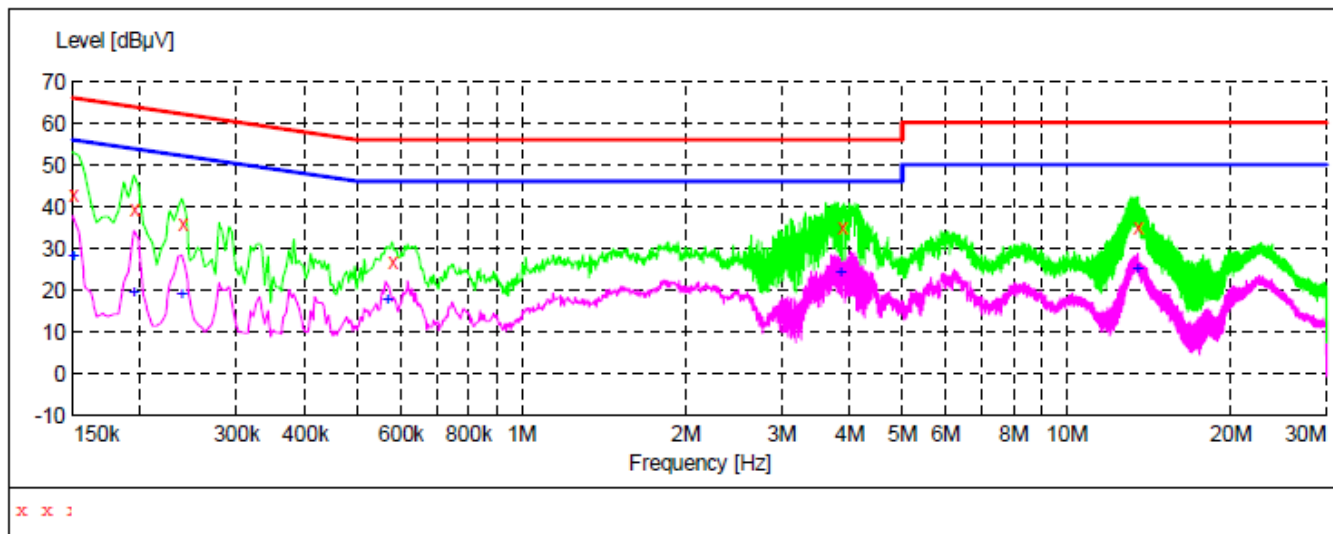

MEASUREMENT RESULT

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line
0.150000	42.90	10.3	66	23.1	QP	N
0.194000	39.50	10.3	64	24.4	QP	N
0.238000	35.80	10.3	62	26.4	QP	N
0.578000	27.00	10.8	56	29.0	QP	N
3.862000	35.00	11.0	56	21.0	QP	N
13.462000	35.30	11.1	60	24.7	QP	N

MEASUREMENT RESULT

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line
0.150000	28.20	10.3	56	27.8	AV	N
0.194000	19.80	10.3	54	34.1	AV	N
0.238000	19.20	10.3	52	33.0	AV	N
0.566000	17.60	10.9	46	28.4	AV	N
3.846000	24.30	11.0	46	21.7	AV	N
13.462000	25.30	11.1	50	24.7	AV	N


RESULT: PASS

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP BELOW 1GHZ

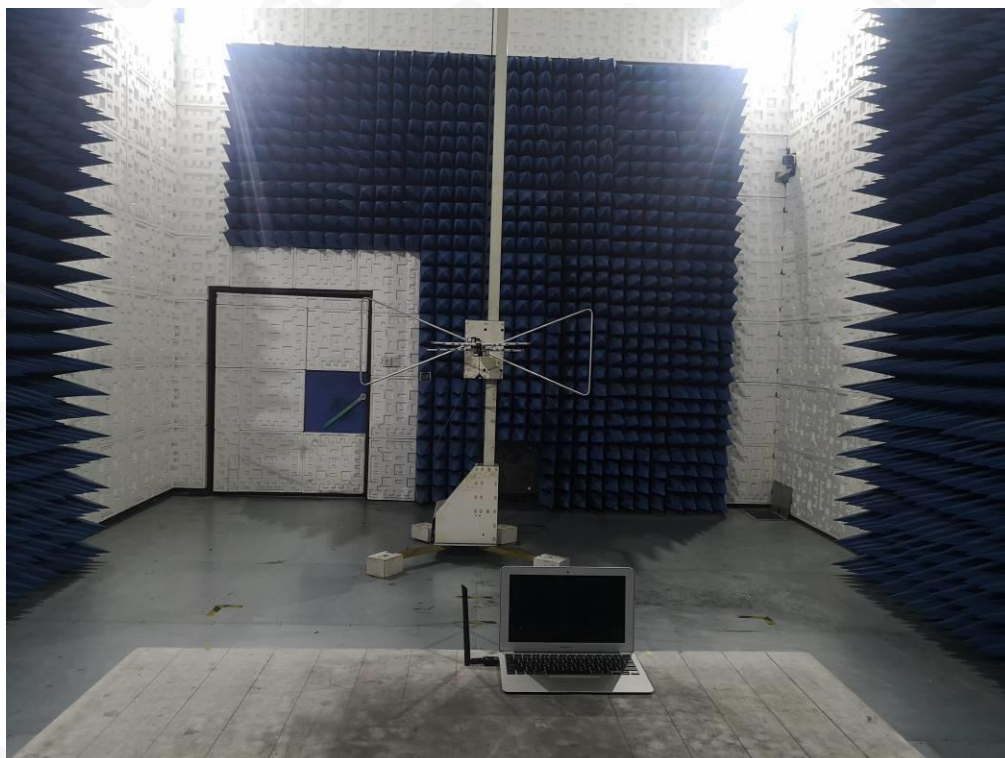

FCC RADIATED EMISSION TEST SETUP ABOVE 1GHZ



APPENDIX B: PHOTOGRAPHS OF EUT

ALL VIEW OF EUT




TOP VIEW OF EUT




BOTTOM VIEW OF EUT



FRONT VIEW OF EUT

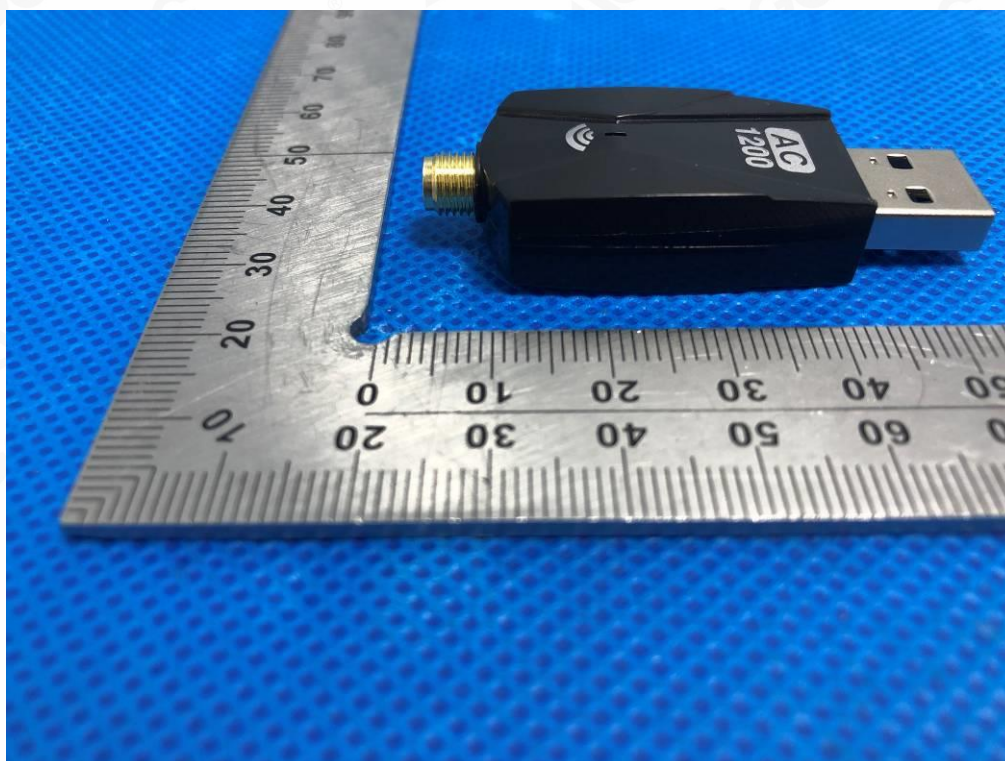

BACK VIEW OF EUT

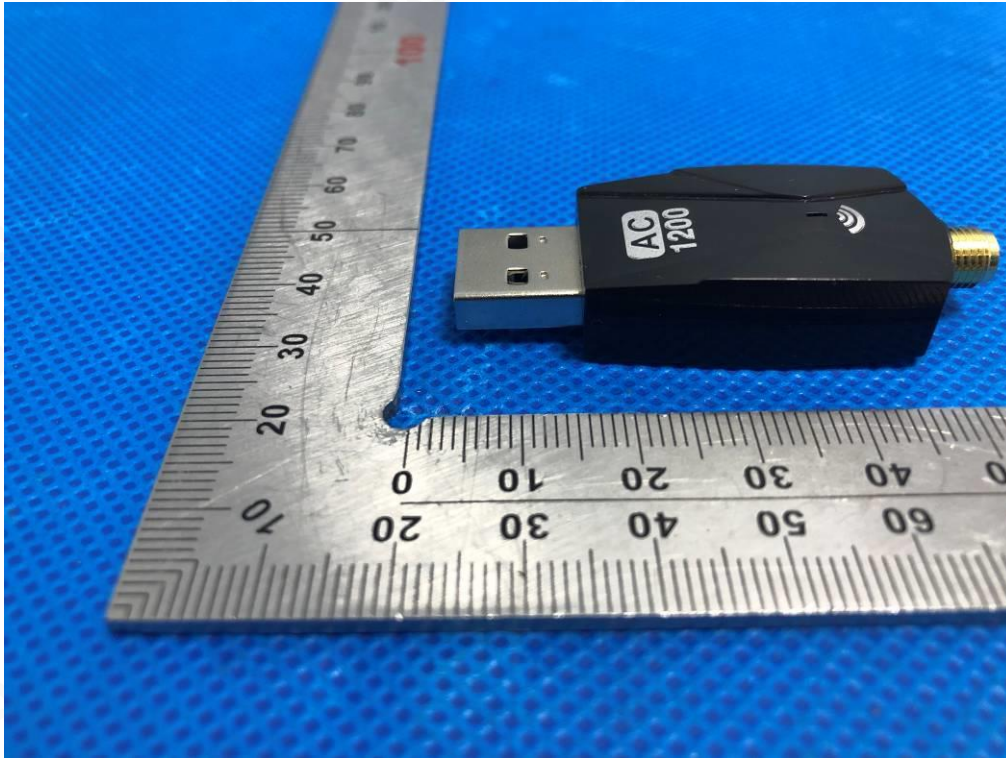


LEFT VIEW OF EUT



RIGHT VIEW OF EUT



OPEN VIEW OF EUT

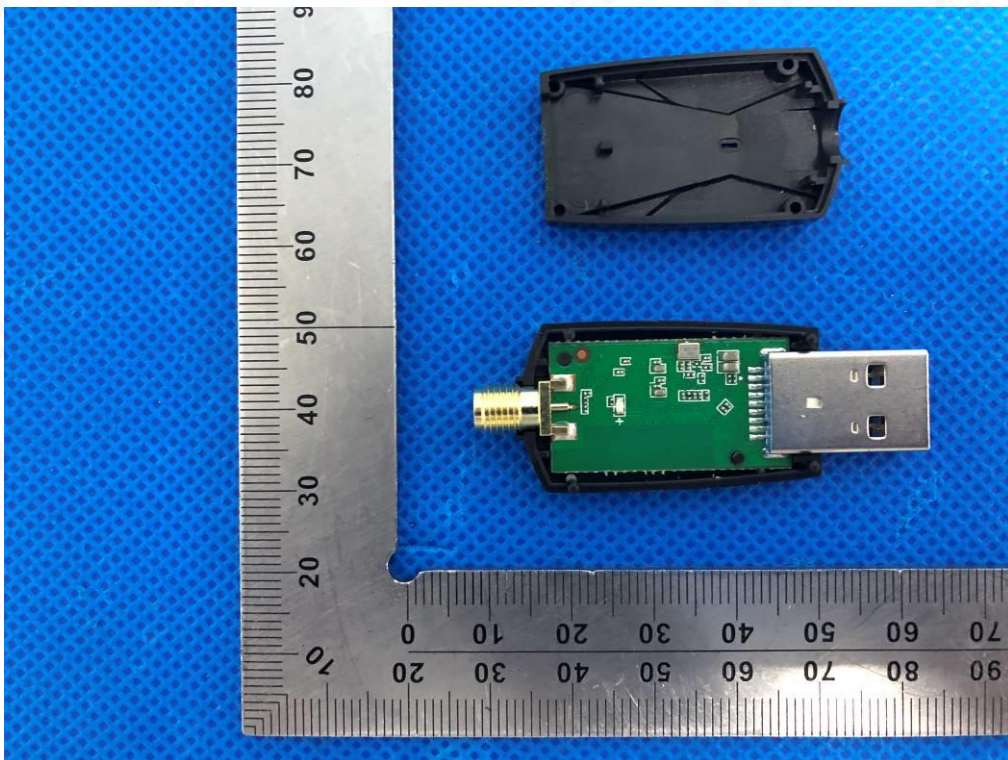

Attestation of Global Compliance

Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088


E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118


INTERNAL VIEW-1 OF EUT

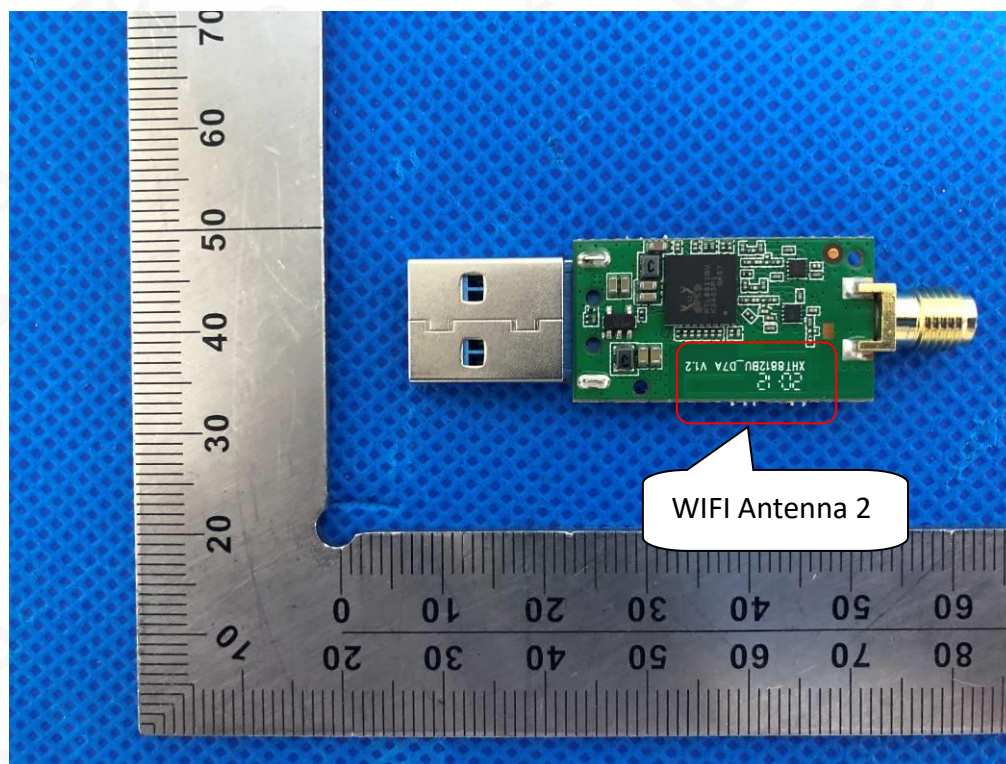

INTERNAL VIEW-2 OF EUT

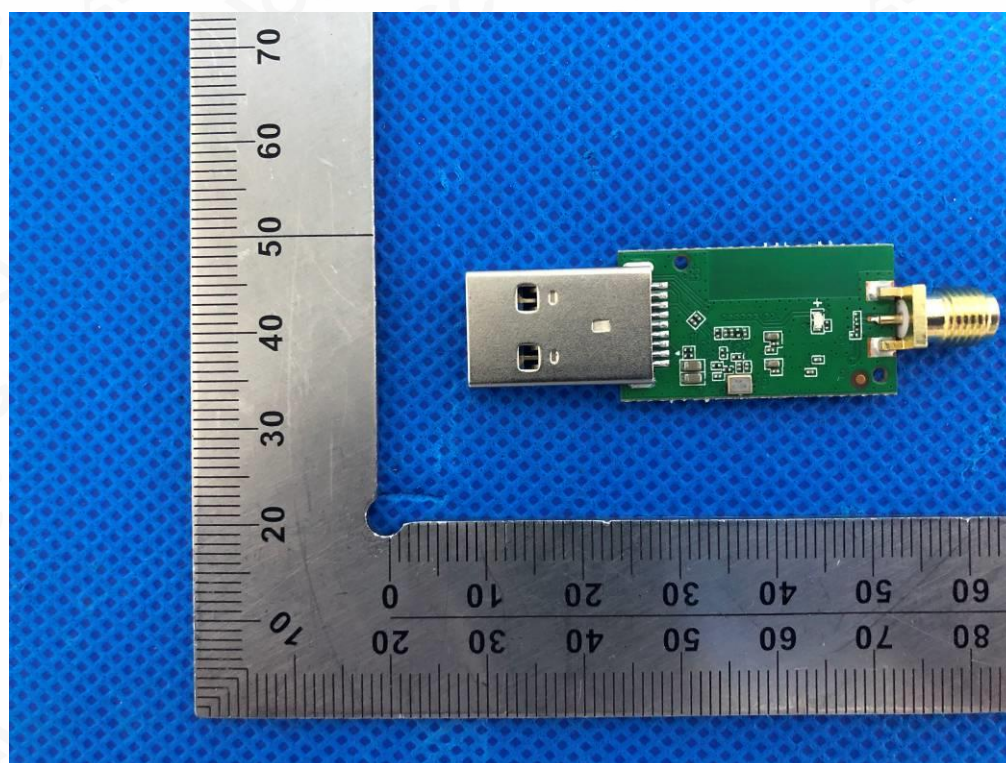

INTERNAL VIEW-3 OF EUT

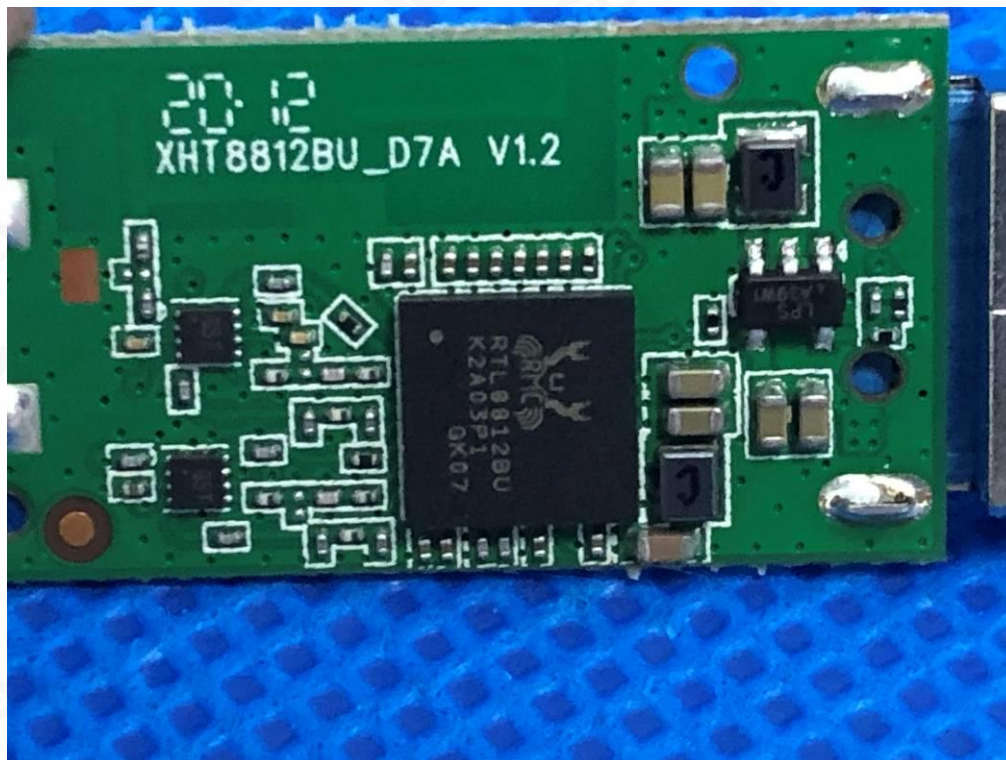

All Sample



----END OF REPORT----