

Data Sheet

CUSTOMER: Senao

MODEL NAME: TZ380W

AWAN P/N: A8PEE-100007

Senao P/N: 7102A1245000

ADVANCED WIRELESS & ANTENNA INC.



B2, No. 207, Sec.3, Beixin Rd., Xindian
Dist., New Taipei City 231, Taiwan, R.O.C
TEL : 886-2-8913-1939
FAX : 886-2-8913-2538
<http://www.awan-ant.com>

Awan Test Report

AW135SM002-01

The Reliable industry high performance standard for Antennas
www.awan-ant.com




- **Antenna Testing Conditions**

1. Test System
2. Antenna Under Test
3. Antenna Specification



Antenna RF characteristics

1. VSWR
2. Radiation Pattern 2D & 3D
3. Gain Table

Antenna Test System

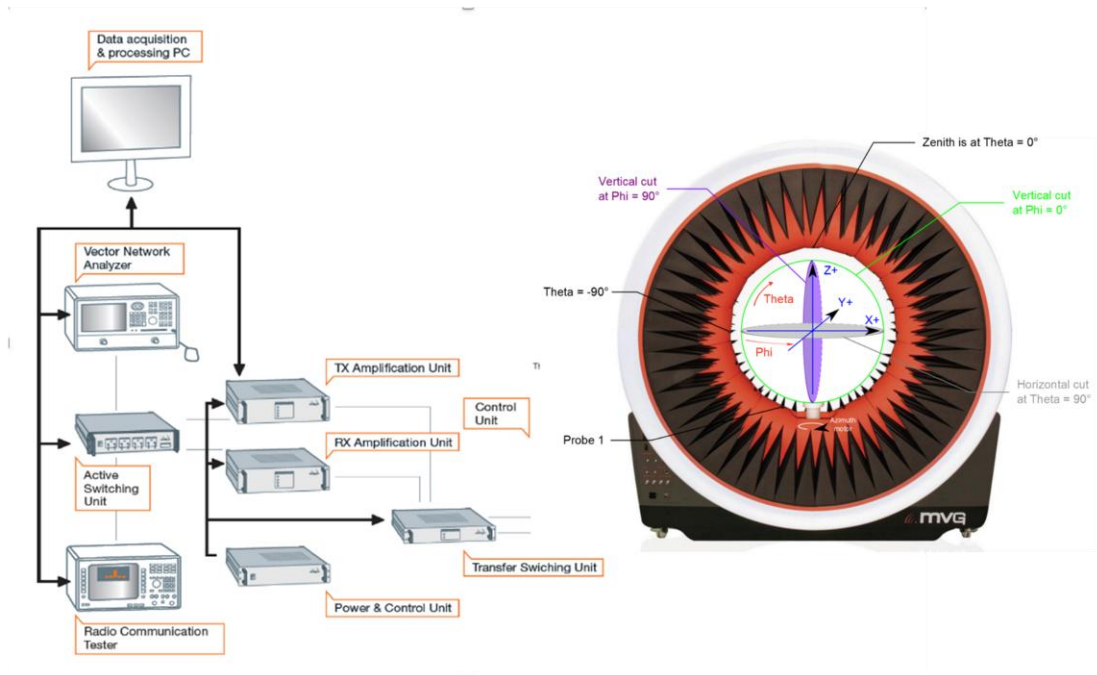

Antenna Under Test

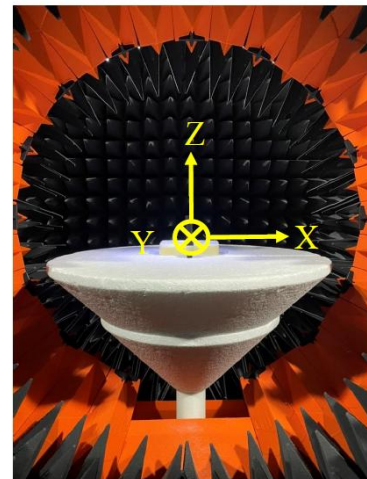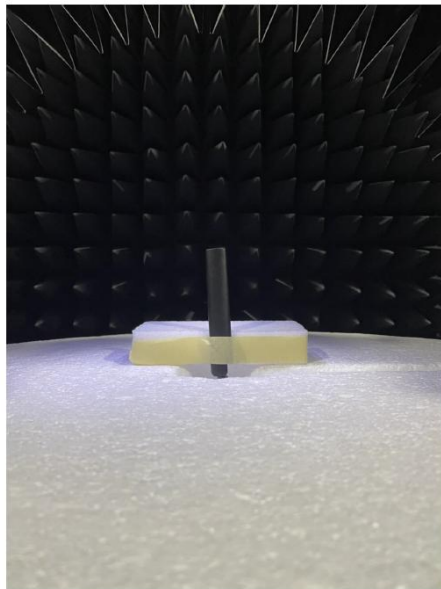

Antenna Specification



Parameter	Specification
Antenna Type	Dipole
VSWR	< 2
Frequency	2400~2500 MHz 5150~5850 MHz
Peak Gain	2400~2500 MHz @ 2.5 ± 0.5 dBi 5150~5850 MHz @ 5 ± 0.5 dBi
Efficiency	2400 ~2500 MHz @ 60~65 % 5150 ~5850 MHz @ 70~75 %

5

1
2
3
4
5
6
7
8

AWAN P/N	A8PEE-100007
SENAO P/N	7102A1245000

Rev.	EC#	Description	Drawn/Date	Checked/Date	Approved/Date
X1		NEW RELEASE	Kim 04/12/24	Jason 04/12/24	Jermy 04/12/24

RP SMA PLUG
公頭母針

印刷字體: Arial, 印刷顏色: White

45°

45°

360°

Electrical Properties	
Frequency	2400~2500MHz 5150~5850MHz
Impedance	50 Ohm Nominal
VSWR	< 2.0
Peak Gain	2400~2500MHz @ 2.5dBi ±0.5dBi 5150~5850MHz @ 5.0dBi ±0.5dBi
Efficiency	2400~2500MHz @ 60%~65% 5150~5850MHz @ 70%~75%
Polarization	Linear

Mechanical Properties	
CASE	ABS
CONNECTOR	SMA公頭母針
CASE COLOR	Black
Operating Temp	-30 ~ +65 °C
Waterproof level	*

Rev	Name	QTY	Part #	Material / Finish
6	天線	1		AW
5	SMA母針	1		CONL
4	Antenna Cover	1		AW
3	Antenna Base	1		PC/PBF
2	RF 178 Cable	1		CABLE
1	PCB Pin	1		PCB

awan

ANTENNAS WIRELESS & NETWORK INC.

Rev	Name	QTY	Part #	Material / Finish
6	天線	1		AW
5	SMA母針	1		CONL
4	Antenna Cover	1		AW
3	Antenna Base	1		PC/PBF
2	RF 178 Cable	1		CABLE
1	PCB Pin	1		PCB

Rev	Name	QTY	Part #	Material / Finish
6	天線	1		AW
5	SMA母針	1		CONL
4	Antenna Cover	1		AW
3	Antenna Base	1		PC/PBF
2	RF 178 Cable	1		CABLE
1	PCB Pin	1		PCB

HALOGEN FREE

Customer Drawing


AWAN C-A8PEE-03-00

This document and information contained herein are the property of ANAN, copies are issued in strict confidence and shall not be reproduced or copied, or used as the basis of manufacture or sale of apparatus without permission

HSF相關物質分析及測試點選擇參照
〈HSF均質物質拆分作業圖示表〉

符合AWAN環境管理物質技術標準
All materials meet the AWAN's spec. Environment - related substances management technical standard.


VSWR

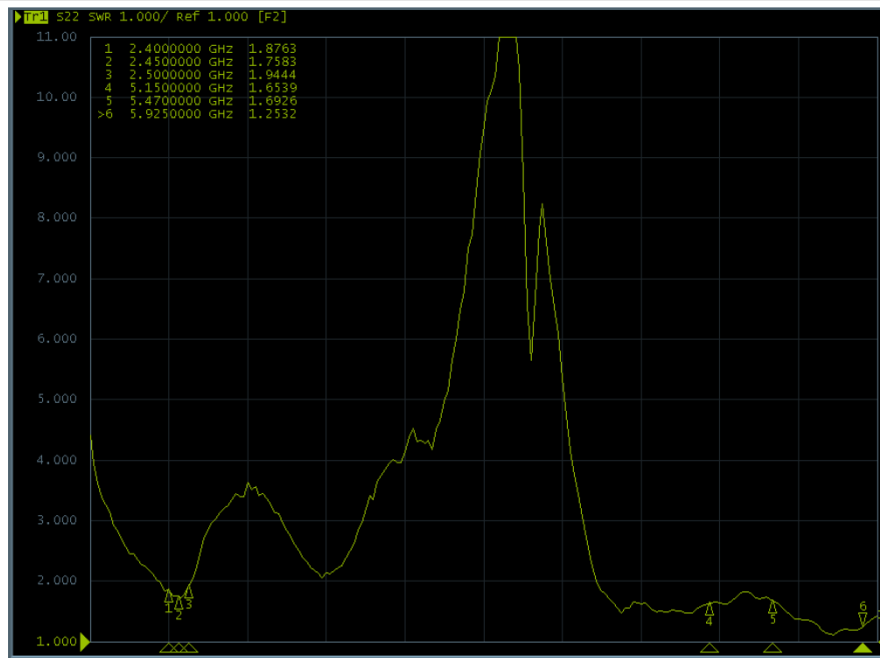

6


Gain Table

Frequency (MHz)	Peak Gain (dBi)	Efficiency (dB)	Efficiency (%)
2400	2.64	-1.97	63.54
2450	2.78	-2.01	62.96
2500	2.53	-2.06	62.29
5150	5.00	-1.45	71.62
5250	5.08	-1.37	72.94
5350	4.98	-1.54	70.17
5470	5.02	-1.53	70.31
5725	5.18	-1.38	72.78
5850	5.06	-1.36	73.04

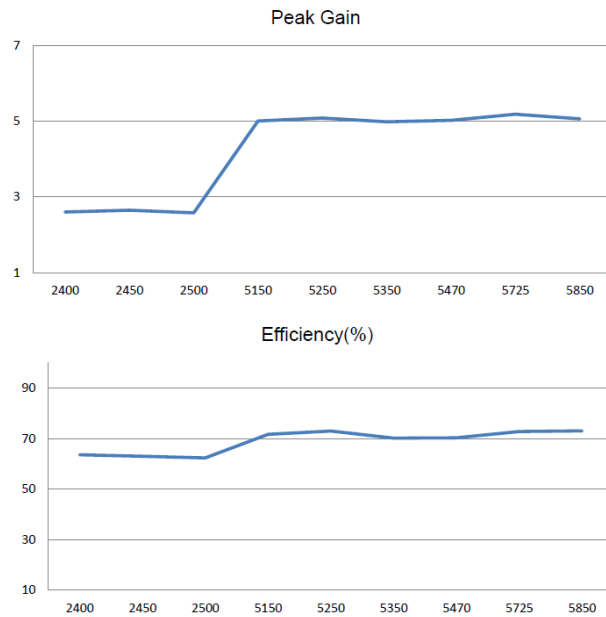


7

Radiation Pattern 2D & 3D (2400~2500MHz)

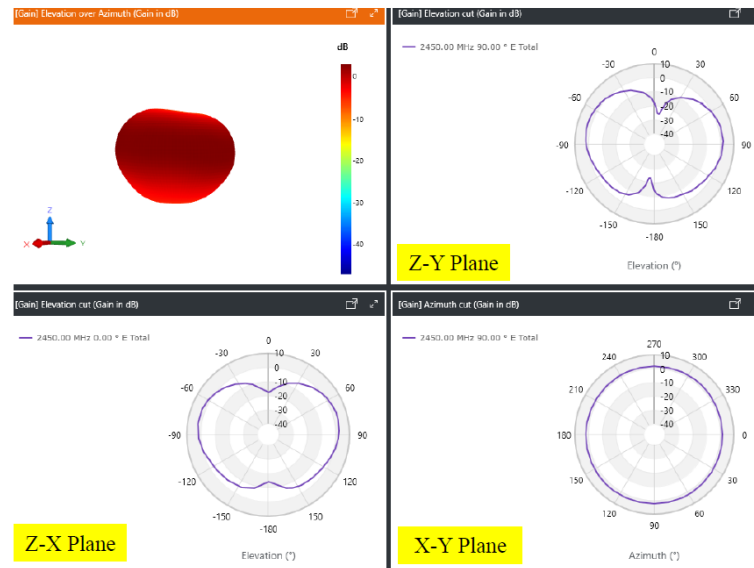

8

Radiation Pattern 2D & 3D (5150~5850MHz)

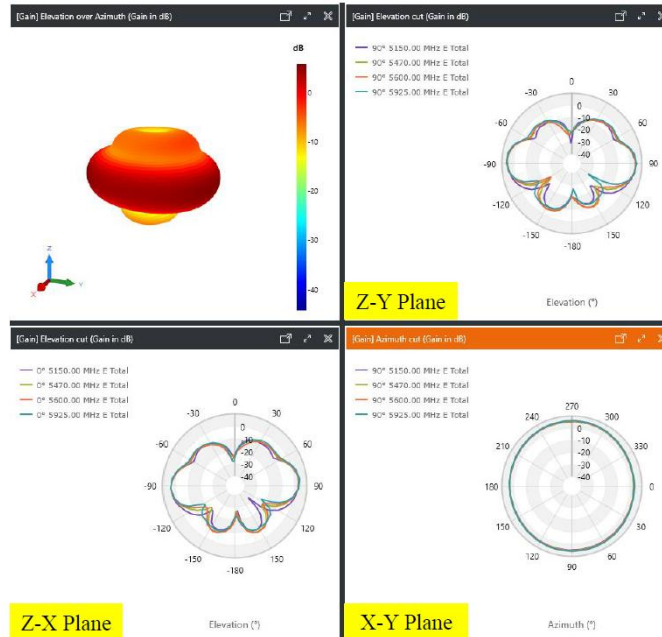

9