FCC Test Report

Report No.: AGC06426161101FE02

FCC ID : 2AKD8MURAH

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Smart Phone

BRAND NAME : KIOTO

MODEL NAME : Murah

CLIENT : Distribuidora De Industrias Nacionales S.A.

DATE OF ISSUE : Nov.19, 2016

STANDARD(S) : FCC Part 22H & 24E Rules

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd.

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report No.: AGC06426161101FE02 Page 2 of 115

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Nov.19, 2016	Valid	Original Report

TABLE OF CONTENTS

TABLE OF CONTENTS	3
1. VERIFICATION OF COMPLIANCE	5
2. GENERAL INFORMATION	6
2.1 PRODUCT DESCRIPTION	6
2.2 RELATED SUBMITTAL(S) / GRANT (S)	
2.3 TEST METHODOLOGY	
2.4 TEST FACILITY	
2.5 MEASUREMENT INSTRUMENTS	3
2.6 SPECIAL ACCESSORIES	10
2.7 EQUIPMENT MODIFICATIONS	10
3. SYSTEM TEST CONFIGURATION	11
3.1 EUT CONFIGURATION	11
3.2 EUT EXERCISE	11
3.3 GENERAL TECHNICAL REQUIREMENTS	11
3.4 CONFIGURATION OF EUT SYSTEM	12
4. SUMMARY OF TEST RESULTS	13
5. DESCRIPTION OF TEST MODES	13
6. OUTPUT POWER	14
6.1 CONDUCTED OUTPUT POWER	14
6.2 RADIATED OUTPUT POWER	23
6.3. PEAK-TO-AVERAGE RATIO	27
7. OCCUPIED BANDWIDTH	29
7.1 MEASUREMENT METHOD	29
7.2 PROVISIONS APPLICABLE	29
7.3 MEASUREMENT RESULT	30
APPENDIX A:BANDWIDTH	30
8. BAND EDGE	44
8.1 MEASUREMENT METHOD	44

8.2 PROVISIONS APPLICABLE	44
8.3 MEASUREMENT RESULT	45
APPENDIX B: BAND EDGES COMPLIANCE	45
9. SPURIOUS EMISSION	53
9.1 CONDUCTED SPURIOUS EMISSION	53
APPENDIX C: SPURIOUS EMISSION AT ANTENNA TERMINAL	54
9.2 RADIATED SPURIOUS EMISSION	91
10. MAINS CONDUCTED EMISSION	95
10.1 MEASUREMENT METHOD	95
10.2 PROVISIONS APPLICABLE	95
10.3 MEASUREMENT RESULT	96
11. FREQUENCY STABILITY	98
11.1 MEASUREMENT METHOD	98
11.2 PROVISIONS APPLICABLE	
11.3 MEASUREMENT RESULT	
Appendix D:Frequency Stability	100
PHOTOGRAPHS OF TEST SETUP	107
PHOTOGRAPHS OF EUT	109

Report No.: AGC06426161101FE02 Page 5 of 115

1. VERIFICATION OF COMPLIANCE

Applicant	Distribuidora De Industrias Nacionales S.A.		
Address Avenida Nueva De Lyon 72 Piso 5 Y 6 Providencia, Santiago, Chile			
Manufacturer UTCOM TECHNOLOGY CO., LIMITED			
Address	4C, Block A, Central Avenue Building, BaoYuan Road, Xixiang Town, Baoan		
Addiess	District, Shenzhen		
Product Designation	Smart Phone		
Brand Name	кіото		
Test Model	Murah		
Date of test	Nov 14, 2016 to Nov 19, 2016		
Deviation	None		
Condition of Test Sample	Normal		

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI/TIA- 603-D-2010. The sample tested as described in this report is in compliance with the FCC Rules Part 22H and 24E.

The test results of this report relate only to the tested sample identified in this report.

Tested By	Dota Zhang	
	Dota Zhang(Zhang Jianfeng)	Nov.19, 2016
Reviewed By	Bore xie	
	Bart Xie(Xie Xiaobin)	Nov.19, 2016
Approved By	Solya Zhong	
	Solger Zhang(Zhang Hongyi)	Nov.19, 2016
	Authorized Officer	1404.10, 2010

Report No.: AGC06426161101FE02 Page 6 of 115

2. GENERAL INFORMATION

2.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Attriajor teerinical description of Eo F is described as following.				
Product Designation:	Smart Phone			
Hardware version:	C22H_3BD3_V1.0B			
Software version:	N/A			
Frequency Bands:	☐ GSM 850 ☐ PCS 1900 (U.S. Bands) ☐ GSM 900 ☐ DCS 1800 (Non-U.S. Bands) ☐ UMTS FDD Band II ☐ UMTS FDD Band V (U.S. Bands) ☐ UMTS FDD Band I ☐ UMTS FDD Band VIII (Non-U.S. Bands)			
Antenna:	PIFA Antenna			
Type of Modulation GSM / GPRS : GMSK WCDMA : QPSK				
Antenna gain(GSM):	-1.0dBi			
Power Supply:	DC 3.7V by battery			
Battery parameter:	DC3.7V/1500mAh			
Adapter Input: AC100-240V, 50-60Hz, 0.15A				
Adapter Output:	DC5V,700mA			
Dual Card:	WCDMA / GSM Card Slot GSM Card Slot			
GPRS Class	12			
Extreme Vol. Limits:	DC3.4 V to 4.2 V (Normal: DC3.7 V)			
Extreme Temp. Tolerance -10°C to +50°C				
*** Note: The High Voltage DC4.2V and Low Voltage DC3.4V were declared by manufacturer, The				

^{***} Note: The High Voltage DC4.2V and Low Voltage DC3.4V were declared by manufacturer, The EUT couldn't be operating normally with higher or lower voltage.

Other functions have been performed according to verification procedure except for Bluetooth and MS function. Card 1 can't transmit with Card 2 simultaneously.

2. We found out the test mode with the highest power level after we analyze all the data rates. So we chose worst case as a representative.

^{***} **Note:** 1.The maximum power levels are GSM for MCS-4: GMSK link, and RMC 12.2kbps mode for WCDMA band II, WCDMA band V, only these modes were used for all tests.

Report No.: AGC06426161101FE02 Page 7 of 115

WCDMA Card Slot:

	Maximum ERP/EIRP	Max. Conducted Power	Max. Average	
	(dBm)	(dBm)	Burst Power (dBm)	
GSM 850	30.89	32.19	31.28	
PCS 1900	27.43	29.14	28.72	
UMTS BAND II	22.05	22.59	21.78	
UMTS BAND V	22.33	23.11	22.23	

GSM Card Slot:

	Maximum ERP/EIRP	Max. Conducted Power	Max. Average	
	(dBm)	(dBm)	Burst Power (dBm)	
GSM 850	30.38	31.51	31.17	
PCS 1900	27.14	28.62	28.33	

Report No.: AGC06426161101FE02 Page 8 of 115

2.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AKD8MURAH**, filing to comply with the FCC Part 22H&24E requirements.

2.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI/TIA-603-D-2010, and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057. KDB 971168 D01 Power Meas License Digital Systems v02r02

2.4 TEST FACILITY

Site	Site Dongguan Precise Testing Service Co., Ltd.		
Location Building D,Baoding Technology Park,Guangming Road2,Dongcheng District, Dongguan, Guangdong, China,			
FCC Registration No.	371540		
Description	The test site is constructed and calibrated to meet the FCC requirements in documents of ANSI/TIA-603-D-2010.		

2.5 MEASUREMENT INSTRUMENTS

Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Toot Possiver	Rohde &	ESCI	101117	July 3, 2016	July 2, 2017
EMI Test Receiver	Schwarz	ESCI	101417		
Trilog Broadband Antenna	SCHWARZBECK	VI II D0160	D69250	Mar 1, 2016	Feb 28, 2017
(25M-1GHz)	SCHWARZBECK	VOLD9100	D09230	IVIAI 1, 2010	Feb 26, 2017
Trilog Broadband					
Antenna(substituted antenna)	SCHWARZBECK	VULB9160	9160-3355	July 3, 2016	July 2, 2017
(25M-1GHz)					
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 3, 2016	July 2, 2017
RF Cable	SCHWARZBECK	AK9515E	96221	July 3, 2016	July 2, 2017
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 5, 2016	June 4, 2017
MULTI-DEVICE Positioning	Max-Full	MF-7802	MF780208339	N/A	N/A
Controller	IVIAX-FUII	IVIF-7002	IVIF 7 00200339	IN/A	IN/A
Active loop antenna	Schwarzbeck	FMZB1519	1519-038	June 5, 2016	June 4, 2017
(9K-30MHz)	Germanzbeek	TIVIZDIOIO	1010 000	ouric 5, 2010	Julie 4, 2017
Spectrum analyzer	Agilent	E4407B	MY46185649	June 5, 2016	June 4, 2017
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 10, 2016	July 9, 2017
Horn Antenna(substituted	ETS LINDGREN	3117	00034609	Mar 1, 2016	Feb 28, 2017
antenna) (1G-18GHz)	LISLINDGREN	3111	00034009	iviai 1, 2010	1 60 20, 2017

Report No.: AGC06426161101FE02 Page 9 of 115

Spectrum Analyzer	Agilent	E4411B	MY4511453	July 3, 2016	July 2, 2017
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 6, 2016	July 5, 2017
RF Cable	SCHWARZBECK	AK9515H	96220	July 7, 2016	July 6, 2017
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 5, 2016	June 4, 2017
Artificial Mains Network	Narda	L2-16B	000WX31025	July 7, 2016	July 6, 2017
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 7, 2016	July 6, 2017
RF Cable	SCHWARZBECK	AK9515E	96222	July 3, 2016	July 2, 2017
Shielded Room	CHENGYU	843	PTS-002	June 5, 2016	June 4, 2017
COMMUNICATION TESTER	AGILENT	8960	GB46490550	July 24,2016	July 23, 2017
RF attenuator	N/A	RFA20db	68	N/A	N/A
Signal Generator	AGILENT	N5182A	MY50140530	Oct 15,2016	Oct 14,2017
Signal Generator(substituted equipment)	AGILENT	E8257D	MY45141029	Oct 15,2016	Oct 14,2017

Page 10 of 115

2.6 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

2.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Page 11 of 115

3. SYSTEM TEST CONFIGURATION

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

3.3 GENERAL TECHNICAL REQUIREMENTS

Item Number	Item	FCC Rules	
4	Output Davier	Conducted output power	2.1046/22.913(a) (2) / 24.232
1	Output Power	Radiated output power	(c)
2	Peak-to-Average Ratio	Peak-to-Average Ratio	24.232(d)
3	Spurious Emission	Conducted spurious emission Radiated spurious emission	2.1051 / 22.917 / 24.238
4	Mains Conducted Emission		15.107 / 15.207
5	Frequency Stability	Frequency Stability	
6	Occupied Bandwidth		2.1049 (h)(i)
7	Emission Bandwidth		22.917(a)/24.238(a)
8	Band Edge		22.917(a)/24.238(a)

Page 12 of 115

3.4 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System



Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	Mobile Phone	Murah	FCC ID: 2AKD8MURAH	EUT
2	Adapter	Murah	DC5V /700mA	Accessory
3	Battery	Murah	DC3.7V/ 1500 mAh	Accessory
4	Earphone	Murah	N/A	Accessory
5	USB Cable	Murah	N/A	Accessory

^{***}Note: All the accessories have been used during the test. The following "EUT" in setup diagram means EUT system.

Page 13 of 115

4. SUMMARY OF TEST RESULTS

Item Number	Item Description		FCC Rules	Result	
		Conducted			
4	Output Dower	Output Power	2.1046/22.913(a) (2) /	Pass	
1	Output Power	Radiated	24.232 (c)	Pass	
		Output Power			
2	Peak-to-Average	Peak-to-Average	24 222(d)	Pass	
2	Ratio	Ratio	24.232(d)	rass	
	Spurious Emission	Conducted			
3		Spurious Emission	2.1051 / 22.917 / 24.238	Pass	
3		Radiated	2.1051/22.91//24.230	Fd55	
		Spurious Emission			
4	Mains Conducted Em	ission	15.107 / 15.207	Pass	
5	Fraguanay Stability		2.1055/22.355	Pass	
5	Frequency Stability		/24.235	Pass	
6	Occupied Bandwidth		2.1049 (h)(i)	Pass	
7	Emission Bandwidth		22.917(a)/24.238(a)	Pass	
8	Band Edge		22.917(a)/24.238(a)	Pass	

5. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GSM and PCS frequency band.

- ***Note: 1.GSM/GPRS 850, GSM/GPRS 1900, WCDMA/HSPA band II, WCDMA/HSPA band V, mode have been tested during the test.
 - 2. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions
 - 3. All antenna port conducted emissions testing was performed on a test bench with the antenna Port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

Report No.: AGC06426161101FE02 Page 14 of 115

6. OUTPUT POWER

6.1 CONDUCTED OUTPUT POWER

6.1.1 MEASUREMENT METHOD

The transmitter output port was connected to base station.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Measure the maximum burst average power and average power for other modulation signal.

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes (GSM/GPRS850, GSM/GPRS1900, WCDMA/HSPA band II, WCDMA/HSPA band V) at 3 typical channels (the Top Channel, the Middle Channel and the Bottom Channel) for each band.

6.1.2 MEASUREMENT RESULT

Conducted Output Power Limits for GSM850/EDGE band							
Mode	Nominal Peak Power	Tolerance(dB)					
GSM	33 dBm (2W)	- 2					
	Conducted Output Power Limits for PCS1900/EDGE band						
Mode	Nominal Peak Power	Tolerance(dB)					
GSM	30 dBm (1W)	- 2					
	Conducted Output Power Limits for UMTS	band II					
Mode	Nominal Peak Power	Tolerance(dB)					
WCDMA	24 dBm (0.25W)	- 2					
	Conducted Output Power Limits for UMTS band V						
Mode	Nominal Peak Power	Tolerance(dB)					
WCDMA	24 dBm (0.25W)	- 2					

Report No.: AGC06426161101FE02 Page 15 of 115

GSM 850:

Mada	Frequency	Reference	Peak	Tolerance	Avg.Burst	Duty cycle	Frame
Mode	(MHz)	Power	Power		Power	Factor(dB)	Power(dBm)
	824.2	33	32.19	-0.81	31.28	-9	22.28
GSM850	836.6	33	31.93	-1.07	31.17	-9	22.17
	848.8	33	32.07	-0.93	31.15	-9	22.15
CDDC050	824.2	33	31.43	-1.57	30.55	-9	21.55
GPRS850 (1 Slot)	836.6	33	31.26	-1.74	30.26	-9	21.26
(1 3101)	848.8	33	31.18	-1.82	30.18	-9	21.18
CDDC050	824.2	30	29.27	-0.73	28.66	-6	22.66
GPRS850 (2 Slot)	836.6	30	29.53	-0.47	28.37	-6	22.37
(2 3101)	848.8	30	29.19	-0.81	28.25	-6	22.25
CDDC050	824.2	28.23	27.67	-0.56	26.33	-4.26	22.07
GPRS850	836.6	28.23	27.52	-0.71	26.16	-4.26	21.9
(3 Slot)	848.8	28.23	27.41	-0.82	26.22	-4.26	21.96
CDDC050	824.2	27	26.56	-0.44	25.43	-3	22.43
GPRS850	836.6	27	26.74	-0.26	25.17	-3	22.17
(4 Slot)	848.8	27	26.25	-0.75	25.62	-3	22.62

Report No.: AGC06426161101FE02 Page 16 of 115

PCS 1900:

Mode	Frequency (MHz)	Reference Power	Peak Power	Tolerance	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
	1850.2	30	29.14	-0.86	28.72	-9	19.72
GSM1900	1880	30	29.05	-0.95	28.55	-9	19.55
	1909.8	30	29.08	-0.92	28.61	-9	19.61
CDDC1000	1850.2	30	28.27	-1.73	27.42	-9	18.42
GPRS1900	1880	30	28.38	-1.62	27.29	-9	18.29
(1 Slot)	1909.8	30	28.33	-1.67	27.31	-9	18.31
CDDC1000	1850.2	27	26.29	-0.71	25.35	-6	19.35
GPRS1900	1880	27	26.11	-0.89	25.43	-6	19.43
(2 Slot)	1909.8	27	26.27	-0.73	25.26	-6	19.26
CDDC1000	1850.2	25.23	24.38	-0.85	23.45	-4.26	19.19
GPRS1900	1880	25.23	24.65	-0.58	23.32	-4.26	19.06
(3 Slot)	1909.8	25.23	24.27	-0.96	23.16	-4.26	18.9
CDDC1000	1850.2	24	23.39	-0.61	22.21	-3	19.21
GPRS1900	1880	24	23.56	-0.44	22.53	-3	19.53
(4 Slot)	1909.8	24	23.17	-0.83	22.13	-3	19.13

Report No.: AGC06426161101FE02 Page 17 of 115

UMTS BAND II

Mode	Frequency (MHz)	Reference power	Peak Power	Tolerance	Avg.Burst Power
	1852.6	24	22.59	-1.41	21.78
WCDMA 1900 RMC	1880	24	22.48	-1.52	21.63
	1907.4	24	22.47	-1.53	21.69
	1852.6	24	22.31	-1.69	21.22
WCDMA 1900 AMR	1880	24	22.16	-1.84	21.21
7	1907.4	24	22.19	-1.81	21.29
	1852.6	24	22.05	-1.95	20.21
HSDPA Subtest 1	1880	24	22.13	-1.87	20.15
	1907.4	24	22.23	-1.77	20.16
	1852.6	24	22.08	-1.92	20.32
HSDPA Subtest 2	1880	24	22.21	-1.79	20.27
Gustoot 2	1907.4	24	22.06	-1.94	20.22
	1852.6	24	21.92	-2.08	20.21
HSDPA Subtest 3	1880	24	22.05	-1.95	20.28
Castoot o	1907.4	24	21.97	-2.03	20.15
	1852.6	24	22.28	-1.72	20.27
HSDPA Subtest 4	1880	24	22.29	-1.71	20.08
Gubicst 4	1907.4	24	22.26	-1.74	20.18
	1852.6	24	21.82	-2.18	20.43
HSUPA Subtest 1	1880	24	21.88	-2.12	20.15
Cubicst	1907.4	24	22.08	-1.92	20.31
	1852.6	24	22.11	-1.89	20.22
HSUPA Subtest 2	1880	24	22.16	-1.84	20.23
Gubicst 2	1907.4	24	22.21	-1.79	20.21
	1852.6	24	21.95	-2.05	20.32
HSUPA Subtest 3	1880	24	21.74	-2.26	20.26
	1907.4	24	21.56	-2.44	20.22
	1852.6	24	21.76	-2.24	20.31
HSUPA Subtest 4	1880	24	21.45	-2.55	20.67
	1907.4	24	21.43	-2.57	20.29
HSUPA	1852.6	24	21.26	-2.74	20.31
Subtest 5	1880	24	21.66	-2.34	20.22

Report No.: AGC06426161101FE02 Page 18 of 115

1907.4	24	21 54	-2.46	20.13
1907.4	2 4	21.54	-2.40	20.13

Report No.: AGC06426161101FE02 Page 19 of 115

UMTS BAND V

Mode	Frequency (MHz)	Reference power	Peak Power	Tolerance	Avg.Burst Power
	826.6	24	23.11	-0.89	22.23
WCDMA 850 RMC	836.4	24	23.02	-0.98	22.16
TUVO	846.4	24	23.05	-0.95	22.09
	826.6	24	23.06	-0.94	21.53
WCDMA 850 AMR	836.4	24	23.04	-0.96	21.41
7 11 11 1	846.4	24	23.01	-0.99	21.26
	826.6	24	22.43	-1.57	20.37
HSDPA Subtest 1	836.4	24	22.28	-1.72	20.45
Oublest 1	846.4	24	22.64	-1.36	20.15
	826.6	24	22.53	-1.47	20.28
HSDPA Subtest 2	836.4	24	22.17	-1.83	20.13
Oubtoot 2	846.4	24	22.28	-1.72	20.26
	826.6	24	22.31	-1.69	20.32
HSDPA Subtest 3	836.4	24	22.28	-1.72	20.28
Oublest 5	846.4	24	22.16	-1.84	20.25
	826.6	24	22.33	-1.67	20.65
HSDPA Subtest 4	836.4	24	22.29	-1.71	20.16
Oublest 4	846.4	24	22.43	-1.57	20.13
	826.6	24	22.61	-1.39	20.18
HSUPA Subtest 1	836.4	24	22.57	-1.43	20.29
Oublest 1	846.4	24	22.06	-1.94	20.24
	826.6	24	22.12	-1.88	20.23
HSUPA Subtest 2	836.4	24	22.38	-1.62	20.21
Oublest 2	846.4	24	22.43	-1.57	20.29
	826.6	24	22.58	-1.42	20.09
HSUPA Subtest 3	836.4	24	22.52	-1.48	20.15
	846.4	24	22.49	-1.51	20.16
	826.6	24	22.42	-1.58	20.34
HSUPA Subtest 4	836.4	24	22.41	-1.59	20.37
Jubical 4	846.4	24	22.43	-1.57	20.26
HSUPA	826.6	24	22.47	-1.53	20.32
Subtest 5	836.4	24	22.46	-1.54	20.19

Report No.: AGC06426161101FE02 Page 20 of 115

846.4	24	22.49	-1.51	20.25
-------	----	-------	-------	-------

Report No.: AGC06426161101FE02 Page 21 of 115

According to 3GPP 25.101 sub-clause 6.2.2 , the maximum output power is allowed to be reduced by following the table.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)			
For all combinations of ,DPDCH,DPCCH	0< CM<2 5	MAX(CM-1,0)			
HS-DPDCH,E-DPDCH and E-DPCCH	0≤ CM≤3.5				
Note: CM=1 for β $_{\rm c}/\beta$ $_{\rm d}$ =12/15, β $_{\rm hs}/\beta$ $_{\rm c}$ =24/15. For all other combinations of DPDCH, DPCCH,					

Note: CM=1 for β_c/β_d =12/15, β_{hs}/β_c =24/15.For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Report No.: AGC06426161101FE02 Page 22 of 115

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done. However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

Page 23 of 115

6.2 RADIATED OUTPUT POWER

6.2.1 MEASUREMENT METHOD

The measurements procedures specified in ANSI/TIA-603-D-2010 were applied.

- 1. Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signal operating below 1GHz are performed using dipole antennas. Measurements on signals operating above 1GHz are performed using broadband horn antennas. All measurements are performed as RMS average measurements while the EUT operating at its maximum duty cycle, at maximum power, and at the approximate frequencies.
- 2. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
- 3. The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as ARpl=Pin + 2.15 Pr. The ARpl is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: Power=PMea+ARpl
- 4. The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 5. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 6. The EUT is then put into continuously transmitting mode at its maximum power level.
- 7. Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.
- 8. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (Pin).
- 9. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi...

6.2.2 PROVISIONS APPLICABLE

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

Report No.: AGC06426161101FE02 Page 24 of 115

Mode	Nominal Peak Power
GSM 850	<=38.45 dBm (7W)
PCS 1900	<=33 dBm (2W)
UMTS BAND II	<=33 dBm (2W)
UMTS BANDV	<=38.45 dBm (7W)

Report No.: AGC06426161101FE02 Page 25 of 115

6.2.3 MEASUREMENT RESULT

Radiated Power (ERP) for GSM 850					
		Re	sult		
Mode	Frequency	Max. Peak ERP	Polarization	Conclusion	
		(dBm)	Of Max. ERP		
	824.2	30.89	Horizontal	Pass	
	836.6	30.67	Horizontal	Pass	
GSM850	848.8	30.82	Horizontal	Pass	
GSIVIOOU	824.2	29.45	Vertical	Pass	
	836.6	28.72	Vertical	Pass	
	848.8	28.81	Vertical	Pass	

Radiated Power (E.I.R.P) for PCS 1900						
		Result				
Mode	Frequency	Max. Peak	Max. Peak Polarization	Conclusion		
		E.I.R.P.(dBm)	Of Max. E.I.R.P.			
GSM 1900	1850.2	27.22	Horizontal	Pass		
	1880.0	27.43	Horizontal	Pass		
	1909.8	27.26	Horizontal	Pass		
	1850.2	26.75	Vertical	Pass		
	1880.0	26.68	Vertical	Pass		
	1909.8	25.51	Vertical	Pass		

Radiated Power (E.I.R.P) for UMTS band II							
		Result					
Mode	Frequency	Max. Peak E.I.R.P	Polarization				
		(dBm)	Of Max. E.I.R.P				
	1852.6	22.05	Horizontal	Pass			
	1880	21.43	Horizontal	Pass			
RMC	1907.4	21.19	Horizontal	Pass			
12.2kbps	1852.6	21.27	Vertical	Pass			
	1880	20.53	Vertical	Pass			
	1907.4	21.68	Vertical	Pass			

Radiated Power (ERP) for UMTS band V						
		R				
Mode	Frequency	Max. Peak ERP	Polarization	Conclusion		
		(dBm)	Of Max. E.I.R.P.			
	826.6	22.33	Horizontal	Pass		
	836.4	21.36	Horizontal	Pass		
RMC	846.4	21.52	Horizontal	Pass		
12.2kbps	826.6	20.63	Vertical	Pass		
	836.4	20.97	Vertical	Pass		
	846.4	21.21	Vertical	Pass		

Note: Above is the worst mode data.

Page 27 of 115

6.3. PEAK-TO-AVERAGE RATIO

6.3.1 MEASUREMENT METHOD

Use one of the procedures presented in 4.1 to measure the total peak power and record as PPk. Use one of the applicable procedures presented 4.2 to measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

PAPR (dB) = PPk (dBm) - PAvg (dBm).

6.3.2 PROVISIONS APPLICABLE

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

6.3.3 MEASUREMENT RESULT

Modes	GSM850(GSM)			
Channel	128	190	251	
Gilainiei	(Low)	(Mid)	(High)	
Frequency	824.2	836.6	848.8	
(MHz)	024.2	030.0	040.0	
Peak-To-Average Ratio (dB)/GSM	0.91	0.76	0.92	

Modes	PCS 1900 (GSM)		
Channel	512	661	810
Gilailici	(Low)	(Mid)	(High)
Frequency	1850.2	1880	1909.8
(MHz)	1030.2	1000	1909.0
Peak-To-Average Ratio (dB)/GSM	0.42	0.5	0.47

Report No.: AGC06426161101FE02 Page 28 of 115

Modes	UMTS BAND II		
Channel	9663	9800	9937
Gildillio	(Low)	(Mid)	(High)
Frequency	1852.6	1880	1907.4
(MHz)			
Peak-To-Average Ratio (dB)	0.81	0.85	0.78

Modes	UMTS BAND V		
Channel	4358	4407	4457
onamo:	(Low)	(Mid)	(High)
Frequency	826.6	836.6	846.4
(MHz)			070.4
Peak-To-Average Ratio (dB)	0.88	0.86	0.96

Page 29 of 115

7. OCCUPIED BANDWIDTH

7.1 TEST OVERVIEW

1. The Occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper Frequency limits, the mean power radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

2. RBW=1~5% of the expected OBW, VBW>=3 x RBW, Detector=Peak, Trace mode=max hold, Sweep=auto couple, and the trace was allowed to stabilize.

7.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

Report No.: AGC06426161101FE02 Page 30 of 115

7.3 MEASUREMENT RESULT

APPENDIX A:BANDWIDTH

Test Results

Test	Test	Test	Occupied Bandwidth	Emission Bandwidth	Vardiet
Band	Mode	Channel	(MHZ)	(MHZ)	Verdict
		LCH	0.245	0.319	PASS
GSM850	GSM	MCH	0.249	0.322	PASS
		HCH	0.245	0.322	PASS

Test Band	Test Mode	Test Channel	Occupied Bandwidth (MHZ)	Emission Bandwidth (MHZ)	Verdict
GSM1900	GSM	LCH	0.251	0.316	PASS
		MCH	0.243	0.316	PASS
		HCH	0.243	0.319	PASS

Report No.: AGC06426161101FE02 Page 31 of 115

For GSM

Test Band=GSM850


Test Mode=GSM

Test Channel=LCH




Report No.: AGC06426161101FE02 Page 32 of 115

Test Channel=MCH

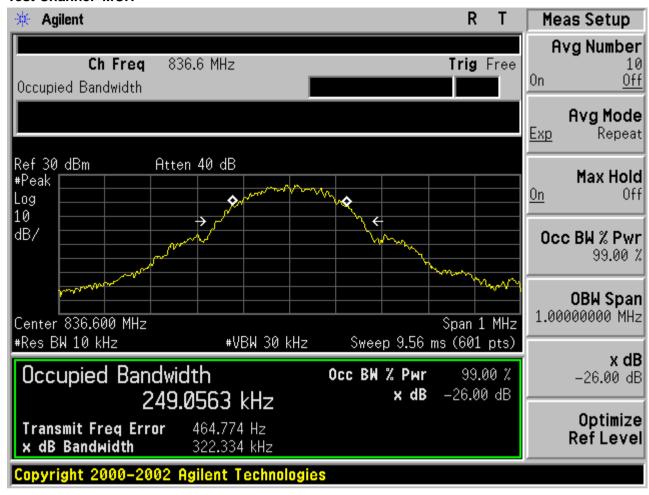

Report No.: AGC06426161101FE02 Page 33 of 115


Test Channel=HCH

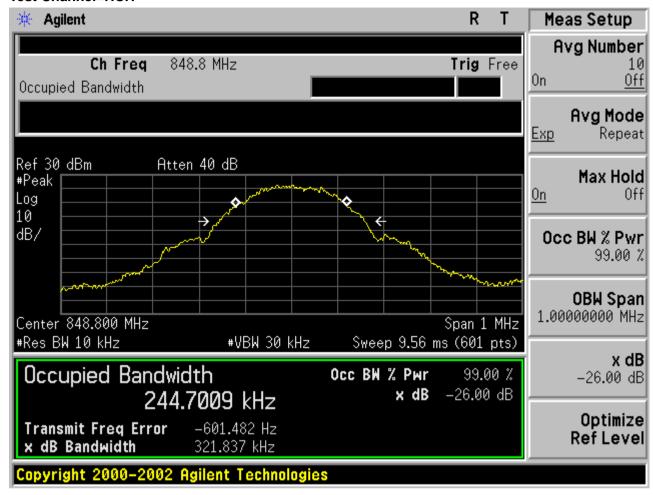

Report No.: AGC06426161101FE02 Page 34 of 115


Test Band=GSM1900

Test Mode=GSM

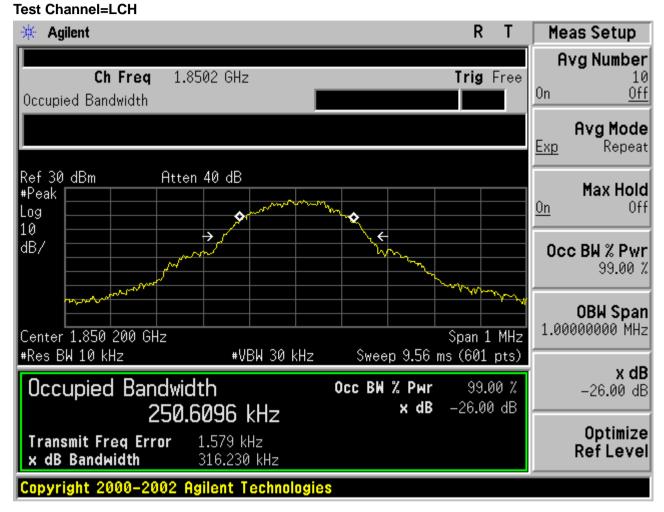


Report No.: AGC06426161101FE02 Page 35 of 115

Test Channel=MCH

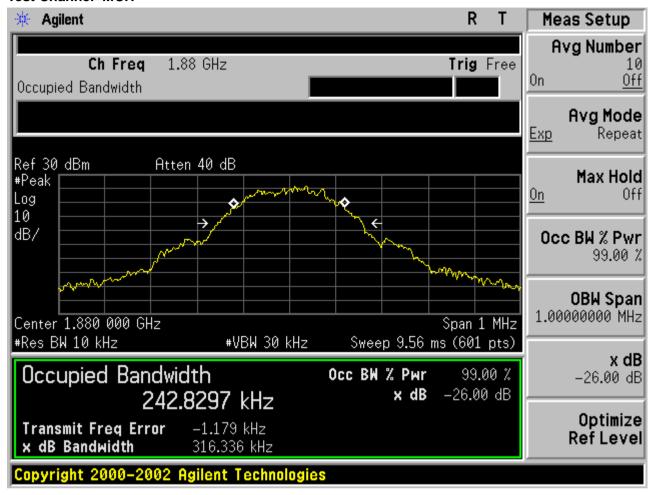

Report No.: AGC06426161101FE02 Page 36 of 115

Test Channel=HCH

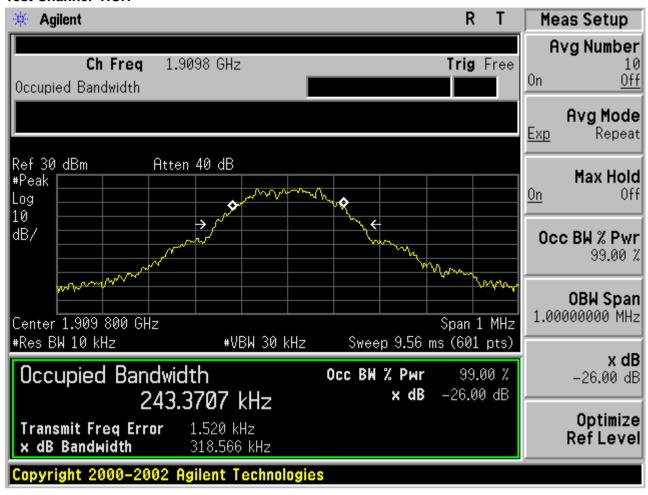

Report No.: AGC06426161101FE02 Page 37 of 115

Test Band	Test	Test	Occupied Bandwidth	Emission Bandwidth	Verdi
	Mode	Channel	(MHZ)	(MHZ)	ct
WCDMA8 50	UMTS	LCH	4.095	4.673	PASS
		MCH	4.135	4.728	PASS
		HCH	4.106	4.680	PASS


Test Band	Test	Test	Occupied Bandwidth	Emission Bandwidth	Verdi
	Mode	Channel	(MHZ)	(MHZ)	ct
WCDMA1 900	UMTS	LCH	4.105	4.666	PASS
		MCH	4.088	4.660	PASS
		HCH	4.105	4.694	PASS

Report No.: AGC06426161101FE02 Page 38 of 115


For WCDMA

Test Band=WCDMA850


Test Mode=UMTS

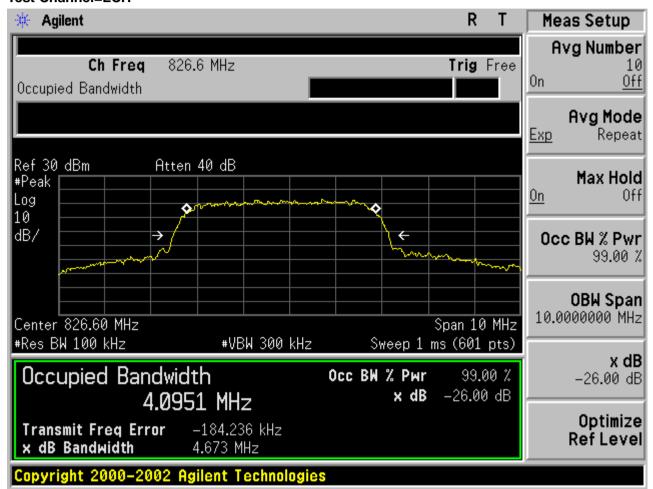

Report No.: AGC06426161101FE02 Page 39 of 115

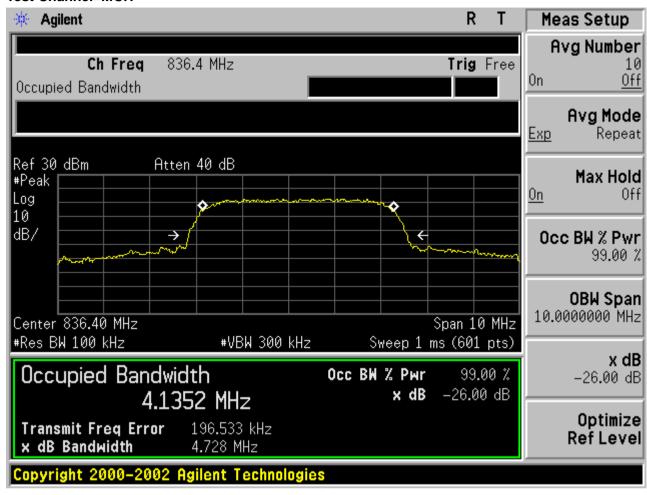


Report No.: AGC06426161101FE02 Page 40 of 115

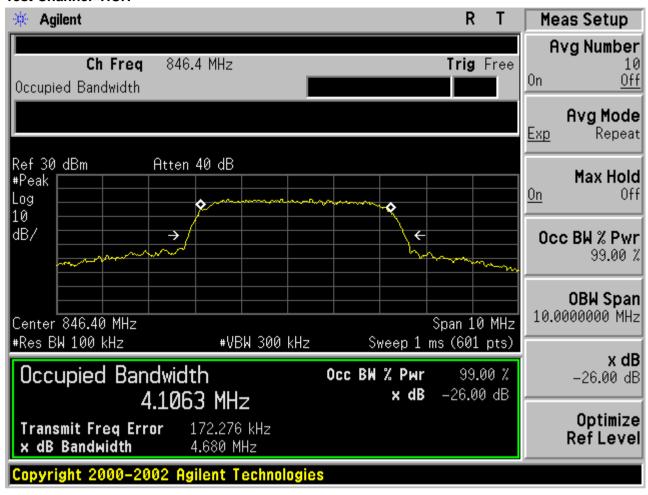


Report No.: AGC06426161101FE02 Page 41 of 115

Test Band=WCDMA1900


Test Mode=UMTS

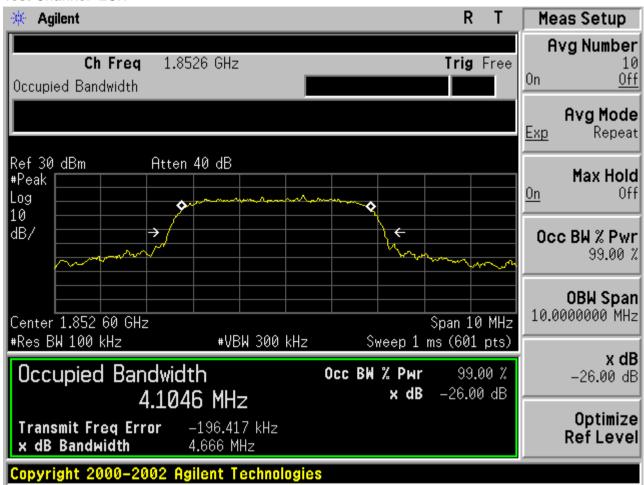

Report No.: AGC06426161101FE02 Page 42 of 115

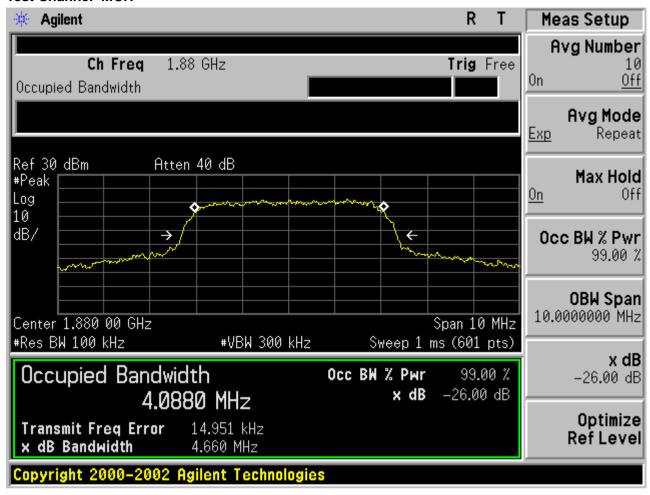

Report No.: AGC06426161101FE02 Page 43 of 115

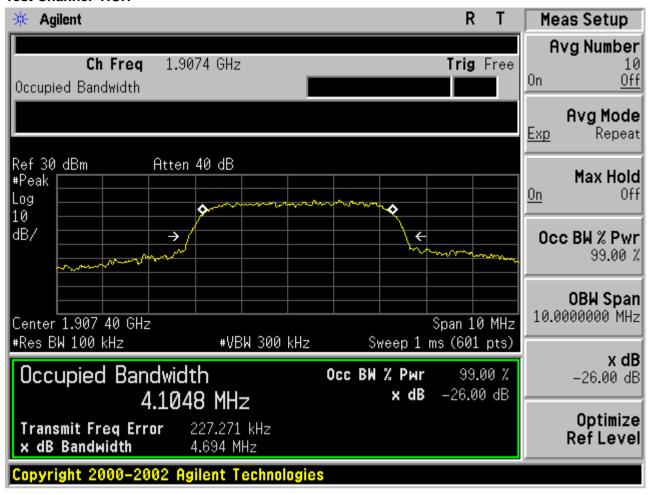

Page 44 of 115

8. BAND EDGE

8.1 MEASUREMENT METHOD

1. All out of band emissions are measured with an analyzer spectrum connected to the antenna terminal of the EUT while the EUT at its maximum duty cycle, at maximum power, and at the approximate frequencies. All data rates were investigated to determine the worst case configuration

- 2. The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.
- 3. Start and stop frequency were set such that the band edge would be placed in the center of the plot.
- 4. Span was set large enough so as to capture all out of band emissions near the band edge.
- 5. RBW>1% of the emission bandwidth, VBW >=3 x RBW, Detector=RMS, Number of points>=2 x Span/RBW, Trace mode=max hold, Sweep time=auto couple, and the trace was allowed to stabilize

8.2 PROVISIONS APPLICABLE

As Specified in FCC rules of 22.917(a) and 24.238(a) and KDB 971168 V02r02

Report No.: AGC06426161101FE02 Page 45 of 115

8.3 MEASUREMENT RESULT


APPENDIX B: BAND EDGES COMPLIANCE

Test Results


For GSM

Test Band=GSM850

Test Mode=GSM

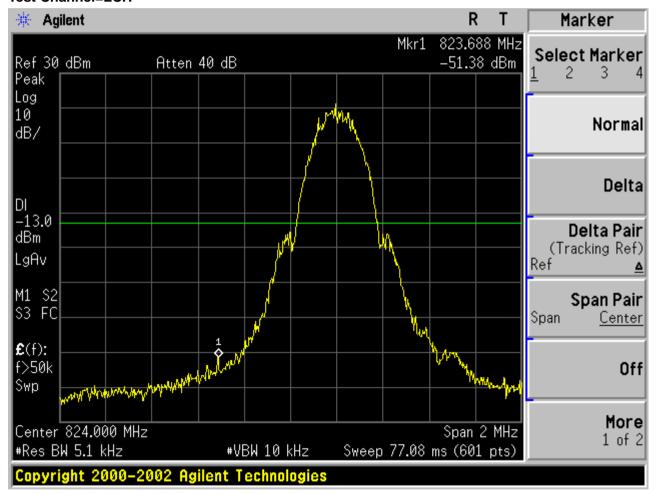


Report No.: AGC06426161101FE02 Page 46 of 115

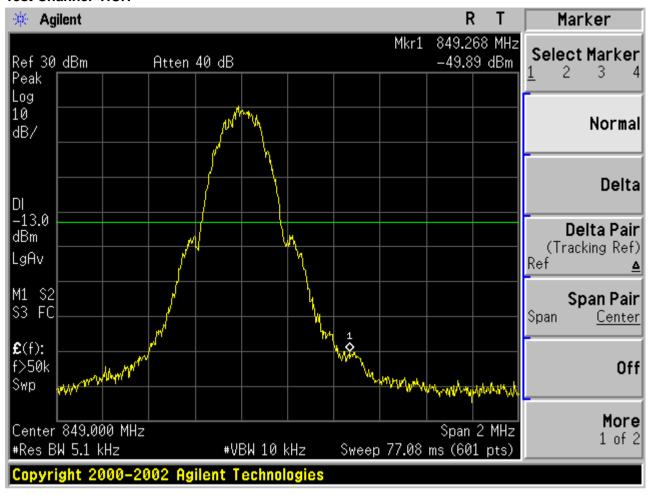


Report No.: AGC06426161101FE02 Page 47 of 115

Test Band=GSM1900

Test Mode=GSM
Test Channel=LCH

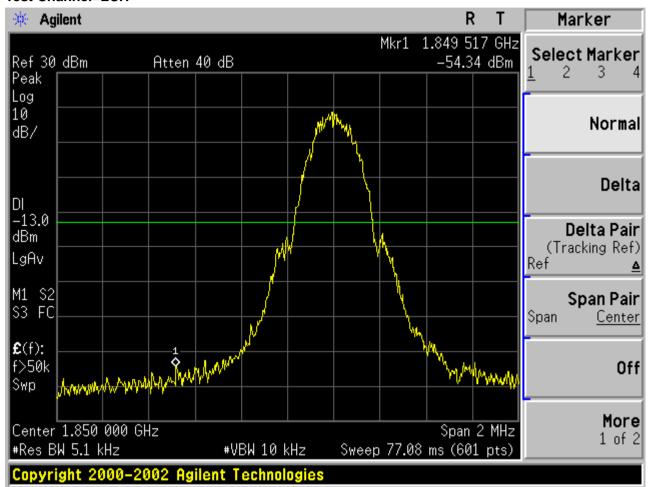

Report No.: AGC06426161101FE02 Page 48 of 115

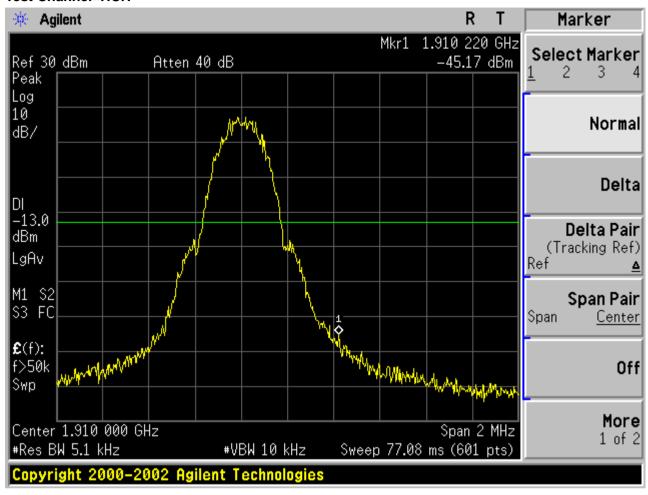


Report No.: AGC06426161101FE02 Page 49 of 115

For WCDMA

Test Band=WCDMA850

Test Mode=UMTS

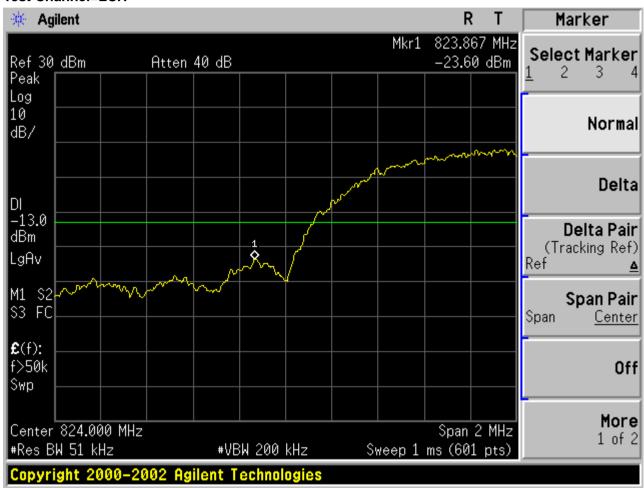

Report No.: AGC06426161101FE02 Page 50 of 115




Report No.: AGC06426161101FE02 Page 51 of 115

Test Band=WCDMA1900

Test Mode=UMTS
Test Channel=LCH



Report No.: AGC06426161101FE02 Page 52 of 115

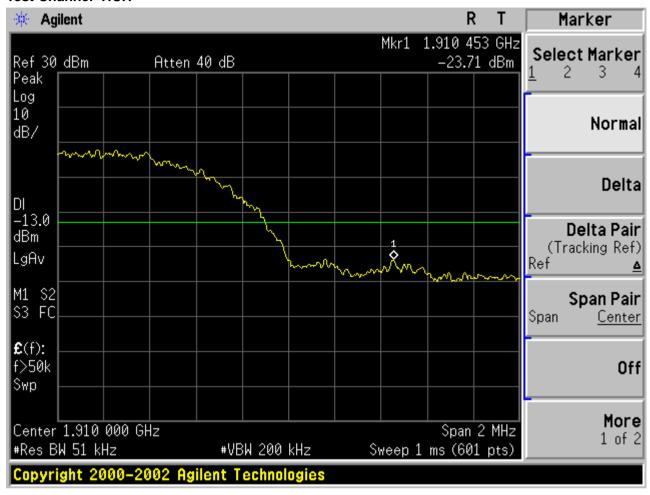

Report No.: AGC06426161101FE02 Page 53 of 115

9. SPURIOUS EMISSION

9.1 CONDUCTED SPURIOUS EMISSION

9.1.1 MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.

- 1. The level of the carrier and the various conducted spurious and harmonic frequency is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the approximate frequencies. All data rates were investigated to determine the worst case configuration.
- 2. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM 850, data taken from 30 MHz to 9 GHz.
- 3. Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

Typical Channels for testing of GSM 850		
Channel	Frequency (MHz)	
128	824.2	
190	836.6	
251	848.8	

Typical Channels for testing of PCS 1900		
Channel	Frequency (MHz)	
512	1850.2	
661	1880.0	
810	1909.8	

Typical Channels for testing of UMTS band II		
Channel	Frequency (MHz)	
9663	1852.6	
9800	1880	
9937	1907.4	

Page 54 of 115

Typical Channels for testing of UMTS band V		
Channel	Frequency (MHz)	
4358	826.6	
4407	836.4	
4457	846.4	

9.1.2 PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.


9.1.3 MEASUREMENT RESULT

APPENDIX C: SPURIOUS EMISSION AT ANTENNA TERMINAL


Test Results

Test Band=GSM850


Test Mode=GSM

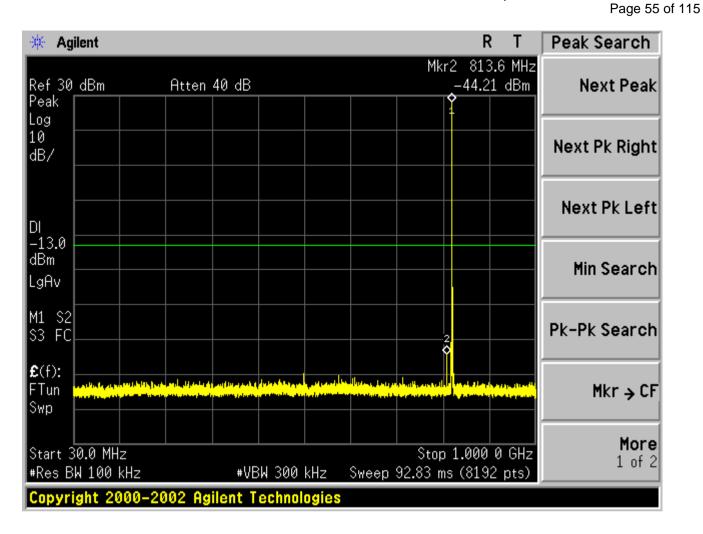


Report No.: AGC06426161101FE02 Page 56 of 115

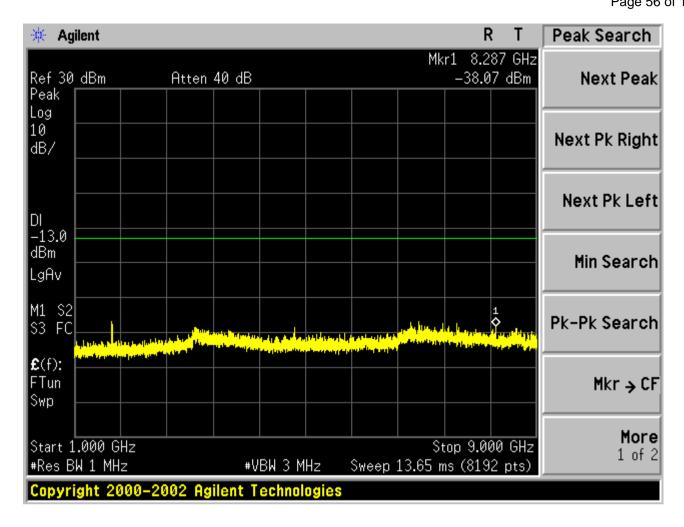



Report No.: AGC06426161101FE02 Page 57 of 115

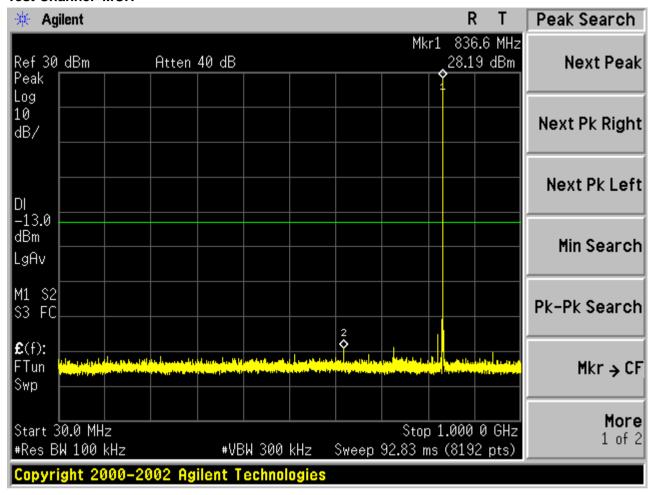

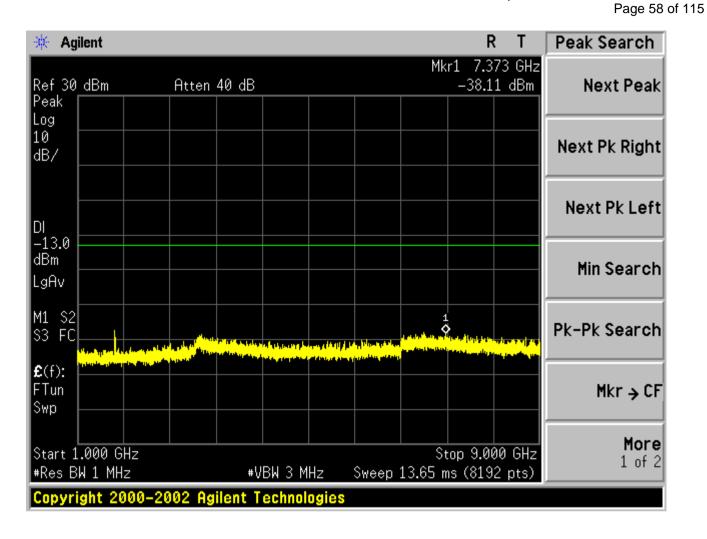

Report No.: AGC06426161101FE02 Page 59 of 115

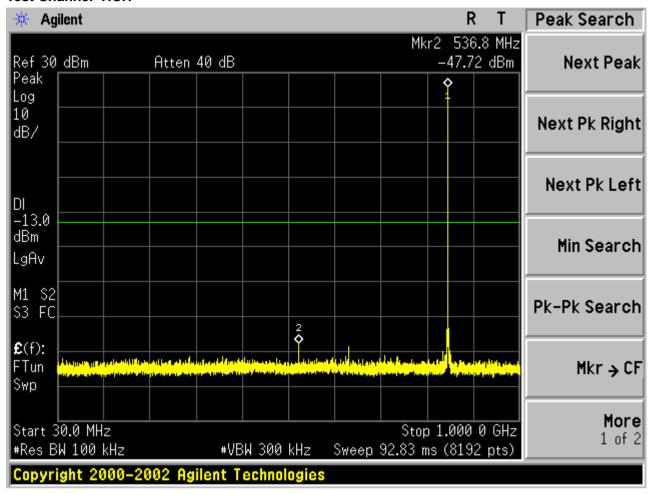


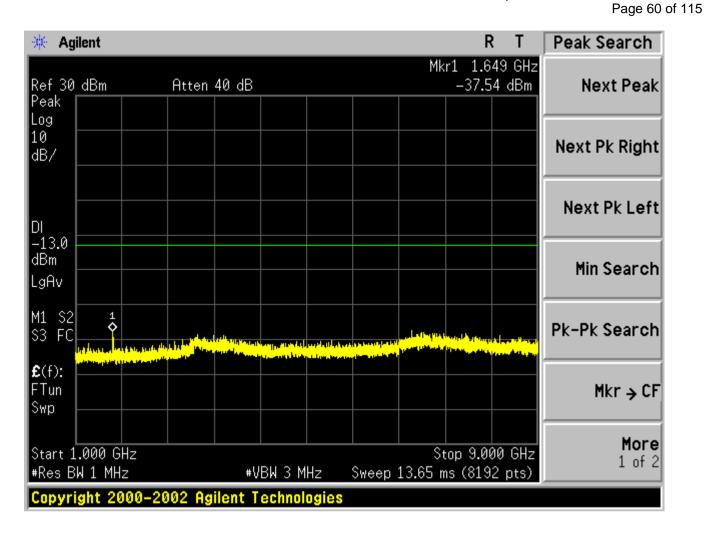



Report No.: AGC06426161101FE02 Page 61 of 115


Test Band=GSM1900

Test Mode=GSM
Test Channel=LCH

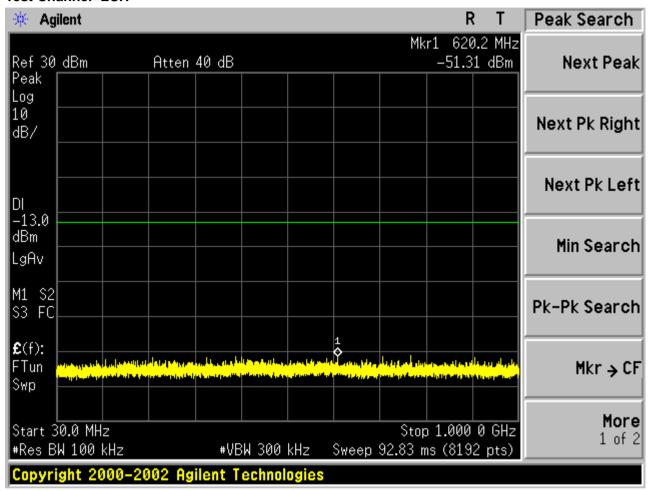


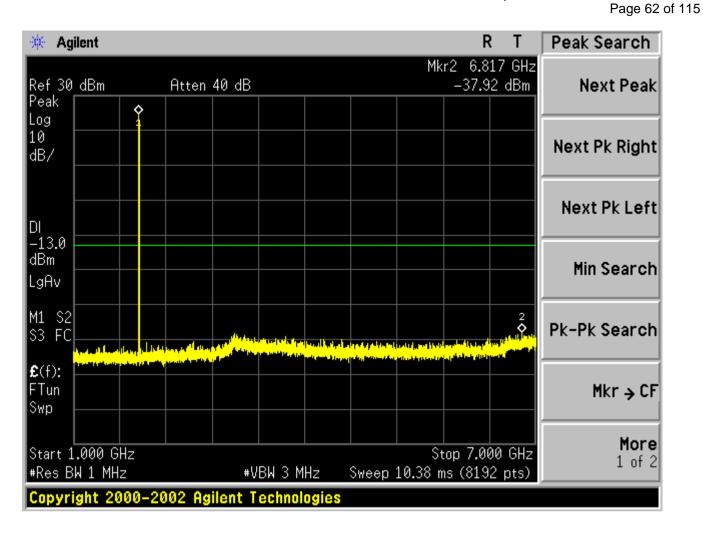

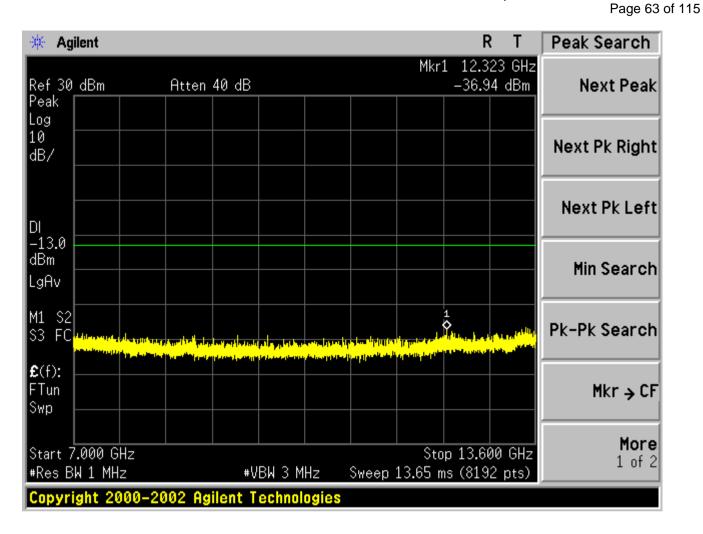


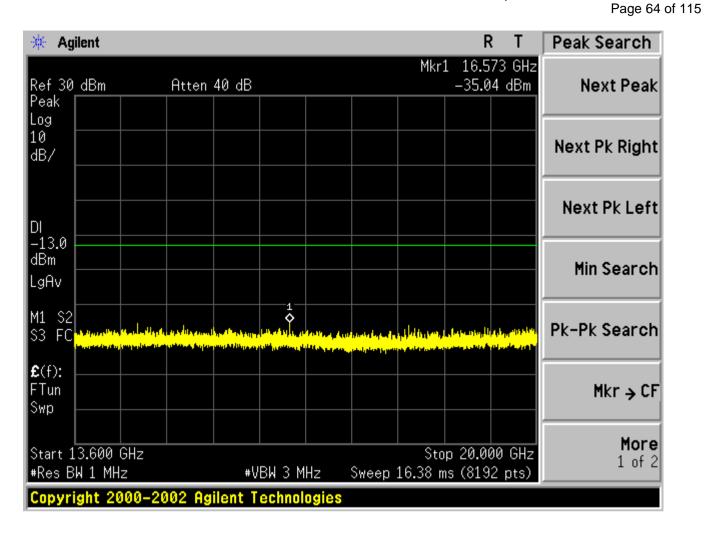



Report No.: AGC06426161101FE02 Page 65 of 115

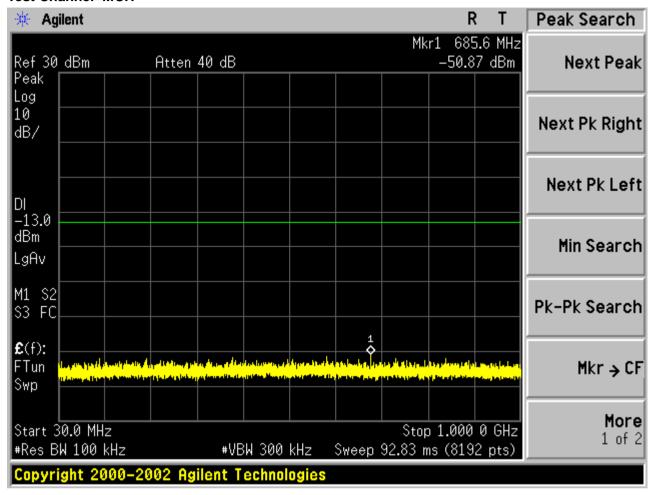


Report No.: AGC06426161101FE02 Page 66 of 115

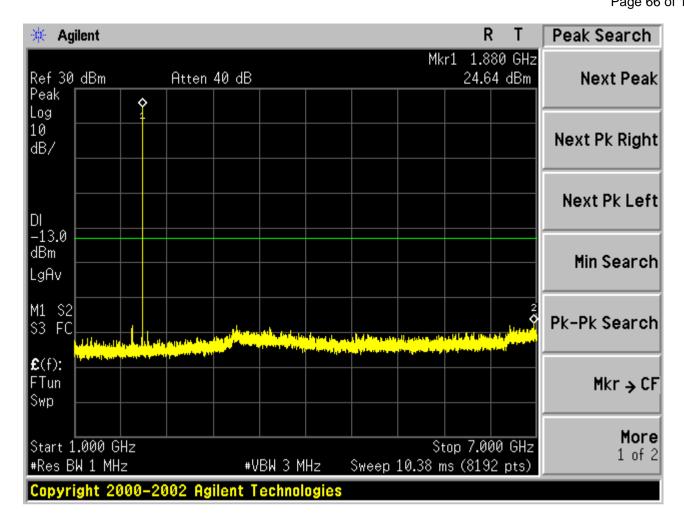

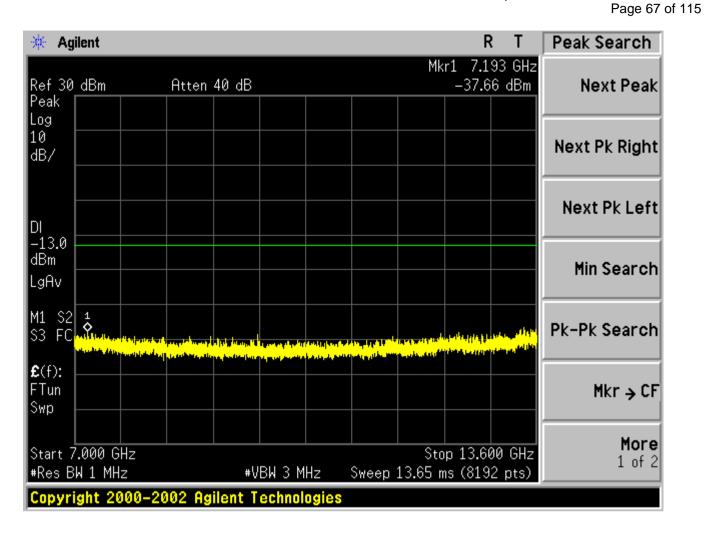


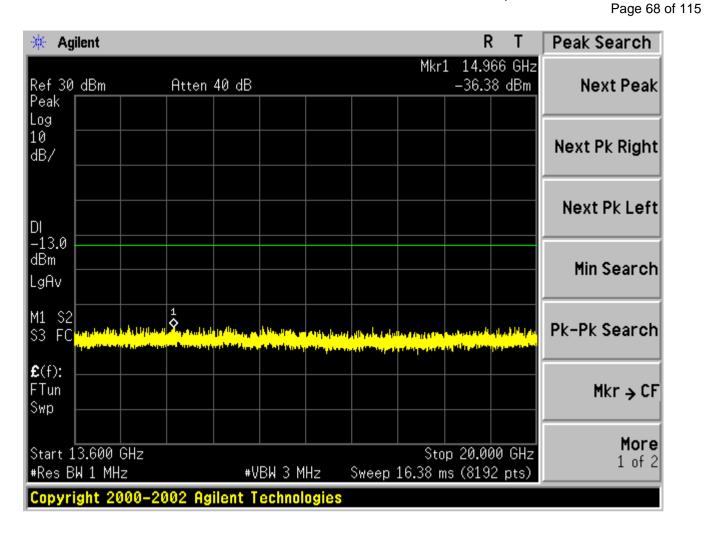



Report No.: AGC06426161101FE02 Page 69 of 115

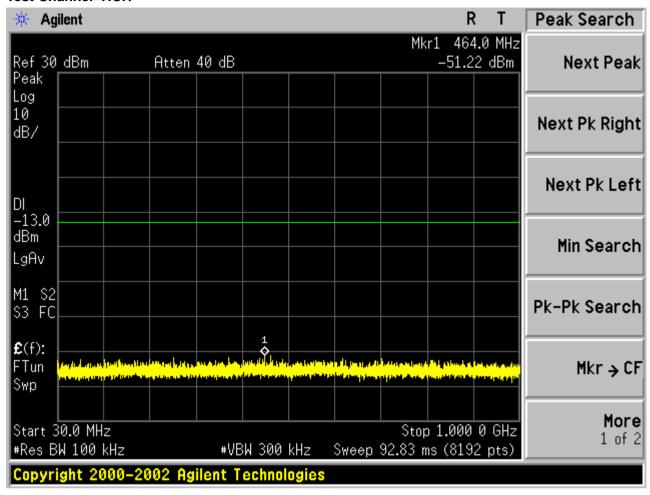

Report No.: AGC06426161101FE02 Page 70 of 115

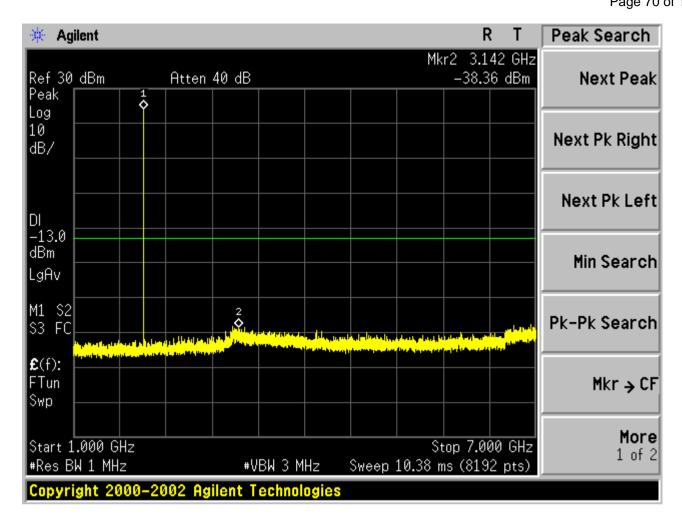

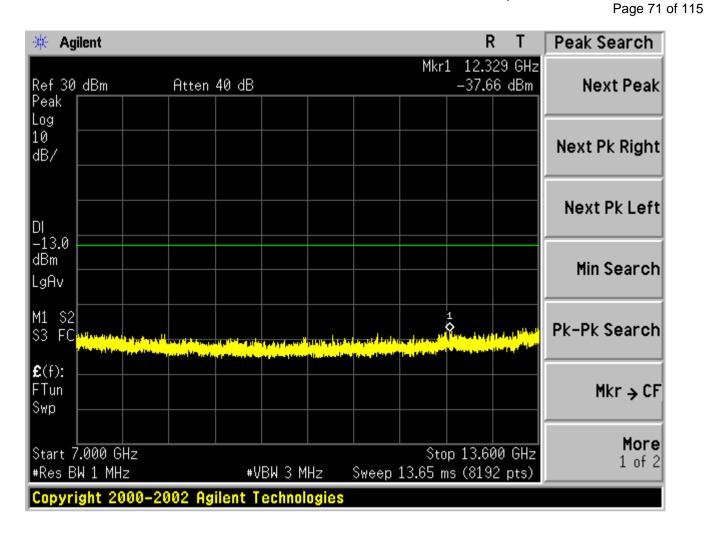


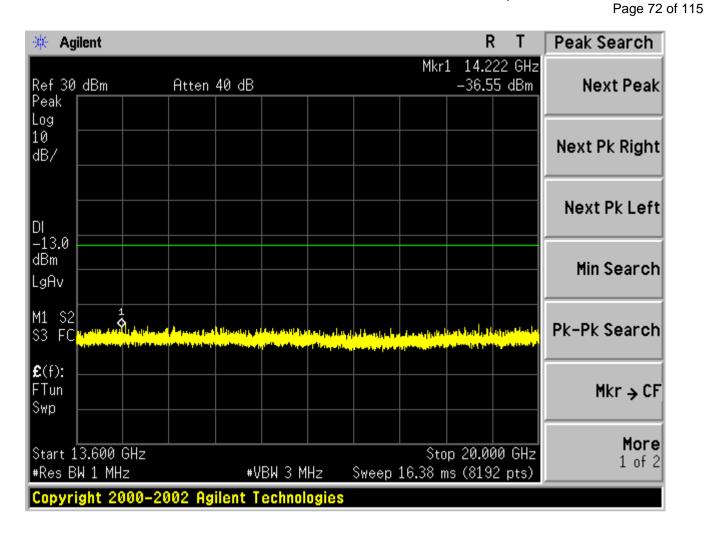


Report No.: AGC06426161101FE02 Page 73 of 115

Test Band=WCDMA850

Test Mode=UMTS Test Channel=LCH

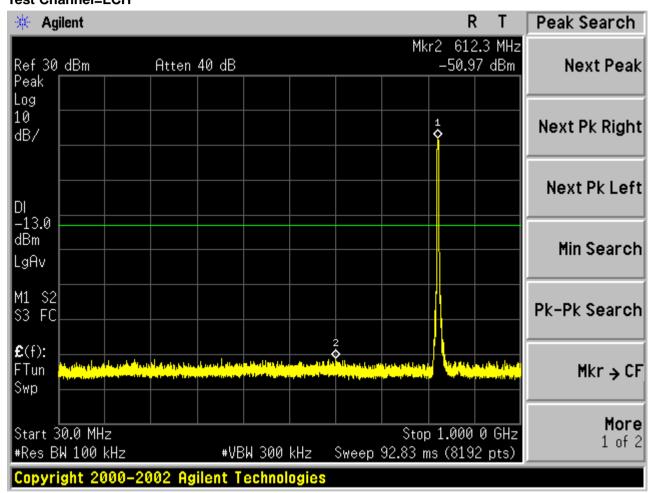



Report No.: AGC06426161101FE02 Page 74 of 115

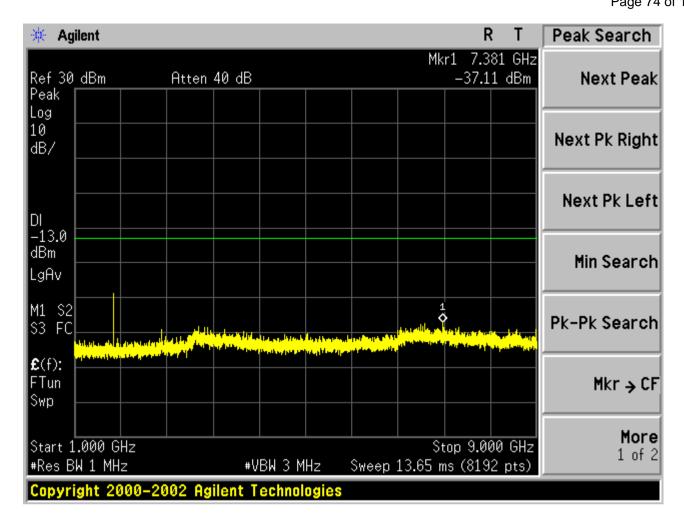

Report No.: AGC06426161101FE02 Page 75 of 115


Test Channel=MCH

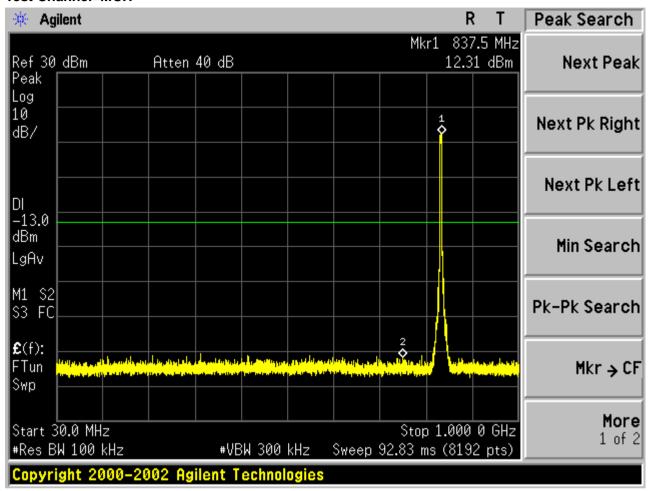


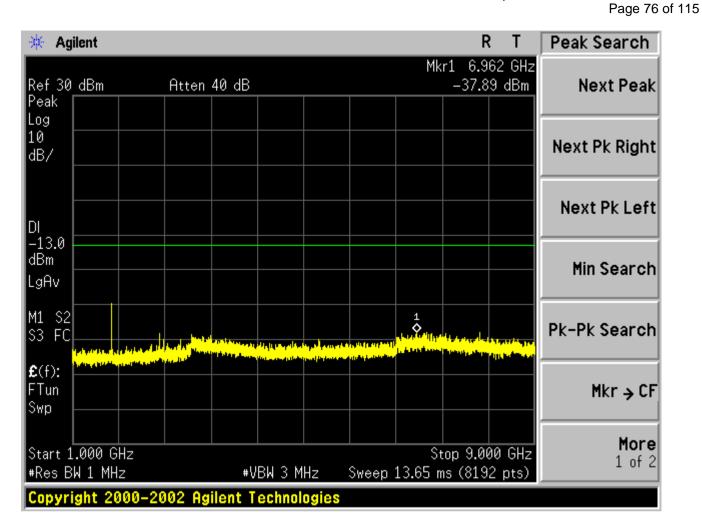

Report No.: AGC06426161101FE02 Page 77 of 115

Test Channel=HCH

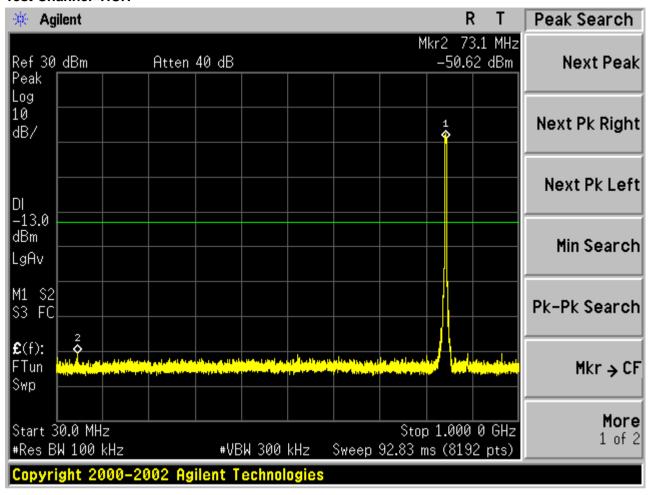


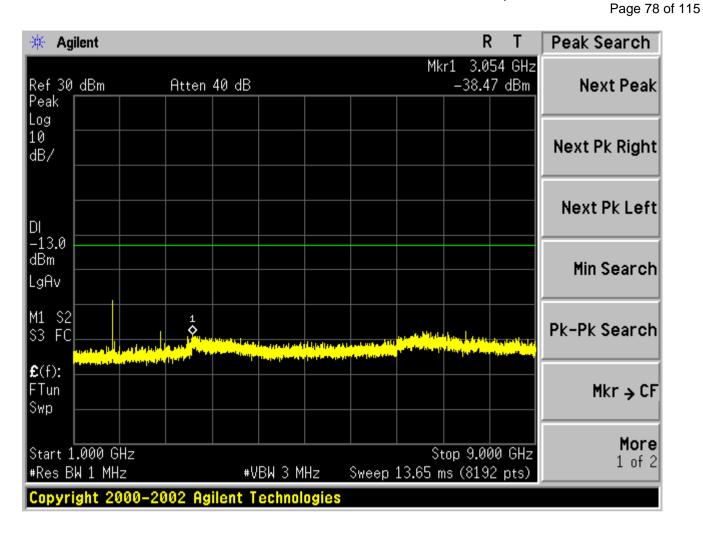



Report No.: AGC06426161101FE02 Page 79 of 115


Test Band=WCDMA1900

Test Mode=UMTS Test Channel=LCH

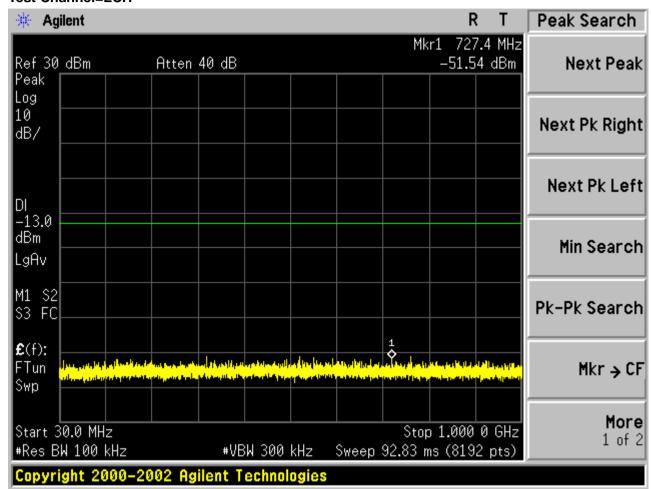

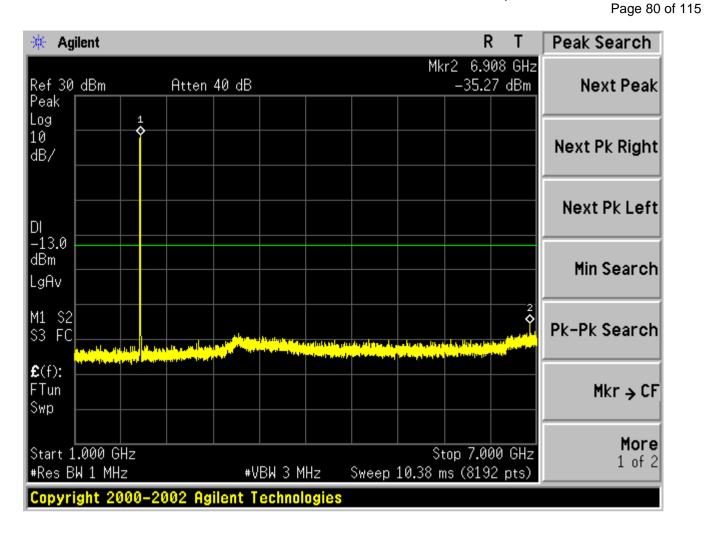


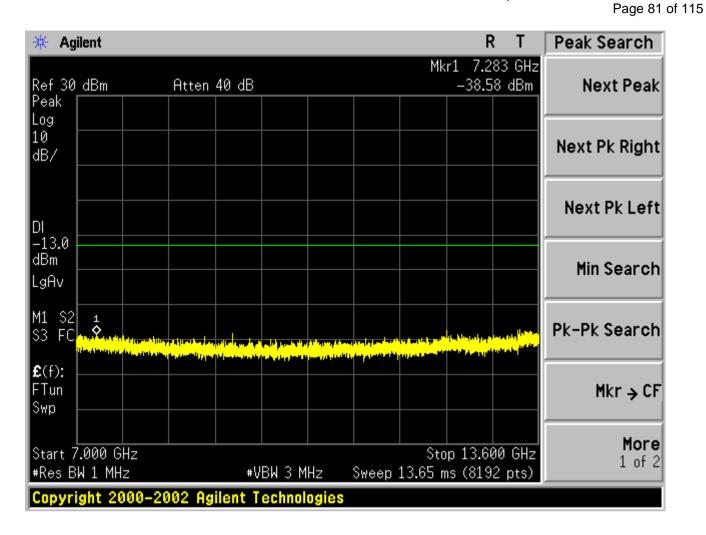


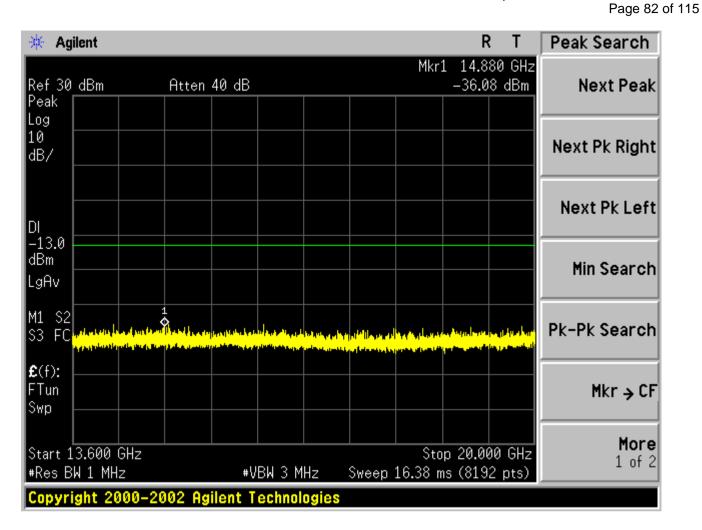



Report No.: AGC06426161101FE02 Page 83 of 115

Test Channel=MCH

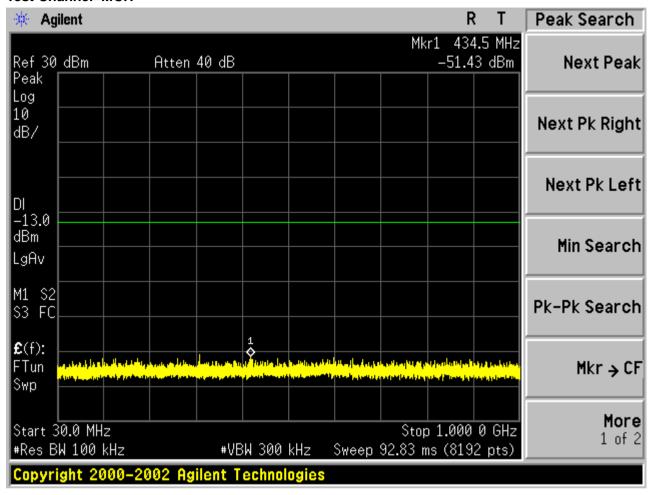

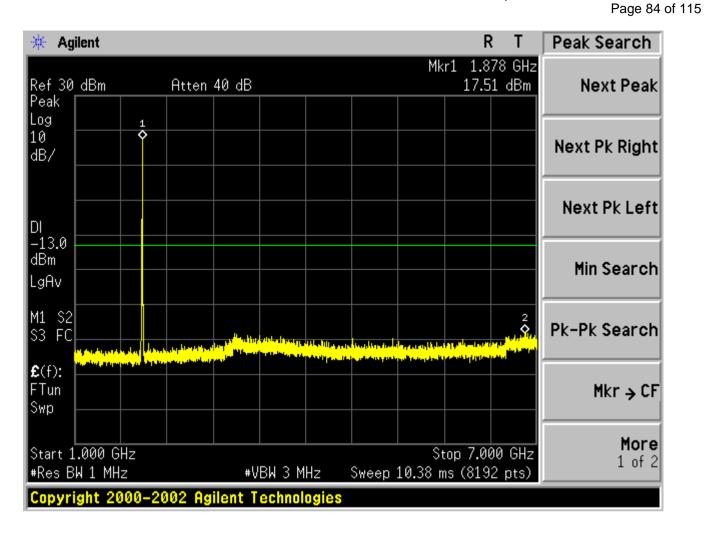


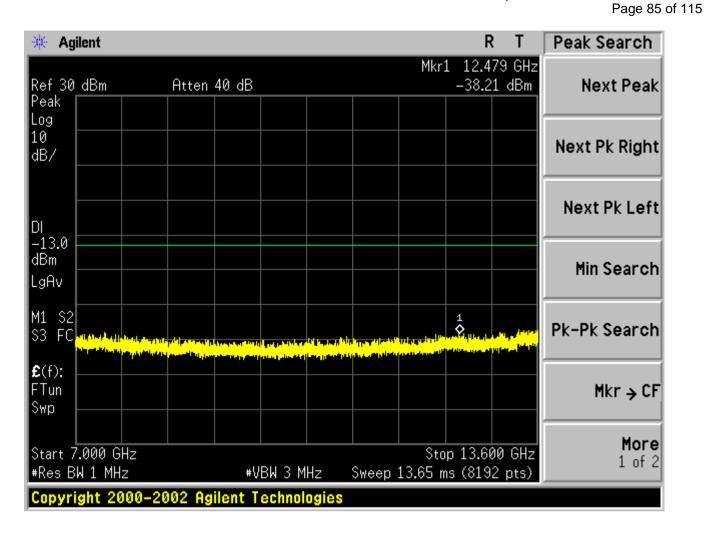


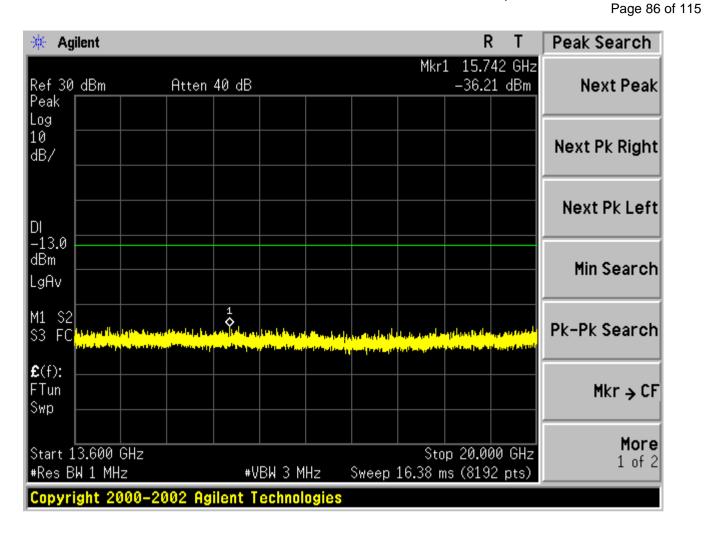


Report No.: AGC06426161101FE02 Page 87 of 115


Test Channel=HCH

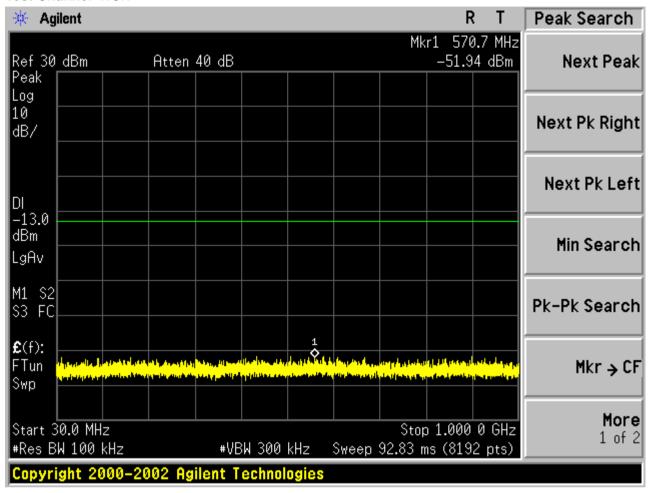

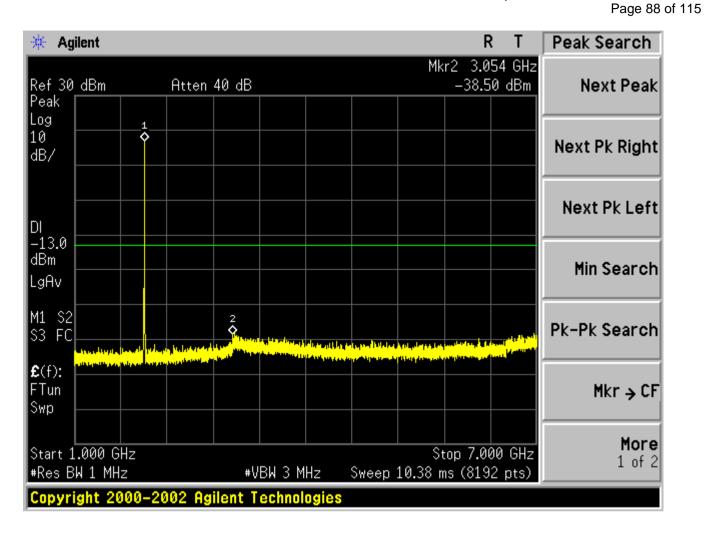

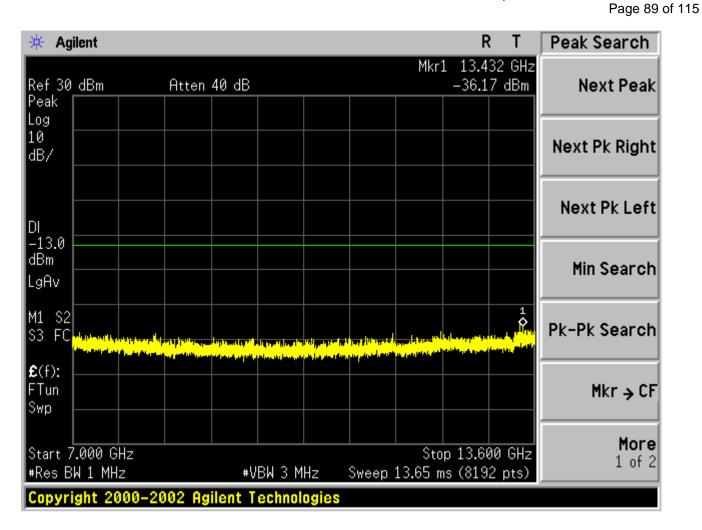

Report No.: AGC06426161101FE02 Page 90 of 115

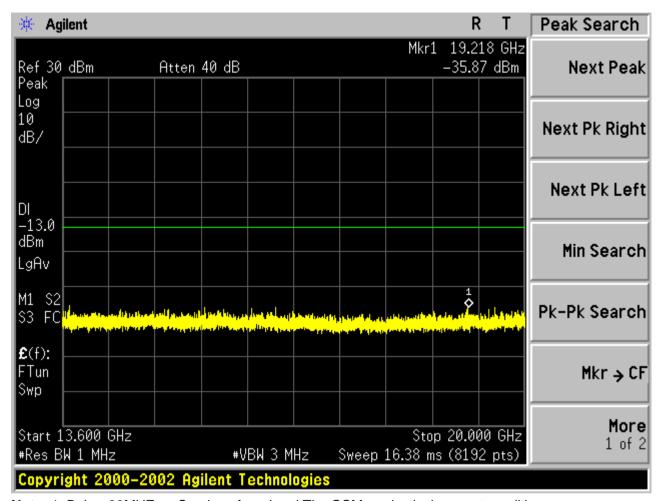

Note: 1. Below 30MHZ no Spurious found and The GSM modes is the worst condition.

2. As no emission found in standby or receive mode, no recording in this report.

Report No.: AGC06426161101FE02 Page 91 of 115


9.2 RADIATED SPURIOUS EMISSION

9.2.1 MEASUREMENT METHOD

The measurements procedures specified in TIA-603-D-2010 were used for testing. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The measurements were performed on all modes(GPRS 850, GPRS 1900, HSPA band II, HSPA band V) at 3 typical channels (the Top Channel, the Middle Channel and the Bottom Channel) for each band.


The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as, RSE=Rx(dBuV)+CL(dB)+SA(dB)+Gain(dBi)-107(dBuV to dBm) The SA is calibrated using following setup.

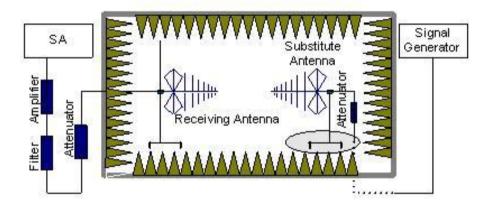

b) EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

Report No.: AGC06426161101FE02 Page 92 of 115

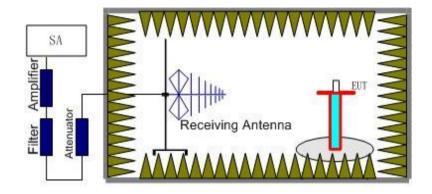

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS 1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz), GSM850 band (824.2MHz, 836.6MHz, 848.8MHz), UMTS band II(1852.6MHz, 1880MHz, 1907.4MHz), UMTS band V(826.6MHz, 836.4MHz, 846.4MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below: Power= $P_{Mea}+A_{Rpl}$

9.2.2 PROVISIONS APPLICABLE

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Note: only result the worst condition of each test mode:

Report No.: AGC06426161101FE02 Page 93 of 115

9.2.3 MEASUREMENT RESULT

GSM 850:

	The Worst Test Results for Channel 251/848.8 MHz											
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity							
1685.23	-41.86	-5.01	-46.87	-13.00	Horizontal							
2456.12	-42.45	-2.18	-44.63	-13.00	Vertical							
3645.78	-43.74	3.46	-40.28	-13.00	Vertical							
4536.58	-45.68	2.79	-42.89	-13.00	Horizontal							

PCS 1900:

	The Worst Test Results for Channel 810/1909.8MHz										
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity						
1429.36	-41.39	-3.22	-44.61	-13.00	Vertical						
2563.47	-42.26	-0.24	-42.50	-13.00	Vertical						
3645.26	-43.51	3.98	-39.53	-13.00	Horizontal						
4563.56	-46.24	11.56	-34.68	-13.00	Vertical						
5689.25	-41.48	17.89	-23.59	-13.00	Horizontal						

UMTS band II:

	The Worst Test	Results for	Channel 9938	/1907.4MHz	
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
2000.00	-38.12	-2.25	-40.37	-13.00	Vertical
9548.50	-43.29	-3.03	-46.32	-13.00	Horizontal
13367.40	-45.64	-1.87	-47.51	-13.00	Horizontal
15277.80	-43.27	8.52	-34.75	-13.00	Vertical
17931.60	-46.39	18.7	-27.69	-13.00	Horizontal

Page 94 of 115

UMTS band V:

	The Worst Test Results for Channel 4458/846.4MHz										
Frequency(MHz)	Power(dBm)	Power(dBm) ARpl (dBm) PMea(dBm) I		Limit (dBm)	Polarity						
1598.26	-43.64	-2.26	-45.9 -13.00		Vertical						
2365.78	-42.69	-3.12	-45.81	-13.00	Horizontal						
4967.65	-41.28	-1.74	-43.02	-13.00	Horizontal						
6457.86	-43.09	8.74	-34.35	-13.00	Vertical						
7896.56	-44.27	17.89	-26.38	-13.00	Horizontal						

Note: ARpl= Factor=Antenna Factor+ Cable loss-Amplifier gain.

The "Factor" value can be calculated automatically by software of measurement system.

Below 30MHZ no Spurious found and The GSM modes is the worst condition.

Page 95 of 115

10. MAINS CONDUCTED EMISSION

10.1 MEASUREMENT METHOD

The measurement procedure specified in ANSI/TIA-603-D-2010 was used for testing. Conducted Emission was measured with travel charger.

10.2 PROVISIONS APPLICABLE

Frequency of Emission (MHz)	Conducted Limit(dBuV)						
	Quasi-Peak	Average					
0.15 – 0.5	66 to 56 *	56 to 46 *					
0.5 – 5	56	46					
5 – 30	60	50					
*Decreases with the logarithm of the frequency.							


^{*}The lower limit shall apply at the transition frequency.

Note: The GSM850 mode is the worst condition and the test result as following:

Report No.: AGC06426161101FE02 Page 96 of 115

10.3 MEASUREMENT RESULT

LINE CONDUCTED EMISSION - L

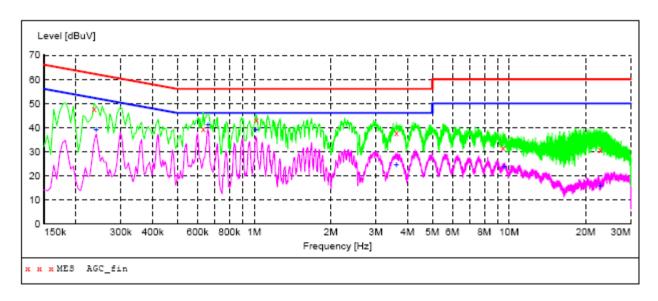


MEASUREMENT RESULT: "AGC fin"

2016/11/16 18	:21							
Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBuV	dB	dBuV	dB				SIAIE
0.235500 0.631500 1.018500 3.615000 9.474000 22.780500	47.90 39.40 43.30 37.80 31.50 30.80	10.3 10.3 10.4 10.5 10.7 12.0	62 56 56 56 60 60		QP QP QP QP QP QP	L1 L1 L1 L1 L1 L1	FLO FLO FLO FLO FLO	ON ON ON ON ON

MEASUREMENT RESULT: "AGC fin2"

2016/11/16 18								
Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBuV	dB	dBuV	dB				SIAIE
0.240000 0.658500 1.014000 3.615000 9.582000 22.780500	39.00 41.20 39.00 24.40 23.60 15.70	10.3 10.3 10.4 10.5 10.7	52 46 46 46 50 50	4.8 7.0	AV AV AV AV AV	L1 L1 L1 L1 L1	FLO FLO FLO FLO FLO	ON ON ON ON

LINE CONDUCTED EMISSION - N

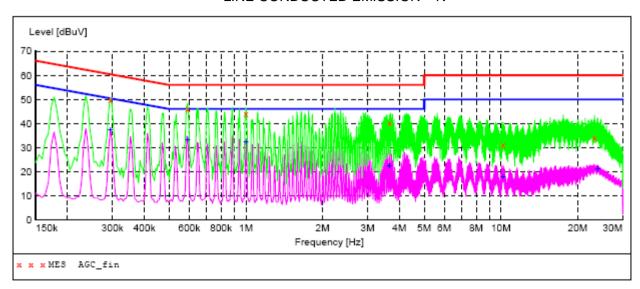

MEASUREMENT RESULT: "AGC fin"

2016/11/16 18:	:32							
Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBuV	dB	dBuV	dB				DIMIL
0.294000 0.591000 1.000500 3.655500 10.212000 23.275500	49.90 45.90 44.10 40.30 31.30 34.10	10.3 10.3 10.4 10.5 10.8	60 56 56 56 60	10.5 10.1 11.9 15.7 28.7 25.9	QP QP QP QP QP OP	N N N N N	FLO FLO FLO FLO FLO	ON ON ON ON

MEASUREMENT RESULT: "AGC fin2"

2016/11/16 18:	32							
Frequency	Level	Transd	Limit	Margin	Detector	Line	PΕ	AUX
MHz	dBuV	dB	dBuV	dB				STATE
0.294000	37.50	10.3	50	12.9	AV	N	FLO	ON
0.591000	33.40	10.3	46	12.6	AV	N	FLO	ON
1.000500	32.20	10.4	46	13.8	AV	N	FLO	ON
3.655500	22.30	10.5	46	23.7	AV	N	FLO	ON
10.212000	17.80	10.8	50	32.2	AV	N	FLO	ON
23.986500	21.20	11.9	50	28.8	AV	N	FLO	ON

Note: The GSM850 mode is the worst condition.

Page 98 of 115

11. FREQUENCY STABILITY

11.1 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- 1. Measure the carrier frequency at room temperature.
- 2. Subject the EUT to overnight soak at -10℃.
- 3.With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 band, channel 190 for GSM 850 band, channel 9400 for UMTS band II and channel 4175 for UMTS band V measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 4.Repeat the above measurements at 10° C increments from -10° C to $+55^{\circ}$ C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 6. Subject the EUT to overnight soak at +55℃.
- 7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 8. Repeat the above measurements at 10° C increments from +55 $^{\circ}$ C to -10 $^{\circ}$ C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 9.At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

11.2 PROVISIONS APPLICABLE

11.2.1 For Hand carried battery powered equipment

According to the ANSI/TIA-603-D-2010, the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.4V DC and 4.2V DC, with a nominal voltage of 4.2V DC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

Report No.: AGC06426161101FE02 Page 99 of 115

11.2.2 For equipment powered by primary supply voltage

According to the ANSI/TIA-603-D-2010, the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment, the normal environment temperature is 20°C.

Report No.: AGC06426161101FE02 Page 100 of 115

11.3 MEASUREMENT RESULT

Appendix D:Frequency Stability

Test Results

Frequency Error vs. Voltage:

Test Band	Test Mo de	Test Chan nel	Test Tem p.	Te st Vol t.(V)	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
			TN	3.4	-8.39	-0.01	±2.5	PASS
		LCH	TN	3.7	-12.07	-0.01	±2.5	PASS
				4.2	-13.95	-0.02	±2.5	PASS
GSM8	GS		TN	3.4	-13.37	-0.02	±2.5	PASS
50	M	MCH	TN	3.7	-11.75	-0.01	±2.5	PASS
30	IVI		TN	4.2	-12.40	-0.01	±2.5	PASS
			TN	3.4	-9.23	-0.01	±2.5	PASS
		HCH	TN	3.7	10.72	0.01	±2.5	PASS
			TN	4.2	7.75	0.01	±2.5	PASS

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channe	Temp.	Volt.	(Hz)	(ppm)	(ppm	
		- 1		(V))	
			TN	3.4	-30.09	-0.02	±2.5	PASS
		LCH	TN	3.7	-30.22	-0.02	±2.5	PASS
			TN	4.2	-28.09	-0.02	±2.5	PASS
CCM100				TN	3.4	-24.41	-0.01	±2.5
GSM190 0	GSM	MCH	TN	3.7	-28.80	-0.02	±2.5	PASS
			TN	4.2	-27.51	-0.01	±2.5	PASS
			TN	3.4	13.11	0.01	±2.5	PASS
		HCH	TN	3.7	16.14	0.01	±2.5	PASS
			TN	4.2	15.76	0.01	±2.5	PASS

Frequency Error vs. Temperature:

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channe	Volt.	Temp	(Hz)	(ppm)	(ppm	
		I)	
			VN	-10	-8.78	-0.01	±2.5	PASS
			VN	0	-9.04	-0.01	±2.5	PASS
			VN	10	-12.79	-0.02	±2.5	PASS
GSM850	GSM	LCH	VN	20	-9.36	-0.01	±2.5	PASS
			VN	30	-9.36	-0.01	±2.5	PASS
			VN	40	-9.81	-0.01	±2.5	PASS
			VN	50	-9.94	-0.01	±2.5	PASS
			VN	-10	-15.37	-0.02	±2.5	PASS
			VN	0	-11.36	-0.01	±2.5	PASS
			VN	10	12.40	0.01	±2.5	PASS
GSM850	GSM	MCH	VN	20	9.36	0.01	±2.5	PASS
			VN	30	-10.59	-0.01	±2.5	PASS
			VN	40	11.62	0.01	±2.5	PASS
			VN	50	-10.20	-0.01	±2.5	PASS
			VN	-10	-13.11	-0.02	±2.5	PASS
			VN	0	-9.56	-0.01	±2.5	PASS
			VN	10	-6.39	-0.01	±2.5	PASS
GSM850	GSM HCH	VN	20	-10.27	-0.01	±2.5	PASS	
			VN	30	-10.78	-0.01	±2.5	PASS
			VN	40	-8.33	-0.01	±2.5	PASS
			VN	50	-8.33	-0.01	±2.5	PASS

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channe	Volt.	Temp	(Hz)	(ppm)	(ppm	
		1)	
		GSM LCH	VN	-10	-27.06	-0.01	±2.5	PASS
GSM190	CSM		VN	0	-28.09	-0.02	±2.5	PASS
0			VN	10	-26.60	-0.01	±2.5	PASS
			VN	20	-29.06	-0.02	±2.5	PASS

			VN	30	-30.99	-0.02	±2.5	PASS
			VN	40	-29.51	-0.02	±2.5	PASS
			VN	50	-30.93	-0.02	±2.5	PASS
			VN	-10	-26.41	-0.01	±2.5	PASS
			VN	0	-29.38	-0.02	±2.5	PASS
CCM100			VN	10	-30.54	-0.02	±2.5	PASS
GSM190 0	GSM	MCH	VN	20	-33.51	-0.02	±2.5	PASS
0			VN	30	-28.48	-0.02	±2.5	PASS
			VN	40	-32.16	-0.02	±2.5	PASS
			VN	50	-30.22	-0.02	±2.5	PASS
		SSM HCH	VN	-10	15.56	0.01	±2.5	PASS
			VN	0	-15.24	-0.01	±2.5	PASS
GSM190			VN	10	16.47	0.01	±2.5	PASS
	GSM		VN	20	-12.66	-0.01	±2.5	PASS
0			VN	30	15.56	0.01	±2.5	PASS
			VN	40	18.02	0.01	±2.5	PASS
			VN	50	-17.63	-0.01	±2.5	PASS

Report No.: AGC06426161101FE02 Page 104 of 115

Frequency Error vs. Voltage:

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channe	Temp.	Volt.	(Hz)	(ppm)	(ppm	
		- 1		(V))	
			TN	3.4	16.48	0.02	±2.5	PASS
		MTS MCH	TN	3.7	11.90	0.01	±2.5	PASS
	UMTS		TN	4.2	19.45	0.02	±2.5	PASS
WCDMA			TN	3.4	15.56	0.02	±2.5	PASS
850			TN	3.7	11.90	-0.03	±2.5	PASS
830			TN	4.2	19.23	0.02	±2.5	PASS
			TN	3.4	10.30	0.01	±2.5	PASS
			TN	3.7	11.90	-0.02	±2.5	PASS
			TN	4.2	-13.05	-0.02	±2.5	PASS

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channe	Temp.	Volt.	(Hz)	(ppm)	(ppm	
		I		(V))	
			TN	3.4	19.00	0.01	±2.5	PASS
	UMTS	LCH S MCH HCH	TN	3.7	17.17	0.01	±2.5	PASS
			TN	4.2	17.62	0.01	±2.5	PASS
WCDMA			TN	3.4	24.49	0.01	±2.5	PASS
1900			TN	3.7	17.17	0.01	±2.5	PASS
1900			TN	4.2	27.47	0.01	±2.5	PASS
			TN	3.4	-17.17	-0.01	±2.5	PASS
			TN	3.7	17.17	-0.01	±2.5	PASS
			TN	4.2	18.54	0.01	±2.5	PASS

Frequency Error vs. Temperature:

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channe	Volt.	Temp	(Hz)	(ppm)	(ppm	
		- 1)	
			VN	-10	-10.53	-0.01	±2.5	PASS
WCDMA	VCDMA 850 UMTS	UMTS LCH	VN	0	10.76	0.01	±2.5	PASS
850		LCH	VN	10	-15.56	-0.02	±2.5	PASS
			VN	20	13.05	0.02	±2.5	PASS

			VN	30	-14.65	-0.02	±2.5	PASS
			VN	40	15.79	0.02	±2.5	PASS
			VN	50	-13.96	-0.02	±2.5	PASS
			VN	-10	-16.02	-0.02	±2.5	PASS
			VN	0	-15.56	-0.02	±2.5	PASS
MCDMA			VN	10	17.85	0.02	±2.5	PASS
WCDMA	UMTS	MCH	VN	20	-12.59	-0.02	±2.5	PASS
850			VN	30	15.79	0.02	±2.5	PASS
			VN	40	-12.82	-0.02	±2.5	PASS
			VN	50	21.97	0.03	±2.5	PASS
		ITS HCH	VN	-10	-18.31	-0.02	±2.5	PASS
			VN	0	-19.91	-0.02	±2.5	PASS
WCDMA			VN	10	-14.65	-0.02	±2.5	PASS
	UMTS		VN	20	-21.06	-0.02	±2.5	PASS
850			VN	30	-24.03	-0.03	±2.5	PASS
			VN	40	-20.37	-0.02	±2.5	PASS
			VN	50	16.25	0.02	±2.5	PASS

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channe	Volt.	Temp	(Hz)	(ppm)	(ppm	
		1)	
			VN	-10	24.49	0.01	±2.5	PASS
			VN	0	16.71	0.01	±2.5	PASS
WCDMA			VN	10	-19.91	-0.01	±2.5	PASS
1900	UMTS	LCH	VN	20	19.91	0.01	±2.5	PASS
1900			VN	30	18.08	0.01	±2.5	PASS
			VN	40	24.26	0.01	±2.5	PASS
			VN	50	17.40	0.01	±2.5	PASS
		MTS MCH	VN	-10	16.25	0.01	±2.5	PASS
			VN	0	-16.94	-0.01	±2.5	PASS
WCDMA	LIMTO		VN	10	13.05	0.01	±2.5	PASS
1900	UNITS		VN	20	12.59	0.01	±2.5	PASS
			VN	30	27.69	0.01	±2.5	PASS
			VN	40	13.73	0.01	±2.5	PASS

Report No.: AGC06426161101FE02 Page 106 of 115

			\ A.I	50	40.00	0.04	0.5	D4.00
			VN	50	19.68	0.01	±2.5	PASS
			VN	-10	20.14	0.01	±2.5	PASS
			VN	0	19.45	0.01	±2.5	PASS
MCDMA			VN	10	15.11	0.01	±2.5	PASS
WCDMA 1900	UMTS	HCH	VN	20	12.36	0.01	±2.5	PASS
1900			VN	30	-17.85	-0.01	±2.5	PASS
			VN	40	18.08	0.01	±2.5	PASS
			VN	50	16.48	0.01	±2.5	PASS


Report No.: AGC06426161101FE02 Page 107 of 115

PHOTOGRAPHS OF TEST SETUP


CONDUCTED EMISSION



RADIATED SPURIOUS EMISSION

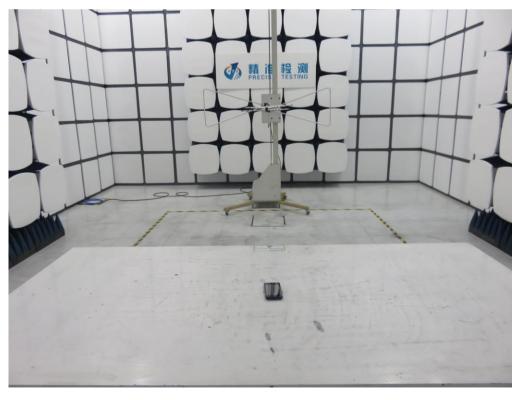

Report No.: AGC06426161101FE02 Page 108 of 115

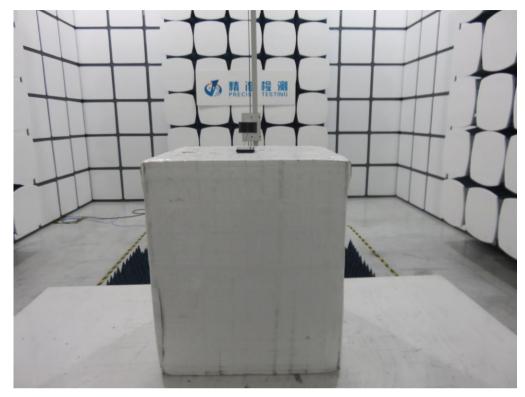

CONDUCTED MEASUREMENTS



Report No.: AGC06426161101FE02 Page 109 of 115

PHOTOGRAPHS OF EUT

TOTAL VIEW OF EUT



THE LABEL OF ADAPTER



Report No.: AGC06426161101FE02 Page 110 of 115

THE LABEL OF BATTERY



TOP VIEW OF EUT



Report No.: AGC06426161101FE02 Page 111 of 115

BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



Report No.: AGC06426161101FE02 Page 112 of 115

BACK VIEW OF EUT




LEFT VIEW OF EUT



Report No.: AGC06426161101FE02 Page 113 of 115

RIGHT VIEW OF EUT



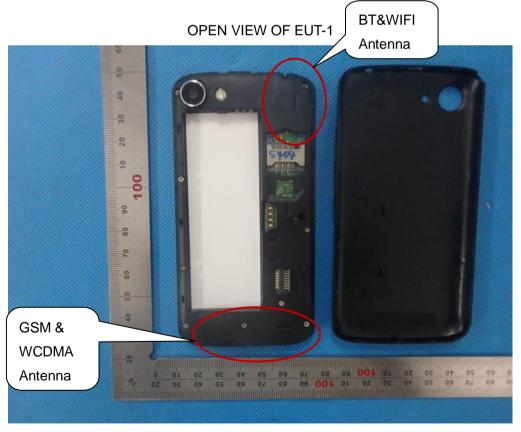


Report No.: AGC06426161101FE02 Page 114 of 115

OPEN VIEW OF EUT-2




OPEN VIEW OF EUT-3

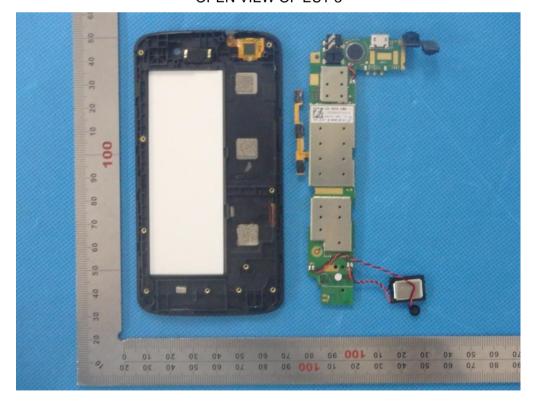


Report No.: AGC06426161101FE02 Page 115 of 115

INTERNAL VIEW OF EUT-1

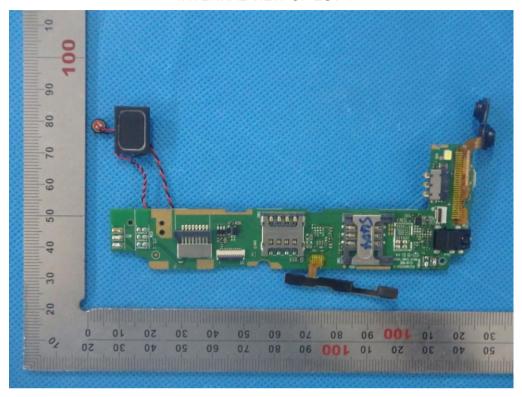

INTERNAL VIEW OF EUT-2

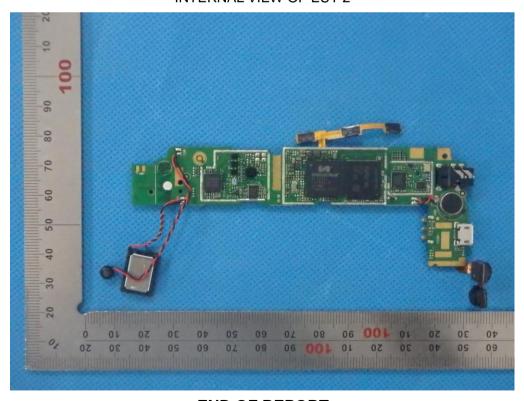

----END OF REPORT----