

TEST REPORT

FCC ID: 2AKDM189

Product: Golf Pad LINK

Model No.: GPL2A

Additional Model: N/A

Trade Mark: N/A

Report No.: TCT170327E049

Issued Date: Apr. 20, 2017

Issued for:

Golf Pad Inc.

PO Box 288, Kirkland, WA 98083, USA

Issued By:

Shenzhen Tongce Testing Lab.

1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District, Shenzhen, Guangdong, China

TEL: +86-755-27673339

FAX: +86-755-27673332

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab.

This document may be altered or revised by Shenzhen Tongce Testing Lab. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

Hotline: 400-6611-140 Tel: 86-755-27673339 Fax: 86-755-27673332 http://www.tct-lab.com





TABLE OF CONTENTS

1.	Test Certification	3
2.	Test Result Summary	4
3.	EUT Description	5
4.	Genera Information	
	4.1. Test Environment and Mode	
	4.2. Description of Support Units	6
5.		
	5.1. Facilities	7
	5.2. Location	7
	5.3. Measurement Uncertainty	7
6.	Test Results and Measurement Data	8
	6.1. Antenna Requirement	8
	6.2. Conducted Emission	9
	6.3. Radiated Emission Measurement	
	6.4. Occupied Bandwidth	17
Αp	ppendix A: Photographs of Test Setup	
Ap	opendix B: Photographs of EUT	



1. Test Certification

Product:	Golf Pad LINK
Model No.:	GPL2A
Additional Model No.:	N/A (S)
Applicant:	Golf Pad Inc.
Address:	PO Box 288, Kirkland, WA 98083, USA
Manufacturer:	Golf Pad Inc.
Address:	PO Box 288, Kirkland, WA 98083, USA
Date of Test:	Mar 28 – Apr. 19, 2017
Applicable Standards:	FCC CFR Title 47 Part 15 Subpart C Section 15.225

The above equipment has been tested by Shenzhen Tongce Testing Lab. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By: Ricke Chang Date: Apr. 19, 2017

Ride Cheng

Reviewed By: Date: Apr. 20, 2017

Joe Zhou

Tomsin

Approved By: Date: Apr. 20, 2017



2. Test Result Summary

Requirement	CFR 47 Section IC Paragraph	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Spurious emissions	§15.225/ §15.209 §2.1053, §2.1057	PASS
Occupied Bandwidth	§15.215 (c) §2.1049	PASS
Frequency stability	§15.225 §2.1055	PASS

Note:

- 1. PASS: Test item meets the requirement.
- 2. Fail: Test item does not meet the requirement.
- 3. N/A: Test case does not apply to the test object.
- 4. The test result judgment is decided by the limit of test standard.



EUT Description

Product Name:	Golf Pad LINK
Model:	GPL2A
Additional Model:	N/A
Trade Mark:	N/A
Operation Frequency:	13.56MHz
Modulation Technology:	ASK
Antenna Type:	Internal Antenna
Antenna Gain:	0dBi
Power Supply:	Rechargeable Li-ion Battery DC3.7V





4. Genera Information

4.1. Test Environment and Mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Operation mode:	Keep the EUT in continuous transmitting with modulation

The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name		
E		I	(3)			

Note:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

Page 6 of 22



5. Facilities and Accreditations

5.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

• FCC - Registration No.: 572331

Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

IC - Registration No.: 10668A-1

The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

CNAS - Registration No.: CNAS L6165

Shenzhen TCT Testing Technology Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6165.

5.2. Location

Shenzhen TCT Testing Technology Co., Ltd.

Address: 1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District,

Shenzhen, Guangdong, China

Tel: +86-755-27673339

5.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	MU
1 (Conducted Emission	±2.56dB
2	RF power, conducted	±0.12dB
3	Spurious emissions, conducted	±0.11dB
4	All emissions, radiated(<1G)	±3.92dB
5	All emissions, radiated(>1G)	±4.28dB
6	Temperature	±0.1°C
7	Humidity	±1.0%





6. Test Results and Measurement Data

6.1. Antenna Requirement


Standard requirement: FCC Part15 C Section 15.203

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

E.U.T Antenna:

The NFC antennas is internal antennas which permanently attached, and the best case gain of the antenna is 0dBi.



Page 8 of 22



6.2. Conducted Emission

6.2.1. Test Specification

	T							
Test Requirement:	FCC Part15 C Section	15.207						
Test Method:	ANSI C63.10:2013							
Frequency Range:	150 kHz to 30 MHz							
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto							
Limits:	Frequency range (MHz) 0.15-0.5 0.5-5 5-30	Limit (c Quasi-peak 66 to 56* 56 60	BuV) Average 56 to 46* 46 50					
Test Setup:	LISN	E.U.T plane EMI Receive	SN Filter — AC power					
Test Mode:	Refer to section 4.1 for	details						
Test Procedure:	impedance stabilizat 50ohm/50uH coupl equipment. 2. The peripheral device through a LISN throug	ion network (L.I. ing impedance es are also connet at provides a new termination. (Fetup and photogrape are checked for to find the management and all according to A	ected to the main power 50ohm/50uH coupling Please refer to the block					
Test Result:	PASS							
7.								



6.2.2. Test Instruments

Conducted Emission Shielding Room Test Site (843)											
Equipment	Calibration Due										
EMI Test Receiver	R&S	ESCS30	100139	Aug. 11, 2017							
LISN	Schwarzbeck	NSLK 8126	8126453	Aug. 16, 2017							
Coax cable (9kHz-40GHz)	тст	CE-05	N/A	Aug. 11, 2017							
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A							

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

Page 10 of 22


Hotline: 400-6611-140 Tel: 86-755-27673339 Fax: 86-755-27673332 http://www.tct-lab.com



6.2.3. Test data

Please refer to following diagram for individual

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

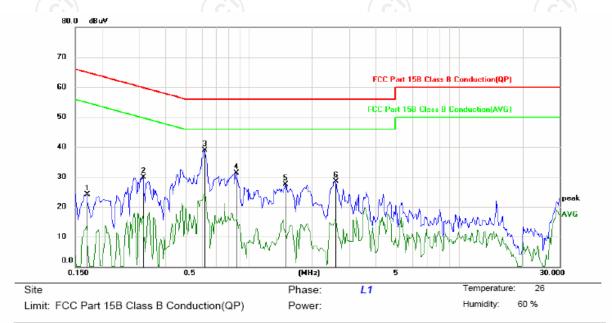

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBu∀	dB	dBu∀	dBu∀	dB	Detector	Comment
1		0.1695	24.11	0.00	24.11	64.98	-40.87	peak	
2		0.3140	29.98	0.00	29.98	59.86	-29.88	peak	
3	*	0.6148	38.82	0.00	38.82	56.00	-17.18	peak	
4		0.8687	31.32	0.00	31.32	56.00	-24.68	peak	
5		1.4898	27.53	0.00	27.53	56.00	-28.47	peak	
6		2.5913	28.56	0.00	28.56	56.00	-27.44	peak	

Note:

Freq. = Emission frequency in MHz

Reading level $(dB\mu V)$ = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

 $Limit (dB\mu V) = Limit stated in standard$

 $Margin (dB) = Measurement (dB\mu V) - Limits (dB\mu V)$

Q.P. =Quasi-Peak


AVG =average

^{*} is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz





Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

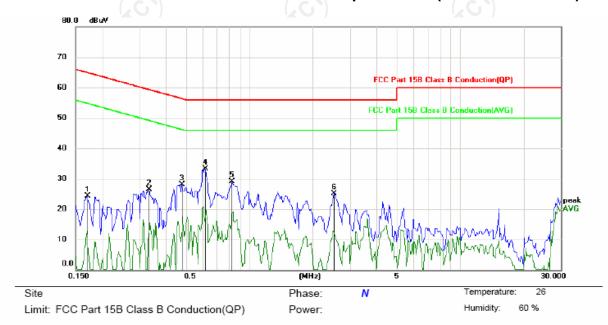

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBu∀	dB	dBu∀	dBu∀	dB	Detector	Comment
1	0.1695	24.35	0.00	24.35	64.98	-40.63	peak	
2	0.3335	26.48	0.00	26.48	59.36	-32.88	peak	
3	0.4781	28.13	0.00	28.13	56.37	-28.24	peak	
4 *	0.6148	33.22	0.00	33.22	56.00	-22.78	peak	
5	0.8218	29.15	0.00	29.15	56.00	-26.85	peak	
6	2.5210	25.11	0.00	25.11	56.00	-30.89	peak	

Note:

Freq. = Emission frequency in MHz

Reading level $(dB\mu V)$ = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement $(dB\mu V)$ = Reading level $(dB\mu V)$ + Corr. Factor (dB)

 $Limit (dB\mu V) = Limit stated in standard$

Margin (dB) = Measurement (dB μ V) – Limits (dB μ V)

Q.P. =Quasi-Peak

AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz

Page 12 of 22




6.3. Radiated Emission Measurement

6.3.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.225								
Test Method:	ANSI C63.10	ANSI C63.10: 2013							
Frequency Range:	9 kHz to 100	0 MHz							
Measurement Distance:	3 m								
Antenna Polarization:	Horizontal &	Vertical							
	Frequency	Detector	RB	\//	VBW		Remark		
	9kHz- 150kHz	Quasi-peak			1kHz	Q	uasi-peak Value		
Receiver Setup:	150kHz- 30MHz	Quasi-peak			30kHz		uasi-peak Value		
	30MHz-1GHz	Quasi-peak	100	кНz	300kHz	Q	uasi-peak Value		
	FCC Part15			25					
	Frequer (MHz	_	Lim (uV/ @30	m	Limit (dBuV/n	n	Detector		
	13.110-13	3 410	<u>@30</u> 106		@3m) 80.5		QP		
	13.410-13		334		90.5		QP		
	13.553-13		15848		124.0		QP		
	13.567-13	.7110	224		90.5		QP		
	13.710-14	1.010	106	6 80.5 QP			QP		
	FCC Part15 Frequency Rar (MHz)		tion 15.209 stance (m) Field streng (dB μ V/m			h Detector			
	0.009-0.490	3			20log 2400/F (kHz) + 80		QP		
Limit:	0.490-1.705	3			20log 24000/F (kHz) + 40		QP		
	1.705-30	3	3		20log 30 + 40		QP		
	30-88	3		40.0			40.0		
	88-216	3	3		43.5		43.5		
	216-960	3		46.0		46.0			
	Above 960	3	3		54.0		54.0		
	2. In the Ab 3. Distance instrument 4. The radia (Lying, S worse rad	antenna and ated emissior ide, and Stan diated emissi	e tighte distanc the EU ns shoul nd), Afte on was	r limit e in n T Id be i r pre-i get at	t applies at neters betw tested unde test. It was t the lying p	eer er 3- fou osi	a the measuring -axes position and that the		

distance is adjusted by using the formula Ld1 = Ld2 * (d2/d1)



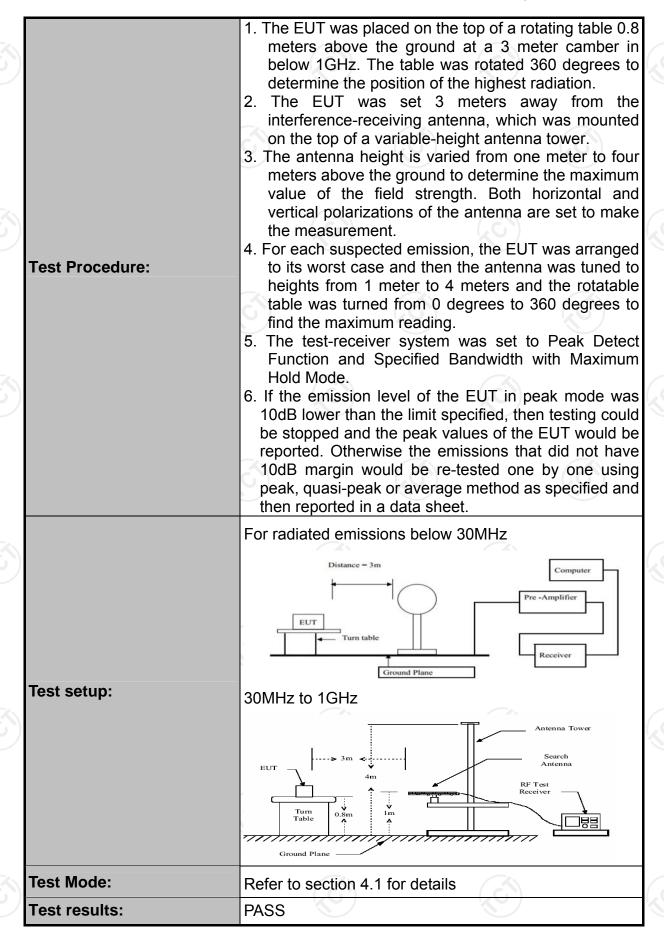





6.3.2. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
ESPI Test Receiver	ROHDE&SCHW ARZ	ESVD	100008	Aug. 11, 2017
Spectrum Analyzer	ROHDE&SCHW ARZ	FSEM	848597/001	Aug. 11, 2017
Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	07032613	Aug. 11, 2017
Pre-amplifier	HP	8447D	2727A05017	Aug. 11, 2017
Loop antenna	ZHINAN	ZN30900A	12024	Aug. 13, 2017
Broadband Antenna	Schwarzbeck	VULB9163	340	Aug. 13, 2017
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Aug. 13, 2017
Coax cable (9kHz-40GHz)	тст	N/A	N/A	Aug. 12, 2017
Coax cable (9kHz-40GHz)	тст	N/A	N/A	Aug. 12, 2017
Coax cable (9kHz-40GHz)	тст	N/A	N/A	Aug. 12, 2017
Coax cable (9kHz-40GHz)	тст	N/A	N/A	Aug. 12, 2017
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.3.3. Test Data

Field Strength of Fundamental

Frequency	Emission	Limits	Margin	
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	
13.56	75.63	124		



Spurious Emissions

Frequency (MHz)	Emission Level (dBuV/m)	Horizontal /Vertical	Limit Line (dBuV/m)	Detector	Margin (dB)
5.38	26.44	V	69.54	QP	-43.10
27.12	25.65	V	69.54	QP	-43.89
40.68	28.39	Н	40.00	QP	-11.61
40.68	35.32	V	40.00	QP	-4.68
54.24	32.32	(HC)	40.00	QP	-7.68
54.24	29.43	V	40.00	QP	-10.57

Note: 1) QP= Quasi-peak

2) Emission Level = Reading Level + Antenna Factor + Cable Loss.



6.4. Occupied Bandwidth

6.4.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.215(c)		
Test Method:	ANSI C63.10: 2013		
Limit:	N/A		
Test Procedure:	 According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT. Set to the maximum power setting and enable the EUT transmit continuously. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel; RBW≥ 1% of the 20 dB bandwidth; VBW≥RBW; Sweep = auto; Detector function = peak; Trace = max hold. Measure and record the results in the test report. 		
Test setup:	Spectrum Analyzer EUT		
Test Mode:	Refer to section 4.1 for details		
Test results:	PASS		

6.4.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSU	200054	Aug. 11, 2017

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

Page 17 of 22




6.4.3. Test data

Frequency(MHz)	20dB Occupy Bandwidth (kHz)	Limit (kHz)	Conclusion
13.56	29.81		PASS

Test plots as follows:

Lowest channel

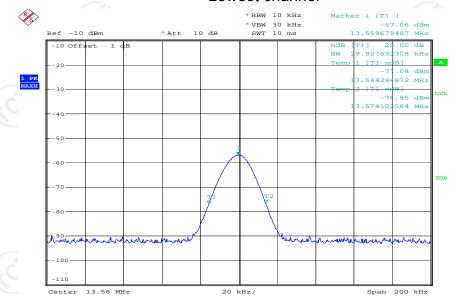

Date: 17.APR.2017 16:35:47





6.5. Frequency stability

6.5.1. Test Specification

FCC Part15 C Section 15.225		
ANSI C63.10 : 2013		
Refer to item 4.1		
+/-0.01%		
Spectrum Analyzer EUT		
Thermal Chamber		
 The equipment under test was connected to an external DC power supply and input rated voltage. RF output was connected to a spectrum analyzer. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached. 		
PASS		

6.5.2. Test Instruments

RF Test Room					
Equipment Manufacturer Model Serial Number Calibration					
Spectrum Analyzer	R&S	FSU	200054	Aug. 11, 2017	
DC Power	GW	GPR-6030 D	1 6	Aug. 13, 2016	



6.5.3. Test Data

Voltage	Temperature	Frequency	Deviation	Limit
(Vdc)	(℃)	(MHz)	(%)	(%)
3.7	-20	13.560333	0.0025	
3.7	-10	13.560288	0.0021	
3.7	0 (0)	13.560132	0.0010	(C)
3.7	10	13.56023	0.0017	
3.7	20	13.560159	0.0012	+/-0.01
3.7	30	13.560286	0.0021	+ /-0.01
3.7	40	13.560201	0.0015	\
3.7	50	13.560208	0.0015	/
4.2	20	13.560165	0.0012	
3.0	20	13.560159	0.0026	
4.2	20	13.560165	0.0012	



Appendix A: Photographs of Test Setup Product: Golf Pad LINK

Product: Golf Pad LINK Model: GPL2A Radiated Emission











Appendix B: Photographs of EUT

Refer to test report TCT170327E004

*****END OF REPORT*****

