

8.5 RADIATED SPURIOUS EMISSION

8.5.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB 558074 D01 15.247 Meas Guidance v05r02

8.5.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

8.5.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

8.5.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz (1GHz to 25GHz), 100 kHz for $f < 1$ GHz (30MHz to 1GHz), 200Hz for $f < 150$ KHz (9KHz to 150KHz), 9KHz for $f < 30$ MHz (150KHz to 30KHz)

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

8.5.5 Test Results

Temperature:	22.5° C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

■ Spurious Emission below 30MHz(9KHz to 30MHz)

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance}/ \text{test distance})(\text{dB})$;

Limit line=Specific limits(dBuV) + distance extrapolation factor

- Spurious Emission Above 1GHz(1GHz to 25GHz)
- All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11g recorded was report as below:

Test mode: 802.11 g Frequency: Channel 1: 2412MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
5675.000	V	51.69	40.25	74.00	54.00	-22.31	-13.75
11013.00	V	56.58	47.89	74.00	54.00	-17.42	-6.11
14226.00	V	60.76	48.79	74.00	54.00	-13.24	-5.21
4825.000	H	55.61	48.79	74.00	54.00	-18.39	-5.21
7222.000	H	52.54	45.69	74.00	54.00	-21.46	-8.31
10571.00	H	56.65	43.76	74.00	54.00	-17.35	-10.24

Test mode: 802.11 g Frequency: Channel 6: 2437MHz

Freq. (MHz)	Ant.Po l. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4808.000	V	49.31	40.31	74.00	54.00	-24.69	-13.69
9500.000	V	52.57	41.56	74.00	54.00	-21.43	-12.44
15195.00	V	60.59	47.88	74.00	54.00	-13.41	-6.12
4876.000	H	50.72	40.12	74.00	54.00	-23.28	-13.88
7171.000	H	52.13	41.76	74.00	54.00	-21.87	-12.24
10894.00	H	56.31	47.89	74.00	54.00	-17.69	-6.11

Test mode: 802.11 g Frequency: Channel 11: 2462MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
6236.000	V	52.09	42.31	74.00	54.00	-21.91	-11.69
13920.00	V	59.36	47.54	74.00	54.00	-14.64	-6.46
15008.00	V	60.80	47.34	74.00	54.00	-13.20	-6.66
4162.000	H	49.67	40.25	74.00	54.00	-24.33	-13.75
7596.000	H	51.57	42.36	74.00	54.00	-22.43	-11.64
14175.00	H	60.45	48.35	74.00	54.00	-13.55	-5.65

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Correct Factor.
 - (3) Correct Factor= Ant_F + Cab_L - Preamp
 - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11g recorded was report as below:

Test mode: 802.11 g Frequency: Channel 1: 2412MHz


Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2483.615	H	50.46	74.00	40.25	54.00
2495.083	V	51.60	74.00	40.89	54.00

Test mode: 802.11 g Frequency: Channel 11: 2462MHz


Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2310.640	H	49.73	74.00	39.87	54.00
2337.200	V	49.52	74.00	39.45	54.00

- Note:** (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Correct Factor +Cable Loss.
 (3) Correct Factor= Ant_F + Cab_L - Preamp
 (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


Test Model	Spurious Emission in Restricted Band 2310-2390MHz	
	802.11g	Polarity: H
	Channel 1: 2412MHz	

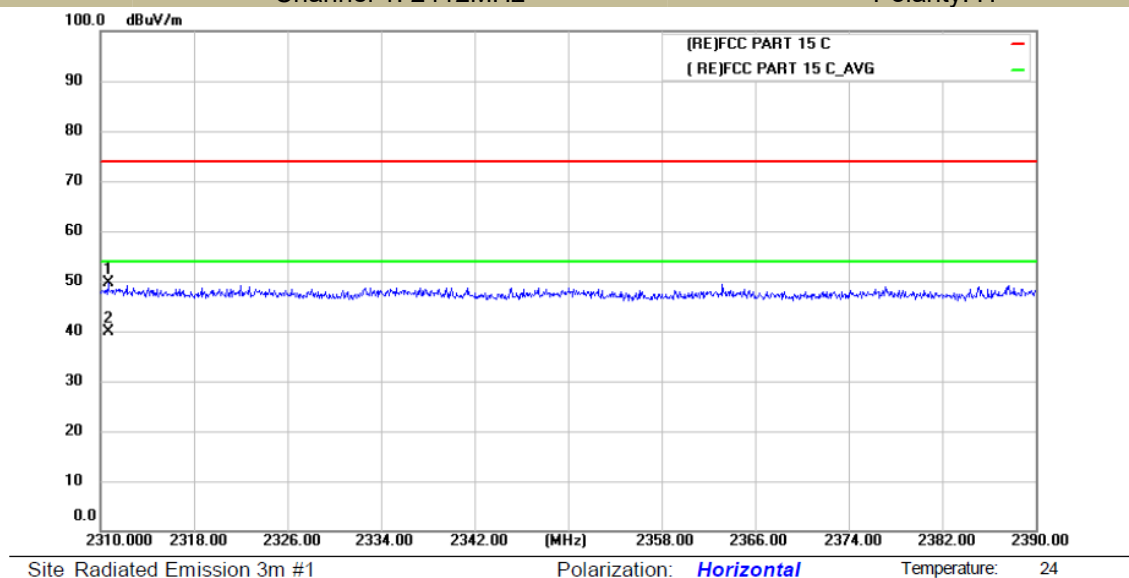


Test Model	Spurious Emission in Restricted Band 2310-2390MHz	
	802.11g	Polarity: V
	Channel 1: 2412MHz	

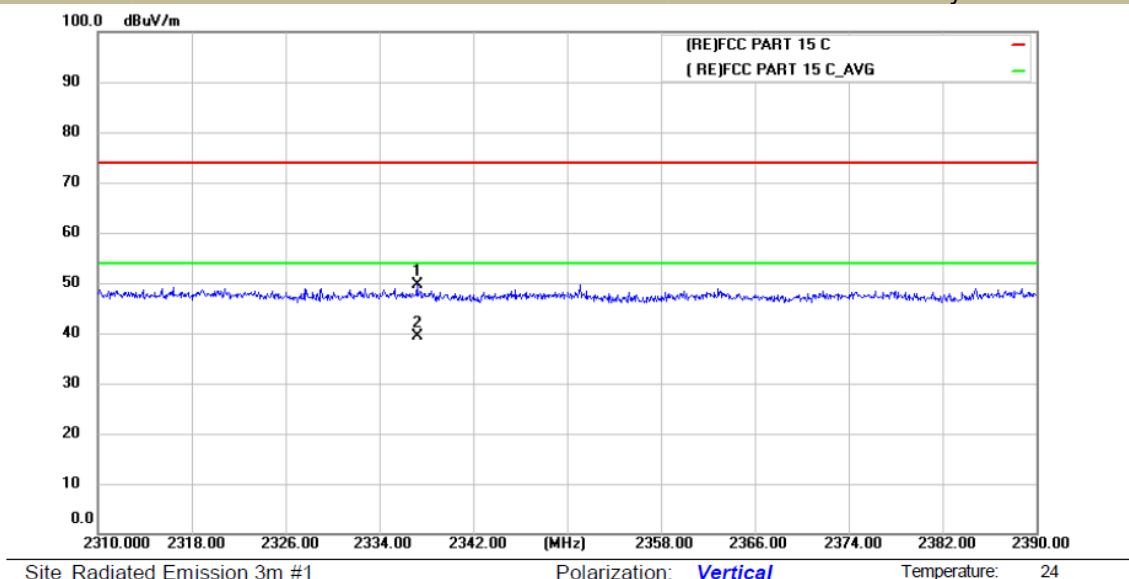

Test Model	Spurious Emission in Restricted Band 2483.5-2500MHz	
	802.11g	
	Channel 11: 2462MHz	Polarity: H

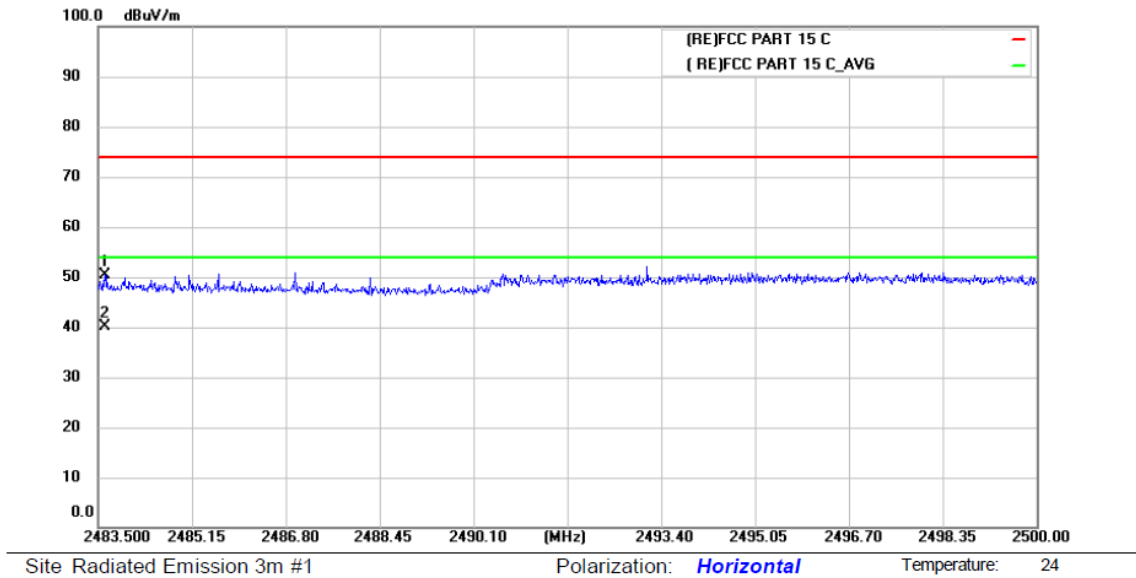


Test Model	Spurious Emission in Restricted Band 2483.5-2500MHz	
	802.11g	
	Channel 11: 2462MHz	Polarity: V

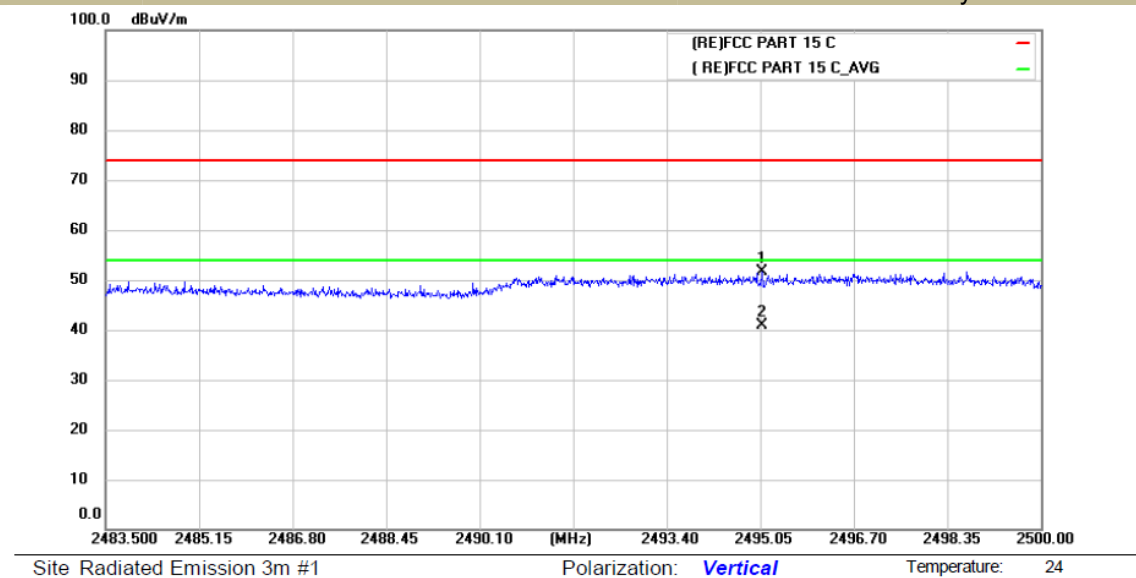


- Spurious Emission below 1GHz (30MHz to 1GHz)
- All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11g recorded was report as below:

Project Information			
Mode:	TX 2412 MHZ	Voltage:	AC 120V/50Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	TDF

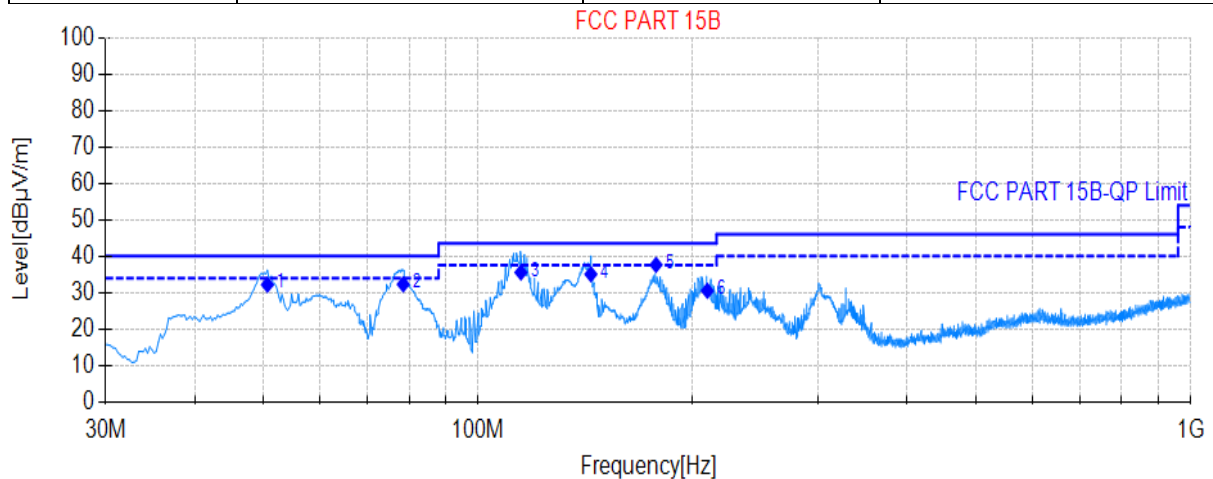


Final Data List										
NO	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	50.6125	54.44	-22.27	32.17	40.00	7.83	200	348	Horizontal	PASS
2	78.5	57.35	-25.06	32.29	40.00	7.71	200	157	Horizontal	PASS
3	114.8170	59.26	-23.71	35.55	43.50	7.95	100	155.9	Horizontal	PASS
4	143.975	61.01	-25.96	35.05	43.50	8.45	200	217	Horizontal	PASS
5	177.6825	62.01	-24.40	37.61	43.50	5.89	200	1	Horizontal	PASS
6	209.6925	53.42	-22.92	30.50	43.50	13.00	200	51	Horizontal	PASS

Project Information			
Mode:	TX 2412 MHZ	Voltage:	AC 120V/50Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	TDF

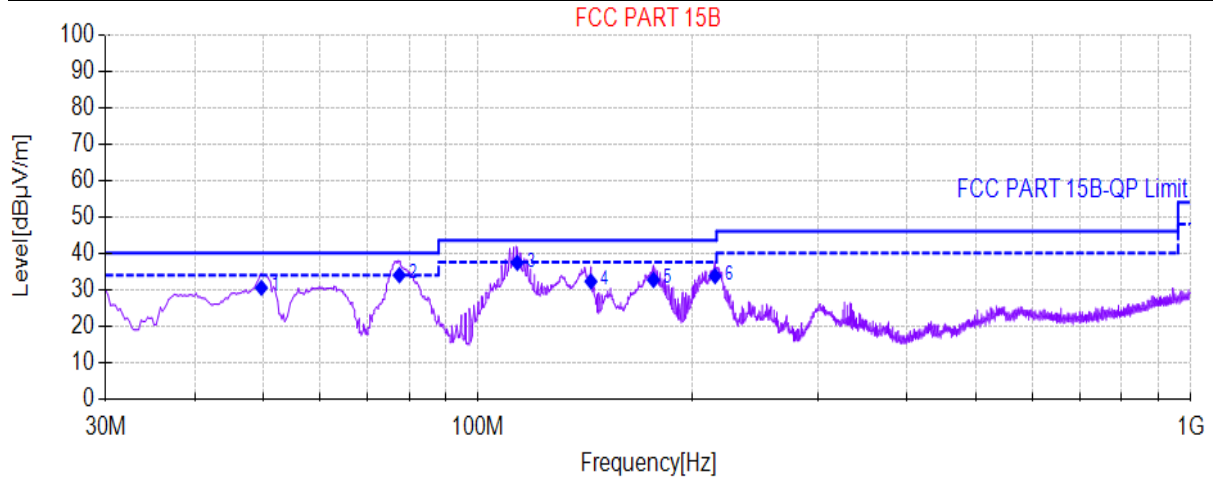


Final Data List										
NO	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	49.6425	52.81	-22.34	30.47	40.00	9.53	100	253	Vertical	PASS
2	77.53	58.96	-25.00	33.96	40.00	6.04	100	218	Vertical	PASS
3	113.4700	60.97	-23.62	37.35	43.50	6.15	100	283.2	Vertical	PASS
4	143.975	58.19	-25.96	32.23	43.50	11.27	100	329	Vertical	PASS
5	176.2275	57.11	-24.45	32.66	43.50	10.84	100	182	Vertical	PASS
6	215.0275	56.46	-22.75	33.71	43.50	9.79	100	1	Vertical	PASS

Project Information			
Mode:	TX 2437 MHZ	Voltage:	AC 120V/50Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	TDF

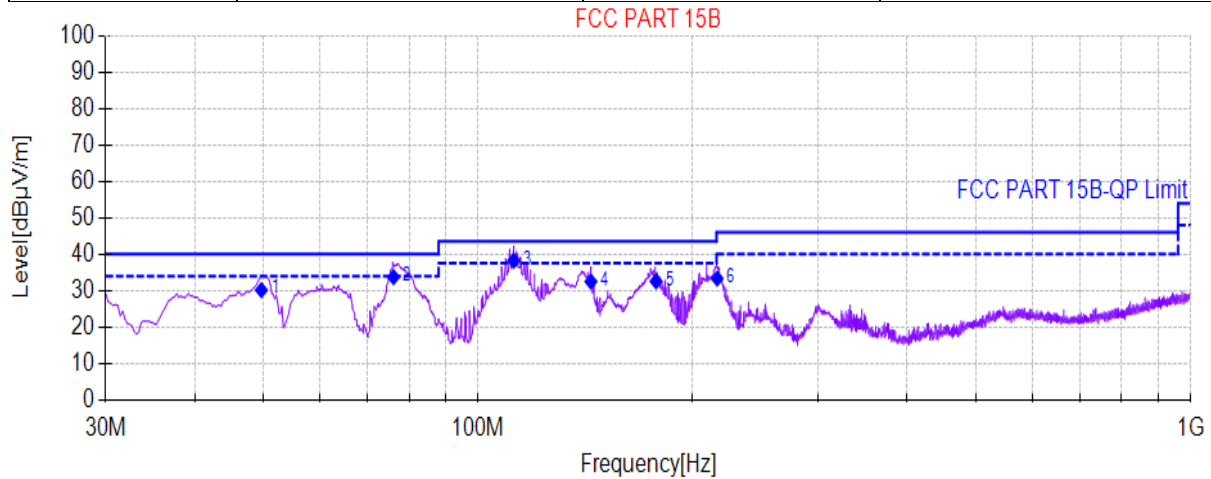


Final Data List										
NO	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	49.6425	52.48	-22.34	30.14	40.00	9.86	100	236	Vertical	PASS
2	76.075	58.61	-24.89	33.72	40.00	6.28	100	223	Vertical	PASS
3	112.2075	61.76	-23.53	38.23	43.50	5.27	100	239	Vertical	PASS
4	143.975	58.44	-25.96	32.48	43.50	11.02	100	337	Vertical	PASS
5	177.6825	56.95	-24.40	32.55	43.50	10.95	100	94	Vertical	PASS
6	216.4825	56.03	-22.71	33.32	46.00	12.68	100	0	Vertical	PASS

Project Information			
Mode:	TX 2437 MHZ	Voltage:	AC 120V/50Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	TDF

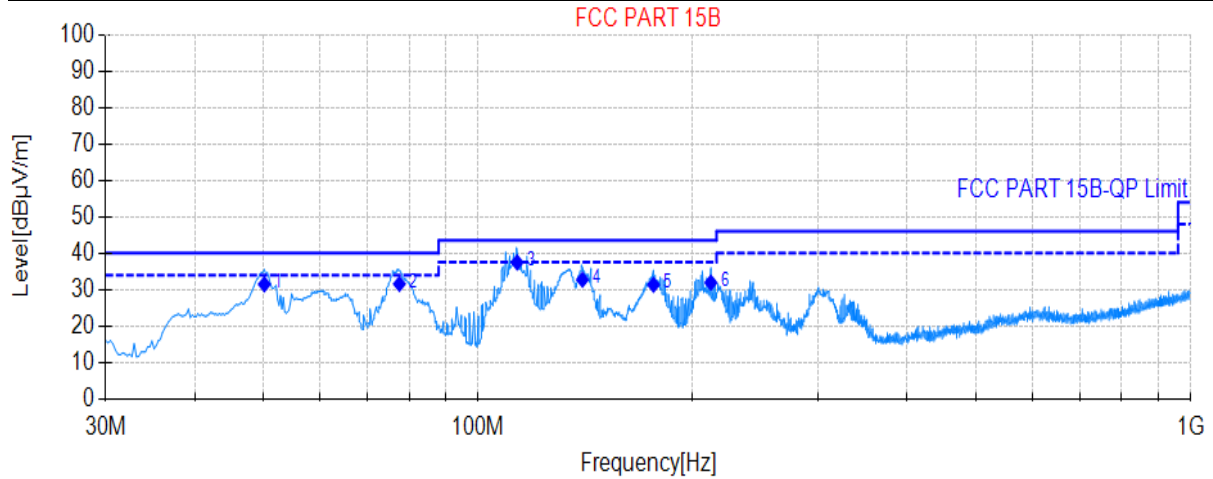


Final Data List										
NO	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	50.1275	53.71	-22.25	31.46	40.00	8.54	200	336	Horizontal	PASS
2	77.53	56.54	-25.00	31.54	40.00	8.46	200	26	Horizontal	PASS
3	113.42	61.07	-23.61	37.46	43.50	6.04	200	144	Horizontal	PASS
4	140.095	58.74	-26.02	32.72	43.50	10.78	200	334	Horizontal	PASS
5	176.2275	55.78	-24.45	31.33	43.50	12.17	200	198	Horizontal	PASS
6	212.1175	54.75	-22.84	31.91	43.50	11.59	200	128	Horizontal	PASS

Project Information			
Mode:	TX 2462 MHZ	Voltage:	AC 120V/50Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	TDF

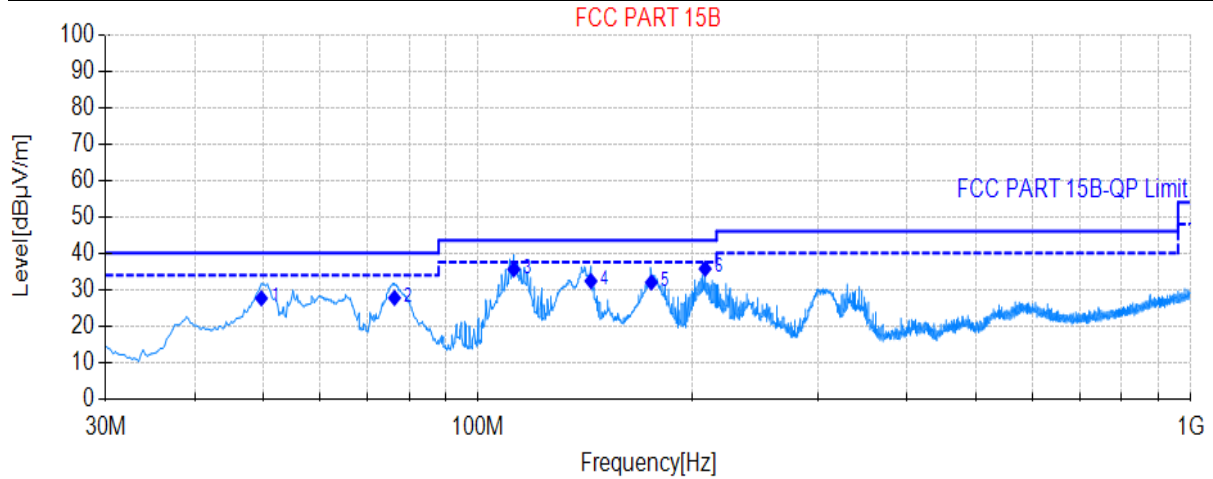

Final Data List										
NO	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	49.6425	49.94	-22.34	27.60	40.00	12.40	100	343	Horizontal	PASS
2	76.3175	52.63	-24.91	27.72	40.00	12.28	100	179	Horizontal	PASS
3	112.2075	59.12	-23.53	35.59	43.50	7.91	100	161	Horizontal	PASS
4	143.975	58.31	-25.96	32.35	43.50	11.15	100	51	Horizontal	PASS
5	175.015	56.46	-24.49	31.97	43.50	11.53	100	122	Horizontal	PASS
6	208.2375	58.69	-22.96	35.73	43.50	7.77	100	128	Horizontal	PASS

Project Information			
Mode:	TX 2462 MHZ	Voltage:	AC 120V/50Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	TDF

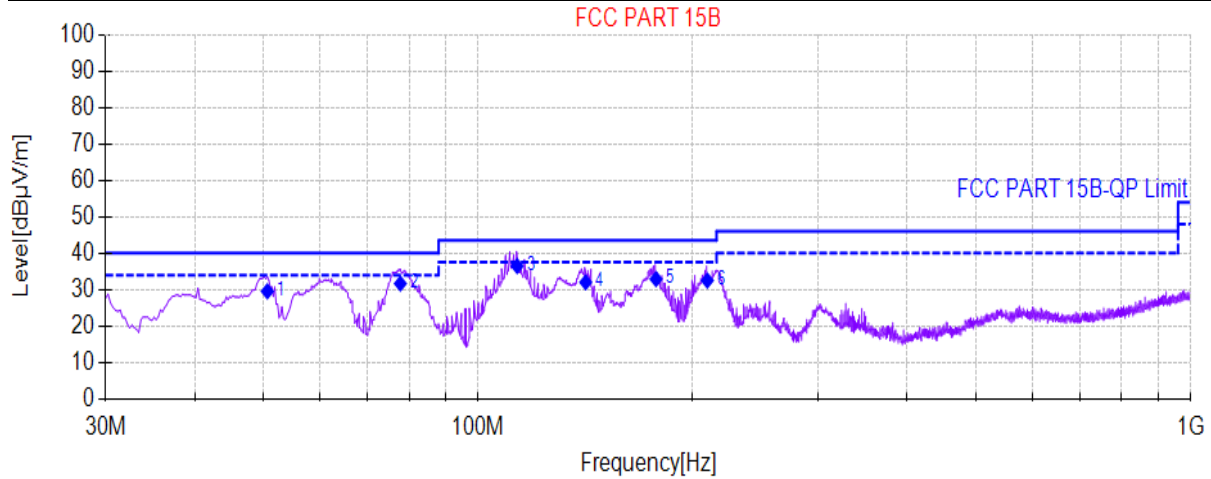

Final Data List										
NO	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	50.6125	51.80	-22.27	29.53	40.00	10.47	100	267	Vertical	PASS
2	77.7725	56.66	-25.01	31.65	40.00	8.35	100	229	Vertical	PASS
3	113.42	60.08	-23.61	36.47	43.50	7.03	100	360	Vertical	PASS
4	141.55	58.00	-25.99	32.01	43.50	11.49	100	324	Vertical	PASS
5	177.6825	57.28	-24.40	32.88	43.50	10.62	100	172	Vertical	PASS
6	209.6925	55.40	-22.92	32.48	43.50	11.02	100	47	Vertical	PASS

8.6 CONDUCTED EMISSIONS TEST

8.6.1 Applicable Standard

According to FCC Part 15.207(a)

8.6.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.6.3 Test Configuration

Test according to clause 7.3conducted emission test setup

8.6.4 Test Procedure


The EUT was placed on a table which is 0.8m above ground plane.
Maximum procedure was performed on the highest emissions to ensure EUT compliance.
Repeat above procedures until all frequency measured were complete.

8.6.5 Test Results

Pass

The 120V &240V voltage have been tested, and the worst result recorded was report as below:


Project Information			
Mode:	TX	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	James Wu

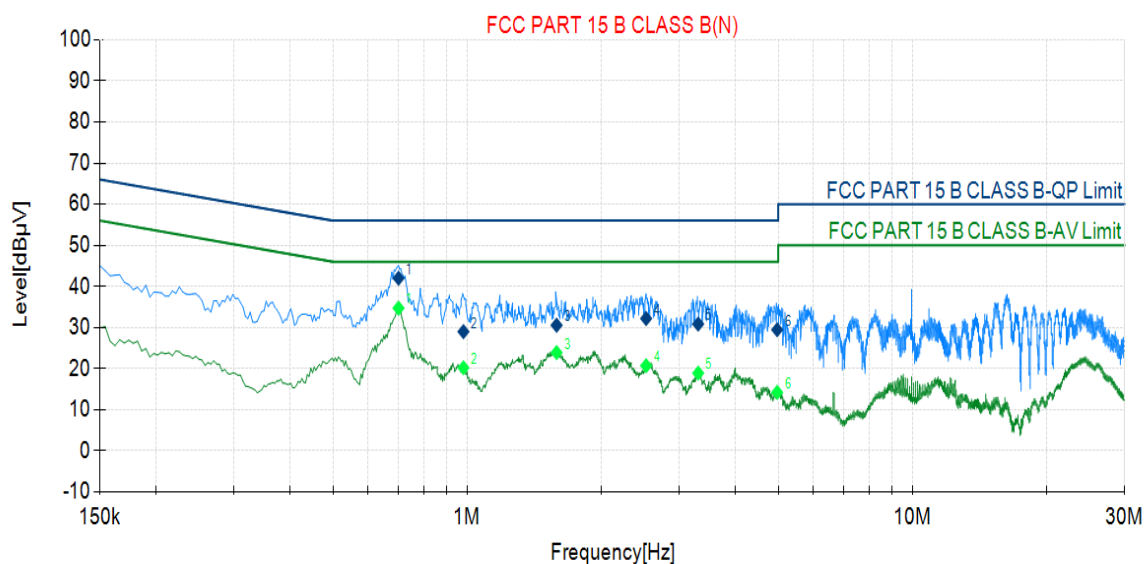

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.7020	9.44	32.56	42.00	56.00	14.00	25.27	34.71	46.00	11.29	PASS
2	0.9820	9.45	19.54	28.99	56.00	27.01	10.75	20.20	46.00	25.80	PASS
3	1.5900	9.45	21.11	30.56	56.00	25.44	14.45	23.90	46.00	22.10	PASS
4	2.5260	9.38	22.80	32.18	56.00	23.82	11.32	20.70	46.00	25.30	PASS
5	3.3060	9.31	21.52	30.83	56.00	25.17	9.60	18.91	46.00	27.09	PASS
6	4.9740	9.36	20.10	29.46	56.00	26.54	4.86	14.22	46.00	31.78	PASS

Project Information			
Mode:	TX	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	James Wu

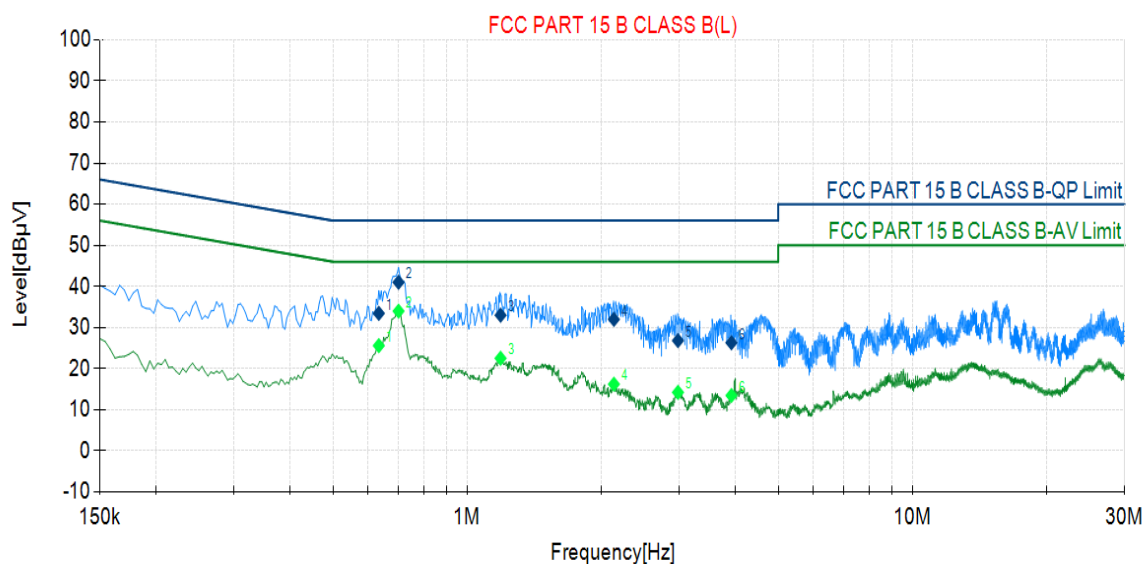

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.6340	9.56	23.88	33.44	56.00	22.56	16.03	25.59	46.00	20.41	PASS
2	0.7020	9.58	31.42	41.00	56.00	15.00	24.40	33.98	46.00	12.02	PASS
3	1.1900	9.58	23.41	32.99	56.00	23.01	12.93	22.51	46.00	23.49	PASS
4	2.1380	9.57	22.41	31.98	56.00	24.02	6.64	16.21	46.00	29.79	PASS
5	2.9780	9.57	17.25	26.82	56.00	29.18	4.66	14.23	46.00	31.77	PASS
6	3.9260	9.54	16.75	26.29	56.00	29.71	3.92	13.46	46.00	32.54	PASS

8.7 ANTENNA APPLICATION

8.7.1 Antenna Requirement

Standard	Requirement
FCC CRF Part15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.7.2 Result

PASS.

- The EUT has 1 antenna: one an PCB antenna for WIFI 2.4G, the gain is 2.5 dBi,
Note: ☒ Antenna uses a permanently attached antenna which is not replaceable.
☐ Not using a standard antenna jack or electrical connector for antenna replacement
☐ The antenna has to be professionally installed (please provide method of installation)

Which in accordance to section 15.203, please refer to the internal photos.

*** End of Report ***

声明 Statement

1. 本报告无授权批准人签字及“检验报告专用章”无效;
This report will be void without authorized signature or special seal for testing report.
2. 未经许可本报告不得部分复制;
This report shall not be copied partly without authorization.
3. 本报告的检测结果仅对送测样品有效, 委托方对样品的代表性和资料的真实性负责;
The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material.
4. 本检测报告中检测项目标注有特殊符号则该项目不在资质认定范围内, 仅作为客户委托、科研、教学或内部质量控制等目的使用;
The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
5. 本检测报告以实测值进行符合性判定, 未考虑不确定度所带来的风险, 本实验室不承担相关责任, 特别约定、标准或规范中有明确规定的除外;
The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, EMTEK shall not assume any responsibility.
6. 对本检测报告若有异议, 请于收到报告之日起 20 日内提出;
Objections shall be raised within 20 days from the date receiving the report.