

TEST REPORT FCC ID: 2AKGC-B002 For

Brushies, Inc. Oral Hygiene Adapter

Model No. : B002

Trade name : N/A

Prepared for : Brushies, Inc.

Address : 6402 Langer Lane Lino Lakes, MN 55038 United States

Prepared by : Shenzhen Alpha Product Testing Co., Ltd.

Building B, East Area of Nanchang Second, Industrial Zone,
Address

Gushu 2nd Road, Bao'an, Shenzhen, China

Report No. : T1870444 01

Date of Receipt : March 23, 2017

Date of Test : March 23, 2017-April 05, 2017

Date of Report : April 06, 2017

Version Number : REV0

TABLE OF CONTENT

| Des | script | ion | Page |
|-----|------------|--|------|
| 1 G | enera | al Information | 5 |
| | 1.1 | Description of Device (EUT) | |
| | 1.2 | Description of Test Facility | 6 |
| 2 E | MC E | Equipment List | 6 |
| | | · · · rocedure | |
| 4 | Sum | mary of Measurement | 8 |
| | 4.1 | Summary of test result | 8 |
| | 4.2 | Test connection | |
| | 4.3 | Assistant equipment used for test | 9 |
| | 4.4 | Test mode | 9 |
| | 4.5 | Test Conditions | 9 |
| | 4.6 | Measurement Uncertainty (95% confidence levels, k=2) | |
| 5 | Spu | rious Emission | |
| | 5.1 | Radiation Emission | |
| | | Radiation Emission Limits(15.209) | |
| | | Test Setup | |
| | | Test Procedure | |
| | 5.1.4 | Test Equipment Setting For emission test Result | 13 |
| | | Test Condition | _ |
| | | Test Result | _ |
| 6 | _ | VER LINE CONDUCTED EMISSION | |
| | 6.1 | Conducted Emission Limits(15.207) | |
| | 6.2 | Test Setup | |
| | 6.3 | Test Procedure | - |
| _ | 6.4 | Test Results | |
| 7 | | ducted Maximum Output Power | 21 |
| | 7.1 | Test limit | |
| | 7.2 | Test Procedure | |
| | 7.3 | Test Setup Test Results | |
| 0 | 7.4 | K POWER SPECTRAL DENSITY | |
| 8 | | Test limit | |
| | 8.1 8.2 | Method of measurement | |
| | 8.3 | Test Setup | |
| | 8.4 | Test Results | |
| 9 | | dwidth | |
| 9 | 9.1 | Test limit | |
| | 9.2 | Method of measurement | |
| | 9.3 | Test Setup | |
| | 9.4 | Test Results | |
| 10 | | d Edge Check | |
| . • | 10.1 | Test limit | |
| | 10.2 | Test Procedure | |
| | 10.3 | Test Setup | |
| | | 1 | |

13 Photographs of EUT------35

DECLARATION

Report No.: T1870444 01

Applicant : Brushies, Inc.

Manufacturer : Brushies, Inc.

Product : Oral Hygiene Adapter

(A)Model No. : B002(B)Trade Name : N/A

(C) Power supply: DC 3V from Battery

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247: 2016,

ANSI C 63.4-2014, ANSI C63.10-2013

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart B Class B limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards. This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature) :: Reak Yang
Test Engineer :: Simple Guan
Project Manager :: April 06, 2017

Report No.: T1870444 01

1 General Information

1.1 Description of Device (EUT)

Trade Name : N/A

EUT : Oral Hygiene Adapter

Model No. : B002 DIFF : N/A

Antenna Type : PCB Antenna, Maximum Gain is 1.0dBi

Operation : 2402-2480MHz

Frequency

Channel number: 40 Channels

Modulation type: GFSK

Power Supply : DC 3V from Battery

Applicant : Brushies, Inc.

Address : 6402 Langer Lane Lino Lakes, MN 55038 United States

Manufacturer : Brushies, Inc.

Address : 6402 Langer Lane Lino Lakes, MN 55038 United States

1.2 Description of Test Facility

Shenzhen Alpha Product Testing Co., Ltd Building B, East Area of Nanchang Second, Industrial Zone, Gushu 2nd Road, Bao'an, Shenzhen, China

March 25, 2015 File on Federal Communication Commission

Registration Number: 203110

July 18, 2014 Certificated by IC Registration Number: 12135A

2 EMC Equipment List

| Equipment | Manufacture | Model No. | Serial No. | Last cal. | Cal Interval |
|------------------------|--------------|-----------------------------|-----------------------|------------|--------------|
| 3m Semi-Anechoic | ETS-LINDGREN | N/A | SEL0017 | 2016.09.29 | 1Year |
| Spectrum analyzer | Agilent | E4407B | MY46185649 | 2016.09.29 | 1Year |
| Receiver | R&S | ESCI | 1166.5950K03-1 011 | 2016.09.29 | 1Year |
| Receiver | R&S | ESCI | 101202 | 2016.09.29 | 1Year |
| Bilog Antenna | Schwarzbeck | VULB 9168 | VULB9168-438 | 2016.09.30 | 2Year |
| Horn Antenna | EMCO | 3115 | 640201028-06 | 2016.09.30 | 2Year |
| Active Loop Antenna | Beijing Daze | ZN30900A | SEL0097 | 2016.09.30 | 2Year |
| Cable | Resenberger | N/A | No.1 | 2016.09.29 | 1Year |
| Cable | SCHWARZBECK | N/A | No.2 | 2016.09.29 | 1Year |
| Cable | SCHWARZBECK | N/A | No.3 | 2016.09.29 | 1Year |
| Pre-amplifier | Schwarzbeck | BBV9743 | 9743-019 | 2016.09.29 | 1Year |
| Pre-amplifier | R&S | AFS33-18002650 -30-8P-44 | SEL0080 | 2016.09.29 | 1Year |
| Base station | Agilent | E5515C | GB44300243 | 2016.09.29 | 1 Year |
| Temperature controller | Terchy | MHQ | 120 | 2016.09.29 | 1 Year |

| Power divider | Anritsu | K240C | 020346 | 2016.09.29 | 1 Year |
|------------------|-------------------|----------|------------|------------|--------|
| Signal Generator | НР | 83732B | VS3449051 | 2016.09.29 | 1 Year |
| Power Meter | Anritsu | ML2487A | 6K00001491 | 2016.09.29 | 1Year |
| Power sensor | Anritsu | ML2491A | 32516 | 2016.09.29 | 1Year |
| L.I.S.N.#1 | Schwarzbeck | NSLK8126 | 8126466 | 2016.09.29 | 1Year |
| L.I.S.N.#2 | ROHDE&SCHWAR Z | ENV216 | 101043 | 2016.09.29 | 1 Year |

3 Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The test procedure used was ANSI Standard ANSI C63.4:2014 using a 50 u H LISN. Both Lines were observed. The bandwidth of the receiver was 10kHz with an appropriate sweep speed. The ambient temperature of the EUT was 25°C with a humidity of 58%.

RADIATION INTERFERENCE: The test procedure used was ANSI Standard ANSI C63.4:2014 using a ANRITSU spectrum analyzer with a pre-selector. The analyzer was calibrated in dB above a micro volt at the output of the antenna. The resolution bandwidth was 100kHz and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3MHz above 1 GHz. The ambient temperature of the EUT was 25 °C with a humidity of 58%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer and cable loss. The antenna correction factors and cable loss are stated in terms of dB. The gain of the Pre-selector was accounted for in the Spectrum Analyzer Meter Reading. Example:

Freq (MHz) METER READING + ACF + CABLE = FS 33.20 dBuV + 10.36 dB + 0.9 dB = 44.46 dBuV/m @ 3m

ANSI STANDARD ANSI C63.4:2014 10.1.7 MEASUREMENT PROCEDURES: The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes. The situation was similar for the conducted measurement except that the table did not rotate. The EUT was setup as described in ANSI Standard ANSI C63.4:2014 10.1.7 with the EUT 40 cm from the vertical ground wall.

4 Summary of Measurement

4.1 Summary of test result

| Test Item | Test Requirement | Standards Paragraph | Result |
|---------------------|------------------|------------------------|------------|
| Spurious Emission | FCC PART 15:2016 | Section 15.247&15.209 | Compliance |
| Conduction Emission | FCC PART 15:2016 | Section 15.207 | N/A |
| Bandwidth Test | FCC PART 15:2016 | Section 15.247 | Compliance |
| Peak Power | FCC PART 15:2016 | Section 15.247 | Compliance |
| Power Density | FCC PART 15:2016 | Section 15.247 | Compliance |
| Band Edge | FCC PART 15:2016 | Section 15.247 | Compliance |
| Antenna Requirement | FCC PART 15:2016 | Section 15.203 | Compliance |

Note: The EUT has been tested as an independent unit. And Continual Transmitting in maximum power (The adapter be used during Test)

4.2 Test connection

EUT

Note:New battery is used during all test

4.3 Assistant equipment used for test

Description : N/A
Manufacturer : N/A
Model No. : N/A

4.4 Test mode

| Tested mode, channel, and data rate information | | | | | | |
|---|--------------|------|--|--|--|--|
| Mode | Frequency | | | | | |
| | | | | | | |
| | Low :CH1 | 2402 | | | | |
| GFSK | Middle: CH20 | 2440 | | | | |
| | High: CH40 | 2480 | | | | |

4.5 Test Conditions

| Temperature range | 21-25℃ |
|-------------------|-----------|
| Humidity range | 40-75% |
| Pressure range | 86-106kPa |

4.6 Measurement Uncertainty (95% confidence levels, k=2)

| Item | MU | Remark |
|---|---------|-------------|
| Uncertainty for Power point Conducted Emissions Test | 2.71dB | |
| Uncertainty for Radiation Emission test in 3m | 2.13 dB | Polarize: V |
| chamber (below 30MHz) | 2.57dB | Polarize: H |
| Uncertainty for Radiation Emission test in 3m | 3.90 dB | Polarize: V |
| chamber (30MHz to 1GHz) | 3.92dB | Polarize: H |
| Uncertainty for Radiation Emission test in 3m | 4.26 dB | Polarize: H |
| chamber (1GHz to 25GHz) | 4.28 dB | Polarize: V |
| Uncertainty for radio frequency | 1×10-9 | |
| Uncertainty for DC and low frequency voltages | 0.06% | |

5 Spurious Emission

5.1 Radiation Emission

5.1.1 Radiation Emission Limits(15.209)

| Frequencies (MHz) | Field Strength (micorvolts/meter) | Measurement Distance (meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |


Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

NOTE:


- a) The tighter limit applies at the band edges.
- b) Emission Level(dB uV/m)=20log Emission Level(uv/m)

5.1.2 Test Setup

See the next page

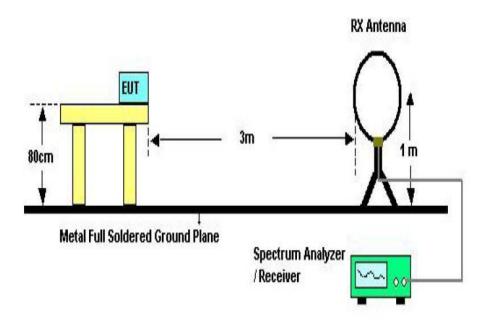

Below 30MHz Test Setup

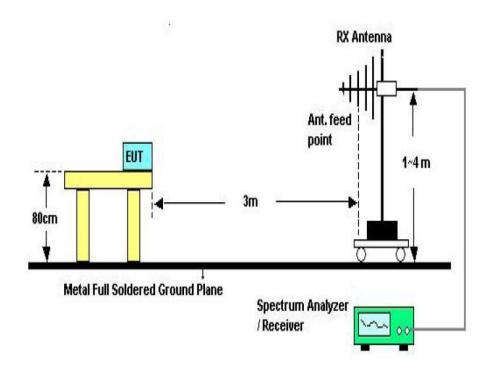

Above 30MHz Test Setup

Report No.: T1870444 01

Above 1GHz Test Setup

5.1.3 Test Procedure

- a) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1GHz, The EUT was placed on a rotating 0.8 m high above ground for below 1GHz and 1.5m high for above1GHz testing, The table was rotated 360 degrees to determine the position of the highest radiation
- b) The Test antenna shall vary between 1m and 4m,Both Horizontal and Vertical antenna are set of make measurement.
- c) The initial step in collecting conducted emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range.
 Significant Peaks are then marked. and then Qusia Peak Detector mode premeasured
- d) If Peak value comply with QP limit Below 1GHz. The EUT deemed to comply with QP limit. But the Peak value and average value both need to comply with applicable limit above 1GHz.
- e) For the actual test configuration, please see the test setup photo.

Report No.: T1870444 01

5.1.4 Test Equipment Setting For emission test Result

| 9KHz~150KHz | RBW 200Hz | VBW1KHz |
|--------------|------------|------------|
| 150KHz~30MHz | RBW 9KHz | VBW 30KHz |
| 30MHZ~1GHz | RBW 120KHz | VBW 300KHz |
| Above 1GHz | RBW 1MHz | VBW 3MHz |

5.1.5 Test Condition

Continual Transmitting in maximum power.

5.1.6 Test Result

We have scanned the 10th harmonic from 9KHz to the EUT. Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Remark: Only show the test data of the worst Channel in this report.

From 30MHz to 1000MHz: Conclusion: PASS

Site LAB Polarization: Vertical Temperature: 23.5

Limit: FCC Part15 Class B Radiation Power: Humidity: 51 %


EUT:

Mode:TX2402

Note:

Radiated Emission Measurement

Distance: 3m

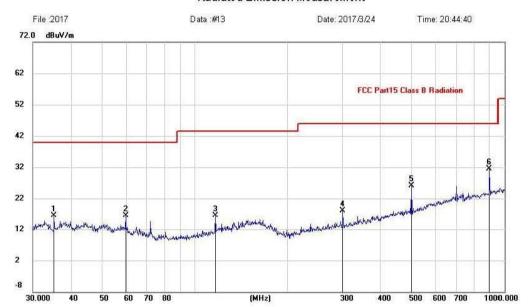

| No. | Mk | Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Margin | | Antenna Height | Table Degree | |
|-----|----|----------|------------------|-------------------|------------------|--------|--------|----------|-------------------|-----------------|---------|
| | | MHz | dBu∨ | dB | dBu√/m | dBuV/m | dB | Detector | cm | degree | Comment |
| 1 | | 35.2511 | 3.05 | 13.51 | 16.56 | 40.00 | -23.44 | peak | | | |
| 2 | | 59,6492 | 3.41 | 13.02 | 16.43 | 40.00 | -23.57 | peak | | | |
| 3 | | 116.9492 | 4.32 | 12.27 | 16.59 | 43.50 | -26.91 | peak | | | |
| 4 | | 301.4223 | 4.68 | 13.51 | 18.19 | 46.00 | -27.81 | peak | | | |
| 5 | | 501.1788 | 8.93 | 17.22 | 26.15 | 46.00 | -19.85 | peak | | | |
| 6 | * | 896.9963 | 8.54 | 22.90 | 31.44 | 46.00 | -14.56 | peak | | | |

Note:1. *:Maximum data; x:Over limit; 1:over margin.

^{2.}Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Site LAB Polarization: Horizontal Temperature: 23.5


Limit: FCC Part15 Class B Radiation Power: Humidity: 51 %

EUT: Distance: 3m

M/N:

Mode:TX2402

Note:

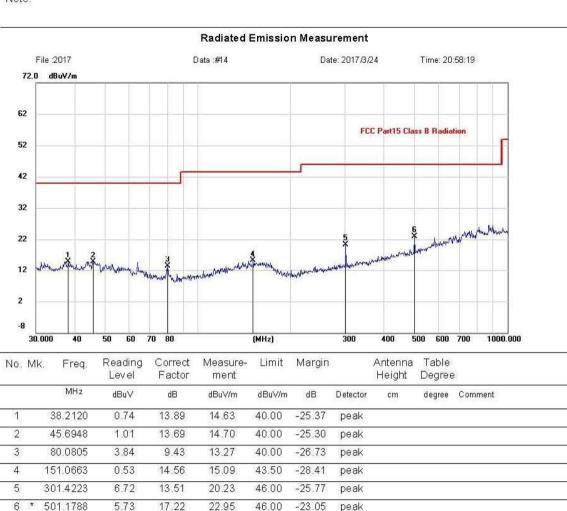

Note:1. *:Maximum data; x:Over limit; !:over margin.

F\法拉测试软件数据\2017\TEAT DATA-2017\

Page: 1

Engineer Signature:

^{2.}Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

From 1G-25GHz

| EUT | Oral Hygiene Adapter | Model Name | B002 |
|-------------|----------------------|-------------------|-----------------------|
| Temperature | 26°C | Relative Humidity | 56% |
| Pressure | 960hPa | Test voltage | DC 3V from Battery |
| Test Mode | TX Low | | |

| Ante | Antenna Polarity: Vertical | | | | | | | | |
|------|----------------------------|---------------------------|-----------------------------|-----------------|-----------------------|--------------------|-------------------|----------------|--------|
| No | Freq (MHz) | Read Level (dBuV/m) | Antenna Factor (dB/m) | Cable loss(d B) | Amp Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
| 1 | 4804 | 43.82 | 33.95 | 10.18 | 34.26 | 53.69 | 74 | 20.31 | PK |
| 2 | 4804 | 33.17 | 33.95 | 10.18 | 34.26 | 43.04 | 54 | 10.96 | AV |
| 3 | 7206 | / | | | | | | | |
| 4 | 9608 | / | | | | | | | |
| 5 | 12010 | / | | | | | | | |
| Ante | nna Polar | rity: Horizo | ntal | | | | | | |
| 1 | 4804 | 46.21 | 33.95 | 10.18 | 34.26 | 56.08 | 74 | 17.92 | PK |
| 2 | 4804 | 35.34 | 33.95 | 10.18 | 34.26 | 45.21 | 54 | 8.79 | AV |
| 3 | 7206 | / | | | | | | | · |
| 4 | 9608 | / | | | | | | | · |
| 5 | 12010 | / | | | | | | | |

- 1,Measuring frequency from 1GHz to 25GHz
- 2,Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK
- 2,Spectrum Set for AV measure: RBW=1MHz, VBW=3MHz, Sweep time=Auto, Detector: RMS
- 3, Result = Read level + Antenna factor + cable loss-Amp factor
- 4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

| EUT | Oral Hygiene Adapter | Model Name | B002 |
|-------------|----------------------|-------------------|-----------------------|
| Temperature | 26°C | Relative Humidity | 56% |
| Pressure | 960hPa | Test voltage | DC 3V from Battery |
| Test Mode | TX Mid | | |

| Ante | Antenna Polarity: Vertical | | | | | | | | | | | |
|-------|----------------------------|---------------------------|-----------------------------|-----------------|-----------------------|-----------------|-----------------------|-------------|--------|--|--|--|
| No | Freq (MHz) | Read Level (dBuV/m) | Antenna Factor (dB/m) | Cable loss(d B) | Amp Factor (dB) | Result (dBuV/m) | Limit (dBuV/ m) | Margin (dB) | Remark | | | |
| 1 | 4880 | 43.59 | 33.93 | 10.2 | 34.29 | 53.43 | 74 | 20.57 | PK | | | |
| 2 | 4880 | 33.42 | 33.93 | 10.2 | 34.29 | 43.26 | 54 | 10.74 | AV | | | |
| 3 | 7320 | / | | | | | | | | | | |
| 4 | 9760 | / | | | | | | | | | | |
| 5 | 12200 | / | | | | | | | | | | |
| Anter | nna Polari | ity: Horizon | ıtal | | | | | | | | | |
| 1 | 4880 | 45.89 | 33.93 | 10.2 | 34.29 | 55.73 | 74 | 18.27 | PK | | | |
| 2 | 4880 | 34.96 | 33.93 | 10.2 | 34.29 | 44.8 | 54 | 9.2 | AV | | | |
| 3 | 7320 | / | | | | | | | | | | |
| 4 | 9760 | / | | | | | | | | | | |
| 5 | 12200 | / | | | | | | | | | | |

- 1, Measuring frequency from 1GHz to 25GHz
- 2,Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK
- 2,Spectrum Set for AV measure: RBW=1MHz, VBW=3MHz, Sweep time=Auto, Detector: RMS
- 3, Result = Read level + Antenna factor + cable loss-Amp factor
- 4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Report No.: T1870444 01

| EUT | Oral Hygiene Adapter | Model Name | B002 |
|-------------|----------------------|-------------------|-----------------------|
| Temperature | 26°C | Relative Humidity | 56% |
| Pressure | 960hPa | Test voltage | DC 3V from Battery |
| Test Mode | TX High | | |

| Ante | Antenna Polarity: Vertical | | | | | | | | | | | | |
|------|----------------------------|------------------------|-----------------------------|-----------------|-----------------------|-----------------|-------------------|-------------|--------|--|--|--|--|
| No | Freq (MHz) | Read Level (dBuV/m) | Antenna Factor (dB/m) | Cable loss (dB) | Amp Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | | | | |
| 1 | 4960 | 42.98 | 33.98 | 10.22 | 34.25 | 52.93 | 74 | 21.07 | PK | | | | |
| 2 | 4960 | 32.29 | 33.98 | 10.22 | 34.25 | 42.24 | 54 | 11.76 | AV | | | | |
| 3 | 7440 | / | | | | | | | | | | | |
| 4 | 9920 | / | | | | | | | | | | | |
| 5 | 12400 | / | | | | | | | | | | | |
| Ante | enna Po | larity: Horiz | ontal | | | | | | | | | | |
| 1 | 4960 | 45.17 | 33.98 | 10.22 | 34.25 | 55.12 | 74 | 18.88 | PK | | | | |
| 2 | 4960 | 34.85 | 33.98 | 10.22 | 34.25 | 44.8 | 54 | 9.2 | AV | | | | |
| 3 | 7440 | / | | | | | | | | | | | |
| 4 | 9920 | / | | | | | | | | | | | |
| 5 | 12400 | / | | | | | | | | | | | |

- 1, Measuring frequency from 1GHz to 25GHz
- 2, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK
- 2,Spectrum Set for AV measure: RBW=1MHz, VBW=3MHz, Sweep time=Auto, Detector: RMS
- 3, Result = Read level + Antenna factor + cable loss-Amp factor
- 4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

6 POWER LINE CONDUCTED EMISSION

6.1 Conducted Emission Limits(15.207)


| Frequency | Limits dB(μV) | | | | | |
|-------------|------------------|---------------|--|--|--|--|
| MHz | Quasi-peak Level | Average Level | | | | |
| 0.15 -0.50 | 66 -56* | 56 - 46* | | | | |
| 0.50 -5.00 | 56 | 46 | | | | |
| 5.00 -30.00 | 60 | 50 | | | | |

Notes: 1. *Decreasing linearly with logarithm of frequency.

- 2. The lower limit shall apply at the transition frequencies.
- 3. The limit decreases in line with the logarithm of the frequency in the rang of 0.15 to 0.50 MHz.

Report No.: T1870444 01

6.2 Test Setup

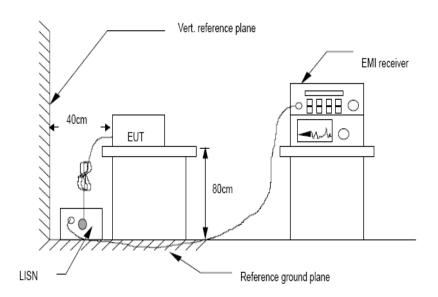

6.3 Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI ANSI C63.4:2014 on Conducted Emission Measurement. The bandwidth of test receiver (R & S ESCDLB ECHO 50) is set at 9 kHz.

6.4 Test Results

The EUT is supplied by Inside battery, so this item does not applicable.

7 Conducted Maximum Output Power

7.1 Test limit

Please refer section RSS-247 & 15.247.


7.2 Test Procedure

Details see the KDB558074 Meas Guidance V03

- 7.2.1 Place the EUT on the table and set it in transmitting mode.
- 7.2.2 Measure out each mode and each bands peak output power of EUT.

Note: The cable loss and attenuator loss were offset into measure device as amplitude offset. Details see the KDB558074 DTS Meas Guidance V03

7.3 Test Setup



7.4 Test Results

PASS

Detailed information please see the following page.

| Channel | Frequency (MHz) | PK Output Power (dBm) | PK Output Power (mW) | Limit (dBm) |
|---------|-----------------|-----------------------------|----------------------------|----------------|
| CH1 | 2402 | -3.127 | 0.487 | 21 |
| CH20 | 2440 | -3.327 | 0.465 | 21 |
| CH40 | 2480 | -3.327 | 0.465 | 21 |


8 PEAK POWER SPECTRAL DENSITY

- 8.1 Test limit
- 8.1.1 Please refer section RSS-247 & 15.247.
- 8.1.2 For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
- 8.1.3 The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.
- 8.2 Method of measurement

Details see the KDB558074 DTS Meas Guidance V03

- 8.2.1 Place the EUT on the table and set it in transmitting mode.
- 8.2.2 Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 8.2.3 Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, detail see the test plot.
- 8.2.4 Record the max reading.
- 8.2.5 Repeat the above procedure until the measurements for all frequencies are completed.

8.3 Test Setup



8.4 Test Results

PASS.
Detailed information please see the following page.

| Channel | Frequency (MHz) | Power Spectral Density (dBm) | Limit (dBm) | Result |
|---------|--------------------|------------------------------|----------------|--------|
| CH1 | 2402 | -14.468 | 8 | PASS |
| CH20 | 2440 | -14.680 | 8 | PASS |
| CH40 | 2480 | -14.817 | 8 | PASS |

CH Low:



CH Mid:



CH Hig:



9 Bandwidth

9.1 Test limit

Please refer sectionRSS-247 & 15.247


For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz.

9.2 Method of measurement

Details see the KDB558074 D01 Meas Guidance

- a) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.
- b) The test receiver set RBW = 100KHz, VBW≥3RBW, Sweep time set auto, detail see the test plot.

9.3 Test Setup



9.4 Test Results

PASS.

Detailed information please see the following page.

| Channel | Frequency | 6dB Bandwidth | Limit | Result |
|---------|-----------|---------------|-------|--------|
| | (MHz) | (MHz) | (MHz) | |
| CH1 | 2402 | 0.712 | 0.5 | PASS |
| CH20 | 2440 | 0.707 | 0.5 | PASS |
| CH40 | 2480 | 0.725 | 0.5 | PASS |

Report No.: T1870444 01

:

CH Low:



CH Mid:



CH High:



10 Band Edge Check

10.1 Test limit

Please refer section RSS-GEN&15.247.

10.2 Test Procedure

- 12.2.1 Put the EUT on a 0.8m high table, power on the EUT. Emissions were scanned and measured rotating the EUT to 360 degrees, Find the maximum Emission
- 12.2.2 Check the spurious emissions out of band.
- 12.2.3 RBW 1MHz ,VBW 3MHz ,peak detector for peak value , RBW 1MHz ,VBW 3MHz ,RMS detector for AV value.

10.3 Test Setup

Same as 5.2.2.

10.4 Test Result

PASS.

Detailed information please see the following page.

Radiated Method:

GFSK

| EUT: Oral H | ygiene Ada | pter | | M/N: | B002 | | | |
|---------------|---------------------------|-----------------------------|---------|-----------------------|-----------------|-------------------|----------------|--------|
| Power: DC 3 | V from Batt | tery | | | | | | |
| Test date: 20 | 17-04-01 | Test site | : 3m Cl | namber | Tested by | : Reak | | |
| Test mode: T | x Low | | | | | | | |
| Antenna pola | arity: Vertica | al | | | | | | |
| Freq (MHz) | Read Level (dBuV/m) | Antenna Factor (dB/m) | | Amp Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
| 2390 | 43.22 | 27.62 | 3.92 | 34.97 | 39.79 | 74 | 34.21 | PK |
| | | | | | | | | |
| Antenna Pola | arity: Horizo | ontal | | | | | | |
| 2390 | 45.37 | 27.62 | 3.92 | 34.97 | 41.94 | 74 | 32.06 | PK |
| | | | | | | | | |
| | | | | | | | | |
| Note: | I. | ı | | ı | | | 1 | |

Band Edge Test result

- 1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK
- 2, Spectrum Set for AV measure: RBW=1MHz, VBW=3MHz, Sweep time=Auto, Detector: RMS
- 3, Result = Read level + Antenna factor + cable loss-Amp factor
- 4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Report No.: T1870444 01


| | | | Band Ed | dge Test | result | | | | | |
|-------------------------------------|---------------------------|-----------------------------|---------|-----------------------|-----------------|-------------------|----------------|--------|--|--|
| EUT: Oral Hygiene Adapter M/N: B002 | | | | | | | | | | |
| Power: DC 3 | V from Batt | ery | | | | | | | | |
| Test date: 20 | 17-04-01 | Test site | : 3m Cl | namber | Tested by | : Reak | | | | |
| Test mode: T | x High | | | | | | | | | |
| Antenna pola | rity: Vertica | al | | | | | | | | |
| Freq (MHz) | Read Level (dBuV/m) | Antenna Factor (dB/m) | | Amp Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | | |
| 2483.5 | 43.67 | 27.89 | 4 | 34.97 | 40.59 | 74 | 33.41 | PK | | |
| 2483.5 | | | | | | 54 | | AV | | |
| | | | | | | | | | | |
| | | · | | | | | | | | |
| | | | | | | | | | | |


Antenna Polarity: Horizontal

| antenna i otarity. Horizontai | | | | | | | | | | | |
|-------------------------------|-------|-------|---|-------|-------|----|-------|----|--|--|--|
| 2483.5 | 45.81 | 27.89 | 4 | 34.97 | 42.73 | 74 | 31.27 | PK | | | |
| 2483.5 | | | | | 1 | 54 | | AV | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |

- 1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK
- 2, Spectrum Set for AV measure: RBW=1MHz, VBW=3MHz, Sweep time=Auto, Detector: RMS
- 3, Result = Read level + Antenna factor + cable loss-Amp factor
- 4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Conducted Method: GFSK

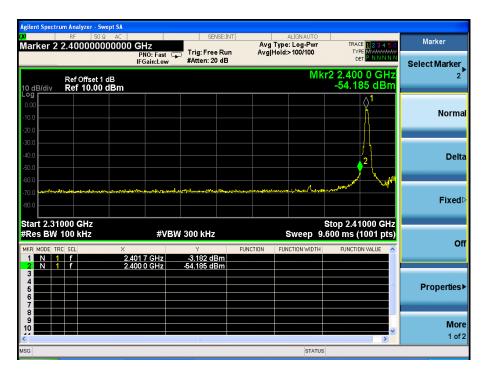

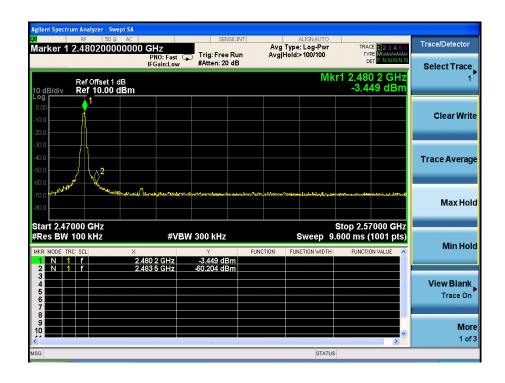

11 Antenna Requirement

11.1 Standard Requirement


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.


11.2 Antenna Connected Construction

The antenna is PCB antenna and no consideration of replacement. Please see EUT photo for details.

11.3 Result

The EUT antenna is PCB Antenna. It comply with the standard requirement.

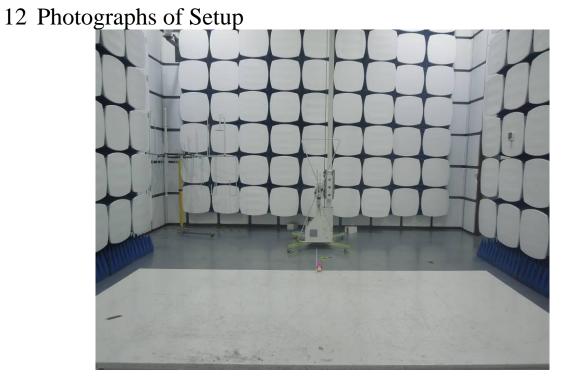

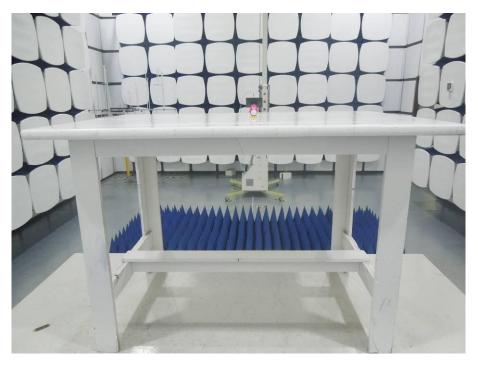


13 Photographs of EUT








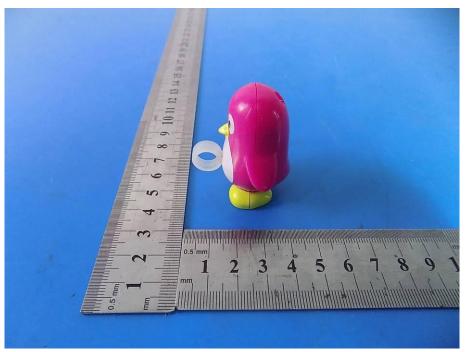










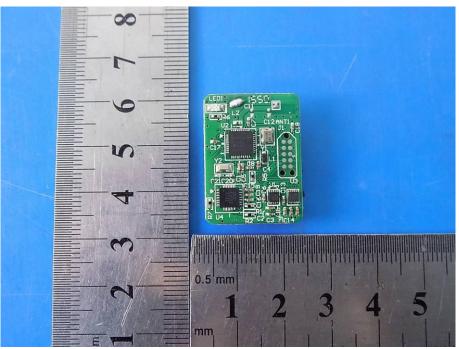

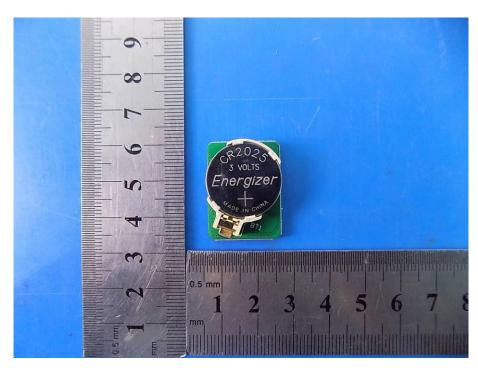

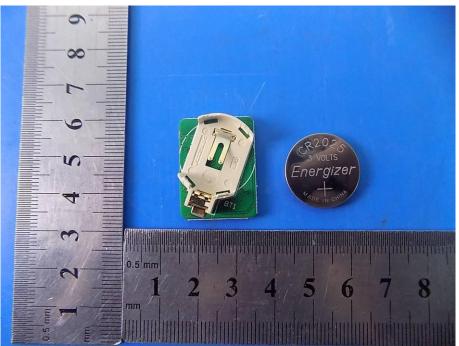



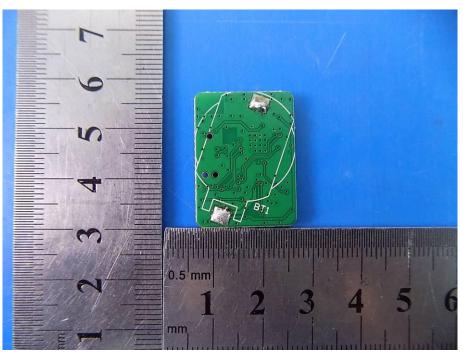

-----END OF REPORT-----