FCC Test Report

Report No.: AGC00165161101FE07

FCC ID : 2AKGQS909

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION: Mobile Phone

BRAND NAME : Bluesky

MODEL NAME : Bluesky Shine S909

CLIENT : Bluesky Samoa

DATE OF ISSUE : Nov. 18, 2016

STANDARD(S) : FCC Part 15 Rules

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

AGC TO A LANGE TO A LA

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report No.: AGC00165161101FE07 Page 2 of 29

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Nov. 18, 2016	Valid	Original Report

Report No.: AGC00165161101FE07 Page 3 of 29

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. SYSTEM DESCRIPTION	5
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION	6
5. SUPPORT EQUIPMENT	7
6. TEST FACILITY	8
7. FCCLINE CONDUCTED EMISSION TEST	10
7.1. LIMITS OF LINE CONDUCTED EMISSION TEST	10
7.2. BLOCK DIAGRAM OF TEST SETUP	10
7.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST	11
7.4. TEST RESULT OF LINE CONDUCTED EMISSION TEST	12
8. FCC RADIATED EMISSION TEST	14
8.1. LIMITS OF RADIATED EMISSION TEST	14
8.2. BLOCK DIAGRAM OF TEST SETUP	14
8.3. PROCEDURE OF RADIATED EMISSION TEST	
8.4. TEST RESULT OF RADIATED EMISSION TEST	17
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	21
APPENDIX B: PHOTOGRAPHS OF EUT	23

Page 4 of 29

1. VERIFICATION OF CONFORMITY

Applicant	Bluesky Samoa		
Address	Maluafou Headquarters, Apia, SAMOA 0000		
Manufacturer	Huano International Technology Ltd.		
Address	Room 402, Building A, ChuangXin Technology Plaza(Phase 1), Chegongmiao, Futian District, Shenzhen, China		
Product Designation	Mobile Phone		
Brand Name	Bluesky		
Test Model	Bluesky Shine S909		
Date of test	Nov. 10, 2016~Nov. 18, 2016		
Deviation	None		
Condition of Test Sample	Normal		
Report Template	AGCRT-US-IT/AC		

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. for compliance with the requirements set forth in the FCC Rules and Regulations Part 15, the measurement procedure according to ANSI C63.4:2014. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Tested By	Vota Zhang	
	Dota Zhang(Zhang Jianfeng)	Nov. 18, 2016
Reviewed By	Bore xie	
	Bart Xie(Xie Xiaobin)	Nov. 18, 2016
Approved By	Solya shong	
	Solger Zhang(Zhang Hongyi) Authorized Officer	Nov. 18, 2016

Page 5 of 29

2. SYSTEM DESCRIPTION

EUT test procedure:

- 1. Connect EUT and peripheral devices (PC) through USB port.
- 2. Power on the EUT, use the software to transfer data between EUT and PC.
- 3. Make sure the EUT operates normally during the test.

Test Mode

TEST MODE DESCRIPTION			
NO.	TEST MODE DESCRIPTION	WORST	
1	USB (connection for data transferring)	V	

Note:

- 1.V means EMI worst mode
- 2 .Other modes have been verified through VOC mode.
- 3. USB cable is provided by AGC-Lab.

3. MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Conducted measurement: +/- 2.75dB Radiated measurement: +/- 3.2Db

Summary Of Test Results

FCC Rules	Description Of Test	Result
§15.107	Conduction Emission	Compliant
§15.109	Radiated Emission	Compliant
§15.33	Frequency range of radiated measurement	Compliant

Report No.: AGC00165161101FE07 Page 6 of 29

4. PRODUCT INFORMATION

Housing Type	plastics
Adapter Test Model Name	Bluesky Shine S909
Adapter Input	AC100-240V, 50-60Hz, 200mA
Adapter Output	DC5V, 500mA

I/O Port Information (⊠Applicable ☐Not Applicable)

I/O Port of EUT					
I/O Port Type Q'TY Cable Tested with					
USB Port	1	1.0 m, unshielded	1		
Earphone Port	1	1.0 m, unshielded	1		

Page 7 of 29

5. SUPPORT EQUIPMENT

Device Type	Manufacturer	Model Name	Serial No.	Data Cable	Power Cable
Notebook	Lenovo	B460	WB03928113	1	1.5m unshielded
AC Adapter	N/A	42T4416	PA-1650-54I	1	1.5m unshielded

Note: All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.

Report No.: AGC00165161101FE07 Page 8 of 29

6. TEST FACILITY

Site Dongguan Precise Testing Service Co., Ltd.			
Location Building D, Baoding Technology Park, Guangming Road2, Dongcheng District, Dongguan, Guangdong, China,			
FCC Registration No.	371540		
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2014.		

ALL TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHZ)

	CRITICAL TELEVISION TE						
Radiated Emission Test Site							
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration		
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 3, 2016	July 2, 2017		
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 3, 2016	July 2, 2017		
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 3, 2016	July 2, 2017		
RF Cable	SCHWARZBECK	AK9515E	96221	July 3, 2016	July 2, 2017		
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 5, 2016	June 4, 2017		
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A		
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 5, 2016	June 4, 2017		
Spectrum analyzer	Agilent	E4407B	MY46185649	June 5, 2016	June 4, 2017		

FOR RADIATED EMISSION TEST (1GHZ ABOVE)

Radiated Emission Test Site						
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration	
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 3, 2016	July 2, 2017	
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 10, 2016	July 9, 2017	
Spectrum Analyzer	Agilent	E4411B	MY4511453	July 3, 2016	July 2, 2017	
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 6, 2016	July 5, 2017	
RF Cable	SCHWARZBECK	AK9515H	96220	July 7, 2016	July 6, 2017	
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 5, 2016	June 4, 2017	

Report No.: AGC00165161101FE07 Page 9 of 29

MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A	
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 5, 2016	June 4, 2017	

	Conducted Emission Test Site										
Name of Equipment	Manufacturer Model Number Serial Number Calibrati				Due Calibration						
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 3, 2016	July 2, 2017						
Artificial Mains Network	Narda	L2-16B	000WX31025	July 7, 2016	July 6, 2017						
Artificial Mains Network (AUX)	Narda	Narda L2-16B		July 7, 2016	July 6, 2017						
RF Cable	SCHWARZBECK	AK9515E	96222	July 3, 2016	July 2, 2017						
Shielded Room	CHENGYU	843	PTS-002	June 5, 2016	June 4, 2017						

Page 10 of 29

7. FCCLINE CONDUCTED EMISSION TEST


7.1. LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum RF Line Voltage					
Frequency	Q.P.(dBuV)	Average(dBuV)				
150kHz-500kHz	66-56	56-46				
500kHz-5MHz	56	46				
5MHz-30MHz	60	50				

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

7.2. BLOCK DIAGRAM OF TEST SETUP

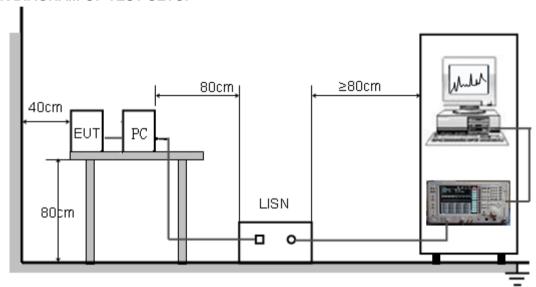

Page 11 of 29

7.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST

(1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.


- (2) Support equipment, if needed, was placed as per ANSI C63.4.
- (3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- (4) The EUT received DC5V power from PC with receive AC120V/60Hz power from a LISN.
- (5) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- (6) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- (7) During the above scans, the emissions were maximized by cable manipulation.
- (8) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions.
- (9) Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.

The test data of the worst case condition (mode 1) was reported on the Summary Data page.

Page 12 of 29

7.4. TEST RESULT OF LINE CONDUCTED EMISSION TEST

LINE CONDUCTED EMISSION TEST-L

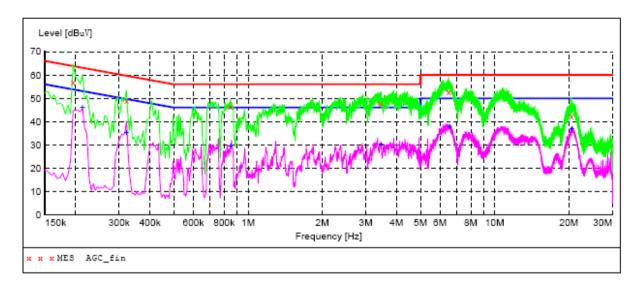

MEASUREMENT RESULT: "AGC fin"


2016/11/16 17: Frequency		Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBuV	dB	dBuV	dB				SIAIL
0.195000 0.321000 0.847500 3.457500 6.504000 20.503500	57.10 48.80 46.40 47.80 52.80 42.50	10.3 10.3 10.4 10.5 10.6 12.1	64 60 56 56 60	6.7 10.9 9.6 8.2 7.2 17.5	QP QP QP QP QP QP	L1 L1 L1 L1 L1 L1	FLO FLO FLO FLO FLO	ON ON ON ON ON

MEASUREMENT RESULT: "AGC_fin2"

2016/11/16 17 Frequency		Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBuV	dB	dBuV	dB				JIAIL
0.213000 0.321000 0.847500 3.457500 6.585000 20.562000	46.00 35.30 29.50 30.40 37.80 36.90	10.3 10.3 10.4 10.5 10.6 12.1	53 50 46 46 50 50	14.4 16.5	AV AV AV AV AV	L1 L1 L1 L1 L1 L1	FLO FLO FLO FLO FLO	ON ON ON ON

Report No.: AGC00165161101FE07 Page 13 of 29

LINE CONDUCTED EMISSION TEST-N

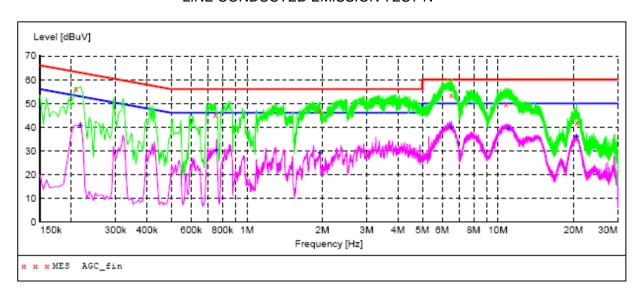

MEASUREMENT RESULT: "AGC fin"

2016/11/16 17:	48							
Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX
								STATE
MHz	dBuV	dB	dBuV	dB				
0.208500	56.20	10.3	63	7.1	OP	N	FLO	ON
0.748500	45.30	10.3	56	10.7	QP	N	FLO	ON
1.954500	47.00	10.4	56	9.0	QP	N	FLO	ON
6.526500	53.40	10.6	60	6.6	QP	N	FLO	ON
10.761000	49.90	10.8	60	10.1	QP	N	FLO	ON
20.589000	41.80	12.1	60	18.2	QP	N	FLO	ON

MEASUREMENT RESULT: "AGC fin2"

2016/11/16 17: Frequency		Transd	Limit	Margin	Detector	Line	PE	AUX
MHz	dBuV	dB	dBuV	dB				STATE
0.217500 0.757500	40.50	10.3	53 46	12.4 15.7	AV AV	N N	FLO FLO	ON
1.954500	29.20	10.4	46	16.8	AV	N	FLO	ON
6.526500 10.990500 20.589000	39.70 39.60 36.00	10.6 10.8 12.1	50 50 50	10.3 10.4 14.0	AV AV AV	N N N	FLO FLO	ON ON

RESULT: PASS

Page 14 of 29

8. FCC RADIATED EMISSION TEST

8.1. Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (m)	Maximum Field Strength Limit (dBuV/m/ Q.P.)
30~88	3	40.0
88~216	3	43.5
216~960	3	46.0
Above 960	3	54.0

Note: The lower limit shall apply at the transition frequency.


8.1.1 The following table is the setting of spectrum analyzer and receiver:

Spectrum Parameter	Setting				
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP				
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP				
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP				
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/1MHz for Peak, 1MHz/10Hz for Average				

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP


8.2. BLOCK DIAGRAM OF TEST SETUP

System Diagram of Connections between EUT and Simulators

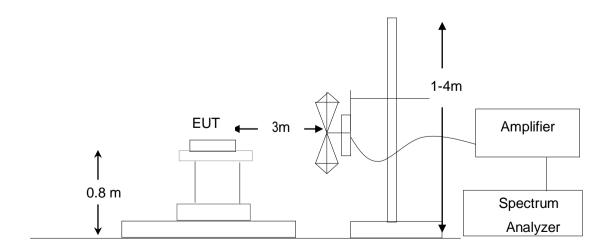

Report No.: AGC00165161101FE07 Page 15 of 29

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

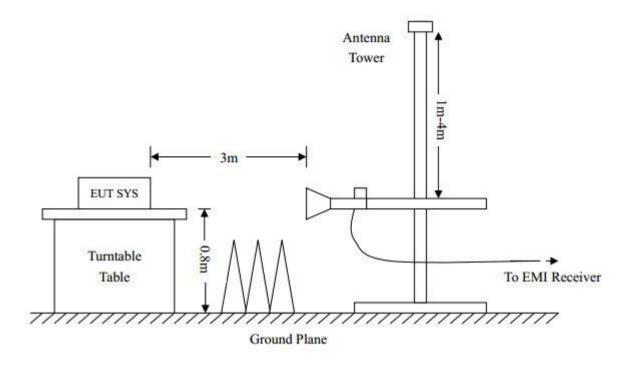

Page 16 of 29

8.3. PROCEDURE OF RADIATED EMISSION TEST

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.

- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Then 1MHz RBW and 3MHz VBW for average reading in spectrum analyzer. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.
- 11. The test data of the worst case condition (mode 1) was reported on the Summary Data page.


Temperature: 25.3

Humidity: 55.2 %

Page 17 of 29

8.4. TEST RESULT OF RADIATED EMISSION TEST

Radiated Emission Test at 3m Distance-Horizontal

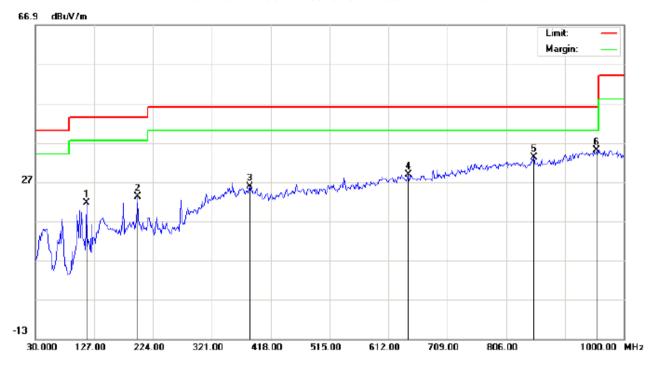

Site: site #1 Polarization: Horizontal Limit: FCC Class B 3M Radiation Power:

EUT: Mobile Phone Distance: 3m

M/N: Bluesky Shine S909


Mode: USB Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		114.0667	14.42	7.23	21.65	43.50	-21.85	peak			
2		198.1333	11.32	11.91	23.23	43.50	-20.27	peak			
3		384.0500	6.75	18.96	25.71	46.00	-20.29	peak			
4		644.3333	5.05	23.84	28.89	46.00	-17.11	peak			
5		851.2667	5.83	27.34	33.17	46.00	-12.83	peak			
6	*	954.7333	5.00	29.95	34.95	46.00	-11.05	peak			

AC 120V/60Hz

Page 18 of 29

Radiated Emission Test at 3m Distance-Vertical

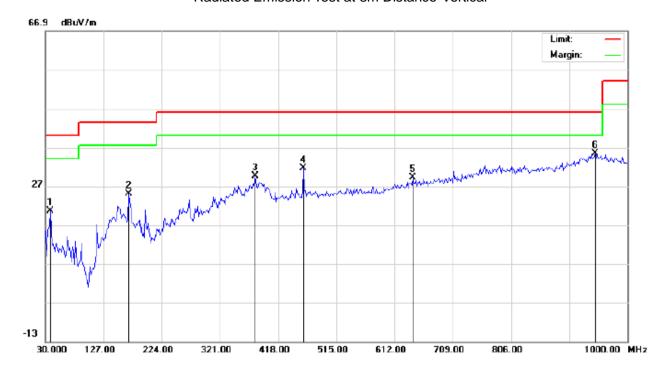

Site: site #1 Polarization: Vertical Temperature: 25.3 Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 55.2 %

EUT: Mobile Phone Distance: 3m

M/N: Bluesky Shine S909

Mode: USB Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		38.0833	14.19	6.39	20.58	40.00	-19.42	peak			
2		169.0333	10.19	14.76	24.95	43.50	-18.55	peak			
3		379.2000	10.67	18.93	29.60	46.00	-16.40	peak			
4		460.0333	10.84	20.70	31.54	46.00	-14.46	peak			
5		642.7167	5.44	23.69	29.13	46.00	-16.87	peak			
6	*	946.6500	5.58	29.91	35.49	46.00	-10.51	peak			


RESULT: PASS

Note: 1.Measurement = Reading + Factor, Over = Measurement - Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 19 of 29

Radiated Emission Above 1GHZ (1-10th Harmonics) –Horizontal

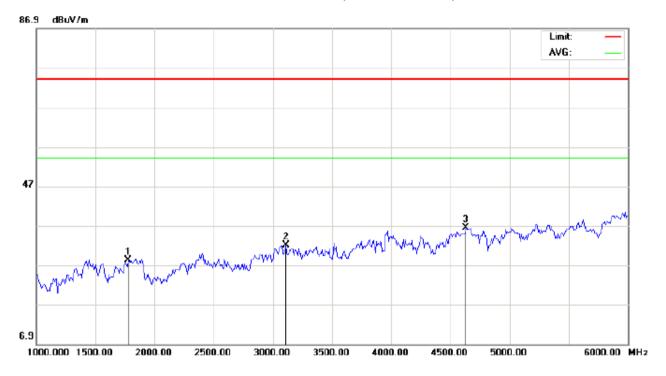

Site: site #1 Polarization: Horizontal Temperature: 22.2
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: AC 120V/60Hz Humidity: 51.6 %

EUT: Mobile Phone Distance: 3m


M/N: Bluesky Shine S909

Mode:USB Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		1775.000	28.22	0.00	28.22	74.00	-45.78	peak			
2		3108.333	31.97	0.00	31.97	74.00	-42.03	peak			
3	*	4633.333	36.49	0.00	36.49	74.00	-37.51	peak			

Page 20 of 29

Radiated Emission Above 1GHZ (1-10th Harmonics) –Vertical

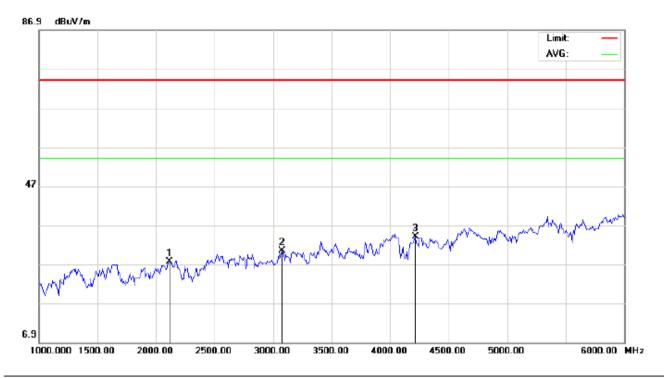

Site: site #1 Polarization: Vertical Temperature: 22.2 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: AC 120V/60Hz Humidity: 51.6 %

EUT: Mobile Phone Distance: 3m

M/N: Bluesky Shine S909

Mode:USB Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2116.667	27.54	0.00	27.54	74.00	-46.46	peak			
2		3075.000	30.33	0.00	30.33	74.00	-43.67	peak			
3	*	4216.667	34.08	0.00	34.08	74.00	-39.92	peak			

Note: 1.The Eut operates at 2400~2483.5MHz, according to FCC part 15.33, if the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. It's approximately to 25G.

- 2.6~25GHz at least have 20dB margin. No recording in the test report.
- 3. Factor=Antenna Factor + Cable loss Amplifier gain, Margin=Measurement-Limit.
- 4. The "Factor" value can be calculated automatically by software of measurement system.


Page 21 of 29

APPENDIX A: PHOTOGRAPHS OF TEST SETUP


FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP

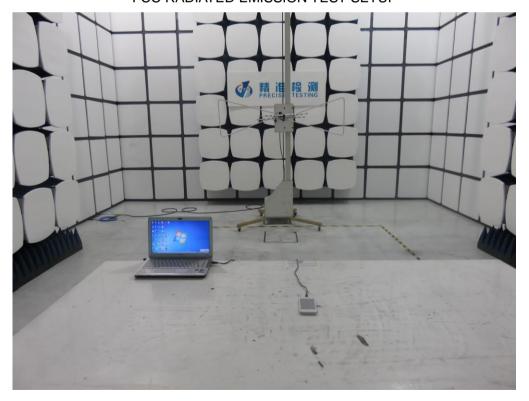

Report No.: AGC00165161101FE07 Page 22 of 29

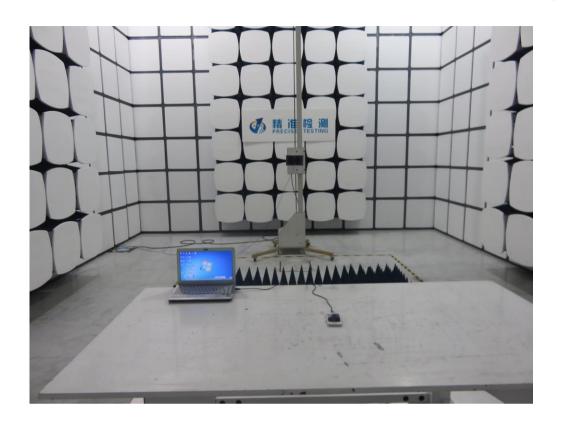

Page 23 of 29

APPENDIX B: PHOTOGRAPHS OF EUT

TOTAL VIEW OF EUT




THE LABEL OF ADAPTER



Report No.: AGC00165161101FE07 Page 24 of 29

THE LABEL OF BATTERY

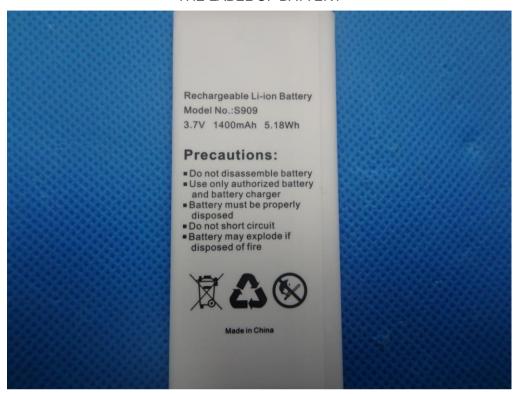

TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT




Report No.: AGC00165161101FE07 Page 27 of 29

RIGHT VIEW OF EUT



OPEN VIEW OF EUT-1

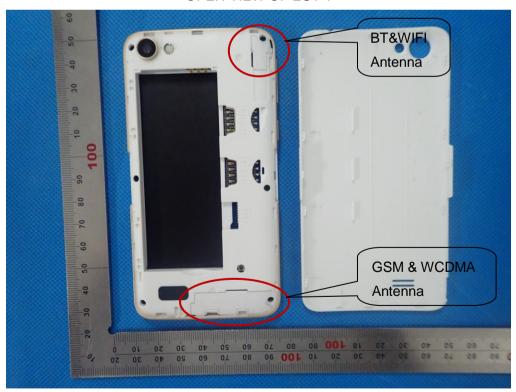


Report No.: AGC00165161101FE07 Page 28 of 29

OPEN VIEW OF EUT-2




OPEN VIEW OF EUT-3

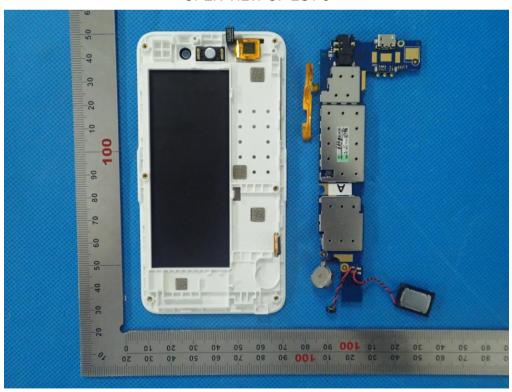


Report No.: AGC00165161101FE07 Page 29 of 29

INTERNAL VIEW OF EUT-1

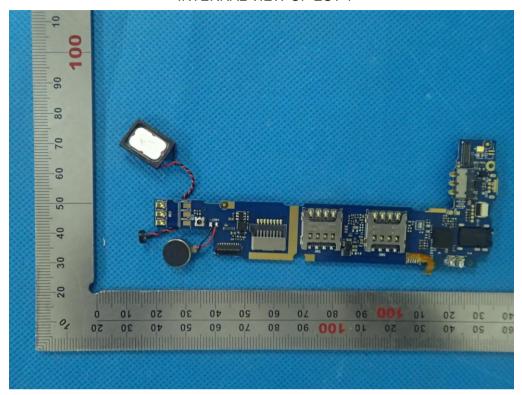

INTERNAL VIEW OF EUT-2

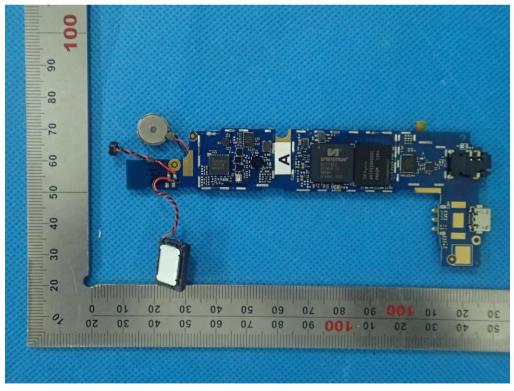

----END OF REPORT----