FCC Test Report

Report No.: AGC08664161102FE03

FCC ID : 2AKH2BQ889

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION: Bluetooth Speaker Boom Box

BRAND NAME : N/A

MODEL NAME : BQ889

CLIENT : Rapid Max Technology CO.,Ltd.

DATE OF ISSUE : Dec.13, 2016

STANDARD(S)

TEST PROCEDURE(S) : FCC Part 15 Rules

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Page 2 of 54

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Dec.13, 2016	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
2.2. TABLE OF CARRIER FREQUENCYS	5
3. MEASUREMENT UNCERTAINTY	6
4. DESCRIPTION OF TEST MODES	6
5. SYSTEM TEST CONFIGURATION	8
5.1. CONFIGURATION OF EUT SYSTEM	8
5.2. EQUIPMENT USED IN EUT SYSTEM	8
5.3. SUMMARY OF TEST RESULTS	8
6. TEST FACILITY	9
TEST METHODOLOGY	9
7. ALL TEST EQUIPMENT LIST	9
8. RADIATED EMISSION	11
8.1TEST LIMIT	11
8.2. MEASUREMENT PROCEDURE	12
8.3. TEST SETUP	14
8.4. TEST RESULT	16
9. BAND EDGE EMISSION	31
9.1. MEASUREMENT PROCEDURE	31
9.2 TEST SETUP	31
9.3 RADIATED TEST RESULT	32
10. 20DB BANDWIDTH	36
10.1. MEASUREMENT PROCEDURE	36
10.2. TEST SET-UP	36
10.3. LIMITS AND MEASUREMENT RESULTS	36
11. FCC LINE CONDUCTED EMISSION TEST	41
11.1. LIMITS OF LINE CONDUCTED EMISSION TEST	41
11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	41
11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	42
11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	42
11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	43
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	45
APPENDIX B: PHOTOGRAPHS OF EUT	48

Page 4 of 54

1. VERIFICATION OF CONFORMITY

Applicant	Rapid Max Technology CO.,Ltd.	
	Room 656-673, Buliding 6, Block B, Qinghu Technology Park, Qingxiang Road, Qinghu Community, Longhua New District, Shenzhen, P.R.China	
Manufacturer	JUN HONG Technology CO.,Ltd.	
	Buliding C09, Zunyi Tariff-free Zone, Xinpu Economic Develop Zone, Xinpu New District, Zunyi, Guizhou, P.R.China	
Product Designation Bluetooth Speaker Boom Box		
Brand Name	N/A	
Test Model	BQ889	
Date of test	Dec.03, 2016 to Dec.06, 2016	
Deviation	None	
Condition of Test Sample	Normal	
Report Template	AGCRT-US-BR/RF	

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249.

Tested By	Time thing	
	Time Huang(Huang Nanhui)	Dec.06, 2016
Reviewed By	Lowesto ce	
	Forrest Lei(Lei Yonggang)	Dec.13, 2016
Approved By	Solya Zhong	
	Solger Zhang(Zhang Hongyi) Authorized Officer	Dec.13, 2016

Page 5 of 54

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

·······g·· ············ ··············				
Operation Frequency 2.402 GHz to 2.480GHz				
RF Output Power	-3.95dBm(Max EIRP Power=Max radiation field-95.2)			
Bluetooth Version	V 2.1+EDR			
Modulation	GFSK, π /4-DQPSK			
Number of channels	79			
Hardware Version	BT568-LC4604-V3.0			
Software Version	V1.0			
Antenna Designation	PCB Antenna			
Antenna Gain	3dBi			
Power Supply DC 3.7V by battery				
mm .				

Note:

- 1. The micro USB port only be used for charging and can't be used to transfer data with PC.
- 2. The standard USB port only can read data from U-disk and can't be used to transfer data with PC.
- 3. The EUT didn't support 8DPSK.

2.2. TABLE OF CARRIER FREQUENCYS

BR/EDR Channel List

Frequency Band	Channel Number	Frequency	
	0	2402MHz	
	1	2403MHz	
	:	:	
	38	2440 MHz	
2400~2483.5MHz	39	2441 MHz	
	40	2442 MHz	
	••	:	
	77	2479 MHz	
	78	2480 MHz	

Page 6 of 54

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y $\pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 % \circ


No.	Item	Uncertainty
1	Conducted Emission Test	±3.18dB
2	All emissions, radiated	±3.91dB
3	Temperature	±0.5°C
4	Humidity	±2%

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel TX(GFSK)
2	Middle channel TX (GFSK)
3	High channel TX (GFSK)
4	Low channel TX(π/4-DQPSK)
5	Middle channel TX(π/4-DQPSK)
6	High channel TX (π/4-DQPSK)
7	BT Link with charging
8	BT Link

- 1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

Report No.: AGC08664161102FE03 Page 7 of 54

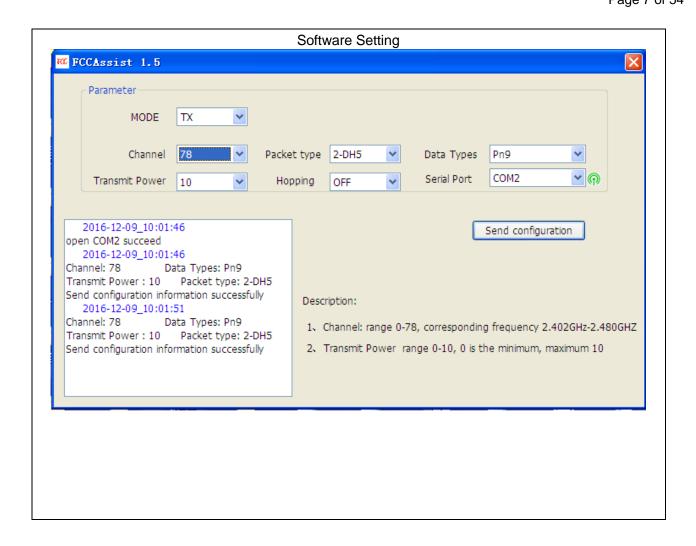


Page 8 of 54

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)



Note: Owing to the EUT has own battery, Testing will be performed while PC or adapter remove.

Configure 2: (Control continuous TX)



5.2. EQUIPMENT USED IN EUT SYSTEM

ITEM	EQUIPMENT	MFR/BRAND	MODEL/TYPE NO.	REMARK
1	Bluetooth Speaker Boom Box	JUN HONG	BQ889	EUT
2	Battery	N/A	N/A	Accessory
3	PC	Sony	E1412AYCW	A.E
4	Control box	GZUT	N/A	A.E
5	Adapter	IPRO	NTR-S01	A.E

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT	
§15.249(a)	Radiated Emission	Compliant	
§15.249(d)	Band Edges	Compliant	
§15.207	Conduction Emission	Compliant	
§15.215	Bandwidth	Compliant	

.

Page 9 of 54

6. TEST FACILITY

Site Dongguan Precise Testing Service Co., Ltd.	
Location Building D,Baoding Technology Park,Guangming Road2,Dongcheng Dist Dongguan, Guangdong, China,	
FCC Registration No.	371540
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2014.

TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013

7. ALL TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHz)

Radiated Emission Test Site							
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration		
EMI Test Receiver	ROHDE & SCHWARZBECK	ESCI	101417	July 4, 2016	July 3, 2017		
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2016	July 3, 2017		
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2016	July 3, 2017		
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2016	July 3, 2017		
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2016	June 5, 2017		
MULTI-DEVICE Positioning Controller	MAX-FULL	MF-7802	MF780208339	N/A	N/A		
Active loop antenna (9K-30MHz)	SCHWARZBECK	FMZB1519	1519-038	June 6, 2016	June 5, 2017		
Spectrum analyzer	AGILENT	E4407B	MY46185649	June 6, 2016	June 5, 2017		
Radiation Cable 1	MXT	RS1	R005	June 6, 2016	June 5, 2017		
Radiation Cable 2	MXT	RS1	R006	June 6, 2016	June 5, 2017		
temporary antenna connector	N/A	S100		July 4, 2016	July 3, 2017		

Page 10 of 54

FOR RADIATED EMISSION TEST (1GHz ABOVE)

	Radiat	ted Emission Tes	st Site			
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration	
EMI Test Receiver	ROHDE & SCHWARZBECK	ESCI	101417	July 4, 2016	July 3, 2017	
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2016	July 10, 2017	
Spectrum Analyzer	AGILENT	E4411B	MY4511453	July 4, 2016	July 3, 2017	
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2016	July 6, 2017	
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2016	July 7, 2017	
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2016	June 5, 2017	
MULTI-DEVICE Positioning Controller	MAX-FULL	MF-7802	MF780208339	N/A	N/A	
Horn Ant (18G-40GHz) SCHWARZBECK		BBHA 9170	9170-181	June 6, 2016	June 5, 2017	
Radiation Cable 1 MXT		RS1	R005	June 6, 2016	June 5, 2017	
Radiation Cable 2	MXT	RS1	R006	June 6, 2016	June 5, 2017	

Conducted Emission Test Site											
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration						
EMI Test Receiver	ROHDE & SCHWARZBECK	ESCI	101417	July 4, 2016	July 3, 2017						
Artificial Mains Network	NARDA	L2-16B	000WX31025	July 8, 2016	July 7, 2017						
Artificial Mains Network (AUX)	NARDA	L2-16B	000WX31026	July 8, 2016	July 7, 2017						
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2016	July 3, 2017						
Shielded Room	CHENGYU	843	PTS-002	June 6, 2016	June 5, 2017						
Conduction Cable	MXT	SE1	S003	June 6, 2016	June 5, 2017						

Page 11 of 54

8. RADIATED EMISSION

8.1TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental	Field Strength of Harmonics		
	(millivolts/meter)	(microvolts/meter)		
900-928MHz	50	500		
2400-2483.5MHz	50	500		
5725-5875MHz	50	500		
24.0-24.25GHz	250	2500		

Standard FCC 15.209

Frequency	Distance	Field Strei	ngths Limit			
(MHz)	Meters	μ V/m	dB(μV)/m			
0.009 ~ 0.490	300	2400/F(kHz)				
0.490 ~ 1.705	~ 1.705 30					
1.705 ~ 30		30				
30 ~ 88	3	100	40.0			
88 ~ 216	3	150	43.5			
216 ~ 960	3	200	46.0			
960 ~ 1000	3	500	54.0			
Above 1000	3	Other:74.0 dB(µV)/m (Peak)				
		54.0 dB(μV)/m (Average)				

Remark:

- (1) Emission level dB μ V = 20 log Emission level μ V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Page 12 of 54

8.2. MEASUREMENT PROCEDURE

1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)

- 2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
- 3. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
- 4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- 5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
- 6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)

Report No.: AGC08664161102FE03 Page 13 of 54


The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting				
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP				
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP				
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP				
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/10Hz for Average				
Receiver Parameter	Setting				
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP				
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP				
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP				


Page 14 of 54

8.3. TEST SETUP

Radiated Emission Test-Setup Frequency Below 30MHz

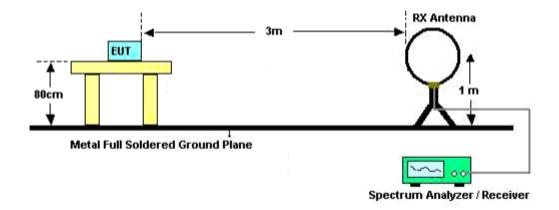


RADIATED EMISSION TEST SETUP 30MHz-1000MHz

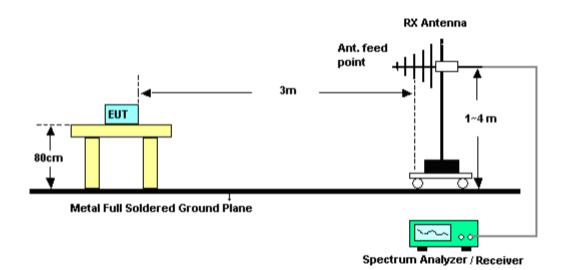

Page 15 of 54

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

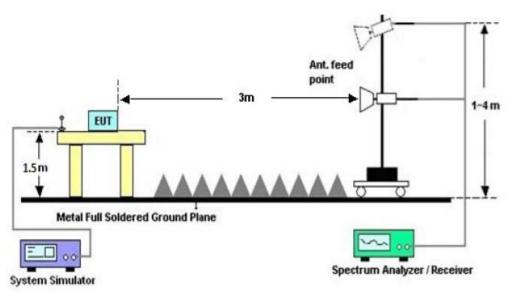

Page 16 of 54

8.4. TEST RESULT

(Worst modulation:GFSK)

FOR BR/EDR


RADIATED EMISSION BELOW 30MHz

No emission found between lowest internal used/generated frequencies to 30MHz.

Page 17 of 54

RADIATED EMISSION BELOW 1GHz

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

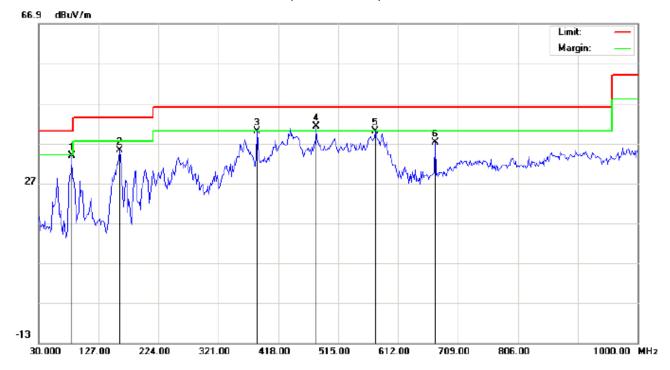

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Bluetooth Speaker

M/N: BQ889

Mode: Low Channel TX

Note:

Polarization: *Horizontal* Temperature: 23.7 Power: Humidity: 554. %

Distance:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		83.3499	22.93	10.80	33.73	40.00	-6.27	peak			
2		160.9499	18.20	17.03	35.23	43.50	-8.27	peak			
3		384.0500	21.10	18.86	39.96	46.00	-6.04	peak			
4	*	479.4331	19.86	21.41	41.27	46.00	-4.73	peak			
5	ļ	574.8165	17.03	23.03	40.06	46.00	-5.94	peak			
6		671.8165	11.74	25.42	37.16	46.00	-8.84	peak			

Temperature: 23.7

Humidity: 554. %

Page 18 of 54

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

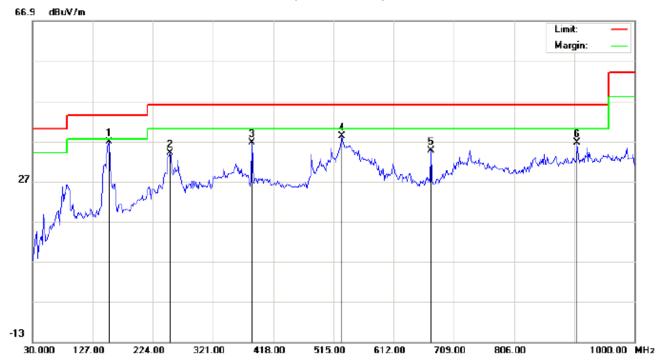

Polarization: Vertical

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Bluetooth Speaker

M/N: BQ889

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	152.8667	21.53	15.28	36.81	43.50	-6.69	peak			
2		251.4833	19.97	13.94	33.91	46.00	-12.09	peak			
3		384.0500	17.70	18.96	36.66	46.00	-9.34	peak			
4		527.9333	16.35	21.88	38.23	46.00	-7.77	peak			
5		671.8165	10.26	24.43	34.69	46.00	-11.31	peak			
6		907.8500	7.74	28.83	36.57	46.00	-9.43	peak			

Power:

Distance:

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.


2. The "Factor" value can be calculated automatically by software of measurement system.

Temperature: 23.7

Humidity: 554.%

Page 19 of 54

RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

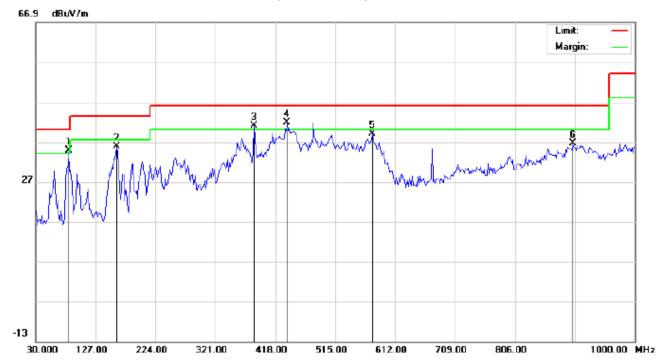

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Bluetooth Speaker

M/N: BQ889

Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	ļ	83.3499	23.93	10.80	34.73	40.00	-5.27	peak			
2		160.9499	18.70	17.03	35.73	43.50	-7.77	peak			
3	İ	384.0500	22.10	18.86	40.96	46.00	-5.04	peak			
4	*	437.3999	21.81	19.96	41.77	46.00	-4.23	peak			
5		574.8165	16.03	23.03	39.06	46.00	-6.94	peak			
6		899.7667	8.05	28.56	36.61	46.00	-9.39	peak			

Power:

Distance:


Polarization: Horizontal

Temperature: 23.7

Humidity: 554. %

Page 20 of 54

RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL -VERTICAL

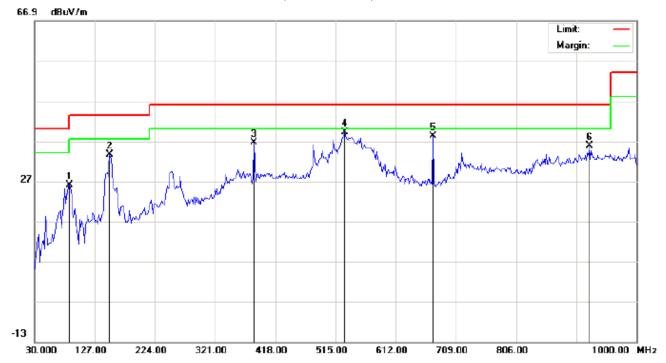

Polarization: Vertical

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Bluetooth Speaker

M/N: BQ889

Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		86.5832	21.86	4.16	26.02	40.00	-13.98	peak			
2		151.2500	18.36	15.27	33.63	43.50	-9.87	peak			
3		384.0500	17.70	18.96	36.66	46.00	-9.34	peak			
4	*	529.5498	17.37	21.93	39.30	46.00	-6.70	peak			
5		671.8165	13.76	24.43	38.19	46.00	-7.81	peak			
6		924.0167	6.56	29.28	35.84	46.00	-10.16	peak			

Power:

Distance:

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 21 of 54

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL



Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Bluetooth Speaker

M/N: BQ889

Mode: High Channel TX


Note:

Polarization:	Horizontal	Temperature: 23.7
Power:		Humidity: 554. %
Distance:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	į	83.3499	24.93	10.80	35.73	40.00	-4.27	peak			
2		160.9499	19.20	17.03	36.23	43.50	-7.27	peak			
3	*	384.0500	24.60	18.86	43.46	46.00	-2.54	peak			
4	į	479.4331	21.36	21.41	42.77	46.00	-3.23	peak			
5		671.8165	10.74	25.42	36.16	46.00	-9.84	peak		·	
6		899.7667	9.05	28.56	37.61	46.00	-8.39	peak			

Page 22 of 54

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

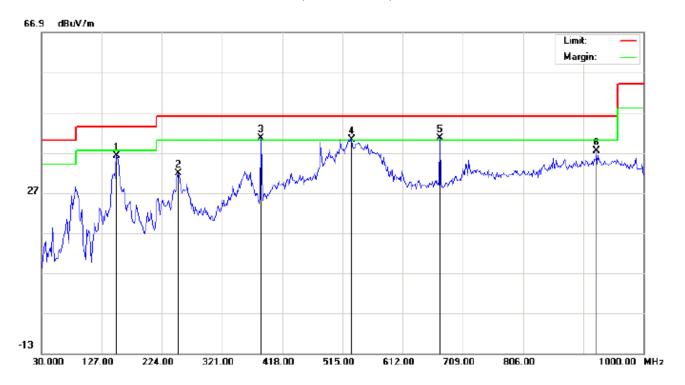

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Bluetooth Speaker

M/N: BQ889

Mode: High Channel TX

Note:

Polarization:	Vertical	Temperature: 23.7				
Power:		Humidity:	554. %			

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		151.2500	20.86	15.27	36.13	43.50	-7.37	peak			
2		249.8667	17.98	13.89	31.87	46.00	-14.13	peak			
3	İ	384.0500	21.70	18.96	40.66	46.00	-5.34	peak			
4	ļ	529.5498	18.37	21.93	40.30	46.00	-5.70	peak			
5	*	671.8165	16.26	24.43	40.69	46.00	-5.31	peak			
6		924.0167	8.06	29.28	37.34	46.00	-8.66	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.


Page 23 of 54

RADIATED EMISSION ABOVE 1GHz

(Worst modulation: GFSK)

FOR BR/EDR

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

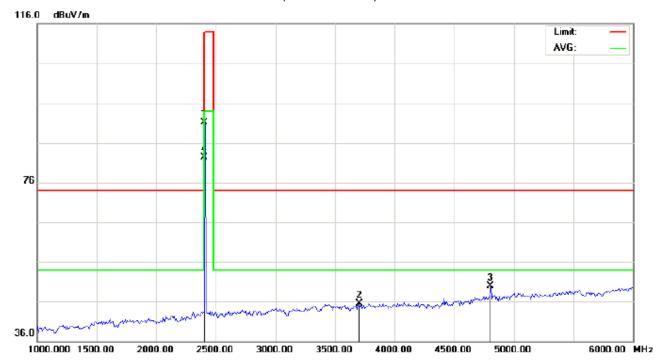

Site: site #1 Polarization: Horizontal Temperature: 22.7

Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 53.6 %

EUT: Bluetooth Speaker Boom Box Distance:

M/N: BQ889


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2402.000	80.71	10.32	91.03	114.00	-22.97	peak			
2		3700.000	32.24	13.34	45.58	74.00	-28.42	peak			
3		4804.000	42.24	7.69	49.93	74.00	-24.07	peak			
4	*	2402.000	71.99	10.32	82.31	94.00	-11.69	AVG	100	85	

Page 24 of 54

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

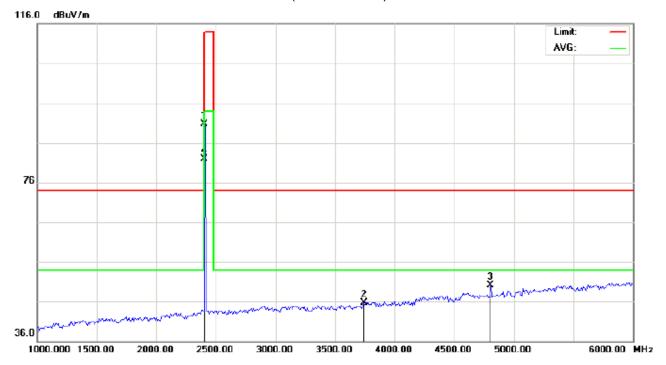

Site: site #1 Polarization: Vertical Temperature: 22.7
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 53.6 %

Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power:
EUT: Bluetooth Speaker Boom Box Distance:

M/N: BQ889


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu√/m	dB		cm	degree	
1		2402.000	80.32	10.32	90.64	114.00	-23.36	peak			
2		3741.667	32.18	13.60	45.78	74.00	-28.22	peak			
3		4804.000	42.38	7.69	50.07	74.00	-23.93	peak			
4	*	2402.000	71.63	10.32	81.95	94.00	-12.05	AVG	100	273	

Page 25 of 54

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

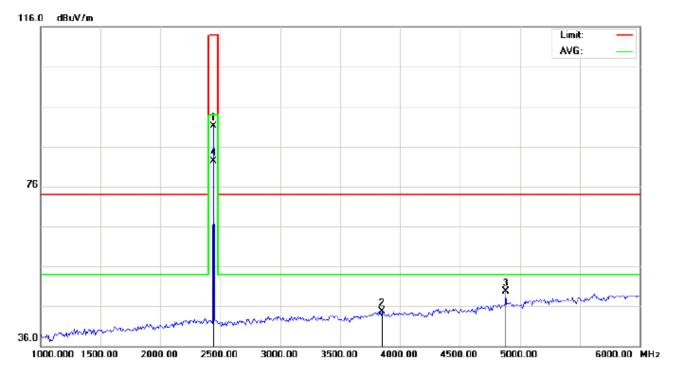

Site: site #1 Polarization: Horizontal Temperature: 22.7

Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 53.6 %

EUT: Bluetooth Speaker Boom Box Distance:

M/N: BQ889


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
		MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2441.000	80.71	10.36	91.07	114.00	-22.93	peak			
2		3850.000	30.52	14.27	44.79	74.00	-29.21	peak			
3		4882.000	41.88	7.89	49.77	74.00	-24.23	peak			
4	*	2441.000	71.95	10.36	82.31	94.00	-11.69	AVG	100	94	

Page 26 of 54

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

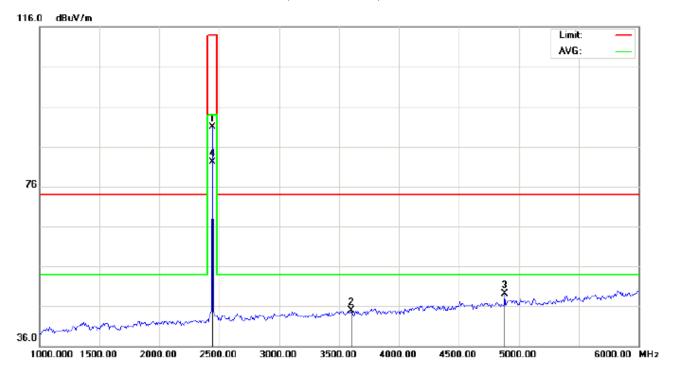

Site: site #1 Polarization: Vertical Temperature: 22.7
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 53.6 %

EUT: Bluetooth Speaker Boom Box Distance:

M/N: BQ889


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2441.000	80.52	10.36	90.88	114.00	-23.12	peak			
2		3600.000	32.12	12.73	44.85	74.00	-29.15	peak			
3		4882.000	41.31	7.89	49.20	74.00	-24.80	peak			
4	*	2441.000	71.77	10.36	82.13	94.00	-11.87	AVG	100	269	

Page 27 of 54

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

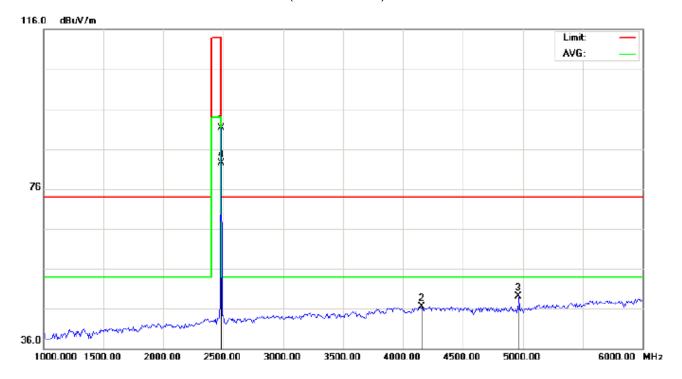

Site: site #1 Polarization: Horizontal Temperature: 22.7

Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 53.6 %

EUT: Bluetooth Speaker Boom Box Distance:

M/N: BQ889


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2480.000	80.84	10.41	91.25	114.00	-22.75	peak			
2		4158.333	33.90	12.56	46.46	74.00	-27.54	peak			
3		4960.000	41.01	8.09	49.10	74.00	-24.90	peak			
4	*	2480.000	72.16	10.41	82.57	94.00	-11.43	AVG	100	91	

Page 28 of 54

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

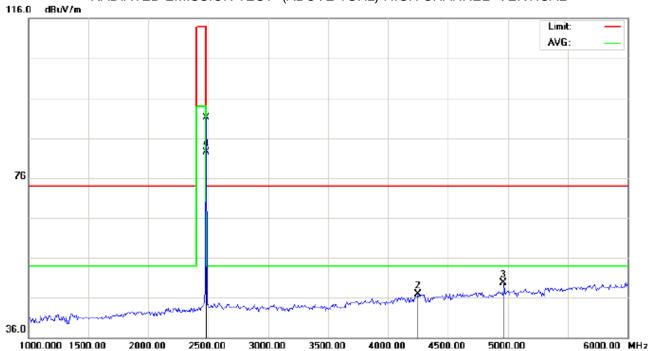

Site: site #1 Polarization: Vertical Temperature: 22.7

Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 53.6 %

EUT: Bluetooth Speaker Boom Box Distance:

M/N: BQ889

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2480.000	80.72	10.41	91.13	114.00	-22.87	peak			
2		4250.000	35.78	11.04	46.82	74.00	-27.18	peak			
3		4960.000	41.66	8.09	49.75	74.00	-24.25	peak			
4	*	2480.000	72.04	10.41	82.45	94.00	-11.55	AVG	100	275	

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Page 29 of 54

Field strength of the fundamental signal

1Mbps Result:

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	80.71	10.32	91.03	114	-22.97	Horizontal
2402	80.32	10.32	90.64	114	-23.36	Vertical
2441	80.71	10.36	91.07	114	-22.93	Horizontal
2441	80.52	10.36	90.88	114	-23.12	Vertical
2480	80.84	10.41	91.25	114	-22.75	Horizontal
2480	80.72	10.41	91.13	114	-22.87	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	71.99	10.32	82.31	94	-11.69	Horizontal
2402	71.63	10.32	81.95	94	-12.05	Vertical
2441	71.95	10.36	82.31	94	-11.69	Horizontal
2441	71.77	10.36	82.13	94	-11.87	Vertical
2480	72.16	10.41	82.57	94	-11.43	Horizontal
2480	72.04	10.41	82.45	94	-11.55	Vertical

Report No.: AGC08664161102FE03 Page 30 of 54

2Mbps Result:

Peak value

Frequency	quency Reading Factor Me		Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	80.57	10.32	90.89	114	-23.11	Horizontal
2402	80.45	10.32	90.77	114	-23.23	Vertical
2441	80.58	10.36	90.94	114	-23.06	Horizontal
2441	80.45	10.36	90.81	114	-23.19	Vertical
2480	80.71	10.41	91.12	114	-22.88	Horizontal
2480	80.60	10.41	91.01	114	-22.99	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	71.85	10.32	82.17	94	-11.83	Horizontal
2402	71.71	10.32	82.03	94	-11.97	Vertical
2441	71.83	10.36	82.19	94	-11.81	Horizontal
2441	71.69	10.36	82.05	94	-11.95	Vertical
2480	71.98	10.41	82.39	94	-11.61	Horizontal
2480	71.86	10.41	82.27	94	-11.73	Vertical

Page 31 of 54


9. BAND EDGE EMISSION

9.1. MEASUREMENT PROCEDURE

- 1. The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
- 2. Max hold the trace of the setup1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.
- 3. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission

9.2 TEST SETUP

RADIATED EMISSION TEST SETUP

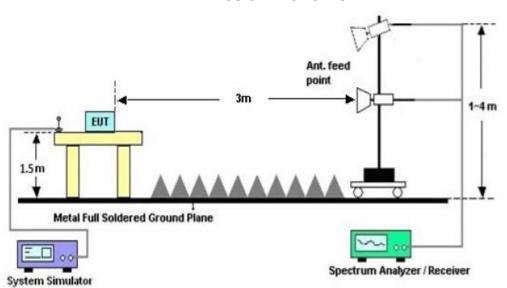


Page 32 of 54

9.3 RADIATED TEST RESULT

(Worst modulation: GFSK)

FOR BR/EDR

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

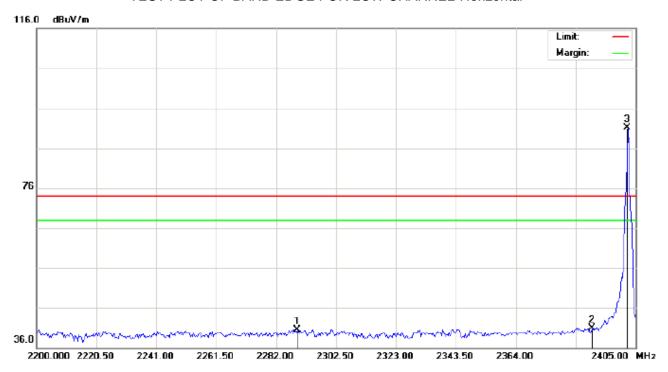

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth Speaker Boom Box

Distance:


M/N: BQ889

Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2289.175	30.30	10.20	40.50	74.00	-33.50	peak			
2		2390.000	30.50	10.31	40.81	74.00	-33.19	peak			
3	*	2402.000	80.72	10.32	91.04	74.00	17.04	peak			

Page 33 of 54

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

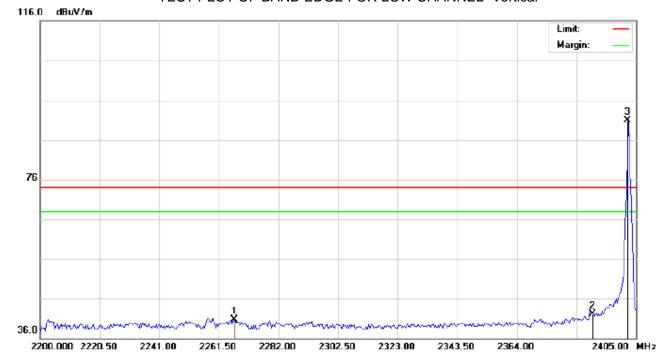

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth Speaker Boom Box Distance:


M/N: BQ889

Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2266.966	30.58	10.17	40.75	74.00	-33.25	peak			
2		2390.000	31.71	10.31	42.02	74.00	-31.98	peak			
3	*	2402.000	80.59	10.32	90.91	74.00	16.91	peak			

Page 34 of 54

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

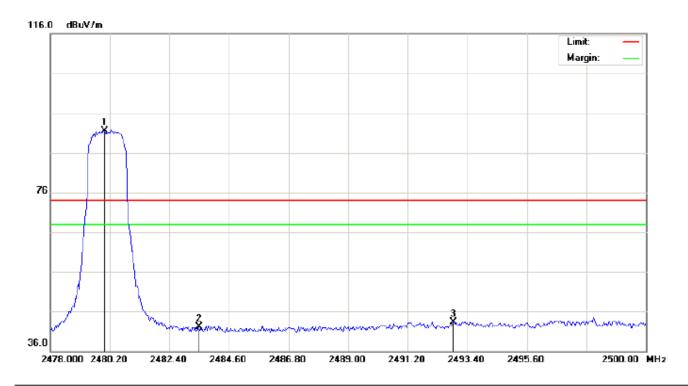

Site: site #1 Polarization: Horizontal Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth Speaker Boom Box Distance:

M/N: BQ889

Mode: High Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2480.000	81.05	10.41	91.46	74.00	17.46	peak			
2		2483.500	31.69	10.41	42.10	74.00	-31.90	peak			
3		2492.887	32.93	10.42	43.35	74.00	-30.65	peak			

Page 35 of 54

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical



Site: site #1 Polarization: Vertical Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth Speaker Boom Box Distance:

M/N: BQ889

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2480.000	80.82	10.41	91.23	74.00	17.23	peak			
2		2483.500	30.76	10.41	41.17	74.00	-32.83	peak			
3		2490.723	31.05	10.42	41.47	74.00	-32.53	peak			

RESULT: PASS

Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Hopping on mode and Hopping off mode have been tested, but only worst case reported.

Page 36 of 54


10. 20DB BANDWIDTH

10.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW \geq 1% of the 20 dB bandwidth, VBW \geq RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

10.2. TEST SET-UP

(BLOCK DIAGRAM OF CONFIGURATION)

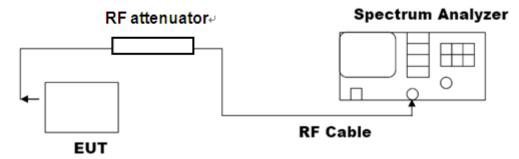

Note: The EUT has been used temporary antenna connector for testing.


10.3. LIMITS AND MEASUREMENT RESULTS

FOR BR/EDR


BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT										
	Measurement Result									
Applicable Limits		Decult								
		99%OBW (MHz)	-20dB BW(MHz)	Result						
	Low Channel	0.991	1.087	PASS						
N/A	Middle Channel	0.966	1.099	PASS						
	High Channel	0.983	1.101	PASS						

Page 37 of 54

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

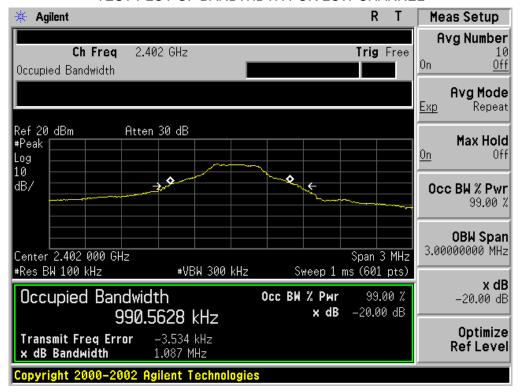


TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

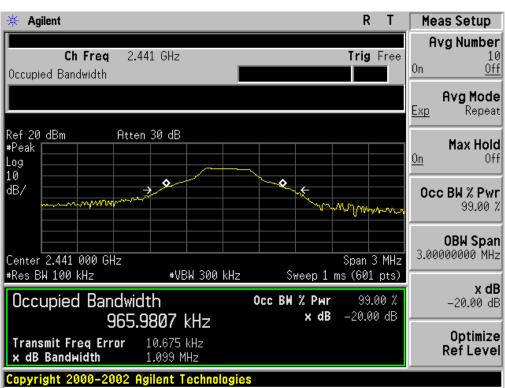

Page 38 of 54


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

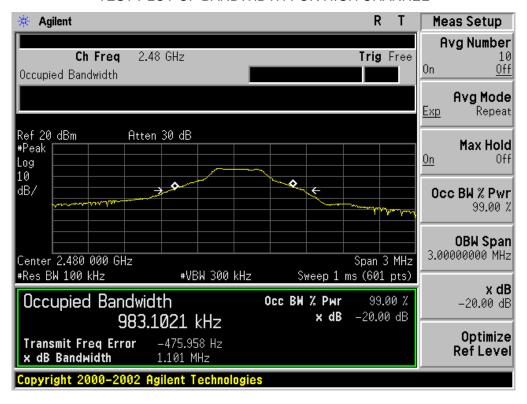

Report No.: AGC08664161102FE03 Page 39 of 54


BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT									
	Measurement Result								
Applicable Limits		Decult							
		99%OBW (MHz)	-20dB BW(MHz)	Result					
	Low Channel	1.275	1.377	PASS					
N/A	Middle Channel	1.262	1.370	PASS					
	High Channel	1.274	1.370	PASS					

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

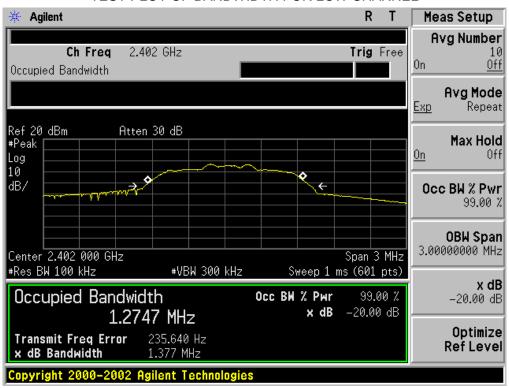


Page 40 of 54

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

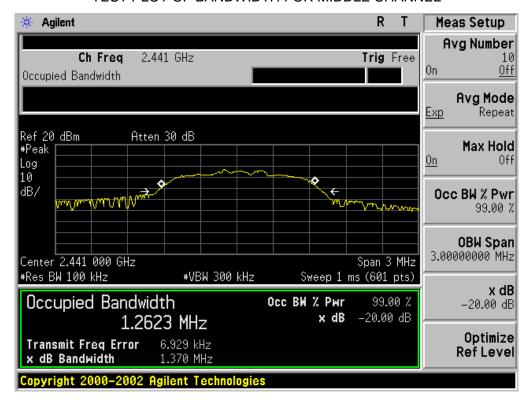

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

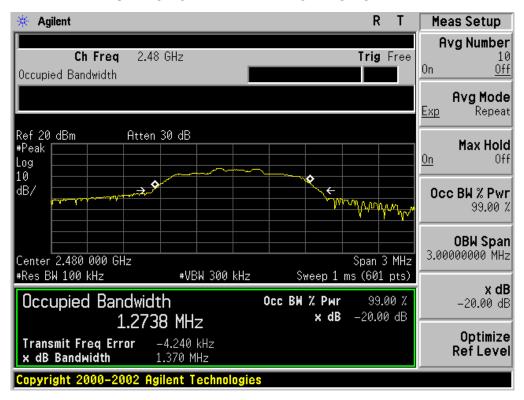

Page 41 of 54

11. FCC LINE CONDUCTED EMISSION TEST


11.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Fraguenau	Maximum RF Line Voltage							
Frequency	Q.P.(dBuV)	Average(dBuV)						
150kHz~500kHz	66-56	56-46						
500kHz~5MHz	56	46						
5MHz~30MHz	60	50						

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

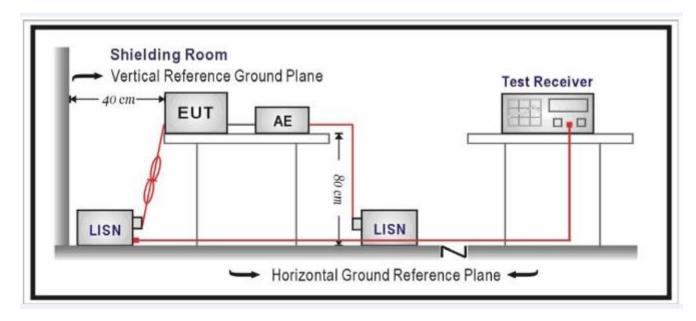

Page 42 of 54

11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT DC charging voltage by adapter or PC which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

Humidity: 55.2 %


Page 43 of 54

11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

By adapter(worst case)

FOR BR/EDR

Line Conducted Emission Test Line 1-L

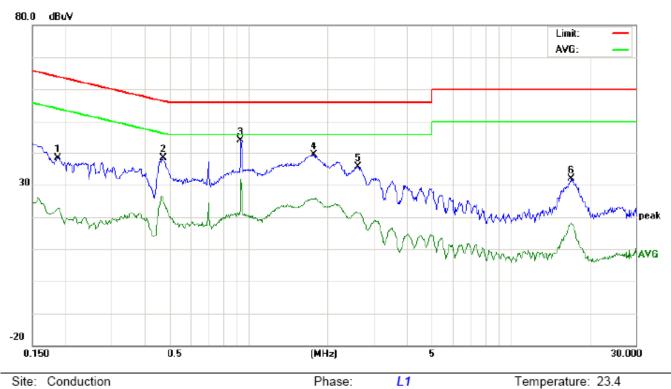

L1

Site: Conduction

Limit: FCC Class B Conduction(QP)

EUT: Bluetooth Speaker Boom Box

M/N: BQ889

Mode: BT Link with charging


Note:

No. Freq.	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment	
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1874	28.21		12.30	10.20	38.41		22.50	64.15	54.15	-25.74	-31.65	Р	
2	0.4711	27.90		15.69	10.38	38.28		26.07	56.49	46.49	-18.21	-20.42	Р	
3	0.9380	33.83		21.13	10.39	44.22		31.52	56.00	46.00	-11.78	-14.48	Р	
4	1.7780	29.13		15.45	10.29	39.42		25.74	56.00	46.00	-16.58	-20.26	Р	
5	2.6220	25.11		11.00	10.46	35.57		21.46	56.00	46.00	-20.43	-24.54	Р	
6	17.0419	21.73		8.01	10.13	31.86		18.14	60.00	50.00	-28.14	-31.86	Р	

Power:

Page 44 of 54

Line Conducted Emission Test Line 2-N

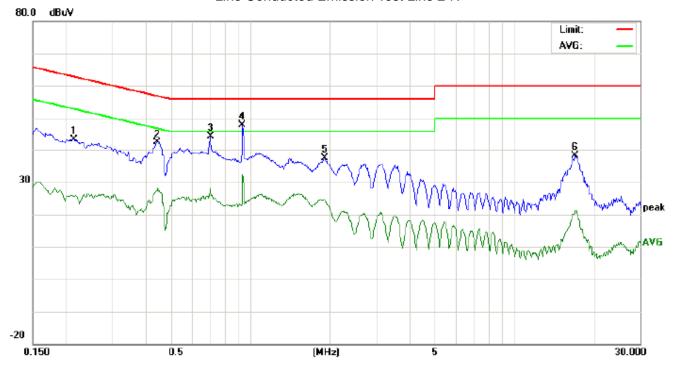

Site: Conduction Phase: N Temperature: 23.4
Limit: FCC Class B Conduction(QP) Power: Humidity: 55.2 %

EUT: Bluetooth Speaker Boom Box

M/N: BQ889

Mode: BT Link with charging

Note:

No. Freq.	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment	
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2139	33.15		15.37	10.23	43.38		25.60	63.05	53.05	-19.67	-27.45	Р	
2	0.4460	32.13		17.65	10.36	42.49		28.01	56.95	46.95	-14.46	-18.94	Р	
3	0.7059	33.94		17.85	10.35	44.29		28.20	56.00	46.00	-11.71	-17.80	Р	
4	0.9379	37.37		22.03	10.39	47.76		32.42	56.00	46.00	-8.24	-13.58	Р	
5	1.9219	27.03		13.85	10.24	37.27		24.09	56.00	46.00	-18.73	-21.91	Р	
6	17.1058	28.10		10.85	10.13	38.23		20.98	60.00	50.00	-21.77	-29.02	Р	


Page 45 of 54

APPENDIX A: PHOTOGRAPHS OF TEST SETUP


FCC LINE CONDUCTED EMISSION TEST SETUP




FCC RADIATED EMISSION TEST SETUP

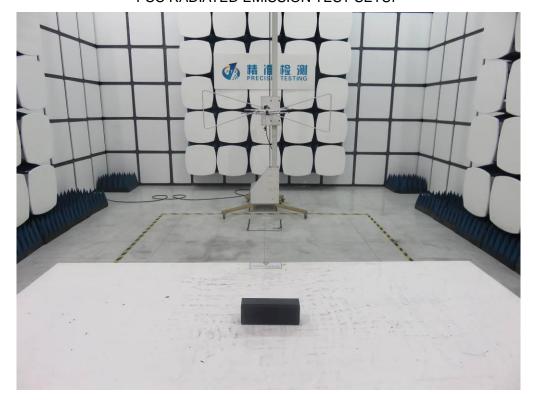


Report No.: AGC08664161102FE03 Page 46 of 54

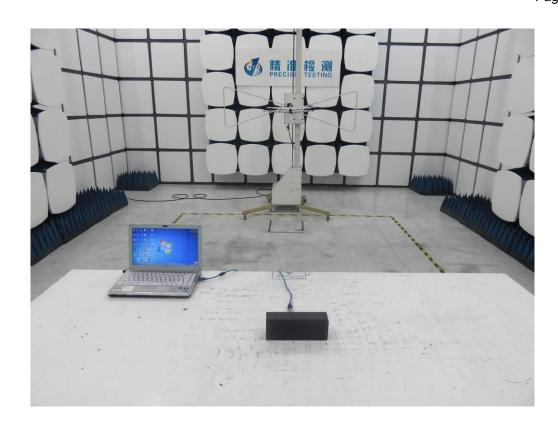

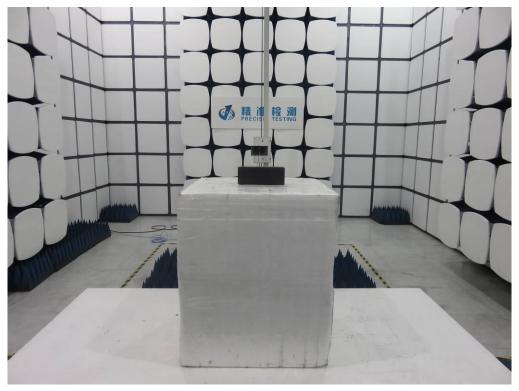


Report No.: AGC08664161102FE03 Page 47 of 54

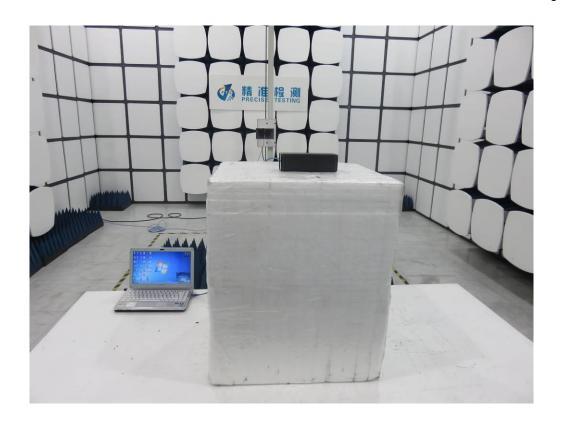

Page 48 of 54

APPENDIX B: PHOTOGRAPHS OF EUT

TOP VIEW OF EUT

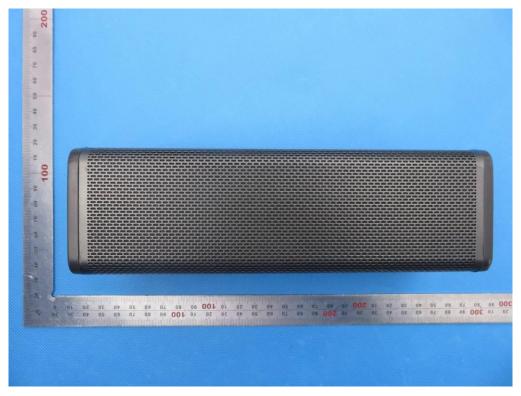


BOTTOM VIEW OF EUT




Page 49 of 54

FRONT VIEW OF EUT

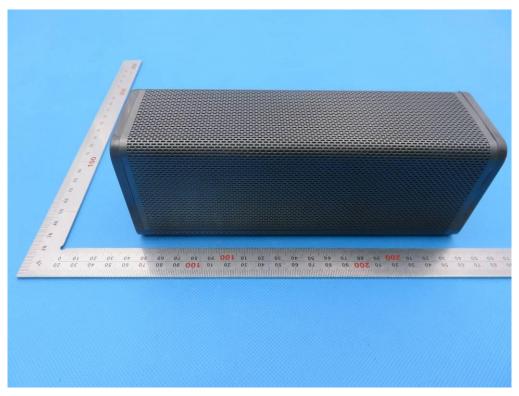


BACK VIEW OF EUT

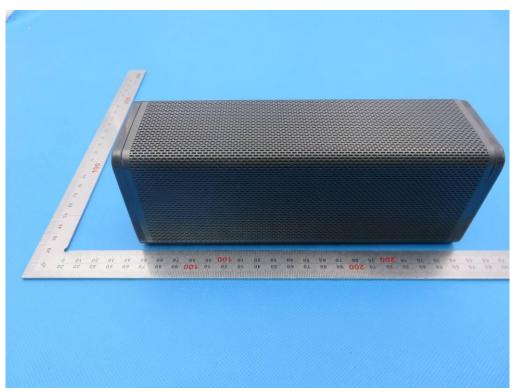


Report No.: AGC08664161102FE03 Page 50 of 54

LEFT VIEW OF EUT

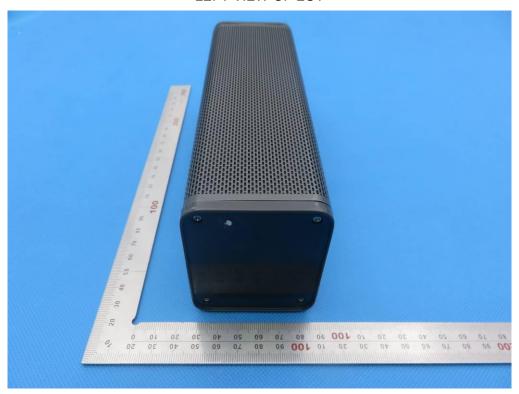

RIGHT VIEW OF EUT

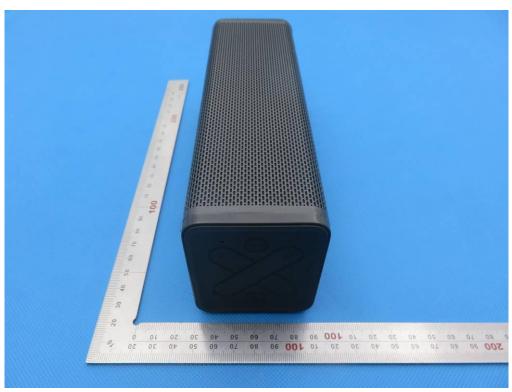

Report No.: AGC08664161102FE03 Page 51 of 54


VIEW OF EUT (PORT)




OPEN VIEW OF EUT-1



Report No.: AGC08664161102FE03 Page 52 of 54

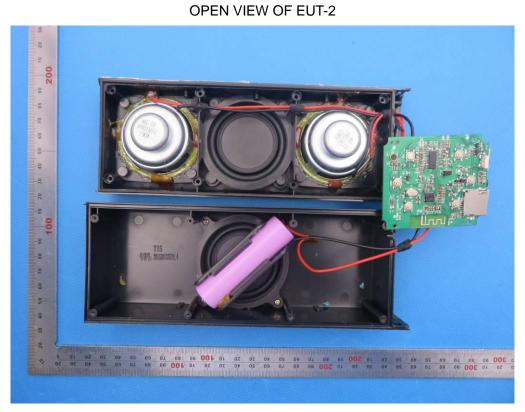


INTERNAL VIEW OF EUT-1

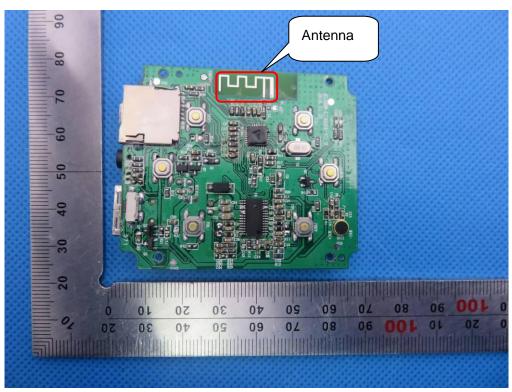


Page 53 of 54

INTERNAL VIEW OF EUT-2

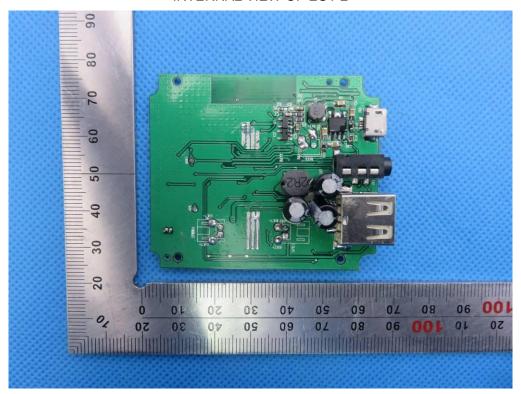

INTERNAL VIEW OF EUT-3

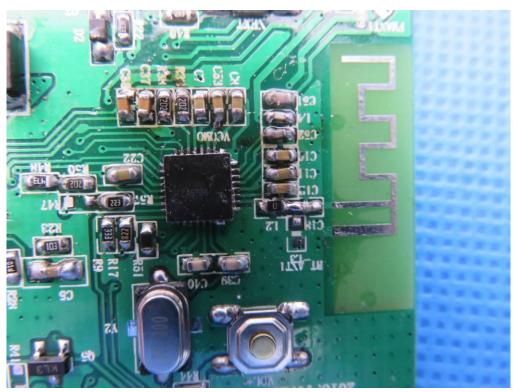

Page 54 of 54

VIEW OF ADAPTER (AE)



THE ADAPTER SUPPLIED BY AGC

----END OF REPORT----