

# FCC Test Report

## (Class II Permissive Change)

Product Name	Intel® Wireless-AC 9560
Model No.	9560NGW
FCC ID.	2AKHF9560NG

Applicant	TONGFANG HONGKONG (SUZHOU) LIMITED
Address	NO. 83 Wu Lane, Suzhou Industrial Park, Suzhou City, Jiangsu Province, 215000 China

Date of Receipt	Dec. 12, 2018
Issued Date	Jan. 17, 2019
Report No.	18C0177R-RFUSP11V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

## Test Report

Issued Date: Jan. 17, 2019

Report No.: 18C0177R-RFUSP11V00



Product Name	Intel® Wireless-AC 9560
Applicant	TONGFANG HONGKONG (SUZHOU) LIMITED
Address	NO. 83 Wu Lane, Suzhou Industrial Park, Suzhou City, Jiangsu Province, 215000 China
Manufacturer	Intel Mobile Communications
Model No.	9560NGW
FCC ID.	2AKHF9560NG
EUT Rated Voltage	AC 100-240V / 50-60Hz
EUT Test Voltage	AC 120V/60Hz
Trade Name	Intel
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2017 ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By : Anny Chou  
 ( Senior Adm. Specialist / Anny Chou )

Tested By : Sam Hsu  
 ( Assistant Engineer / Sam Hsu )

Approved By : Vincent Lin  
 ( Director / Vincent Lin )

## TABLE OF CONTENTS

Description	Page
<b>1. GENERAL INFORMATION.....</b>	<b>4</b>
1.1. EUT Description .....	4
1.2. Operational Description.....	6
1.3. Tested System Details.....	7
1.4. Configuration of Tested System .....	7
1.5. EUT Exercise Software .....	8
1.6. Test Facility.....	9
1.7. List of Test Item and Equipment .....	10
<b>2. PEAK POWER OUTPUT.....</b>	<b>11</b>
2.1. Test Setup.....	11
2.2. Limit .....	11
2.3. Test Procedure .....	11
2.4. Uncertainty.....	11
2.5. Test Result of Peak Power Output.....	12
<b>3. RADIATED EMISSION .....</b>	<b>15</b>
3.1. Test Setup.....	15
3.2. Limits.....	16
3.3. Test Procedure .....	17
3.4. Uncertainty.....	17
3.5. Test Result of Radiated Emission.....	18
<b>4. BAND EDGE.....</b>	<b>42</b>
4.1. Test Setup.....	42
4.2. Limit .....	43
4.3. Test Procedure .....	43
4.4. Uncertainty.....	43
4.5. Test Result of Band Edge.....	44
<b>5. EMI REDUCTION METHOD DURING COMPLIANCE TESTING.....</b>	<b>68</b>

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

## 1. GENERAL INFORMATION

### 1.1. EUT Description

Product Name	Intel® Wireless-AC 9560
Trade Name	Intel
Model No.	9560NGW
FCC ID.	2AKHF9560NG
Frequency Range	2402 – 2480MHz
Channel Number	79
Type of Modulation	FHSS: GFSK(1Mbps) / π/4DQPSK(2Mbps) / 8DPSK(3Mbps)
Antenna Type	Slot Antenna
Channel Control	Auto
Antenna Gain	Refer to the table “Antenna List”
Test Platform	Product name: Notebook PC, Brand: TONGFANG, Model number: GK5CQ7Z, GK5CP0Z, GK5CQ8Z
Adapter	MFR: Chicony, M/N: A15-180P1A Input: AC 100-240V, 50-60Hz, 2.5A Output: DC 19.5V, 9.23A Cable Out: Non-Shielded, 1.7m with two ferrite cores

#### Antenna List:

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	WGT	ANTRG5Z119-0302 (Aux)	Slot Antenna	1.6dBi for 2.4 GHz

Note: The antenna of EUT is conform to FCC 15.203

## Center Frequency of Each Channel: (For V3.0+HS, V2.1+EDR)

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 20:	2422 MHz	Channel 40:	2442 MHz	Channel 60:	2462 MHz
Channel 01:	2403 MHz	Channel 21:	2423 MHz	Channel 41:	2443 MHz	Channel 61:	2463 MHz
Channel 02:	2404 MHz	Channel 22:	2424 MHz	Channel 42:	2444 MHz	Channel 62:	2464 MHz
Channel 03:	2405 MHz	Channel 23:	2425 MHz	Channel 43:	2445 MHz	Channel 63:	2465 MHz
Channel 04:	2406 MHz	Channel 24:	2426 MHz	Channel 44:	2446 MHz	Channel 64:	2466 MHz
Channel 05:	2407 MHz	Channel 25:	2427 MHz	Channel 45:	2447 MHz	Channel 65:	2467 MHz
Channel 06:	2408 MHz	Channel 26:	2428 MHz	Channel 46:	2448 MHz	Channel 66:	2468 MHz
Channel 07:	2409 MHz	Channel 27:	2429 MHz	Channel 47:	2449 MHz	Channel 67:	2469 MHz
Channel 08:	2410 MHz	Channel 28:	2430 MHz	Channel 48:	2450 MHz	Channel 68:	2470 MHz
Channel 09:	2411 MHz	Channel 29:	2431 MHz	Channel 49:	2451 MHz	Channel 69:	2471 MHz
Channel 10:	2412 MHz	Channel 30:	2432 MHz	Channel 50:	2452 MHz	Channel 70:	2472 MHz
Channel 11:	2413 MHz	Channel 31:	2433 MHz	Channel 51:	2453 MHz	Channel 71:	2473 MHz
Channel 12:	2414 MHz	Channel 32:	2434 MHz	Channel 52:	2454 MHz	Channel 72:	2474 MHz
Channel 13:	2415 MHz	Channel 33:	2435 MHz	Channel 53:	2455 MHz	Channel 73:	2475 MHz
Channel 14:	2416 MHz	Channel 34:	2436 MHz	Channel 54:	2456 MHz	Channel 74:	2476 MHz
Channel 15:	2417 MHz	Channel 35:	2437 MHz	Channel 55:	2457 MHz	Channel 75:	2477 MHz
Channel 16:	2418 MHz	Channel 36:	2438 MHz	Channel 56:	2458 MHz	Channel 76:	2478 MHz
Channel 17:	2419 MHz	Channel 37:	2439 MHz	Channel 57:	2459 MHz	Channel 77:	2479 MHz
Channel 18:	2420 MHz	Channel 38:	2440 MHz	Channel 58:	2460 MHz	Channel 78:	2480 MHz
Channel 19:	2421 MHz	Channel 39:	2441 MHz	Channel 59:	2461 MHz		

## Note:

1. The EUT is an Intel® Wireless-AC 9560 with built-in WLAN (802.11a/b/g/n/ac) with Bluetooth (5.0 and V3.0+HS, V2.1+EDR) transceiver, this report for Bluetooth V3.0+HS, V2.1+EDR.
2. These tests were conducted on a sample for the purpose of demonstrating compliance of transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
4. This is to request a Class II permissive change for FCC ID: 2AKHF9560NG, originally granted on 03/16/2018.

The major change filed under this application is:

Change #1: Additional Chassis is added, Product name: Notebook PC, Brand: TONGFANG, Model number: GK5CQ7Z, GK5CP0Z, GK5CQ8Z.

All models are listed as below:

Brand	Model	GPU (NVIDIA)	Difference
TONGF ANG	GK5CP0Z (Main test sample)	GTX2060, N18E-G1	All models are electrically identical and different model names are used to distinguish between different GPU specifications.
	GK5CQ7Z	GTX2070, N18E-G2	
	GK5CQ8Z	GTX2080, N18E-G3	

#2: Reduce the Output Power through firmware, and SAR measurement were evaluated.

#3: Addition an antenna, the antenna type is different from the original application and the antenna gain is higher than the original application.

Test Mode	Mode 1: Transmit - 1Mbps (GFSK) Mode 2: Transmit - 2Mbps (4DQPSK) Mode 3: Transmit - 3Mbps (8DPSK)
-----------	--


### 1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product		Manufacturer	Model No.	Serial No.	Power Cord
1	LED Monitor	ViewSonic	VX2257-mhd	UFY163502150	Non-shielded, 1.8m
2	Monitor	Dell	U2410f	CN-0J257M-72872-985-0JML	Non-shielded, 1.8m
3	USB Mouse	Logitech	M-U0026	1245HS0684D8	N/A
4	USB 3.0(1T)	Transcend	TS1TSJ25M3	C13890-3746	N/A
5	USB 3.0(1T)	Transcend	TS1TSJ25M3	C13890-3746	N/A
6	USB 3.0(1T)	Transcend	TS1TSJ25M3	C13890-3746	N/A
7	Notebook PC	DELL	Latitude 5580	2HRD7H2	Non-shielded, 0.8m
8	Microphone & Earphone	Ergotech	ET-E201	N/A	N/A
9	SD Card 2GB	Transcend	TS2GSDC	205380-8144	N/A

Signal Cable Type		Signal cable Description
A	Display Cable	Shielded, 2m
B	HDMI Cable	Shielded, 1.7m
C	Type-C to USB Cable	Non-shielded, 0.2m
D	Mouse Cable	Non-shielded, 1.8m
E	USB Cable	Non-shielded, 0.5m
F	USB Cable	Non-shielded, 0.5m
G	USB Cable	Non-shielded, 0.5m
H	Display Cable	Shielded, 1.8m
I	LAN Cable	Shielded, 1.9m
J	Microphone & Earphone Cable	Non-shielded, 1.8m

### 1.4. Configuration of Tested System

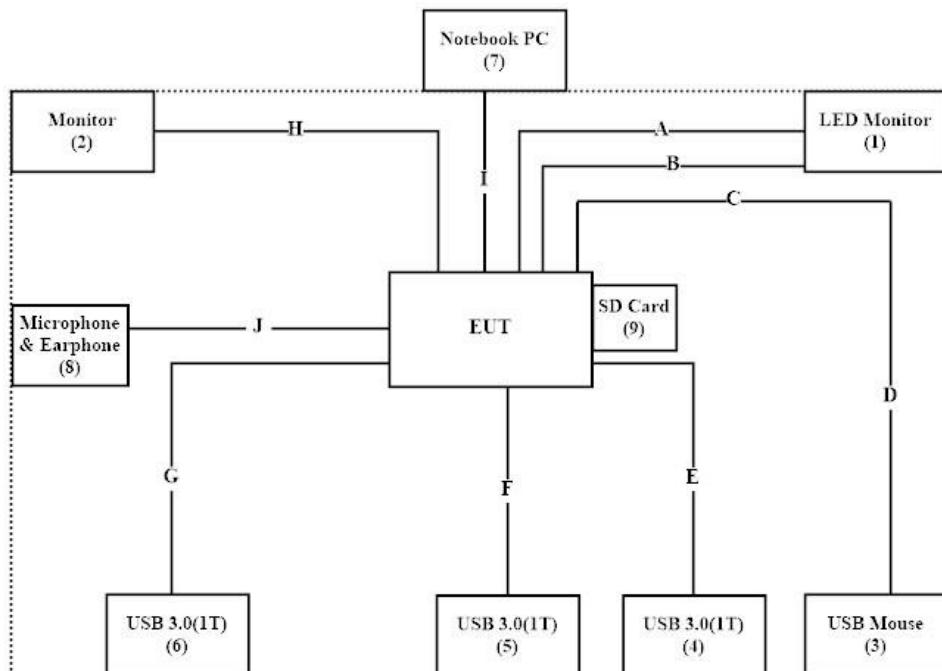

## **1.5. EUT Exercise Software**

- (1) Setup the EUT as shown on 1.4
- (2) Execute software “DRTU 10.1748.0-06430” on the EUT.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Start the continuous transmission.
- (5) Verify that the EUT works properly.

## 1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from DEKRA Testing and Certification Co., Ltd. Web Site:

<http://www.dekra.com.tw/chinese/about/certificates.aspx?bval=5>

The address and introduction of DEKRA Testing and Certification Co., Ltd. laboratories can be founded in our Web site: <http://www.dekra.com.tw>

Site Description: Accredited by TAF  
Accredited Number: 3023

Site Name: DEKRA Testing and Certification Co., Ltd  
Site Address: No.5-22, Ruishukeng, Linkou Dist., New Taipei City 24451,  
Taiwan, R.O.C.  
TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789  
E-Mail : [info.tw@dekra.com](mailto:info.tw@dekra.com)

FCC Accreditation Number: TW3023

## 1.7. List of Test Item and Equipment

### For Conducted measurements /CB3/SR8

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Date	Due. Date
	Temperature Chamber	WIT GROUP	TH-1S-B	EQ-201-00146	2018/02/12	2019/02/11
X	Spectrum Analyzer	Agilent	N9010A	MY53470892	2018/09/27	2019/09/26
X	Peak Power Analyzer	Keysight	8990B	MY51000410	2018/08/01	2019/07/31
X	Wideband Power Sensor	Keysight	N1923A	MY56080003	2018/07/25	2019/07/24
X	Wideband Power Sensor	Keysight	N1923A	MY56080004	2018/07/25	2019/07/24
X	EMI Test Receiver	R&S	ESCS 30	100369	2018/11/19	2019/11/18
X	LISN	R&S	ESH3-Z5	836679/017	2018/02/09	2019/02/08
X	LISN	R&S	ENV216	100097	2018/02/09	2019/02/08
X	Coaxial Cable	DEKRA	RG 400	LC018-RG	2018/06/21	2019/06/20

### For Radiated measurements /Site3/CB8


	Equipment	Manufacturer	Model No.	Serial No.	Cali. Date	Due. Date
X	Spectrum Analyzer	R&S	FSP40	100170	2018/03/12	2019/03/11
X	Loop Antenna	Teseq	HLA6121	37133	2017/10/13	2019/10/12
X	Bilog Antenna	Schaffner Chase	CBL6112B	2707	2018/06/24	2019/06/23
X	Coaxial Cable	DEKRA	RG 214	LC003-RG	2018/06/14	2019/06/13
X	Pre-Amplifier	Jet-Power	JPA-10M1G33	170101000330010	2018/06/14	2019/06/13
X	Horn Antenna	ETS-Lindgren	3117	00135205	2018/05/03	2019/05/02
X	Horn Antenna	SCHWARZBECK	9120D	576	2018/12/18	2019/12/17
X	Pre-Amplifier	EMCI	EMC012630SE	980210	2018/04/10	2019/04/09
X	Horn Antenna	Com-Power	AH-840	101043	2019/01/09	2020/01/08
X	Amplifier + Cable	EMCI	EMC184045SE	980370	2018/03/21	2019/03/20
X	Filter	MICRO-TRONICS	BRM50702	G270	2018/08/06	2019/08/05
X	Filter	MICRO-TRONICS	BRM50716	G196	2018/08/06	2019/08/05

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version :QuieTek EMI 2.0 V2.1.113.

## 2. Peak Power Output

### 2.1. Test Setup

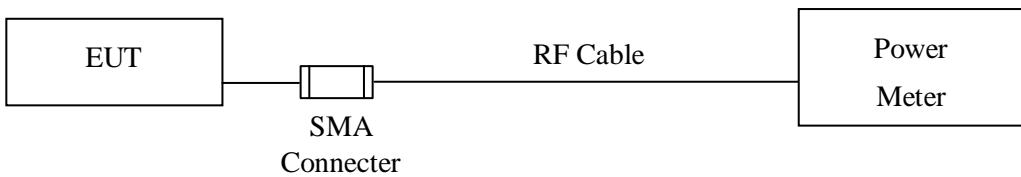

### 2.2. Limit

The maximum peak power shall be less 1Watt.

### 2.3. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

### 2.4. Uncertainty

± 1.19 dB

## 2.5. Test Result of Peak Power Output

Product : Intel® Wireless-AC 9560  
Test Item : Peak Power Output  
Test Site : No.3 OATS  
Test date : 2019/01/07  
Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	7.60	1 Watt= 30 dBm	Pass
Channel 39	2441.00	8.71	1 Watt= 30 dBm	Pass
Channel 78	2480.00	8.60	1 Watt= 30 dBm	Pass

Product : Intel® Wireless-AC 9560  
Test Item : Peak Power Output  
Test Site : No.3 OATS  
Test date : 2019/01/07  
Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK)

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	6.07	1 Watt= 30 dBm	Pass
Channel 39	2441.00	5.78	1 Watt= 30 dBm	Pass
Channel 78	2480.00	5.76	1 Watt= 30 dBm	Pass


Product : Intel® Wireless-AC 9560  
Test Item : Peak Power Output  
Test Site : No.3 OATS  
Test date : 2019/01/07  
Test Mode : Mode 3: Transmit - 3Mbps (8DPSK)

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	6.01	1 Watt= 30 dBm	Pass
Channel 39	2441.00	6.15	1 Watt= 30 dBm	Pass
Channel 78	2480.00	6.05	1 Watt= 30 dBm	Pass


### 3. Radiated Emission

#### 3.1. Test Setup


Under 30MHz

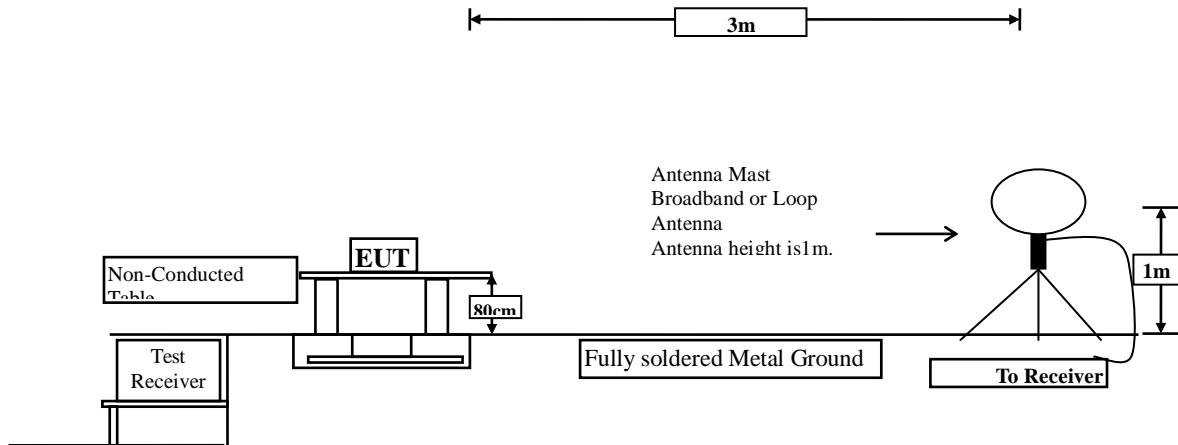

Below 1GHz

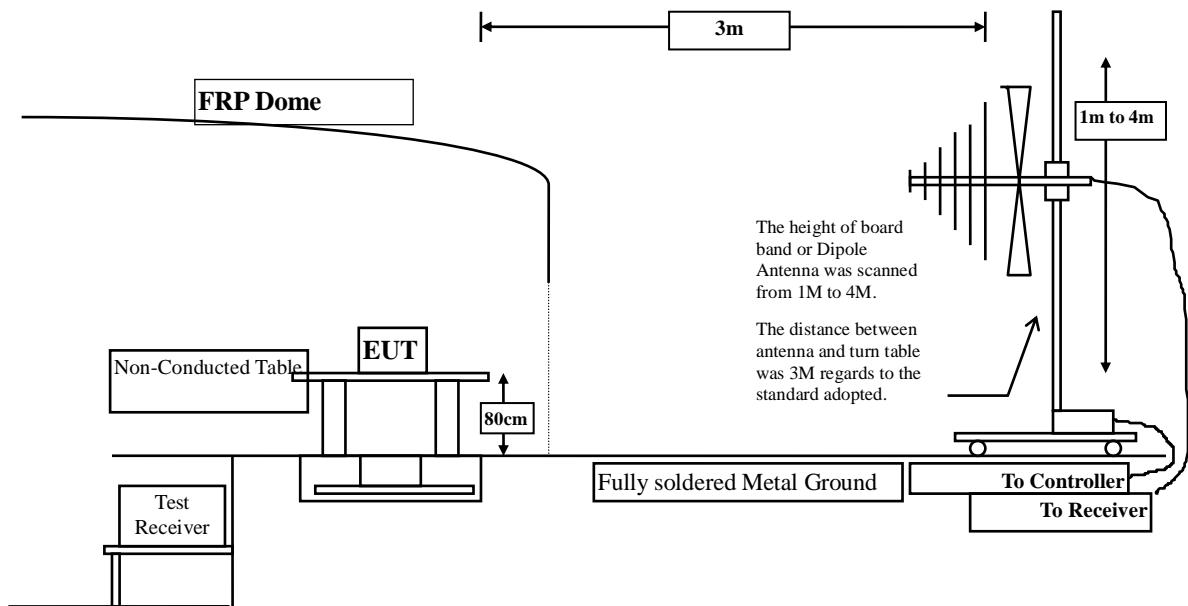

Above 1GHz

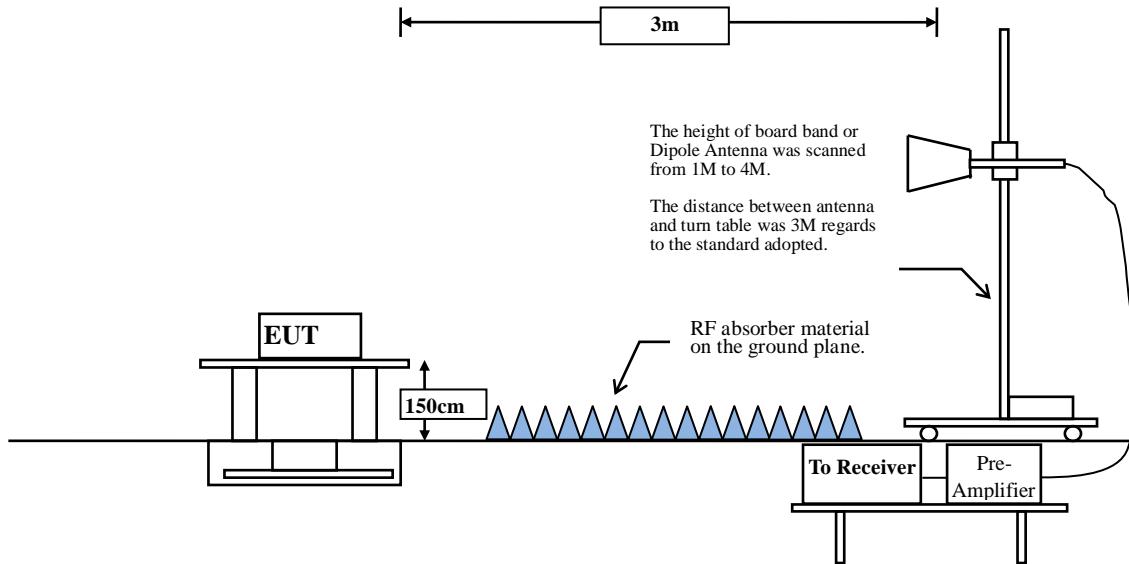

### 3.2. Limits

#### ➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dB $\mu$ V/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Remarks:

1. RF Voltage (dB $\mu$ V) =  $20 \log \text{RF Voltage (uV)}$
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

### 3.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

### 3.4. Uncertainty


± 4.08 dB above 1GHz

± 4.22 dB below 1GHz

### 3.5. Test Result of Radiated Emission

Product : Intel® Wireless-AC 9560  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test date : 2019/01/02  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2402MHz)

Horizontal

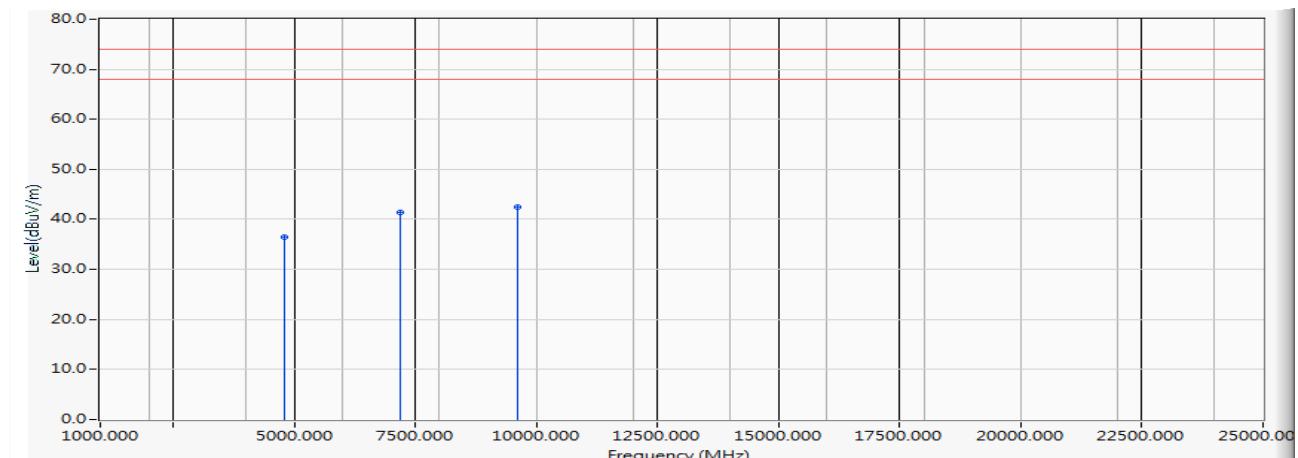


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	4804.000	-9.896	46.370	36.474	-37.526	74.000	PEAK
2	7206.000	-5.013	46.490	41.477	-32.523	74.000	PEAK
3 *	9608.000	-1.472	43.990	42.519	-31.481	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9560  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test date : 2019/01/02  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2402MHz)

## Vertical

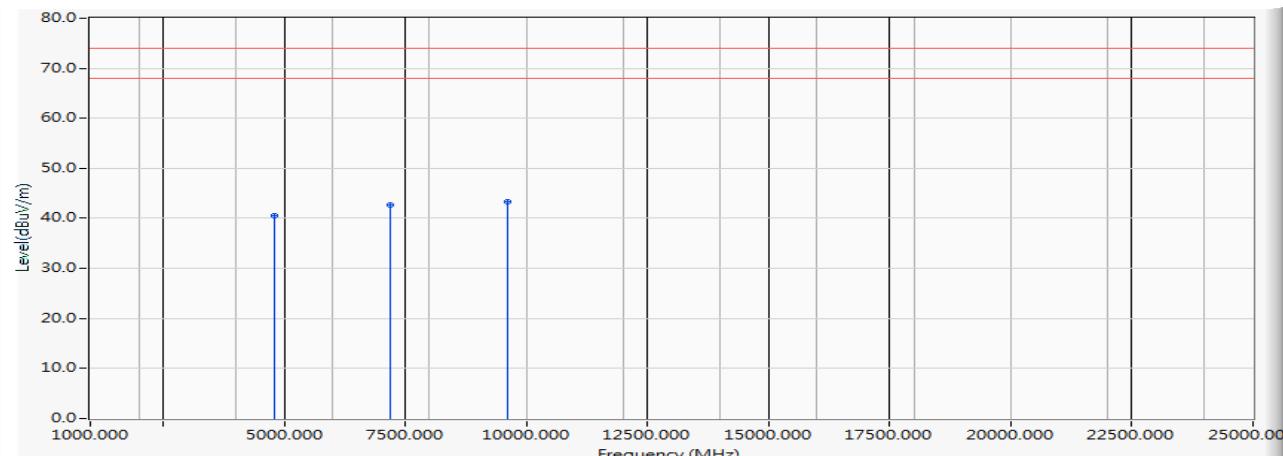


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	4804.000	-6.585	47.040	40.455	-33.545	74.000	PEAK
2	7206.000	-4.144	46.800	42.656	-31.344	74.000	PEAK
3 *	9608.000	-1.075	44.470	43.396	-30.604	74.000	PEAK

## Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9560  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test date : 2019/01/02  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2441MHz)

#### Horizontal

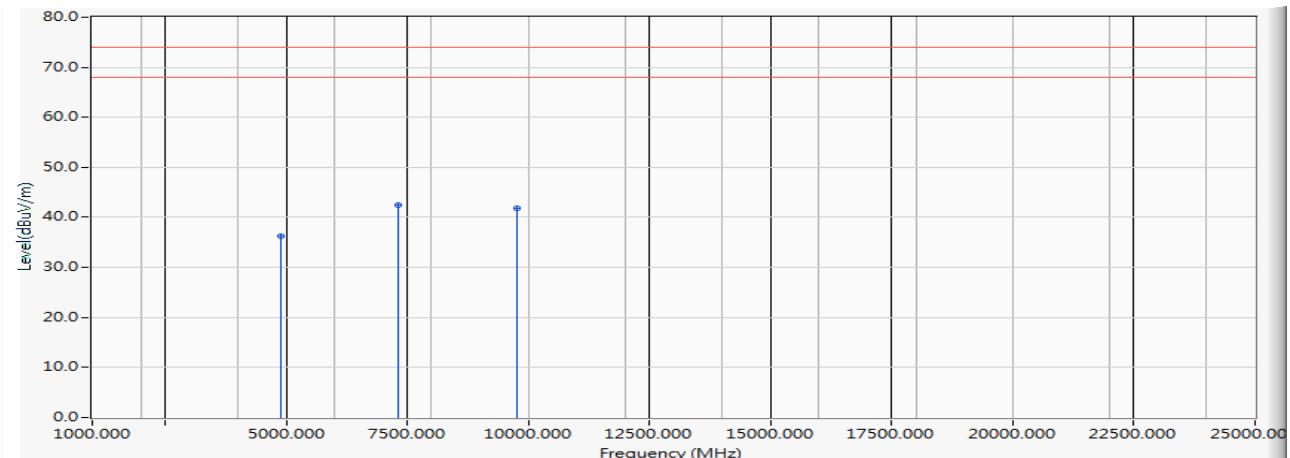


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	4882.000	-10.318	46.500	36.182	-37.818	74.000	PEAK
2 *	7323.000	-3.858	46.270	42.412	-31.588	74.000	PEAK
3	9764.000	-2.596	44.340	41.744	-32.256	74.000	PEAK

#### Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9560  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test date : 2019/01/02  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2441MHz)

## Vertical

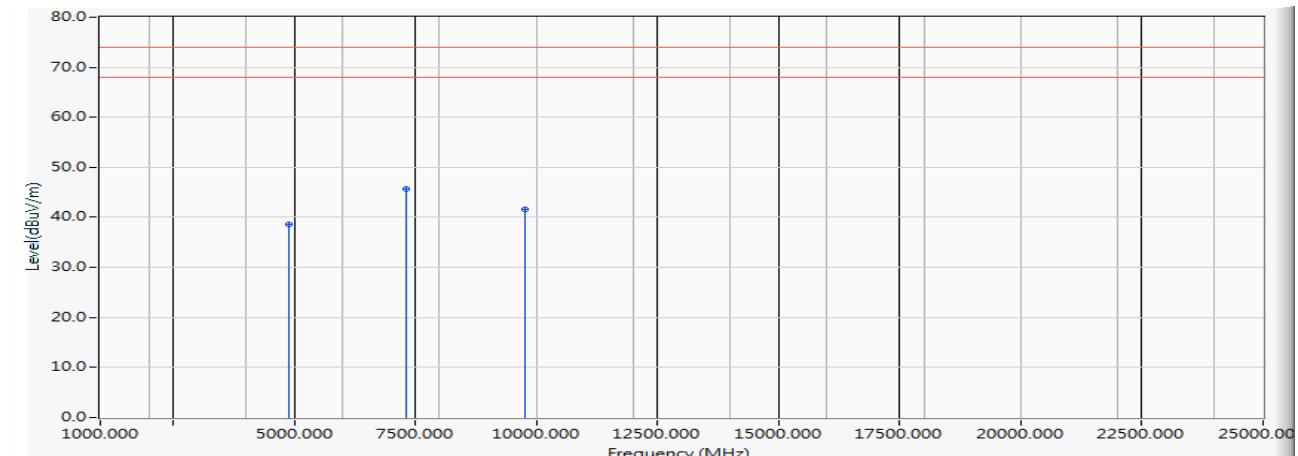


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	4882.000	-7.606	46.200	38.594	-35.406	74.000	PEAK
2	* 7323.000	-2.977	48.570	45.594	-28.406	74.000	PEAK
3	9764.000	-2.131	43.660	41.529	-32.471	74.000	PEAK

## Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9560  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test date : 2019/01/02  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2480MHz)

#### Horizontal

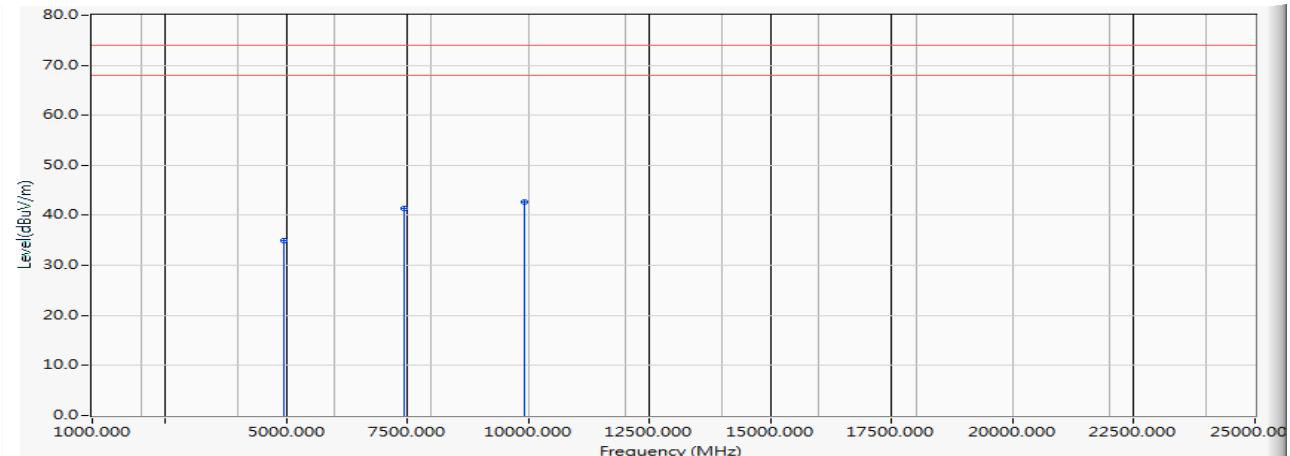


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	4960.000	-10.666	45.700	35.035	-38.965	74.000	PEAK
2	7440.000	-3.631	45.080	41.449	-32.551	74.000	PEAK
3	*	-2.397	45.170	42.773	-31.227	74.000	PEAK

#### Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9560  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test date : 2019/01/02  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2480MHz)

## Vertical

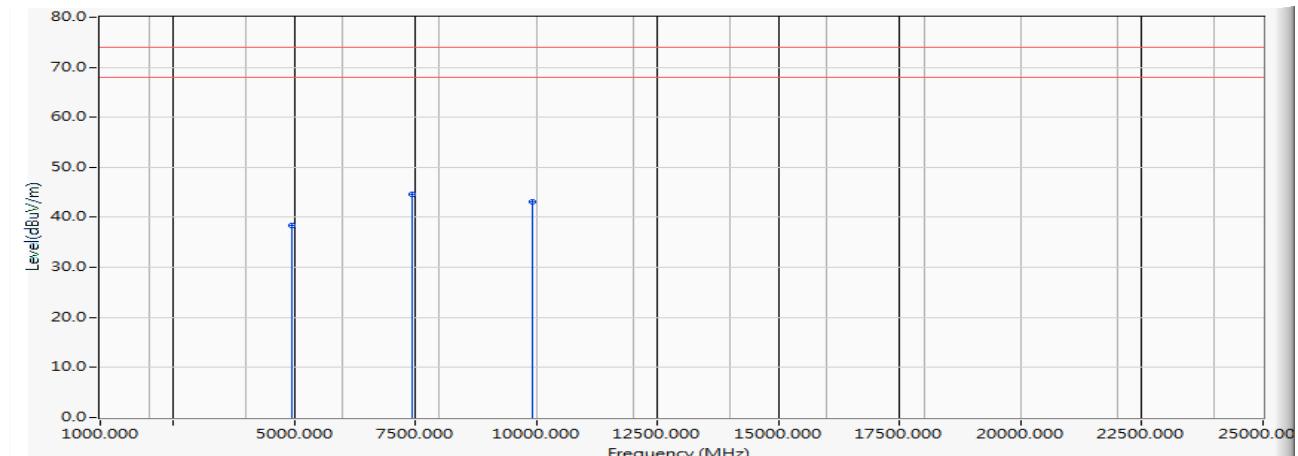


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	4960.000	-7.869	46.190	38.322	-35.678	74.000	PEAK
2	* 7440.000	-2.772	47.470	44.698	-29.302	74.000	PEAK
3	9920.000	-1.895	44.950	43.055	-30.945	74.000	PEAK

## Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9560  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test date : 2019/01/02  
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK) (2402MHz)

#### Horizontal

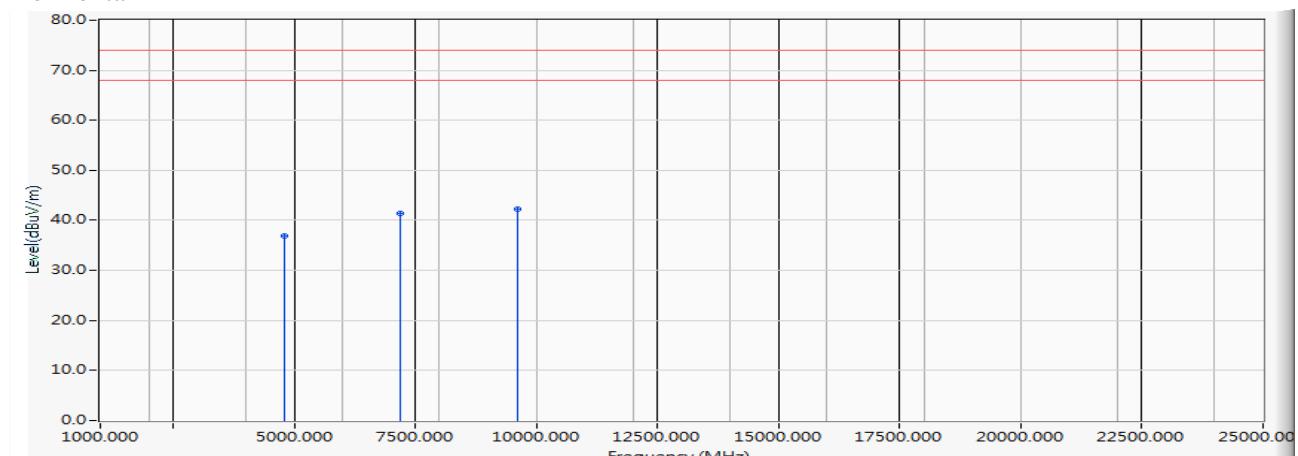


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	4804.000	-9.896	46.850	36.954	-37.046	74.000	PEAK
2	7206.000	-5.013	46.300	41.287	-32.713	74.000	PEAK
3	*	-1.472	43.710	42.239	-31.761	74.000	PEAK

#### Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9560  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test date : 2019/01/02  
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK) (2402MHz)

## Vertical

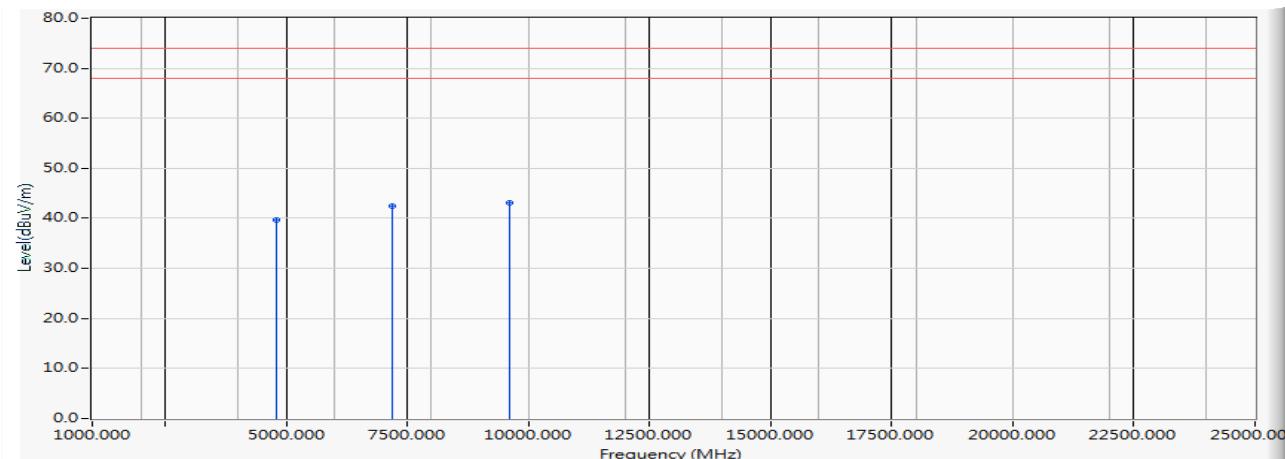


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	4804.000	-6.585	46.220	39.635	-34.365	74.000	PEAK
2	7206.000	-4.144	46.550	42.406	-31.594	74.000	PEAK
3 *	9608.000	-1.075	44.270	43.196	-30.804	74.000	PEAK

## Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9560  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test date : 2019/01/02  
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK) (2441MHz)

#### Horizontal

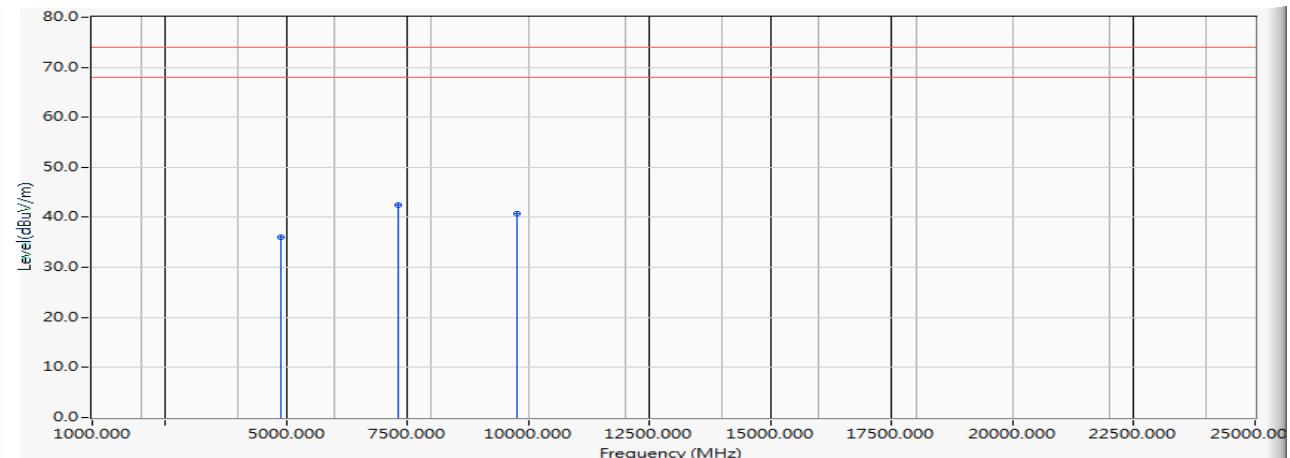


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	4882.000	-10.318	46.250	35.932	-38.068	74.000	PEAK
2 *	7323.000	-3.858	46.390	42.532	-31.468	74.000	PEAK
3	9764.000	-2.596	43.270	40.674	-33.326	74.000	PEAK

#### Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9560  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test date : 2019/01/02  
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK) (2441MHz)

## Vertical

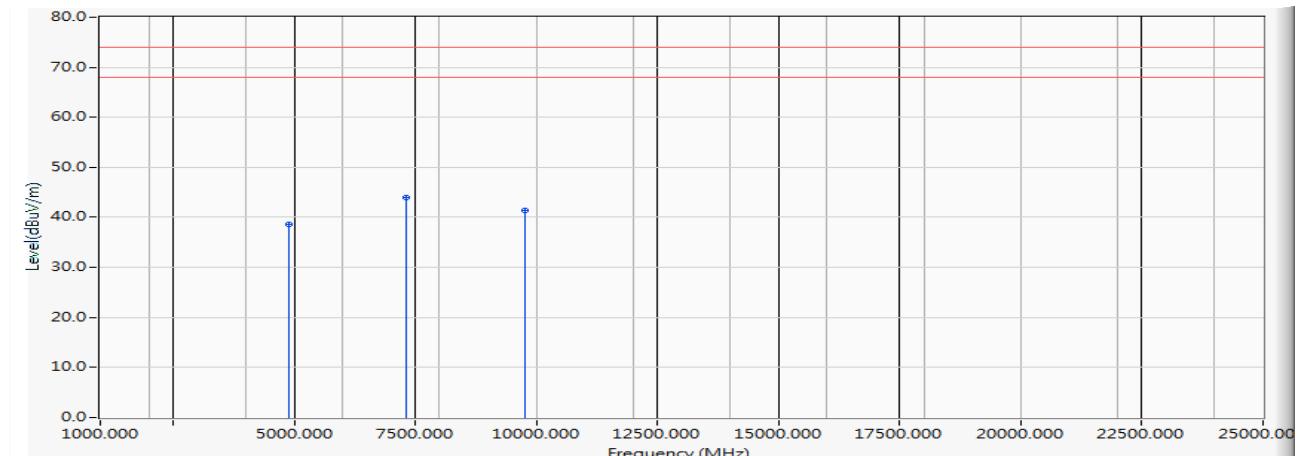


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	4882.000	-7.606	46.110	38.504	-35.496	74.000	PEAK
2 *	7323.000	-2.977	47.030	44.054	-29.946	74.000	PEAK
3	9764.000	-2.131	43.480	41.349	-32.651	74.000	PEAK

## Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9560  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test date : 2019/01/02  
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK) (2480MHz)

#### Horizontal

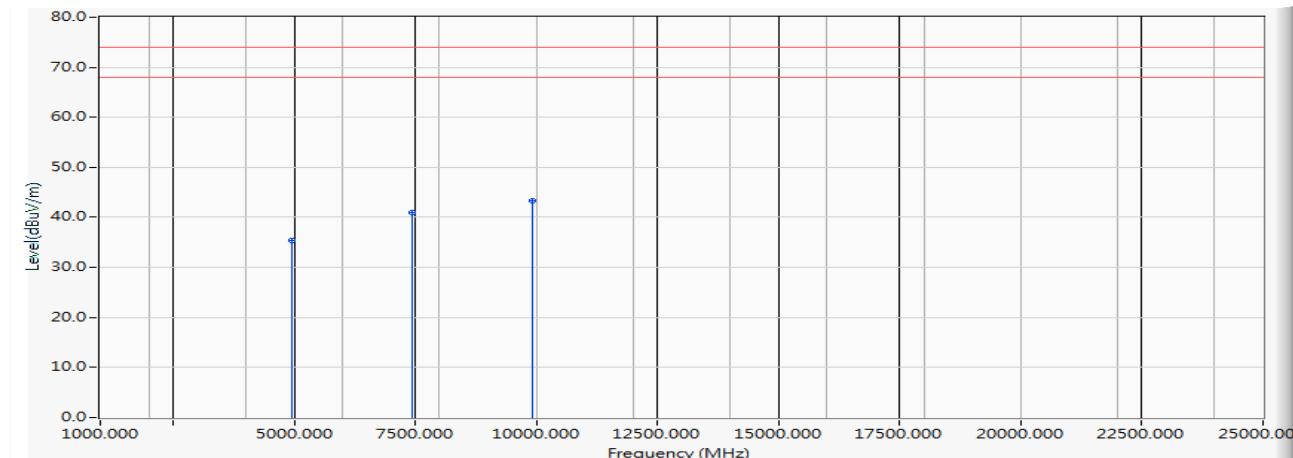


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	4960.000	-10.666	45.990	35.325	-38.675	74.000	PEAK
2	7440.000	-3.631	44.560	40.929	-33.071	74.000	PEAK
3	*	-2.397	45.800	43.403	-30.597	74.000	PEAK

#### Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9560  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test date : 2019/01/02  
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK) (2480MHz)

## Vertical

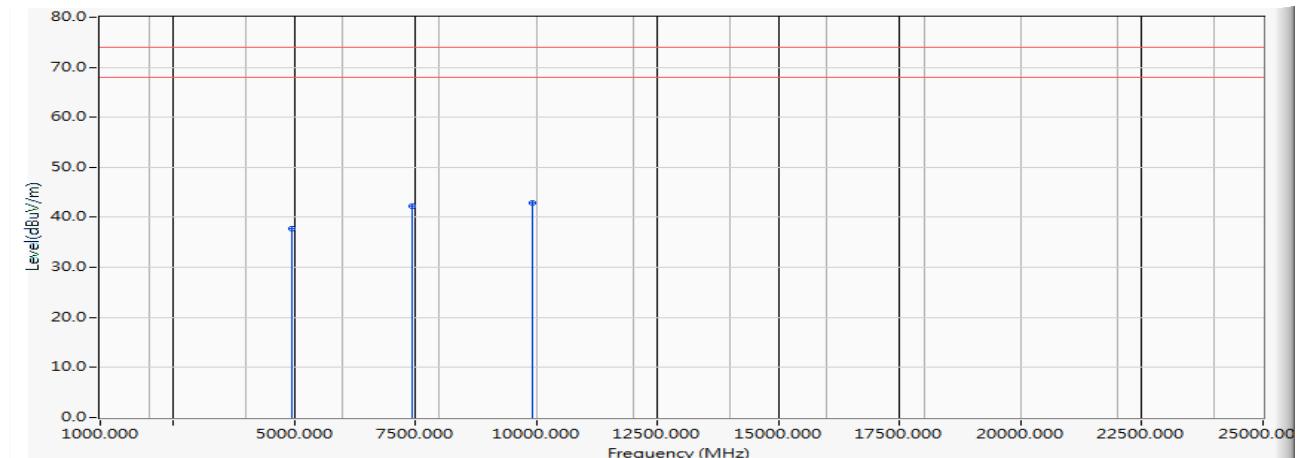


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type	
1	4960.000	-7.869	45.640	37.772	-36.228	74.000	PEAK	
2	7440.000	-2.772	44.940	42.168	-31.832	74.000	PEAK	
3	*	9920.000	-1.895	44.860	42.965	-31.035	74.000	PEAK

## Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9560  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test date : 2019/01/02  
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK)(2402MHz)

#### Horizontal

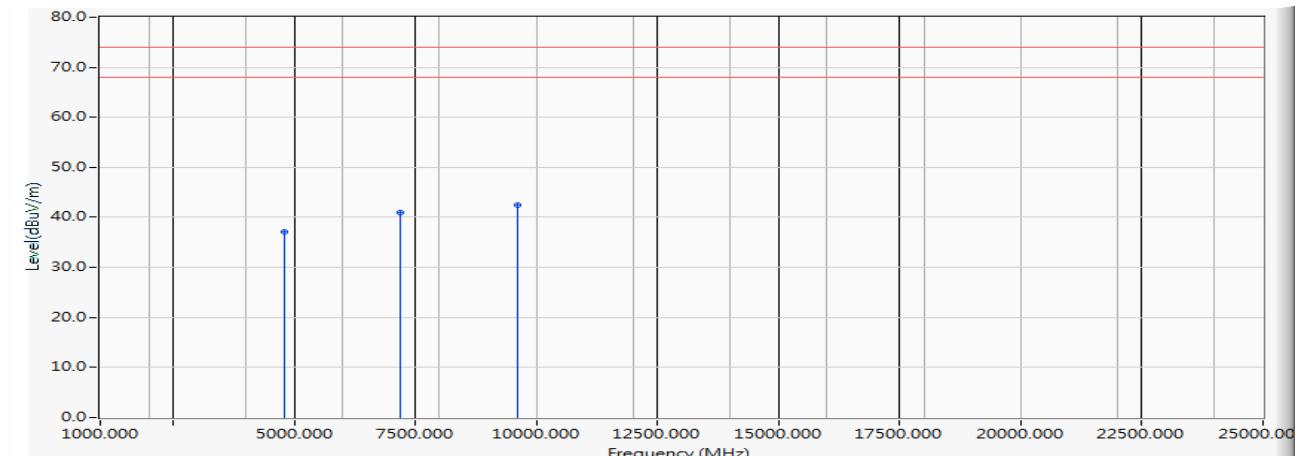


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	4804.000	-9.896	46.980	37.084	-36.916	74.000	PEAK
2	7206.000	-5.013	45.970	40.957	-33.043	74.000	PEAK
3	*	-1.472	43.970	42.499	-31.501	74.000	PEAK

#### Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9560  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test date : 2019/01/02  
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK)(2402MHz)

## Vertical

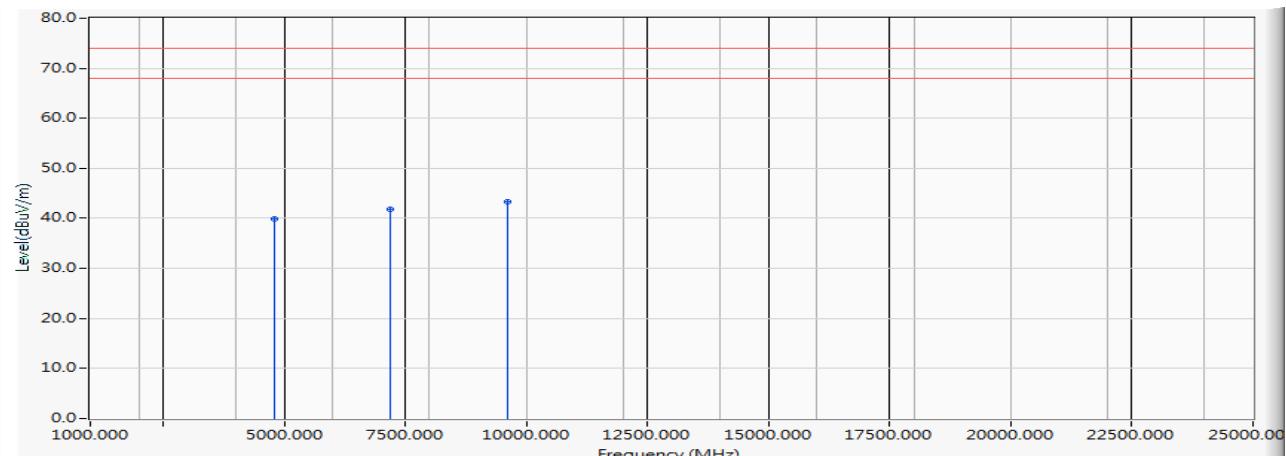


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	4804.000	-6.585	46.580	39.995	-34.005	74.000	PEAK
2	7206.000	-4.144	46.030	41.886	-32.114	74.000	PEAK
3 *	9608.000	-1.075	44.430	43.356	-30.644	74.000	PEAK

## Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9560  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test date : 2019/01/02  
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK) (2441MHz)

#### Horizontal

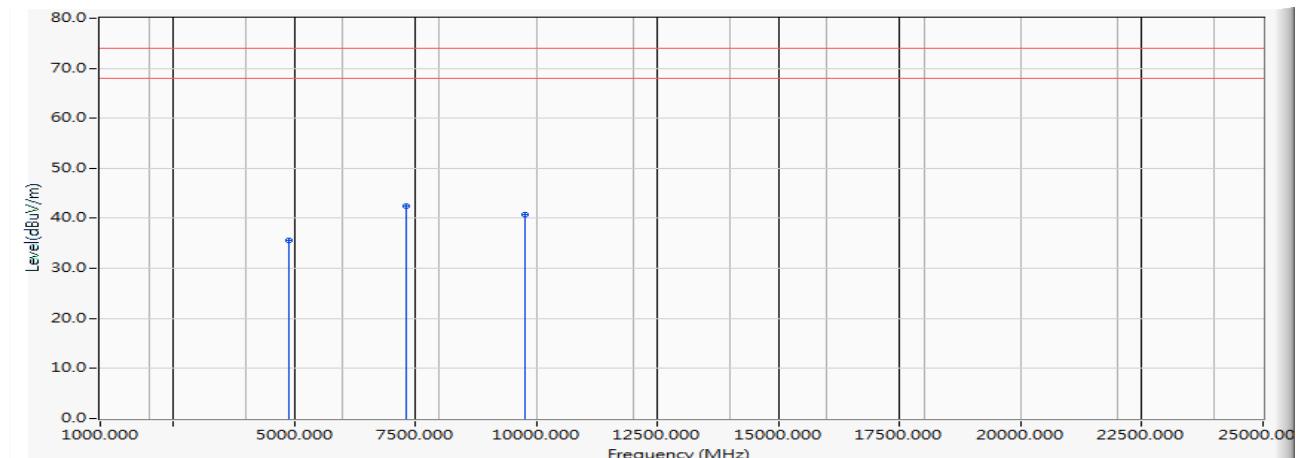


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	4882.000	-10.318	45.870	35.552	-38.448	74.000	PEAK
2	* 7323.000	-3.858	46.220	42.362	-31.638	74.000	PEAK
3	9764.000	-2.596	43.330	40.734	-33.266	74.000	PEAK

#### Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9560  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test date : 2019/01/02  
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK) (2441MHz)

## Vertical

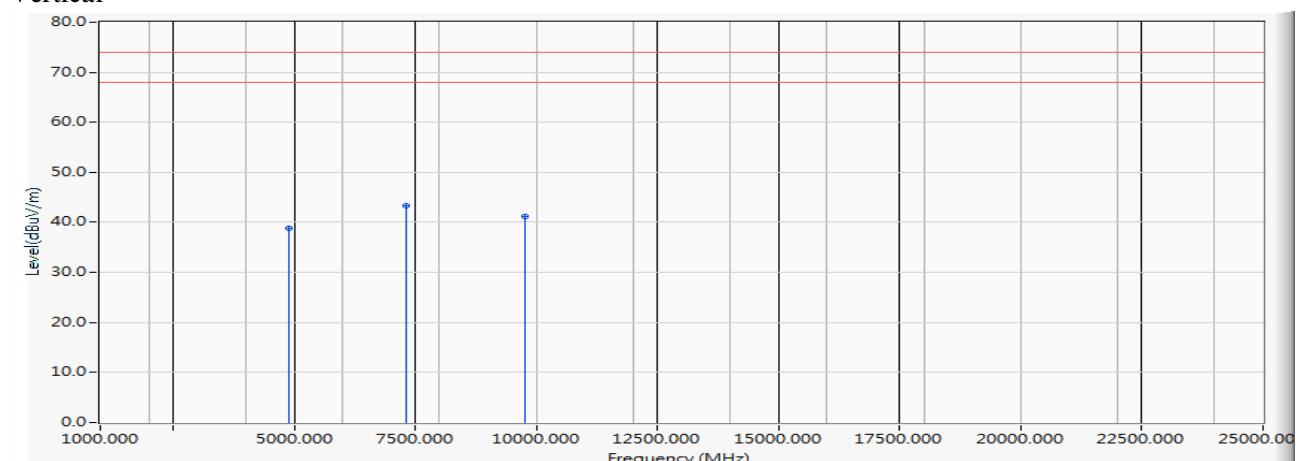


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	4882.000	-7.606	46.360	38.754	-35.246	74.000	PEAK
2	* 7323.000	-2.977	46.390	43.414	-30.586	74.000	PEAK
3	9764.000	-2.131	43.220	41.089	-32.911	74.000	PEAK

## Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9560  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test date : 2019/01/02  
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK) (2480MHz)

#### Horizontal

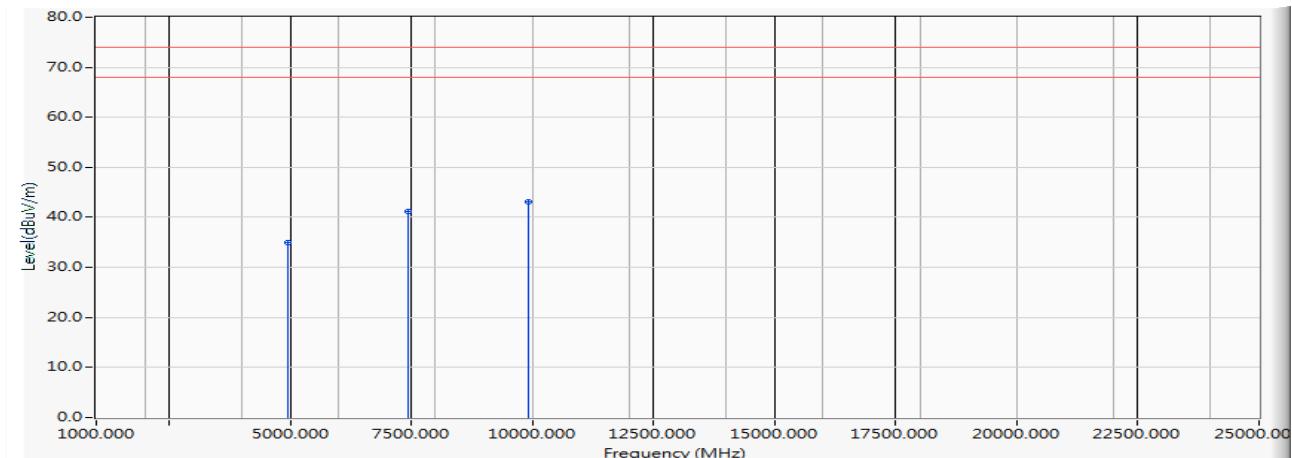


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	4960.000	-10.666	45.700	35.035	-38.965	74.000	PEAK
2	7440.000	-3.631	44.800	41.169	-32.831	74.000	PEAK
3	*	-2.397	45.400	43.003	-30.997	74.000	PEAK

#### Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9560  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test date : 2019/01/02  
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK) (2480MHz)

## Vertical

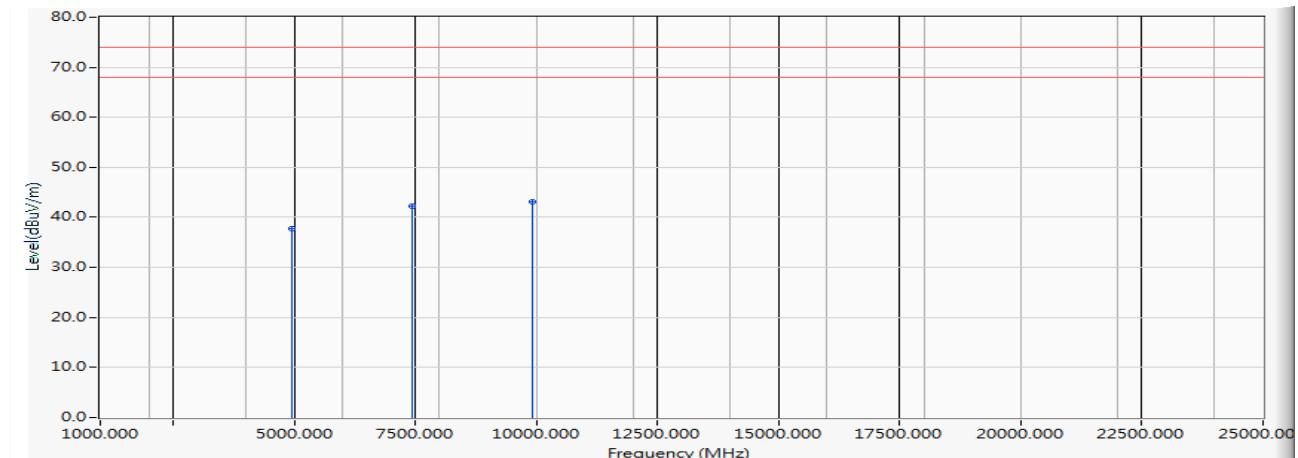


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type	
1	4960.000	-7.869	45.660	37.792	-36.208	74.000	PEAK	
2	7440.000	-2.772	45.130	42.358	-31.642	74.000	PEAK	
3	*	9920.000	-1.895	45.080	43.185	-30.815	74.000	PEAK

## Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9560  
 Test Item : General Radiated Emission  
 Test Site : No.3 OATS  
 Test date : 2019/01/09  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2441MHz)

Horizontal

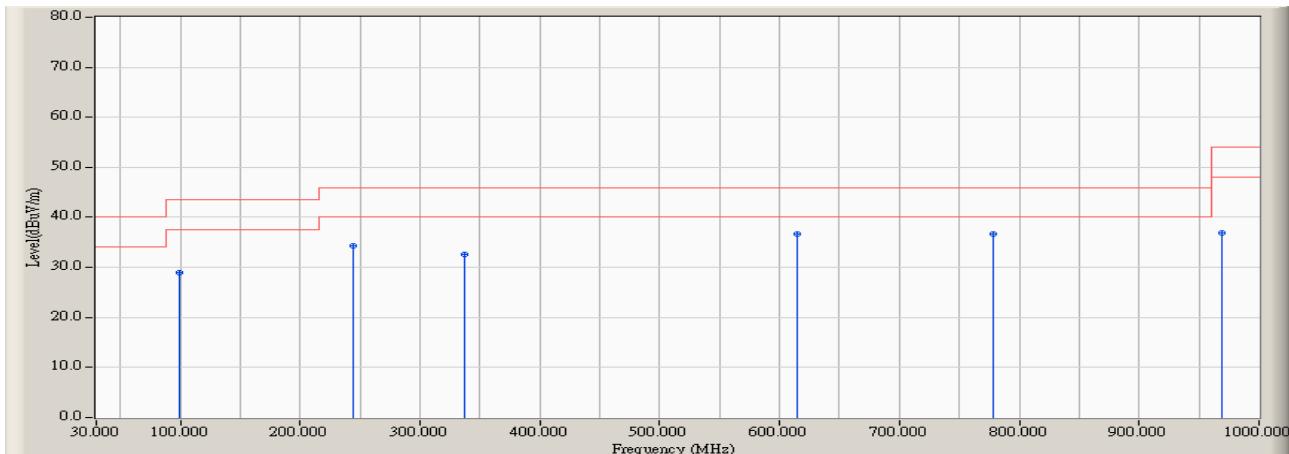


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	99.952	17.800	11.054	28.855	-14.645	43.500	QUASIPEAK
2	244.519	14.496	19.903	34.399	-11.601	46.000	QUASIPEAK
3	337.788	17.383	15.132	32.516	-13.484	46.000	QUASIPEAK
4 *	614.487	26.500	10.267	36.768	-9.232	46.000	QUASIPEAK
5	777.708	26.418	10.315	36.734	-9.266	46.000	QUASIPEAK
6	968.910	27.169	9.732	36.901	-17.099	54.000	QUASIPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9560  
 Test Item : General Radiated Emission  
 Test Site : No.3 OATS  
 Test date : 2019/01/09  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2441MHz)

Vertical

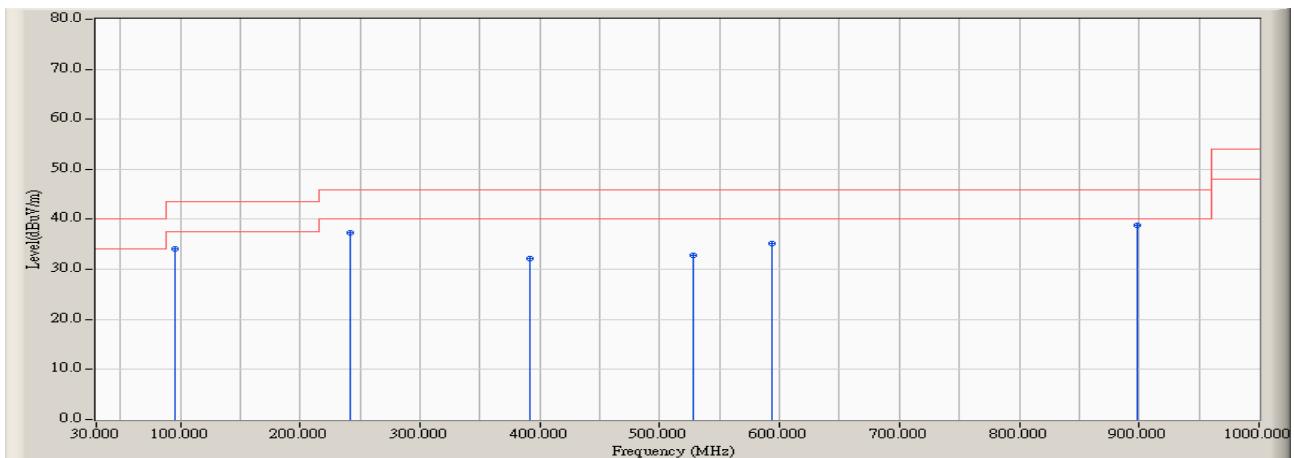


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	95.288	16.199	17.803	34.001	-9.499	43.500	QUASIPEAK
2	241.410	19.992	17.266	37.258	-8.742	46.000	QUASIPEAK
3	392.196	20.113	12.115	32.228	-13.772	46.000	QUASIPEAK
4	527.436	21.506	11.296	32.803	-13.197	46.000	QUASIPEAK
5	594.279	23.197	12.081	35.278	-10.722	46.000	QUASIPEAK
6	*	27.616	11.112	38.728	-7.272	46.000	QUASIPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9560  
 Test Item : General Radiated Emission  
 Test Site : No.3 OATS  
 Test date : 2019/01/09  
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK) (2441MHz)

## Horizontal

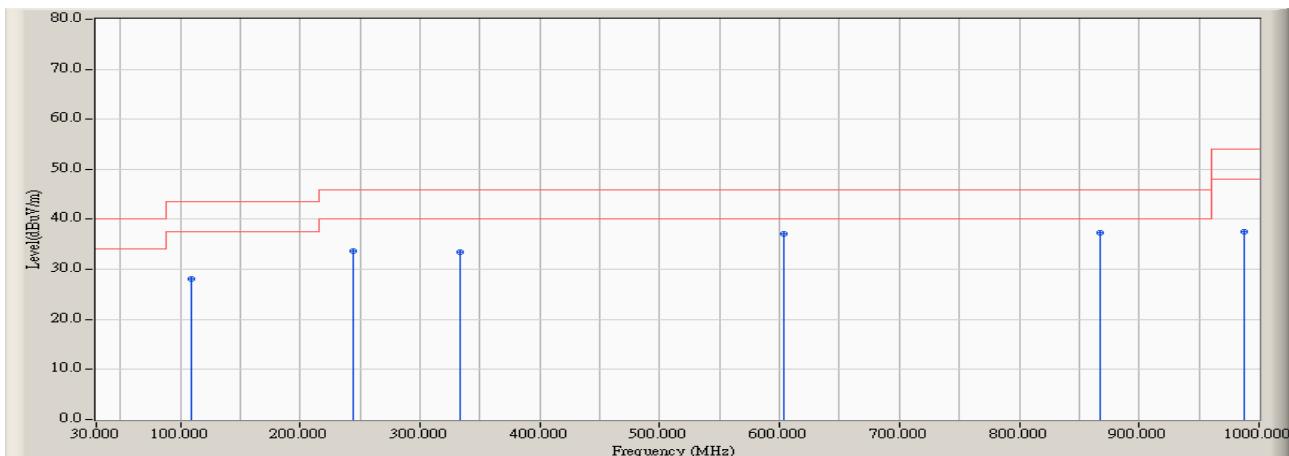


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	109.279	14.814	13.179	27.993	-15.507	43.500	QUASIPEAK
2	244.519	14.496	19.227	33.723	-12.277	46.000	QUASIPEAK
3	333.125	17.073	16.283	33.356	-12.644	46.000	QUASIPEAK
4	603.606	26.651	10.362	37.013	-8.987	46.000	QUASIPEAK
5	*	26.568	10.726	37.294	-8.706	46.000	QUASIPEAK
6	987.564	27.363	10.138	37.501	-16.499	54.000	QUASIPEAK

## Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9560  
 Test Item : General Radiated Emission  
 Test Site : No.3 OATS  
 Test date : 2019/01/09  
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK) (2441MHz)

Vertical

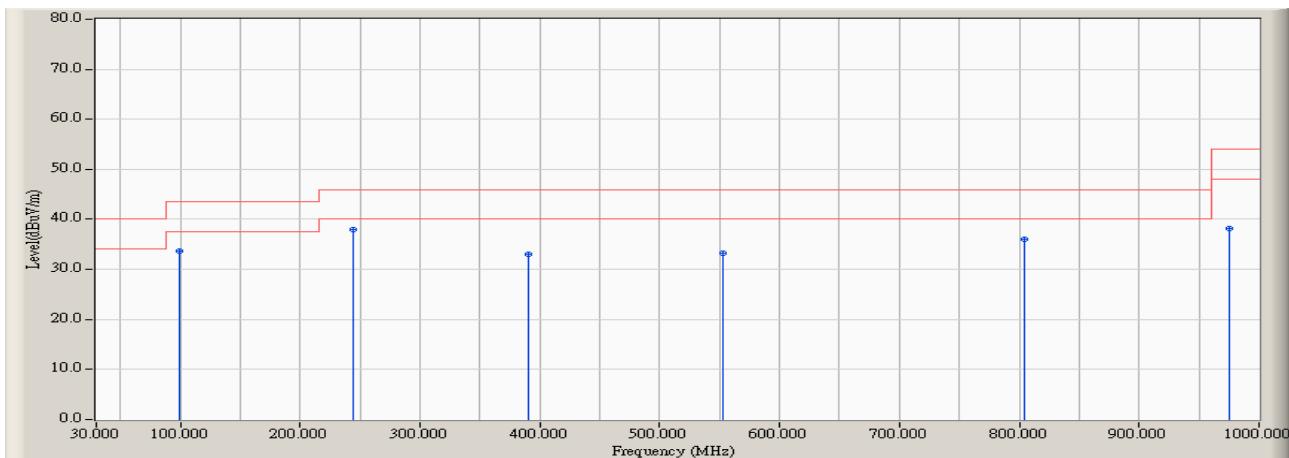


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	99.952	17.804	15.818	33.622	-9.878	43.500	QUASIPEAK
2	* 244.519	19.952	18.004	37.956	-8.044	46.000	QUASIPEAK
3	390.641	20.000	13.103	33.103	-12.897	46.000	QUASIPEAK
4	552.308	22.142	11.183	33.326	-12.674	46.000	QUASIPEAK
5	804.135	24.994	10.933	35.927	-10.073	46.000	QUASIPEAK
6	975.128	27.894	10.301	38.195	-15.805	54.000	QUASIPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9560  
 Test Item : General Radiated Emission  
 Test Site : No.3 OATS  
 Test date : 2019/01/09  
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK) (2441MHz)

#### Horizontal

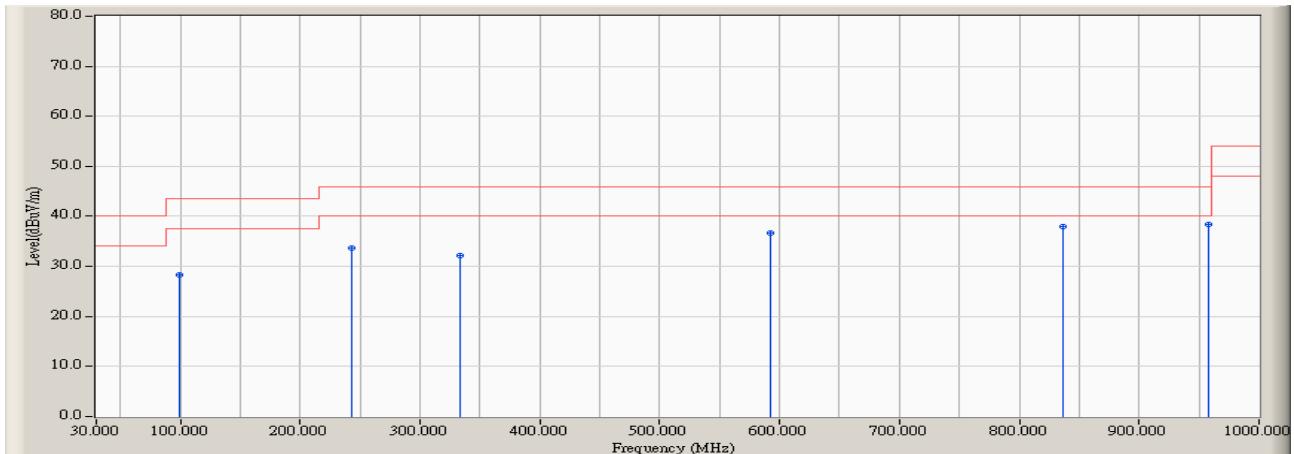


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	99.952	17.800	10.554	28.355	-15.145	43.500	QUASIPEAK
2	242.965	14.372	19.368	33.740	-12.260	46.000	QUASIPEAK
3	333.125	17.073	15.155	32.228	-13.772	46.000	QUASIPEAK
4	592.724	26.365	10.316	36.682	-9.318	46.000	QUASIPEAK
5	836.779	26.651	11.384	38.035	-7.965	46.000	QUASIPEAK
6	*	27.056	11.279	38.335	-7.665	46.000	QUASIPEAK

#### Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wireless-AC 9560  
 Test Item : General Radiated Emission  
 Test Site : No.3 OATS  
 Test date : 2019/01/09  
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK) (2441MHz)

## Vertical

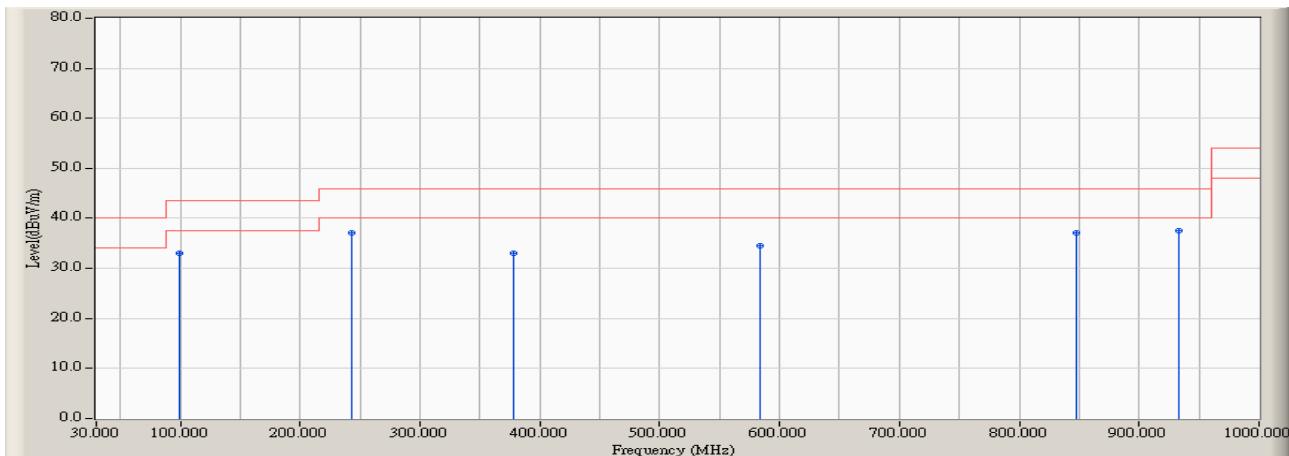

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB <sub>uV</sub> )	Measure Level (dB <sub>uV/m</sub> )	Margin (dB)	Limit (dB <sub>uV/m</sub> )	Detector Type
1	99.952	17.804	15.326	33.130	-10.370	43.500	QUASIPEAK
2	242.965	19.972	17.171	37.144	-8.856	46.000	QUASIPEAK
3	378.205	19.139	13.911	33.051	-12.949	46.000	QUASIPEAK
4	583.397	22.929	11.668	34.597	-11.403	46.000	QUASIPEAK
5	847.660	26.203	10.891	37.095	-8.905	46.000	QUASIPEAK
6	*	27.748	9.691	37.439	-8.561	46.000	QUASIPEAK


## Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

## 4. Band Edge


### 4.1. Test Setup

#### RF Conducted Measurement

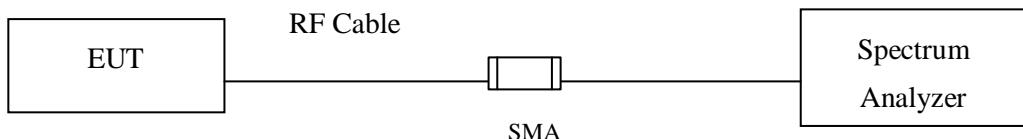

#### RF Radiated Measurement:

Above 1GHz

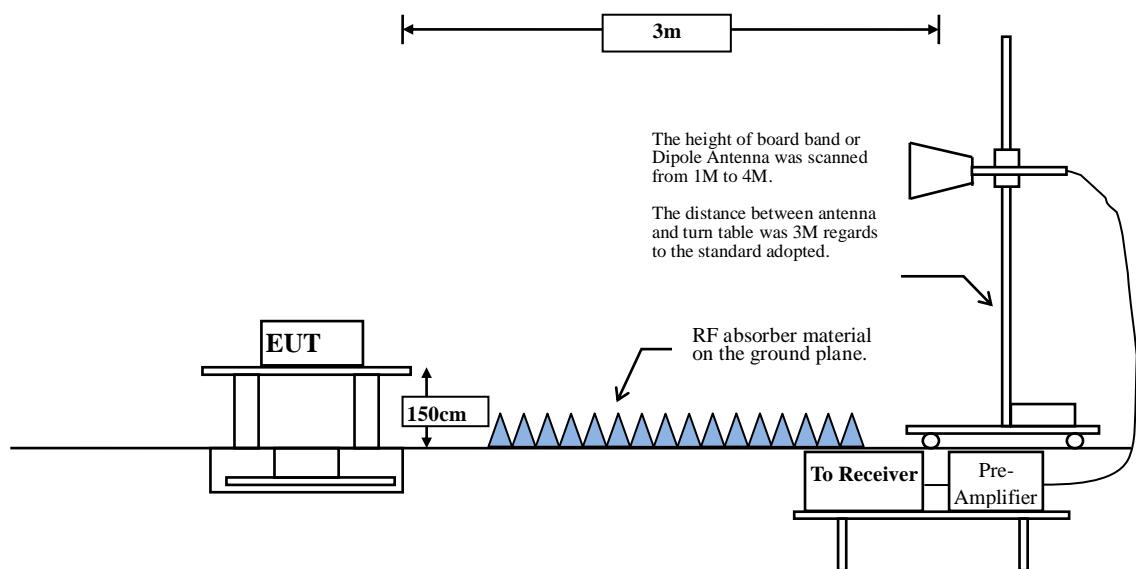

#### 4.2. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

#### 4.3. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

The bandwidth setting below 1GHz and above 1GHz on the field strength meter is 120 kHz and 1MHz, respectively.


#### 4.4. Uncertainty

± 4.08 dB above 1GHz

± 4.22 dB below 1GHz

#### 4.5. Test Result of Band Edge

Product : Intel® Wireless-AC 9560  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test date : 2018/12/26  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2402MHz)

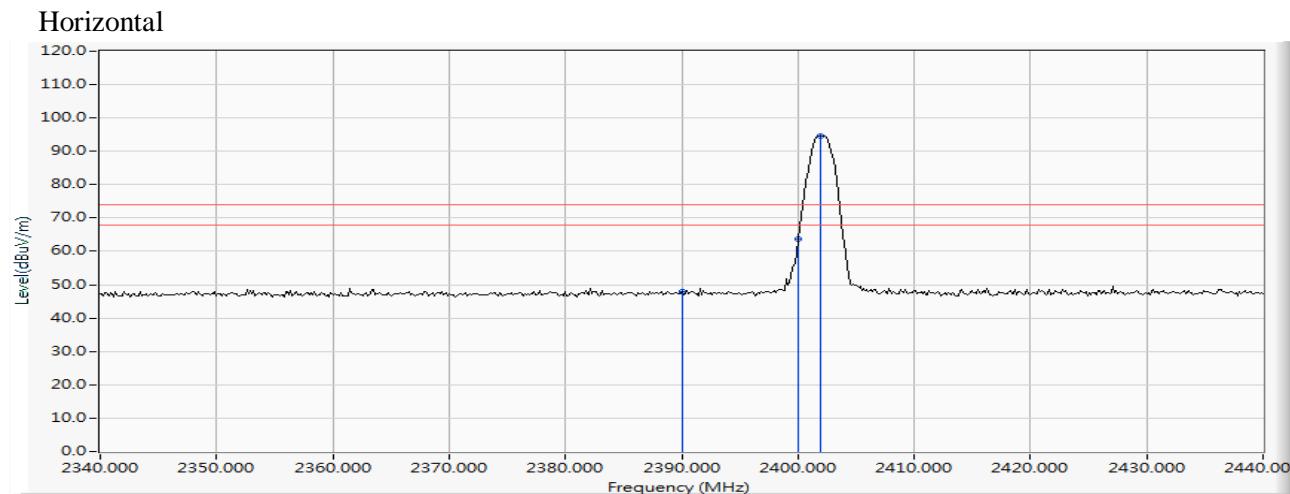


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2390.000	6.474	41.400	47.875	-26.125	74.000	PEAK
2	2400.000	6.528	57.107	63.635	-10.365	74.000	PEAK
3 *	2401.884	6.540	88.155	94.695	20.695	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Intel® Wireless-AC 9560  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test date : 2018/12/26  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2402MHz)

### Horizontal

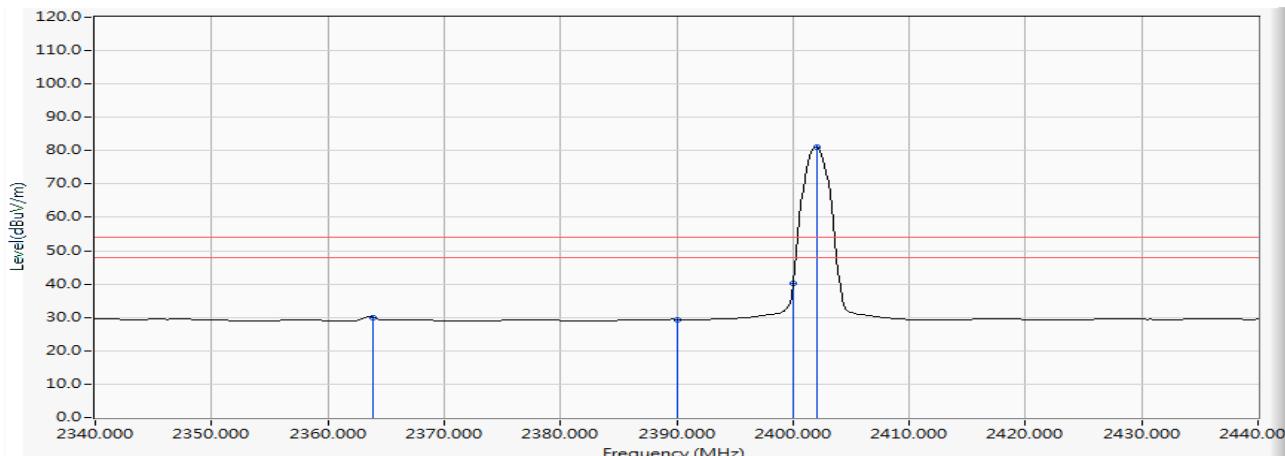


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2363.913	6.358	23.682	30.040	-23.960	54.000	AVERAGE
2	2390.000	6.474	22.934	29.409	-24.591	54.000	AVERAGE
3	2400.000	6.528	33.774	40.302	-13.698	54.000	AVERAGE
4	*	6.540	74.418	80.958	26.958	54.000	AVERAGE

### Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Intel® Wireless-AC 9560  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test date : 2018/12/26  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2402MHz)

### VERTICAL

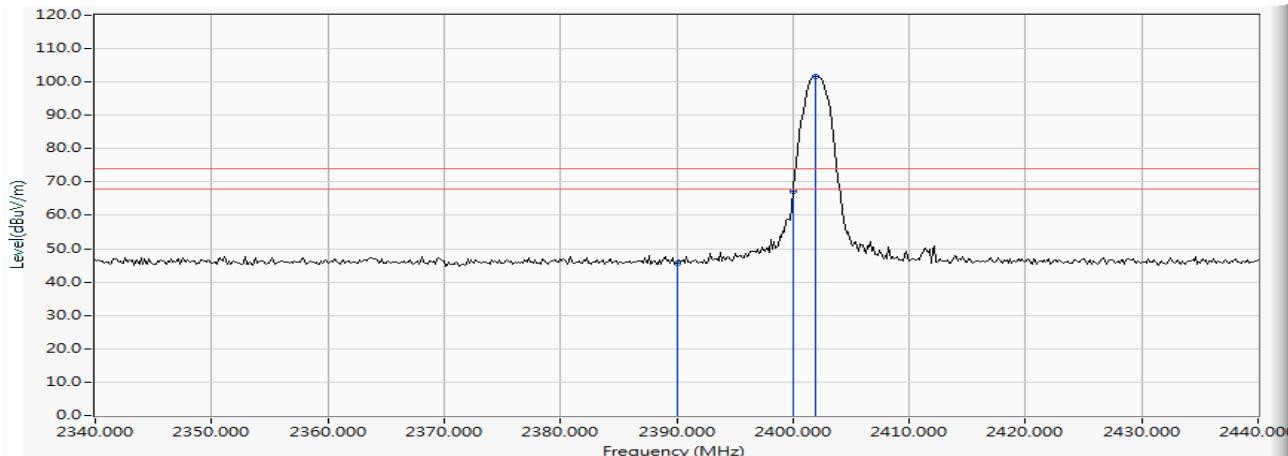


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2390.000	5.880	39.834	45.715	-28.285	74.000	PEAK
2	2400.000	5.879	61.467	67.346	-6.654	74.000	PEAK
3	*	5.884	95.668	101.552	27.552	74.000	PEAK

#### Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Intel® Wireless-AC 9560  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test date : 2018/12/26  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2402MHz)

### VERTICAL

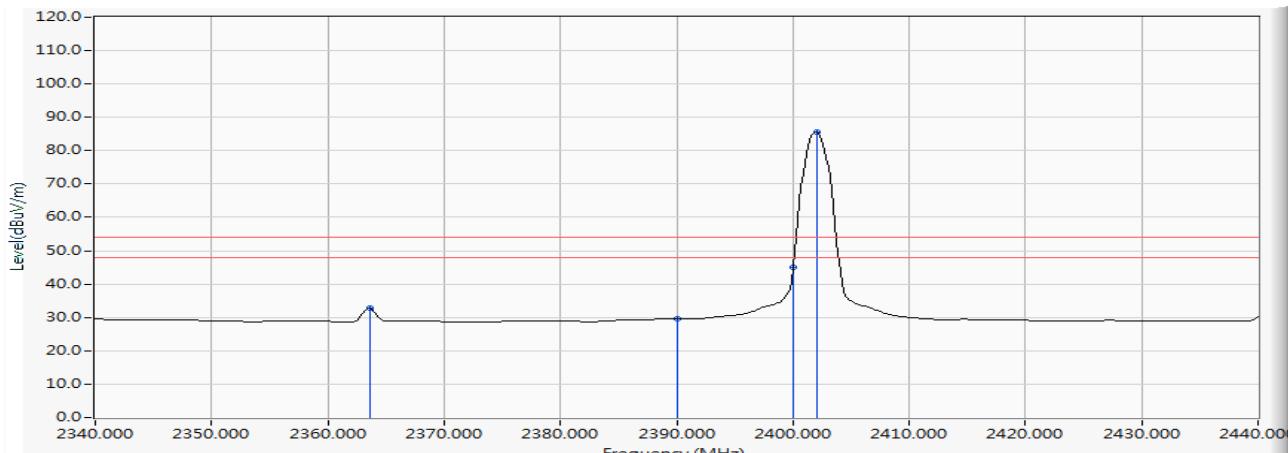


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2363.623	5.989	26.810	32.799	-21.201	54.000	AVERAGE
2	2390.000	5.880	23.743	29.624	-24.376	54.000	AVERAGE
3	2400.000	5.879	39.269	45.148	-8.852	54.000	AVERAGE
4	*	5.884	79.701	85.585	31.585	54.000	AVERAGE

#### Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Intel® Wireless-AC 9560  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test date : 2018/12/26  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2480MHz)

#### Horizontal

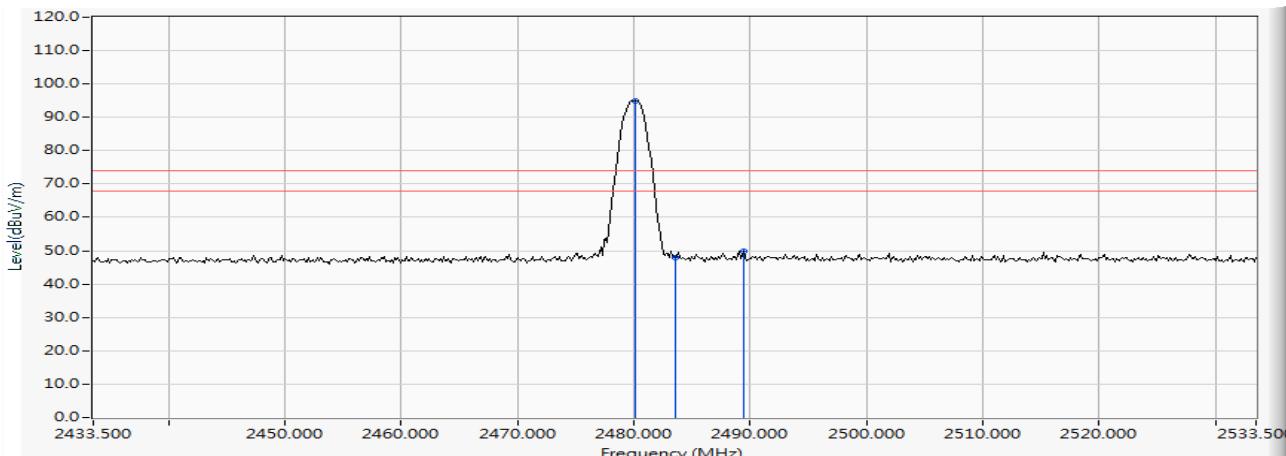


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2480.167	7.087	87.731	94.817	20.817	74.000	PEAK
2	2483.500	7.110	40.985	48.095	-25.905	74.000	PEAK
3	2489.442	7.153	42.822	49.974	-24.026	74.000	PEAK

#### Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Intel® Wireless-AC 9560  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test date : 2018/12/26  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2480MHz)

Horizontal

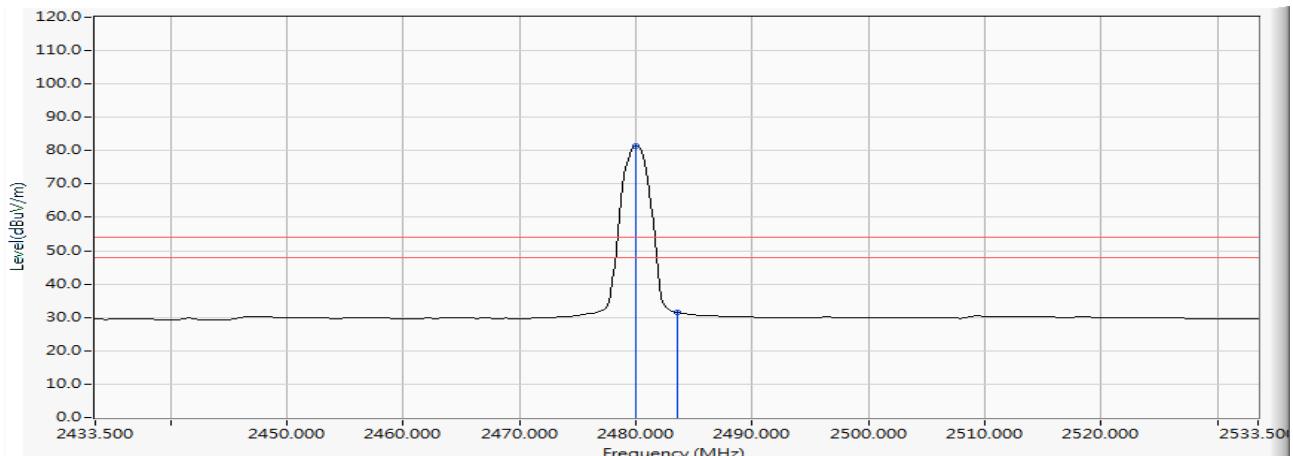


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2480.022	7.086	74.387	81.472	27.472	54.000	AVERAGE
2		2483.500	7.110	24.410	31.520	-22.480	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Intel® Wireless-AC 9560  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test date : 2018/12/26  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2480MHz)

#### VERTICAL

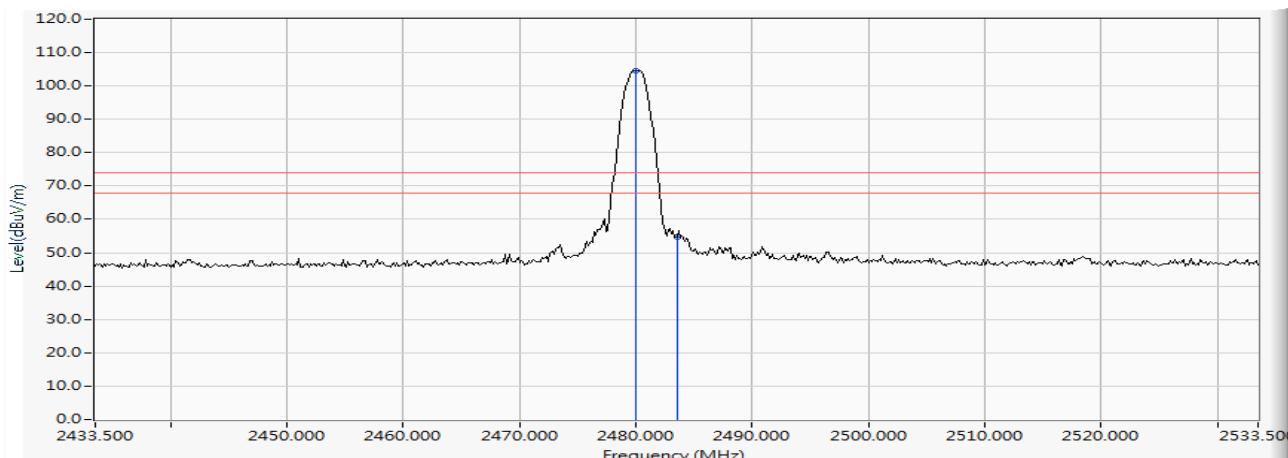


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2480.022	6.342	98.320	104.662	30.662	74.000	PEAK
2		2483.500	6.363	48.360	54.723	-19.277	74.000	PEAK

#### Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Intel® Wireless-AC 9560  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test date : 2018/12/26  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2480MHz)

#### VERTICAL

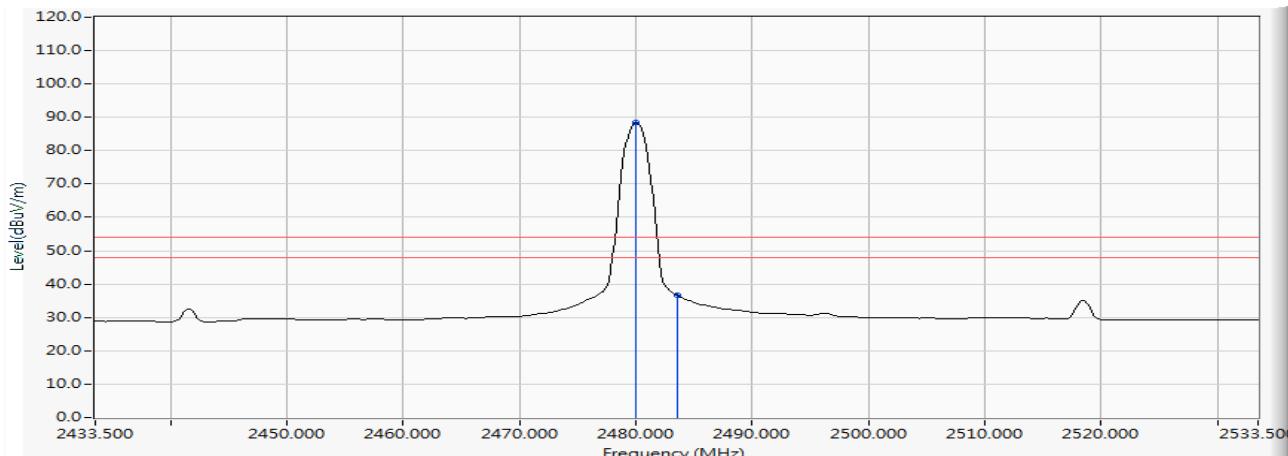


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2480.022	6.342	81.996	88.338	34.338	54.000	AVERAGE
2		2483.500	6.363	30.226	36.589	-17.411	54.000	AVERAGE

#### Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Intel® Wireless-AC 9560  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test date : 2018/12/26  
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK) (2402MHz)

Horizontal

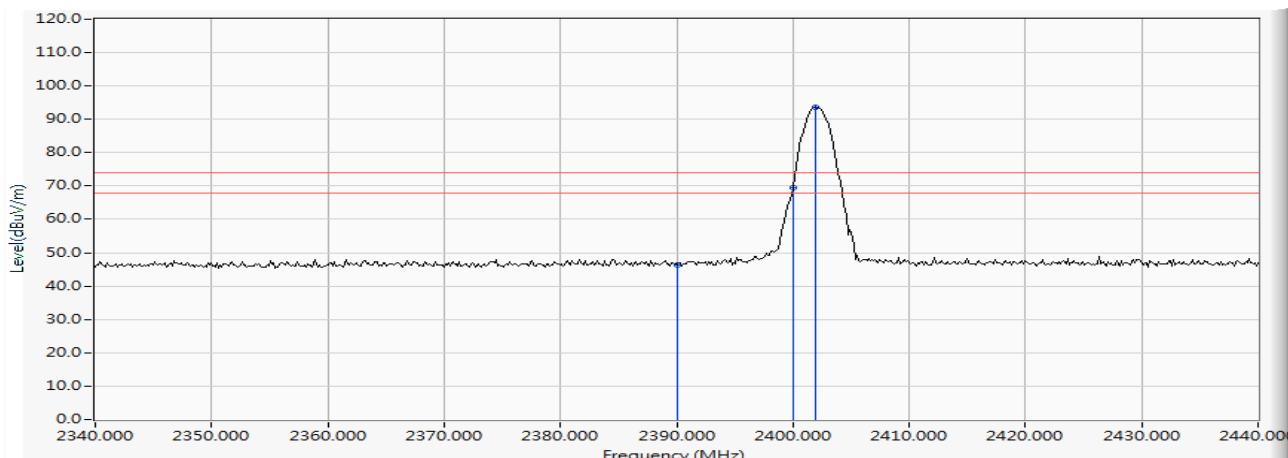


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2390.000	6.474	39.700	46.175	-27.825	74.000	PEAK
2	2400.000	6.528	63.033	69.561	-4.439	74.000	PEAK
3 *	2401.884	6.540	86.940	93.480	19.480	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Intel® Wireless-AC 9560  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test date : 2018/12/26  
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK) (2402MHz)

## Horizontal

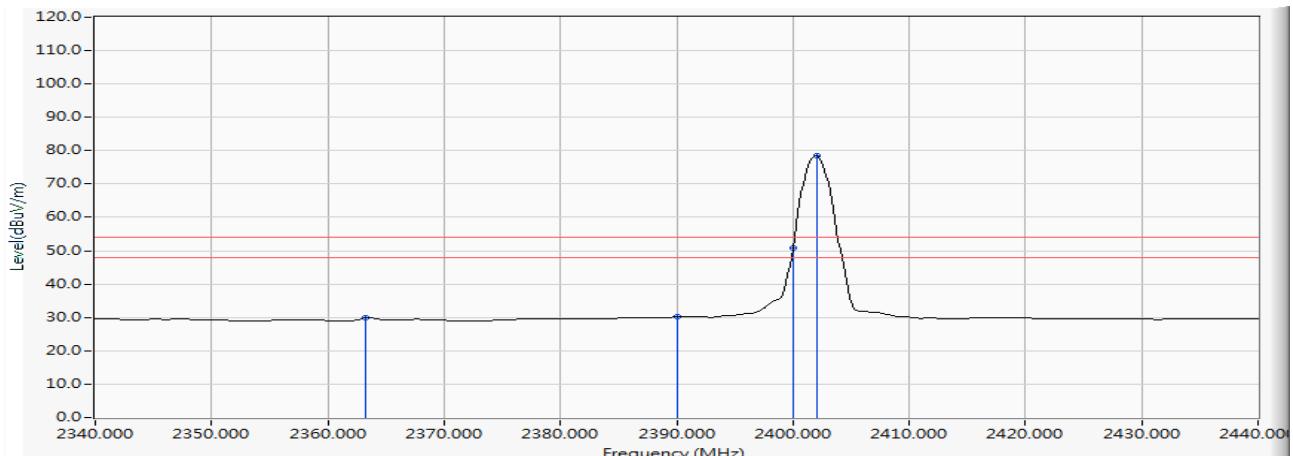


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2363.188	6.355	23.511	29.866	-24.134	54.000	AVERAGE
2	2390.000	6.474	23.689	30.164	-23.836	54.000	AVERAGE
3	2400.000	6.528	44.185	50.713	-3.287	54.000	AVERAGE
4	* 2402.029	6.540	72.001	78.541	24.541	54.000	AVERAGE

## Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Intel® Wireless-AC 9560  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test date : 2018/12/26  
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK) (2402MHz)

#### VERTICAL

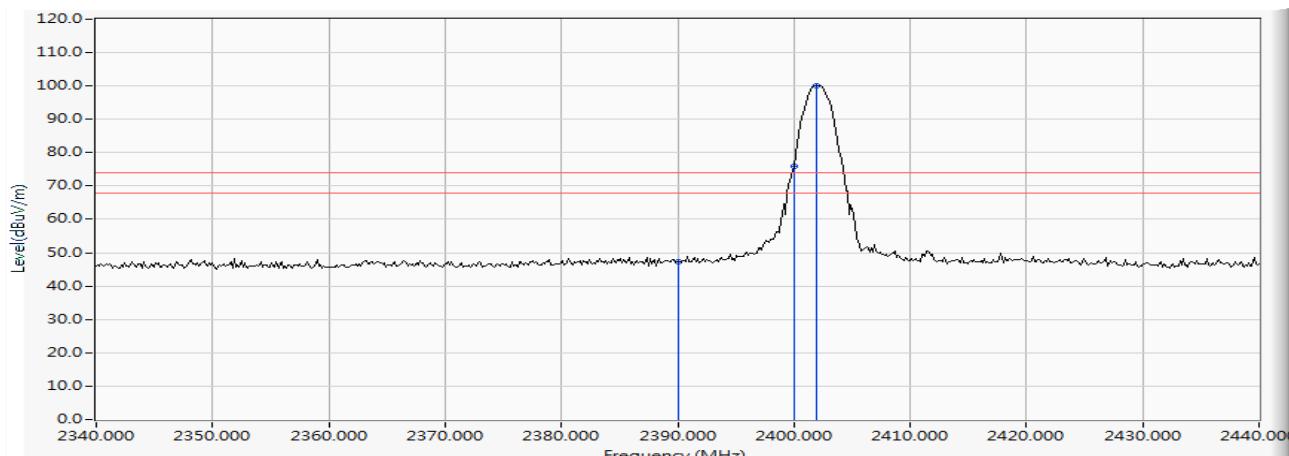


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type	
1	2390.000	5.880	41.425	47.306	-26.694	74.000	PEAK	
2	2400.000	5.879	70.075	75.954	1.954	74.000	PEAK	
3	*	2401.884	5.884	94.323	100.207	26.207	74.000	PEAK

#### Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Intel® Wireless-AC 9560  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test date : 2018/12/26  
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK) (2402MHz)

#### VERTICAL

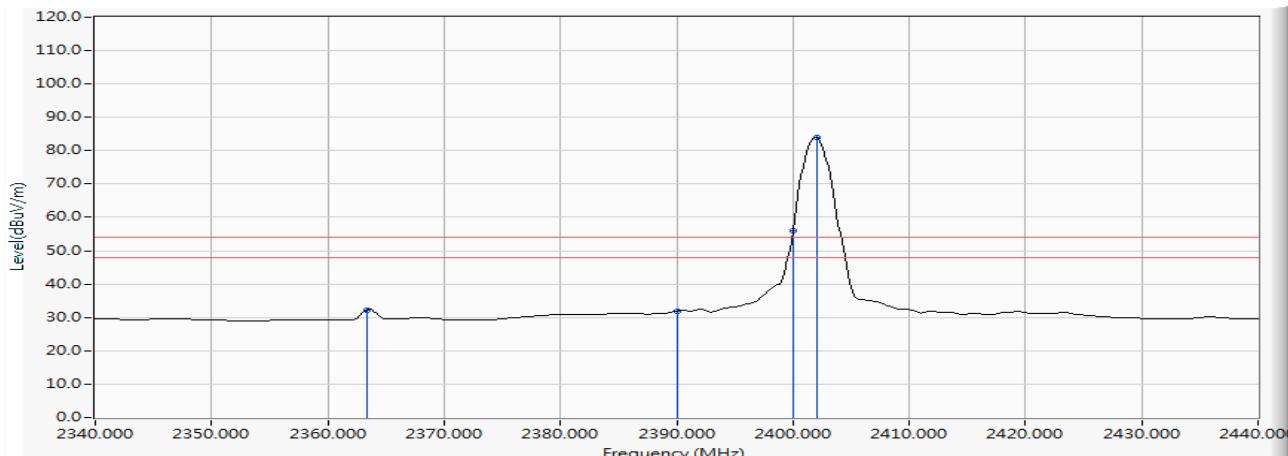


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2363.333	5.990	26.321	32.311	-21.689	54.000	AVERAGE
2	2390.000	5.880	26.078	31.959	-22.041	54.000	AVERAGE
3	2400.000	5.879	50.111	55.990	1.990	54.000	AVERAGE
4	* 2402.029	5.884	78.152	84.036	30.036	54.000	AVERAGE

#### Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Intel® Wireless-AC 9560  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test date : 2018/12/26  
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK) (2480MHz)

#### Horizontal

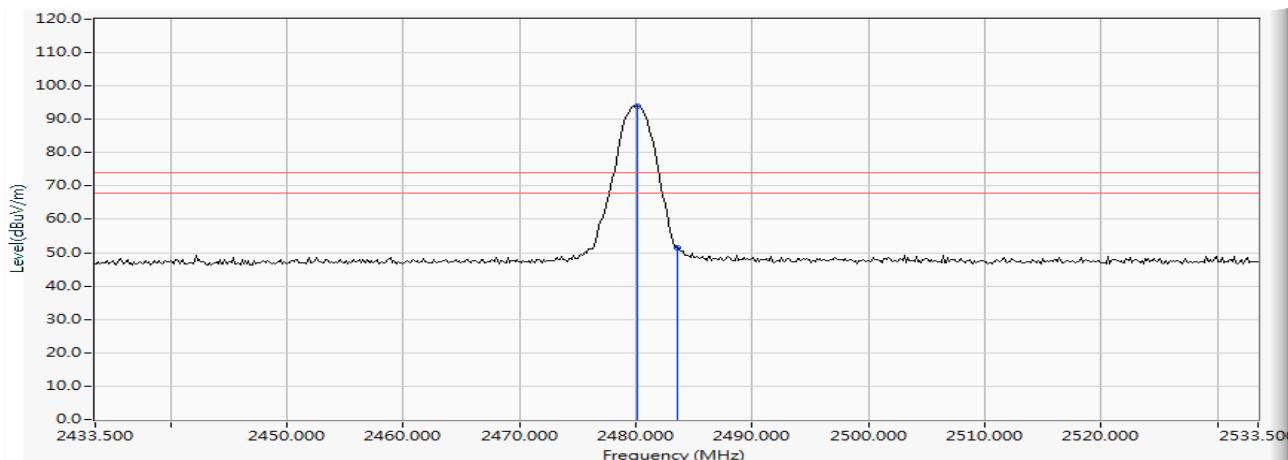


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2480.167	7.087	86.827	93.913	19.913	74.000	PEAK
2		2483.500	7.110	44.247	51.357	-22.643	74.000	PEAK

#### Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Intel® Wireless-AC 9560  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test date : 2018/12/26  
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK) (2480MHz)

Horizontal

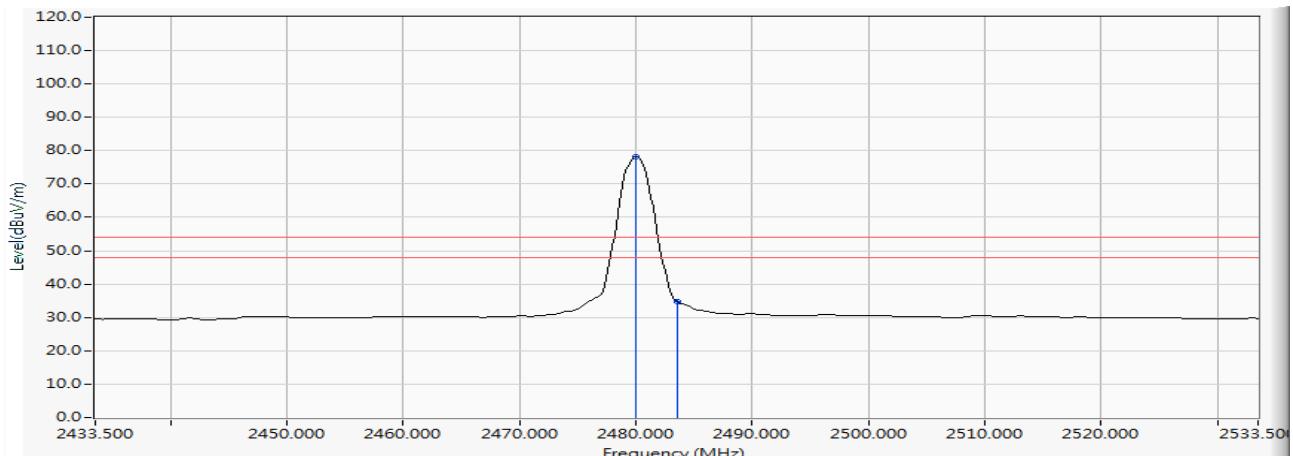


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2480.022	7.086	71.147	78.232	24.232	54.000	AVERAGE
2		2483.500	7.110	27.730	34.840	-19.160	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Intel® Wireless-AC 9560  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test date : 2018/12/26  
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK) (2480MHz)

#### VERTICAL

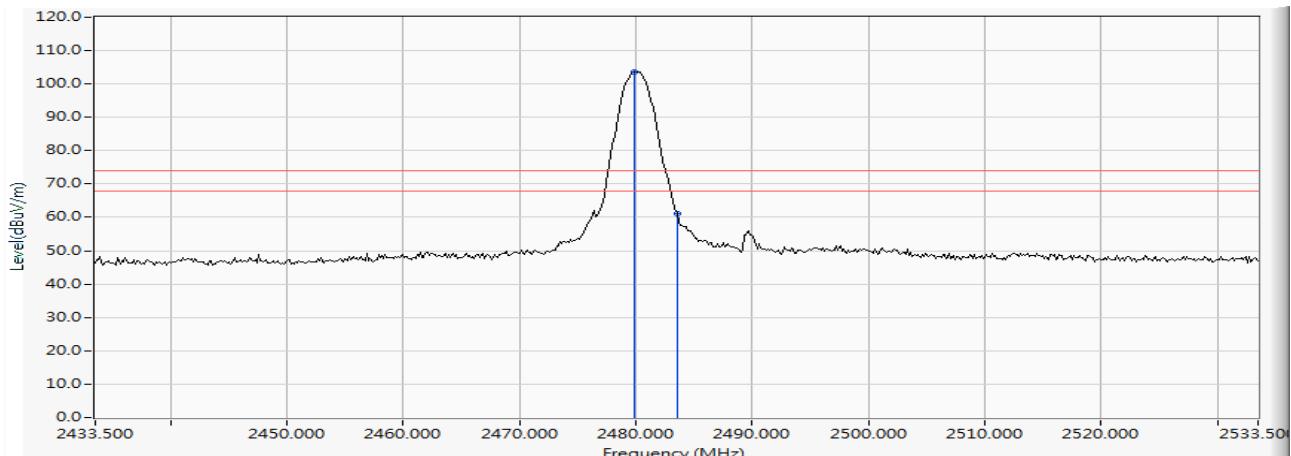


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2479.877	6.341	97.345	103.686	29.686	74.000	PEAK
2		2483.500	6.363	54.815	61.178	-12.822	74.000	PEAK

#### Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Intel® Wireless-AC 9560  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test date : 2018/12/26  
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK) (2480MHz)

#### VERTICAL

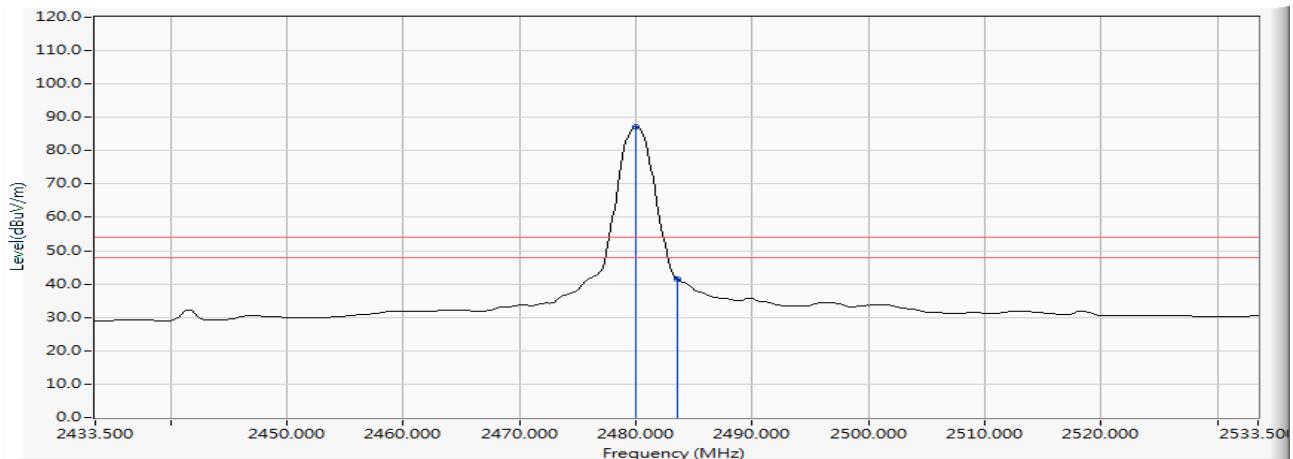


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2480.022	6.342	80.805	87.147	33.147	54.000	AVERAGE
2		2483.500	6.363	35.224	41.587	-12.413	54.000	AVERAGE

#### Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Intel® Wireless-AC 9560  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test date : 2018/12/26  
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK) (2402MHz)

Horizontal

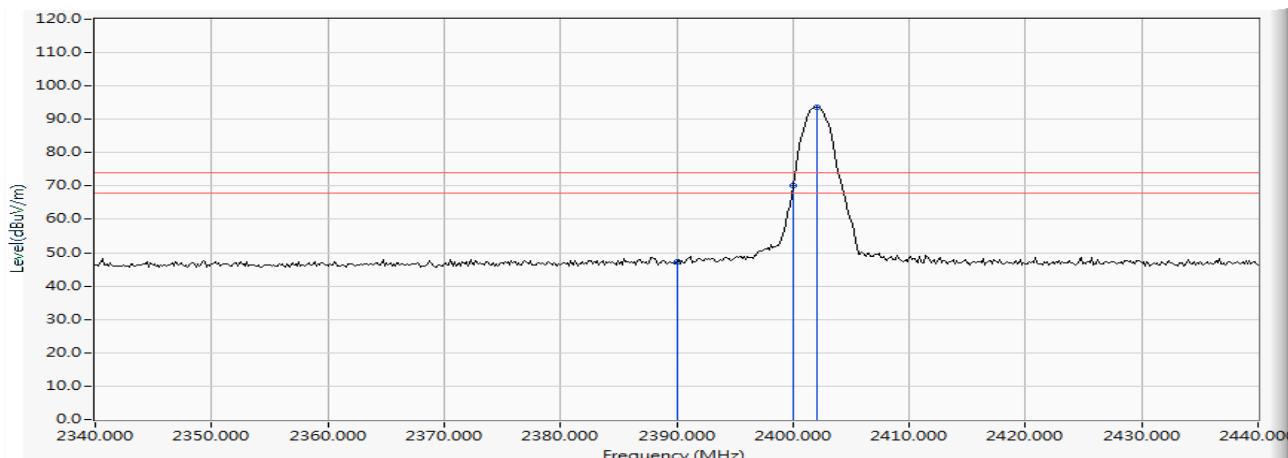


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2390.000	6.474	40.775	47.250	-26.750	74.000	PEAK
2	2400.000	6.528	63.504	70.032	-3.968	74.000	PEAK
3 *	2402.029	6.540	87.077	93.617	19.617	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Intel® Wireless-AC 9560  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test date : 2018/12/26  
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK) (2402MHz)

## Horizontal

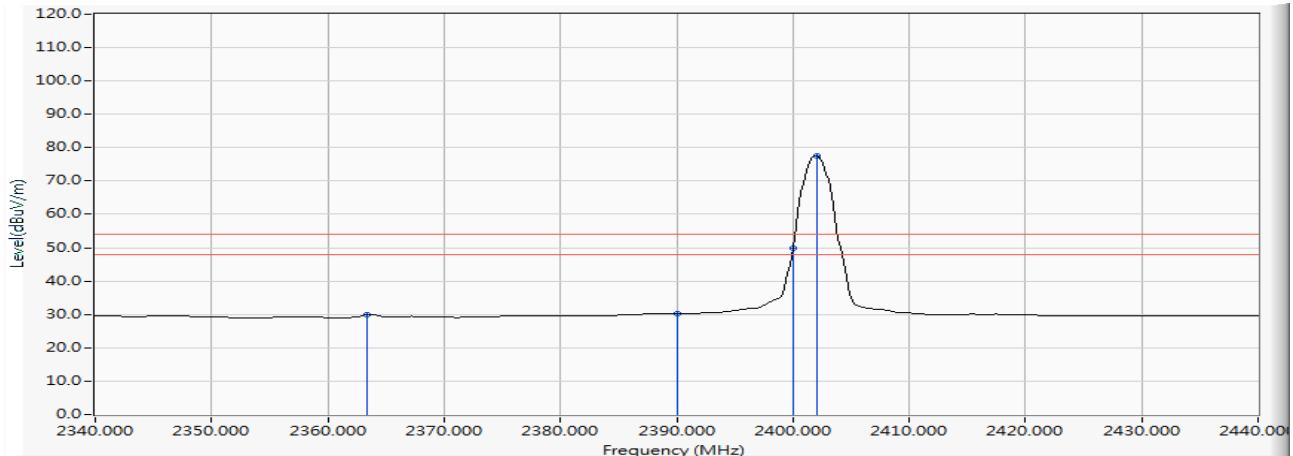


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2363.333	6.356	23.637	29.993	-24.007	54.000	AVERAGE
2	2390.000	6.474	23.758	30.233	-23.767	54.000	AVERAGE
3	2400.000	6.528	43.442	49.970	-4.030	54.000	AVERAGE
4	* 2402.029	6.540	70.954	77.494	23.494	54.000	AVERAGE

## Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Intel® Wireless-AC 9560  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test date : 2018/12/26  
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK) (2402MHz)

#### VERTICAL

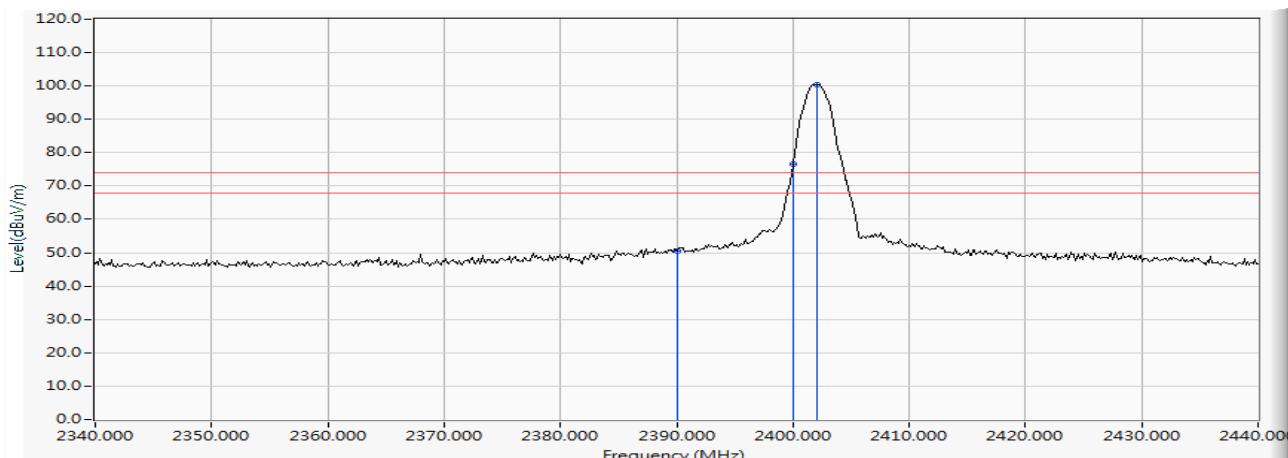


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type	
1	2390.000	5.880	44.530	50.411	-23.589	74.000	PEAK	
2	2400.000	5.879	70.801	76.680	2.680	74.000	PEAK	
3	*	2402.029	5.884	94.564	100.448	26.448	74.000	PEAK

#### Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Intel® Wireless-AC 9560  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test date : 2018/12/26  
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK) (2402MHz)

#### VERTICAL

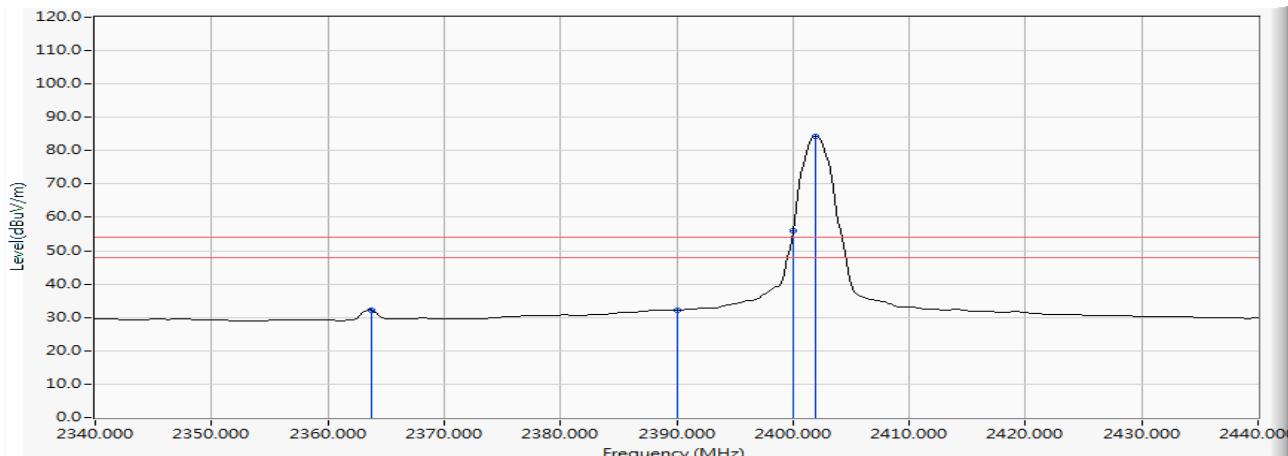


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2363.768	5.988	26.277	32.265	-21.735	54.000	AVERAGE
2	2390.000	5.880	26.198	32.079	-21.921	54.000	AVERAGE
3	2400.000	5.879	50.048	55.927	1.927	54.000	AVERAGE
4	*	5.884	78.297	84.181	30.181	54.000	AVERAGE

#### Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Intel® Wireless-AC 9560  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test date : 2018/12/26  
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK) (2480MHz)

#### Horizontal

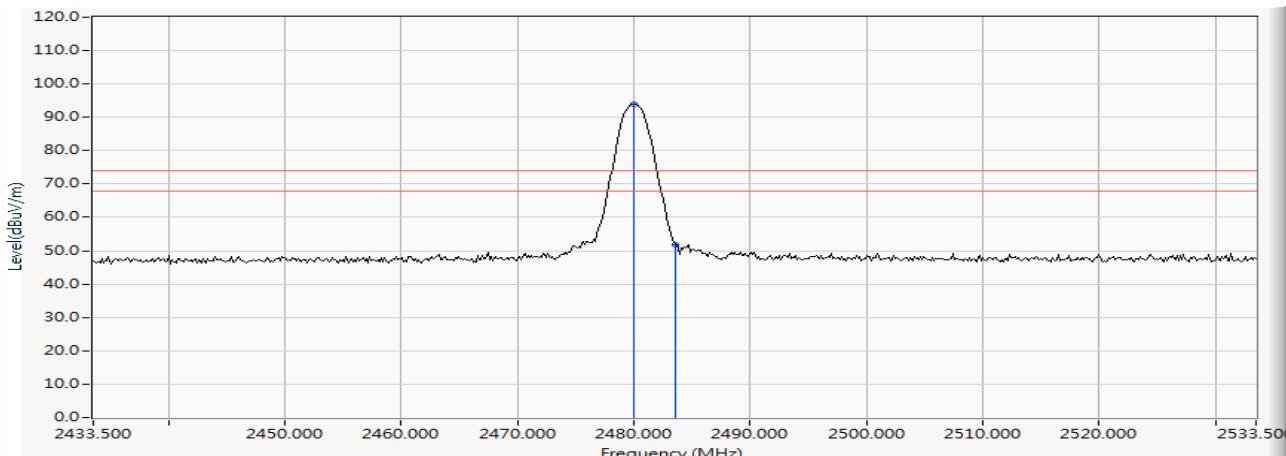


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2480.022	7.086	86.891	93.976	19.976	74.000	PEAK
2	2483.500	7.110	44.534	51.644	-22.356	74.000	PEAK

#### Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Intel® Wireless-AC 9560  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test date : 2018/12/26  
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK) (2480MHz)

Horizontal

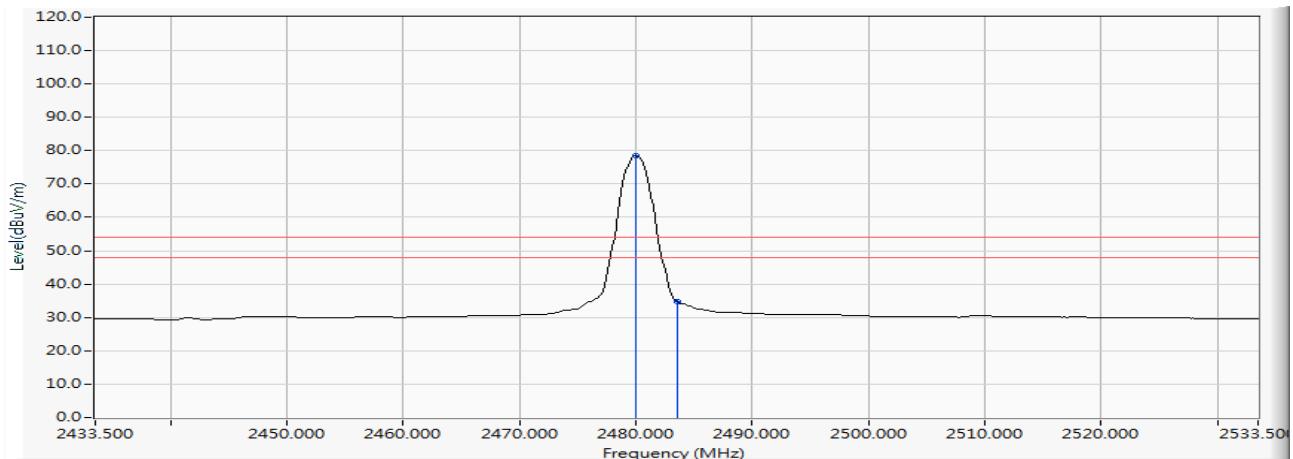


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2480.022	7.086	71.359	78.444	24.444	54.000	AVERAGE
2		2483.500	7.110	27.720	34.830	-19.170	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Intel® Wireless-AC 9560  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test date : 2018/12/26  
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK) (2480MHz)

#### VERTICAL

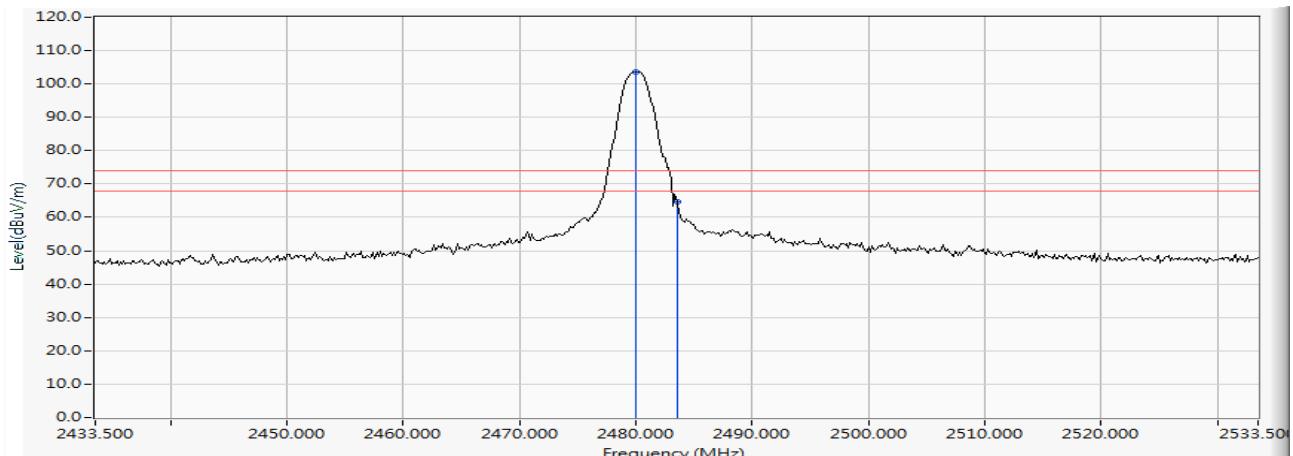


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2480.022	6.342	97.405	103.747	29.747	74.000	PEAK
2		2483.500	6.363	58.367	64.730	-9.270	74.000	PEAK

#### Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

Product : Intel® Wireless-AC 9560  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test date : 2018/12/26  
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK) (2480MHz)

#### VERTICAL

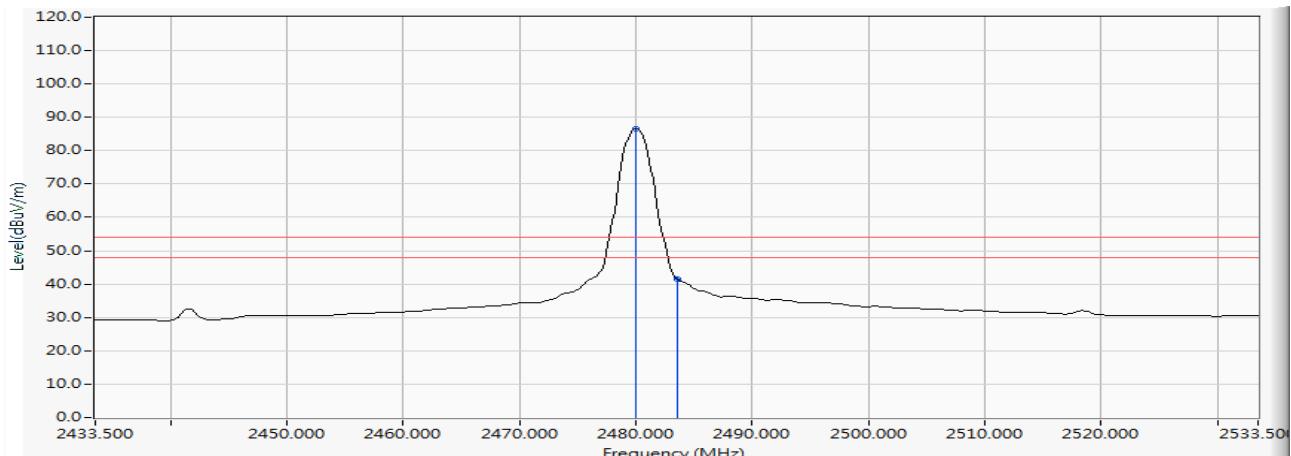

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2480.022	6.342	80.171	86.513	32.513	54.000	AVERAGE
2		2483.500	6.363	35.268	41.631	-12.369	54.000	AVERAGE

#### Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correction Factor.
6. The average measurement was not performed when the peak measured data is under the limit of average detection.

## 5. EMI Reduction Method During Compliance Testing

No modification was made during testing.