

### **FCC - TEST REPORT**

Report Number	:	68.950.16.626.01	Date of Issue:	December 07, 2016
Model	<u>:</u>	CT4		
Product Type	<u>:</u>	Tablet PC		
Applicant	:	Olive Oil Computer Limite	ed	
Address	<u>:</u>	Level 15, Langham Place,	8 Argyle Street, Moi	ngkok, Kowloon,
		Hong Kong.		
Production Facility	:	Welco Wong's Technology	(ShenZhen) Limited	d
Address	:	2-3 floor of block 14, 1-4 flo	oor of block 17, 1-3 f	floor of block 34, No.2 of
		WanFeng WanZhangPu In	dustrial Estate, Sha	Jing Bao'an, ShenZhen,
		China		
Test Result	:	■ Positive □ Nega	ntive	
Total pages including				
Appendices	: .	30		

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.



# 1 Table of Contents

1	Ta	able of Contents	2
2	D	Details about the Test Laboratory	3
3	D	Description of the Equipment under Test	4
4	S	Summary of Test Standards	5
5	S	Summary of Test Results	6
6	G	General Remarks	7
7	Te	est Setups	8
8	S	Systems test configuration	9
9	Т	echnical Requirement	10
Ç	9.1	Conducted Emission.	10
Ç	9.2	Conducted peak output power	13
(	9.3	6dB bandwidth	15
(	9.4	Power spectral density	17
,	9.5	Spurious RF conducted emissions	
(	9.6	Band edge	
(	9.7	Spurious radiated emissions for transmitter	25
10		Test Equipment List	29
11		System Measurement Uncertainty	



# 2 Details about the Test Laboratory

# **Details about the Test Laboratory**

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch

Building 12&13, Zhiheng Wisdomland Business Park,

Nantou Checkpoint Road 2, Nanshan District,

Shenzhen City, 518052,

P. R. China

**FCC** Registration

Number:

502708

IC Registration

Number:

10320A-1

Telephone:

86 755 8828 6998

Fax:

86 755 828 5299



# 3 Description of the Equipment under Test

### **Description of the Equipment Under Test**

Product: Tablet PC

Model no.: CT4

FCC ID: 2AKHP-CT4-US

Options and accessories: NIL

Rating: 3.8VDC, 3700mAh

(Supplied by Li-ion rechargeable battery) 5.0VDC, 2.0A (Charging by external adapter)

Adapter Model: MU10-Q050200-A2 Input: 100-240VAC, 50/60Hz, 0.3A

Output: 5.0VDC, 2.0A

2402-2480MHz

**RF Transmission** 

Frequency:

No. of Operated Channel: 40

Modulation: GFSK

Antenna Type: Integrated Antenna

Antenna Gain: -2.0dBi

Description of the EUT: The Equipment Under Test (EUT) is a Tablet PC with Bluetooth

function operating at 2.4GHz



# 4 Summary of Test Standards

	Test Standards
FCC Part 15 Subpart C	PART 15 - RADIO FREQUENCY DEVICES
10-1-2015 Edition	Subpart C - Intentional Radiators

All the test methods were according to KDB558074 DTS Measurement Guidance and ANSI C63.10 (2013).



# 5 Summary of Test Results

	Technical Requirement	ts		
FCC Part 15 Sub	part C			
Test Condition	Pages	Test Result	Test Site	
§15.207	Conducted emission AC power port	10	Pass	Site 1
§15.247(b)(1)	Conducted peak output power	13	Pass	Site 1
§15.247(e)	Power spectral density*	17	Pass	Site 1
§15.247(a)(2)	6dB bandwidth	15	Pass	Site 1
§15.247(a)(1)	20dB bandwidth and 99% Occupied Bandwidth	15	Pass	Site 1
§15.247(a)(1)	Carrier frequency separation		N/A	N/A
§15.247(a)(1)(iii)	Number of hopping frequencies		N/A	N/A
§15.247(a)(1)(iii)	Dwell Time		N/A	N/A
§15.247(d)	Spurious RF conducted emissions	19	Pass	Site 1
§15.247(d)	Band edge	23	Pass	Site 1
§15.247(d) & §15.209 &	Spurious radiated emissions for transmitter and receiver	25	Pass	Site 1
§15.203	Antenna requirement	See note 1	Pass	

Remark 1: N/A - Not Applicable.

Note 1: The EUT uses an Integrated Antenna, which gain is -2.0dBi. According to §15.203, it is considered sufficiently to comply with the provisions of this section.



# 6 General Remarks

#### Remarks

This submittal(s) (test report) is intended for FCC ID: 2AKHP-CT4-US complies with Section 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C.

This report is for the BT 4.0 part.

#### SUMMARY:

All tests according to the regulations cited on page 5 were

- Performed
- ☐ Not Performed

The Equipment under Test

- - Fulfills the general approval requirements.
- ☐ **Does not** fulfill the general approval requirements.

Sample Received Date: November 01, 2016

Testing Start Date: November 01, 2016

Testing End Date: November 27, 2016

- TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch -

Reviewed by:

Prepared by:


Tested by:

Phoebe Hu EMC Project Manager Aaron Lai EMC Project Engineer Leon Zhang EMC Test Engineer




# 7 Test Setups


### Below 1GHz

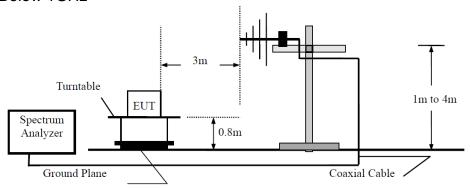


### Above 1GHz

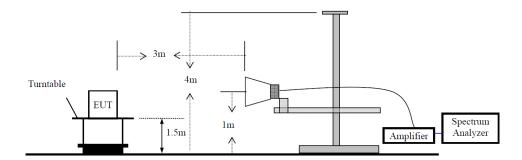

# 7.2 Conducted RF test setups



# 7.3 AC Power Line Conducted Emission test setups

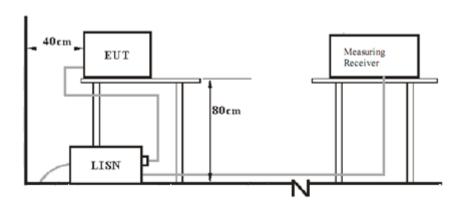



# 8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.(SHIELD)	S/N(LENGTH)

Test software: RF test tool, which used to control the EUT in continues transmitting mode.

The system was configured to channel 0, 19, and 39 for the test.



# 9 Technical Requirement

# 9.1 Conducted Emission

### **Test Method**

- 1. The EUT was placed on a table, which is 0.8m above ground plane
- 2. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
- 3. Maximum procedure was performed to ensure EUT compliance
- 4. A EMI test receiver is used to test the emissions from both sides of AC line

#### Limit

Frequency	QP Limit	AV Limit
MHz	dΒμV	dΒμV
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

Decreasing linea




# **Conducted Emission**

Product Type : Tablet PC M/N : CT4

Operating Condition : Charging & TX

Test Specification : Live

Comment : AC 120V/60Hz

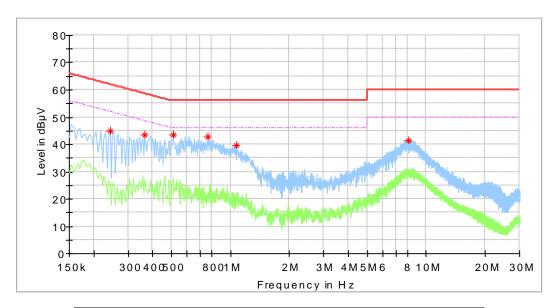

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.242000	45.08		62.03	16.95	L1	9.7
0.366000	43.34		58.59	15.26	L1	9.7
0.510000	43.59		56.00	12.41	L1	9.7
0.770000	42.69		56.00	13.31	L1	9.7
1.074000	39.48		56.00	16.52	L1	9.7
8.106000	41.29		60.00	18.71	L1	10.0




# **Conducted Emission**

Product Type : Tablet PC M/N : CT4

Operating Condition : Charging & TX Test Specification : Neutral

Comment : AC 120V/60Hz

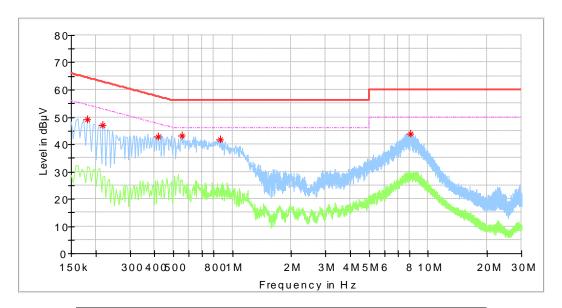

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.182000	49.27		64.39	15.13	N	9.6
0.218000	46.91		62.89	15.98	N	9.6
0.418000	42.72		57.49	14.77	N	9.7
0.554000	43.22		56.00	12.78	N	9.7
0.866000	41.86		56.00	14.14	N	9.7
8.110000	43.89		60.00	16.11	N	10.0



### 9.2

# 9.2 Conducted peak output power

#### **Test Method**

- Use the following spectrum analyzer settings:
   RBW > the 6 dB bandwidth of the emission being measured, VBW≥3RBW, Span≥3RBW
   Sweep = auto, Detector function = peak, Trace = max hold.
- 2. Add a correction factor to the display.
- 3. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.

#### Limits


According to §15.247 (b) (1), conducted peak output power limit as below:

Frequency Range	Limit	Limit
MHz	W	dBm
2400-2483 5	<1	<30


#### Test result as below table


Frequency	Conducted Peak Output Power	Result
MHz	dBm	
Top channel 2402MHz	5.66	Pass
Middle channel 2440MHz	5.27	Pass
Bottom channel 2480MHz	3.76	Pass



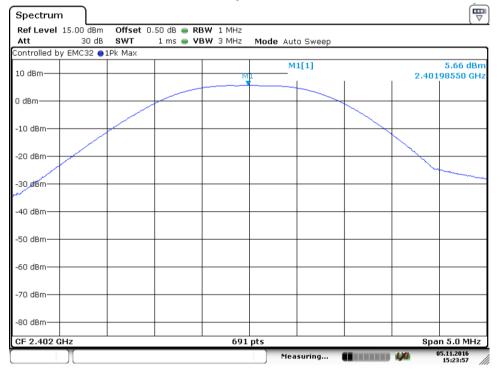



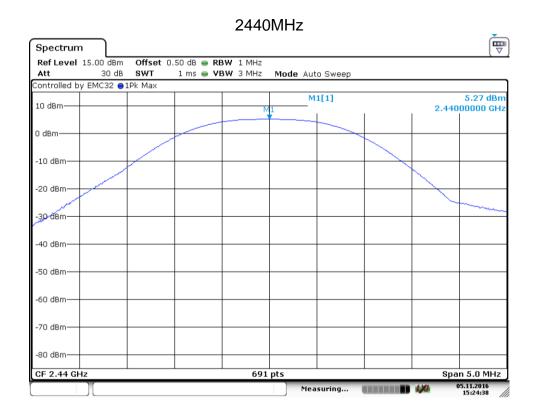

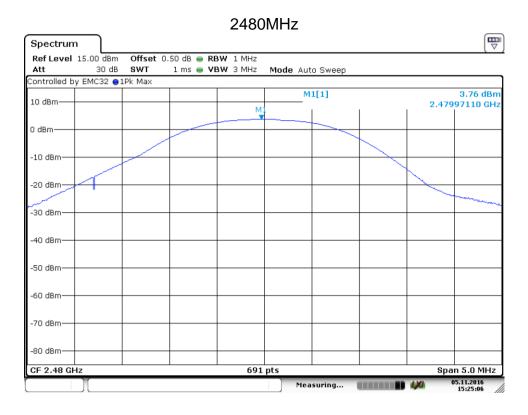



### 9.3 6dB bandwidth

#### **Test Method**


- Use the following spectrum analyzer settings:
   RBW=100K, VBW≥3RBW, Sweep = auto, Detector function = peak, Trace = max hold
- 2. Use the automatic bandwidth measurement capability of an instrument, may be employed using the X dB bandwidth mode with X set to 6 dB, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.
- 3. Allow the trace to stabilize, record the X dB Bandwidth value.

#### Limit

Limit [kHz]	
 ≥500	


#### Test result


Frequency MHz	6dB bandwidth kHz	99 bandwidth kHz	Result
Top channel 2402MHz	716.40	1085.38	Pass
Middle channel 2440MHz	707.70	1085.38	Pass
Bottom channel 2480MHz	712.00	1085.38	Pass

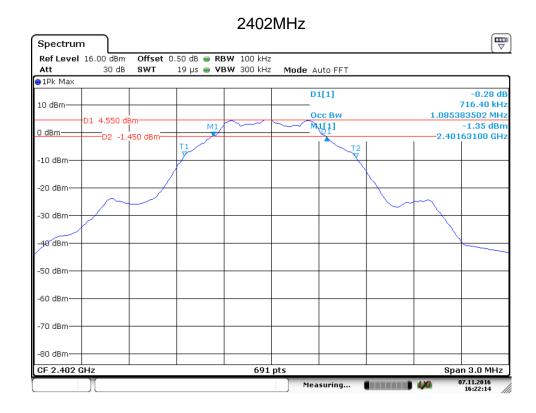



### 6 dB Bandwidth

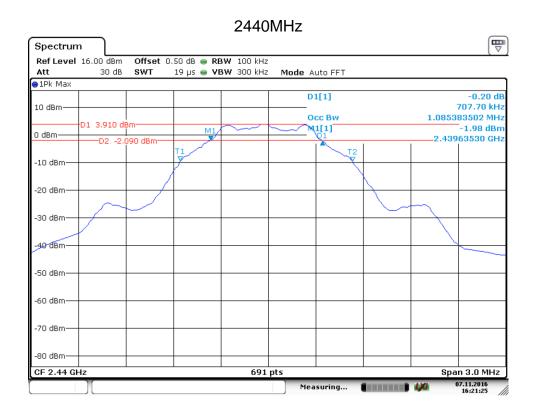

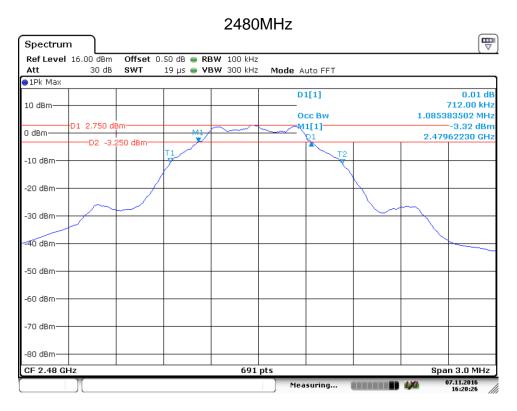



# 9.4 Power spectral density

#### **Test Method**

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:


- Set analyzer center frequency to DTS channel center frequency. RBW=3kHz,VBW≥3RBW,Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
- 2. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
- 3. Repeat above procedures until other frequencies measured were completed.

#### Limit


Limit [dBm]	
≤8	


#### Test result

Frequency	Power spectral density	Result
MHz	dBm	
Top channel 2402MHz	-9.24	Pass
Middle channel 2440MHz	-9.86	Pass
Bottom channel 2480MHz	-11.03	Pass

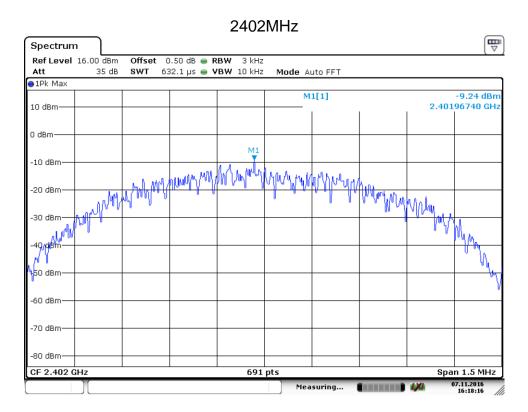



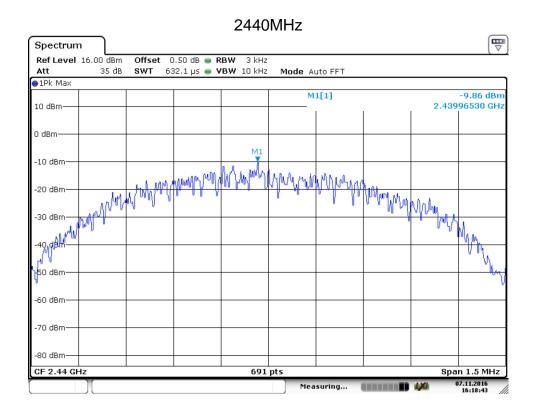

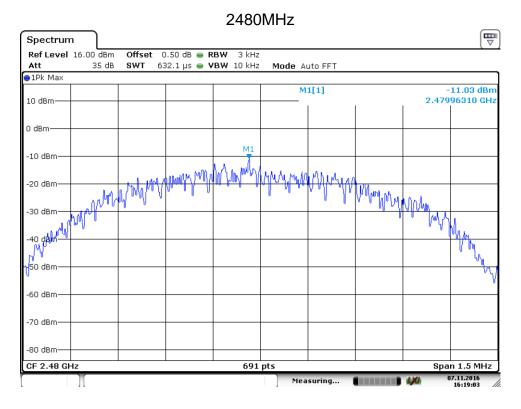



# 9.5 Spurious RF conducted emissions

#### **Test Method**


- 1. Establish a reference level by using the following procedure:
  - a. Set RBW=100 kHz. VBW≥3RBW. Detector =peak, Sweep time = auto couple, Trace mode = max hold.
  - b. Allow trace to fully stabilize, use the peak marker function to determine the maximum PSD level.
- 2. Use the maximum PSD level to establish the reference level.
  - a. Set the center frequency and span to encompass frequency range to be measured.
  - b. Use the peak marker function to determine the maximum amplitude level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements, report the three highest emissions relative to the limit.
- 3. Repeat above procedures until other frequencies measured were completed.


#### Limit

	Frequency Range MHz	Limit (dBc)
'	30-25000	-20




### **Spurious RF conducted emissions**

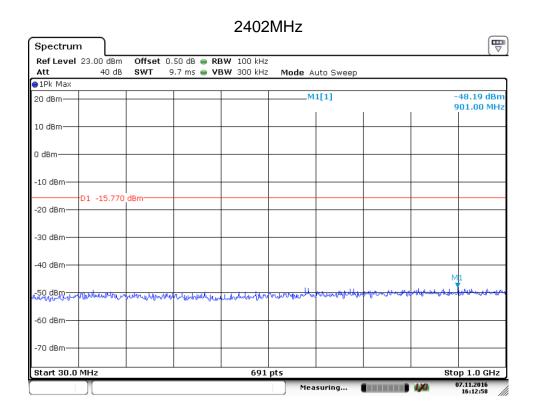


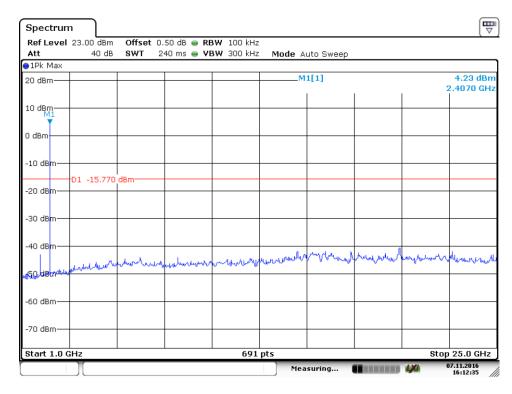




### **Spurious RF conducted emissions**

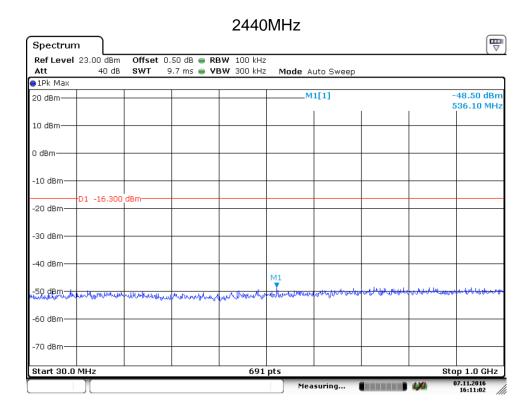


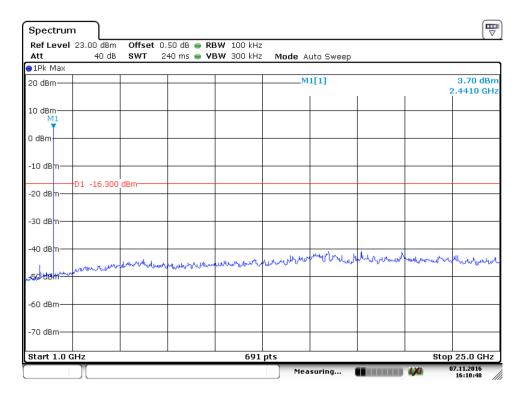



### **Spurious RF conducted emissions**

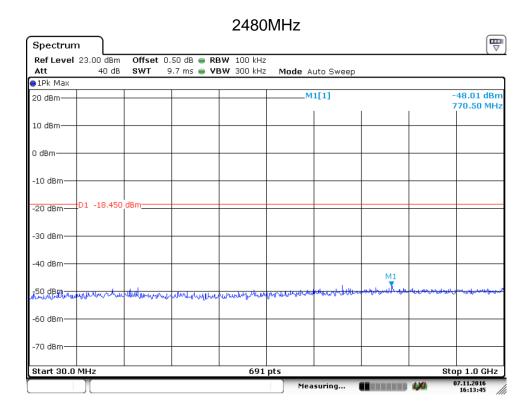

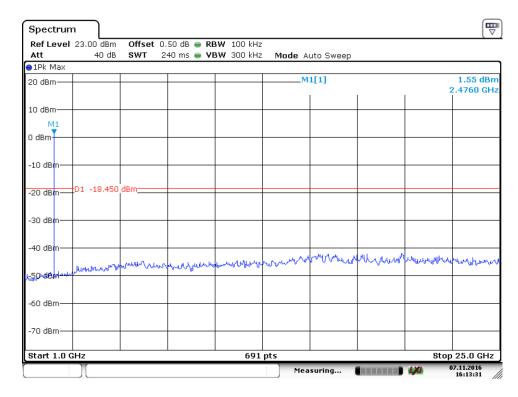



# 9.6 Band edge


#### **Test Method**

- 1 Use the following spectrum analyzer settings: Span = wide enough to capture the peak level of the in-band emission and all spurious RBW = 100 kHz, VBW ≥ RBW, Sweep = auto, Detector function = peak, Trace = max hold.
- 2 Allow the trace to stabilize, use the peak and delta measurement to record the result.
- 3 The level displayed must comply with the limit specified in this Section.

#### Limit

Frequency Range MHz	Limit (dBc)
30-25000	-20

#### **Test result**

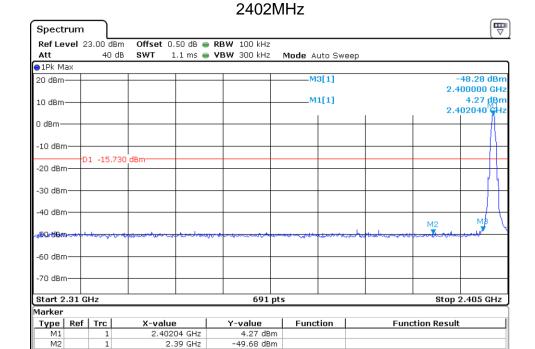

-48.28 dBm


Measuring...

2.4 GHz

МЗ



# **Band edge**

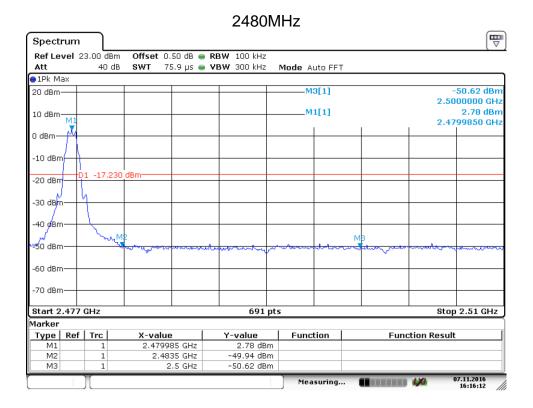



# 9.7 Spurious radiated emissions for transmitter

#### **Test Method**

- 1: The EUT was place on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2: The EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 3: The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4: For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5: Use the following spectrum analyzer settings According to C63.10:

For Above 1GHz

Span = wide enough to capture the peak level of the in-band emission and all spurious RBW = 1MHz, VBW≥RBW for peak measurement and VBW = 10Hz for average measurement, Sweep = auto, Detector function = peak, Trace = max hold.

For Below 1GHz

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious RBW = 100 KHz, VBW≥RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

#### Note:

- 1: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for peak detection (PK) at frequency above 1GHz.
- 3: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average ((duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor (20log(1/duty cycle)).
- 4: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.



#### Limit

The radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section15.205, must comply with the radiated emission limits specified in section 15.209.

Frequency	Field Strength	Field Strength	Detector
MHz	uV/m	dBµV/m	
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK



### Spurious radiated emissions for transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

### Transmitting spurious emission test result as below:

	Frequency	Level	Polarization	Limit	Detector	Result
	MHz	dBuV/m		dBμV/m		
	971.98	41.12	Horizontal	4.88	QP	Pass
	900.02	37.42	Vertical	8.58	QP	Pass
2402MHz (Abo	ve 1GHz)					
	Frequency	Emission Level	Polarization	Limit	Detector	Result

Frequency	Level	Polarization	Limit	Detector	Result
MHz	dBuV/m		dΒμV/m		
4803.28	37.52	Horizontal	74.00	PK	Pass
6212.34	37.93	Vertical	74.00	PK	Pass

# 2440MHz (30MHz – 1GHz)

Frequency	Emission Level	Polarization	Limit	Detector	Result
MHz	dBuV/m		dBμV/m		
		Horizontal		QP	Pass
		Vertical		QP	Pass

#### 2440MHz (Above 1GHz)

Frequency	Emission Level	Polarization	Limit	Detector	Result
MHz	dBuV/m		dBμV/m		
7059.84	38.06	Horizontal	74.00	PK	Pass
8738.90	40.54	Vertical	74.00	PK	Pass

#### Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.
- (2) "\*" means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.



# 2480MHz (30MHz – 1GHz)

Frequency	Emission Level	Polarization	Limit	Detector	Result
MHz	dBuV/m		dBμV/m		
		Horizontal		QP	Pass
		Vertical		QP	Pass

### 2480MHz (Above 1GHz)

Frequency	Emission Level	Polarization	Limit	Detector	Result
MHz	dBuV/m		dΒμV/m		
8761.87	40.21	Horizontal	74.00	PK	Pass
8173.12	39.48	Vertical	74.00	PK	Pass

#### Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.
- (2) "\*" means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.



# **10 Test Equipment List**

### **List of Test Instruments**

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
Signal Analyzer	Rohde & Schwarz	FSV40	101030	2017-7-15
EMI Test Receiver	Rohde & Schwarz	ESR 26	101269	2017-7-15
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9163	707	2017-8-3
Horn Antenna	Rohde & Schwarz	HF907	102294	2017-7-15
Pre-amplifier	Rohde & Schwarz	SCU 18	102230	2017-7-15
3m Semi-anechoic chamber	TDK	9X6X6		2019-5-29
EMI Test Receiver	Rohde & Schwarz	ESR 26	101269	2017-7-15
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9163	707	2017-8-3
Horn Antenna	Rohde & Schwarz	HF907	102294	2017-7-15
EMI Test Receiver	Rohde & Schwarz	ESR 3	101782	2017-7-15
LISN	Rohde & Schwarz	ENV4200	100249	2017-7-15
LISN	Rohde & Schwarz	ENV216	100326	2017-7-15
ISN	Rohde & Schwarz	ENY81	100177	2017-7-15
ISN	Rohde & Schwarz	ENY81-CA6	101664	2017-7-15
High Voltage Probe	Rohde & Schwarz	TK9420(VT94	9420-58	2017-7-15
		20)		
RF Current Probe	Rohde & Schwarz	EZ-17	100816	2017-7-15

#### C - Conducted RF tests

- Conducted peak output power
- 6dB bandwidth
- Power spectral density\*
- Spurious RF conducted emissions
- Band edge



# 11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty			
Test Items	Extended Uncertainty		
Uncertainty for Radiated Spurious Emission 25MHz-3000MHz	Horizontal: 4.95dB; Vertical: 5.02dB;		
Uncertainty for Radiated Spurious Emission 3000MHz- 18000MHz	Horizontal: 4.89dB; Vertical: 4.88dB;		
Uncertainty for Radiated Spurious Emission 18000MHz-40000MHz	Horizontal: 4.93dB; Vertical: 4.92dB;		
Uncertainty for Conducted Emission 150kHz-30MHz (for test using AMN ENV216)	3.50dB		
Uncertainty for Conducted RF test	2.04dB		