


1. Product Specification

Item	Smart Gas Sensor
Color	White
Power Supply	DC 5V/1A
Measurement gas	LPG ,Coal gas ,Natural gas
Wireless standard	ZigBee IEEE 802.15.4
Alarm if Concentration	2500ppm ±1500ppm
Operating Temperature	-10°C --- +50°C
Operating Humidity	0% --- 95% RH

2. Diagram of Installation


Adjust the position within monitored area, place the sensor within 2 meters the gas stove.

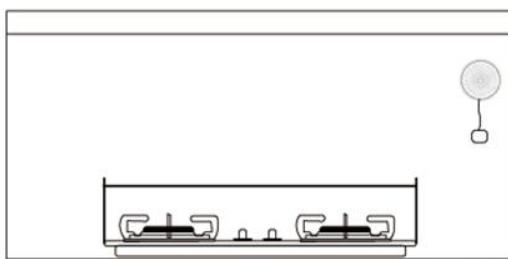

3. Troubleshooting Methods

Unable to Pair Connection	Open the casing and press the reset button
Drops after pairing or unable to detect gas leak	Check the network status. Reinstall the battery. Open the casing and press the reset button to the hub again.

4. Product reset

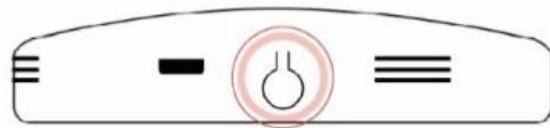

Press the reset button as long as 5-6s ,flash light indicate the product resetted successfully.

additonal function of the button

1.Short press the button once in normal situation which test if the alarm light work well.

2.Short press the button once in alarm situation which Silence the product 10 minutes.

changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.