



FCC 47 CFR PART 15 SUBPART E

for

1750M Integrated Antenna Ceiling Access Point

Model: ASC175, C700, M610, ASC120, C600, M510, ASC6, C300, M200

Brand: Axilspot

Test Report Number:

C170213Z03-RP1-2

Issued Date: April 12, 2017

Issued for

Axilspot Communication Co.,Ltd.

A302 Han's Innovation Building, No.9018 beihuan Ave, Nanshan District, Shenzhen, China

Issued by:

Compliance Certification Services (Shenzhen) Inc.

No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd., Guan Lan Town, Baoan District, Shenzhen, China

TEL: 86-755-28055000

FAX: 86-755-28055221

E-Mail: service@ccssz.com



中国认可
国际互认
检测
TESTING
CNAS L4818



TESTING CERT #2861.01

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc. This document may be altered or revised by Compliance Certification Services (Shenzhen) Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The TEST RESULTS in the report only apply to the tested sample.



Revision History

| Rev. | Issue Date | Revisions | Effect Page | Revised By |
|------|----------------|---------------|-------------|-------------|
| 00 | April 12, 2017 | Initial Issue | ALL | Amzula Chen |
| | | | | |
| | | | | |
| | | | | |



TABLE OF CONTENTS

| | |
|---|-----------|
| 1. TEST CERTIFICATION | 4 |
| 2. EUT DESCRIPTION | 5 |
| 3. TEST METHODOLOGY..... | 8 |
| 3.1 EUT CONFIGURATION | 8 |
| 3.2 EUT EXERCISE | 8 |
| 3.3 GENERAL TEST PROCEDURES | 8 |
| 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS..... | 9 |
| 3.5 DESCRIPTION OF TEST MODES | 10 |
| 4. SETUP OF EQUIPMENT UNDER TEST | 11 |
| 4.1 DESCRIPTION OF SUPPORT UNITS | 11 |
| 4.2 CONFIGURATION OF SYSTEM UNDER TEST | 11 |
| 5. FACILITIES AND ACCREDITATIONS | 12 |
| 5.1 FACILITIES | 12 |
| 5.2 EQUIPMENT | 12 |
| 5.3 ACCREDITATIONS..... | 12 |
| 5.4 MEASUREMENT UNCERTAINTY | 13 |
| 6. FCC PART 15 REQUIREMENTS | 14 |
| 6.1 26dB EMISSION BANDWIDTH | 14 |
| 6.2 6dB BANDWIDTH MEASUREMENT | 31 |
| 6.3 ANTENNA GAIN | 33 |
| 6.4 PEAK POWER | 51 |
| 6.5 BAND EDGES MEASUREMENT | 56 |
| 6.6 PEAK POWER SPECTRAL DENSITY | 82 |
| 6.7 RADIATED UNDESIRABLE EMISSION | 114 |
| 6.8 CONDUCTED UNDESIRABLE EMISSION | 155 |
| 6.9 POWERLINE CONDUCTED EMISSIONS..... | 169 |
| 6.10 FREQUENCY STABILITY | 173 |



1. TEST CERTIFICATION

| | |
|---------------------|--|
| Product | 1750M Integrated Antenna Ceiling Access Point |
| Model | ASC175, C700, M610, ASC120, C600, M510, ASC6, C300, M200 |
| Brand | Axilspot |
| Tested | February 13~March 22, 2017 |
| Applicant | Axilspot Communication Co.,Ltd. A302 Han's Innovation Building, No.9018 beihuan Ave, Nanshan District, Shenzhen, China |
| Manufacturer | Axilspot Communication Co.,Ltd. A302 Han's Innovation Building, No.9018 beihuan Ave, Nanshan District, Shenzhen, China |

| APPLICABLE STANDARDS | |
|------------------------------|-------------------------|
| STANDARD | TEST RESULT |
| FCC 47 CFR Part 15 Subpart E | No non-compliance noted |

We hereby certify that:

Compliance Certification Services (Shenzhen) Inc. tested the above equipment. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.10: 2013** and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.407、FCC 14-30.

The TEST RESULTS of this report relate only to the tested sample identified in this report.

Approved by:

Sunday Hu
Supervisor of EMC Dept.
Compliance Certification Services (Shenzhen) Inc.

Reviewed by:

Ruby Zhang
Supervisor of Report Dept.
Compliance Certification Services (Shenzhen) Inc.



2. EUT DESCRIPTION

| | |
|-----------------------------|--|
| Product | 1750M Integrated Antenna Ceiling Access Point |
| Model Number | ASC175, C700, M610, ASC120, C600, M510, ASC6, C300, M200 |
| Brand | Axilspot |
| Model Discrepancy | Please see model difference table of page 6. |
| Serial Number | C170213Z03-RP1-2 |
| Received Date | February 13, 2017 |
| Power Supply | DC48V power supply by POE or DC48V power supply by adapter |
| Frequency Range | UNII Band I: IEEE 802.11a, 802.11n HT20 : 5180MHz ~ 5240MHz; IEEE 802.11n HT40: 5190MHz ~ 5230MHz IEEE 802.11ac 80: 5210MHz UNII Band IV IEEE 802.11a, 802.11n HT20 : 5745MHz ~ 5825MHz IEEE 802.11n HT40: 5755MHz ~ 5795MHz IEEE 802.11ac 80: 5775MHz |
| Transmit Power | UNII Band I: IEEE 802.11a: 16.70dBm (Antenna 0) 18.60dBm (Antenna 1) 18.80dBm (Antenna 2) IEEE 802.11n HT 20 MHz mode: 16.28dBm (Combine with Antenna 0 and Antenna 1 and Antenna 2) IEEE 802.11n HT 40 MHz mode: 15.95dBm (Combine with Antenna 0 and Antenna 1 and Antenna 2) IEEE 802.11ac 80: 19.60dBm (Combine with Antenna 0 and Antenna 1 and Antenna 2) UNII Band IV IEEE 802.11a: 18.00dBm (Antenna 0) 16.20dBm (Antenna 1) 15.30dBm (Antenna 2) IEEE 802.11n HT 20 MHz mode: 16.49dBm (Combine with Antenna 0 and Antenna 1 and Antenna 2) IEEE 802.11n HT 40 MHz mode: 16.00dBm (Combine with Antenna 0 and Antenna 1 and Antenna 2) IEEE 802.11ac 80: 17.56dBm (Combine with Antenna 0 and Antenna 1 and Antenna 2) |
| Modulation Technique | OFDM (QPSK, BPSK, 16-QAM, 64-QAM, 256-QAM) |
| Transmit Data Rate | IEEE 802.11a mode: 54, 48, 36, 24, 18, 12, 9, 6Mbps IEEE 802.11n HT20MHz mode: MCS 0-23 IEEE 802.11n HT40MHz mode: MCS 0-23 IEEE 802.11ac 80: MCS 0-9 |
| Number of Channels | UNII Band I: IEEE 802.11a, 802.11n HT20 : 4 Channels IEEE 802.11n HT40 : 2 Channels IEEE 802.11ac 80: 1 Channel UNII Band IV IEEE 802.11a, 802.11n HT20 : 5 Channels |



| | |
|------------------------------|---|
| | IEEE 802.11n HT 40 MHz mode: 2 Channels IEEE 802.11ac 80: 1 Channel |
| Antenna Specification | Internal Antenna with 3dBi gain (Max) |
| Channels Spacing | IEEE 802.11a, 802.11n HT20 : 20MHz IEEE 802.11n HT40: 40MHz IEEE 802.11ac 80: 80MHz |
| Temperature Range | -10°C~55°C |
| Hardware Version | V1.0 |
| Software Version | V2.0.8 |

Note: 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

Model differences

| Model Name | Differences | | Tested (Checked) |
|-------------------|---|----------------------------------|-------------------------------------|
| | Number of Antennas (5G and 2.4G) | With 11ac Function or not | |
| ASC175 | 6 | Yes | <input checked="" type="checkbox"/> |
| C700 | | | <input type="checkbox"/> |
| M610 | | | <input type="checkbox"/> |
| ASC120 | 4 | Yes | <input type="checkbox"/> |
| C600 | | | <input type="checkbox"/> |
| M510 | | | <input type="checkbox"/> |
| ASC6 | 4 | No | <input type="checkbox"/> |
| C300 | | | <input type="checkbox"/> |
| M200 | | | <input type="checkbox"/> |

**Operation Frequency:**

| UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII) | |
|--|------|
| CHANNEL | MHz |
| 36 | 5180 |
| 38 | 5190 |
| 40 | 5200 |
| 42 | 5210 |
| 44 | 5220 |
| 46 | 5230 |
| 48 | 5240 |
| 149 | 5745 |
| 151 | 5755 |
| 153 | 5765 |
| 155 | 5775 |
| 157 | 5785 |
| 159 | 5795 |
| 161 | 5805 |
| 165 | 5825 |

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: 2AKIQ-ASC175 filing to comply with Section 15.407 of the FCC Part 15, Subpart E Rules and FCC 14-30.



3. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10. Radiated testing was performed at an antenna to EUT distance 3 meters.

The tests documented in this report were performed in accordance with ANSI C63.10: 2013 and FCC CFR 47 Part 15.207, 15.209, 15.407 and FCC 14-30.

Radio testing was performed according to KDB DA 02-2138, KDB 789033 D02, KDB 905462 D06;

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed for RF field strength measurement to meet the Commissions requirement, and is operated in a manner intended to generate the maximum emission in a continuous normal application.

3.2 EUT EXERCISE

The EUT run software (or file) and operated in the engineering mode to fix the TX frequency for the purposes of measurement.

According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is positioned at 0.8 m above the ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10, the conducted emission from the EUT is measured in the frequency range between 0.15 MHz and 30MHz, using the CISPR Quasi-Peak detector mode.

Radiated Emissions

The EUT is placed on the turntable, which is 0.8 m (below 1GHz) /1.5m (Above 1GHz) above the ground plane. The turntable is then rotated for 360 degrees to determine the proper orientation for the maximum emission level. The EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission level. And, each emission is to be maximized by changing the horizontal and vertical polarization of the receiving antenna. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.10.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|----------------------------|---------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.52525 | 2655 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 156.7 - 156.9 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 162.0125 - 167.17 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 167.72 - 173.2 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 240 - 285 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | 322 - 335.4 | | |

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT is a 3x3 configuration spatial MIMO (3TX & 3RX) without beam forming function. Software used to control the EUT for staying in continuous transmitting mode was programmed.

| Test Item | Test mode | Worse mode |
|--------------------|---|-------------------------------------|
| Conducted Emission | Mode 1: 1000Mbps 10% DC Adapter | <input type="checkbox"/> |
| | Mode 2: 1000Mbps 10% POE Adapter | <input checked="" type="checkbox"/> |
| Radiated Emission | Mode 1: Continuously TX | <input checked="" type="checkbox"/> |

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.

UNII Band I:

IEEE 802.11a for 5180 ~ 5240MHz:

Channel Low (5180MHz), Channel Mid (5200MHz) and Channel High (5240MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT 20 MHz for 5180 ~ 5240MHz:

Channel Low (5180MHz), Channel Mid (5200MHz) and Channel High (5240MHz) with MCS 0 data rate were chosen for full testing.

IEEE 802.11n HT 40 MHz Channel for 5190 ~ 5230MHz:

Channel Low (5190MHz) and Channel High (5230MHz) with MCS 0 data rate were chosen for full testing.

IEEE 802.11ac 80 Channel for 5210MHz:

Channel Low (5210MHz) with MCS 0 data rate were chosen for full testing.

UNII Band IV:

IEEE 802.11a for 5745 ~ 5825MHz:

Channel Low (5745MHz), Channel Mid (5785MHz) and Channel High (5825MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT 20 MHz for 5745 ~ 5825MHz:

Channel Low (5745MHz), Channel Mid (5785MHz) and Channel High (5825MHz) with MCS 0 data rate were chosen for full testing.

IEEE 802.11n HT 40 MHz Channel for 5755~ 5795MHz:

Channel Low (5755MHz) and Channel High (5795MHz) with MCS 0 data rate were chosen for full testing.

IEEE 802.11ac 80 Channel for 5775MHz:

Channel Low (5775MHz) with MCS 0 data rate were chosen for full testing.



4. SETUP OF EQUIPMENT UNDER TEST

4.1 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| No. | Equipment | Model No. | Serial No. | FCC ID | Brand | Data Cable | Power Cord |
|-----|-----------|-----------|------------|--------|--------------|----------------------|--|
| 1 | Notebook | B475 | WB04861612 | DoC | THINKP AD | Unshielded, 1.50m | Unshielded, 1.60m (AC Cable) Unshielded, 1.80m (DC Cable) |

Note:

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.2 CONFIGURATION OF SYSTEM UNDER TEST

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at
**No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd., Guan Lan Town,
Baoan District, Shenzhen, China**

The sites are constructed in conformance with the requirements of ANSI C63.10, ANSI C63.7 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

| | |
|-------|------|
| USA | A2LA |
| China | CNAS |

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

| | |
|--------|---------------------------------------|
| USA | FCC |
| Japan | VCCI(C-4815, R-4320, T-2317, G-10624) |
| Canada | INDUSTRY CANADA |

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.cssz.com>



5.4 MEASUREMENT UNCERTAINTY

| Parameter | Uncertainty |
|-------------------------------|--------------|
| RF frequency | +/- 1 * 10-5 |
| RF power conducted | +/- 1,5 dB |
| RF power radiated | +/- 6 dB |
| Spurious emissions, conducted | +/- 3 dB |
| Spurious emissions, radiated | +/- 6 dB |
| Humidity | +/- 5 % |
| Temperature | +/- 1°C |
| Time | +/-10 % |

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



6. FCC PART 15 REQUIREMENTS

6.1 26dB EMISSION BANDWIDTH

6.1.1 LIMIT

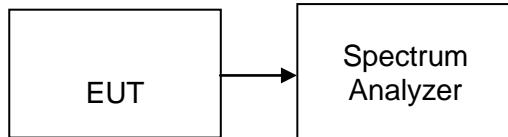
According to §15.403(c), for purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Compliance with the emissions limits is based on the use of measurement instrumentation employing a peak detector function with an instrument resolutions bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

6.1.2 MEASUREMENT EQUIPMENT USED

| Name of Equipment | Manufacturer | Model | Serial Number | Last Calibration | Due Calibration |
|-------------------|--------------|--------|---------------|------------------|-----------------|
| Spectrum Analyzer | Agilent | N9010A | MY52221469 | 02/21/2017 | 02/20/2018 |

Remark: Each piece of equipment is scheduled for calibration once a year.

6.1.3 TEST CONFIGURATION



6.1.4 TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low-loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW > 1%EBW, VBW > RBW, Span >26dB bandwidth, Detector = Peak, and Sweep = auto.
4. Mark the peak frequency and -26dB (upper and lower) frequency.
5. Repeat until all the rest channels were investigated.



6.1.5 TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11a mode / 5180 ~ 5240MHz

| Channel | Frequency (MHz) | 26dB Bandwidth(B) (MHz) | | |
|---------|-----------------|-------------------------|-----------|-----------|
| | | Antenna 0 | Antenna 1 | Antenna 2 |
| Low | 5180 | 23.34 | 21.81 | 22.77 |
| Mid | 5200 | 21.92 | 22.70 | 21.51 |
| High | 5240 | 22.49 | 21.69 | 22.17 |

Test mode: IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz

| Channel | Frequency (MHz) | 26dB Bandwidth(B) (MHz) | | |
|---------|-----------------|-------------------------|-----------|-----------|
| | | Antenna 0 | Antenna 1 | Antenna 2 |
| Low | 5180 | 23.74 | 22.87 | 22.58 |
| Mid | 5200 | 23.69 | 22.99 | 22.40 |
| High | 5240 | 22.45 | 22.86 | 22.98 |

Test mode: IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz

| Channel | Frequency (MHz) | 26dB Bandwidth(B) (MHz) | | |
|---------|-----------------|-------------------------|-----------|-----------|
| | | Antenna 0 | Antenna 1 | Antenna 2 |
| Low | 5190 | 44.06 | 43.14 | 44.07 |
| High | 5230 | 44.48 | 45.70 | 44.13 |

Test mode: IEEE 802.11ac 80 mode / 5210MHz

| Channel | Frequency (MHz) | 26dB Bandwidth(B) (MHz) | | |
|---------|-----------------|-------------------------|-----------|-----------|
| | | Antenna 0 | Antenna 1 | Antenna 2 |
| | 5210 | 89.47 | 87.78 | 89.47 |

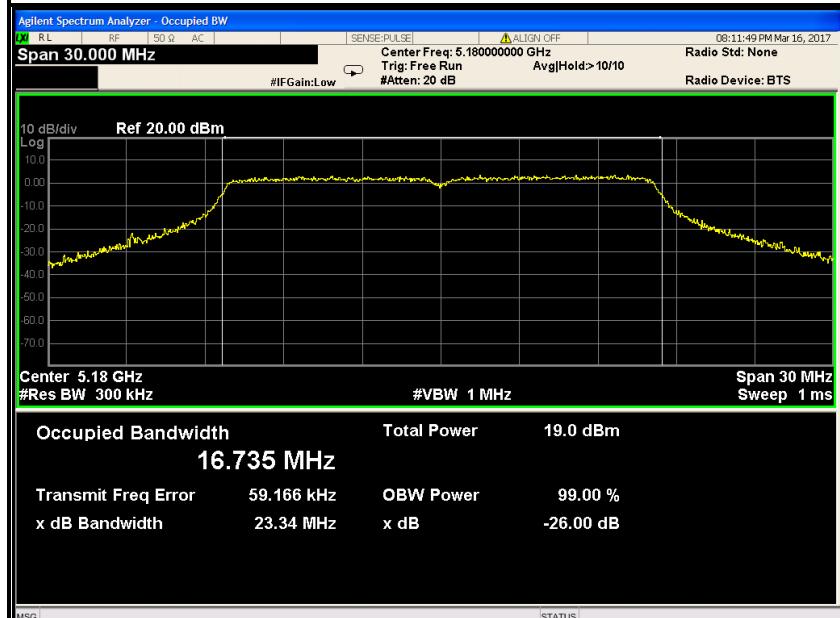


Test Plot

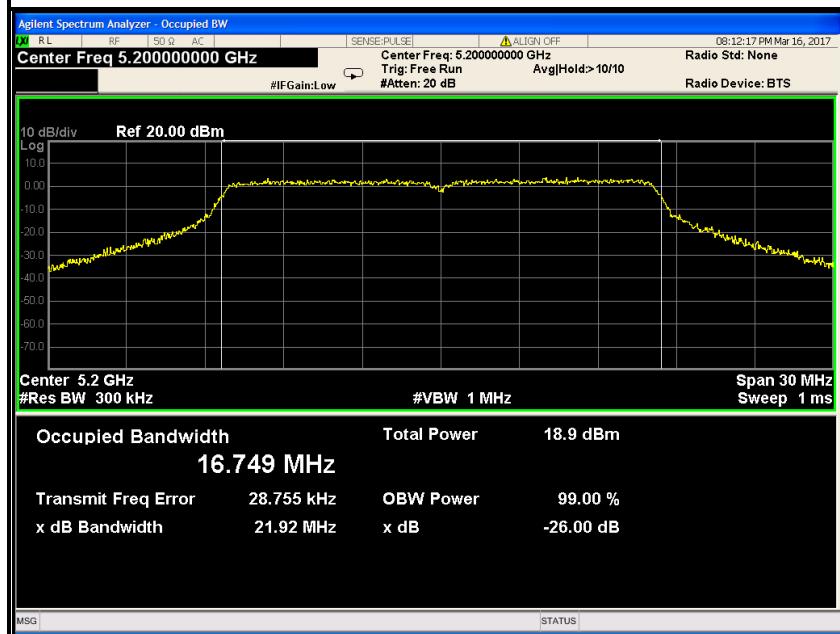
Antenna 0

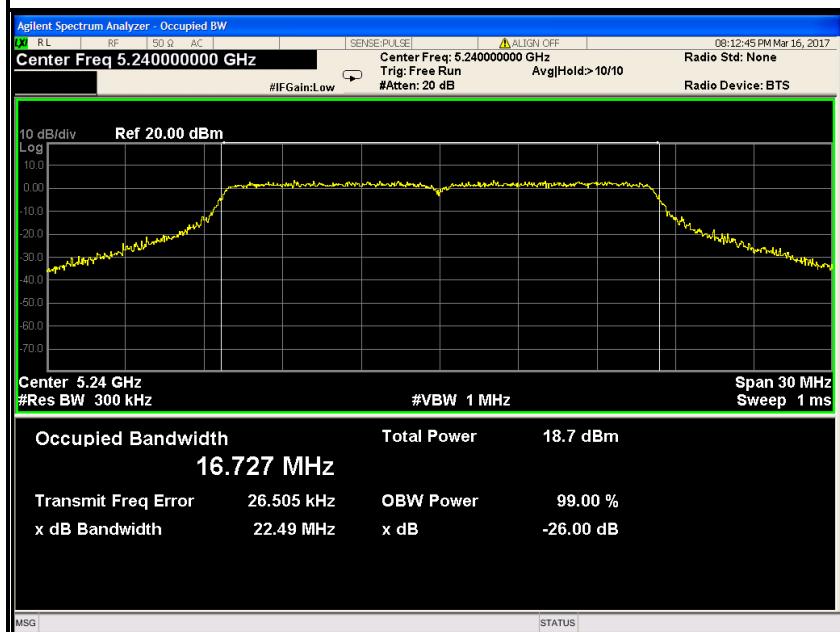
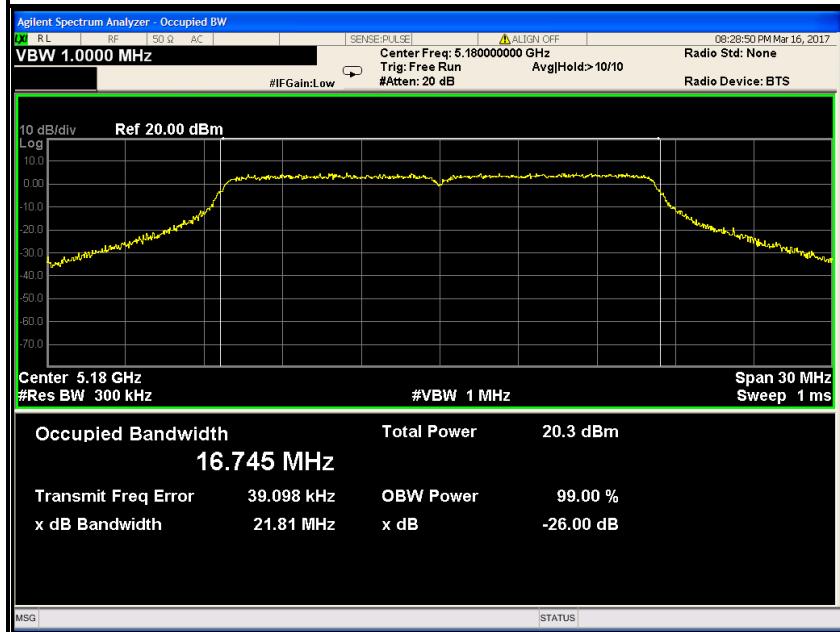
IEEE 802.11a mode / 5180 ~ 5240MHz

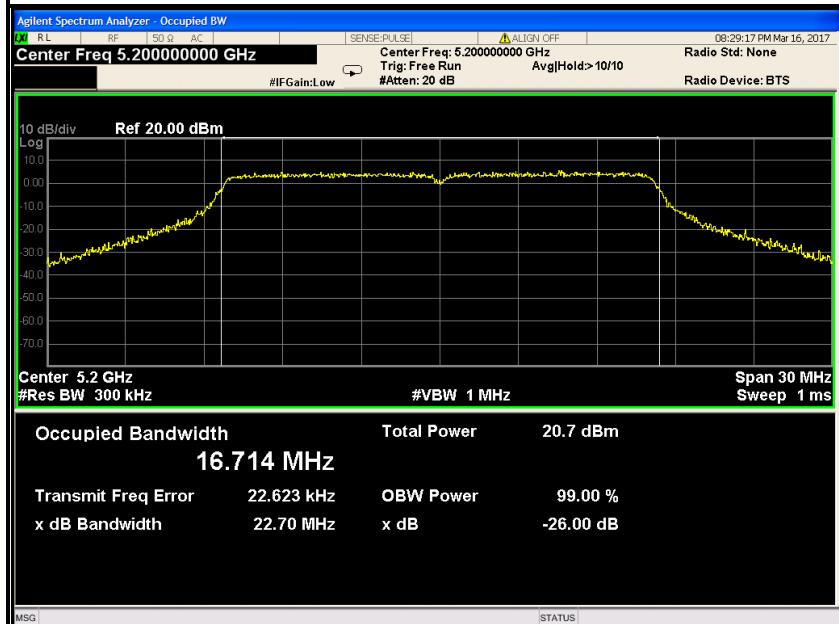
26dB Bandwidth (CH Low)



26dB Bandwidth (CH Mid)



**26dB Bandwidth (CH High)****Antenna 1****IEEE 802.11a mode / 5180 ~ 5240MHz****26dB Bandwidth (CH Low)**

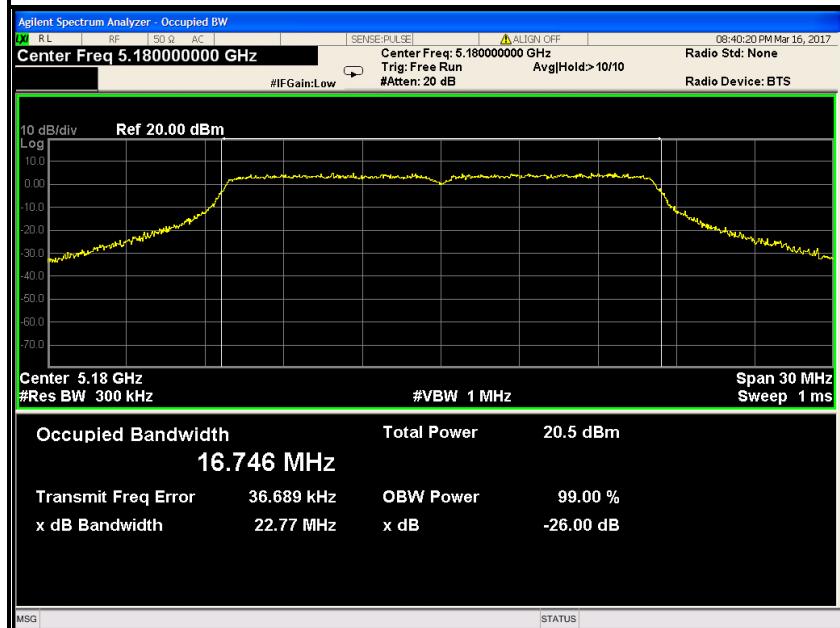
**26dB Bandwidth (CH Mid)****26dB Bandwidth (CH High)**



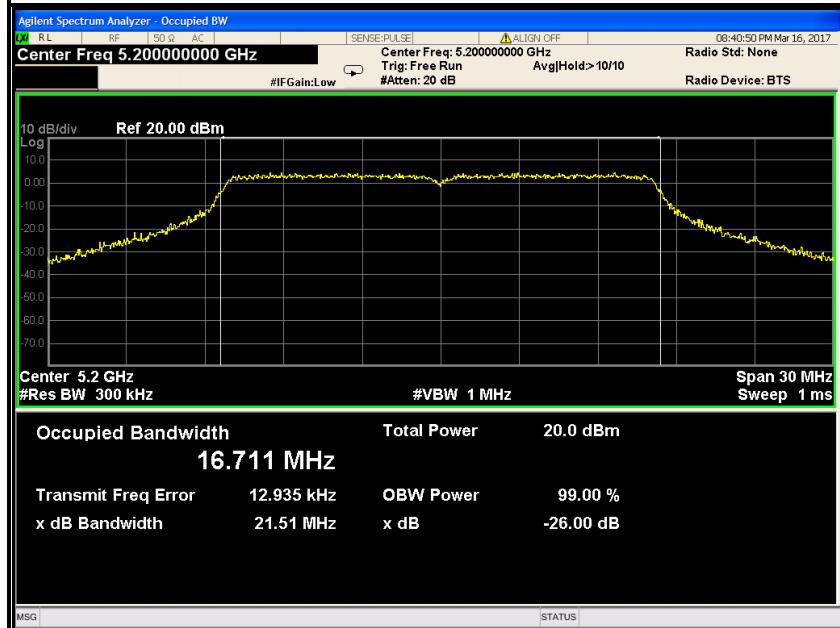
Antenna 2

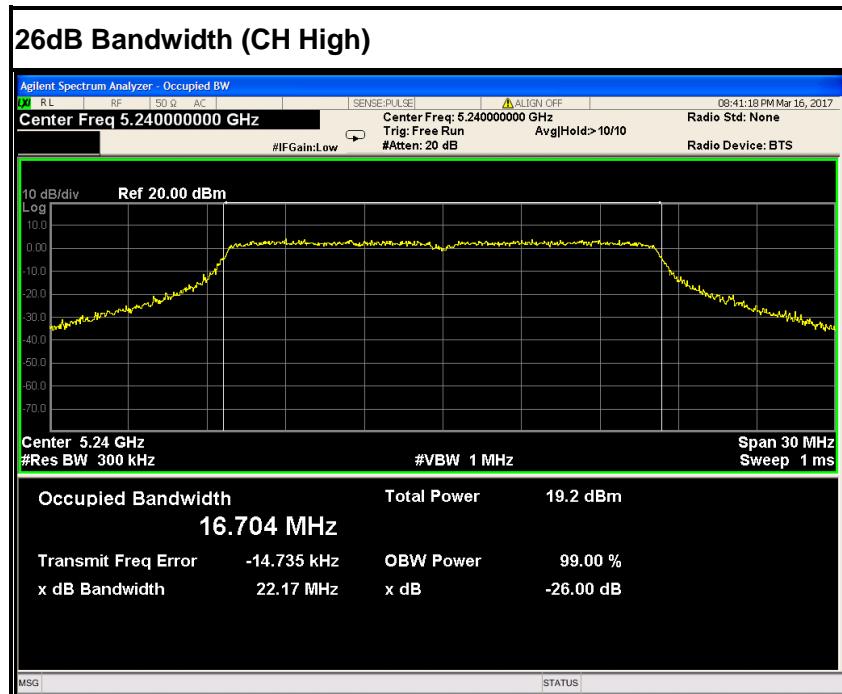
IEEE 802.11a mode / 5180 ~ 5240MHz

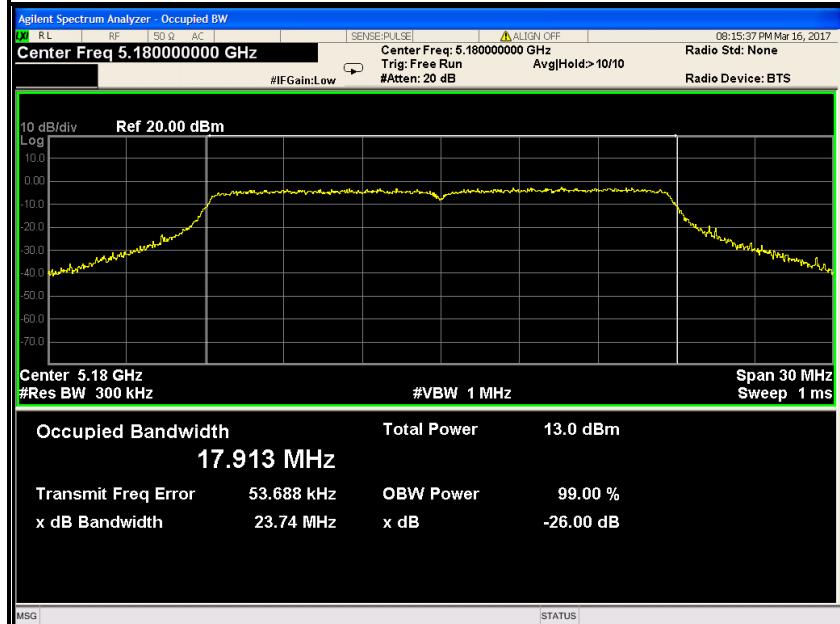
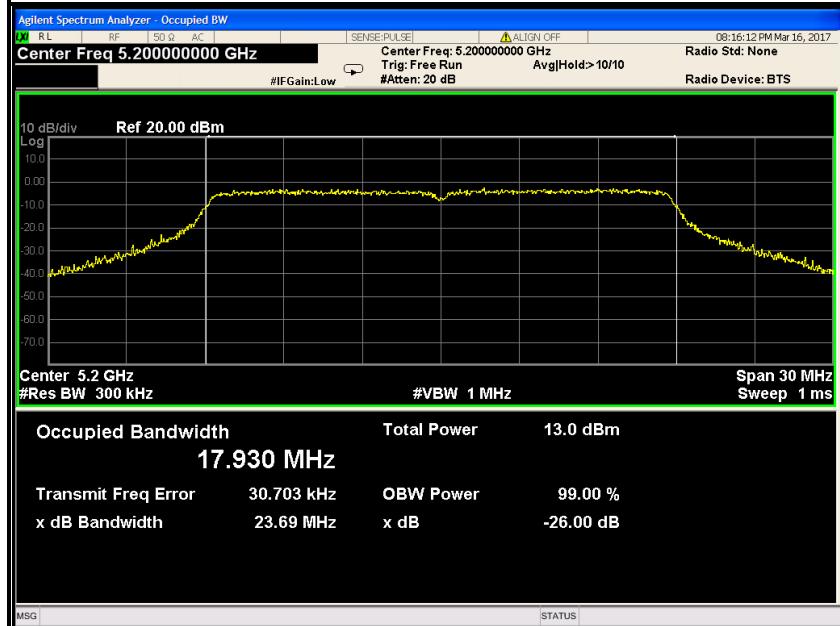
26dB Bandwidth (CH Low)

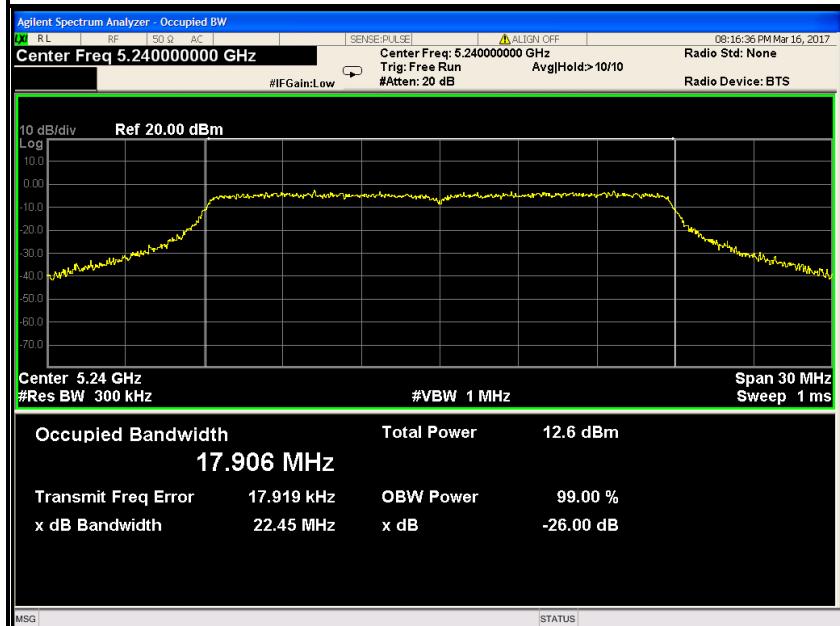
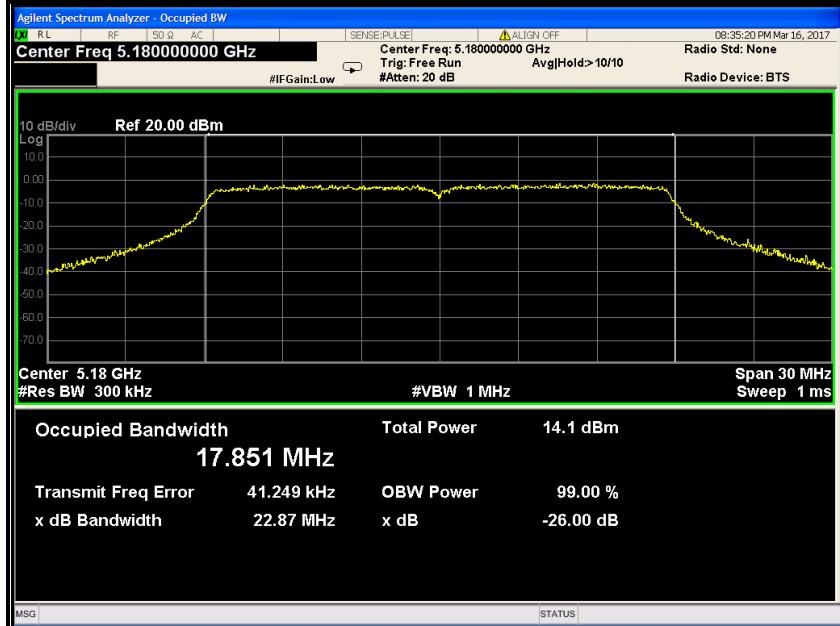


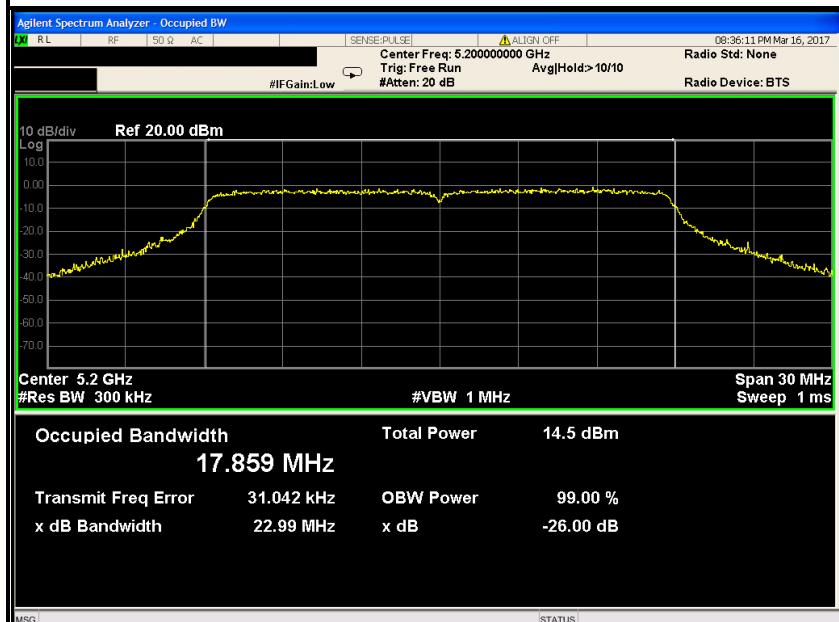
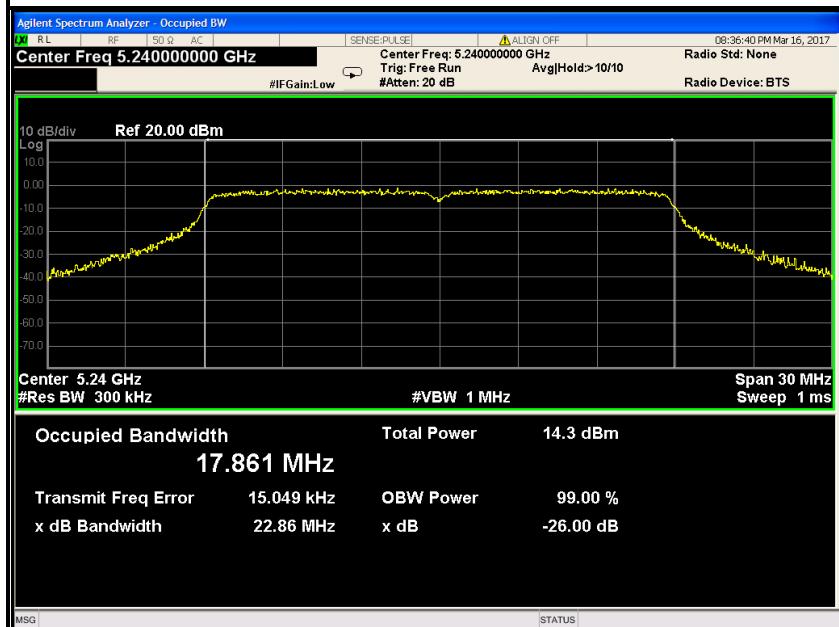
26dB Bandwidth (CH Mid)

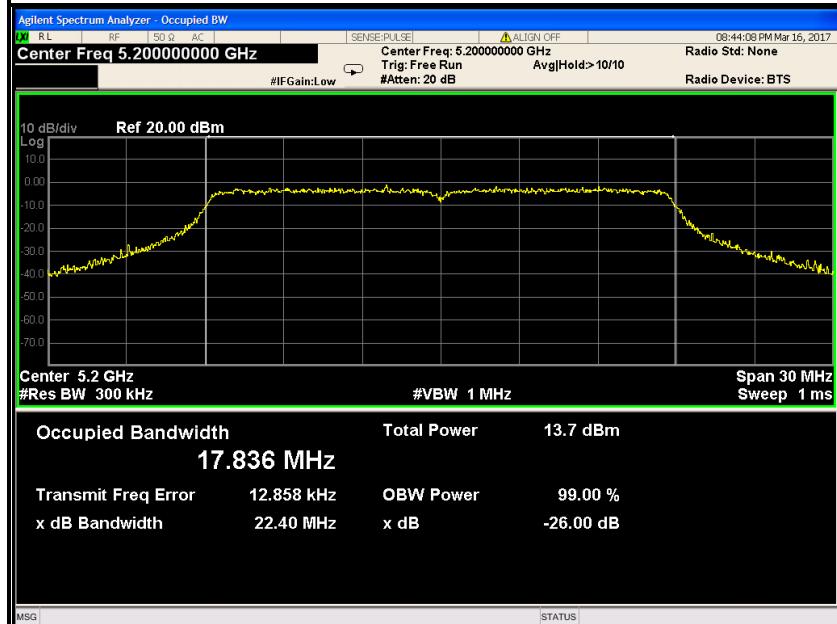


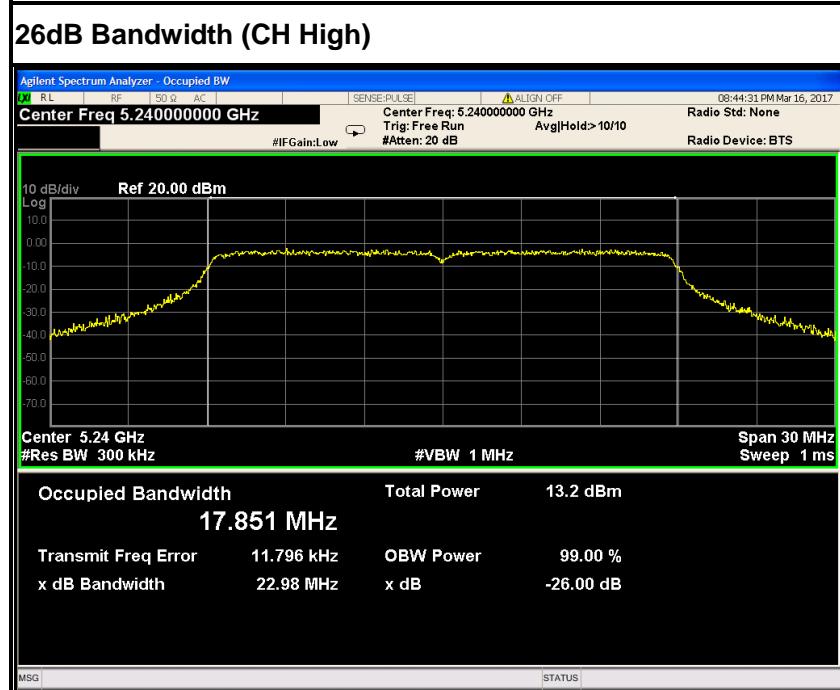


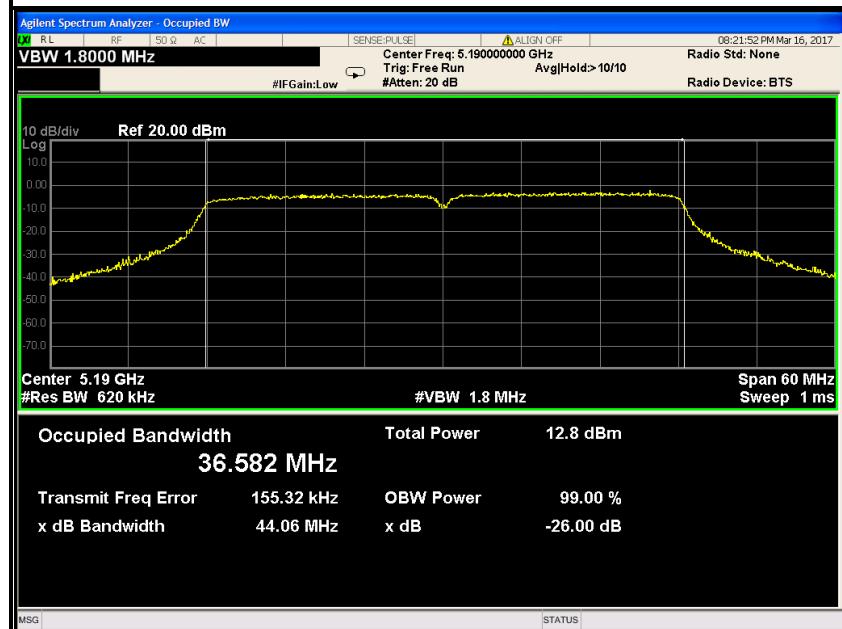
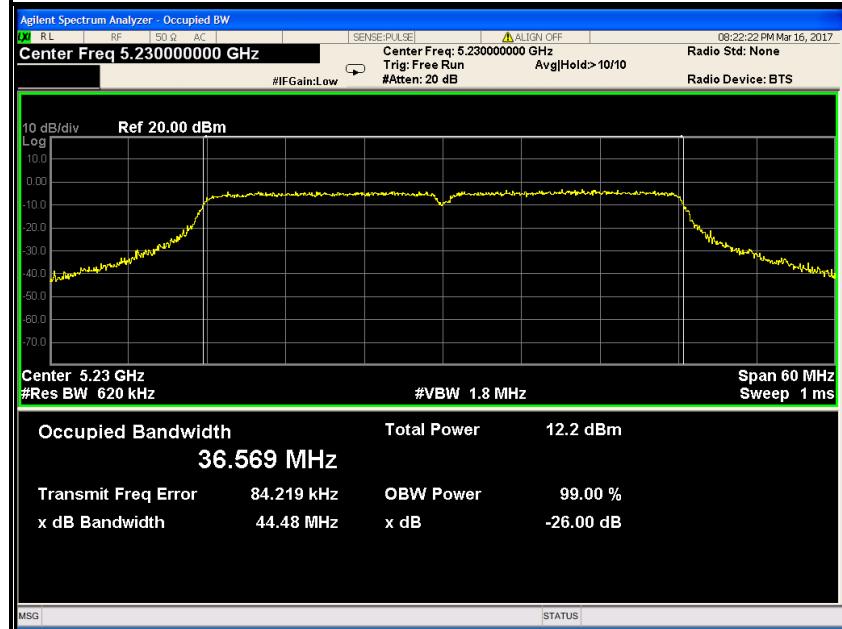
**Antenna 0****IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz****26dB Bandwidth (CH Low)****26dB Bandwidth (CH Mid)**

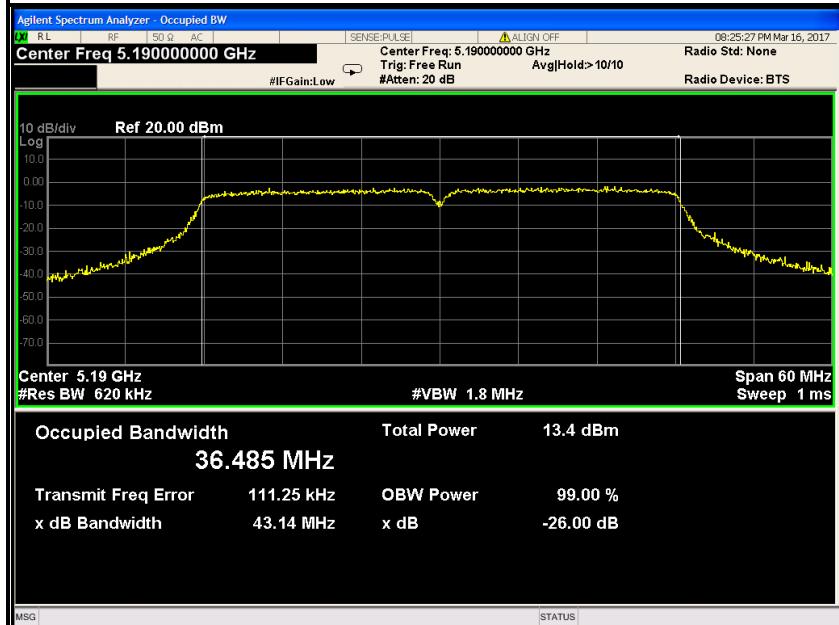
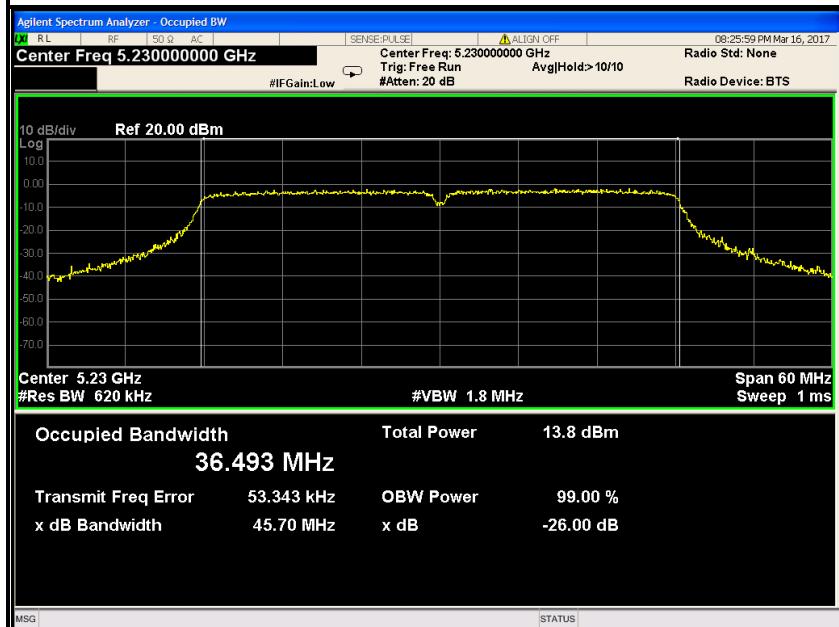
**26dB Bandwidth (CH High)****Antenna 1****IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz****26dB Bandwidth (CH Low)**

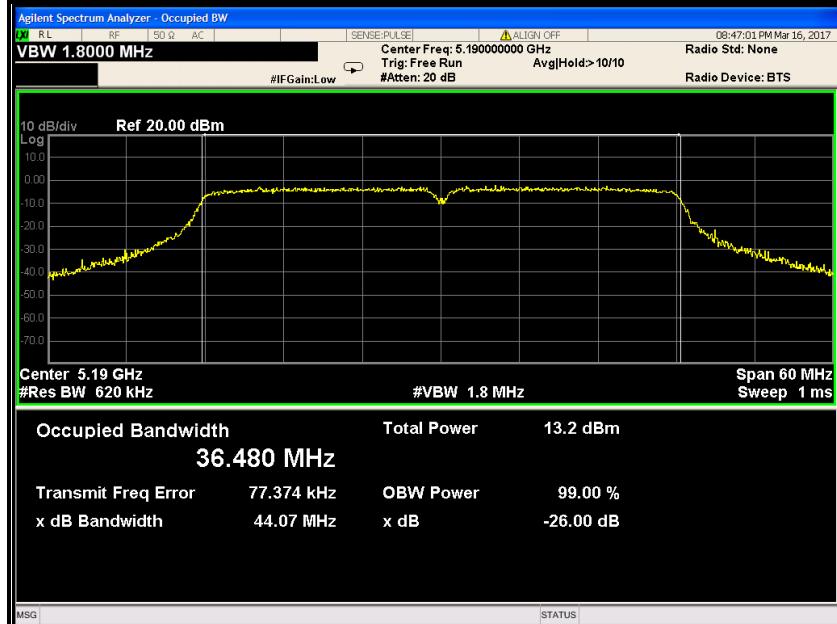
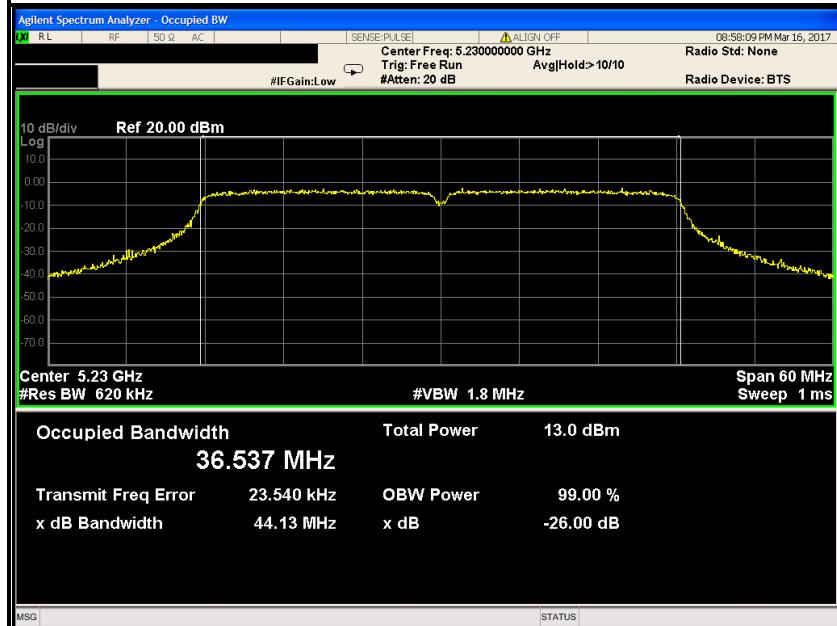
**26dB Bandwidth (CH Mid)****26dB Bandwidth (CH High)**

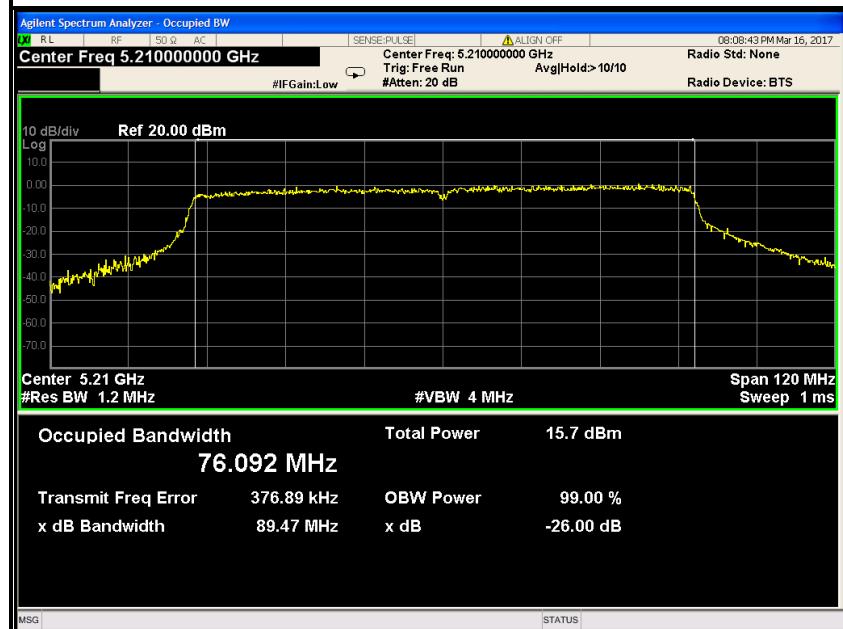
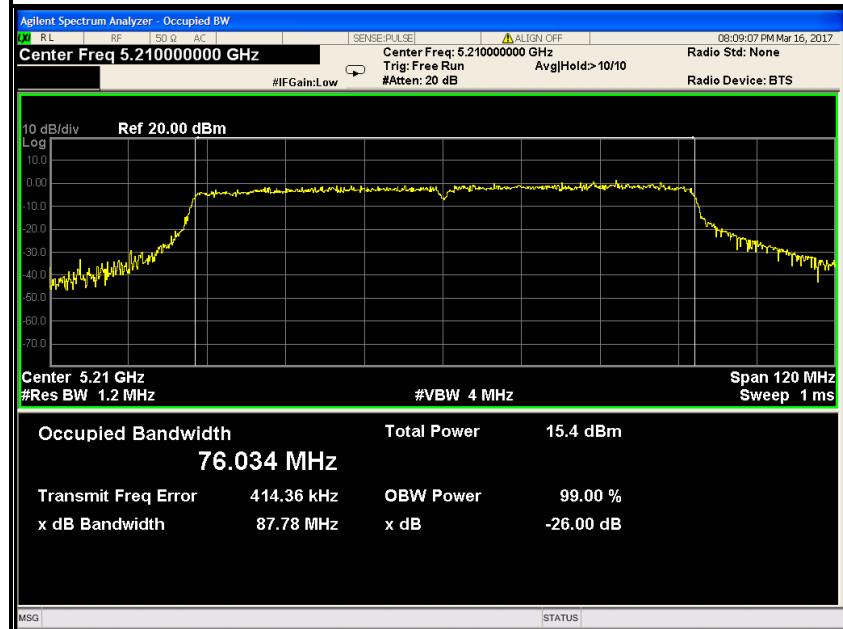
**Antenna 2****IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz****26dB Bandwidth (CH Low)****26dB Bandwidth (CH Mid)**

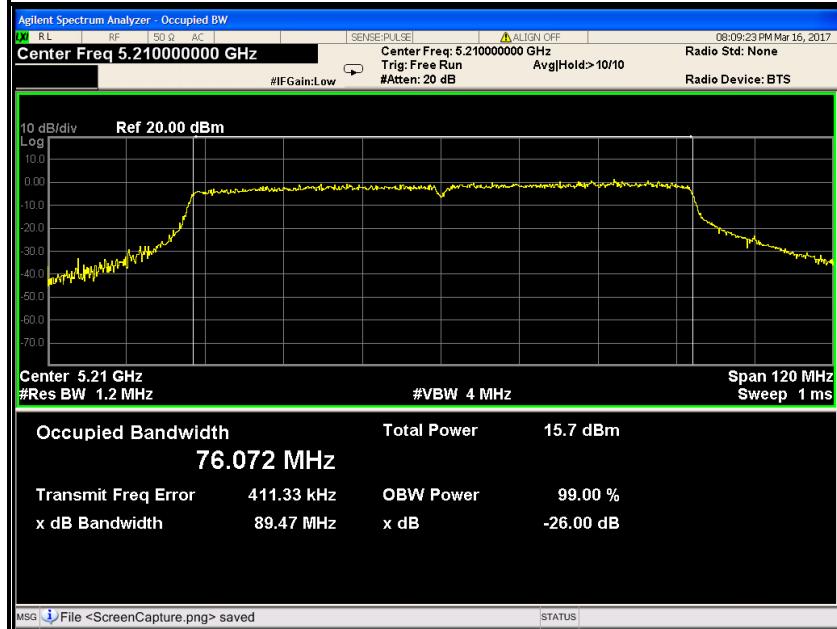


**Antenna 0****IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz****26dB Bandwidth (CH Low)****26dB Bandwidth (CH High)**

**Antenna 1****IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz****26dB Bandwidth (CH Low)****26dB Bandwidth (CH High)**

**Antenna 2****IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz****26dB Bandwidth (CH Low)****26dB Bandwidth (CH High)**

**Antenna 0****IEEE 802.11ac 80 mode / 5210MHz****26dB Bandwidth****Antenna 1****IEEE 802.11ac 80 mode / 5210MHz****26dB Bandwidth**

**Antenna 2****IEEE 802.11ac 80 mode / 5210MHz****26dB Bandwidth**



6.2 6dB BANDWIDTH MEASUREMENT

6.2.1 LIMITS

According to §15.407(e), Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

6.2.2 TEST INSTRUMENTS


| Name of Equipment | Manufacturer | Model | Serial Number | Last Calibration | Calibration Due |
|-------------------|--------------|--------|---------------|------------------|-----------------|
| Spectrum Analyzer | Agilent | N9010A | MY52221469 | 02/21/2017 | 02/20/2018 |

6.2.3 TEST PROCEDURES (please refer to measurement standard)

8.1 Option 2:

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW \geq 3 RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be \geq 6 dB.

6.2.4 TEST SETUP





6.2.5 TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11a mode / 5745 ~ 5825MHz

| Channel | Frequency (MHz) | 6dB Bandwidth(B) (MHz) | | | Limit (kHz) | Test Result |
|---------|-----------------|------------------------|-----------|-----------|-------------|-------------|
| | | Antenna 0 | Antenna 1 | Antenna 2 | | |
| Low | 5745 | 16.37 | 16.38 | 16.37 | >500 | PASS |
| Mid | 5785 | 16.35 | 16.36 | 16.38 | | PASS |
| High | 5825 | 16.36 | 16.35 | 16.38 | | PASS |

Test mode: IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz

| Channel | Frequency (MHz) | 6dB Bandwidth(B) (MHz) | | | Limit (kHz) | Test Result |
|---------|-----------------|------------------------|-----------|-----------|-------------|-------------|
| | | Antenna 0 | Antenna 1 | Antenna 2 | | |
| Low | 5745 | 17.59 | 17.58 | 17.59 | >500 | PASS |
| Mid | 5785 | 17.59 | 17.57 | 17.59 | | PASS |
| High | 5825 | 17.58 | 17.57 | 17.60 | | PASS |

Test mode: IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz

| Channel | Frequency (MHz) | 6dB Bandwidth(B) (MHz) | | | Limit (kHz) | Test Result |
|---------|-----------------|------------------------|-----------|-----------|-------------|-------------|
| | | Antenna 0 | Antenna 1 | Antenna 2 | | |
| Low | 5755 | 36.33 | 36.33 | 36.36 | >500 | PASS |
| High | 5795 | 35.76 | 36.08 | 36.34 | | PASS |

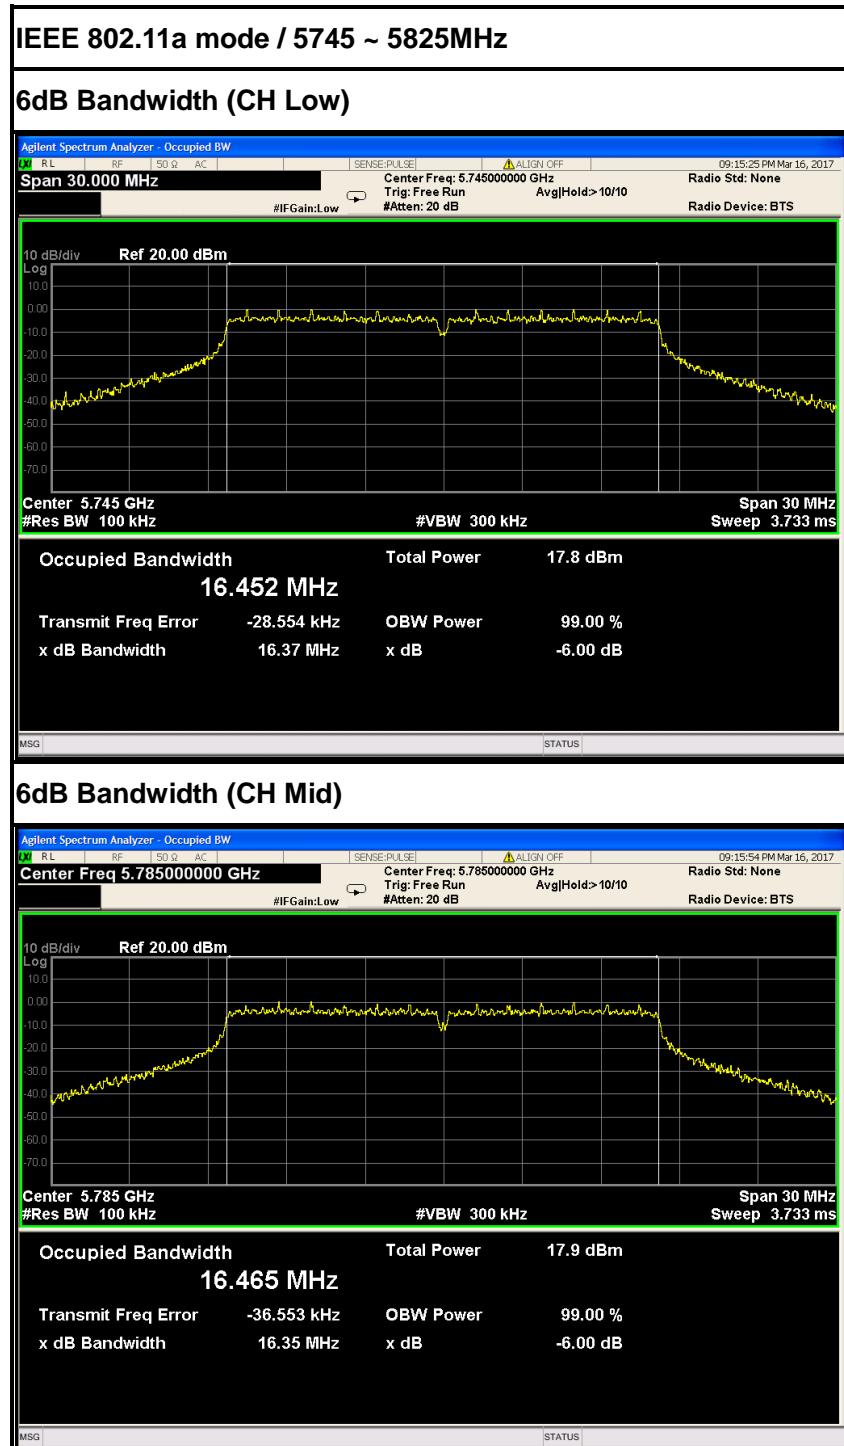
Test mode: IEEE 802.11ac 80 mode / 5775MHz

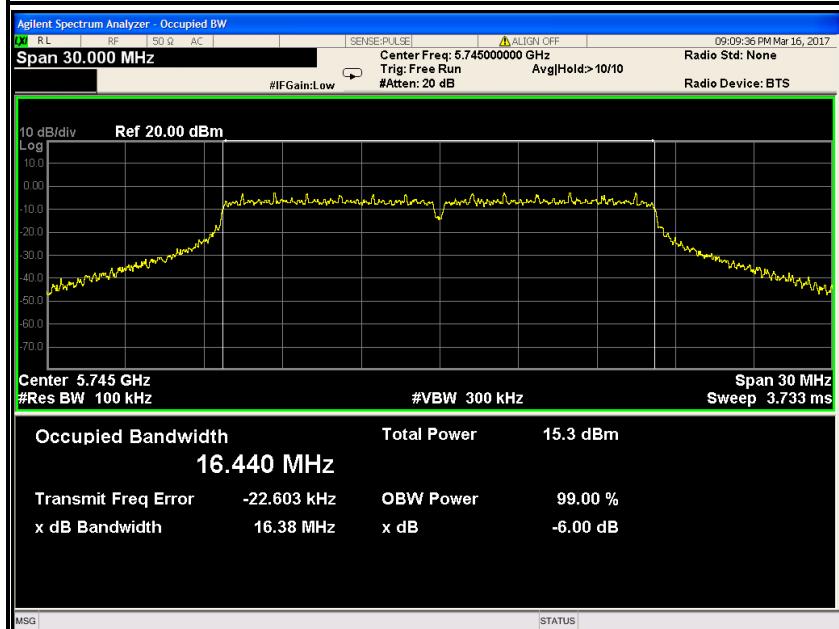
| Channel | Frequency (MHz) | 6dB Bandwidth(B) (MHz) | | | Limit (kHz) | Test Result |
|---------|-----------------|------------------------|-----------|-----------|-------------|-------------|
| | | Antenna 0 | Antenna 1 | Antenna 2 | | |
| | 5775 | 76.39 | 76.45 | 76.43 | >500 | PASS |

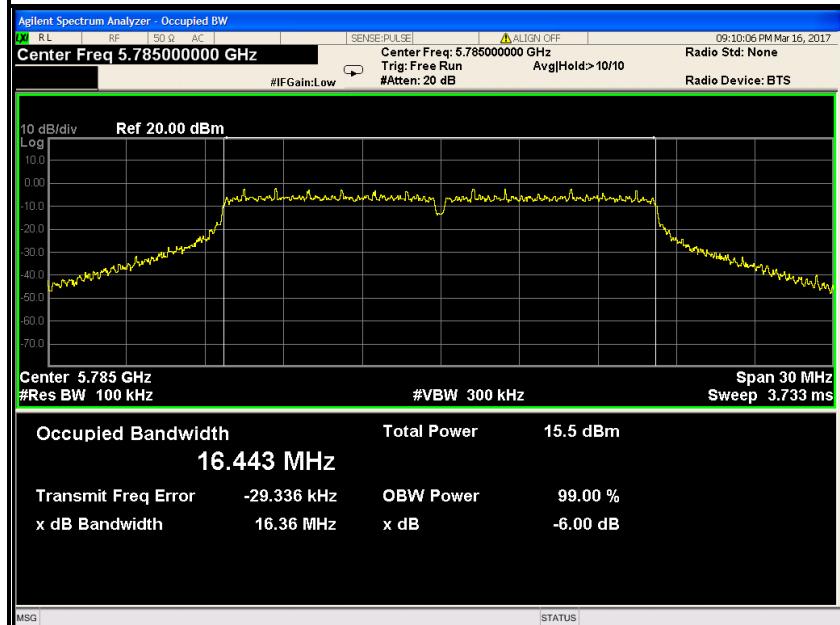
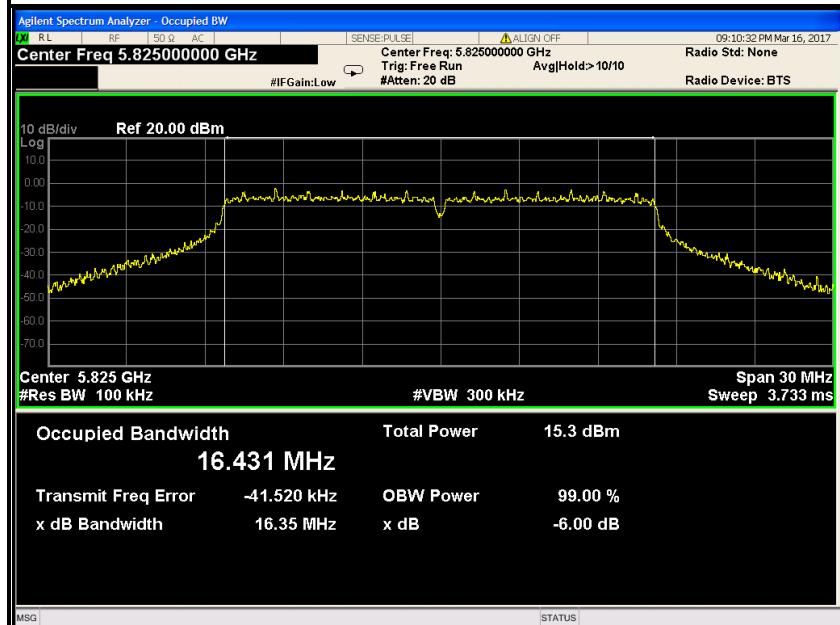


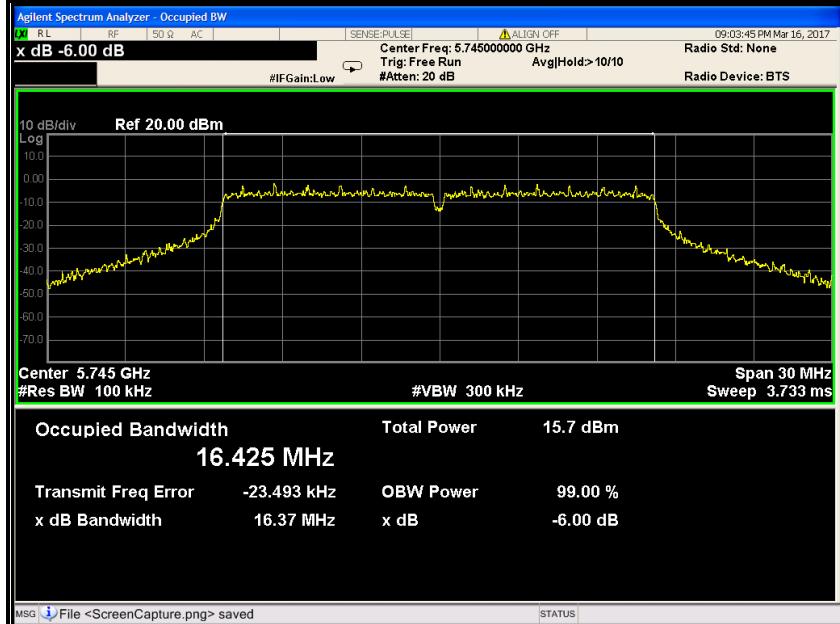
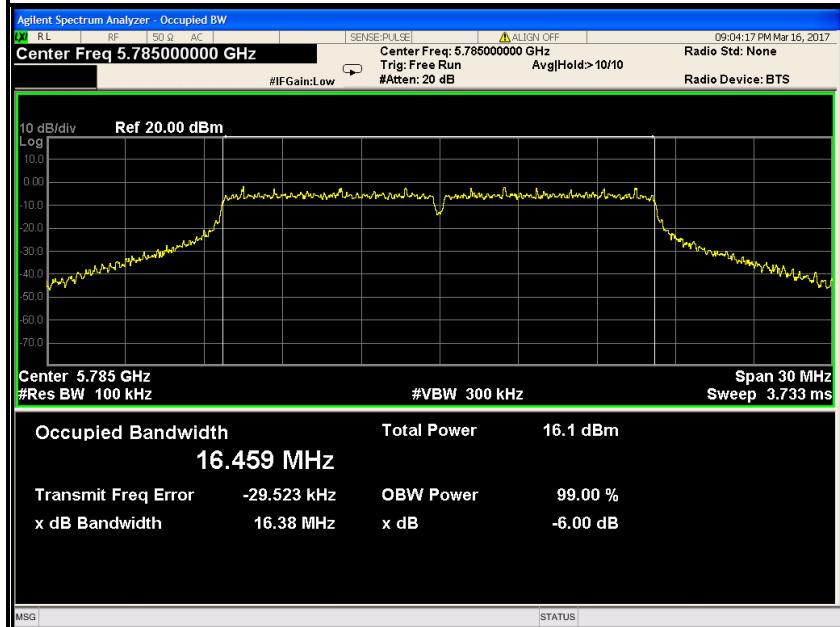
Test Plot

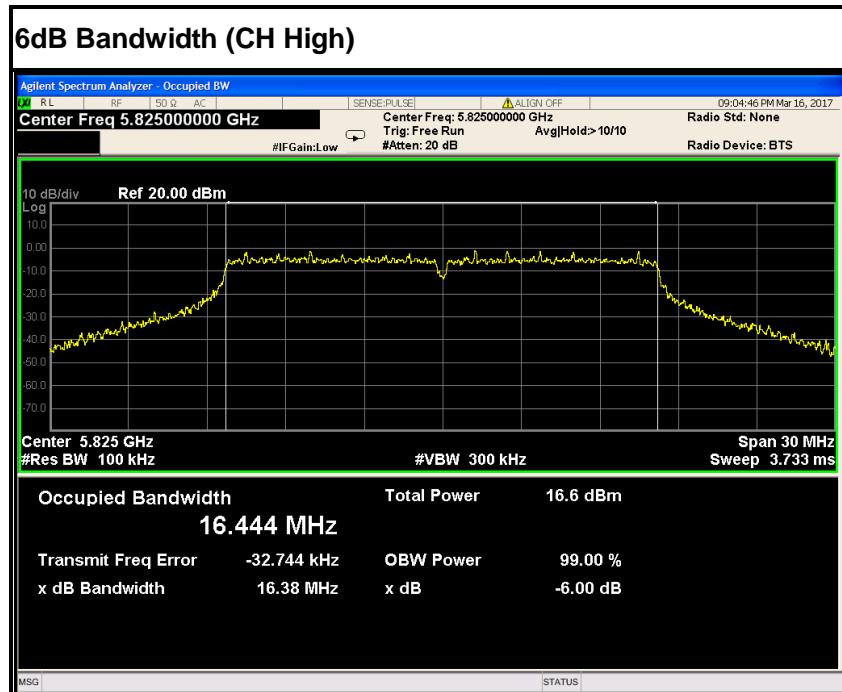
Antenna 0

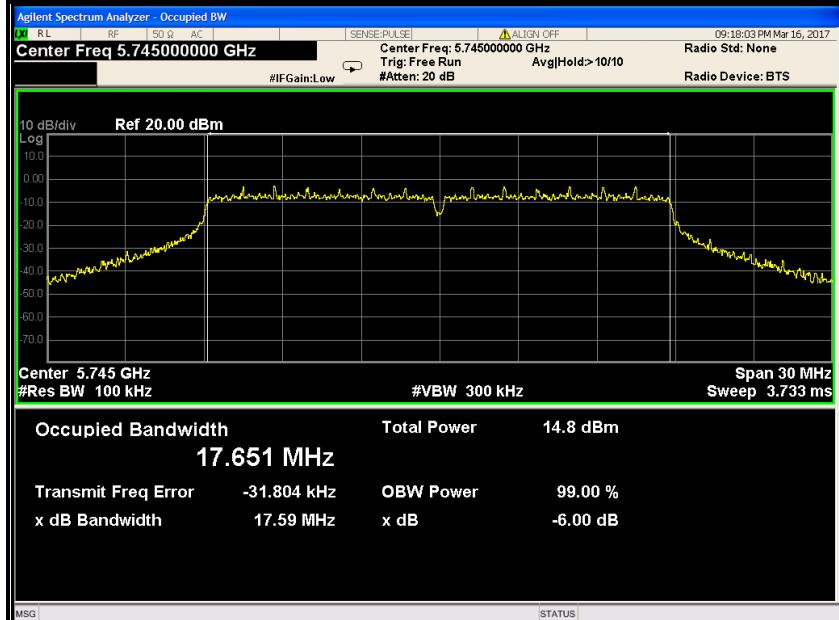
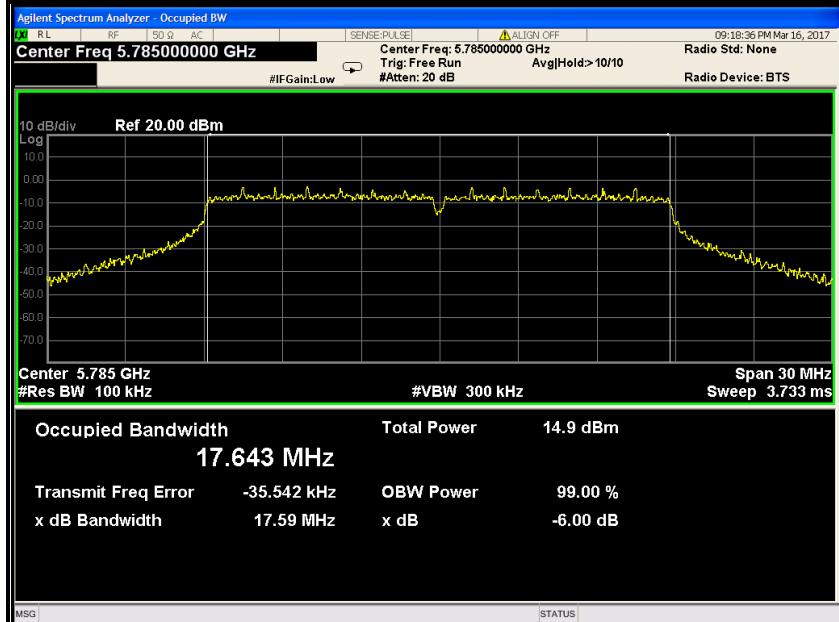


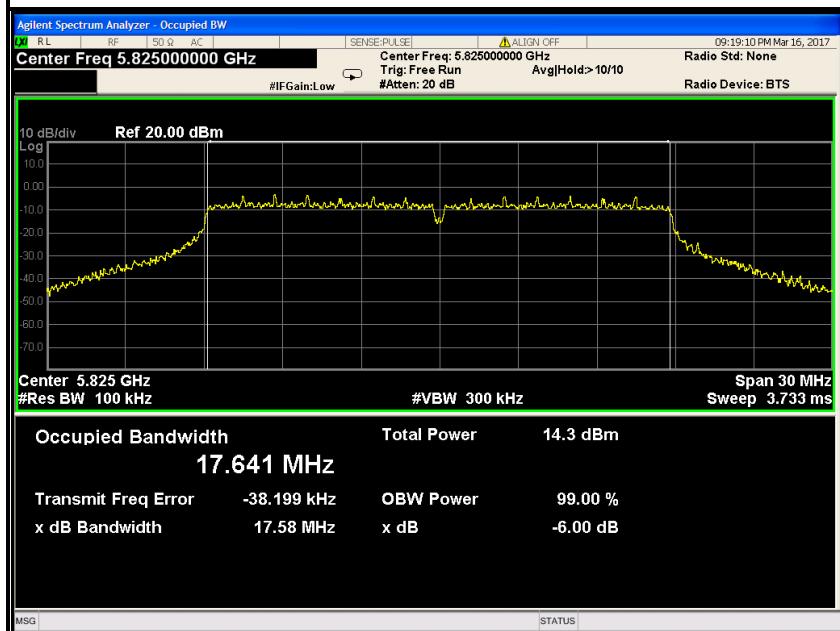
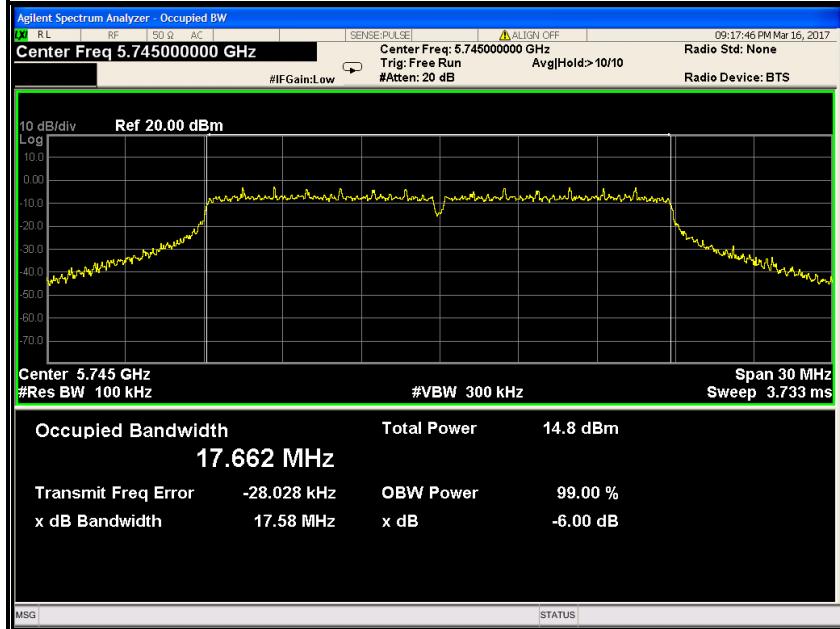
**6dB Bandwidth (CH High)****Antenna 1****IEEE 802.11a mode / 5745 ~ 5825MHz****6dB Bandwidth (CH Low)**

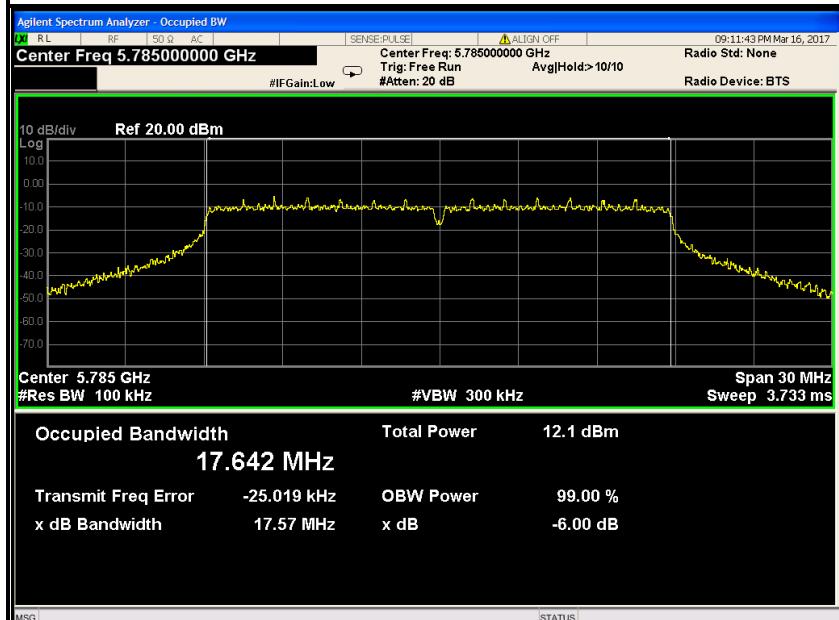
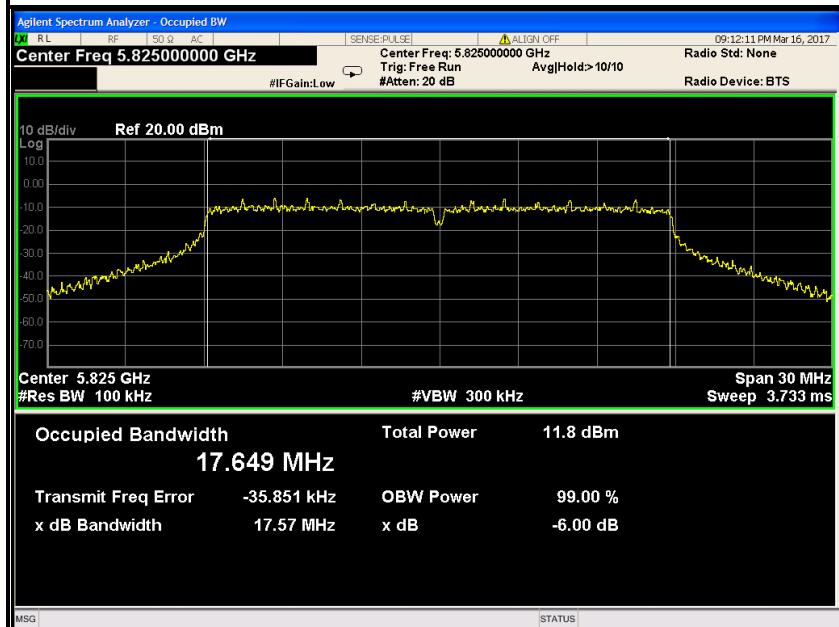
**6dB Bandwidth (CH Mid)****6dB Bandwidth (CH High)**

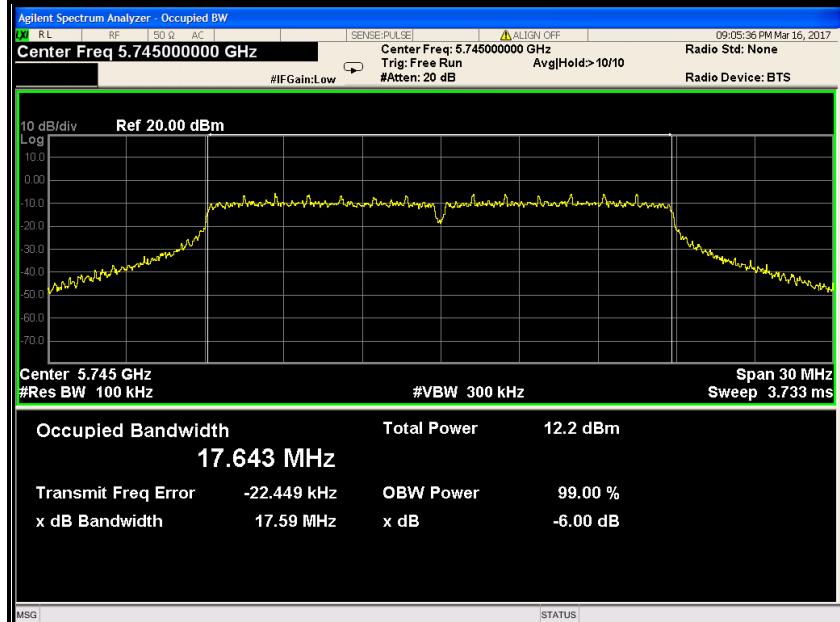
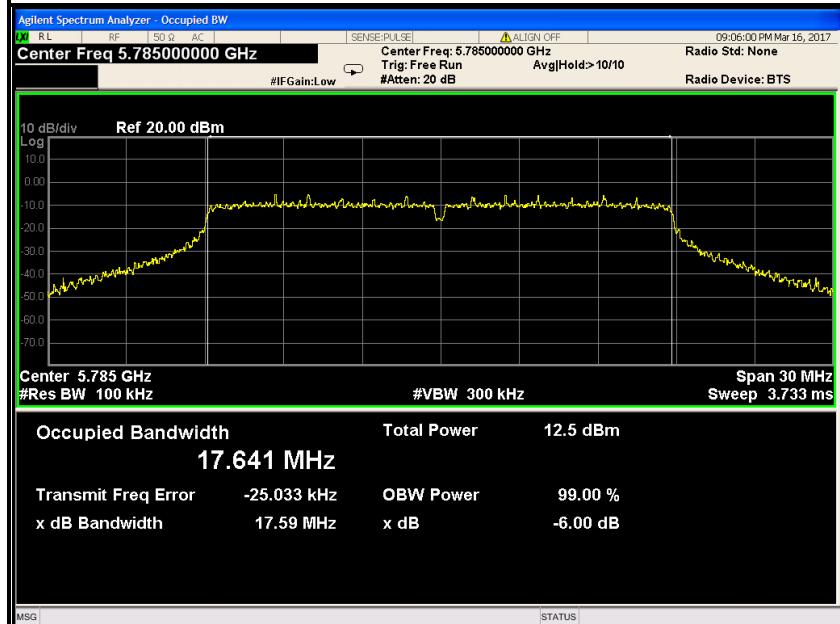
**Antenna 2****IEEE 802.11a mode / 5745 ~ 5825MHz****6dB Bandwidth (CH Low)****6dB Bandwidth (CH Mid)**

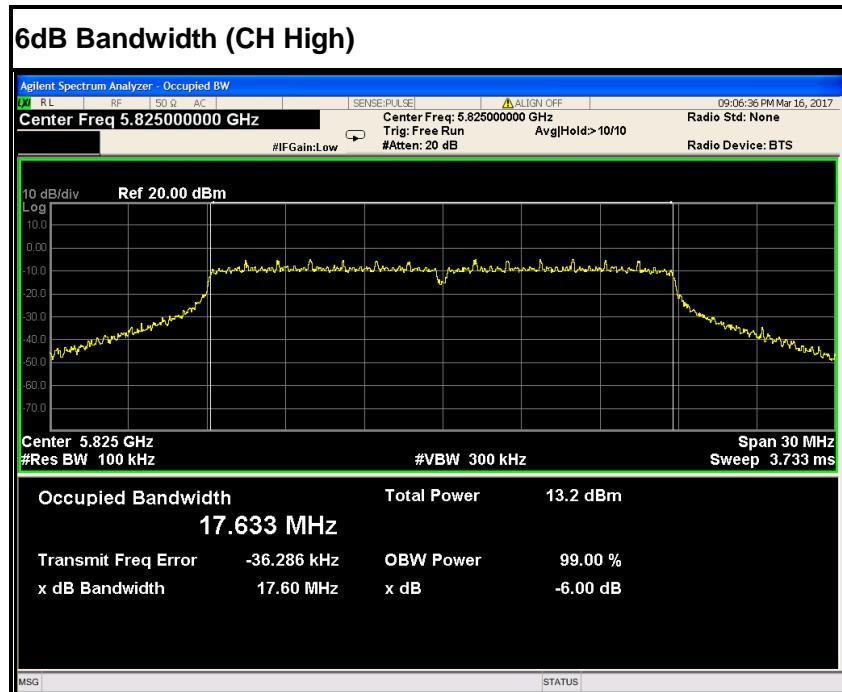


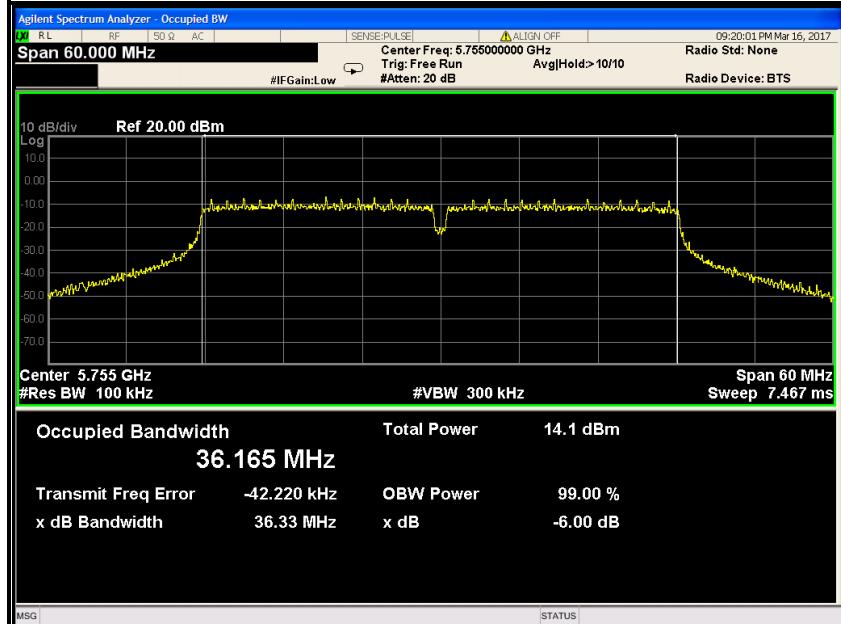
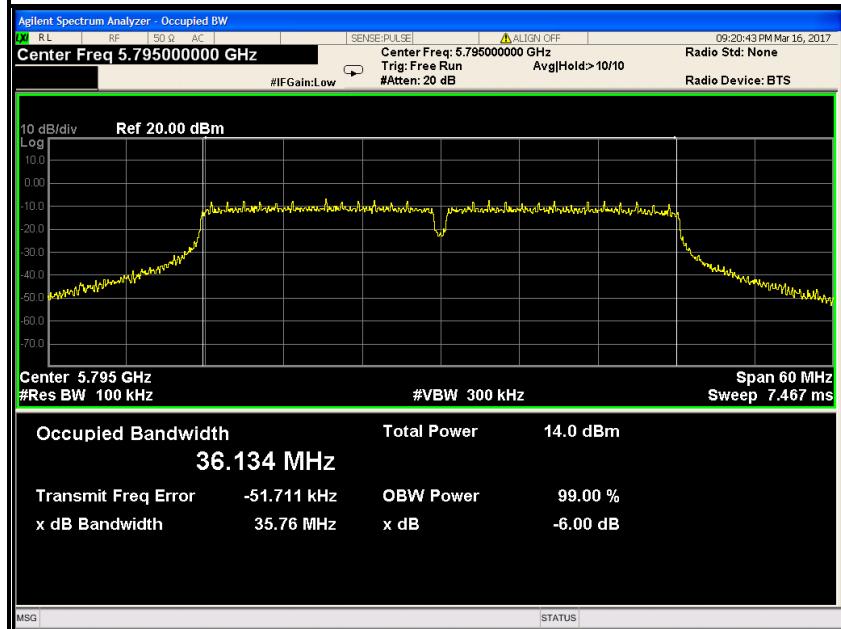
**Antenna 0****IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz****6dB Bandwidth (CH Low)****6dB Bandwidth (CH Mid)**

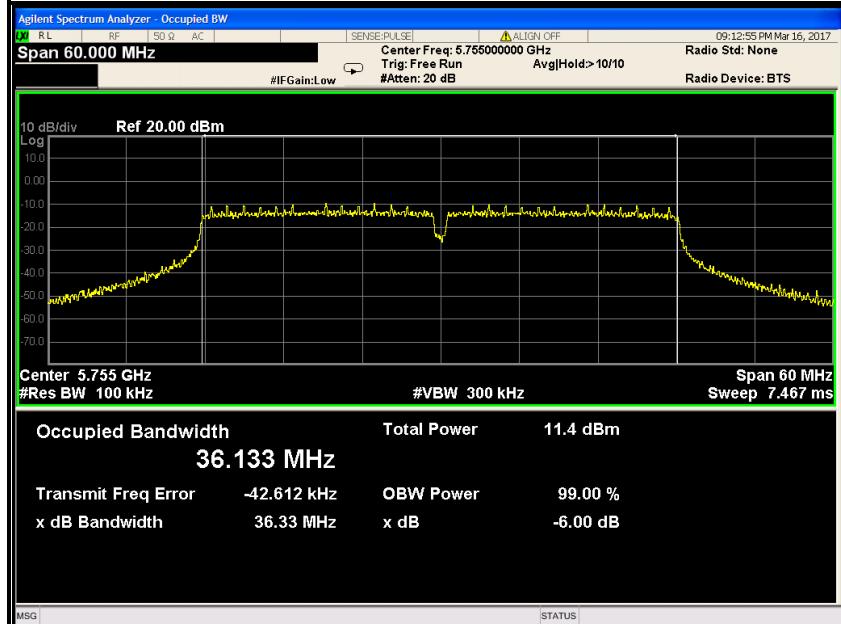
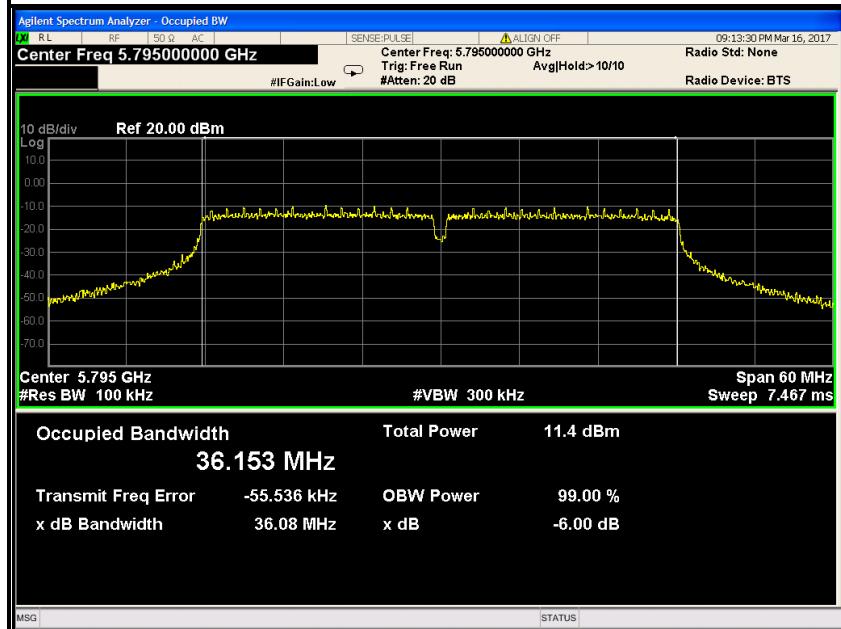
**6dB Bandwidth (CH High)****Antenna 1****IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz****6dB Bandwidth (CH Low)**

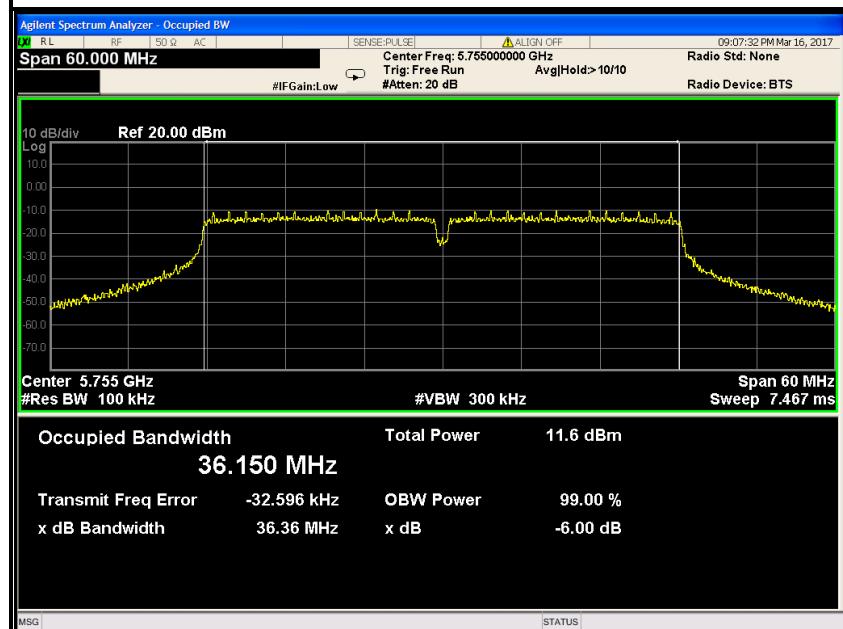
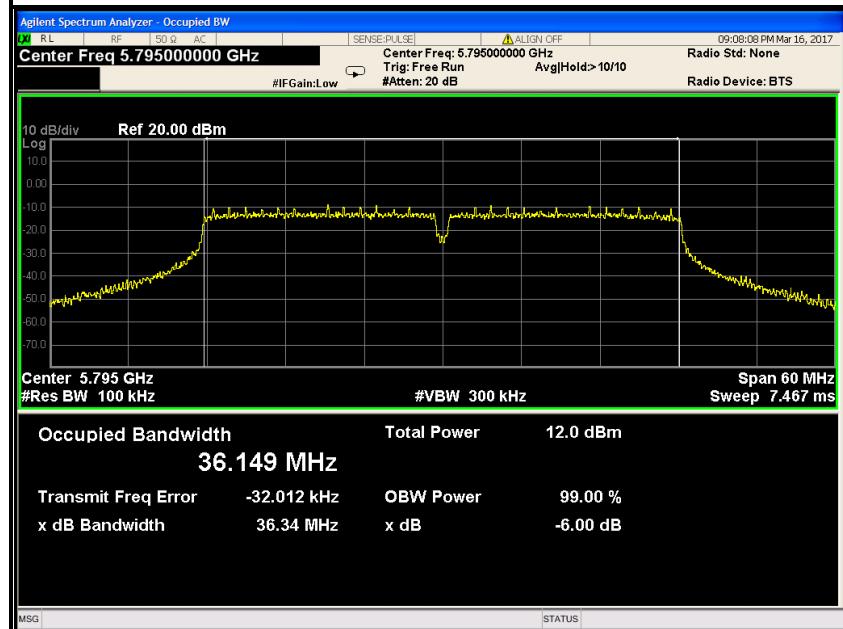
**6dB Bandwidth (CH Mid)****6dB Bandwidth (CH High)**

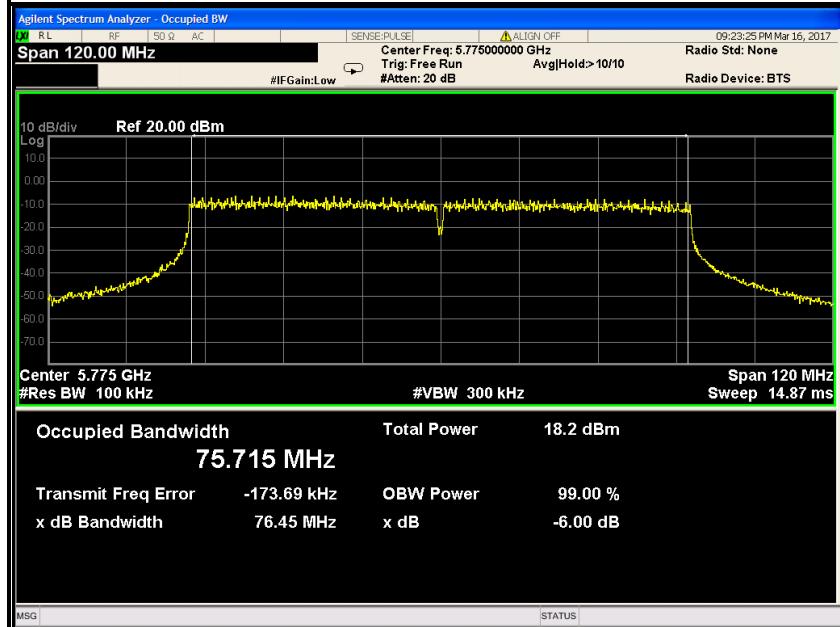
**Antenna 2****IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz****6dB Bandwidth (CH Low)****6dB Bandwidth (CH Mid)**



**Antenna 0****IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz****6dB Bandwidth (CH Low)****6dB Bandwidth (CH High)**

**Antenna 1****IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz****6dB Bandwidth (CH Low)****6dB Bandwidth (CH High)**

**Antenna 2****IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz****6dB Bandwidth (CH Low)****6dB Bandwidth (CH High)**

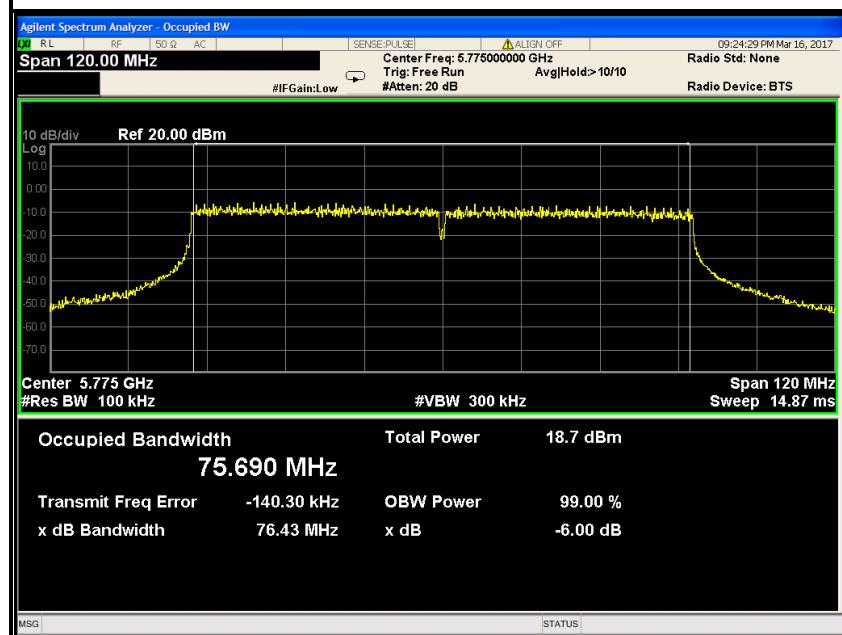
**Antenna 0****IEEE 802.11ac 80 mode / 5775MHz****6dB Bandwidth****Antenna 1****IEEE 802.11ac 80 mode / 5775MHz****6dB Bandwidth**



Antenna 2

IEEE 802.11ac 80 mode / 5775MHz

6dB Bandwidth





6.3 ANTENNA GAIN

MEASUREMENT

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal WLAN devices, the OFDM mode is used.

MEASUREMENT PARAMETERS

| Measurement parameter | |
|-----------------------|----------|
| Detector | Peak |
| Sweep time | Auto |
| Resolution bandwidth | 3 MHz |
| Video bandwidth | 3 MHz |
| Trace-Mode | Max hold |

LIMITS

| FCC | IC |
|--------------|----|
| Antenna Gain | |
| 6 dBi | |



TEST RESULTS

Antenna 0

IEEE 802.11a mode / 5180 ~ 5240MHz

| T _{nom} | V _{nom} | Lowest channel 5180MHz | Highest channel 5240MHz |
|---|------------------|----------------------------------|----------------------------|
| Conducted power [dBm] Measured with OFDM modulation | | 3.96 | 4.66 |
| Radiated power [dBm] Measured with OFDM modulation | | 5.90 | 6.45 |
| Gain [dBi] Calculated | | 1.94 | 1.79 |
| Measurement uncertainty | | ± 1.5 dB (cond.) / ± 3 dB (rad.) | |

IEEE 802.11a mode / 5745 ~ 5825MHz

| T _{nom} | V _{nom} | Lowest channel 5745MHz | Highest channel 5825MHz |
|---|------------------|----------------------------------|----------------------------|
| Conducted power [dBm] Measured with OFDM modulation | | 5.96 | 5.56 |
| Radiated power [dBm] Measured with OFDM modulation | | 8.00 | 7.45 |
| Gain [dBi] Calculated | | 2.04 | 1.89 |
| Measurement uncertainty | | ± 1.5 dB (cond.) / ± 3 dB (rad.) | |

Antenna 1

IEEE 802.11a mode / 5180 ~ 5240MHz

| T _{nom} | V _{nom} | Lowest channel 5180MHz | Highest channel 5240MHz |
|---|------------------|----------------------------------|----------------------------|
| Conducted power [dBm] Measured with OFDM modulation | | 5.76 | 6.56 |
| Radiated power [dBm] Measured with OFDM modulation | | 7.70 | 8.65 |
| Gain [dBi] Calculated | | 1.94 | 2.09 |
| Measurement uncertainty | | ± 1.5 dB (cond.) / ± 3 dB (rad.) | |

IEEE 802.11a mode / 5745 ~ 5825MHz

| T _{nom} | V _{nom} | Lowest channel 5745MHz | Highest channel 5825MHz |
|---|------------------|----------------------------------|----------------------------|
| Conducted power [dBm] Measured with OFDM modulation | | 3.48 | 3.70 |
| Radiated power [dBm] Measured with OFDM modulation | | 5.40 | 5.85 |
| Gain [dBi] Calculated | | 1.92 | 2.15 |
| Measurement uncertainty | | ± 1.5 dB (cond.) / ± 3 dB (rad.) | |



Antenna 2

IEEE 802.11a mode / 5180 ~ 5240MHz

| T _{nom} | V _{nom} | Lowest channel 5180MHz | Highest channel 5240MHz |
|---|------------------|----------------------------------|----------------------------|
| Conducted power [dBm] Measured with OFDM modulation | | 6.76 | 6.66 |
| Radiated power [dBm] Measured with OFDM modulation | | 8.90 | 8.65 |
| Gain [dBi] Calculated | | 2.14 | 1.99 |
| Measurement uncertainty | | ± 1.5 dB (cond.) / ± 3 dB (rad.) | |

IEEE 802.11a mode / 5745 ~ 5825MHz

| T _{nom} | V _{nom} | Lowest channel 5745MHz | Highest channel 5825MHz |
|---|------------------|----------------------------------|----------------------------|
| Conducted power [dBm] Measured with OFDM modulation | | 2.00 | 3.26 |
| Radiated power [dBm] Measured with OFDM modulation | | 4.00 | 5.15 |
| Gain [dBi] Calculated | | 2.00 | 1.89 |
| Measurement uncertainty | | ± 1.5 dB (cond.) / ± 3 dB (rad.) | |



6.4 OUTPUT POWER

6.4.1 LIMIT

According to §15.407(a)& FCC R&O FCC 14 - 30,

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Note to paragraph (a)(3): The Commission strongly recommends that parties employing U-NII devices to provide critical communications services should determine if there are any nearby Government radar systems that could affect their operation.

Specified Limit of the Output Power

Not applicable, Since the EUT without the band II and band III.



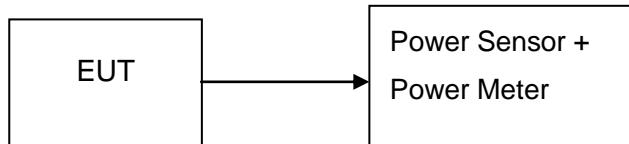
6.4.2 MEASUREMENT EQUIPMENT USED

| Name of Equipment | Manufacturer | Model | Serial Number | Last Calibration | Calibration Due |
|-------------------|--------------|---------|---------------|------------------|-----------------|
| Power Meter | Anritsu | ML2495A | 1204003 | 02/21/2017 | 02/20/2018 |
| Power Sensor | Anritsu | MA2411B | 1126150 | 02/21/2017 | 02/20/2018 |

Remark: Each piece of equipment is scheduled for calibration once a year.

6.4.3 TEST CONFIGURATIONS

The EUT was connected to a spectrum analyzer through a 50Ω RF cable.



6.4.4 TEST PROCEDURE

The EUT was connected to a Power Meter through a 50Ω RF cable.

6.4.5 TEST RESULTS

No non-compliance noted



6.4.6 TEST DATA

IEEE 802.11a mode / 5180 ~ 5240MHz

| Channel | Frequency (MHz) | AVG Output Power (dBm) | | | AVG Output Power (W) | | | Limit (dBm) | Result |
|---------|-----------------|------------------------|-----------|-----------|----------------------|-----------|-----------|-------------|--------|
| | | Antenna 0 | Antenna 1 | Antenna 2 | Antenna 0 | Antenna 1 | Antenna 2 | | |
| Low | 5180 | 16.00 | 17.80 | 18.80 | 0.03981 | 0.06026 | 0.07586 | 30.00 | PASS |
| Mid | 5200 | 16.30 | 18.00 | 18.80 | 0.04266 | 0.06310 | 0.07586 | | PASS |
| High | 5240 | 16.70 | 18.60 | 18.70 | 0.04677 | 0.07244 | 0.07413 | | PASS |

IEEE 802.11a mode / 5745 ~ 5825MHz

| Channel | Frequency (MHz) | AVG Output Power (dBm) | | | AVG Output Power (W) | | | Limit (dBm) | Result |
|---------|-----------------|------------------------|-----------|-----------|----------------------|-----------|-----------|-------------|--------|
| | | Antenna 0 | Antenna 1 | Antenna 2 | Antenna 0 | Antenna 1 | Antenna 2 | | |
| Low | 5745 | 18.00 | 15.50 | 14.10 | 0.06310 | 0.03548 | 0.02570 | 30.00 | PASS |
| Mid | 5785 | 17.80 | 16.20 | 14.60 | 0.06026 | 0.04169 | 0.02884 | | PASS |
| High | 5825 | 17.60 | 15.80 | 15.30 | 0.05754 | 0.03802 | 0.03388 | | PASS |

IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz

| Channel | Frequency (MHz) | AVG Output Power (dBm) | | | | AVG Output Power (W) | Limit (dBm) | Result |
|---------|-----------------|------------------------|-----------|-----------|-------|----------------------|-------------|--------|
| | | Antenna 0 | Antenna 1 | Antenna 2 | Total | | | |
| Low | 5180 | 10.00 | 12.40 | 11.20 | 16.08 | 0.04056 | 30.00 | PASS |
| Mid | 5200 | 10.40 | 11.90 | 11.50 | 16.08 | 0.04058 | | PASS |
| High | 5240 | 10.50 | 12.50 | 11.30 | 16.28 | 0.04249 | | PASS |

IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz

| Channel | Frequency (MHz) | AVG Output Power (dBm) | | | | AVG Output Power (W) | Limit (dBm) | Result |
|---------|-----------------|------------------------|-----------|-----------|-------|----------------------|-------------|--------|
| | | Antenna 0 | Antenna 1 | Antenna 2 | Total | | | |
| Low | 5745 | 12.70 | 11.10 | 10.30 | 16.26 | 0.04222 | 30.00 | PASS |
| Mid | 5785 | 13.10 | 10.50 | 11.10 | 16.49 | 0.04452 | | PASS |
| High | 5825 | 12.40 | 10.20 | 11.50 | 16.23 | 0.04197 | | PASS |

**IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz**

| Channel | Frequency (MHz) | AVG Output Power (dBm) | | | | AVG Output Power (W) | Limit (dBm) | Result |
|---------|-----------------|------------------------|-----------|-----------|-------|----------------------|-------------|--------|
| | | Antenna 0 | Antenna 1 | Antenna 2 | Total | | | |
| Low | 5190 | 9.80 | 11.40 | 10.90 | 15.52 | 0.03566 | 30.00 | PASS |
| High | 5230 | 10.30 | 11.90 | 11.20 | 15.95 | 0.03939 | | PASS |

IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz

| Channel | Frequency (MHz) | AVG Output Power (dBm) | | | | AVG Output Power (W) | Limit (dBm) | Result |
|---------|-----------------|------------------------|-----------|-----------|-------|----------------------|-------------|--------|
| | | Antenna 0 | Antenna 1 | Antenna 2 | Total | | | |
| Low | 5755 | 12.50 | 10.10 | 10.10 | 15.83 | 0.03825 | 30.00 | PASS |
| High | 5795 | 12.50 | 10.00 | 10.80 | 16.00 | 0.03981 | | PASS |

IEEE 802.11ac 80 mode / 5210MHz

| Channel | Frequency (MHz) | AVG Output Power (dBm) | | | | AVG Output Power (W) | Limit (dBm) | Result |
|---------|-----------------|------------------------|-----------|-----------|-------|----------------------|-------------|--------|
| | | Antenna 0 | Antenna 1 | Antenna 2 | Total | | | |
| | 5210 | 14.80 | 14.80 | 14.90 | 19.60 | 0.09130 | 30.00 | PASS |

IEEE 802.11ac 80 mode / 5775MHz

| Channel | Frequency (MHz) | AVG Output Power (dBm) | | | | AVG Output Power (W) | Limit (dBm) | Result |
|---------|-----------------|------------------------|----------|-----------|-------|----------------------|-------------|--------|
| | | Antenna 0 | Antenna1 | Antenna 2 | Total | | | |
| | 5775 | 14.50 | 14.60 | 14.60 | 17.56 | 0.05702 | 30.00 | PASS |



6.5 BAND EDGES MEASUREMENT

6.5.1 LIMIT

According to §15.407(b)

- (1) The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.
- (2) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency block edges as the design of the equipment permits.

6.5.2 MEASUREMENT EQUIPMENT USED

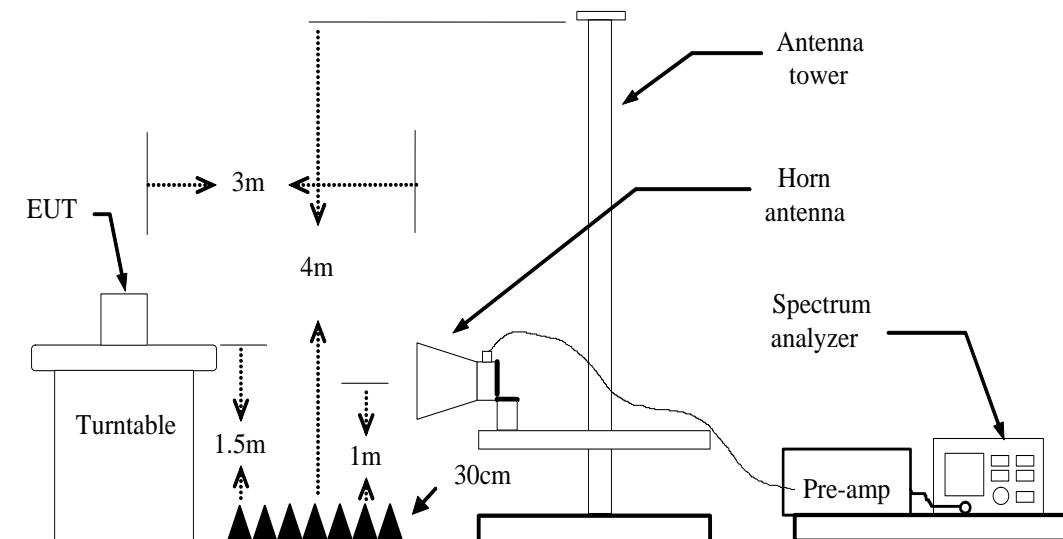
| Radiated Emission Test Site 966(2) | | | | | |
|------------------------------------|----------------|--------------------|---------------|------------------|-----------------|
| Name of Equipment | Manufacturer | Model Number | Serial Number | Last Calibration | Due Calibration |
| PSA Series Spectrum Analyzer | Agilent | N9010A | MY52221469 | 02/21/2017 | 02/20/2018 |
| EMI TEST RECEIVER | ROHDE&SCHWARZ | ESCI | 100783 | 02/21/2017 | 02/20/2018 |
| Amplifier | EMEC | EM330 | 060661 | 03/18/2017 | 03/17/2018 |
| High Noise Amplifier | Agilent | 8449B | 3008A01838 | 02/21/2017 | 02/20/2018 |
| Loop Antenna | COM-POWER | AL-130 | 121044 | 09/25/2016 | 09/24/2017 |
| Bilog Antenna | SCHAFFNER | CBL6143 | 5082 | 02/21/2017 | 02/20/2018 |
| Horn Antenna | SCHWARZBECK | BBHA9120 | D286 | 02/28/2017 | 02/27/2018 |
| Board-Band Horn Antenna | Schwarzbeck | BBHA 9170 | 9170-497 | 02/28/2017 | 02/27/2018 |
| Turn Table | N/A | N/A | N/A | N.C.R | N.C.R |
| Antenna Tower | SUNOL | TLT2 | N/A | N.C.R | N.C.R |
| Controller | Sunol Sciences | SC104V | 022310-1 | N.C.R | N.C.R |
| Controller | CT | N/A | N/A | N.C.R | N.C.R |
| Temp. / Humidity Meter | Anymetre | JR913 | N/A | 02/21/2017 | 02/20/2018 |
| Test S/W | FARAD | LZ-RF / CCS-SZ-3A2 | | | |

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The FCC Site Registration number is 101879.

3. N.C.R = No Calibration Required.

6.5.3 TEST CONFIGURATION



6.5.4 TEST PROCEDURE

1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1 / VBW=3MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO / Detector=Peak
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.



6.5.5 TEST RESULT

Antenna 0

IEEE 802.11a mode / 5745 ~ 5825MHz

1. Operating Frequency: 5745-5825MHz
2. CH Low: 5745MHz, CH High: 5825MHz
3. 26dB bandwidth: CH Low: 21.79MHz, CH High: 22.28MHz
4. Frequency Range: 5734.105MHz, 5836.140MHz

Antenna 1

IEEE 802.11a mode / 5745 ~ 5825MHz

1. Operating Frequency: 5745-5825MHz
2. CH Low: 5745MHz, CH High: 5825MHz
3. 26dB bandwidth: CH Low: 22.15MHz, CH High: 22.65MHz
4. Frequency Range: 5733.925MHz, 5836.325MHz

Antenna 2

IEEE 802.11a mode / 5745 ~ 5825MHz

1. Operating Frequency: 5745-5825MHz
2. CH Low: 5745MHz, CH High: 5825MHz
3. 26dB bandwidth: CH Low: 21.94MHz, CH High: 22.25MHz
4. Frequency Range: 5734.030MHz, 5836.125MHz

Antenna 0

IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz

1. Operating Frequency: 5745-5825MHz
2. CH Low: 5745MHz, CH High: 5825MHz
3. 26dB bandwidth: CH Low: 23.11MHz, CH High: 23.72MHz
4. Frequency Range: 5733.445MHz, 5836.860MHz

Antenna 1

IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz

1. Operating Frequency: 5745-5825MHz
2. CH Low: 5745MHz, CH High: 5825MHz
3. 26dB bandwidth: CH Low: 22.90MHz, CH High: 22.43MHz
4. Frequency Range: 5733.550MHz, 5836.215MHz

Antenna 2

IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz

1. Operating Frequency: 5745-5825MHz
2. CH Low: 5745MHz, CH High: 5825MHz
3. 26dB bandwidth: CH Low: 23.30MHz, CH High: 22.97MHz
4. Frequency Range: 5733.350MHz, 5836.485MHz



Antenna 0

IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz

1. Operating Frequency: 5755-5795MHz
2. CH Low: 5755MHz, CH High: 5795MHz
3. 26dB bandwidth: CH Low: 44.14MHz, CH High: 43.89MHz
4. Frequency Range: 5732.930MHz, 5816.945MHz

Antenna 1

IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz

1. Operating Frequency: 5755-5795MHz
2. CH Low: 5755MHz, CH High: 5795MHz
3. 26dB bandwidth: CH Low: 44.50MHz, CH High: 45.23MHz
4. Frequency Range: 5732.750MHz, 5817.615MHz

Antenna 2

IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz

1. Operating Frequency: 5755-5795MHz
2. CH Low: 5755MHz, CH High: 5795MHz
3. 26dB bandwidth: CH Low: 44.40MHz, CH High: 44.94MHz
4. Frequency Range: 5732.800MHz, 5817.470MHz

Antenna 0

Test mode: IEEE 802.11ac 80 mode / 5775MHz

1. Operating Frequency: 5775MHz
2. CH: 5775MHz
3. 26dB bandwidth: CH: 90.42MHz
4. Frequency Range: 5729.790MHz, 5820.210MHz

Antenna 1

Test mode: IEEE 802.11ac 80 mode / 5775MHz

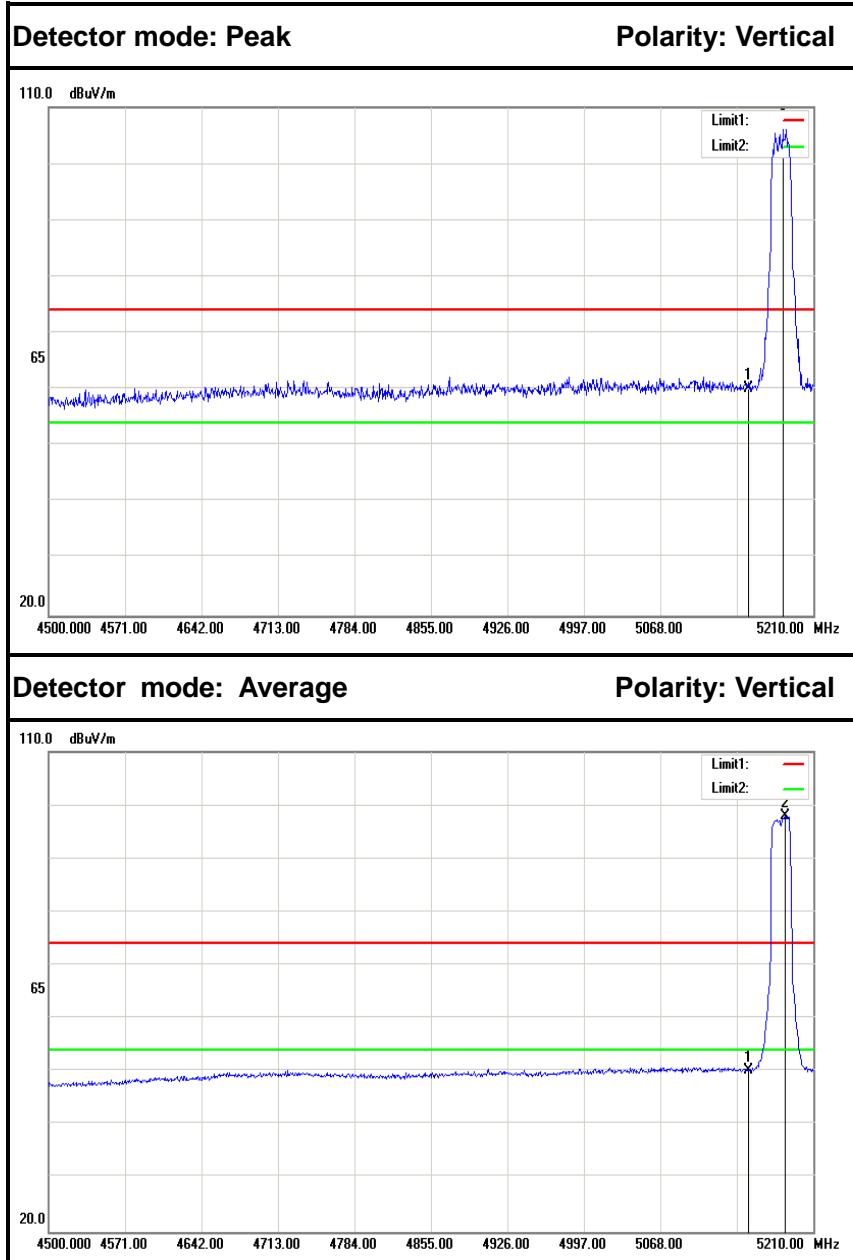
1. Operating Frequency: 5775MHz
2. CH: 5775MHz
3. 26dB bandwidth: CH: 91.36MHz
4. Frequency Range: 5729.32MHz, 5820.680MHz

Antenna 2

Test mode: IEEE 802.11ac 80 mode / 5775MHz

1. Operating Frequency: 5775MHz
2. CH: 5775MHz
3. 26dB bandwidth: CH: 91.32MHz
4. Frequency Range: 5729.340MHz, 5820.66MHz

Because the mentioned conditions the the Fundamental Frequency Range was far away from the Restricted bands in the table published in 15.205, the test is not applicable.

**Test Plot****Antenna 0****IEEE 802.11a mode / 5180MHz**

| No. | Frequency (MHz) | Reading (dB) | Factor (dB/m) | Result (dB/m) | Limit (dB/m) | Margin (dB) | Remark | Antenna Polar |
|-----|-----------------|--------------|---------------|---------------|--------------|-------------|---------|---------------|
| 1. | 5150.000 | 54.90 | 5.25 | 60.15 | 74.00 | -13.85 | Peak | Vertical |
| 2. | 5181.600 | 100.72 | 5.30 | 106.02 | --- | --- | Peak | Vertical |
| 1. | 5150.000 | 44.99 | 5.25 | 50.24 | 54.00 | -3.76 | Average | Vertical |
| 2. | 5183.730 | 92.65 | 5.31 | 97.96 | --- | --- | Average | Vertical |