



FCC 47 CFR PART 15 SUBPART E

for

1200M MultiService In-Wall Access Point

Model: ASW120

Brand: Axilspot

Test Report Number:

C170428Z01-RP1-2

Issued Date: June 23, 2017

Issued for

Axilspot Communication Co., Ltd.

**A302 Han's Innovation Building, No.9018 beihuan Ave, Nanshan District,
Shenzhen, China**

Issued by:

Compliance Certification Services (Shenzhen) Inc.

No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd.,
Guan Lan Town, Baoan District, Shenzhen, China

TEL: 86-755-28055000

FAX: 86-755-28055221

E-Mail: service@ccssz.com



中国认可
国际互认
检测
TESTING
CNAS L4818



Certificate Number: 2861.01

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc. This document may be altered or revised by Compliance Certification Services (Shenzhen) Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The TEST RESULTS in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	June 23, 2017	Initial Issue	ALL	Amzula Chen



TABLE OF CONTENTS

1. TEST CERTIFICATION	4
2. EUT DESCRIPTION	5
3. TEST METHODOLOGY.....	8
3.1 EUT CONFIGURATION.....	8
3.2 EUT EXERCISE	8
3.3 GENERAL TEST PROCEDURES	8
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	9
3.5 DESCRIPTION OF TEST MODES	10
4. SETUP OF EQUIPMENT UNDER TEST	11
4.1 DESCRIPTION OF SUPPORT UNITS.....	11
4.2 CONFIGURATION OF SYSTEM UNDER TEST	11
5. FACILITIES AND ACCREDITATIONS	12
5.1 FACILITIES	12
5.2 EQUIPMENT	12
5.3 ACCREDITATIONS	12
5.4 MEASUREMENT UNCERTAINTY.....	13
6. FCC PART 15 REQUIREMENTS	14
6.1 26dB EMISSION BANDWIDTH	14
6.2 6dB BANDWIDTH MEASUREMENT	25
6.3 ANTENNA GAIN	27
6.4 PEAK POWER	38
6.5 BAND EDGES MEASUREMENT	43
6.6 PEAK POWER SPECTRAL DENSITY	65
6.7 RADIATED UNDESIRABLE EMISSION.....	88
6.8 CONDUCTED UNDESIRABLE EMISSION	123
6.9 POWERLINE CONDUCTED EMISSIONS.....	135
6.10 FREQUENCY STABILITY.....	141



1. TEST CERTIFICATION

Product	1200M MultiService In-Wall Access Point
Model	ASW120
Brand	Axilspot
Tested	April 28~June 22, 2017
Applicant	Axilspot Communication Co., Ltd. A302 Han's Innovation Building, No.9018 beihuan Ave, Nanshan District, Shenzhen, China
Manufacturer	Axilspot Communication Co., Ltd. A302 Han's Innovation Building, No.9018 beihuan Ave, Nanshan District, Shenzhen, China

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart E	No non-compliance noted

We hereby certify that:

Compliance Certification Services (Shenzhen) Inc. tested the above equipment. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.10: 2013** and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.407、FCC 14-30.

The TEST RESULTS of this report relate only to the tested sample identified in this report.

Approved by:

Sunday Hu
Supervisor of EMC Dept.
Compliance Certification Services (Shenzhen) Inc.

Reviewed by:

Ruby Zhang
Supervisor of Report Dept.
Compliance Certification Services (Shenzhen) Inc.



2. EUT DESCRIPTION

Product	1200M MultiService In-Wall Access Point
Model Number	ASW120
Brand	Axilspot
Model Discrepancy	N/A
Serial Number	C170428Z01-RP1-2
Received Date	April 28, 2017
Power Supply	DC48V power supply by POE or DC48V power supply by adapter
Frequency Range	UNII Band I: IEEE 802.11a, 802.11n HT20 : 5180MHz ~ 5240MHz; IEEE 802.11n HT40: 5190MHz ~ 5230MHz IEEE 802.11ac 80: 5210MHz UNII Band IV IEEE 802.11a, 802.11n HT20 : 5745MHz ~ 5825MHz IEEE 802.11n HT40: 5755MHz ~ 5795MHz IEEE 802.11ac 80: 5775MHz
Transmit Power	UNII Band I: IEEE 802.11a: 15.40dBm (Antenna 0) 16.20dBm (Antenna 1) IEEE 802.11n HT 20 MHz mode: 18.33dBm (Combine with Antenna 0 and Antenna 1) IEEE 802.11n HT 40 MHz mode: 18.31dBm (Combine with Antenna 0 and Antenna 1) IEEE 802.11ac 80: 19.36dBm (Combine with Antenna 0 and Antenna 1) UNII Band IV IEEE 802.11a: 21.10dBm (Antenna 0) 16.10dBm (Antenna 1) IEEE 802.11n HT 20 MHz mode: 21.60dBm (Combine with Antenna 0 and Antenna 1) IEEE 802.11n HT 40 MHz mode: 23.96dBm (Combine with Antenna 0 and Antenna 1) IEEE 802.11ac 80: 21.37dBm (Combine with Antenna 0 and Antenna 1)
Modulation Technique	OFDM (QPSK, BPSK, 16-QAM, 64-QAM, 256-QAM)
Transmit Data Rate	867Mbps
Number of Channels	UNII Band I: IEEE 802.11a, 802.11n HT20 : 4 Channels IEEE 802.11n HT40 : 2 Channels IEEE 802.11ac 80: 1 Channel UNII Band IV IEEE 802.11a, 802.11n HT20 : 5 Channels IEEE 802.11n HT 40 MHz mode: 2 Channels IEEE 802.11ac 80: 1 Channel
Antenna Specification	Internal Antenna with 4dBi gain (Max)
Channels Spacing	IEEE 802.11a, 802.11n HT20 : 20MHz IEEE 802.11n HT40: 40MHz IEEE 802.11ac 80: 80MHz
Temperature Range	-10°C ~55°C



Hardware Version	V1.0
Software Version	V2.1.0

Note: 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

**Operation Frequency:**

UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII)	
CHANNEL	MHz
36	5180
38	5190
40	5200
42	5210
44	5220
46	5230
48	5240
149	5745
151	5755
153	5765
155	5775
157	5785
159	5795
161	5805
165	5825

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: 2AKIQ-ASW120 filing to comply with Section 15.407 of the FCC Part 15, Subpart E Rules and FCC 14-30.



3. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10. Radiated testing was performed at an antenna to EUT distance 3 meters.

The tests documented in this report were performed in accordance with ANSI C63.10: 2013 and FCC CFR 47 Part 15.207, 15.209, 15.407 and FCC 14-30.

Radio testing was performed according to KDB DA 02-2138, KDB 789033 D02, KDB 905462 D06;

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed for RF field strength measurement to meet the Commissions requirement, and is operated in a manner intended to generate the maximum emission in a continuous normal application.

3.2 EUT EXERCISE

The EUT run Atheros Radio Test 2(ART2-GUI) software (or file) and operated in the engineering mode to fix the TX frequency for the purposes of measurement.

According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is positioned at 0.8 m above the ground plane. According to the requirements in Section 6.2 of ANSI C63.10, the conducted emission from the EUT is measured in the frequency range between 0.15 MHz and 30MHz, using the CISPR Quasi-Peak detector mode.

Radiated Emissions

The EUT is placed on the turntable, which is 0.8 m (below 1GHz) /1.5m (Above 1GHz) above the ground plane. The turntable is then rotated for 360 degrees to determine the proper orientation for the maximum emission level. The EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission level. And, each emission is to be maximized by changing the horizontal and vertical polarization of the receiving antenna. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.4 to Section 6.6 of ANSI C63.10.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT is a 2x2 configuration spatial MIMO (2TX & 2RX) with beam forming function. Software used to control the EUT for staying in continuous transmitting mode was programmed.

Test Item	Test mode	Worse mode
Conducted Emission	Mode 1: 1000Mbps 10% POE Adapter	<input type="checkbox"/>
	Mode 2: 1000Mbps 10% DC Adapter(AC 120V/60Hz)	<input checked="" type="checkbox"/>
	Mode 3: 1000Mbps 10% DC Adapter(AC 240V/50Hz)	<input checked="" type="checkbox"/>
Radiated Emission	Mode 1: Continuously TX	<input checked="" type="checkbox"/>

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.

UNII Band I:

IEEE 802.11a for 5180 ~ 5240MHz:

Channel Low (5180MHz), Channel Mid (5200MHz) and Channel High (5240MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT 20 MHz for 5180 ~ 5240MHz:

Channel Low (5180MHz), Channel Mid (5200MHz) and Channel High (5240MHz) with 13Mbps data rate were chosen for full testing.

IEEE 802.11n HT 40 MHz Channel for 5190 ~ 5230MHz:

Channel Low (5190MHz) and Channel High (5230MHz) with 27Mbps data rate were chosen for full testing.

IEEE 802.11ac 80 Channel for 5210MHz:

Channel Low (5210MHz) with 27Mbps data rate were chosen for full testing.

UNII Band IV:

IEEE 802.11a for 5745 ~ 5825MHz:

Channel Low (5745MHz), Channel Mid (5785MHz) and Channel High (5825MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT 20 MHz for 5745 ~ 5825MHz:

Channel Low (5745MHz), Channel Mid (5785MHz) and Channel High (5825MHz) with 13Mbps data rate were chosen for full testing.

IEEE 802.11n HT 40 MHz Channel for 5755~ 5795MHz:

Channel Low (5755MHz) and Channel High (5795MHz) with 27Mbps data rate were chosen for full testing.

IEEE 802.11ac 80 Channel for 5775MHz:

Channel Low (5775MHz) with 27Mbps data rate were chosen for full testing.



4. SETUP OF EQUIPMENT UNDER TEST

4.1 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model No.	Serial No.	FCC ID	Brand	Data Cable	Power Cord
1	POE Adapter	PD-7001G	AP-PSBIAS-1P 3-AFR	DoC	Motorrola	Unshielded 1.50m (RJ45 Cable)	Unshielded 1.50m (AC Cable)
2	DC Adapter	GP306A-480-100	N/A	DoC	GOSPO WER	N/A	Unshielded 1560m (AC Cable) Unshielded 1.20m (DC Cable)
3	Notebook 1#	TMP246M-MG-52 UB	N/A	DoC	ACER	Unshielded 12.00m (RJ45 Cable)	Unshielded 1.50m (AC Cable) Unshielded 1.70m (DC Cable)
4	Notebook 2#	X270	N/A	DoC	Lenovo	Unshielded 12.00m (RJ45 Cable)	Unshielded 1.20m (AC Cable) Unshielded 1.50m (DC Cable)
5	Disk	WDBACY3201AB K-PESN	WX61ABOU80 31	DoC	WD	Shielded 0.50m	N/A
6	Access Point	ASW120	N/A	DoC	Axilspot	Unshielded 1.00m (RJ45 Cable)	Unshielded 1.00m (RJ45 Cable)

Note:

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.2 CONFIGURATION OF SYSTEM UNDER TEST

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at
**No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd., Guan Lan Town,
Baoan District, Shenzhen, China**

The sites are constructed in conformance with the requirements of ANSI C63.10, ANSI C63.7 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA	A2LA
China	CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA	FCC
Japan	VCCI(C-4815, R-4320, T-2317, G-10624)
Canada	INDUSTRY CANADA

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.cssz.com>



5.4 MEASUREMENT UNCERTAINTY

Parameter	Uncertainty
RF frequency	+/- 1 * 10-5
RF power conducted	+/- 1,5 dB
RF power radiated	+/- 6 dB
Spurious emissions, conducted	+/- 3 dB
Spurious emissions, radiated	+/- 6 dB
Humidity	+/- 5 %
Temperature	+/- 1°C
Time	+/-10 %

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



6. FCC PART 15 REQUIREMENTS

6.1 26dB EMISSION BANDWIDTH

6.1.1 LIMIT

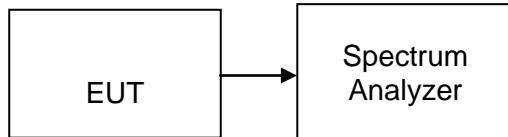
According to §15.403(c), for purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Compliance with the emissions limits is based on the use of measurement instrumentation employing a peak detector function with an instrument resolutions bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

6.1.2 MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY52221469	02/21/2017	02/20/2018

Remark: Each piece of equipment is scheduled for calibration once a year.

6.1.3 TEST CONFIGURATION



6.1.4 TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low-loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW > 1%EBW, VBW > RBW, Span >26dB bandwidth, Detector = Peak, and Sweep = auto.
4. Mark the peak frequency and -26dB (upper and lower) frequency.
5. Repeat until all the rest channels were investigated.



6.1.5 TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11a mode / 5180 ~ 5240MHz

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)	
		Antenna 0	Antenna 1
Low	5180	19.79	20.01
Mid	5200	20.05	19.70
High	5240	19.60	19.92

Test mode: IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)	
		Antenna 0	Antenna 1
Low	5180	20.55	20.60
Mid	5200	20.67	20.50
High	5240	20.67	20.51

Test mode: IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)	
		Antenna 0	Antenna 1
Low	5980	40.11	40.06
High	5220	39.90	40.02

Test mode: IEEE 802.11ac 80 mode / 5210MHz

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)	
		Antenna 0	Antenna 1
	5210	83.82	83.51




Test Plot


Antenna 0



IEEE 802.11a mode / 5180 ~ 5240MHz


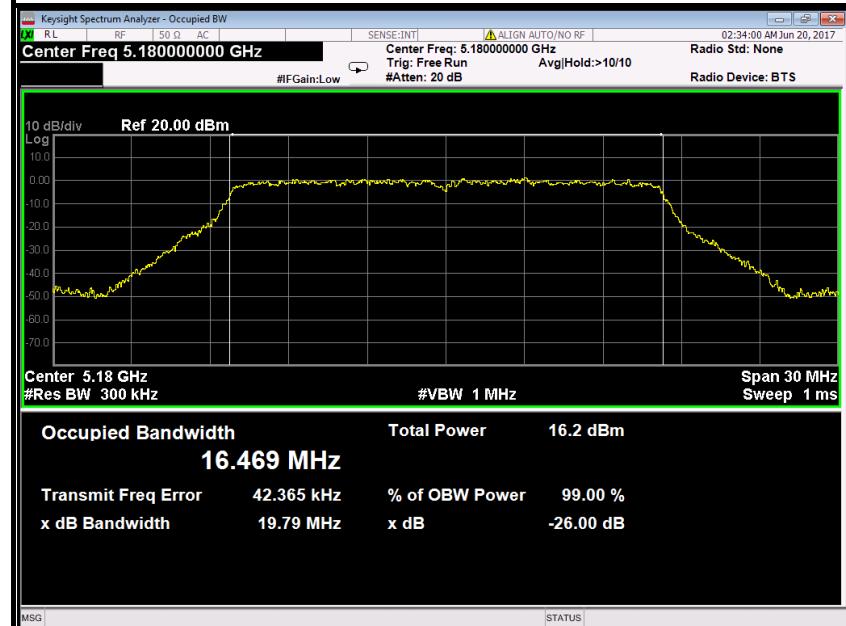
26dB Bandwidth (CH Low)







26dB Bandwidth (CH Mid)


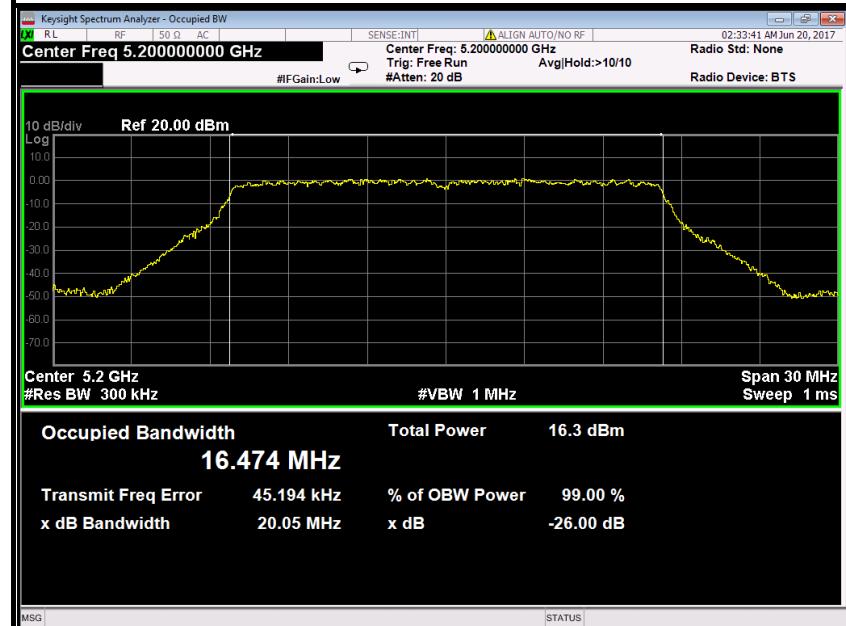


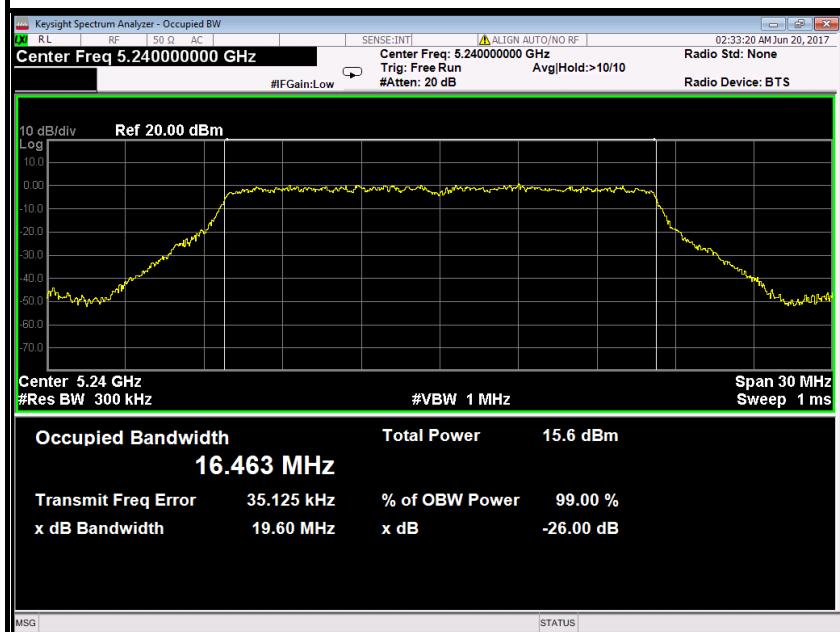
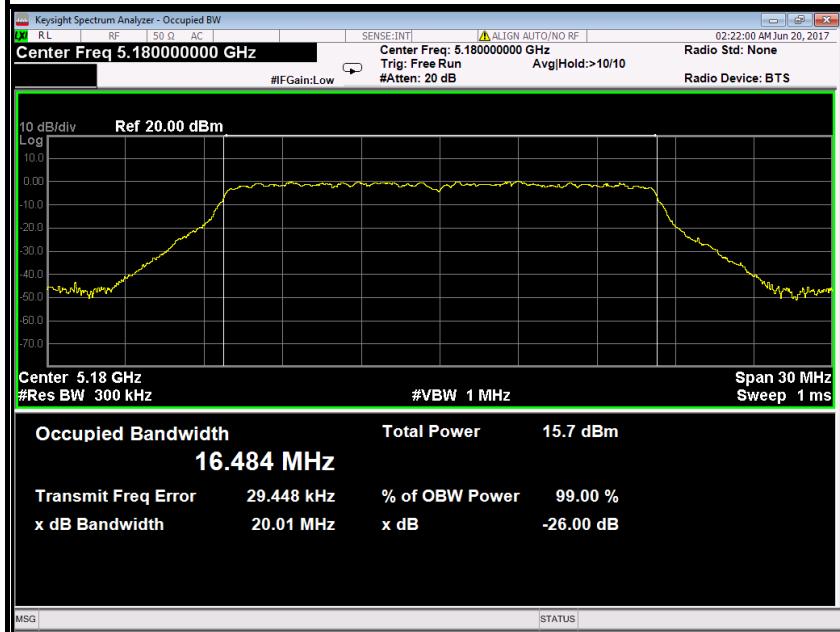
**26dB Bandwidth (CH High)****Antenna 1****IEEE 802.11a mode / 5180 ~ 5240MHz****26dB Bandwidth (CH Low)**

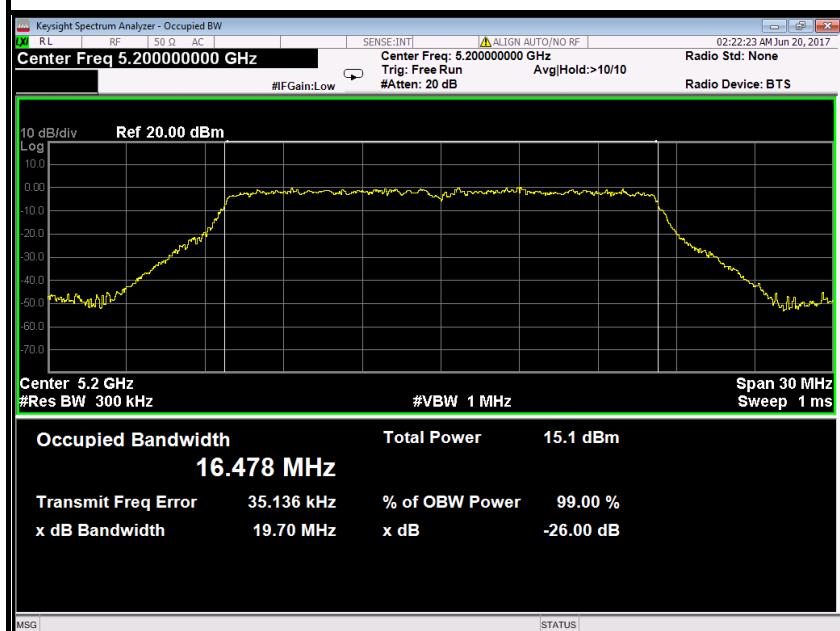
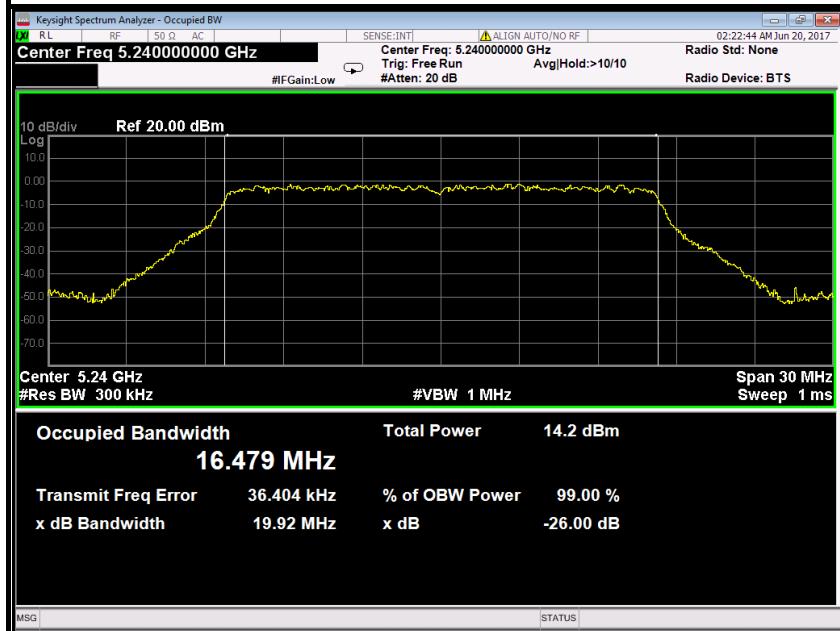
**26dB Bandwidth (CH Mid)****26dB Bandwidth (CH High)**

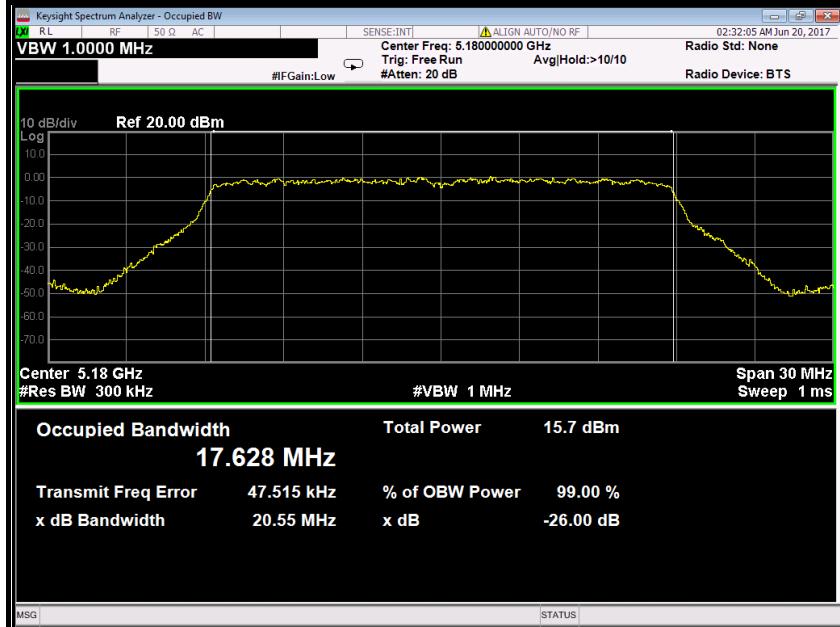
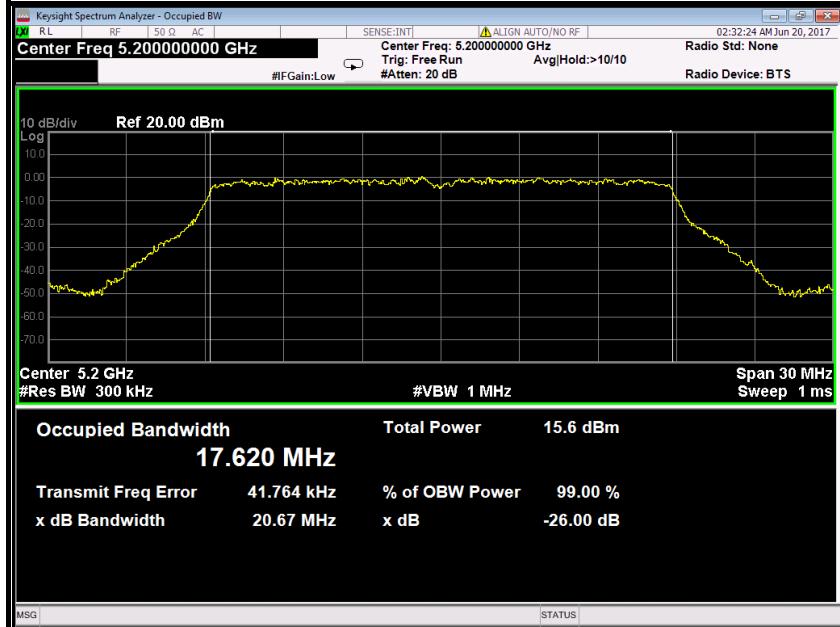
**Antenna 0****IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz****26dB Bandwidth (CH Low)****26dB Bandwidth (CH Mid)**

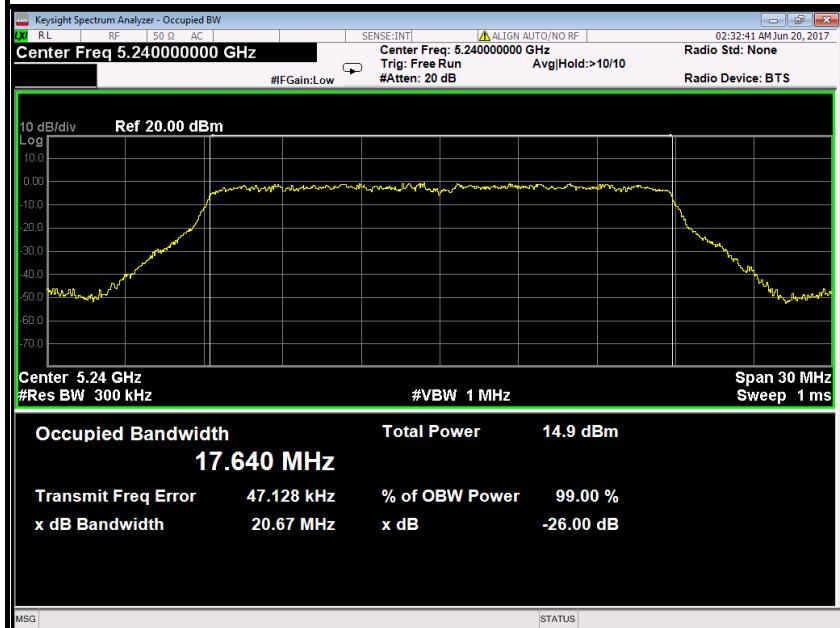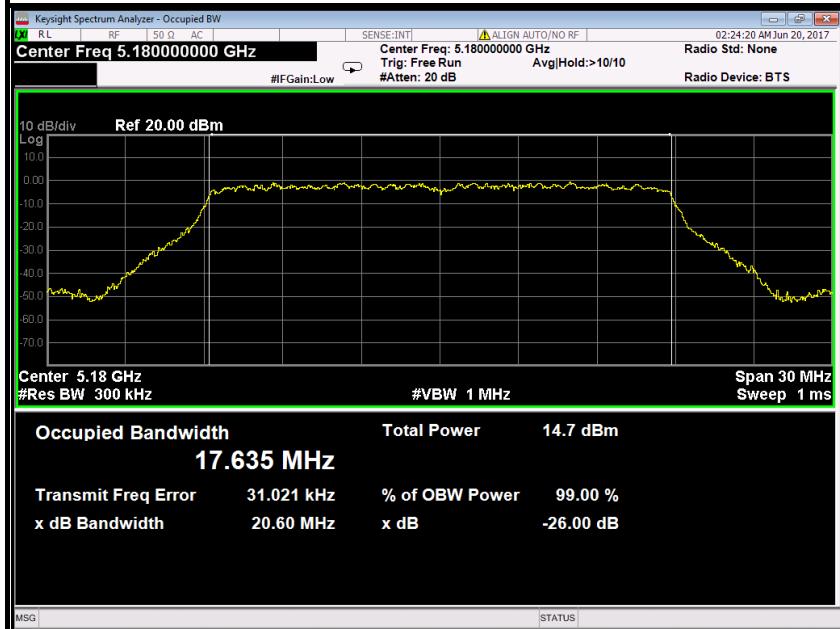**26dB Bandwidth (CH High)****Antenna 1****IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz****26dB Bandwidth (CH Low)**

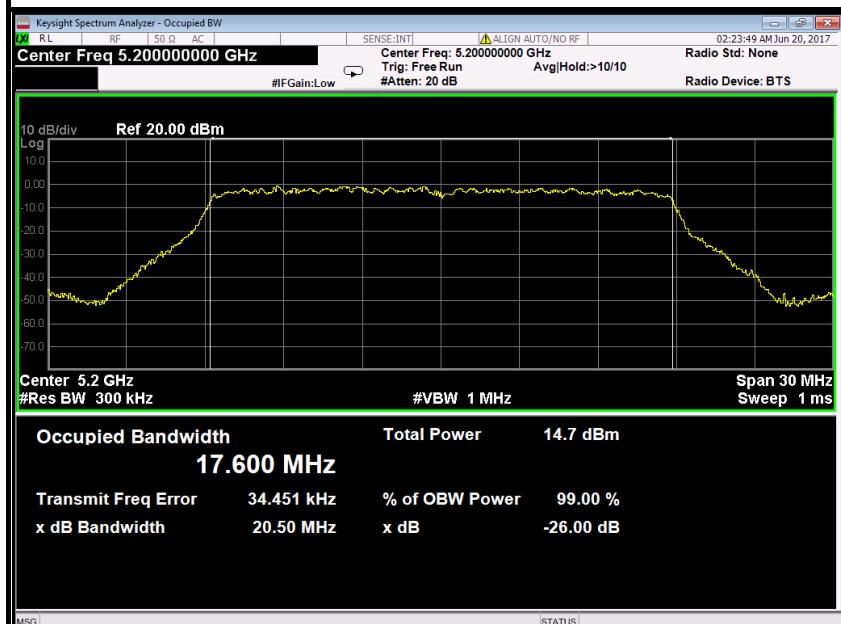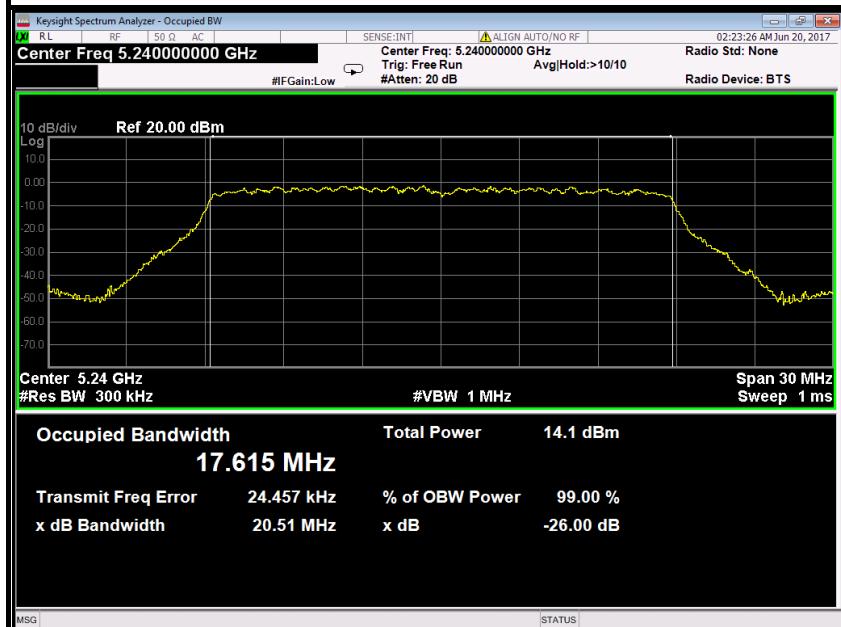**26dB Bandwidth (CH Mid)****26dB Bandwidth (CH High)**

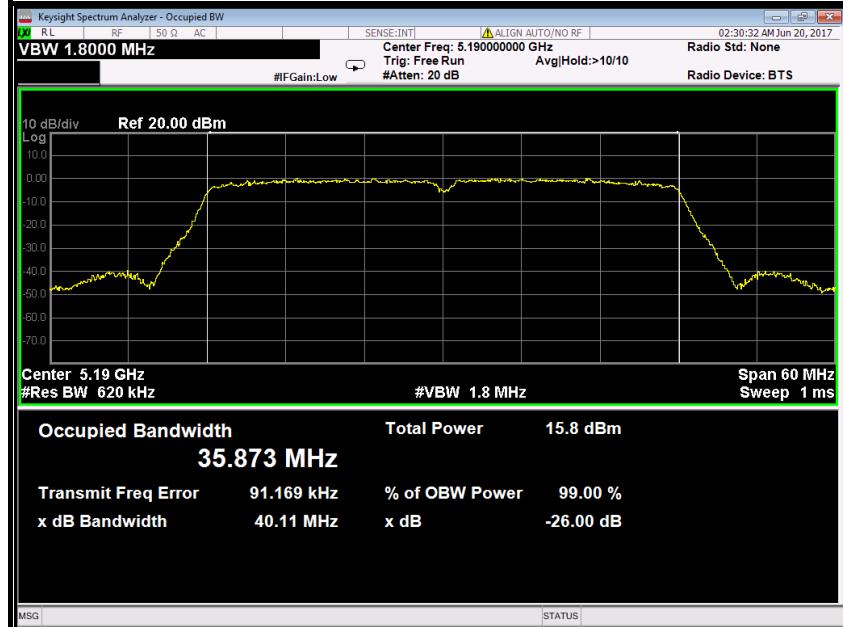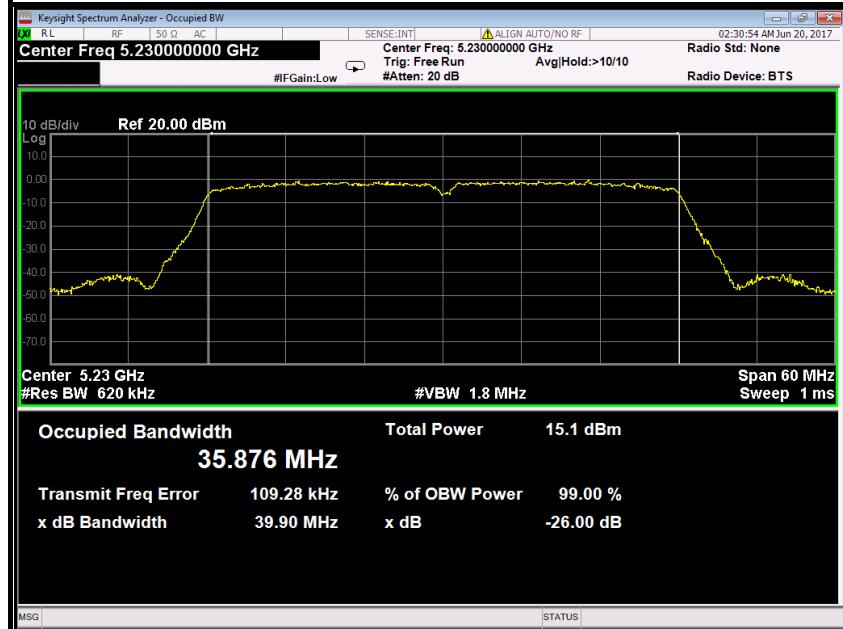**Antenna 0****IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz****26dB Bandwidth (CH Low)****26dB Bandwidth (CH High)**

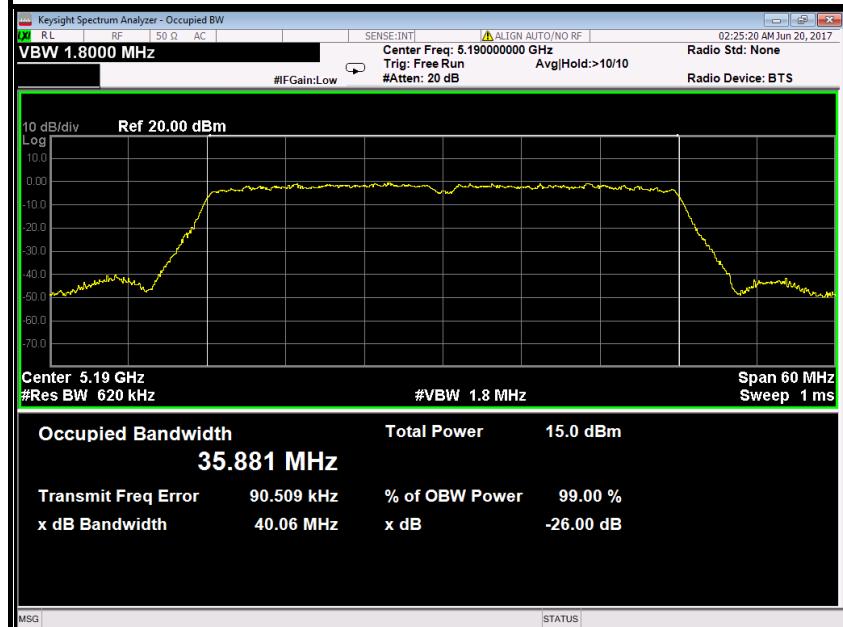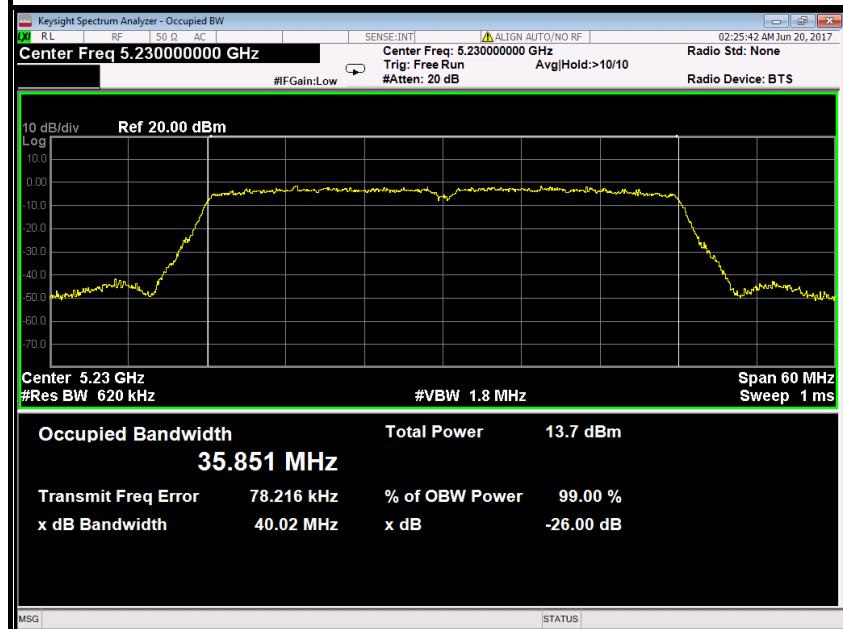**Antenna 1****IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz****26dB Bandwidth (CH Low)****26dB Bandwidth (CH High)**

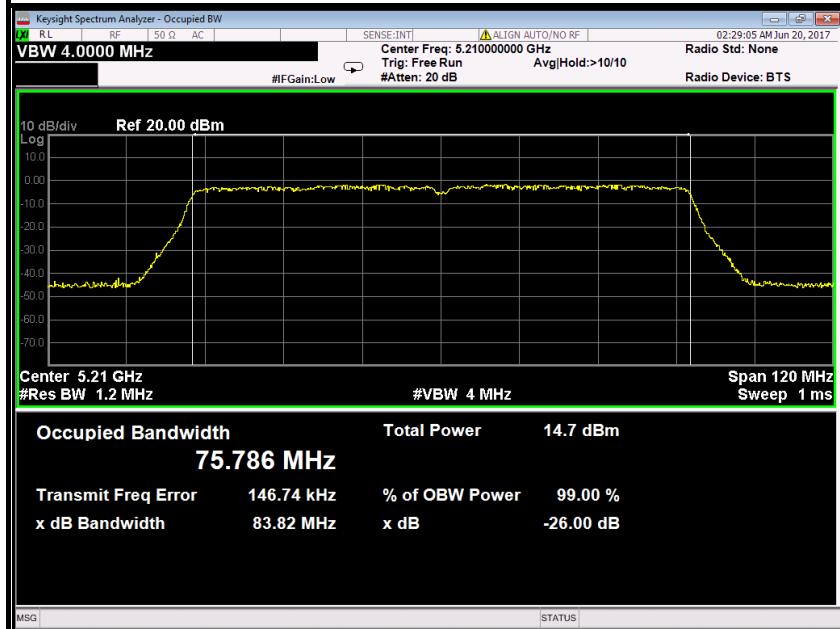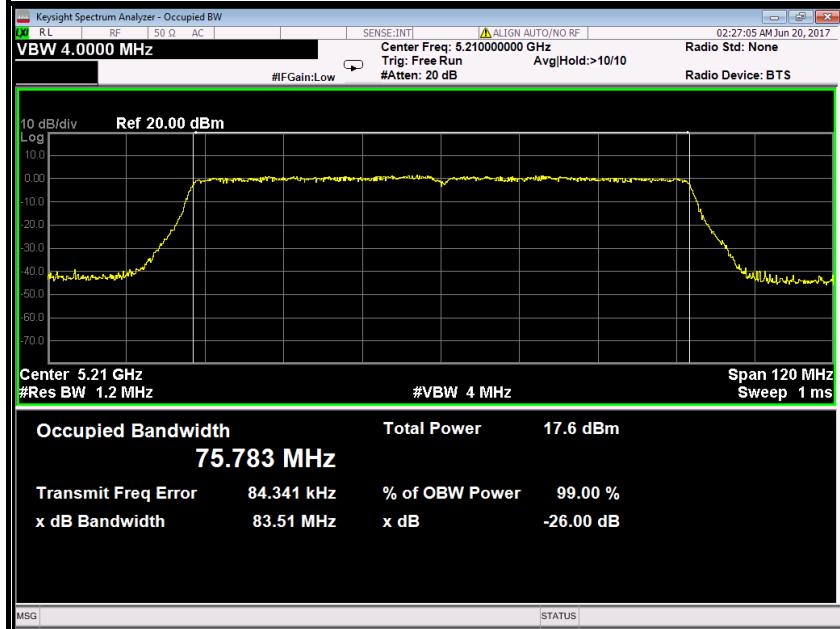**Antenna 0****IEEE 802.11ac 80 mode / 5210MHz****26dB Bandwidth****Antenna 1****IEEE 802.11ac 80 mode / 5210MHz****26dB Bandwidth**



6.2 6dB BANDWIDTH MEASUREMENT

6.2.1 LIMITS

According to §15.407(e), Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

6.2.2 TEST INSTRUMENTS


Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	N9010A	MY52221469	02/21/2017	02/20/2018

6.2.3 TEST PROCEDURES (please refer to measurement standard)

8.2 Option 2:

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW \geq 3 RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be \geq 6 dB.

6.2.4 TEST SETUP





6.2.5 TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11a mode / 5745 ~ 5825MHz

Channel	Frequency (MHz)	6dB Bandwidth(B) (MHz)		Limit (kHz)	Test Result
		Antenna 0	Antenna 1		
Low	5745	16.07	16.32	>500	PASS
Mid	5785	16.33	16.31		PASS
High	5825	16.32	16.31		PASS

Test mode: IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz

Channel	Frequency (MHz)	6dB Bandwidth(B) (MHz)		Limit (kHz)	Test Result
		Antenna 0	Antenna 1		
Low	5745	16.52	16.56	>500	PASS
Mid	5785	17.17	17.17		PASS
High	5825	16.57	17.17		PASS

Test mode: IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz

Channel	Frequency (MHz)	6dB Bandwidth(B) (MHz)		Limit (kHz)	Test Result
		Antenna 0	Antenna 1		
Low	5755	35.09	35.06	>500	PASS
High	5795	35.13	33.86		PASS


Test mode: IEEE 802.11ac 80 mode / 5775MHz



Channel	Frequency (MHz)	6dB Bandwidth(B) (MHz)		Limit (kHz)	Test Result
		Antenna 0	Antenna 1		
	5755	75.84	75.50	>500	PASS







Test Plot

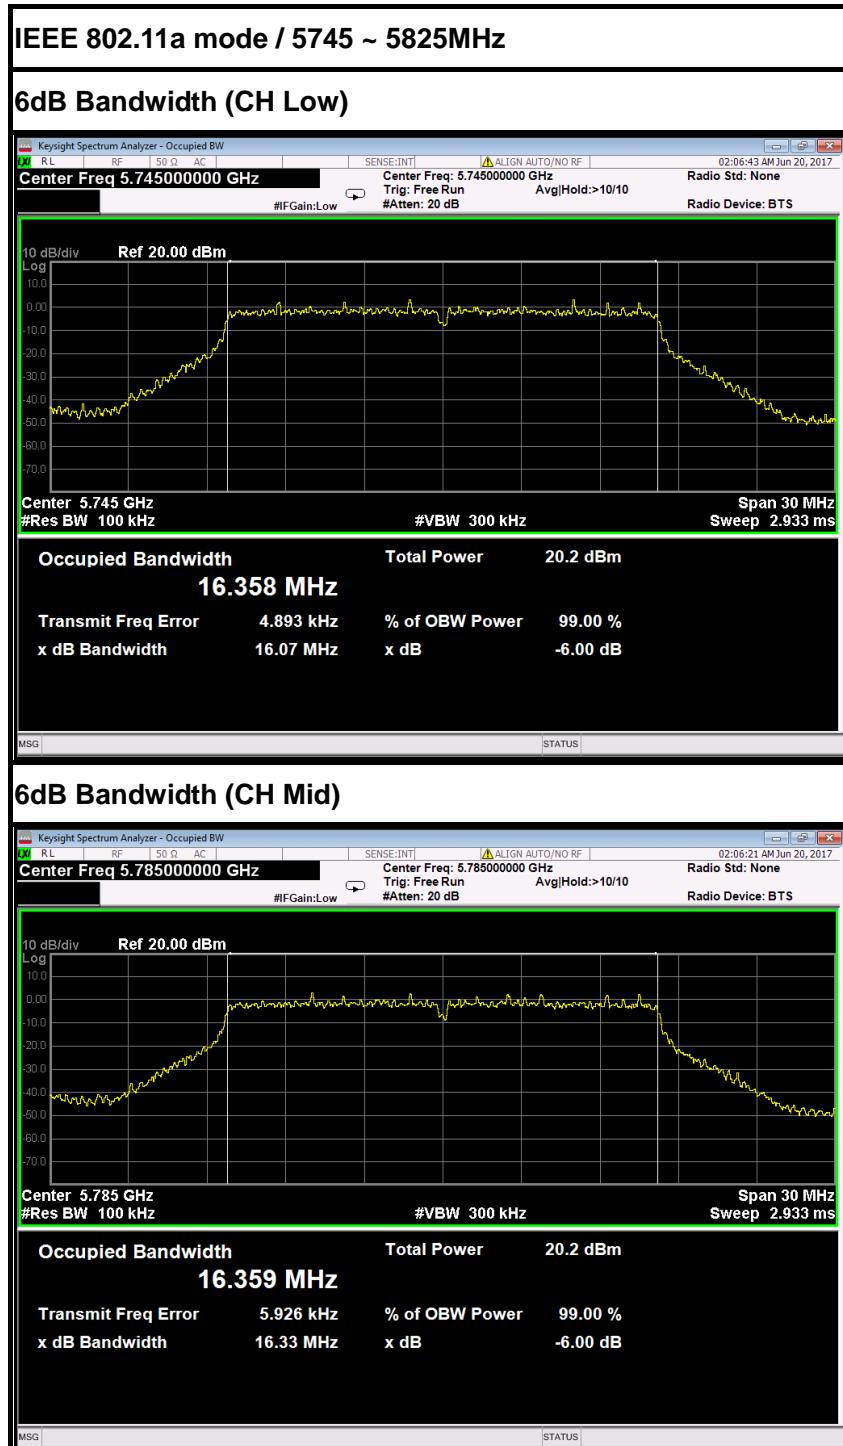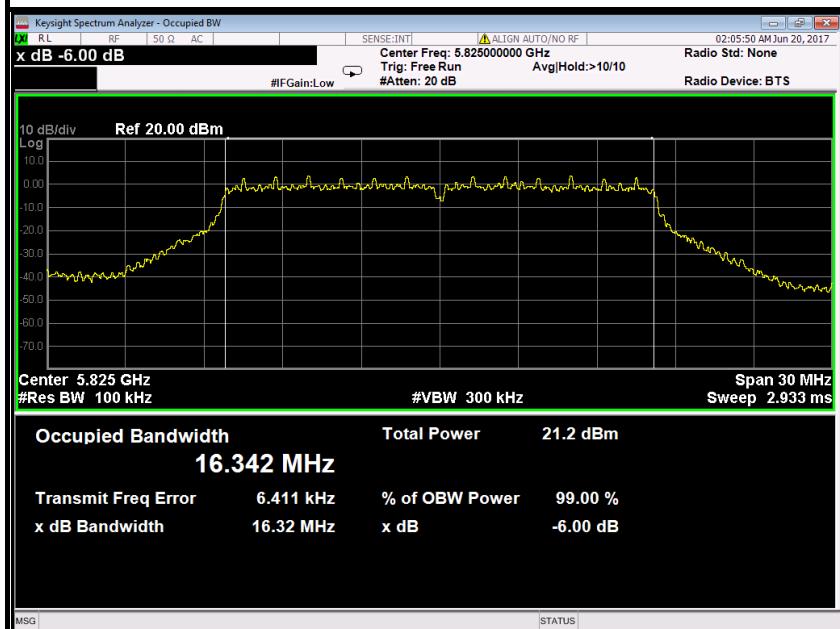
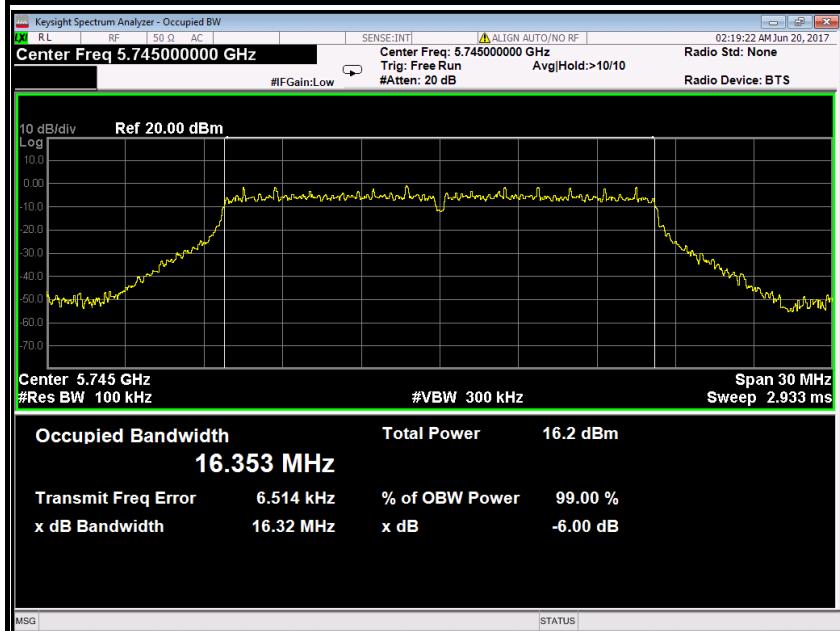
Antenna 0







**6dB Bandwidth (CH High)****Antenna 1****IEEE 802.11a mode / 5745 ~ 5825MHz****6dB Bandwidth (CH Low)**

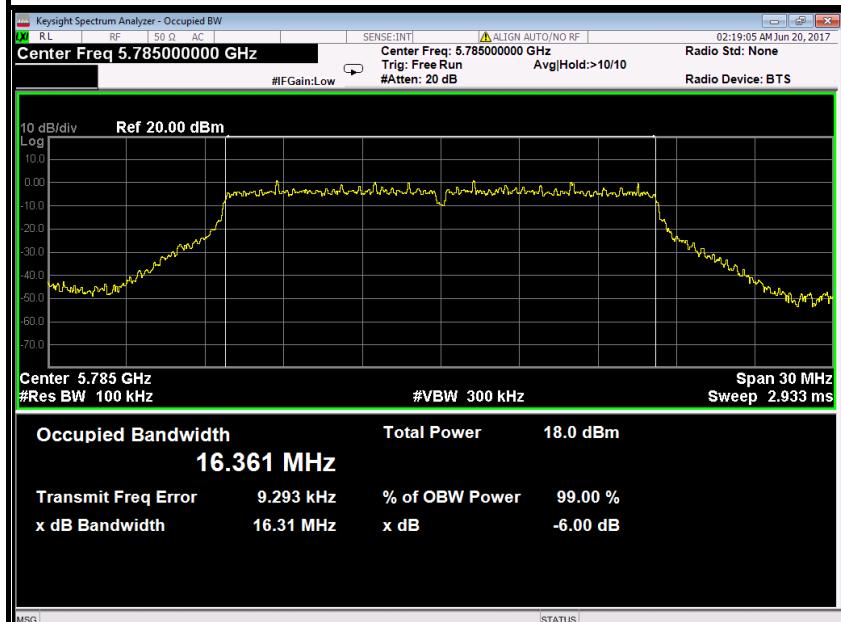
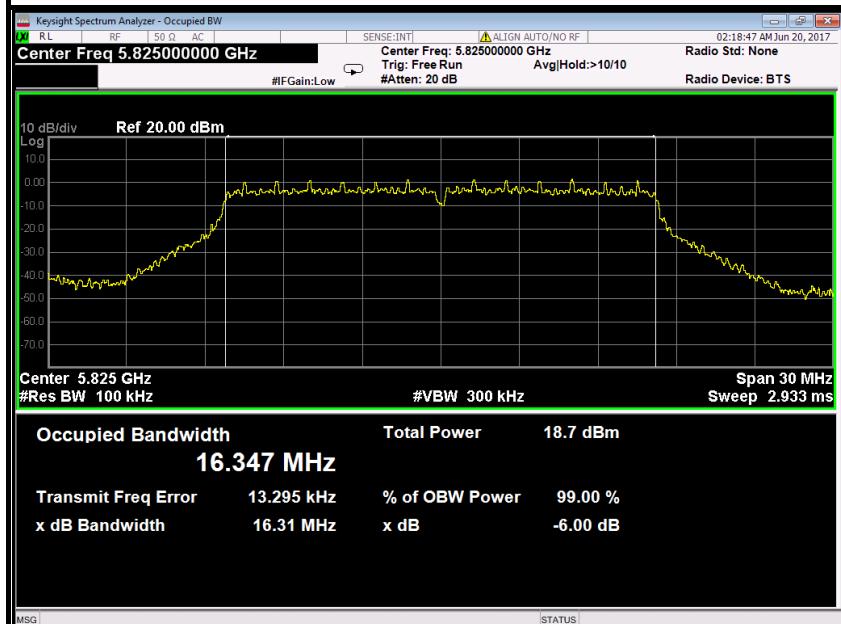
**6dB Bandwidth (CH Mid)****6dB Bandwidth (CH High)**

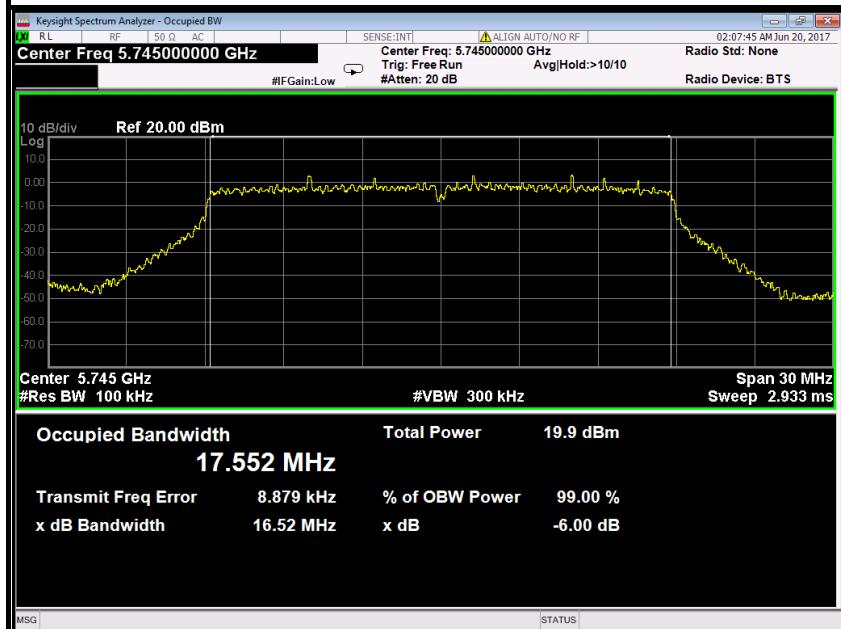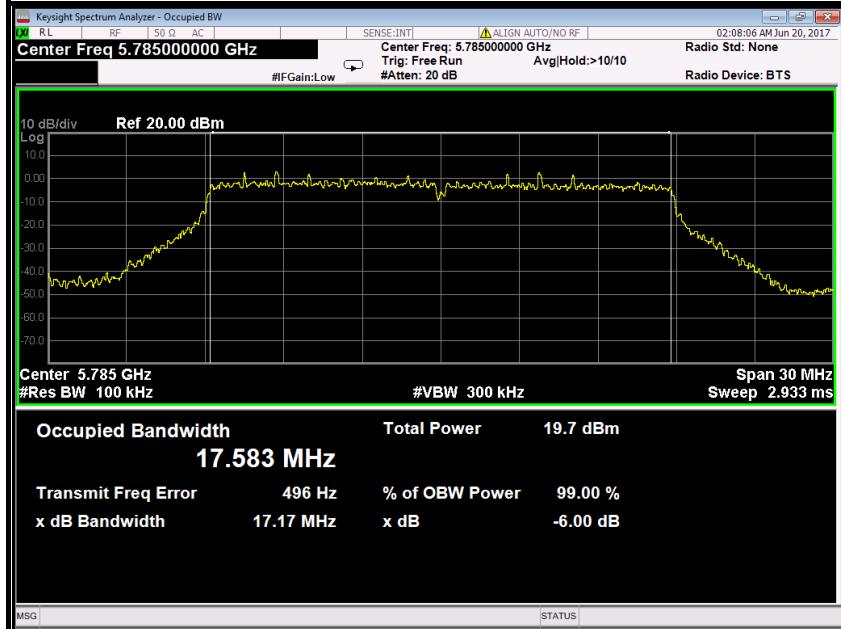**Antenna 0****IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz****6dB Bandwidth (CH Low)****6dB Bandwidth (CH Mid)**

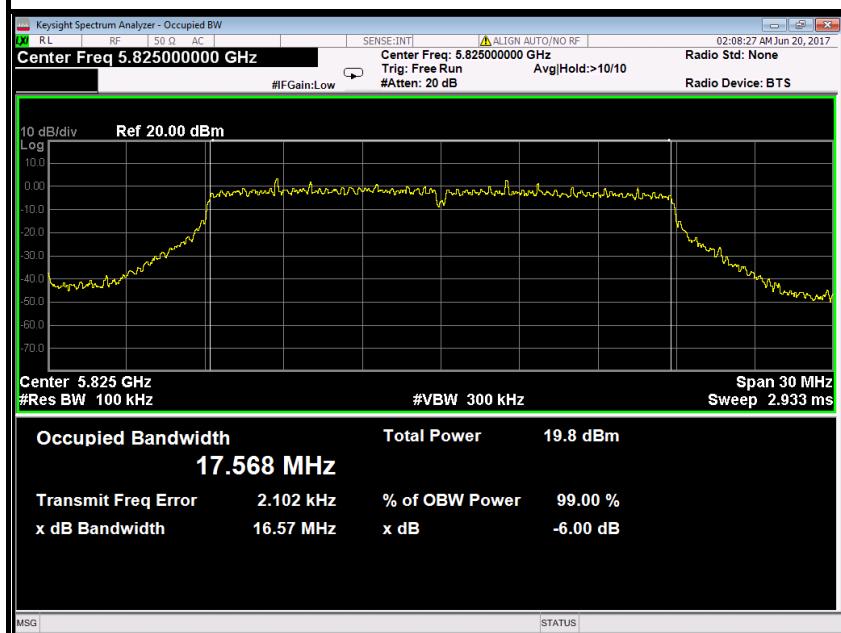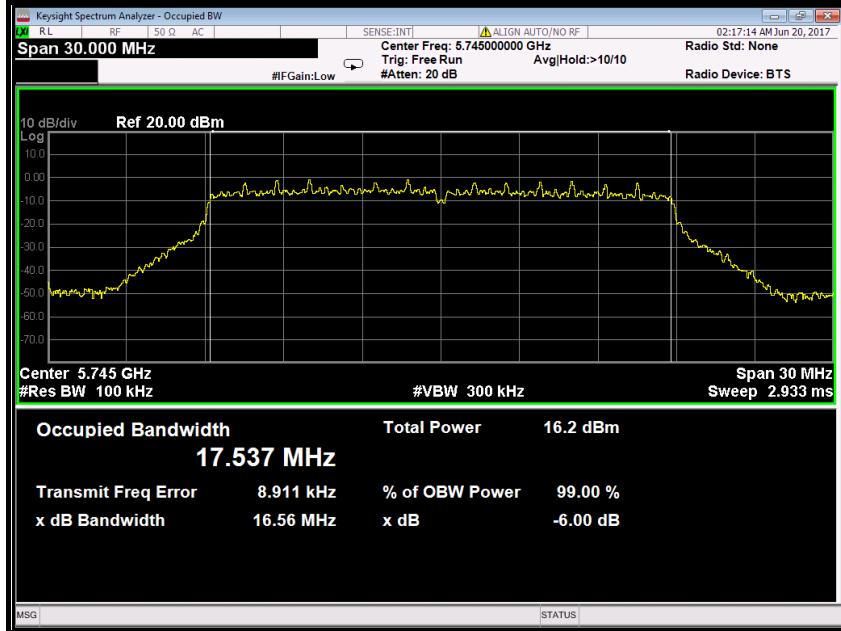**6dB Bandwidth (CH High)****Antenna 1****IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz****6dB Bandwidth (CH Low)**

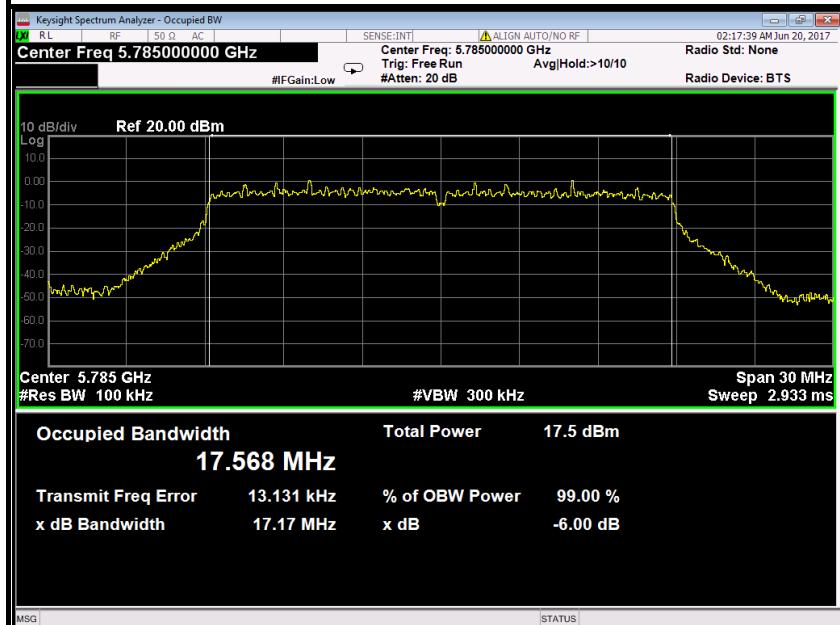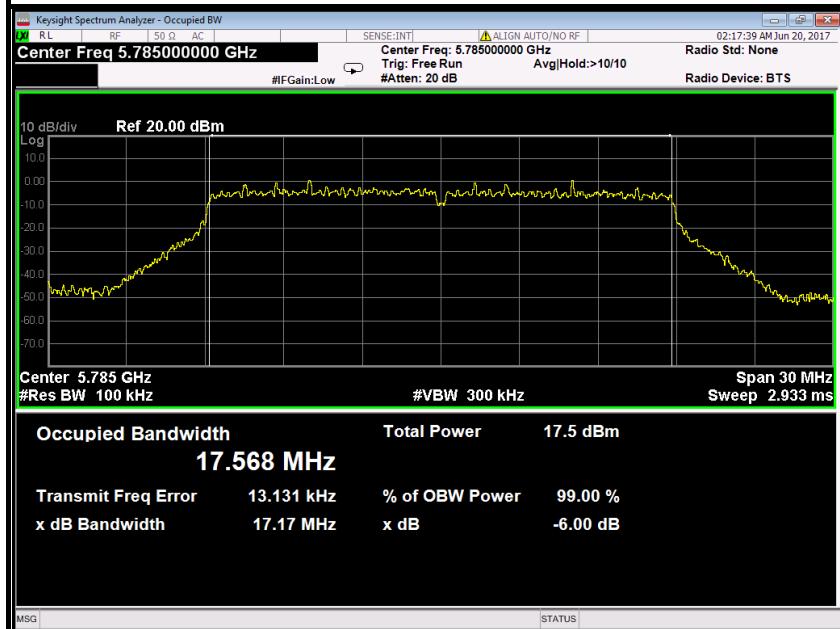**6dB Bandwidth (CH Mid)****6dB Bandwidth (CH High)**

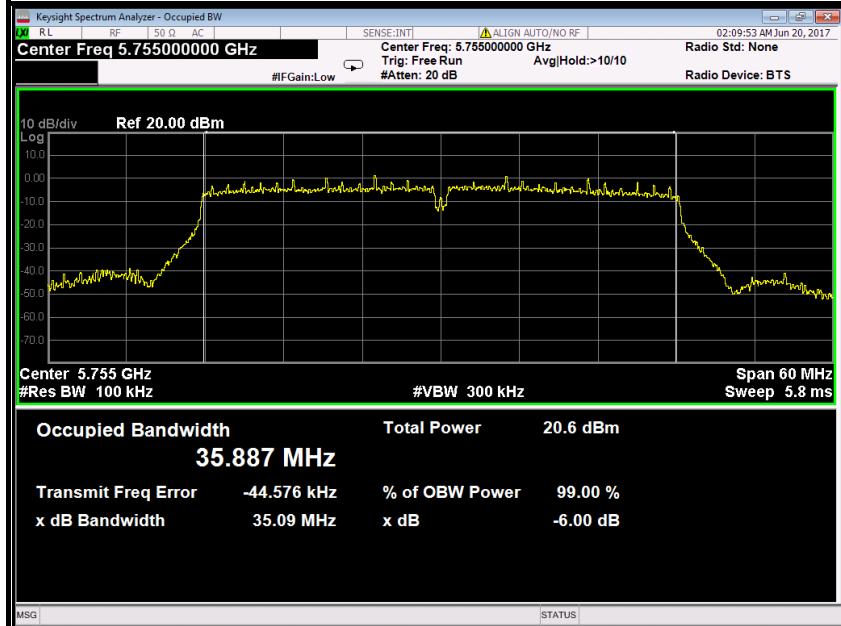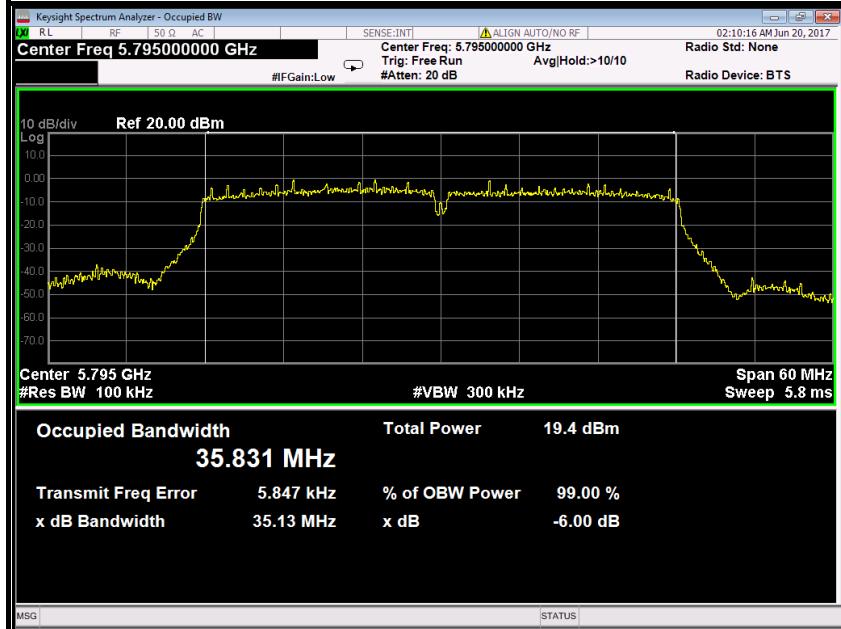**Antenna 0****IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz****6dB Bandwidth (CH Low)****6dB Bandwidth (CH High)**

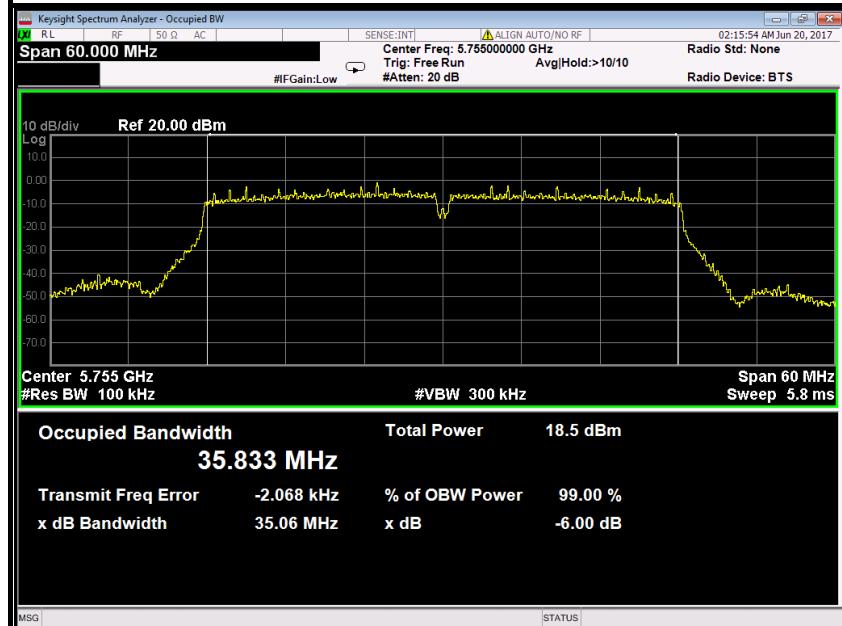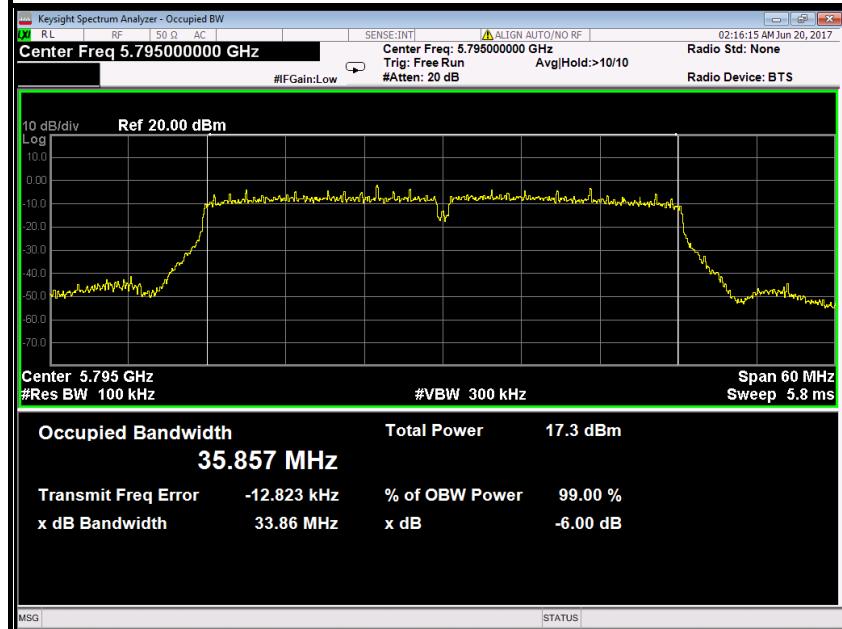
**Antenna 1****IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz****6dB Bandwidth (CH Low)****6dB Bandwidth (CH High)**



Antenna 0

IEEE 802.11ac 80 mode / 5775MHz

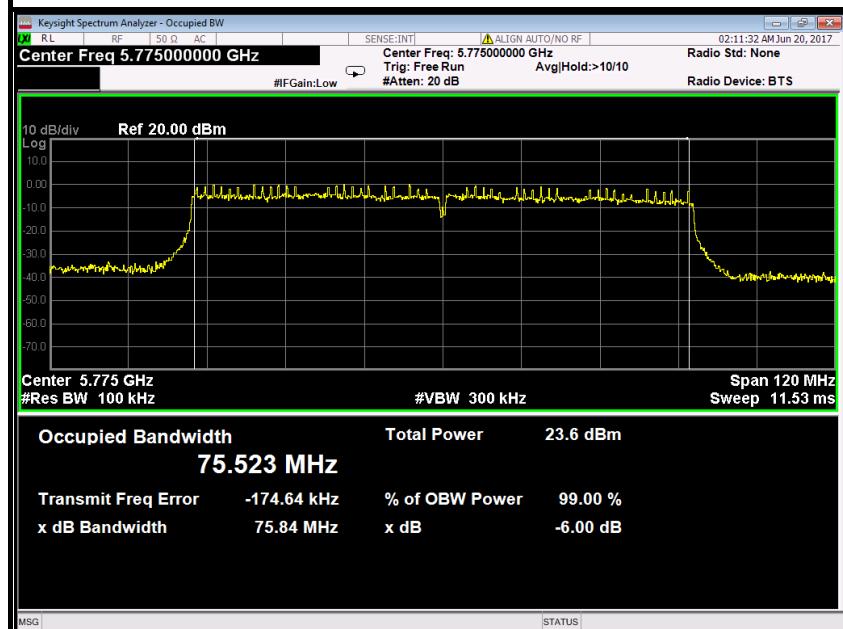
6dB Bandwidth



Antenna 1

IEEE 802.11ac 80 mode / 5775MHz

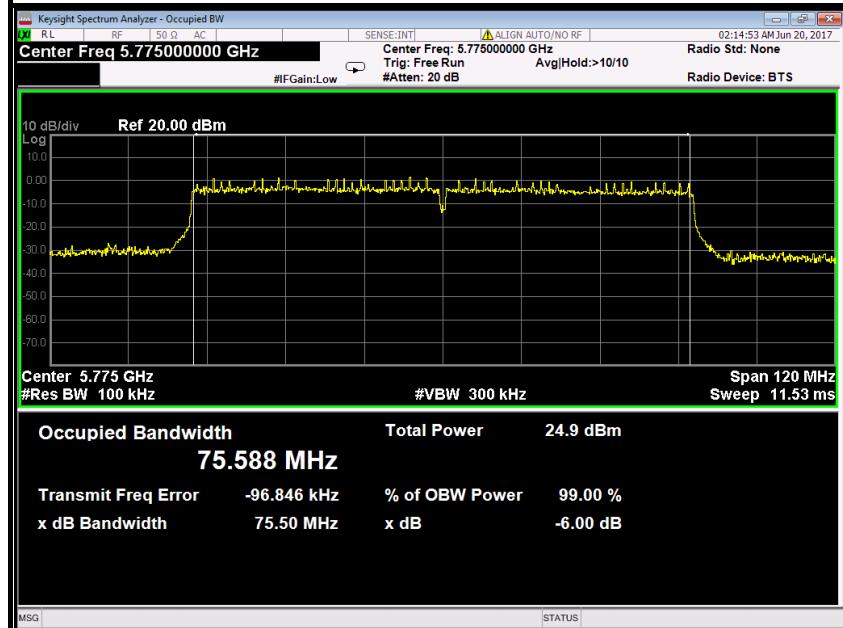6dB Bandwidth





6.3 ANTENNA GAIN

MEASUREMENT

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal WLAN devices, the OFDM mode is used.

MEASUREMENT PARAMETERS

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	3 MHz
Video bandwidth	3 MHz
Trace-Mode	Max hold

LIMITS

FCC	IC
Antenna Gain	
6 dBi	



TEST RESULTS

Antenna 0

IEEE 802.11a mode / 5180 ~ 5240MHz

T_{nom}	V_{nom}	Lowest channel 5180MHz	Highest channel 5240MHz
Conducted power [dBm] Measured with OFDM modulation		3.06	2.76
Radiated power [dBm] Measured with OFDM modulation		5.95	6.04
Gain [dBi] Calculated		2.89	3.28
Measurement uncertainty		\pm 1.5 dB (cond.) / \pm 3 dB (rad.)	

IEEE 802.11a mode / 5745 ~ 5825MHz

T_{nom}	V_{nom}	Lowest channel 5745MHz	Highest channel 5825MHz
Conducted power [dBm] Measured with OFDM modulation		8.76	9.06
Radiated power [dBm] Measured with OFDM modulation		11.89	12.14
Gain [dBi] Calculated		3.13	3.08
Measurement uncertainty		\pm 1.5 dB (cond.) / \pm 3 dB (rad.)	

Antenna 1

IEEE 802.11a mode / 5180 ~ 5240MHz

T_{nom}	V_{nom}	Lowest channel 5180MHz	Highest channel 5240MHz
Conducted power [dBm] Measured with OFDM modulation		4.16	3.96
Radiated power [dBm] Measured with OFDM modulation		7.18	7.44
Gain [dBi] Calculated		3.02	3.48
Measurement uncertainty		\pm 1.5 dB (cond.) / \pm 3 dB (rad.)	

IEEE 802.11a mode / 5745 ~ 5825MHz

T_{nom}	V_{nom}	Lowest channel 5745MHz	Highest channel 5825MHz
Conducted power [dBm] Measured with OFDM modulation		3.56	4.06
Radiated power [dBm] Measured with OFDM modulation		6.79	7.24
Gain [dBi] Calculated		3.23	3.18
Measurement uncertainty		\pm 1.5 dB (cond.) / \pm 3 dB (rad.)	



6.4 OUTPUT POWER

6.4.1 LIMIT

According to §15.407(a)& FCC R&O FCC 14 - 30,

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Note to paragraph (a)(3): The Commission strongly recommends that parties employing U-NII devices to provide critical communications services should determine if there are any nearby Government radar systems that could affect their operation.

Specified Limit of the Output Power

Not applicable, Since the EUT without the band II and band III.




6.4.2 MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Power Meter	Anritsu	ML2495A	1204003	02/21/2017	02/20/2018
Power Sensor	Anritsu	MA2411B	1126150	02/21/2017	02/20/2018

Remark: Each piece of equipment is scheduled for calibration once a year.

6.4.3 TEST CONFIGURATIONS

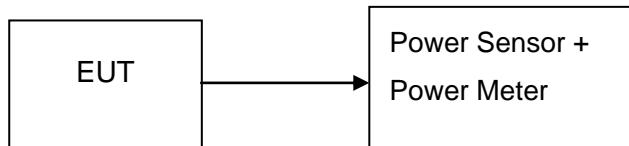The EUT was connected to a spectrum analyzer through a 50Ω RF cable.



6.4.4 TEST PROCEDURE

The EUT was connected to a Power Meter through a 50Ω RF cable.

6.4.5 TEST RESULTS

No non-compliance noted



6.4.6 TEST DATA

IEEE 802.11a mode / 5180 ~ 5240MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)		AVG Output Power (W)		Limit (dBm)	Result
		Antenna 0	Antenna 1	Antenna 0	Antenna 1		
Low	5180	15.10	16.20	0.03236	0.04169	30.00	PASS
Mid	5200	15.40	16.10	0.03467	0.04074		PASS
High	5240	14.80	16.00	0.03020	0.03981		PASS

IEEE 802.11a mode / 5745 ~ 5825MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)		AVG Output Power (W)		Limit (dBm)	Result
		Antenna 0	Antenna 1	Antenna 0	Antenna 1		
Low	5745	20.80	15.60	0.12023	0.03631	30.00	PASS
Mid	5785	20.70	16.00	0.11749	0.03981		PASS
High	5825	21.10	16.10	0.12882	0.04074		PASS

IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)			AVG Output Power (W)	Limit (dBm)	Result
		Antenna 0	Antenna 1	Total			
Low	5180	14.80	15.30	18.07	0.06408	30.00	PASS
Mid	5200	14.90	15.70	18.33	0.06806		PASS
High	5240	14.20	14.50	17.36	0.05449		PASS

IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)			AVG Output Power (W)	Limit (dBm)	Result
		Antenna 0	Antenna 1	Total			
Low	5745	20.30	14.80	21.38	0.13735	30.00	PASS
Mid	5785	20.40	15.00	21.50	0.14127		PASS
High	5825	20.50	15.10	21.60	0.14456		PASS

**IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz**

Channel	Frequency (MHz)	AVG Output Power (dBm)			AVG Output Power (W)	Limit (dBm)	Result
		Antenna 0	Antenna 1	Total			
Low	5190	15.10	15.50	18.31	0.06784	30.00	PASS
High	5230	13.90	14.10	17.01	0.05025		PASS

IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)			AVG Output Power (W)	Limit (dBm)	Result
		Antenna 0	Antenna 1	Total			
Low	5755	21.00	20.90	23.96	0.24892	30.00	PASS
High	5795	20.40	20.30	23.36	0.21680		PASS

IEEE 802.11ac 80 mode / 5210MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)			AVG Output Power (W)	Limit (dBm)	Result
		Antenna 0	Antenna 1	Total			
	5210	16.30	16.40	19.36	0.08631	30.00	PASS

IEEE 802.11ac 80 mode / 5775MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)			AVG Output Power (W)	Limit (dBm)	Result
		Antenna 0	Antenna 1	Total			
	5775	18.70	18.00	21.37	0.13723	30.00	PASS



6.5 BAND EDGES MEASUREMENT

6.5.1 LIMIT

According to §15.407(b)

- (1) The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.
- (2) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency block edges as the design of the equipment permits.

6.5.2 MEASUREMENT EQUIPMENT USED

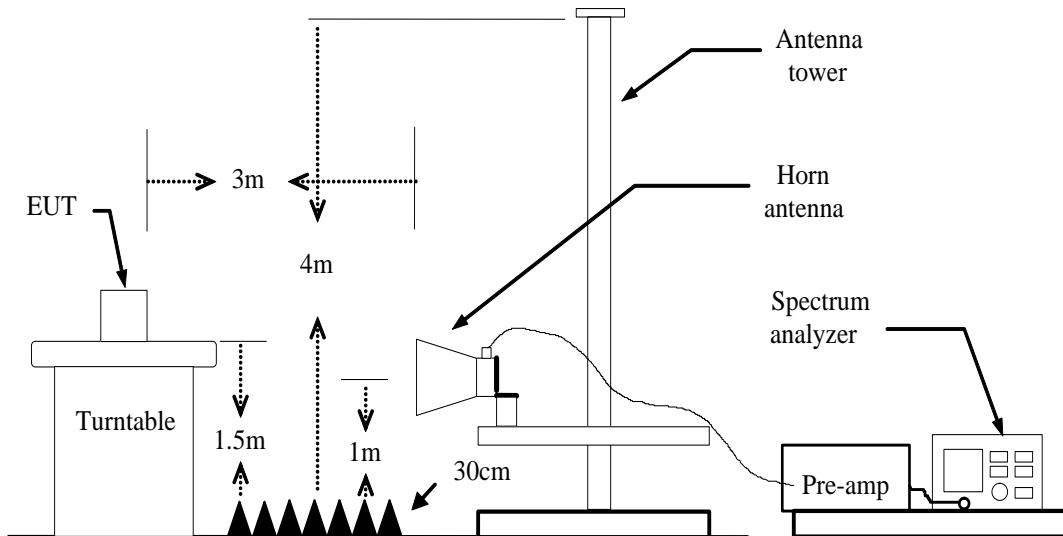
Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	N9010A	MY52221469	02/21/2017	02/20/2018
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/21/2017	02/20/2018
Amplifier	EMEC	EM330	060661	03/18/2017	03/17/2018
High Noise Amplifier	Agilent	8449B	3008A01838	02/21/2017	02/20/2018
Loop Antenna	COM-POWER	AL-130	121044	09/25/2016	09/24/2017
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/21/2017	02/20/2018
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02/28/2017	02/27/2018
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	02/28/2017	02/27/2018
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/21/2017	02/20/2018
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The FCC Site Registration number is 101879.

3. N.C.R = No Calibration Required.

6.5.3 TEST CONFIGURATION



6.5.4 TEST PROCEDURE

1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1 / VBW=3MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO / Detector=Peak
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.



6.5.5 TEST RESULT

Antenna 0

IEEE 802.11a mode / 5745 ~ 5825MHz

1. Operating Frequency: 5745-5825MHz
2. CH Low: 5745MHz, CH High: 5825MHz
3. 26dB bandwidth: CH Low: 19.89MHz, CH High: 19.55MHz
4. Frequency Range: 5735.055MHz, 5834.775MHz

IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz

1. Operating Frequency: 5745-5825MHz
2. CH Low: 5745MHz, CH High: 5825MHz
3. 26dB bandwidth: CH Low: 20.114MHz, CH High: 20.51MHz
4. Frequency Range: 5734.945MHz, 5835.255MHz

IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz

1. Operating Frequency: 5755-5795MHz
2. CH Low: 5755MHz, CH High: 5795MHz
3. 26dB bandwidth: CH Low: 39.55MHz, CH High: 39.89MHz
4. Frequency Range: 5735.225MHz, 5814.945MHz

Test mode: IEEE 802.11ac 80 mode / 5775MHz

1. Operating Frequency: 5775MHz
2. CH: 5775MHz
3. 26dB bandwidth: CH: 83.59MHz
4. Frequency Range: 5733.205MHz, 5816.795MHz



Antenna 1

IEEE 802.11a mode / 5745 ~ 5825MHz

1. Operating Frequency: 5745-5825MHz
2. CH Low: 5745MHz, CH High: 5825MHz
3. 26dB bandwidth: CH Low: 19.21MHz, CH High: 19.85MHz
4. Frequency Range: 5735.395MHz, 5834.925MHz

IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz

1. Operating Frequency: 5745-5825MHz
2. CH Low: 5745MHz, CH High: 5825MHz
3. 26dB bandwidth: CH Low: 20.36MHz, CH High: 20.36MHz
4. Frequency Range: 5734.820MHz, 5835.180MHz


IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz

1. Operating Frequency: 5755-5795MHz
2. CH Low: 5755MHz, CH High: 5795MHz
3. 26dB bandwidth: CH Low: 39.59MHz, CH High: 39.72MHz
4. Frequency Range: 5735.205MHz, 5814.860MHz


Test mode: IEEE 802.11ac 80 mode / 5775MHz

1. Operating Frequency: 5775MHz
2. CH: 5775MHz
3. 26dB bandwidth: CH: 83.00MHz
4. Frequency Range: 5733.500MHz, 5816.500MHz

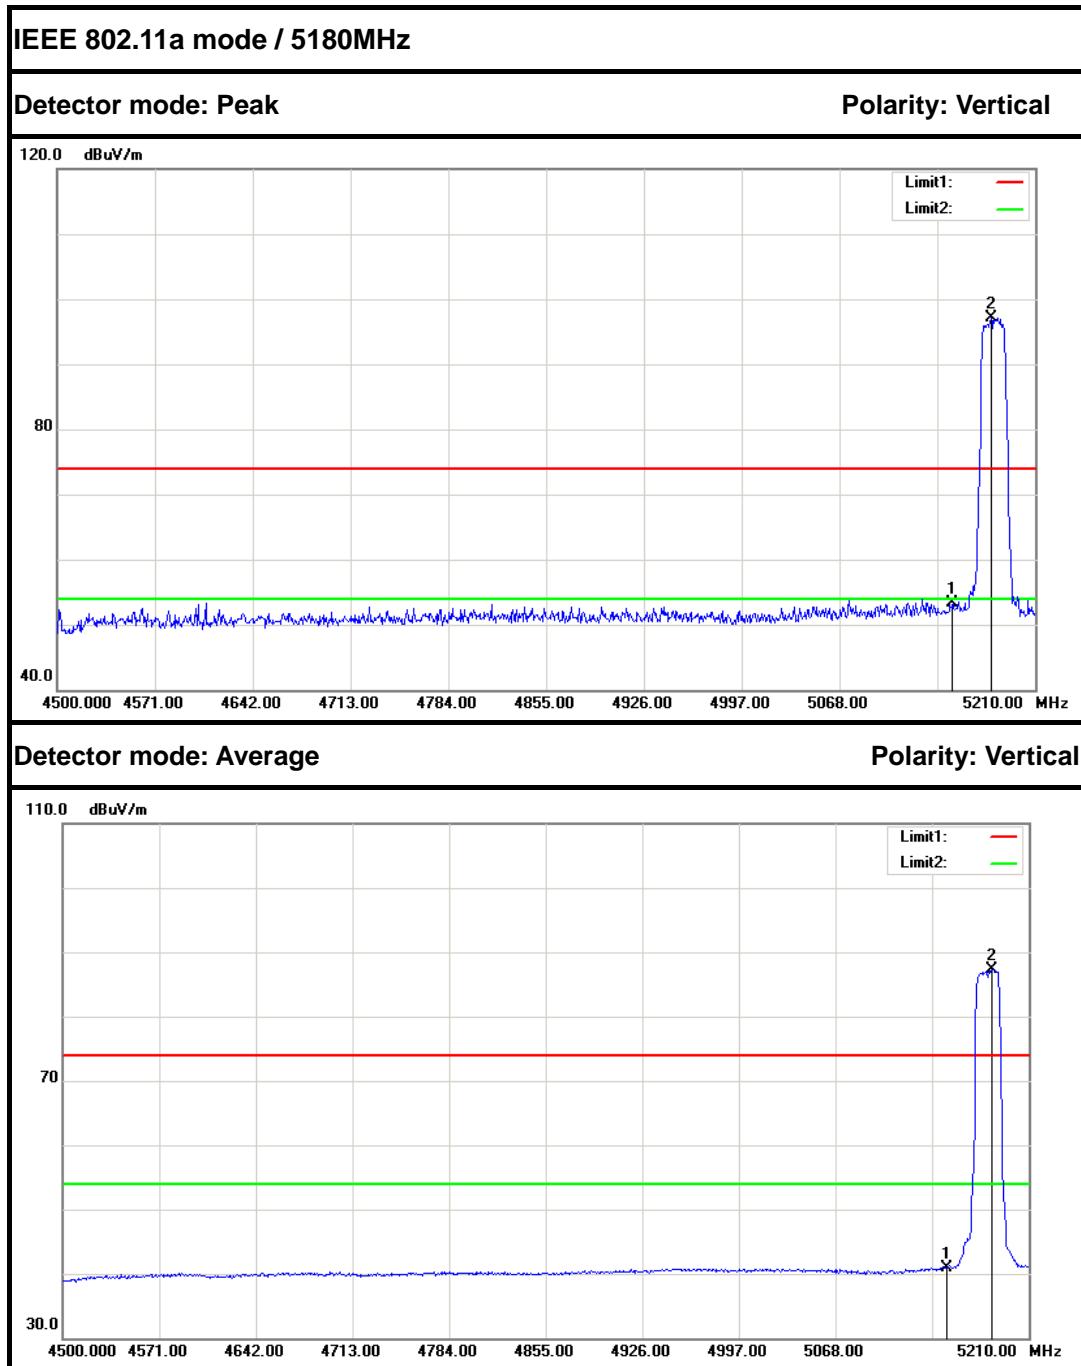Because the mentioned conditions the the Fundamental Frequency Range was far away from the Restricted bands in the table published in 15.205, the test is not applicable.

**Test Plot****Antenna 0**


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5150.000	48.13	5.25	53.38	74.00	-20.62	Peak	Vertical
2	5178.050	91.90	5.30	97.20	---	---	Peak	Vertical
1	5150.000	35.62	5.25	40.87	54.00	-13.13	Average	Vertical
2	5183.020	82.01	5.31	87.32	---	---	Average	Vertical

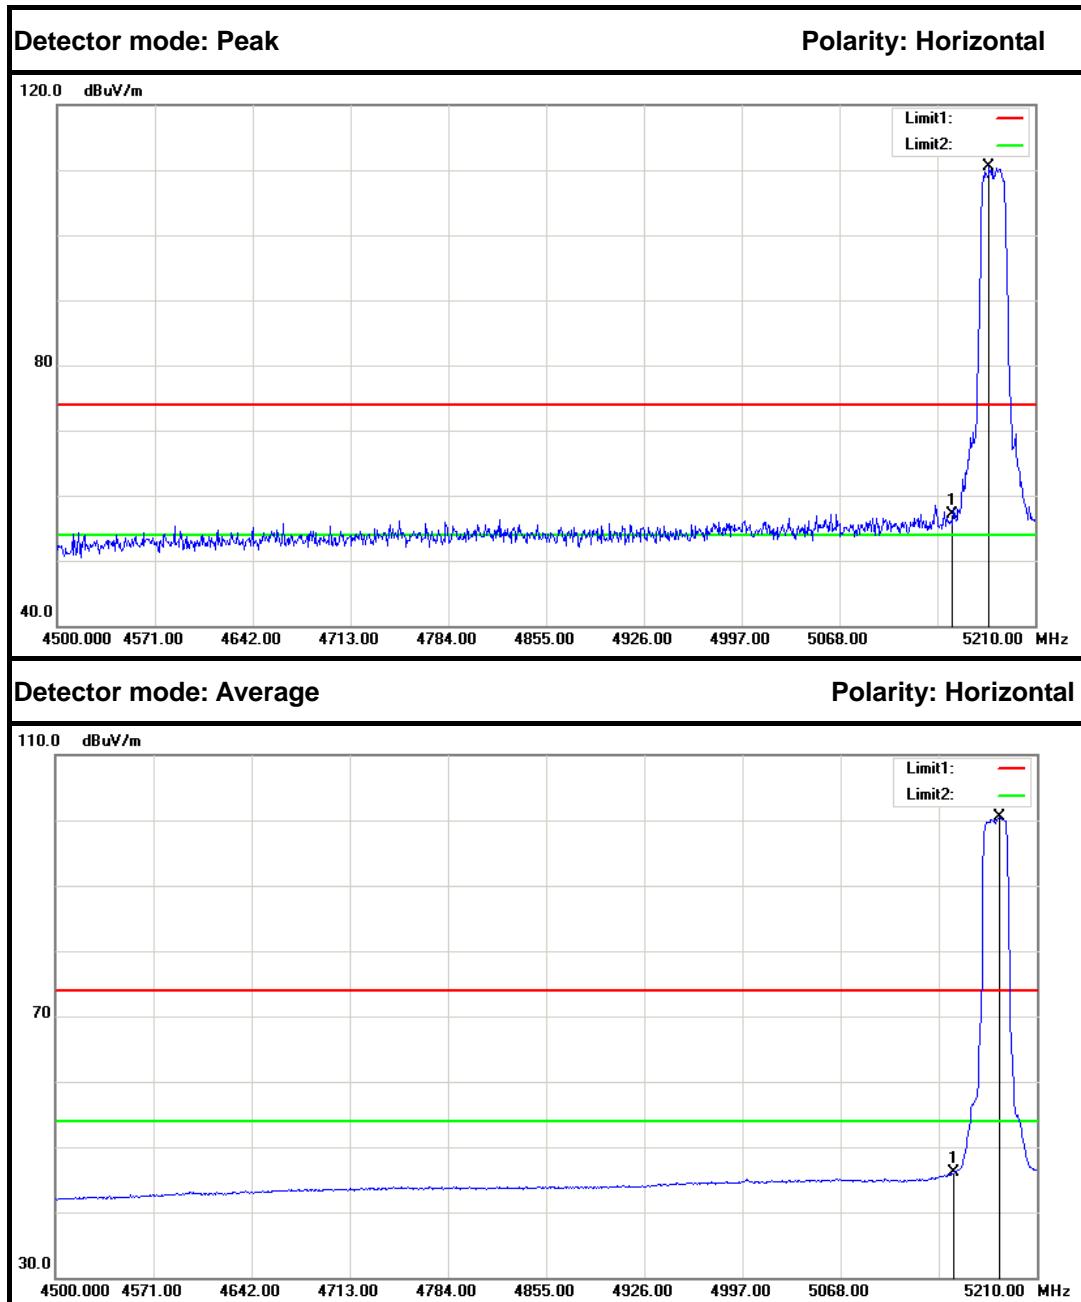


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5150.000	51.81	5.25	57.06	74.00	-16.94	Peak	Horizontal
2	5176.630	105.26	5.29	110.55	---	---	Peak	Horizontal
1	5150.000	40.81	5.25	46.06	54.00	-7.94	Average	Horizontal
2	5183.020	95.15	5.31	100.46	---	---	Average	Horizontal



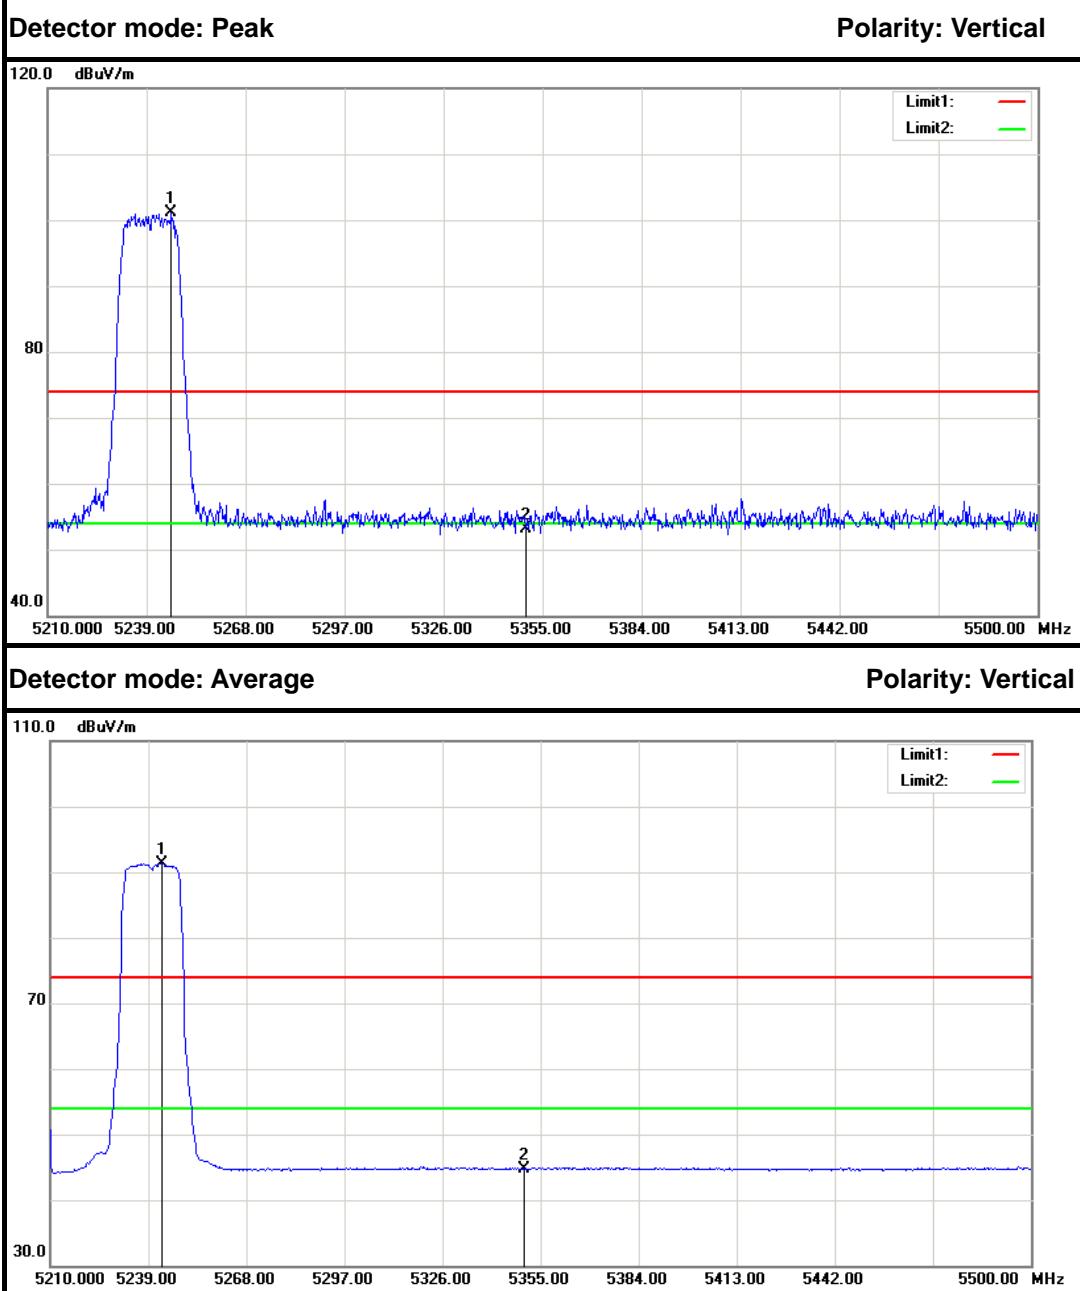
IEEE 802.11a mode / 5240MHz




No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5246.250	95.60	5.42	101.02	---	---	Peak	Vertical
2	5350.000	47.54	5.60	53.14	74.00	-20.86	Peak	Vertical
1	5243.060	85.98	5.41	91.39	---	---	Average	Vertical
2	5350.000	39.15	5.60	44.75	54.00	-9.25	Average	Vertical

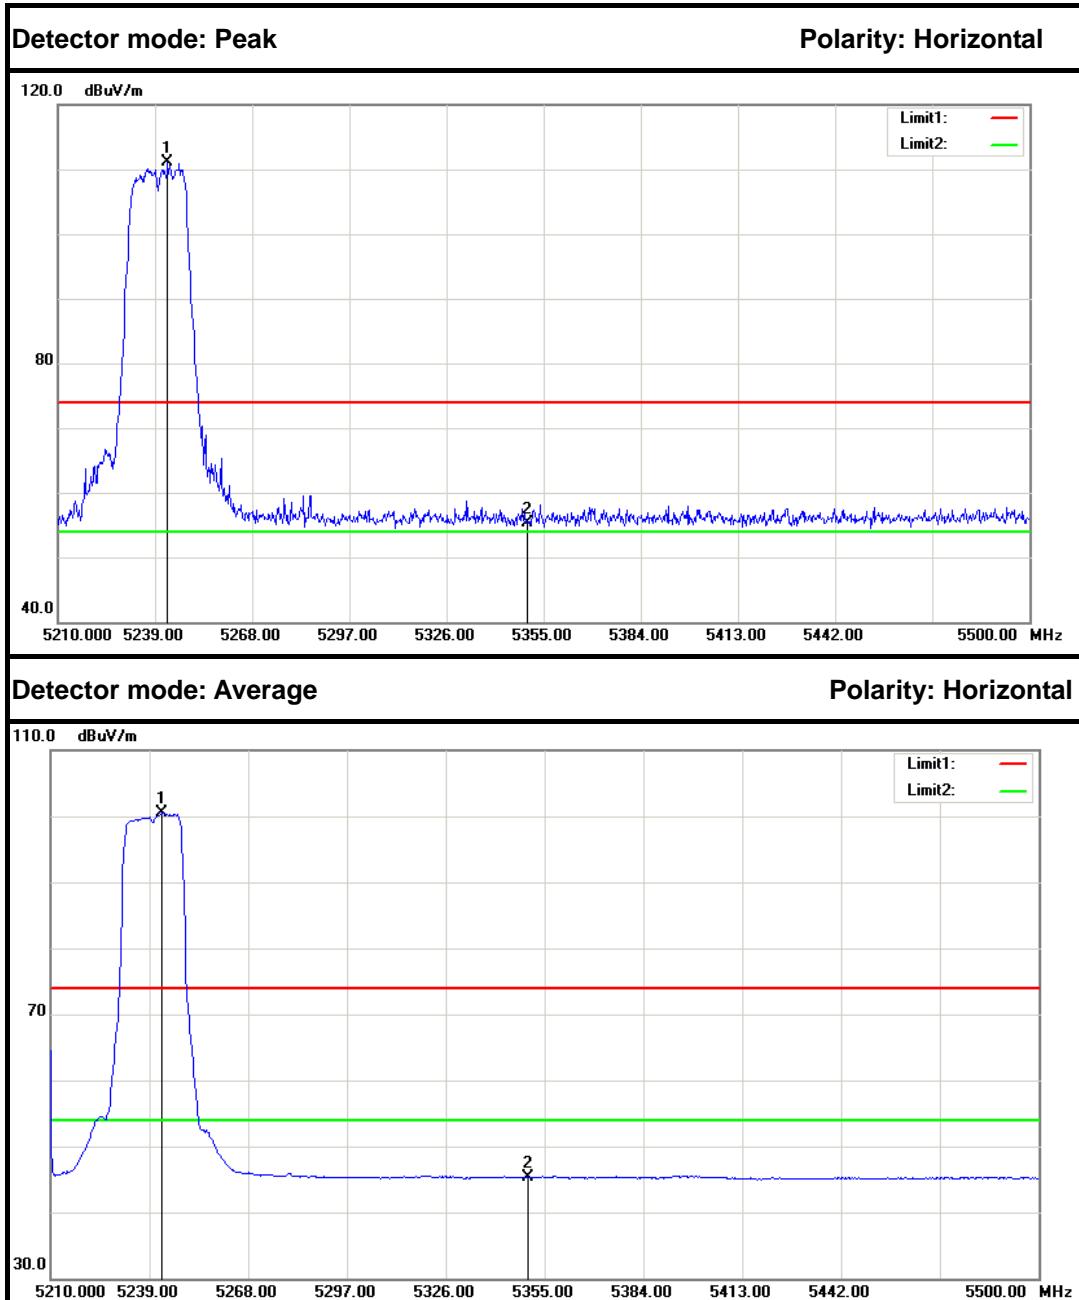

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5242.770	105.66	5.41	111.07	---	---	Peak	Horizontal
2	5350.000	49.79	5.60	55.39	74.00	-18.61	Peak	Horizontal
1	5242.770	95.03	5.41	100.44	---	---	Average	Horizontal
2	5350.000	39.71	5.60	45.31	54.00	-8.69	Average	Horizontal

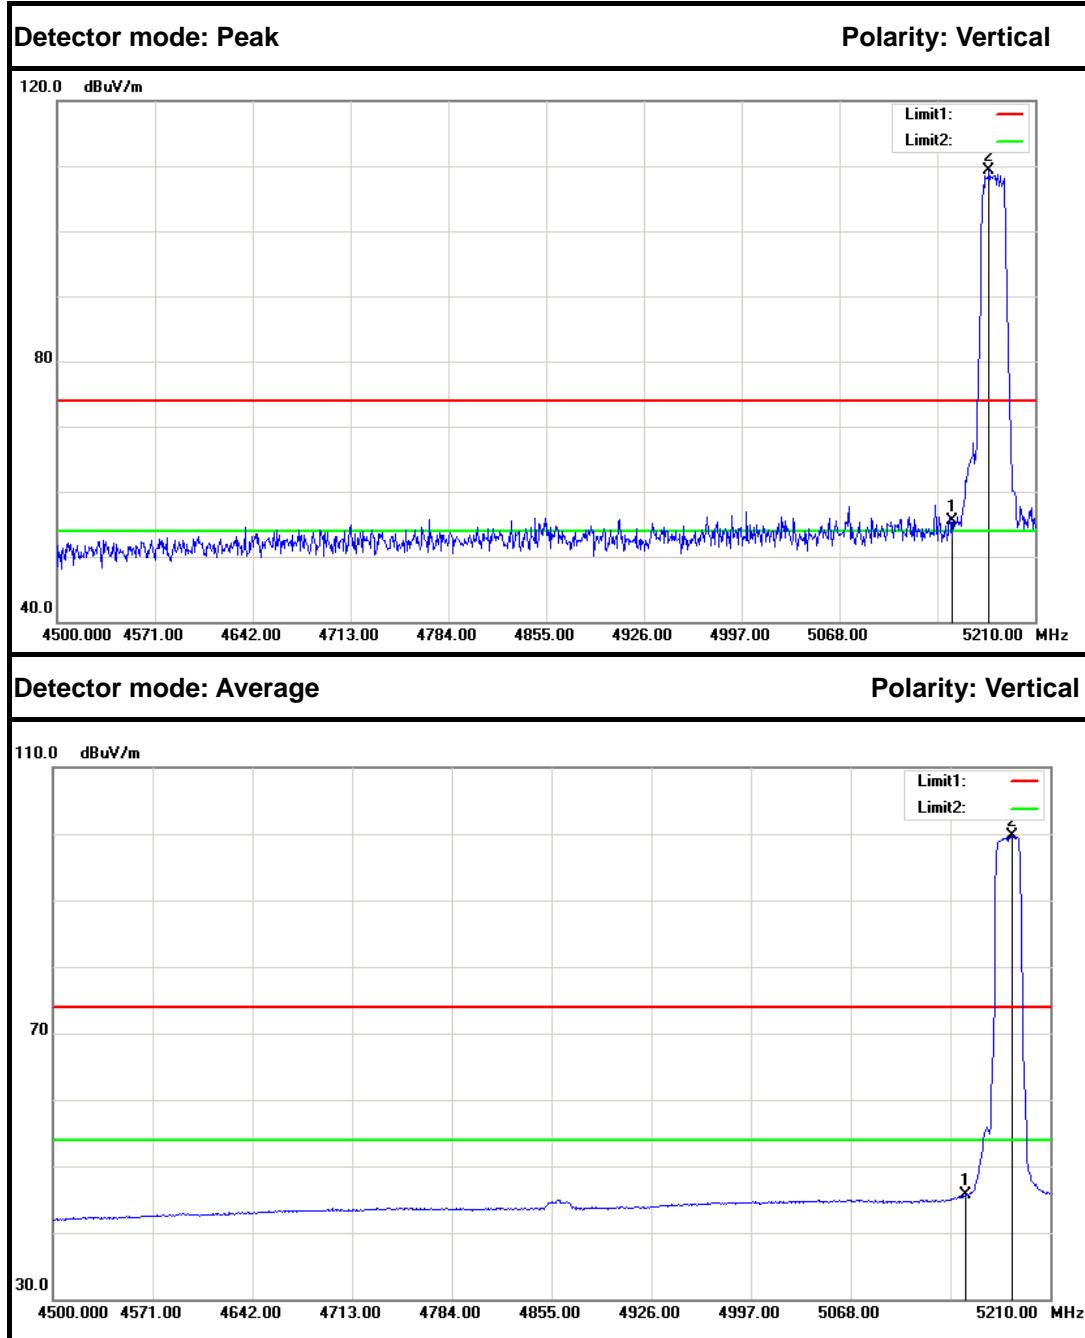**Antenna 1****IEEE 802.11a mode / 5180MHz**


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5150.000	50.20	5.25	55.45	74.00	-18.55	Peak	Vertical
2	5176.630	104.04	5.29	109.33	---	---	Peak	Vertical
1	5150.000	40.47	5.25	45.72	54.00	-8.28	Average	Vertical
2	5183.020	94.48	5.31	99.79	---	---	Average	Vertical

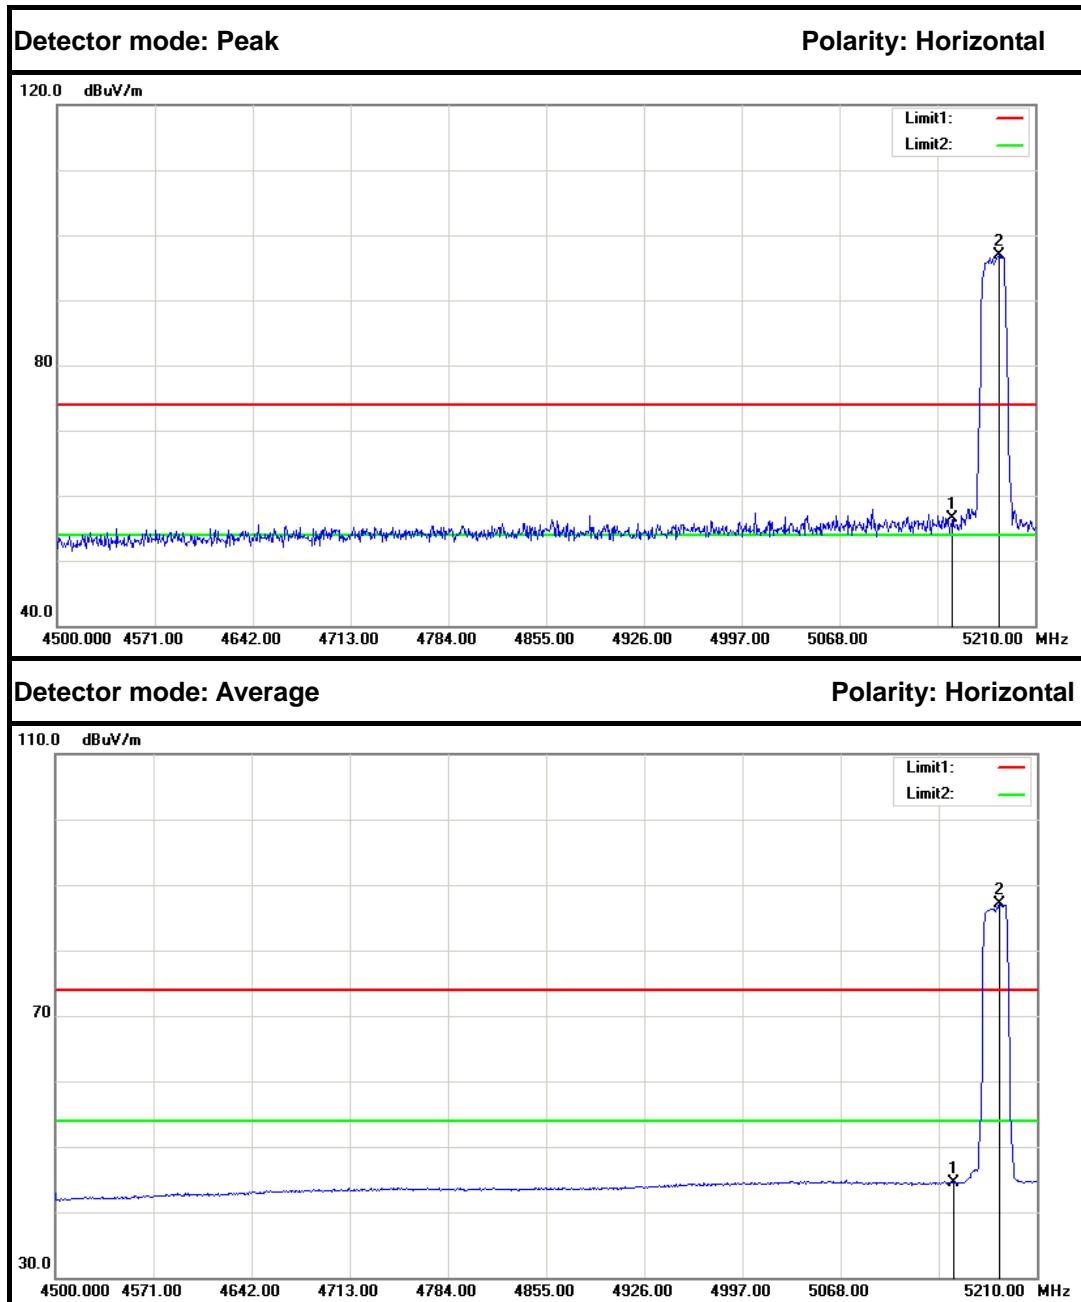


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5150.000	51.16	5.25	56.41	74.00	-17.59	Peak	Horizontal
2	5183.730	91.64	5.31	96.95	---	---	Peak	Horizontal
1	5150.000	39.22	5.25	44.47	54.00	-9.53	Average	Horizontal
2	5183.020	81.83	5.31	87.14	---	---	Average	Horizontal



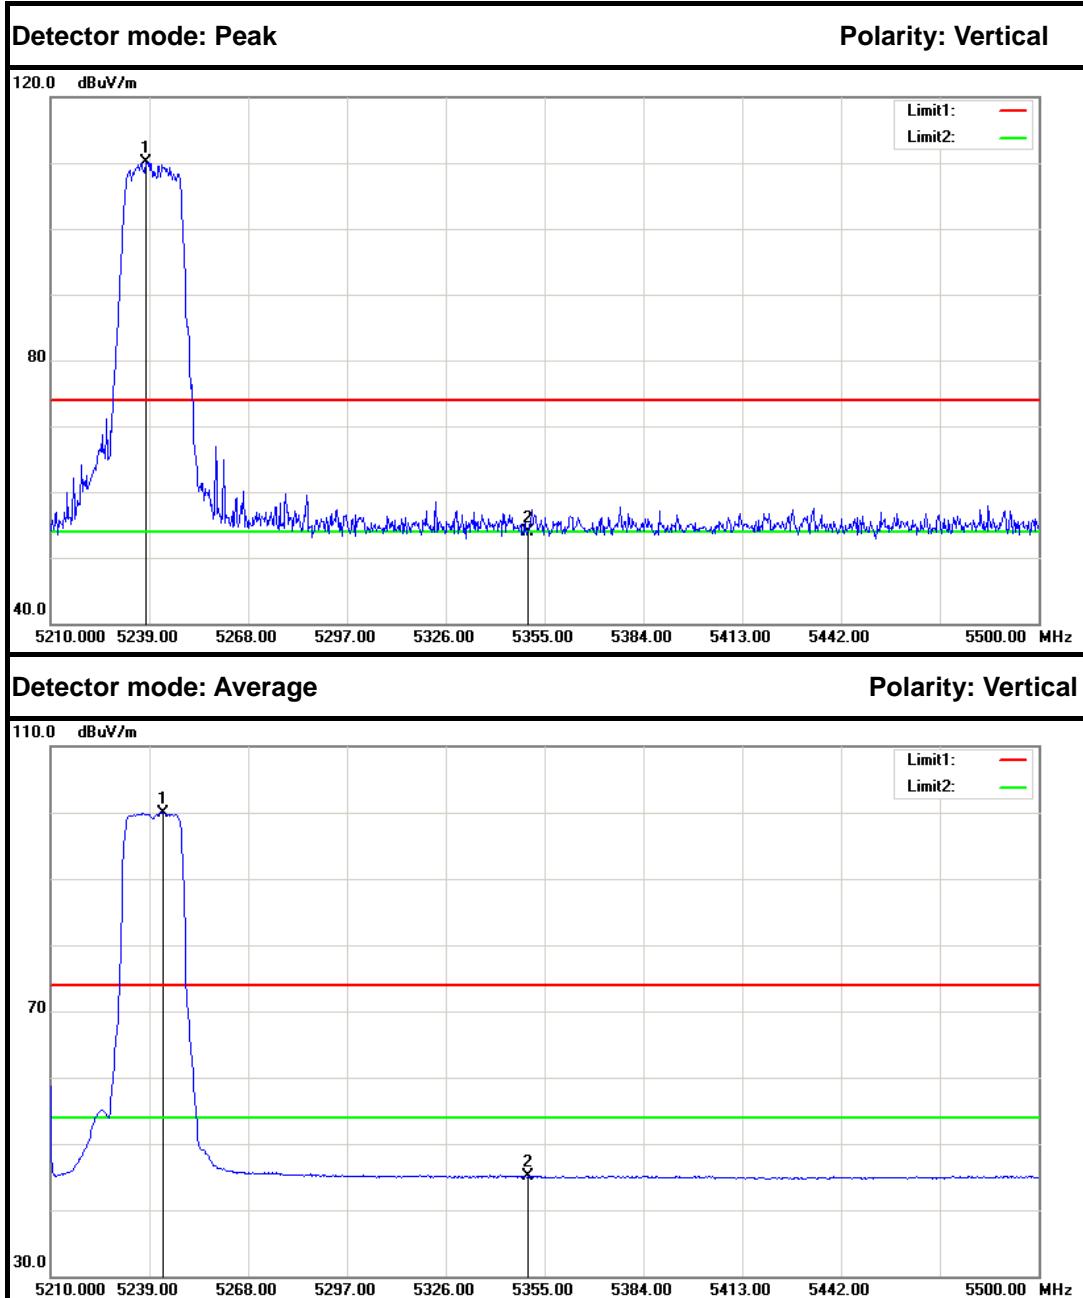IEEE 802.11a mode / 5240MHz




No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5237.840	104.79	5.40	110.19	---	---	Peak	Vertical
2	5350.000	48.36	5.60	53.96	74.00	-20.04	Peak	Vertical
1	5243.060	94.56	5.41	99.97	---	---	Average	Vertical
2	5350.000	39.50	5.60	45.10	54.00	-8.90	Average	Vertical

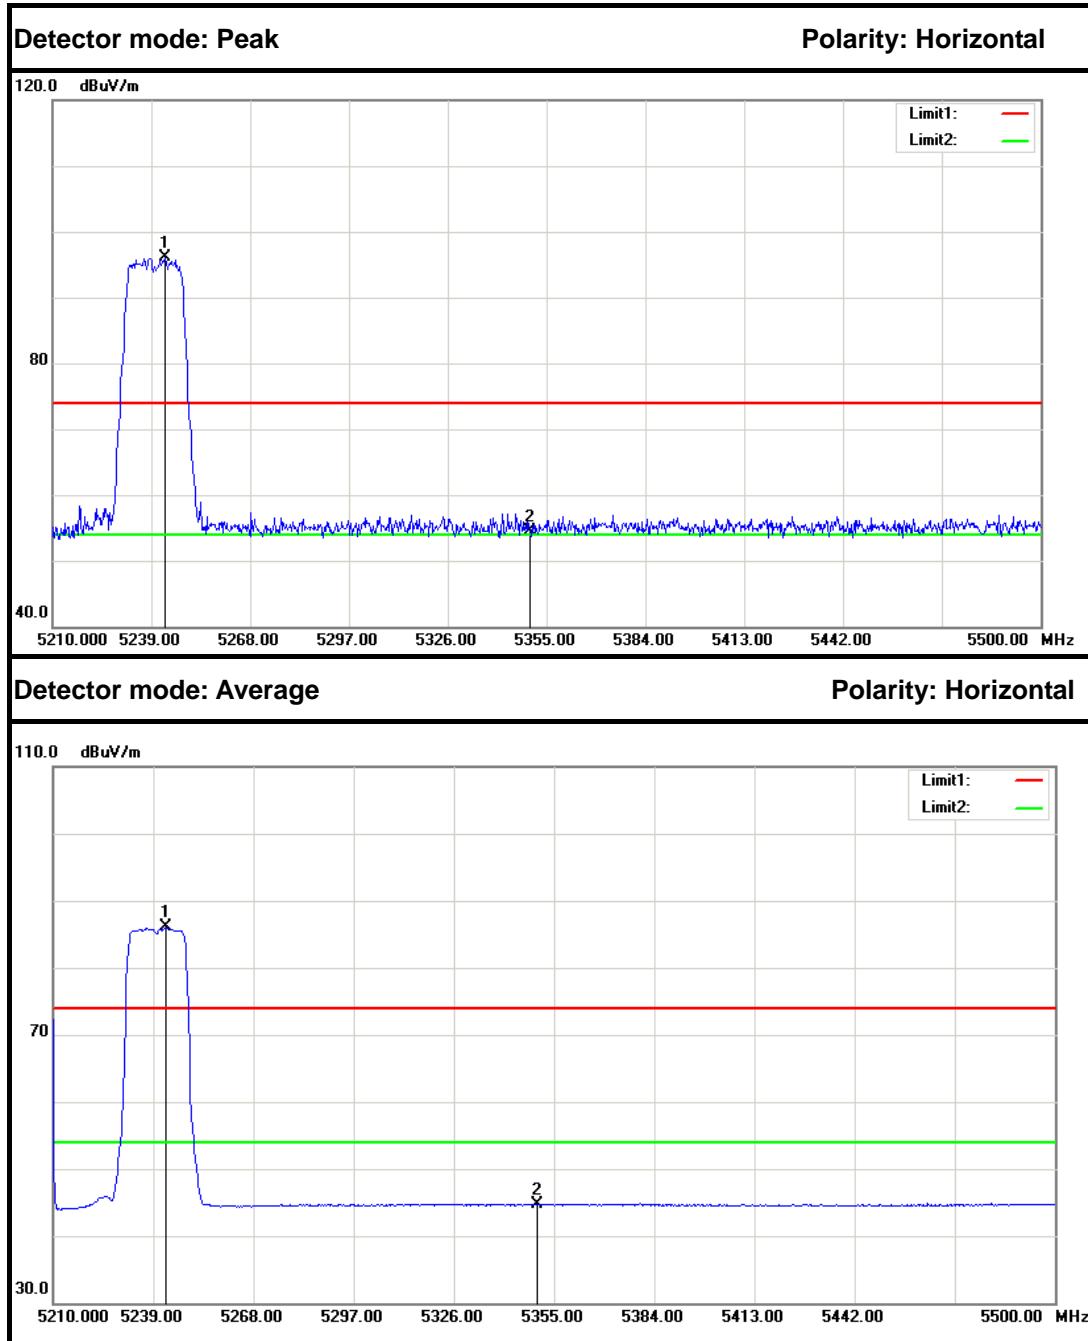


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5243.060	90.66	5.41	96.07	---	---	Peak	Horizontal
2	5350.000	48.92	5.60	54.52	74.00	-19.48	Peak	Horizontal
1	5242.770	80.63	5.41	86.04	---	---	Average	Horizontal
2	5350.000	39.02	5.60	44.62	54.00	-9.38	Average	Horizontal



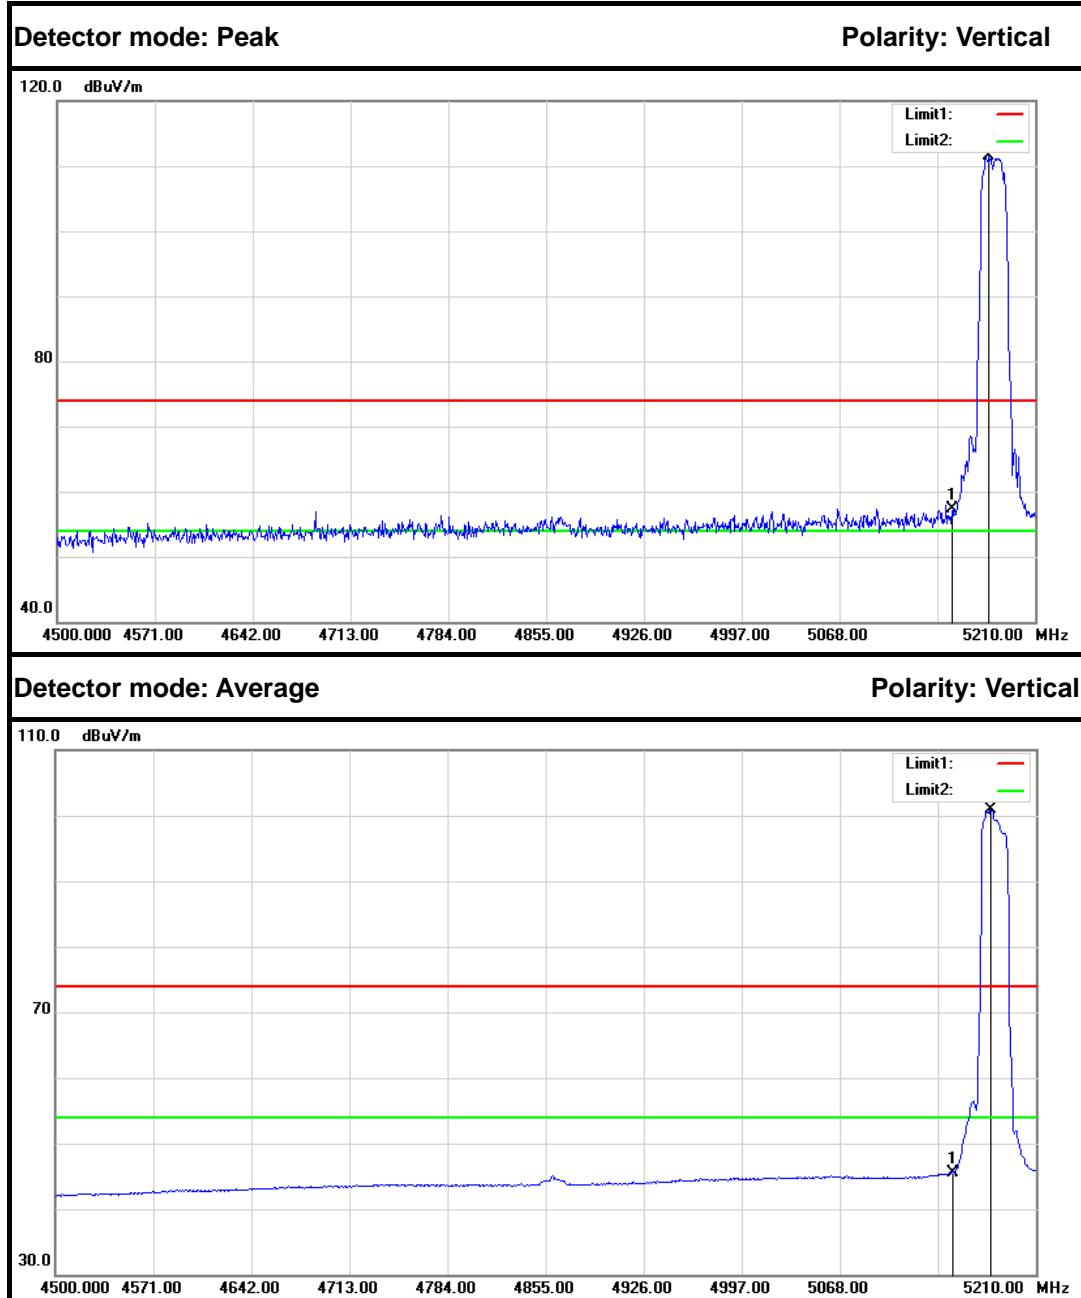Combine with Antenna 0 and Antenna 1
IEEE 802.11n HT 20 MHz mode / 5180 MHz




No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5150.000	52.13	5.25	57.38	74.00	-16.62	Peak	Vertical
2	5176.630	106.19	5.29	111.48	---	---	Peak	Vertical
1	5150.000	40.32	5.25	45.57	54.00	-8.43	Average	Vertical
2	5177.340	95.66	5.30	100.96	---	---	Average	Vertical

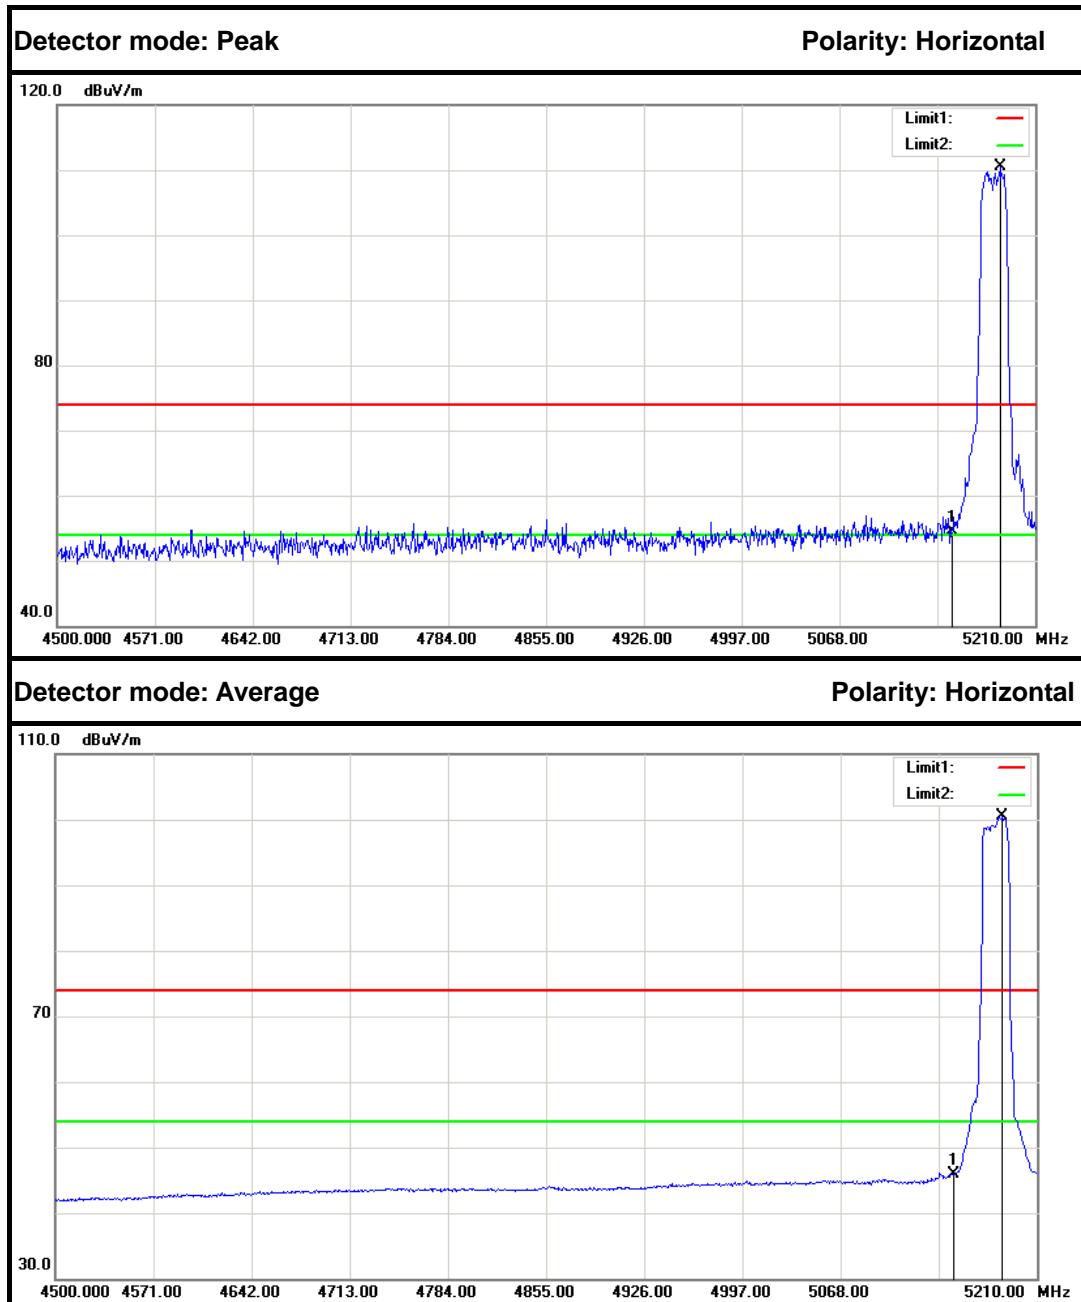


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5150.000	49.18	5.25	54.43	74.00	-19.57	Peak	Horizontal
2	5184.440	105.24	5.31	110.55	---	---	Peak	Horizontal
1	5150.000	40.60	5.25	45.85	54.00	-8.15	Average	Horizontal
2	5185.150	95.22	5.31	100.53	---	---	Average	Horizontal



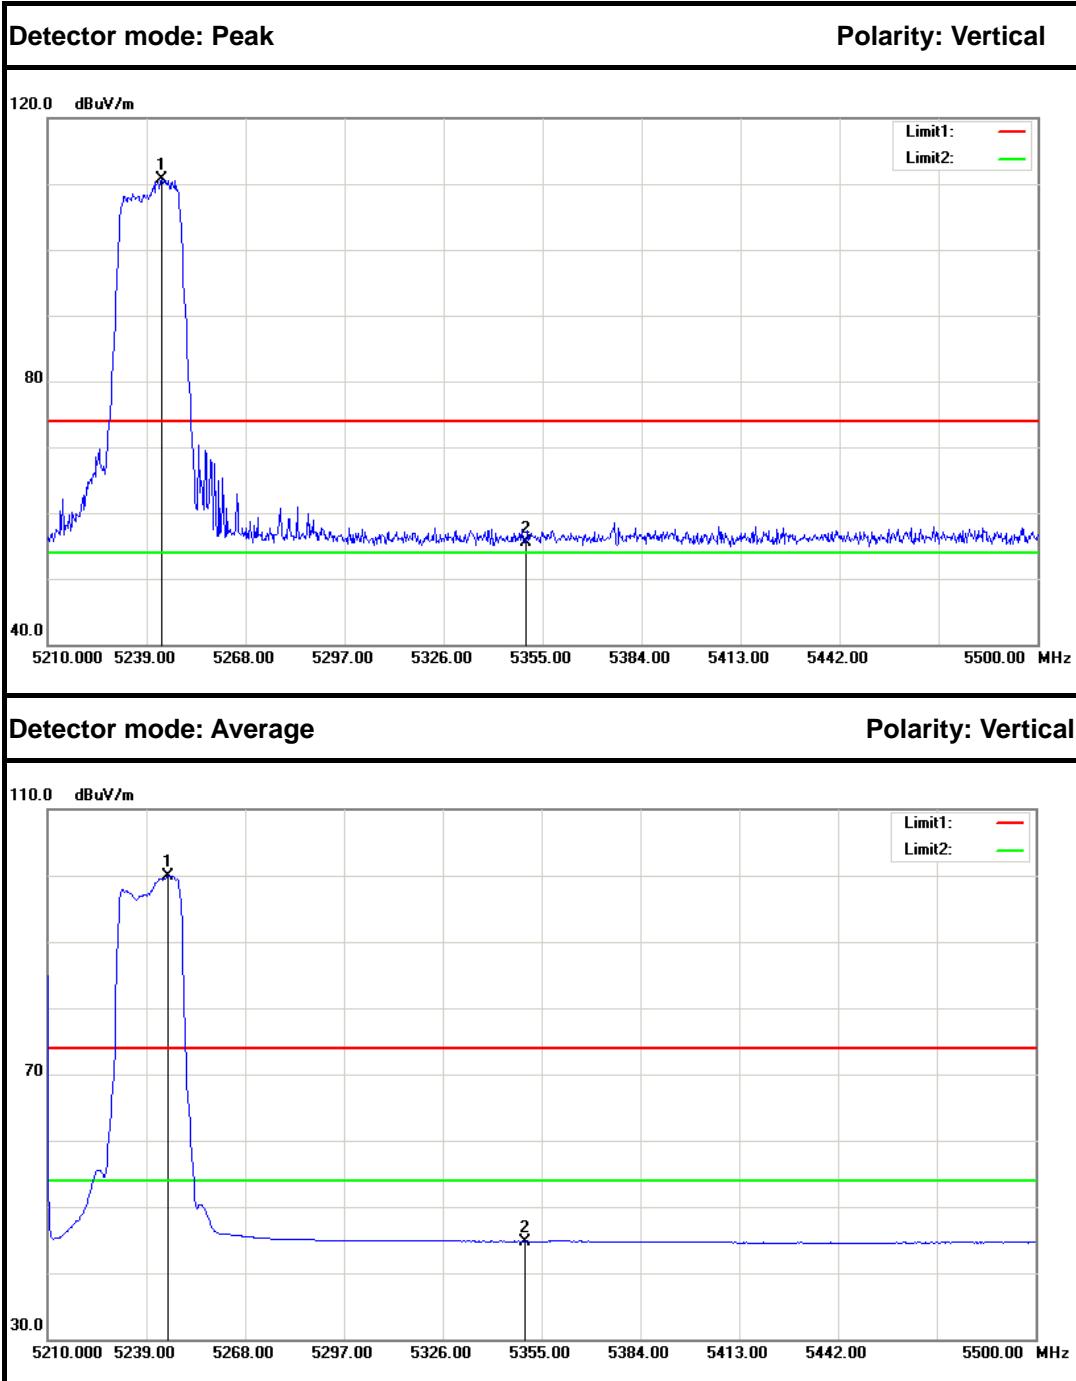IEEE 802.11n HT 20 MHz mode / 5240 MHz



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5243.350	105.37	5.41	110.78	---	---	Peak	Vertical
2	5350.000	49.95	5.60	55.55	74.00	-18.45	Peak	Vertical
1	5245.380	94.47	5.42	99.89	---	---	Average	Vertical
2	5350.000	39.18	5.60	44.78	54.00	-9.22	Average	Vertical

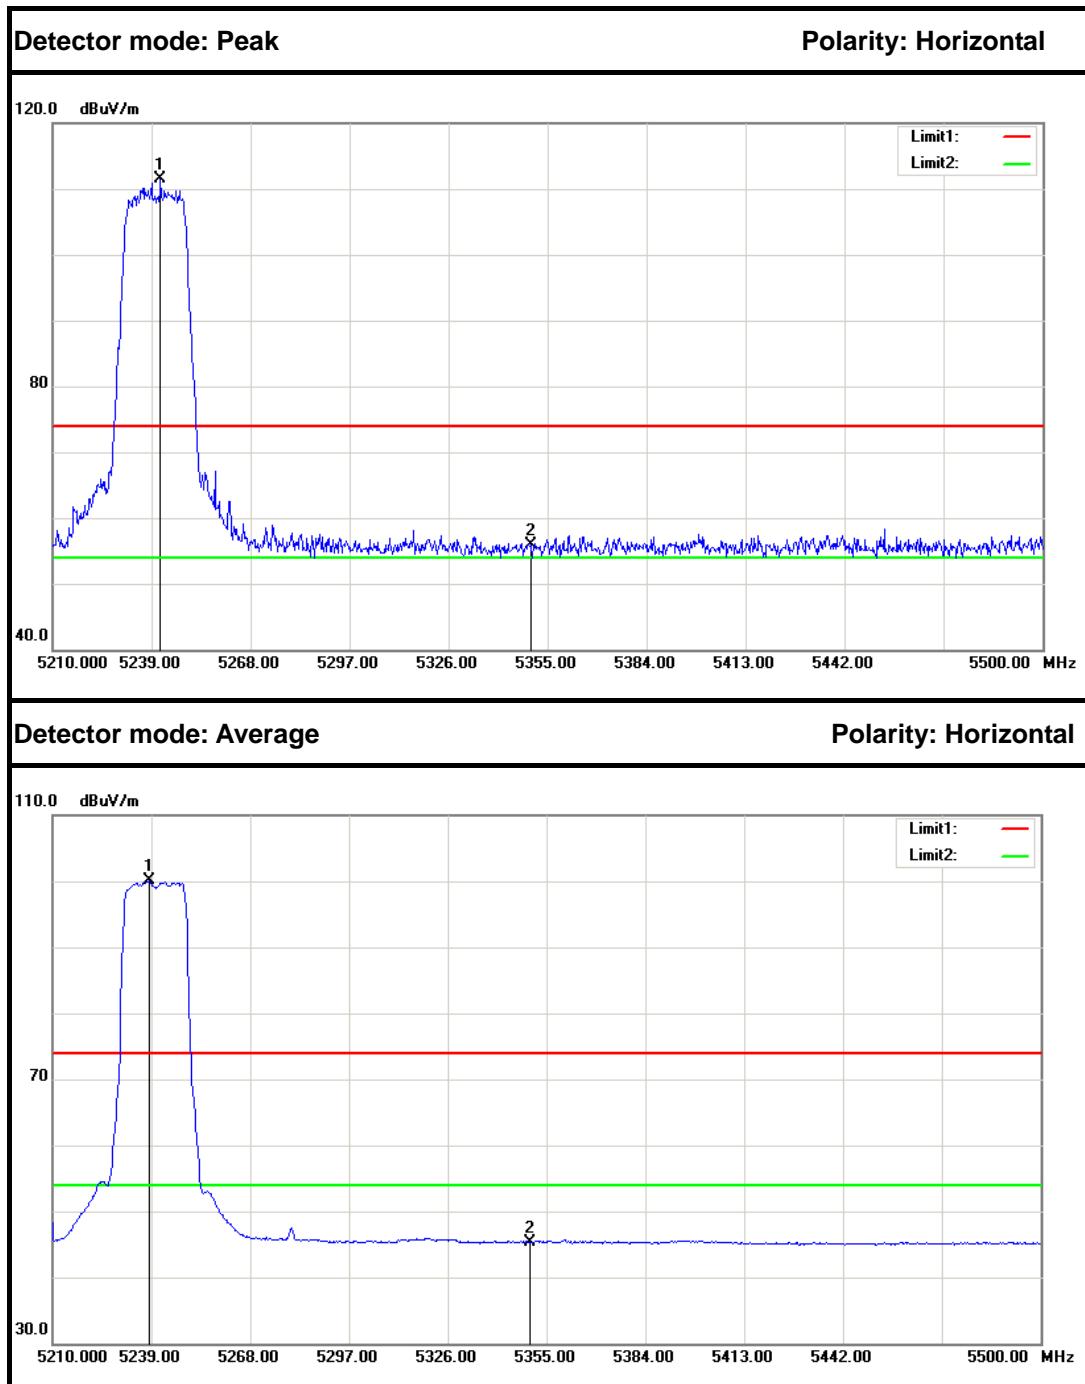


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5241.610	106.02	5.41	111.43	---	---	Peak	Horizontal
2	5350.000	50.36	5.60	55.96	74.00	-18.04	Peak	Horizontal
1	5238.420	94.63	5.40	100.03	---	---	Average	Horizontal
2	5350.000	39.74	5.60	45.34	54.00	-8.66	Average	Horizontal




Combine with Antenna 0 and Antenna 1

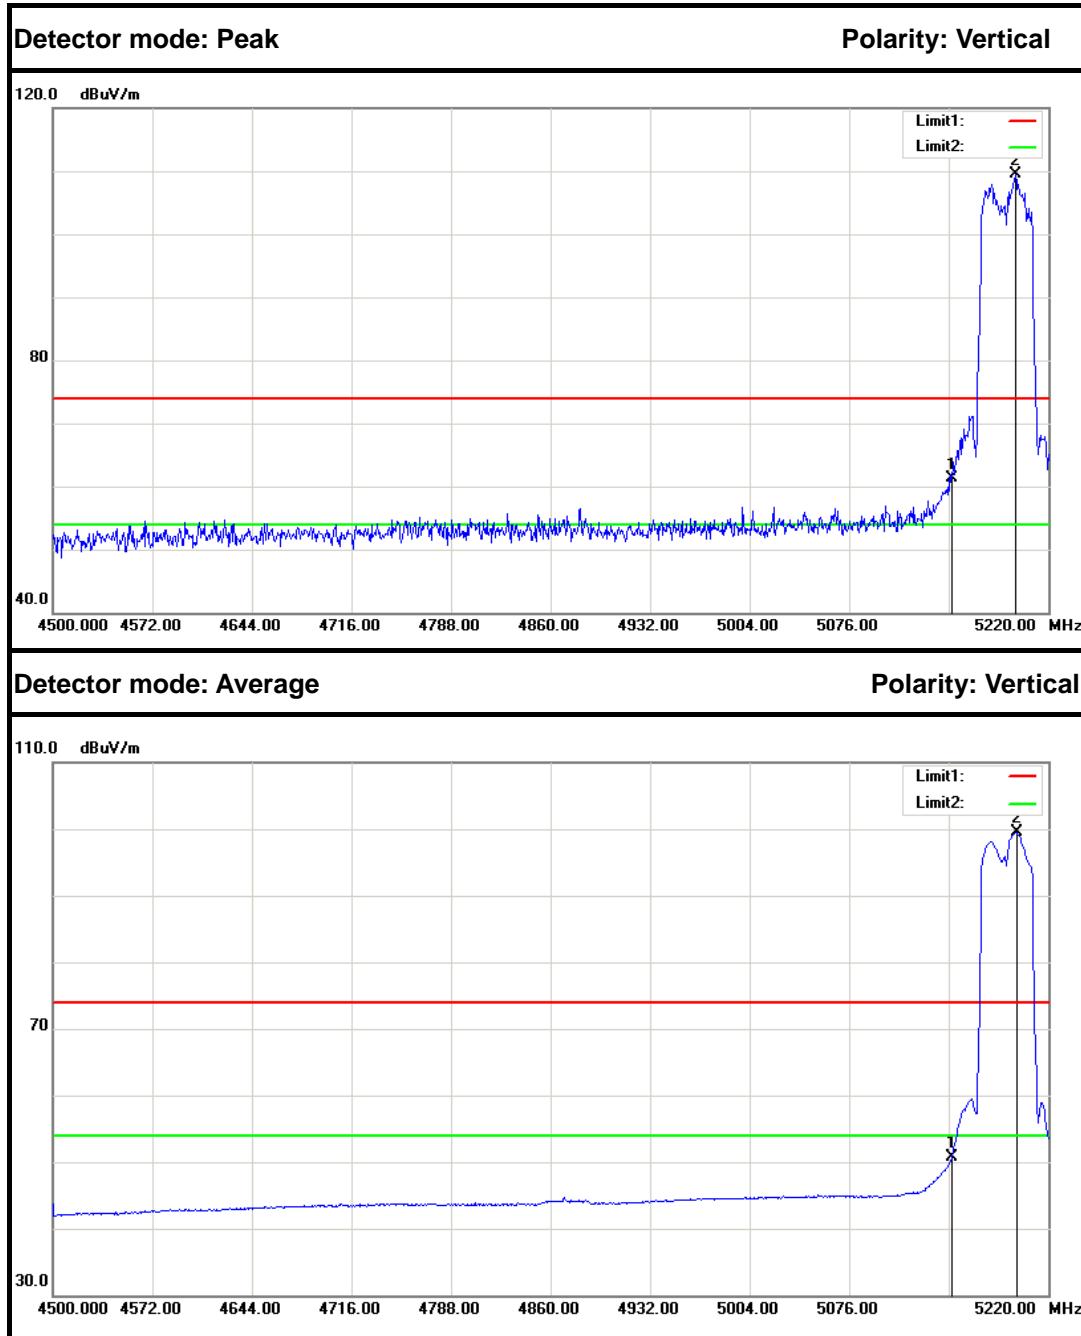IEEE 802.11n HT 40 MHz mode / 5190 MHz



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5150.000	56.11	5.25	61.36	74.00	-12.64	Peak	Vertical
2	5196.240	104.10	5.33	109.43	---	---	Peak	Vertical
1	5150.000	45.38	5.25	50.63	54.00	-3.37	Average	Vertical
2	5196.960	94.09	5.33	99.42	---	---	Average	Vertical

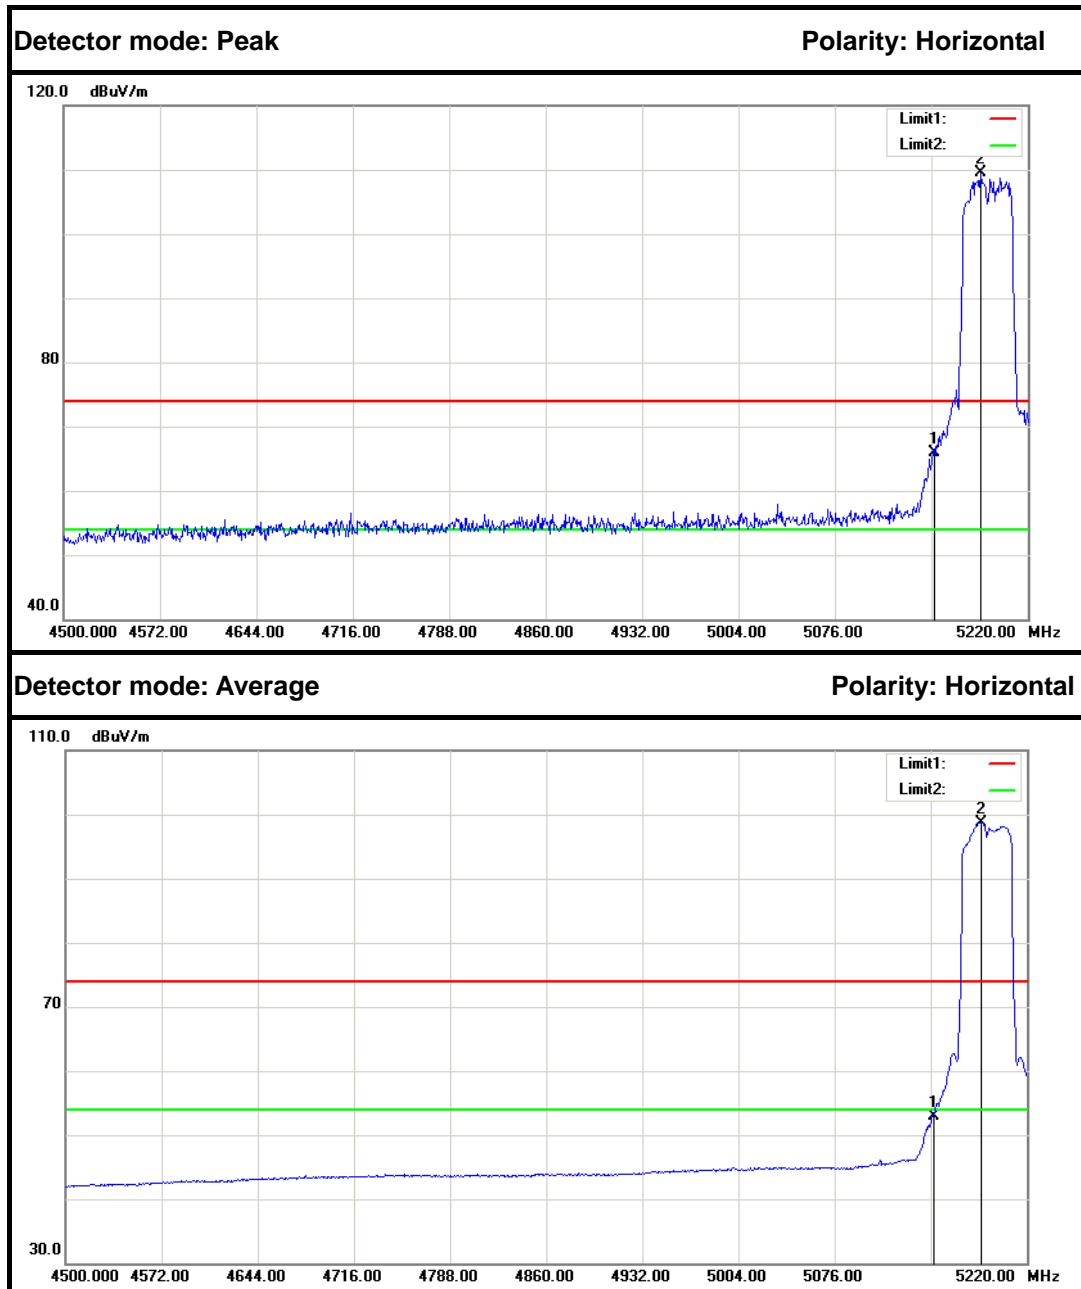


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5150.000	60.71	5.25	65.96	74.00	-8.04	Peak	Horizontal
2	5184.720	104.17	5.31	109.48	---	---	Peak	Horizontal
1	5150.000	47.58	5.25	52.83	54.00	-1.17	Average	Horizontal
2	5186.160	93.47	5.31	98.78	---	---	Average	Horizontal



IEEE 802.11n HT 40 MHz mode / 5230 MHz


Detector mode: Peak

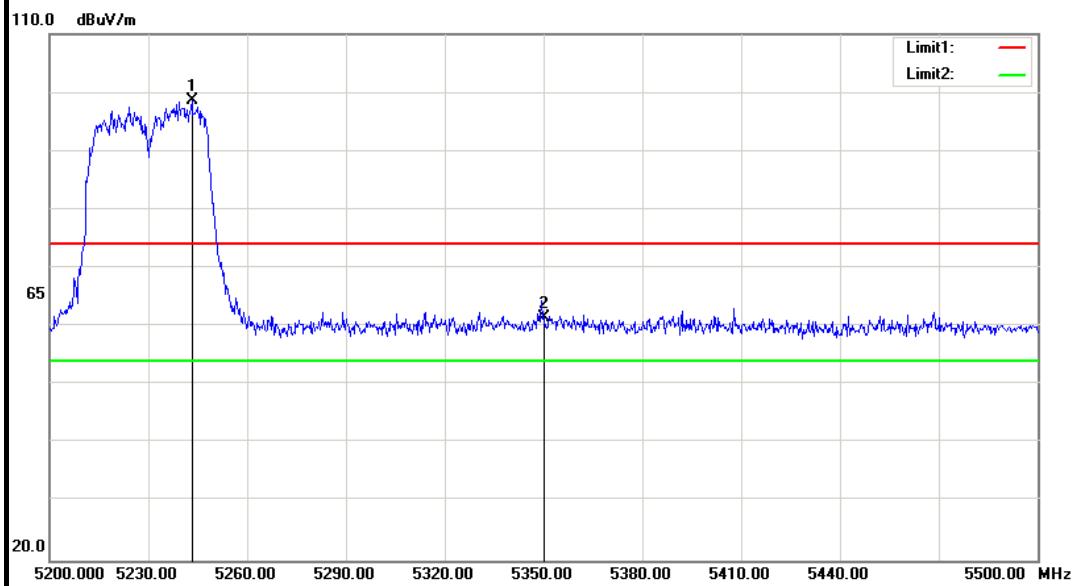Polarity: Vertical




Detector mode: Average

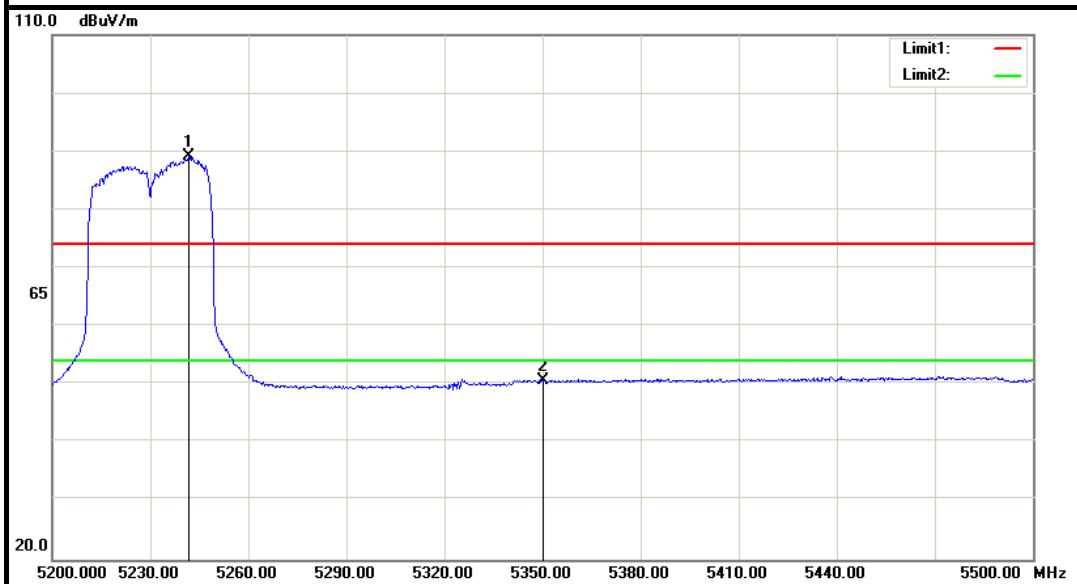Polarity: Vertical




No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5243.200	93.13	5.41	98.54	---	---	Peak	Vertical
2	5350.000	55.86	5.60	61.46	74.00	-12.54	Peak	Vertical
1	5241.700	83.88	5.41	89.29	---	---	Average	Vertical
2	5350.000	45.07	5.60	50.67	54.00	-3.33	Average	Vertical

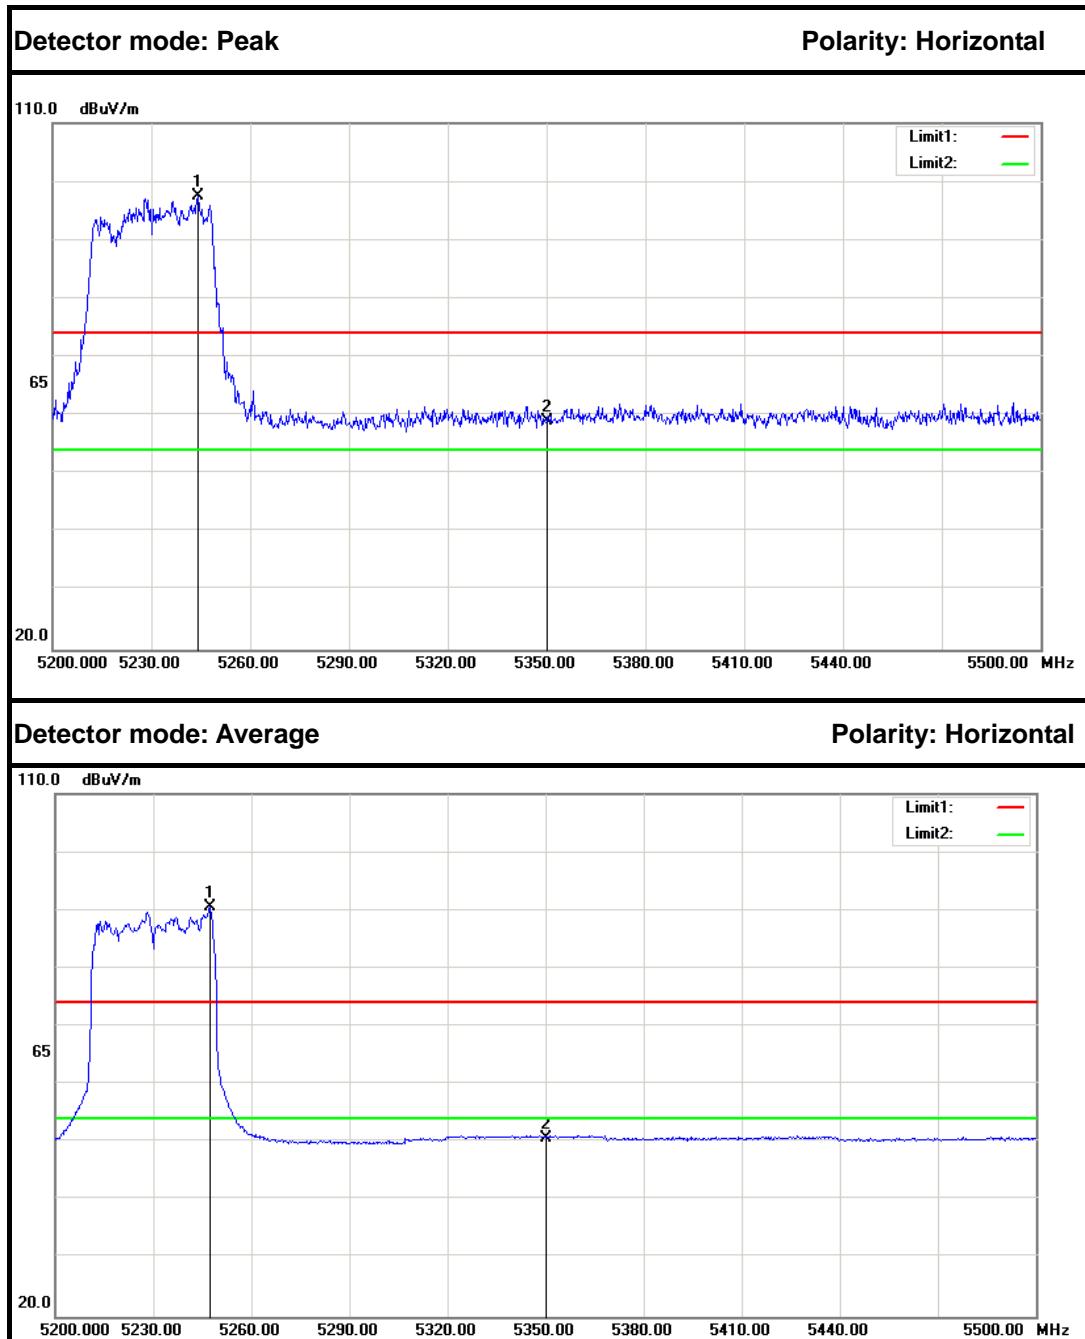


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5244.100	92.15	5.41	97.56	---	---	Peak	Horizontal
2	5350.000	53.43	5.60	59.03	74.00	-14.97	Peak	Horizontal
1	5247.400	85.03	5.42	90.45	---	---	Average	Horizontal
2	5350.000	45.17	5.60	50.77	54.00	-3.23	Average	Horizontal



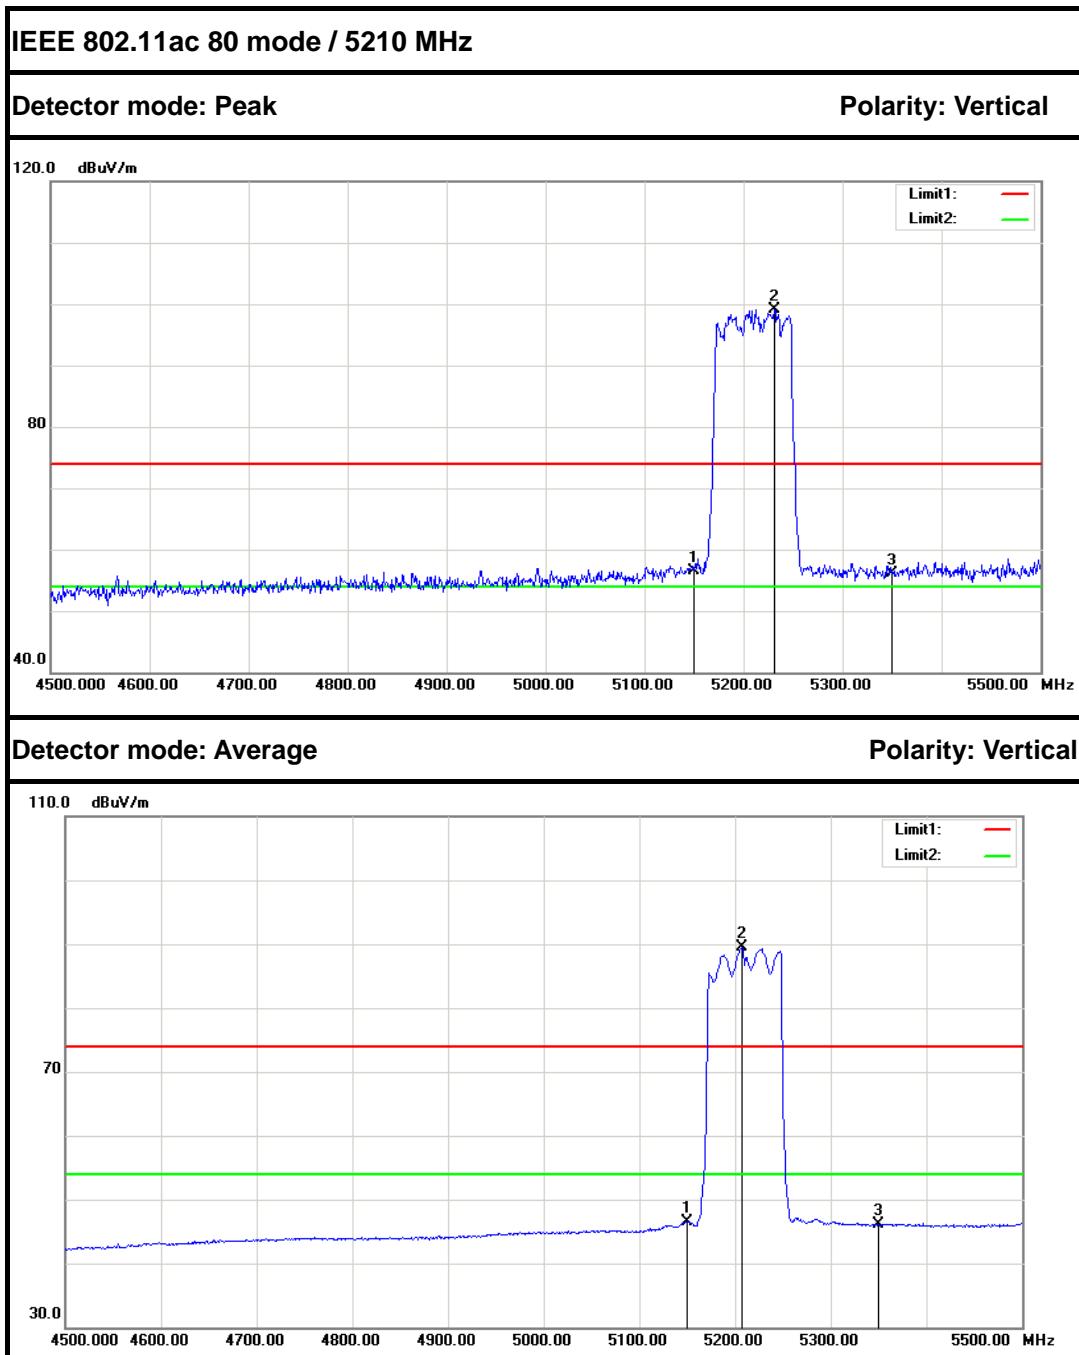Combine with Antenna 0 and Antenna 1



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5150.000	51.25	5.25	56.50	74.00	-17.50	Peak	Vertical
2	5231.000	93.73	5.39	99.12	---	---	Peak	Vertical
3	5350.000	50.46	5.60	56.06	74.00	-17.94	Peak	Vertical
1	5150.000	41.23	5.25	46.48	54.00	-7.52	Average	Vertical
2	5207.000	84.08	5.35	89.43	---	---	Average	Vertical
3	5350.000	40.46	5.60	46.06	54.00	-7.94	Average	Vertical

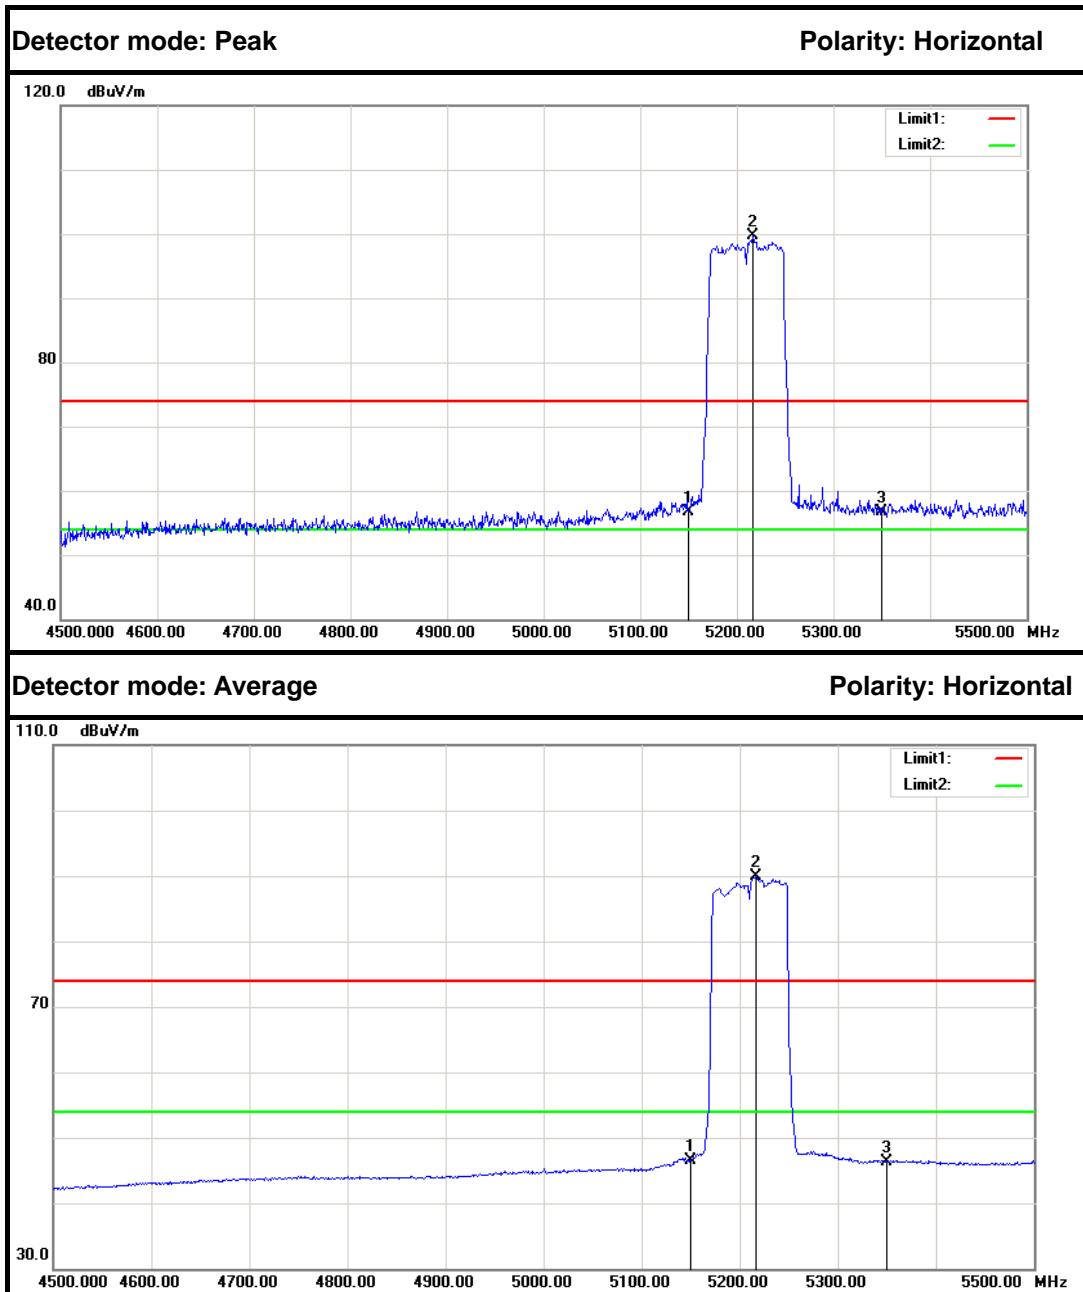

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5150.000	51.54	5.25	56.79	74.00	-17.21	Peak	Vertical
2	5217.000	94.35	5.37	99.72	---	---	Peak	Vertical
3	5350.000	51.13	5.60	56.73	74.00	-17.27	Peak	Vertical
1	5150.000	41.27	5.25	46.52	54.00	-7.48	Average	Vertical
2	5216.000	84.56	5.36	89.92	---	---	Average	Vertical
3	5350.000	40.74	5.60	46.34	54.00	-7.66	Average	Vertical



6.6 PEAK POWER SPECTRAL DENSITY

6.6.1 LIMIT

According to §15.407(a) & FCC R&O FCC 14-30

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Note to paragraph (a)(3): The Commission strongly recommends that parties employing U-NII devices to provide critical communications services should determine if there are any nearby Government radar systems that could affect their operation.


6.6.2 MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY52221469	02/21/2017	02/20/2018

Remark: Each piece of equipment is scheduled for calibration once a year.



6.6.3 TEST CONFIGURATION



6.6.4 TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. For devices operating in the bands 5.15-5.25 GHz, Set the spectrum analyzer as RBW = 1MHz, VBW = 3MHz, Span > 26dB bandwidth, Sweep=1ms
3. For devices operating in the bands 5.725-5.85 GHz, Set the spectrum analyzer as RBW = 1MHz, VBW = 3MHz, Span > 26dB bandwidth, Sweep=1ms
4. Record the max. reading.
5. Repeat the above procedure until the measurements for all frequencies are completed



6.6.5 TEST RESULTS

Test Data

Test mode: IEEE 802.11a mode / 5180 ~ 5240MHz

Channel	Frequency (MHz)	PPSD (dBm)		Limit (dBm)	Margin		Result
		Antenna 0	Antenna 1		Antenna 0	Antenna 1	
Low	5180	0.713	2.223		-16.287	-14.777	PASS
Mid	5200	1.569	1.945	17	-15.431	-15.055	PASS
High	5240	0.642	1.348		-16.358	-15.652	PASS

Test mode: IEEE 802.11a mode / 5745 ~ 5825MHz

Channel	Frequency (MHz)	PPSD (dBm)		factor	Limit (dBm)	Margin		Result
		Antenna 0	Antenna 1			Antenna 0	Antenna 1	
Low	5745	4.628	3.217	-3.01		-28.382	-29.793	PASS
Mid	5785	4.544	4.999	-3.01	30	-28.466	-28.011	PASS
High	5825	4.596	4.018	-3.01		-28.414	-28.992	PASS

Remark: factor = $10 \cdot \log_{10}(500/\text{RBW})$;

Test mode: IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz

Channel	Frequency (MHz)	PPSD (dBm)		Total (dBm)	Limit (dBm)	Margin	Result
		Antenna 0	Antenna 1				
Low	5180	0.794	1.184	4.004		-11.996	PASS
Mid	5200	0.821	1.525	4.198	16	-11.802	PASS
High	5240	0.207	0.740	3.492		-12.508	PASS

Test mode: IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz

Channel	Frequency (MHz)	PPSD (dBm)		factor	Total (dBm)	Limit (dBm)	Margin	Result
		Antenna 0	Antenna 1					
Low	5745	3.583	2.678	-3.01	3.786		-25.214	PASS
Mid	5785	3.393	3.979	-3.01	3.520	29	-25.480	PASS
High	5825	4.508	3.642	-3.01	2.815		-26.185	PASS

Remark: factor = $10 \cdot \log_{10}(500/\text{RBW})$;

**Test mode: IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz**

Channel	Frequency (MHz)	PPSD (dBm)		Total (dBm)	Limit (dBm)	Margin	Result
		Antenna 0	Antenna 1				
Low	5190	-1.958	-1.606	1.232	16	-14.768	PASS
High	5230	-2.474	-2.500	0.523		-15.477	PASS

Test mode: IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz

Channel	Frequency (MHz)	PPSD (dBm)		factor	Total (dBm)	Limit (dBm)	Margin	Result
		Antenna 0	Antenna 1					
Low	5755	3.538	3.834	-3.01	3.689	29	-25.311	PASS
High	5795	2.635	3.159	-3.01	2.905		-26.095	PASS

Remark: factor =10*log10(500/RBW);**Test mode: IEEE 802.11ac 80 mode / 5210MHz**

Channel	Frequency (MHz)	PPSD (dBm)		Total (dBm)	Limit (dBm)	Margin	Result
		Antenna 0	Antenna 1				
	5210	-7.539	-8.808	-5.117	16	-21.117	PASS

Test mode: IEEE 802.11ac 80 mode / 5775MHz

Channel	Frequency (MHz)	PPSD (dBm)		factor	Total (dBm)	Limit (dBm)	Margin	Result
		Antenna 0	Antenna 1					
	5775	-3.413	-4.411	-3.01	-3.883	29	-32.883	PASS

Remark: factor =10*log10(500/RBW);




Test Plot


Antenna 0



IEEE 802.11a mode / 5180 ~ 5240MHz


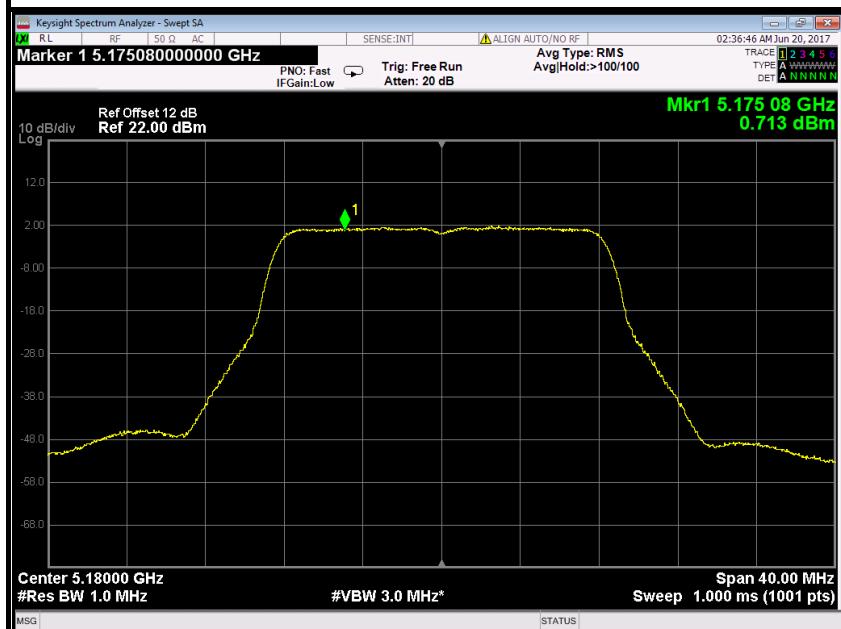
PPSD (CH Low)



PPSD (CH Mid)

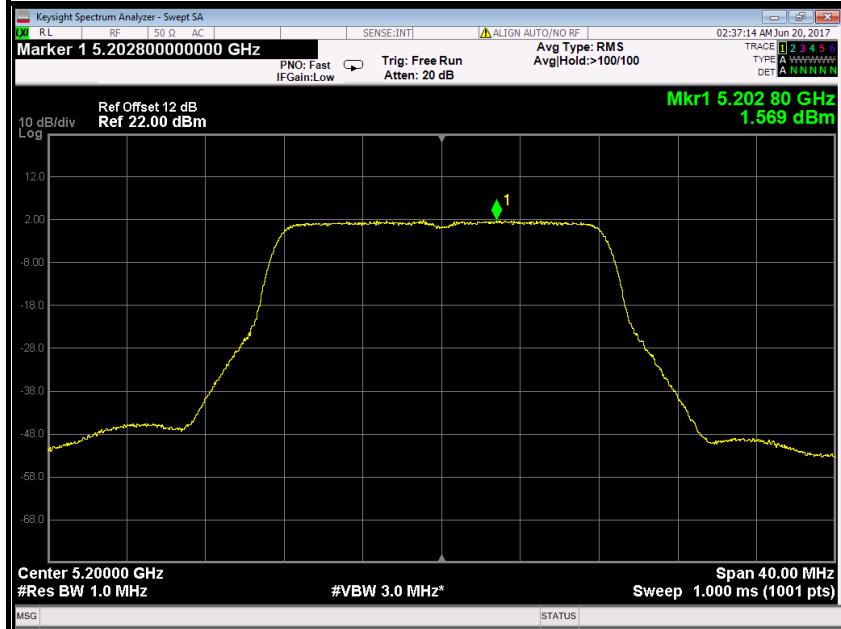

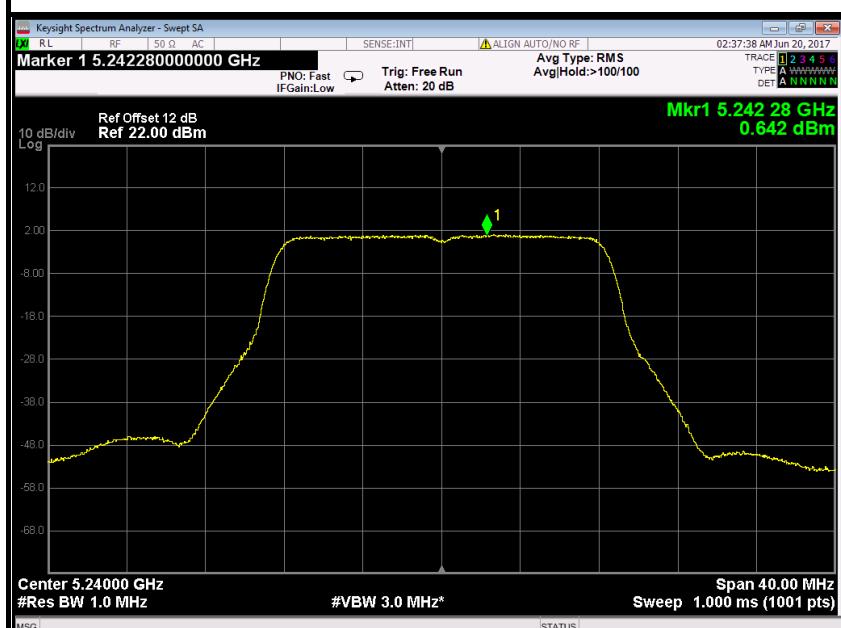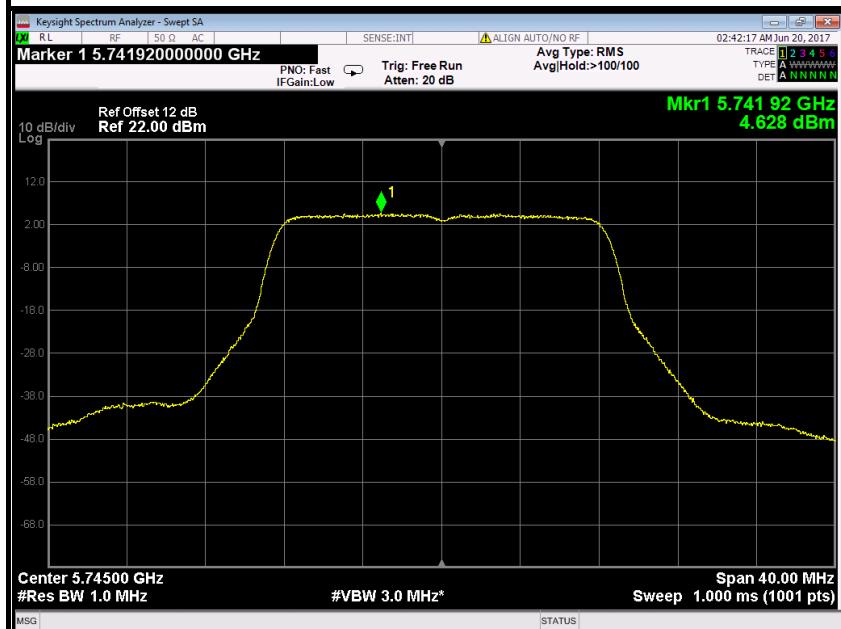**PPSD (CH High)****IEEE 802.11a mode / 5745 ~ 5825MHz****PPSD (CH Low)**

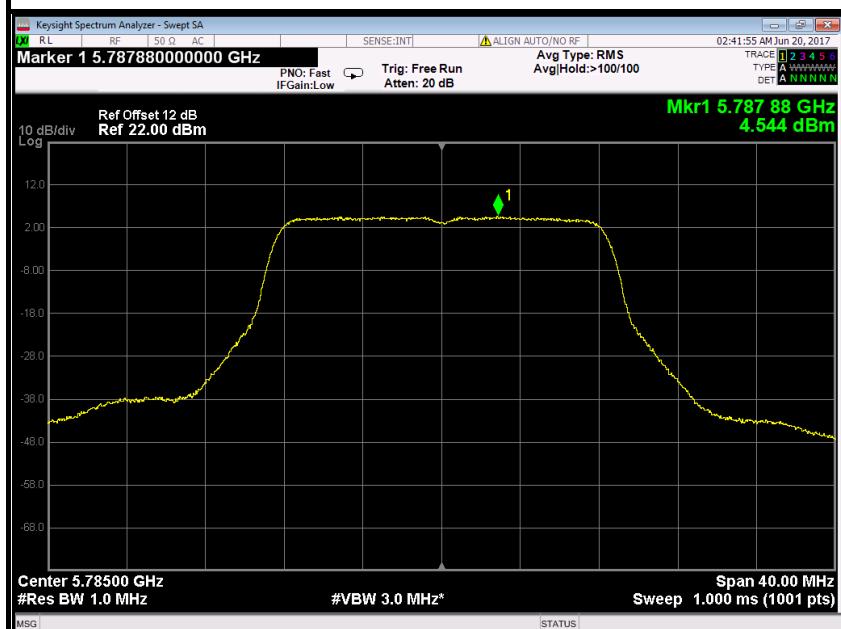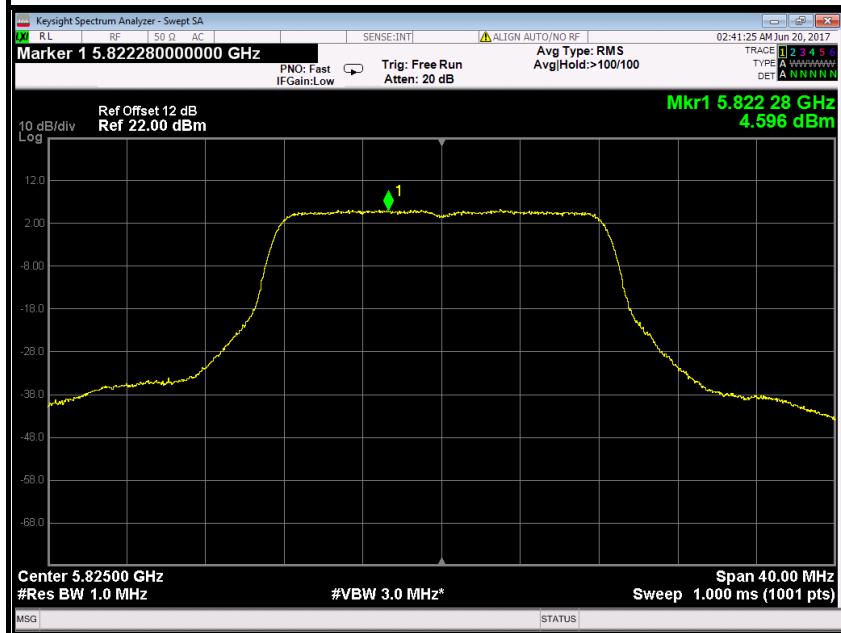
**PPSD (CH Mid)****PPSD (CH High)**




Antenna 1



IEEE 802.11a mode / 5180 ~ 5240MHz


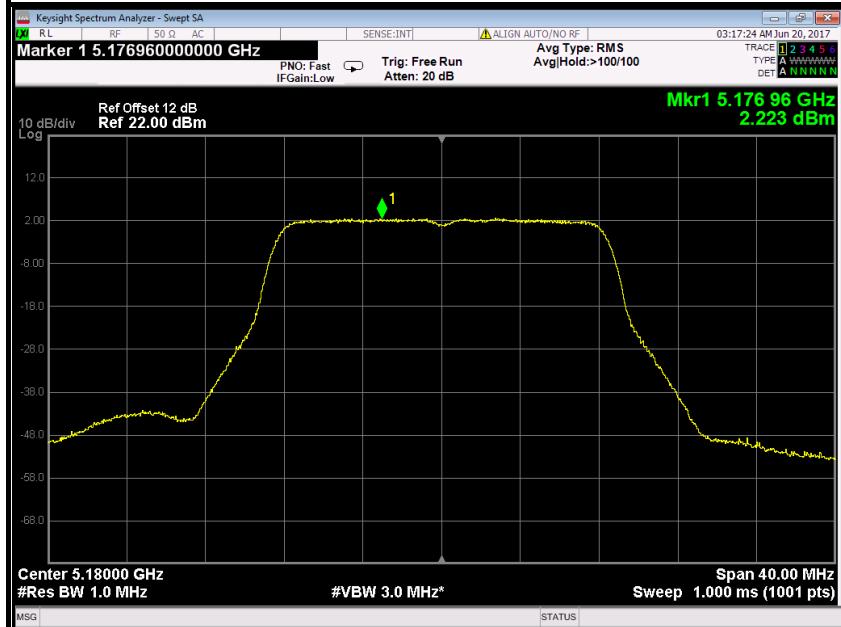
PPSD (CH Low)



PPSD (CH Mid)

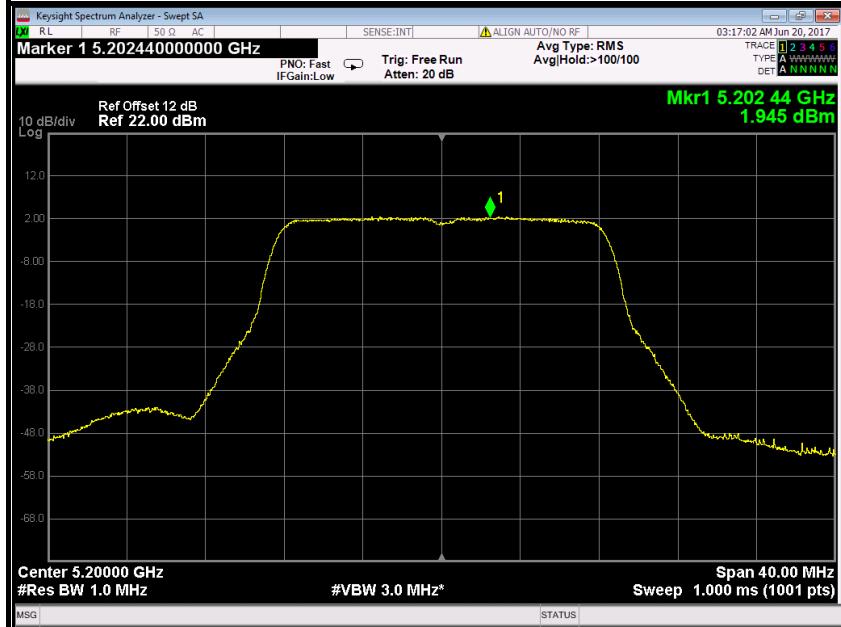

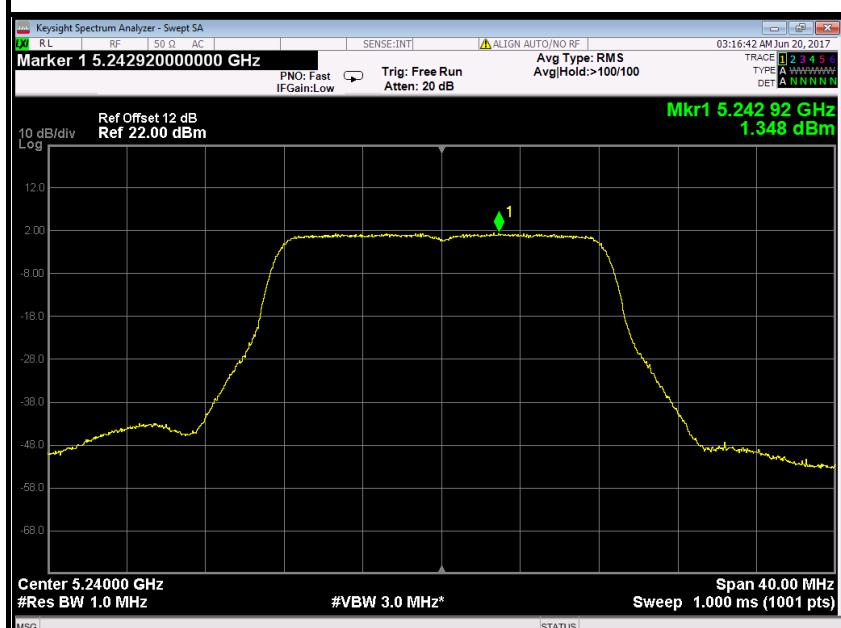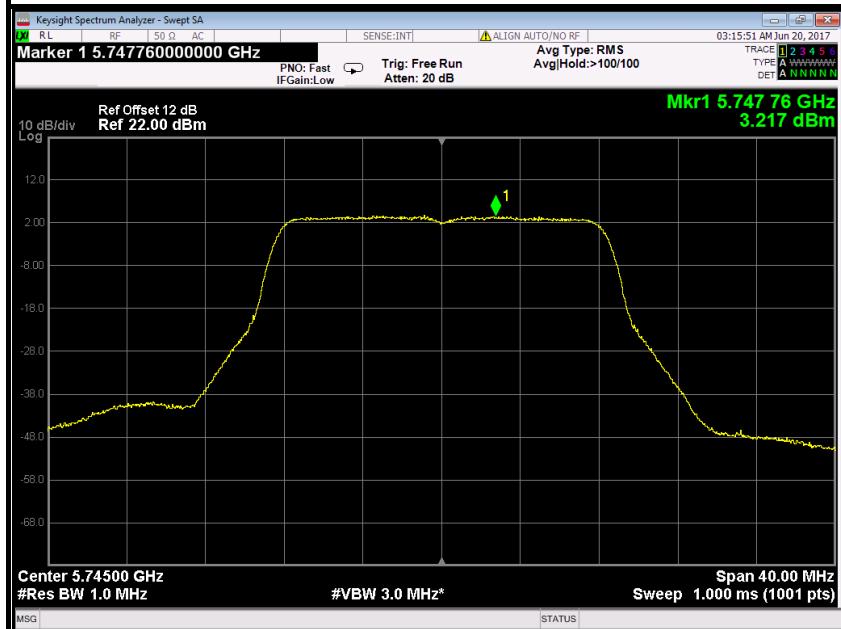**PPSD (CH High)****IEEE 802.11a mode / 5745 ~ 5825MHz****PPSD (CH Low)**

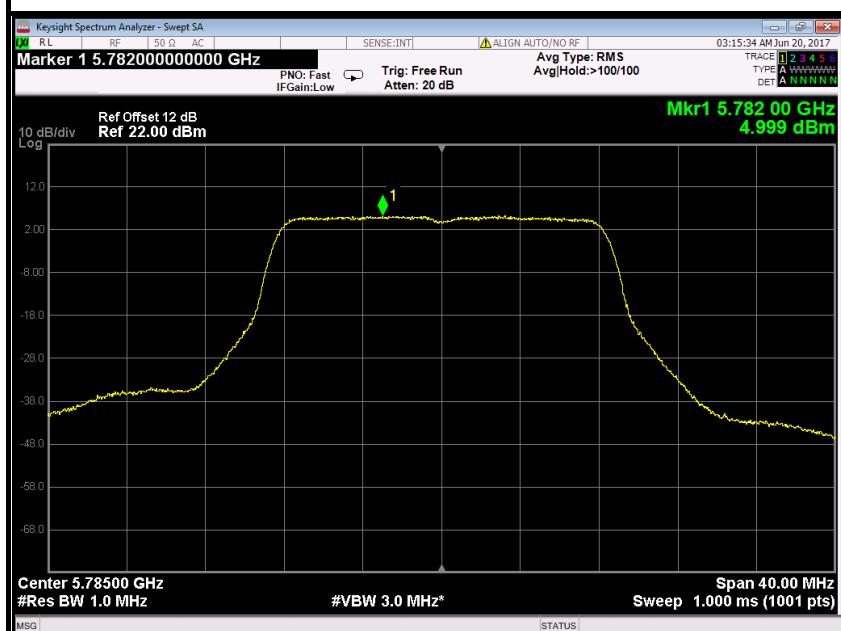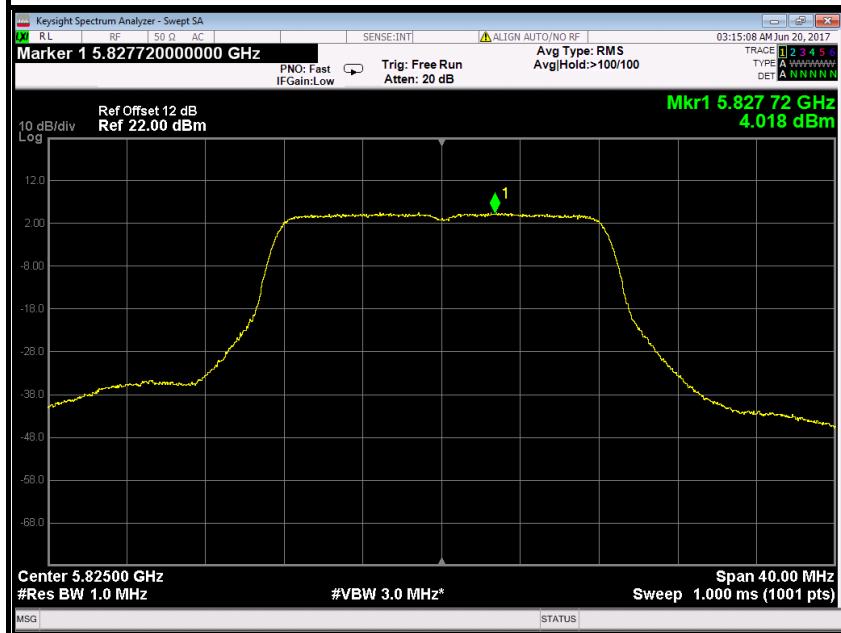
**PPSD (CH Mid)****PPSD (CH High)**




Antenna 0


IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz


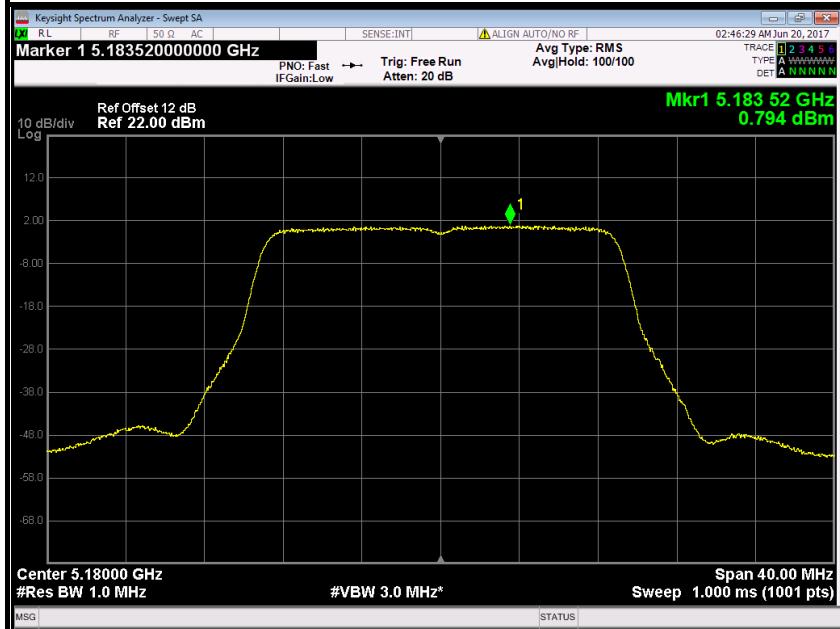
PPSD (CH Low)



PPSD (CH Mid)

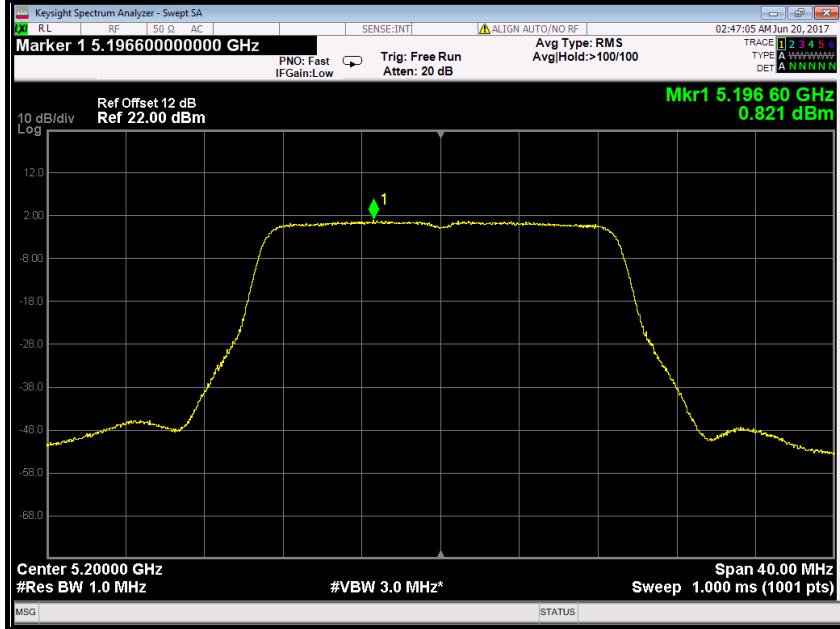

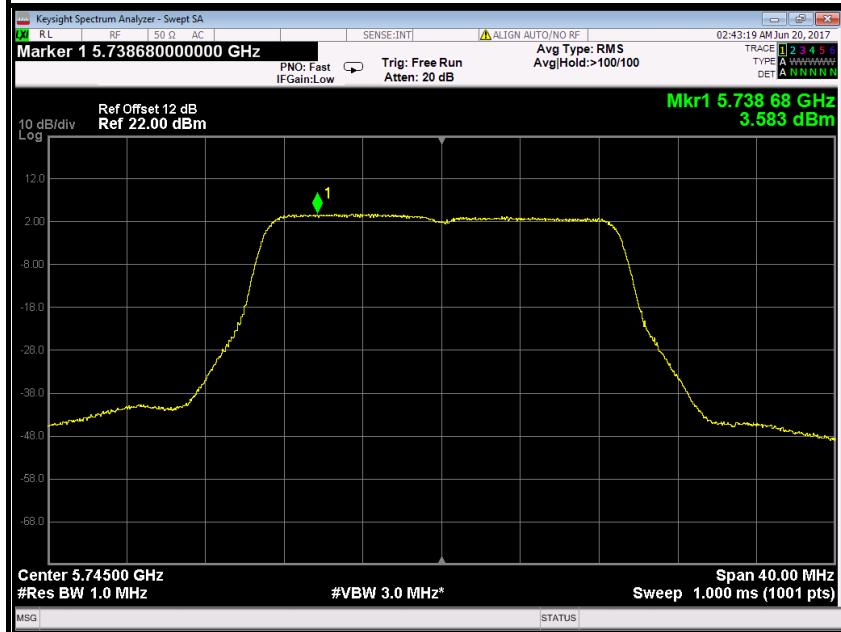**PPSD (CH High)****IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz****PPSD (CH Low)**

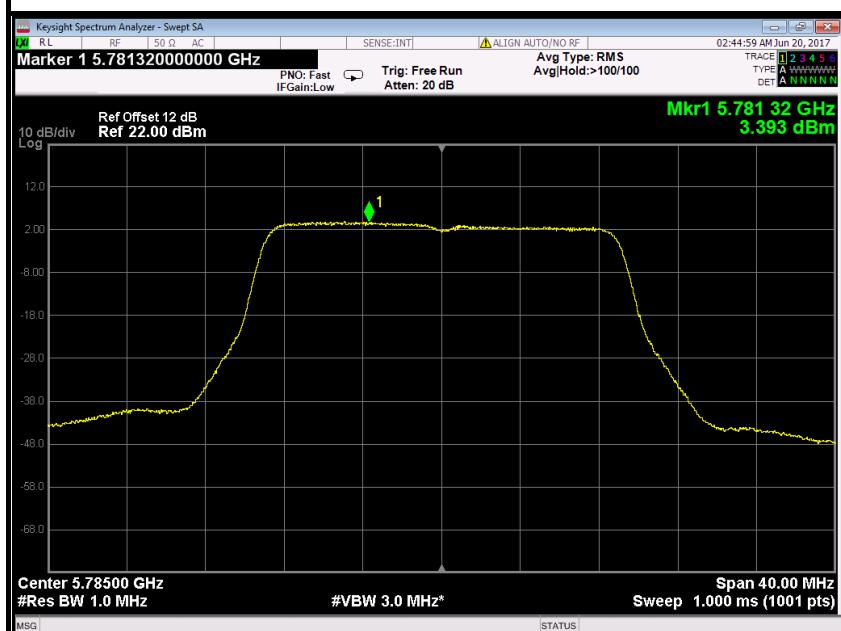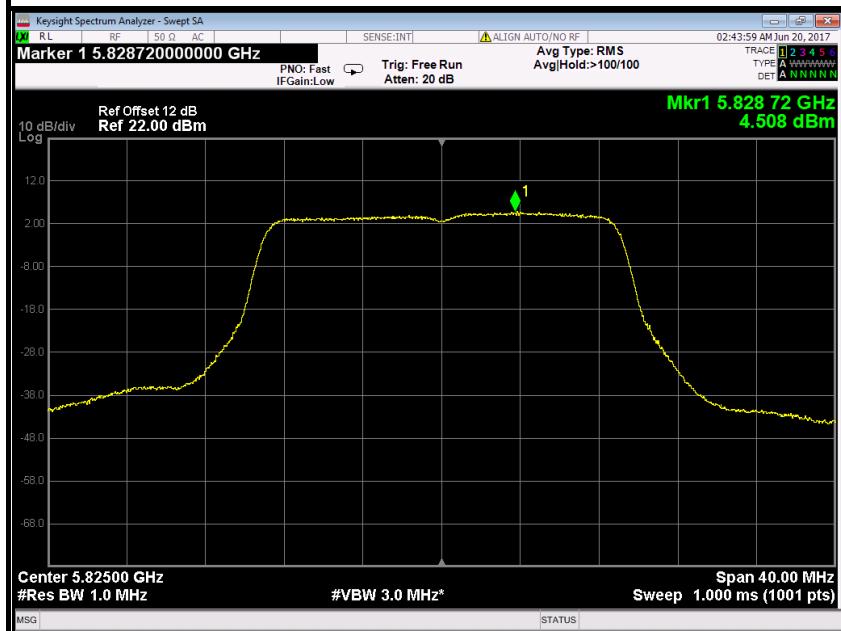
**PPSD (CH Mid)****PPSD (CH High)**




Antenna 1


IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz

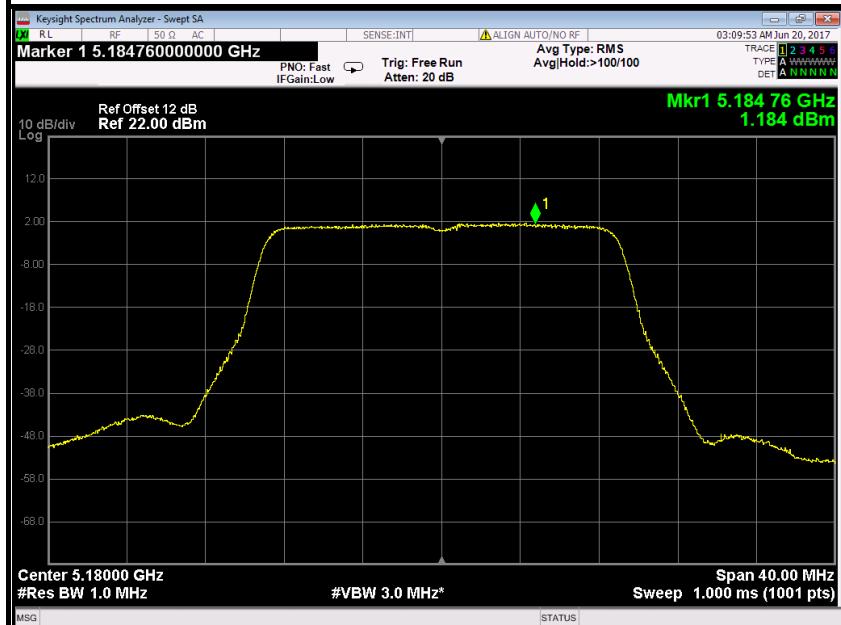PPSD (CH Low)



PPSD (CH Mid)

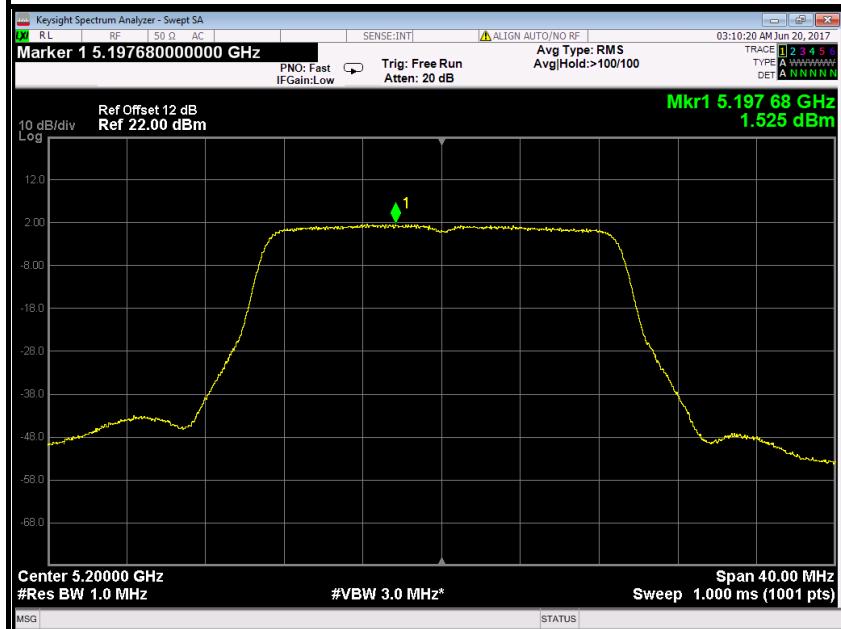

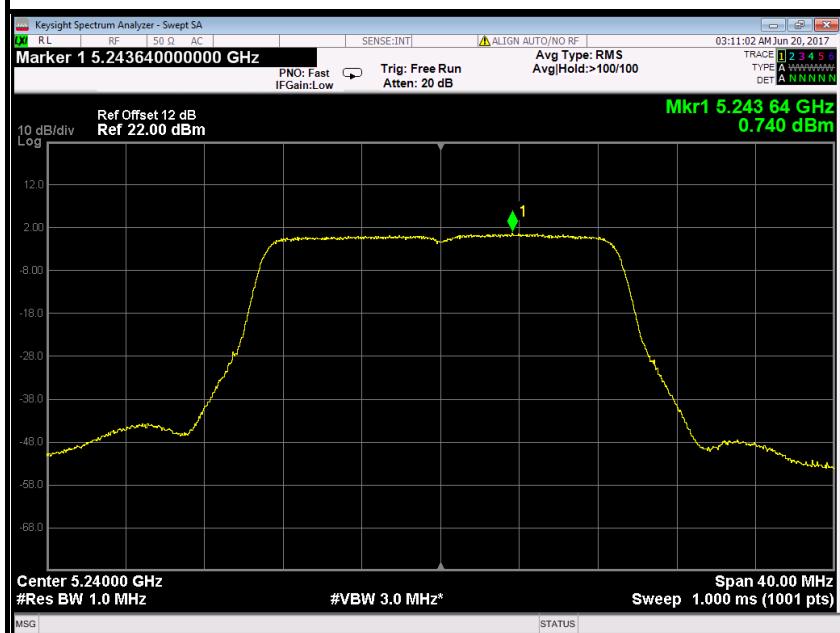**PPSD (CH High)****IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz****PPSD (CH Low)**