



Test Report No.:  
**FCCSZ2025-0001**

## RF Test Report

**FCC ID** : 2AKIT-CHC09

**NAME OF SAMPLE** : Doorbell Camera Hub G410

**APPLICANT** : Lumi United Technology Co., Ltd

**CLASSIFICATION OF TEST** : N/A

**CVC Testing Technology (Shenzhen) Co., Ltd.**



<b>Applicant</b>		Name: Lumi United Technology Co., Ltd  Address: B1, Chongwen Park, Nanshan iPark, Liuxian Avenue, Taoyuan Residential District, Nanshan District, Shenzhen 518000, China	
<b>Manufacturer</b>		Name: Lumi United Technology Co., Ltd  Address: B1, Chongwen Park, Nanshan iPark, Liuxian Avenue, Taoyuan Residential District, Nanshan District, Shenzhen 518000, China	
<b>Equipment Under Test</b>		Name: Doorbell Camera Hub G410  Model/Type: CH-C09E  Additional Model: CH-C09D  Serial NO.: N/A  Sample NO.: 1-1	
Date of Receipt.	2024-12-19	Date of Testing	2024.12-19 ~ 2025-01-18
<b>Test Specification</b>		<b>Test Result</b>	
FCC Part 15, Subpart C (15.255)		PASS	
<b>Evaluation of Test Result</b>		The equipment under test was found to comply with the requirements of the standards applied.	
		Seal of CVC  <b>Issue Date: 2025-01-18</b>	
Compiled by:   <u>Liang Jiatong</u> Name      Signature		Reviewed by:   <u>Mo Xianbiao</u> Name      Signature	Approved by:   <u>Dong Sanbi</u> Name      Signature
<b>Other Aspects: NONE.</b>			
Abbreviations:OK,    Pass= passed		Fail = failed	N/A= not applicable
EUT= equipment, sample(s) under tested			

This test report relates only to the EUT, and shall not be reproduced except in full, without written approval of CVC.



## TABLE OF CONTENTS

RELEASE CONTROL RECORD .....	4
<b>1 SUMMARY OF TEST RESULTS .....</b>	<b>5</b>
1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS .....	6
1.2 MEASUREMENT UNCERTAINTY .....	7
1.3 TEST LOCATION .....	7
<b>2 GENERAL INFORMATION .....</b>	<b>8</b>
2.1 GENERAL PRODUCT INFORMATION .....	8
2.2 OTHER INFORMATION .....	8
2.3 TEST MODE .....	8
2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	9
2.5 DESCRIPTION OF SUPPORT UNITS .....	9
2.6 FAR FIELD CONDITION FOR FREQUENCY ABOVE 18GHz .....	10
2.7 RADIATED TEST SETUP .....	11
<b>3 TEST TYPES AND RESULTS .....</b>	<b>13</b>
3.1 CONDUCTED EMISSION MEASUREMENT .....	13
3.2 TRANSMITTER SPURIOUS EMISSIONS MEASUREMENT .....	15
3.3 DUTY CYCLE, OFF TIME REQUIREMENT .....	27
3.4 BANDWIDTH MEASUREMENT .....	30
3.5 EIRP POWER MEASUREMENT .....	32
3.6 FREQUENCY STABILITY .....	34
3.7 ANTENNA REQUIREMENT .....	35
<b>4 PHOTOGRAPHS OF TEST SETUP .....</b>	<b>36</b>
<b>5 PHOTOGRAPHS OF THE EUT .....</b>	<b>37</b>



## **RELEASE CONTROL RECORD**

<b>ISSUE NO.</b>	<b>REASON FOR CHANGE</b>	<b>DATE ISSUED</b>
FCCSZ2025-0001	Original release	2025-01-18



## 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15.255			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	N/A	DC power supply
15.255(d)	Transmitter Spurious Emissions	PASS	See section 3.2
15.215(c)	Occupied Bandwidth	PASS	See section 3.4
15.255(c)	Duty cycle, Off Time Requirement	PASS	See section 3.3
15.255(c)	EIRP	PASS	See section 3.5
15.255(f)	Frequency stability	PASS	See section 3.6
15.255(h)	Group Installation	N/A	The test is not applicable since there are no external phase-locking inputs in this EUT
15.203	Antenna Requirement	PASS	See section 3.7



## 1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial Number	Cal. interval	Cal. Due
Radiation Spurious(1GHz-40GHz)					/
Signal&Spectrum Analyzer	Rohde&Schwarz	FSV 40	101898	1 year	2025.4.27
EMI Test Receiver	Rohde&Schwarz	ESR3	102693	1 year	2025.5.24
Antenna(30MHz~1001MHz)	SCHWARZBECK	VULB 9168	1133	1 year	2026.1.22
Horn antenna(1GHz-18GHz)	ETS	3117	227611	1 year	2025.4.02
Horn antenna(18GHz-40GHz)	QMS	QMS-00880	22051	1 year	2025.3.24
3m anechoic chamber	MORI	966	CS0300011	3 year	2026.5.18
Filter group(RSE-BT/WiFi)	Rohde&Schwarz	WiFi /BT Variant 1	100820	1 year	2025.4.28
Filter group(RSE-Cellular)	Rohde&Schwarz	Cellular Variant 1	100768	1 year	2025.4.28
Preamplifier(1GHz-18GHz)	Rohde&Schwarz	SCU-18F	100801	1 year	2025.4.28
Preamplifier(18GHz-40GHz)	Rohde&Schwarz	SCU40A	101209	1 year	2025.4.28
#2 control room	MORI	433	CS0300028	3 year	2026.5.16
Temperature and humidity meter	/	C193561517	C193561517	1 year	2025.4.28
Radiation Spurious(Below 1GHz)					/
EMI Test Receiver	Rohde&Schwarz	ESR 26	101718	1 year	2025/5/24
Antenna(30MHz~1000MHz)	SCHWARZBECK	VULB 9168	01132	1 year	2026/1/12
Horn antenna(1GHz-18GHz)	ETS	3117	227634	1 year	2025/3/25
Horn antenna(18GHz-40GHz)	SCHWARZBECK	BBHA 9170	01003	1 year	2025/3/25
3m anechoic chamber	MORI	966	CS0200019	3 year	2026/5/18
LISN (single-phase )	Rohde&Schwarz	ESH3-Z6	102152/102156	1 year	2025/4/27
Preamplifier(10kHz-1GHz)	Rohde&Schwarz	SCU-01F	100298	1 year	2025/4/28
Radiation Spurious(Above 40GHz)					/
Equipment	Manufacturer	Model No.	Serial Number	Cal. interval	Cal. Due
3m anechoic chamber	MORI	966	CS0300011	3 year	2026.5.18
#2 control room	MORI	433	CS0300028	3 year	2026.5.16
Temperature and humidity meter	/	C193561517	C193561517	1 year	2025.4.28
Signal&Spectrum Analyzer	keysight	N9040B	CS0300074	1 year	2025.9.24
SA Expansion Module(40-60GHz)	VDI	N9029AV19	CS0300075	3 year	2025.9.14
SA Expansion Module(60-90GHz)	VDI	N9029AV12	CS0300076	3 year	2025.9.14
SA Expansion Module(90-140GHz)	VDI	N9029AV08	CS0300077	3 year	2025.9.14
SA Expansion Module(140-220GHz)	VDI	N9029AV05	CS0300078	3 year	2025.9.14
SA Expansion Module(220-330GHz)	VDI	N9029AV03	CS0300079	3 year	2025.9.14
Horn antenna(40-60GHz)	CMI	HO19R	CS0300086	3 year	2025.9.14
Horn antenna(60-90GHz)	CMI	HO12R	CS0300088	3 year	2025.9.14
Horn antenna(90-140GHz)	CMI	HO08R	CS0300090	3 year	2025.9.14
Horn antenna(140-220GHz)	CMI	HO05R	CS0300092	3 year	2025.9.14
Horn antenna(220-330GHz)	CMI	HO03R	CS0300094	3 year	2025.9.14



## 1.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement Uncertainty		
No.	Item	Measurement Uncertainty
1	Occupied Channel Bandwidth	±1.86%
2	Radiated emission(9kHz-30MHz)	+/-5.6 dB
3	Radiated Emissions(30MHz-1GHz)	±5.0dB
4	Radiated Emissions(1GHz-18GHz)	±4.8dB
5	Radiated Emissions(18GHz-40GHz)	±5.1dB
6	Radiated Emissions(40GHz-60GHz)	±4.8dB
7	Radiated Emissions(60GHz-90GHz)	±4.8dB
8	Radiated Emissions(90GHz-140GHz)	±5.0dB
9	Radiated Emissions(140GHz-220GHz)	±5.1dB
10	Radiated Emissions(220GHz-300GHz)	±4.8dB
11	Temperature	±0.73°C
12	Supply voltages	±0.37 %
13	Humidity	±3.9 %

**Remark: 95% Confidence Levels, k=2.**

## 1.3 TEST LOCATION

The tests and measurements refer to this report were performed by EMC testing Lab. of CVC Testing Technology (Shenzhen) Co., Ltd.

Lab Address: No. 1301-14&16, Guanguang Road, Xinlan Community, Guanlan Subdistrict, Longhua District, Shenzhen, Guangdong, China

Post Code: 518110 Tel: 0755-23763060-8805

Fax: 0755-23763060 E-mail: sz-kf@cvc.org.cn

FCC(Test firm designation number: CN1363)

IC(Test firm CAB identifier number: CN0137)

CNAS(Test firm designation number: L16091)



## 2 GENERAL INFORMATION

### 2.1 GENERAL PRODUCT INFORMATION

PRODUCT	Doorbell Camera Hub G410
BRAND	N/A
TEST MODEL	CH-C09E
ADDITIONAL MODEL	CH-C09D
POWER SUPPLY	Battery Input: 4.5V==0.5A Wired Input: 12-24V DC 0.5A 12-24V AC 0.2A 50/60Hz
MODULATION TECHNOLOGY	FMCW
FREQUENCY RANGE	59 ~ 61.5GHz
PEAK OUTPUT POWER	19.9dBm (Maximum)
ANTENNA TYPE (Note 4)	Internal Antenna
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A

Note:

1. For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. EUT photo refer to report.
4. Since the above data and/or information is provided by the client, CVC is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
5. Only differences are the model no and appearance silkprint

### 2.2 OTHER INFORMATION

The EUT only have one channel.

CHANNEL	FREQUENCY (MHz)
1	60250

### 2.3 TEST MODE

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis (if EUT with antenna diversity architecture) and packet type.

The worst case was found when positioned on x axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

MODE	ANTENNA	TEST ITEM
Mode 1	Antenna Array(1TX/3RX)	ALL



## 2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product, according to the specifications of the manufacturers. It must comply with the requirements of the following standards:

### FCC PART 15, SUBPART C. SECTION 15.255

KDB 364244 D01 MEAS 15.255 RADARS V01

ANSI C63.10-2020

TCBC Workshop(2023.10.25) Part 15.255 Rules Amendment

Keysight Application Note 5952-1039

All test items have been performed and recorded as per the above standards.

## 2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support Equipment					
NO	Description	Brand	Model No.	Serial Number	Supplied by
1	Laptop	Lenovo	K4e-ARE120	MP20kshe	Lab
Support Cable					
NO	Description	Quantity (Number)	Length (cm)	Detachable (Yes/ No)	Shielded (Yes/ No)




## 2.6 FAR FIELD CONDITION FOR FREQUENCY ABOVE 18GHz

The equipment under test was transmitting while connected to its integral antenna and is placed on a turn table. The measurement antenna is in the far field of the EUT per formula  $2D^2/\lambda$  where D is the larger between the dimension of the measurement antenna and the transmitting antenna of the EUT. In this case, "D" is the largest dimension of the measurement antenna. The EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.


Horn Antenna	Frequency (GHz)	Antenna Dimension A(m)	Wavelength (λ)(m)	Far field R(m)>=2D <sup>2</sup> /λ	Measurement Distance(D)(m)
QMS-00880	18	0.08	0.0167	0.77	3
	40	0.08	0.0075	1.71	
HO19R	40	0.046	0.0075	0.56	1
	60	0.046	0.005	0.85	
HO12R	60	0.03	0.005	0.36	1
	90	0.03	0.0033	0.55	
HO8R	90	0.019	0.0033	0.22	1
	140	0.019	0.0021	0.34	
HO5R	140	0.012	0.0021	0.14	1
	220	0.012	0.0014	0.21	
HO3R	220	0.008	0.0014	0.09	1
	330	0.008	0.0009	0.14	

## 2.7 RADIATED TEST SETUP


Below 30MHz Test Setup:

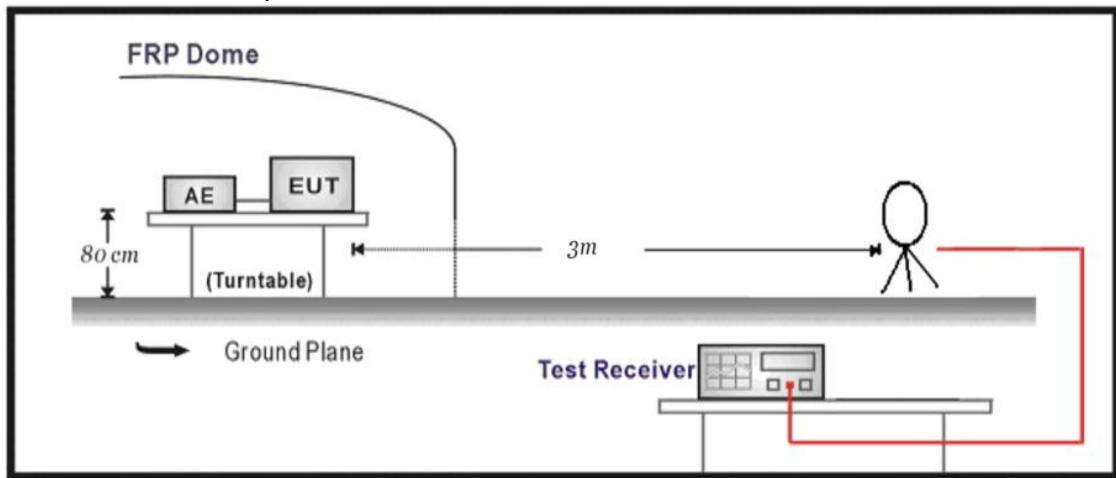


30MHz-1GHz Test Setup:

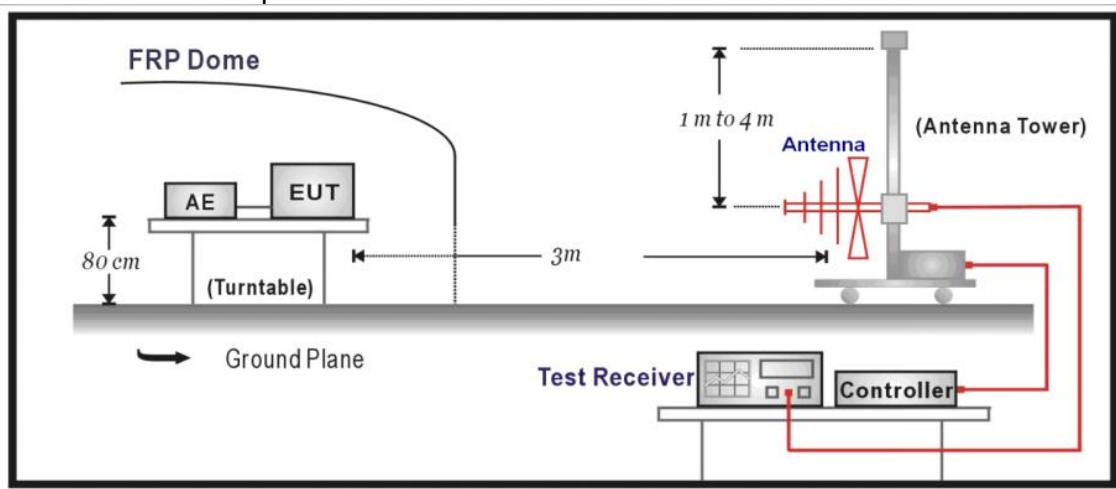

1GHz -40GHz Test Setup:

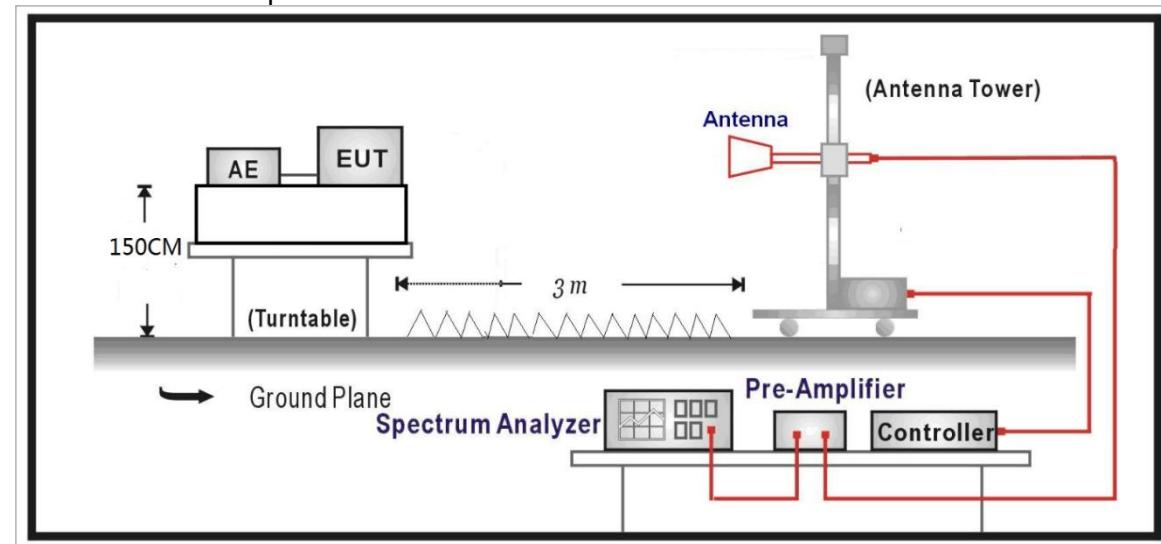

Above 40GHz Test Setup:

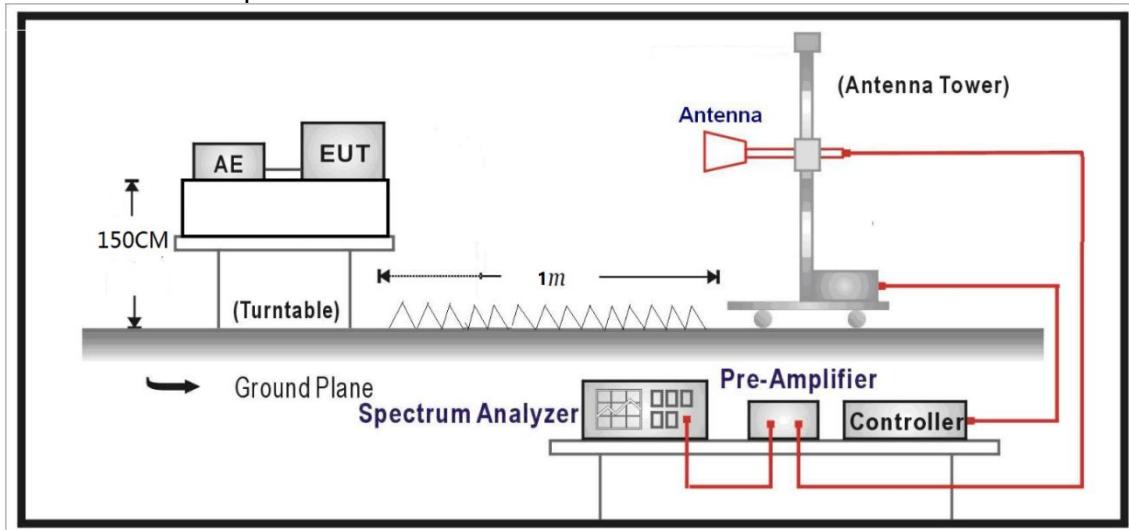

### 3 TEST TYPES AND RESULTS

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 Limit

Frequency (MHz)	Conducted Limits(dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50


NOTE: 1. The lower limit shall apply at the transition frequencies.

NOTE: 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

##### 3.1.2 Measurement procedure

- The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the Test photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source. The equipment under test shall be placed on a support of non-metallic material, the height of which shall be 1.5m above the ground,
- The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
- Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

##### 3.1.3 Test setup

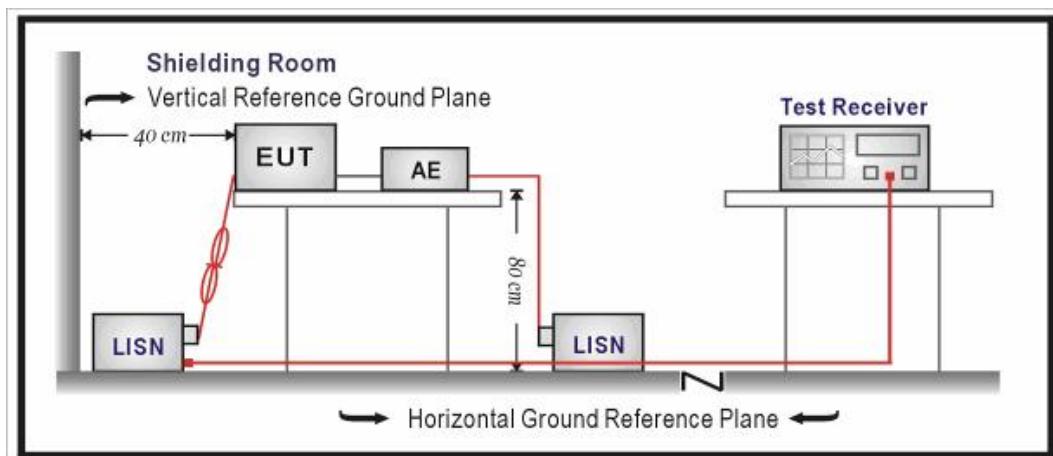



### 3.1.4 Test results

N/A,DC power supply



## 3.2 TRANSMITTER SPURIOUS EMISSIONS MEASUREMENT

### 3.2.1 Limit

Below 40 GHz radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (Microvolts/Meter)	MEASUREMENT DISTANCE (Meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE: 1. The lower limit shall apply at the transition frequencies.

NOTE: 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

NOTE: 3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Between 40 GHz and 200 GHz, the level of these emissions shall not exceed 90pW/cm<sup>2</sup> at a distance of 3 meters.

FCC Frequency [GHz]	EIRP
40 - 200	-10dBm
Limit conversion according to ANSI C63.10-2020 9.2.3 (pW/cm <sup>2</sup> to dBm):	EIRP[dBm] = 10 × log(4 × π × d <sup>2</sup> × PD[W/m <sup>2</sup> ]) ----- According to this formula, an emission limit of PD = 90 pW/cm <sup>2</sup> at a distance of d = 3 m corresponds to an equivalent isotropically radiated power of EIRP = -10 dBm.



### 3.2.2 Measurement procedure

#### Measurement of harmonic and spurious emissions below 40 GHz

- a. The EUT was placed on the top of a rotating table 1.5 meters(above 1GHz) and 0.8 meters(below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle  $< 98\%$ ) or 10Hz(Duty cycle  $> 98\%$ ) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.

#### Measurement of harmonic and spurious emissions above 40 GHz

- a. Connect the test antenna covering the appropriate frequency range to a spectrum analyzer via an external mixer.
- b. Set spectrum analyzer RBW = 1MHz, VBW = 3MHz, average detector.
- c. Maximize all observed emissions. Note the maximum power indicated on the spectrum analyzer. Adjust this reading, if necessary, by the conversion loss of the external mixer used at the frequency under investigation and the external mixer IF cable loss.
- d. Calculate the maximum field strength of the emission at the measurement distance
- e. Calculate the power density at the distance specified by the limit from the field strength at the distance specified by the limit
- f. Repeat the preceding sequence for every emission observed in the frequency band under investigation.



### 3.2.3 Test setup

See section 2.5 of this report.




### 3.2.4 Test results(9kHz-30MHz)

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

**3.2.5 Test results(30MHz-1GHz)**


Test Mode:	<b>60.25GHz</b>	Frequency Range	30MHz-1000MHz
Detector Function	Quasi-Peak(QP)		

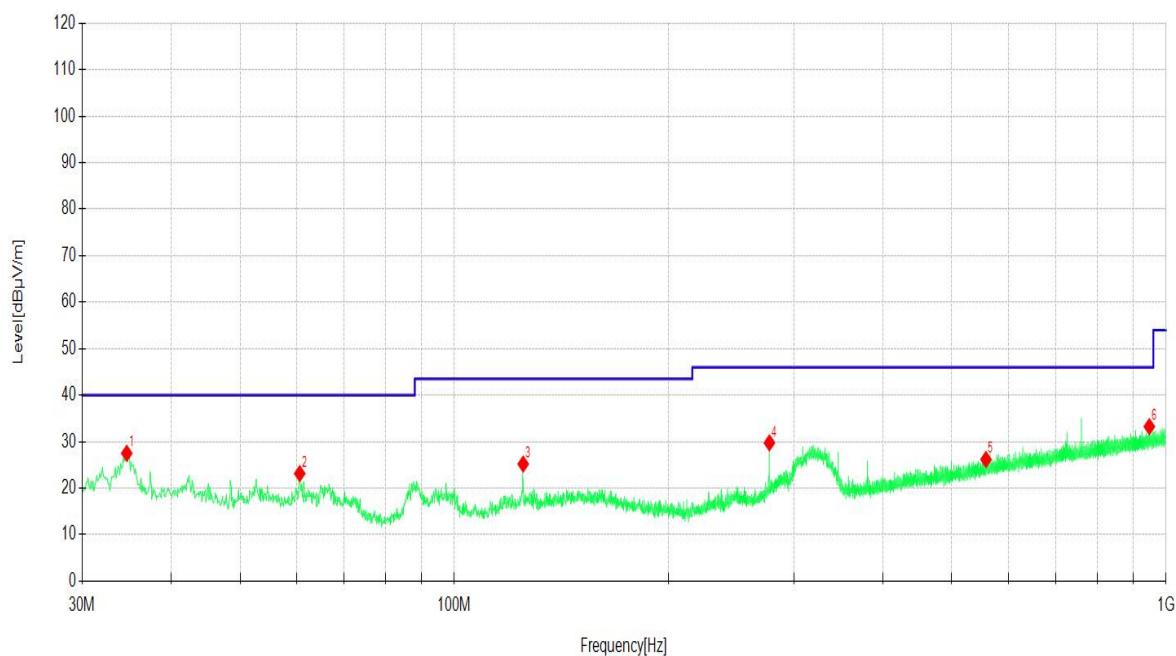

NO.	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	34.66	8.13	19.38	27.51	40.00	12.49	150	176	Horizontal
2	60.66	4.49	18.66	23.15	40.00	16.85	150	359	Horizontal
3	124.97	6.07	19.12	25.19	43.50	18.31	150	36	Horizontal
4	277.18	10.29	19.47	29.76	46.00	16.24	150	355	Horizontal
5	558.41	0.33	25.85	26.18	46.00	19.82	150	286	Horizontal
6	947.42	1.79	31.46	33.25	46.00	12.75	150	14	Horizontal

Remark: 1. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V) + Factor (dB/m).  
2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. Margin(dB) = Limit[dB $\mu$ V/m] - Level [dB $\mu$ V/m]

Test Mode:	<b>60.25GHz</b>	Frequency Range	30MHz-1000MHz
Detector Function	Quasi-Peak(QP)		

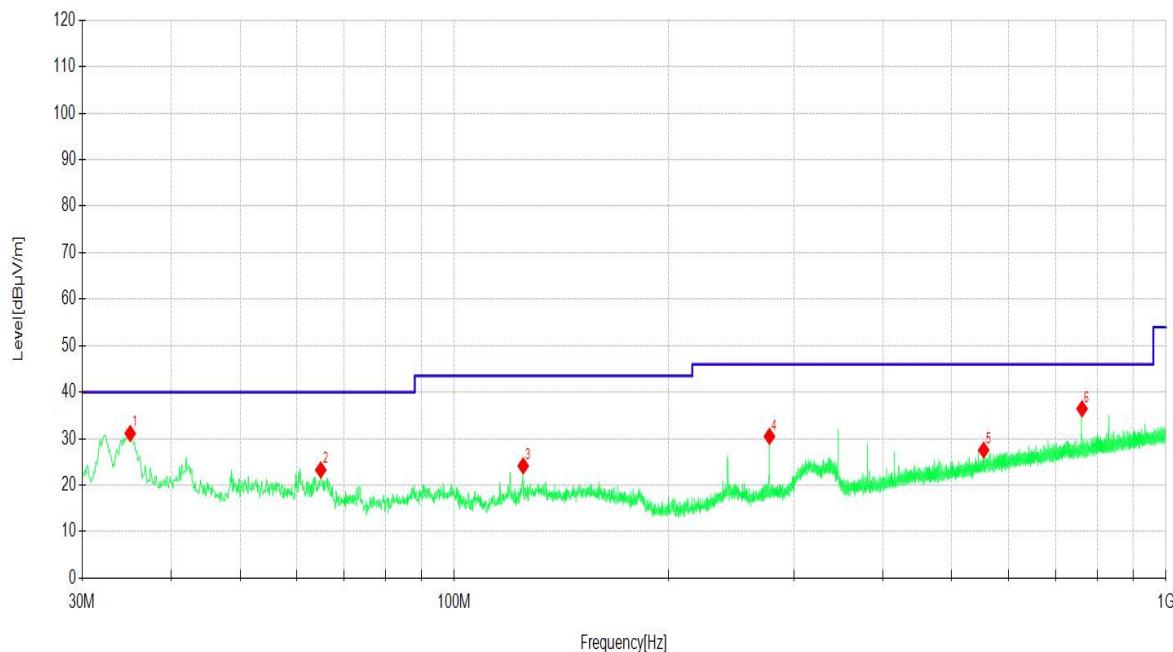

NO.	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	35.04	11.69	19.42	31.11	40.00	8.89	150	296	Vertical
2	64.92	5.44	17.83	23.27	40.00	16.73	150	1	Vertical
3	124.97	5.04	19.12	24.16	43.50	19.34	150	184	Vertical
4	277.18	11.03	19.47	30.50	46.00	15.50	150	360	Vertical
5	554.34	1.79	25.77	27.56	46.00	18.44	150	244	Vertical
6	762.23	7.17	29.26	36.43	46.00	9.57	150	330	Vertical


Remark: 1. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V) + Factor (dB/m).

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

3. Margin(dB) = Limit[dB $\mu$ V/m] - Level [dB $\mu$ V/m]

**3.2.6 Test results(1GHz-18GHz)**

Test Mode:	<b>60.25GHz</b>	Frequency Range	1GHz-18GHz
Detector Function	PK/AV		

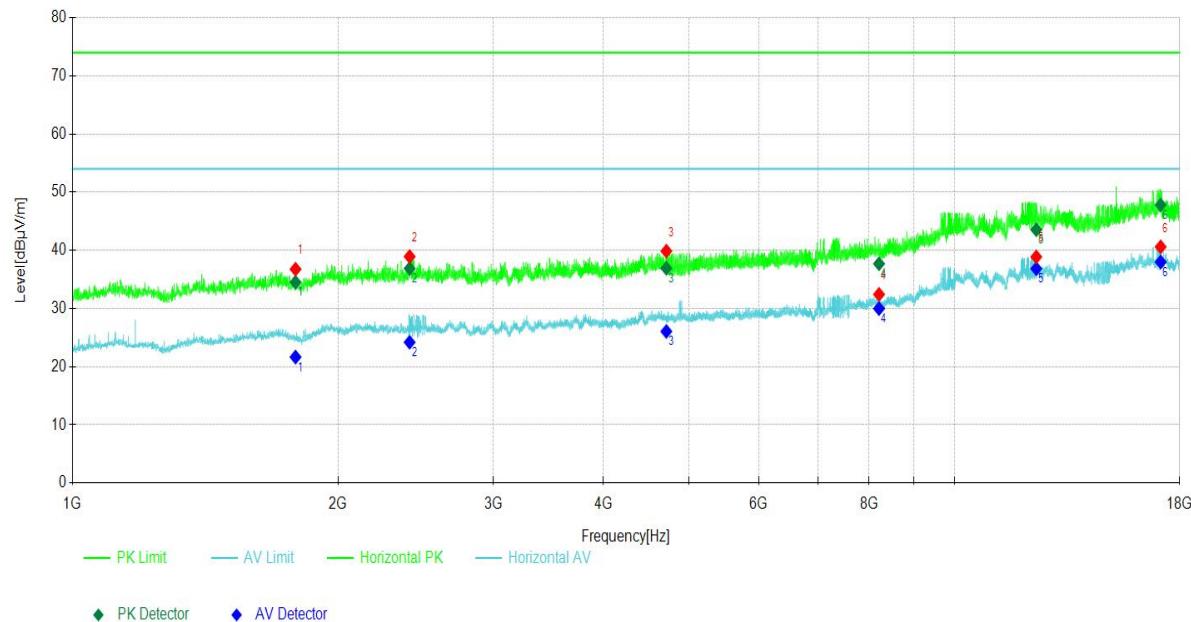


Frequency [MHz]	Factor [dB]	PK Value [dB $\mu$ V/m]	PK Limit [dB $\mu$ V/m]	PK Margin [dB]	AV Value [dB $\mu$ V/m]	AV Limit [dB $\mu$ V/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1790.279	-15.62	34.52	74.00	39.48	21.66	54.00	32.34	100	215	Horizontal
2411.341	-15.18	36.88	74.00	37.12	24.20	54.00	29.80	100	81	Horizontal
4713.171	-10.99	36.92	74.00	37.08	26.07	54.00	27.93	100	259	Horizontal
8211.221	-5.91	37.70	74.00	36.30	29.99	54.00	24.01	100	192	Horizontal
12379.538	1.28	43.54	74.00	30.46	36.85	54.00	17.15	100	281	Horizontal
17127.613	5.40	47.81	74.00	26.19	38.00	54.00	16.00	100	205	Horizontal

**Remark:** 1. The emission levels of other frequencies were greater than 20dB margin.  
2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V) + Factor (dB/m).  
3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
4. Margin(dB) = Limit(dB $\mu$ V/m) - Level (dB $\mu$ V/m)



Test Mode:	60.25GHz	Frequency Range	1GHz-18GHz
Detector Function	PK/AV		

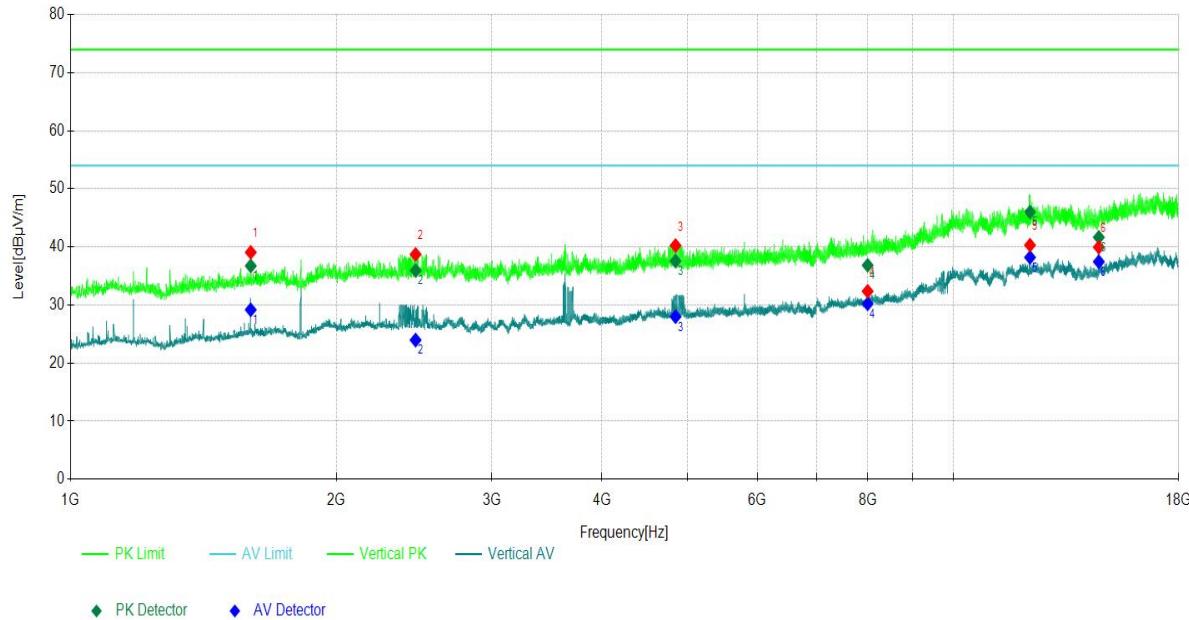

Frequency [MHz]	Factor [dB]	PK Value [dB $\mu$ V/m]	PK Limit [dB $\mu$ V/m]	PK Margin [dB]	AV Value [dB $\mu$ V/m]	AV Limit [dB $\mu$ V/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1600.060	-17.47	36.74	74.00	37.26	29.18	54.00	24.82	100	189	Vertical
2459.946	-15.16	35.94	74.00	38.06	23.97	54.00	30.03	100	160	Vertical
4845.785	-10.84	37.57	74.00	36.43	28.00	54.00	26.00	100	114	Vertical
7997.800	-6.17	36.85	74.00	37.15	30.20	54.00	23.80	100	190	Vertical
12215.622	1.18	46.01	74.00	27.99	38.20	54.00	15.80	100	182	Vertical
14617.162	1.59	41.66	74.00	32.34	37.45	54.00	16.55	100	182	Vertical

**Remark:** 1. The emission levels of other frequencies were greater than 20dB margin.


2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit(dB $\mu$ V/m) - Level (dB $\mu$ V/m)

**3.2.7 Test results(18GHz-40GHz)**

Test Mode:	<b>60.25GHz</b>	Frequency Range	18GHz-40GHz
Detector Function	PK/AV		

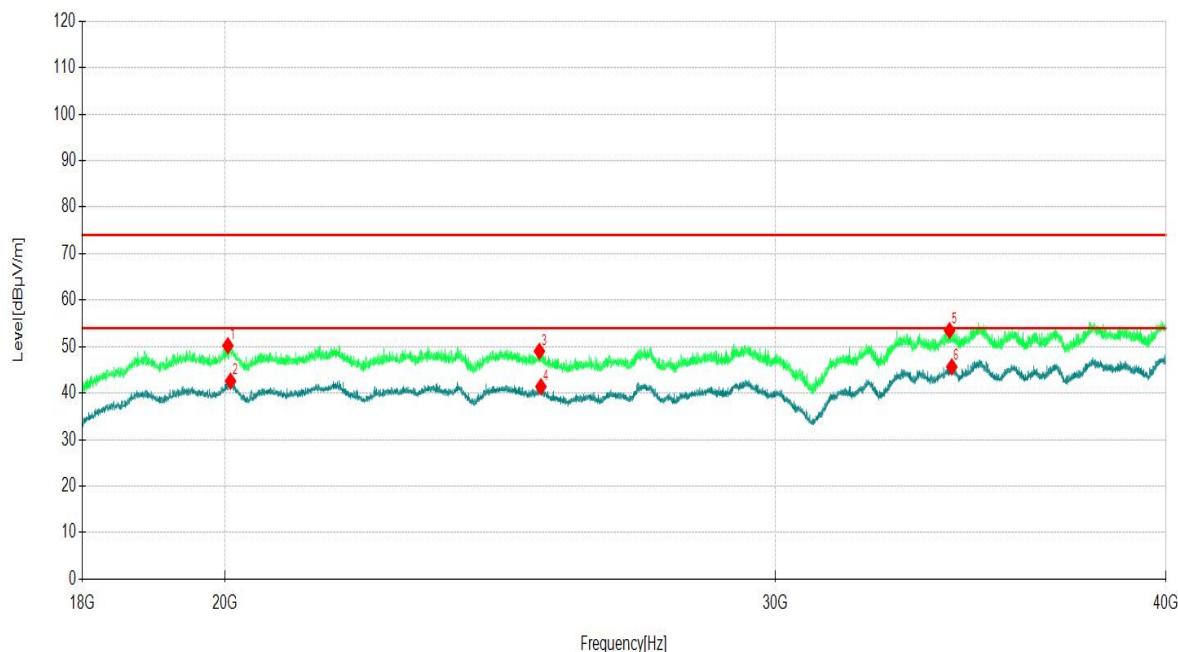

NO.	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	20039.	56.41	-6.19	50.22	74.00	23.78	100	209	Horizontal
2	20079.	48.58	-6.01	42.57	54.00	11.43	100	146	Horizontal
3	25210.	52.77	-3.76	49.01	74.00	24.99	100	60	Horizontal
4	25238.	45.06	-3.67	41.39	54.00	12.61	100	180	Horizontal
5	34103.	55.29	-1.83	53.46	74.00	20.54	100	51	Horizontal
6	34158.	47.77	-2.11	45.66	54.00	8.34	100	320	Horizontal


**Remark:** 1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit(dB $\mu$ V/m) - Level (dB $\mu$ V/m)

Test Mode:	<b>60.25GHz</b>	Frequency Range	18GHz-40GHz
Detector Function	PK/AV		

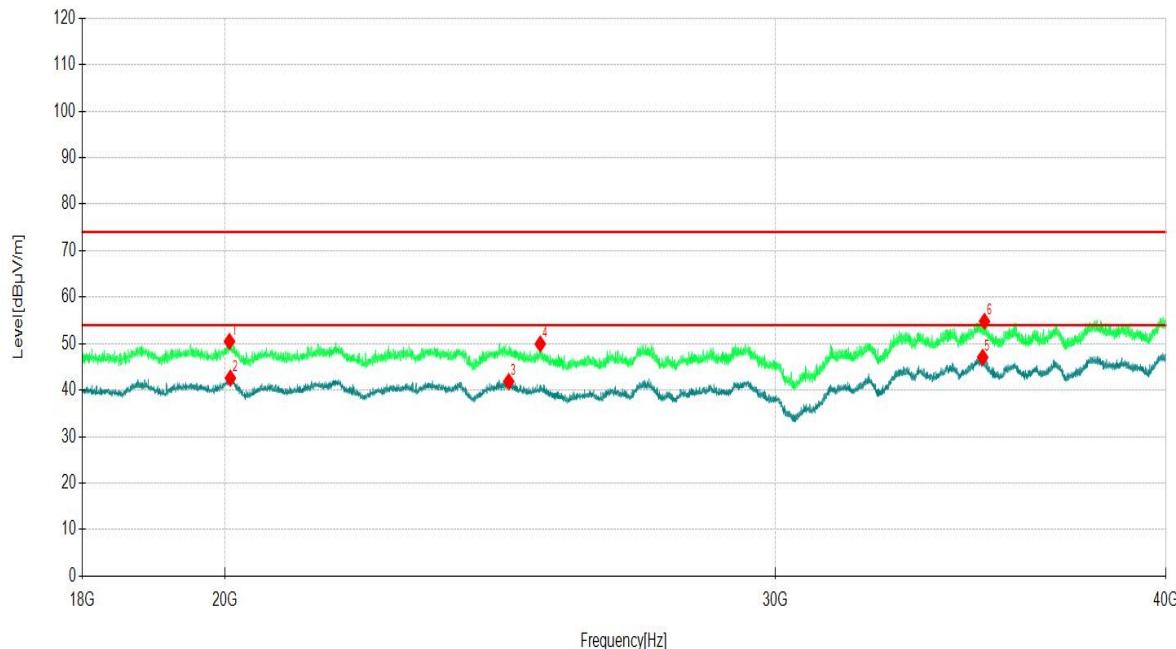

NO.	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	20063.	56.54	-6.08	50.46	74.00	23.54	100	120	Vertical
2	20077.	48.62	-6.02	42.60	54.00	11.40	100	313	Vertical
3	24646.	45.01	-3.16	41.85	54.00	12.15	100	168	Vertical
4	25225.	53.65	-3.71	49.94	74.00	24.06	100	260	Vertical
5	34946.	48.02	-0.96	47.06	54.00	6.94	100	1	Vertical
6	34992.	55.77	-0.96	54.81	74.00	19.19	100	360	Vertical

**Remark:** 1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit(dB $\mu$ V/m) - Level (dB $\mu$ V/m)



### 3.2.8 Test results(40GHz-200GHz)

Only showing the highest value, “worst case” (Vertical polarity)

Radiated Emission, 40 GHz to 57 GHz, Vertical Polarization	Emissions (dBm)	Emissions (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )	Verdict
	-54.41	0.003	90	Pass



Radiated Emission, 90 GHz to 140 GHz, Vertical Polarization	Emissions (dBm)	Emissions (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )	Verdict
	-34.72	0.298	90	Pass
				
				



## 3.3 DUTY CYCLE, OFF TIME REQUIREMENT

### 3.3.1 Limit

According to § 15.255(c)(2)(ii)

**57.0-61.56 GHz:** the peak EIRP shall not exceed 3 dBm except that the peak EIRP shall not exceed 20 dBm if the sum of continuous transmitter off-times of at least two milliseconds equals at least 16.5 milliseconds within any contiguous interval of 33 milliseconds;

### 3.3.2 Test Procedure

The duty cycle was tested with the spectrum analyzer set to zero-span.

### 3.3.3 Test setup

See section 2.5 of this report.



### 3.3.4 Test results

#### In Burst Period

Burst Period (ms)	TX ON Time (ms)	TX OFF Time (ms)	TX OFF Time Ratio(%)	TX OFF Time Ratio Limit (%)	Verdict
500.2	0.004	500.186	99.99	≥50	PASS

OFF Time(ms) = Burst Period(ms)-ON Time (ms)

TX OFF Time Ratio = TX OFF Time(ms) /Burst Period(ms)



TX OFF Time Ratio Limit(%) = (16.5ms / 33ms) \*100% = 50%

#### In 33ms

Burst Period (ms)	TX ON Time (ms)	TX OFF Time (ms)	TX OFF Limit(ms)	Verdict
33	0.004	32.986	≥16.5	PASS

OFF Time(ms) = Burst Period(ms)-ON Time (ms)

TX OFF Time Ratio = TX OFF Time(ms) /Burst Period(ms)

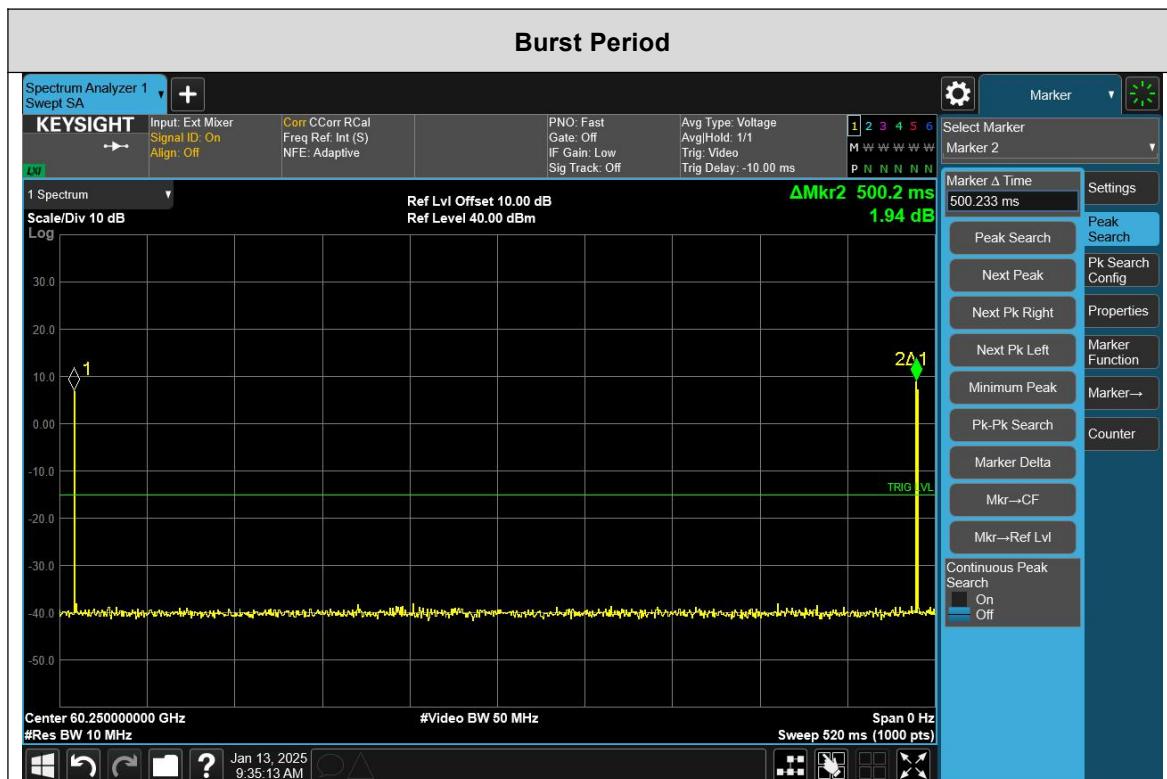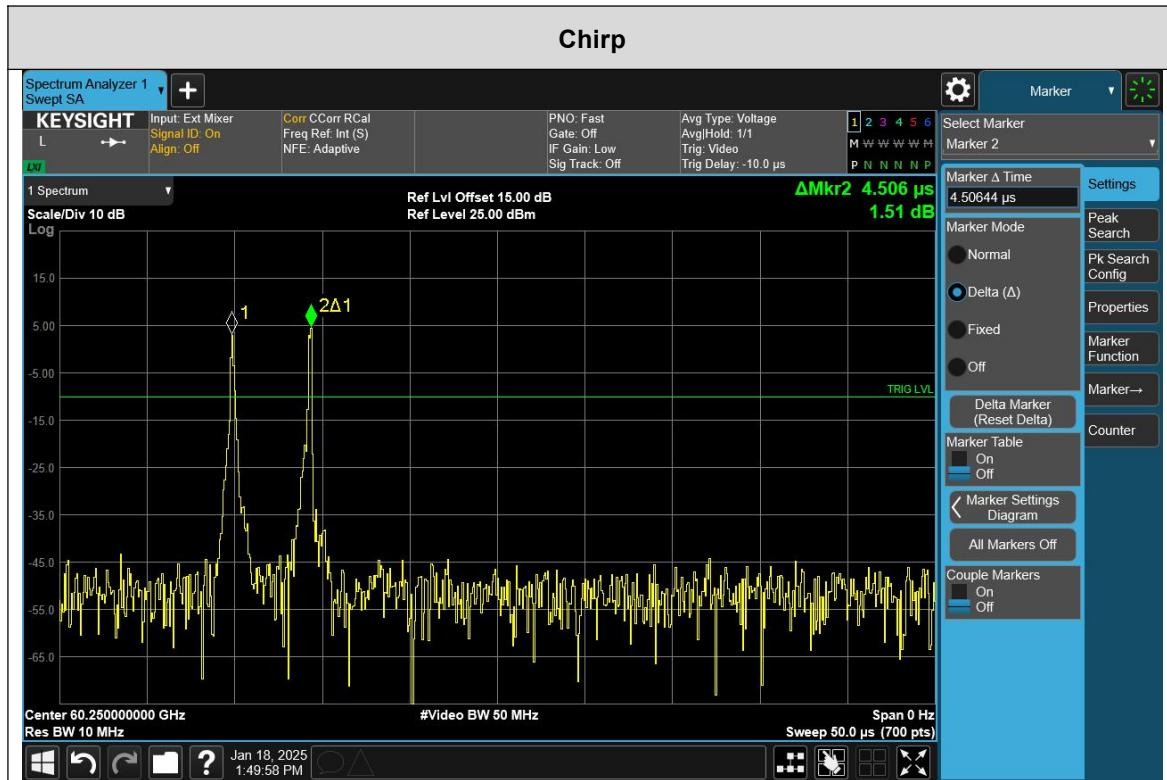



## 3.4 BANDWIDTH MEASUREMENT

### 3.4.1 Limits

#### According to § 15.215(c)

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through §15.257 and in subpart E of this part, must be designed to ensure that the **20 dB bandwidth** of the emission, **or** whatever bandwidth may otherwise be specified in the **specific rule section** under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

#### According to KDB 364244 D01 Meas 15.255 Radars v01

For pulsed transmitters, the fundamental emission bandwidth is defined at the -10 dB points specified in §15.255(c)(3)

For other than pulsed radar transmitters, the fundamental emission bandwidth is presumed to be “the width of a frequency band such that, below the lower and above the upper-frequency limits, the mean powers emitted are each equal to a specified percentage  $\beta/2$  of the total mean power of a given emission. Unless otherwise specified in an ITU-R Recommendation for the appropriate class of emission, the value of  $\beta/2$  should be taken as 0.5%,” as defined in §2.1(c) of the FCC rules. This is also known as the 99% occupied bandwidth (OBW).

#### According to § 15.255(c)(2)(ii)

**57.0-61.56 GHz:** the peak EIRP shall not exceed 3 dBm except that the peak EIRP shall not exceed 20 dBm if the sum of continuous transmitter off-times of at least two milliseconds equals at least 16.5 milliseconds within any contiguous interval of 33 milliseconds;

### 3.4.2 Measurement procedure

99% OCCUPIED BANDWIDTH MEASUREMENT PARAMETER	
Detector:	Peak
Resolution bandwidth:	8 MHz (The analyzer limits maximum RBW at 8 MHz.)
Video bandwidth:	50 MHz
Trace-Mode:	Max Hold
Sweep	Auto couple.

Measurement procedures:Bandwidth: ANSI C63.10-2020 6.9 / 9.3

Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower)

### 3.4.3 Test setup

See section 2.5 of this report.



### 3.4.4 Test results

Center Frequency (GHz)	99% Occupied Bandwidth Lower(GHz)	99% Occupied Bandwidth Upper(GHz)	99% Occupied Bandwidth (GHz)	Lower limit (GHz)	Upper limit (GHz)	Verdict
60.25	59.0130	61.4318	2.4129	57	61.56	Pass

#### 99% Occupied Bandwidth



### 3.5 EIRP POWER MEASUREMENT

#### 3.5.1 Limits

According to § 15.255(c)(2)(ii)

**57.0-61.56 GHz:** the peak EIRP shall not exceed 3 dBm except that the peak EIRP shall not exceed 20 dBm if the sum of continuous transmitter off-times of at least two milliseconds equals at least 16.5 milliseconds within any contiguous interval of 33 milliseconds;

#### 3.5.2 Measurement procedure

##### Test Settings

1. Radiated power measurements are performed using the signal analyzer's swept mode measurement capability for signals with continuous operation.
2. RBW = 1MHz
3. VBW  $\geq$  3 x RBW
4. Span as required, enough to observe the fundamental spike around 61.5 GHz
5. No. of sweep points  $\geq$  2 x span / RBW
6. Detector and Trace mode = Suitable for peak and average measurements respectively over 100 sweeps
7. The trace was allowed to stabilize

##### Method of measurement:

Refer as TCBC Workshop(2023.10.25) Part 15.255 Rules Amendment

##### FMCW desensitization factor:

Desensitization factor and sweep time considerations for measurements of FMCW signals in ANSI C63.10-2020 Annex L

The derivation of the FMCW desensitization factor is given in Keysight Application Note 5952-1039 Appendix B.


#### 3.5.3 Test setup

See section 2.5 of this report.

### 3.5.4 Test results

ITEM	Level (dBm)	Desensitization factor (dB)	Result (dBm)	Peak EIRP Limit(dBm)	Verdict
Peak EIRP	15.81	4.09	19.90	20	PASS

Result(dBm) = desensitization factor (dB) + Level(dBm)

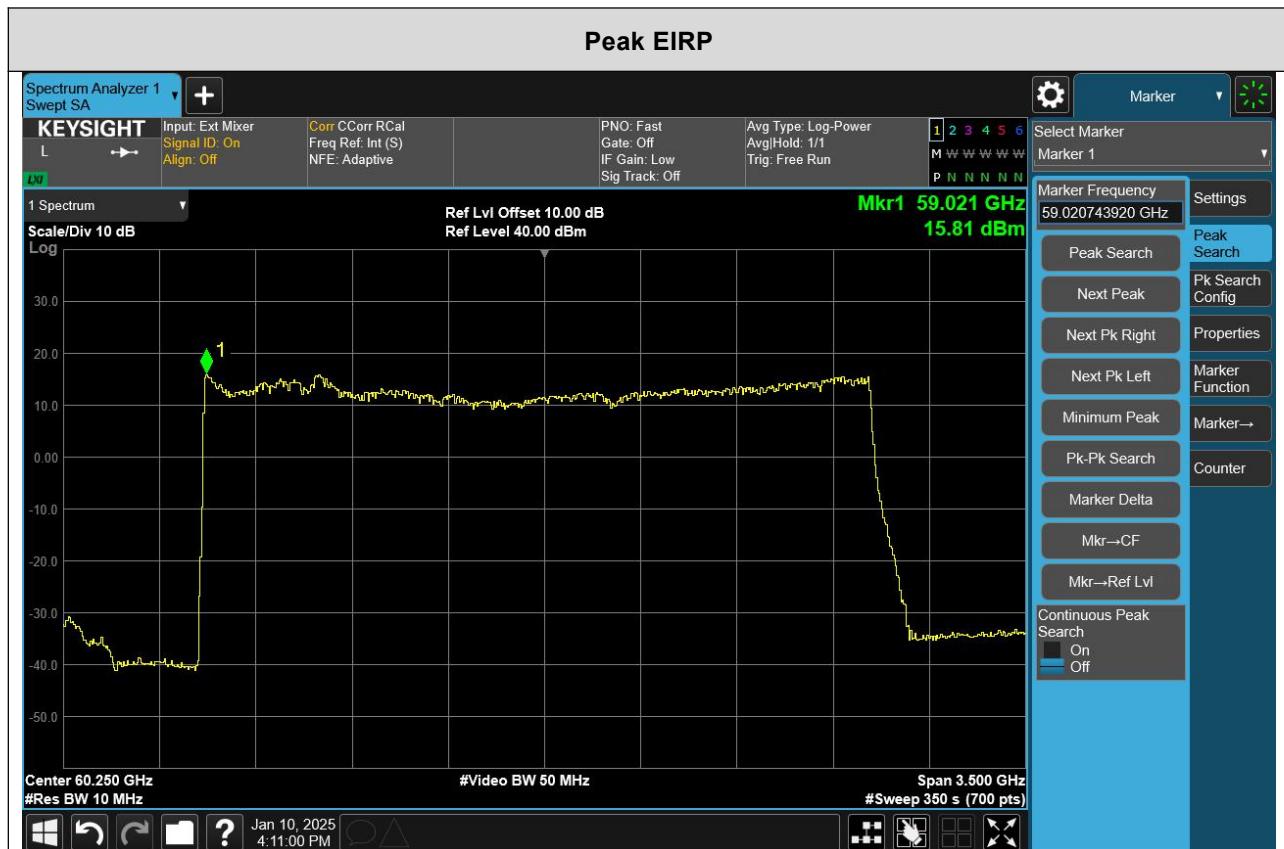

FMCW desensitization factor =  $-20 * \log(\alpha)$

$$\alpha = \frac{1}{\sqrt{1 + \left( \frac{2 \ln(2)}{\pi} \right)^2 \left( \frac{F_s}{T_s B^2} \right)^2}}$$

$F_s$  = Sweep width = 2412.9MHz

$T_s$  = Sweep time = 4.506us

B = 3 dB IF bandwidth = 10MHz



## 3.6 FREQUENCY STABILITY

### 3.6.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency range, 57GHz – 61.56GHz.

### 3.6.2 Measurement Procedure

Method of measurement: Refer as ANSI C63.10-2020 clause 9.5

### 3.6.3 Test setup

See section 2.5 of this report.

### 3.6.4 Test results

FREQUENCY STABILITY					
Temperature (°C)	Voltage (Volt)	FL	FH	Limit (GHz)	Result
		(GHz)	(GHz)		
50	Normal Voltage	59.0136	61.4302	57-61.56GHz	PASS
40		59.0140	61.4286		
30		59.0142	61.4310		
20		59.0126	61.4301		
10		59.0116	61.4319		
0		59.0155	61.4282		
-10		59.0121	61.4320		
-20		59.0121	61.4315		
-30		59.0129	61.4315		
20	115%	59.0125	61.4291		
20	85%	59.0130	61.4299		



## 3.7 ANTENNA REQUIREMENT

### 3.7.1 LIMITS

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 3.7.2 ANTENNA ANTI-REPLACEMENT CONSTRUCTION

The antenna used for this product is Internal Antenna and that no antenna other than that furnished by the responsible party shall be used with the device



## 4 PHOTOGRAPHS OF TEST SETUP

Please refer to the attached file (Test Setup Photo).



## 5 PHOTOGRAPHS OF THE EUT

Please refer to the attached file (External Photos report and Internal Photos).

----- End of the Report -----



## Important

- (1) The test report is invalid without the official stamp of CVC;
- (2) Any part photocopies of the test report are forbidden without the written permission from CVC;
- (3) The test report is invalid without the signatures of Approval and Reviewer;
- (4) The test report is invalid if altered;
- (5) Objections to the test report must be submitted to CVC within 15 days.
- (6) Generally, commission test is responsible for the tested samples only.
- (7) As for the test result “-” or “N” means “not applicable”, “/” means “not test”, “P” means “pass” and “F” means “fail”

Address: No. 1301-14&16, Guanguang Road, Xinlan Community, Guanlan Subdistrict, Longhua District, Shenzhen, Guangdong, China

Post Code: 518110 Tel: 0755-23763060-8805

Fax: 0755-23763060 E-mail: sz-kf@cvc.org.cn

<http://www.cvc.org.cn>