


802.11n HT40 mode/5310MHz


Detector mode: Peak

Polarity: Horizontal

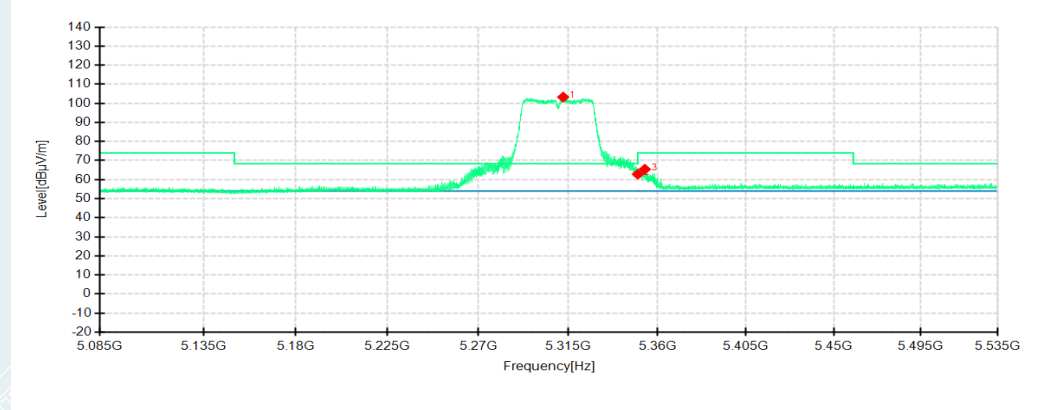

Detector mode: Peak

Polarity: Vertical

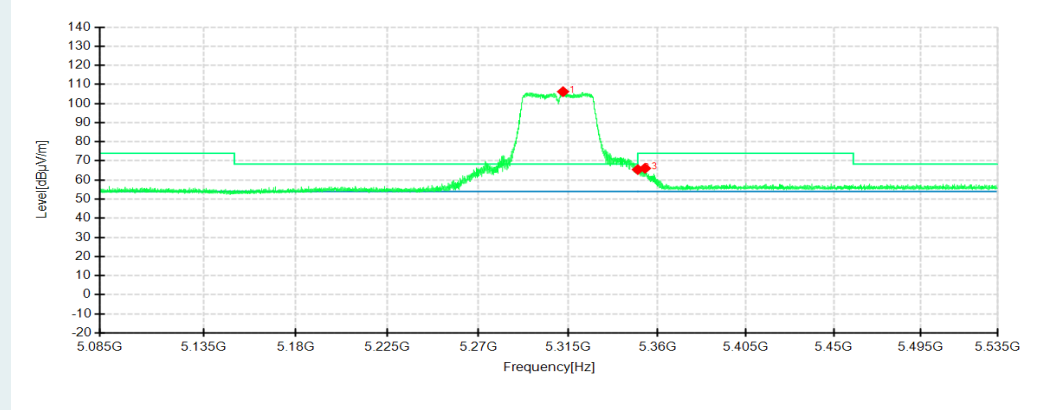


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5312.4300	88.73	103.23	14.50	68.30	-34.93	200	51	Horizontal	N/A
2	5350.0000	47.77	62.79	15.02	74.00	11.21	100	142	Horizontal	/
3	5353.5600	50.35	65.42	15.07	74.00	8.58	100	142	Horizontal	/
1	5312.3850	91.71	106.21	14.50	68.30	-37.91	200	100	Vertical	N/A
2	5350.0000	50.44	65.46	15.02	74.00	8.54	200	93	Vertical	/
3	5353.6500	51.03	66.10	15.07	74.00	7.90	200	93	Vertical	/

802.11n HT40 mode/5310MHz


Detector mode: Average

Polarity: Horizontal

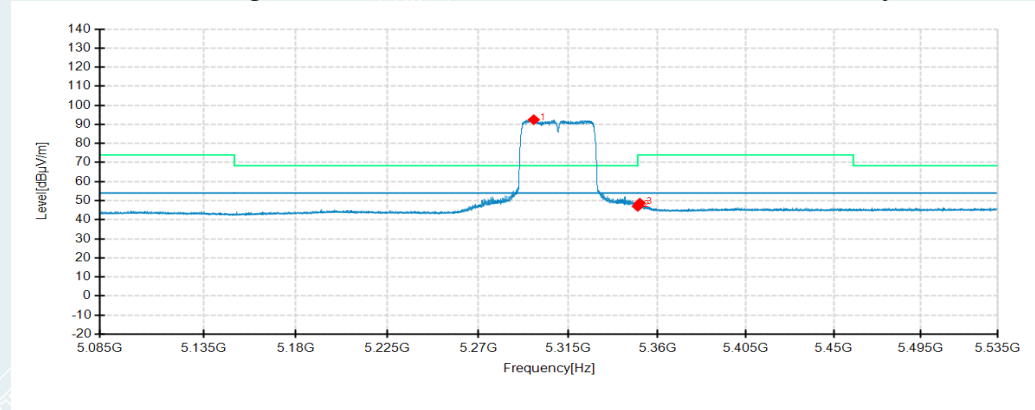

Detector mode: Average

Polarity: Vertical

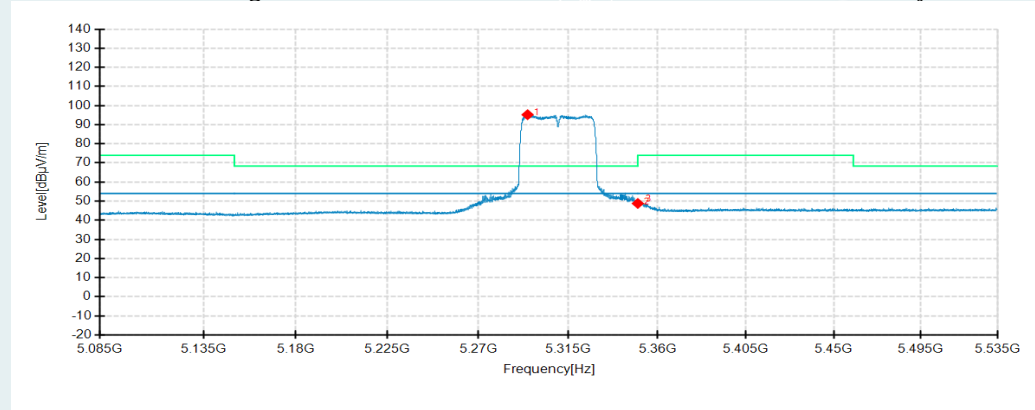


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5297.7150	78.13	92.45	14.32	54.00	-38.45	200	46	Horizontal	N/A
2	5350.0000	31.98	47.00	15.02	54.00	7.00	100	142	Horizontal	/
3	5350.9950	33.62	48.65	15.03	54.00	5.35	100	142	Horizontal	/
1	5294.6100	80.91	95.22	14.31	54.00	-41.22	200	94	Vertical	N/A
2	5350.0000	33.77	48.79	15.02	54.00	5.21	200	2	Vertical	/
3	5350.5000	35.26	50.29	15.03	54.00	3.71	200	94	Vertical	/

802.11n HT40 mode/5510MHz


Detector mode: Peak

Polarity: Horizontal

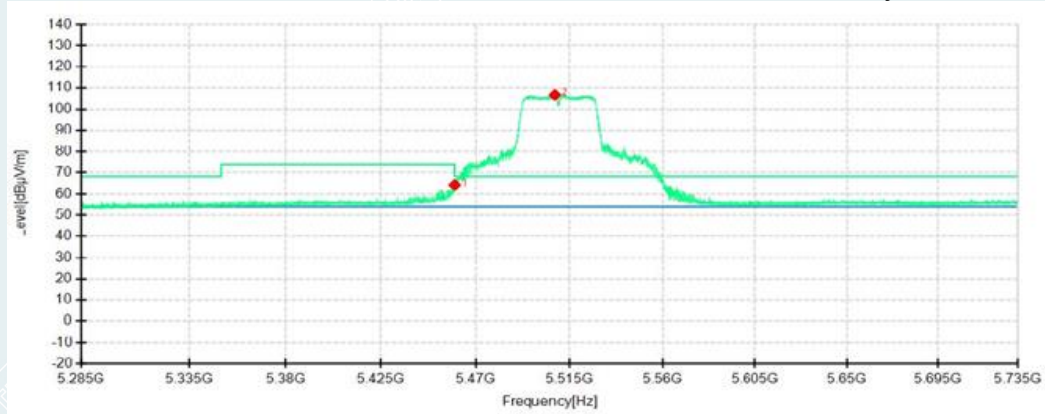

Detector mode: Peak

Polarity: Vertical

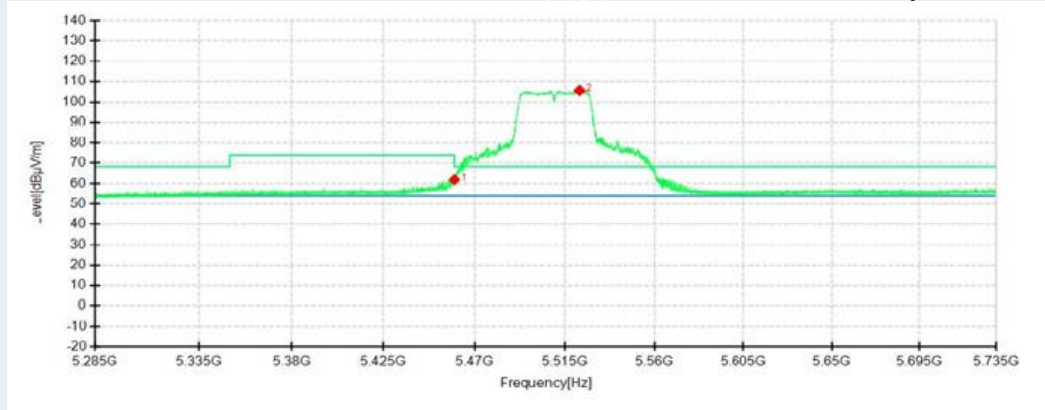


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5460.0000	48.35	64.17	15.82	68.30	4.13	200	0	Horizontal	/
2	5508.2000	90.59	106.64	16.05	68.30	-38.34	200	218	Horizontal	N/A
1	5460.0000	46.05	61.87	15.82	68.30	6.43	200	60	Vertical	/
2	5522.4650	89.36	105.56	16.20	68.30	-37.26	100	142	Vertical	N/A

802.11n HT40 mode/5510MHz


Detector mode: Average

Polarity: Horizontal

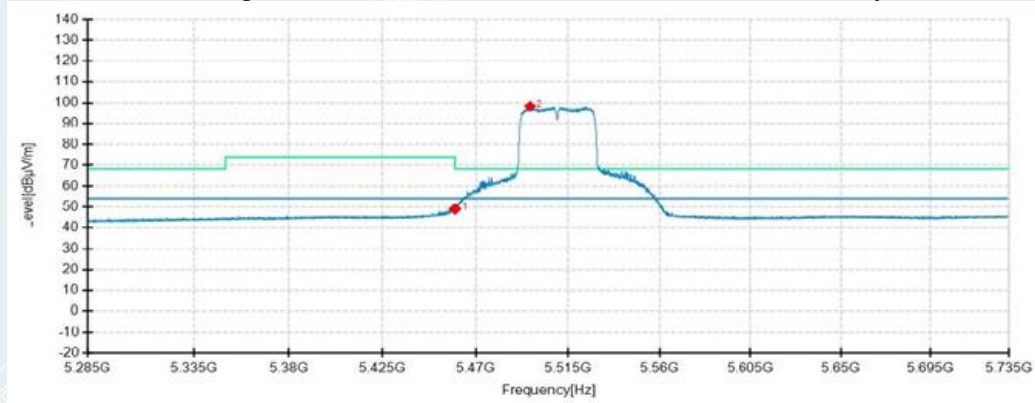

Detector mode: Average

Polarity: Vertical

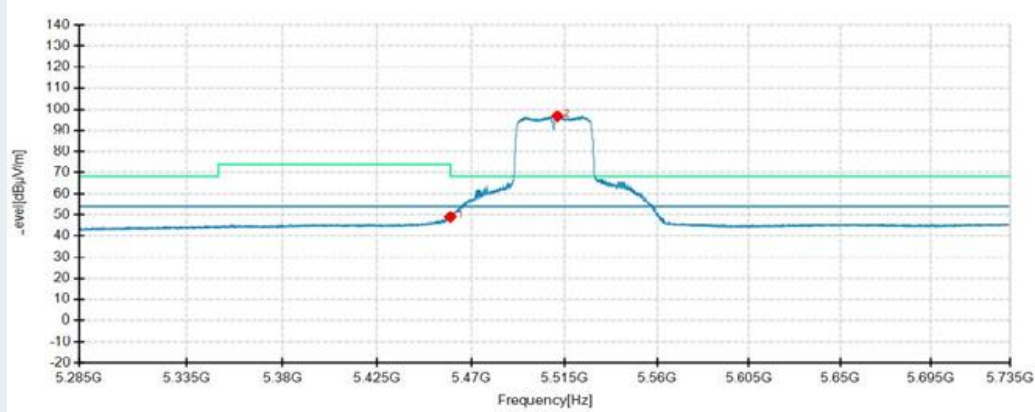


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5460.0000	33.30	49.12	15.82	54.00	4.88	200	17	Horizontal	/
2	5496.4550	82.32	98.28	15.96	54.00	-44.28	200	218	Horizontal	N/A
1	5460.0000	33.28	49.10	15.82	54.00	4.90	200	60	Vertical	/
2	5511.7100	80.70	96.79	16.09	54.00	-42.79	100	142	Vertical	N/A

802.11n HT40 mode/5550MHz


Detector mode: Peak

Polarity: Horizontal

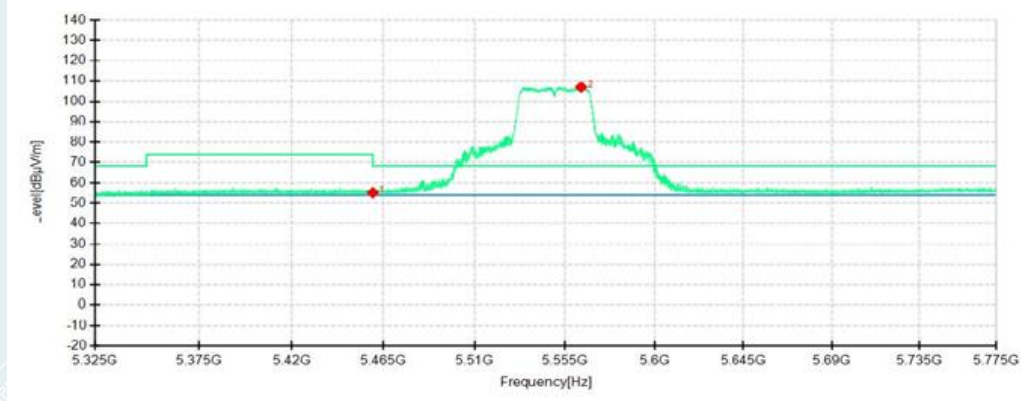

Detector mode: Peak

Polarity: Vertical

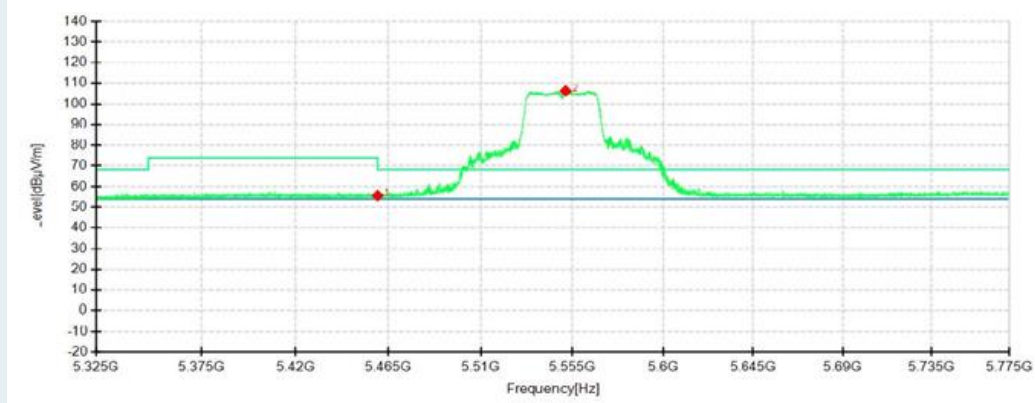


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5460.0000	39.37	55.19	15.82	74.00	18.81	100	266	Horizontal	/
2	5563.2750	90.73	107.07	16.34	68.30	-38.77	200	218	Horizontal	N/A
1	5460.0000	39.84	55.66	15.82	74.00	18.34	100	142	Vertical	/
2	5551.9350	89.78	106.24	16.46	68.30	-37.94	200	32	Vertical	N/A

802.11n HT40 mode/5550MHz


Detector mode: Average

Polarity: Horizontal

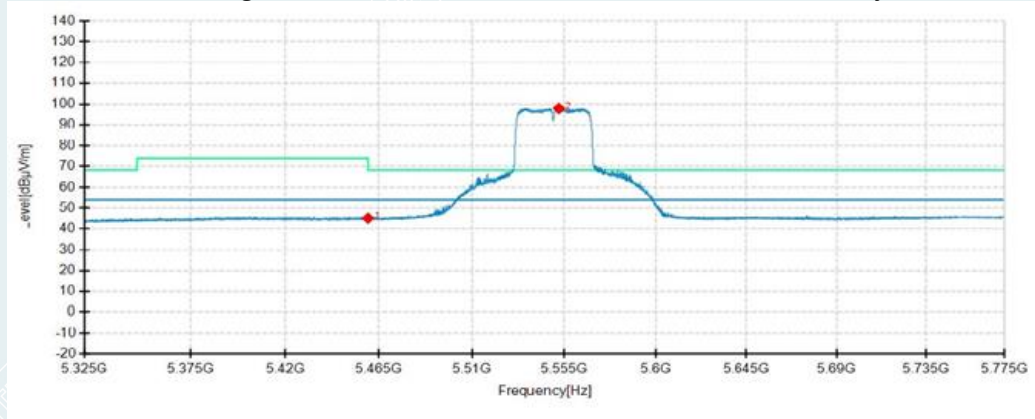

Detector mode: Average

Polarity: Vertical

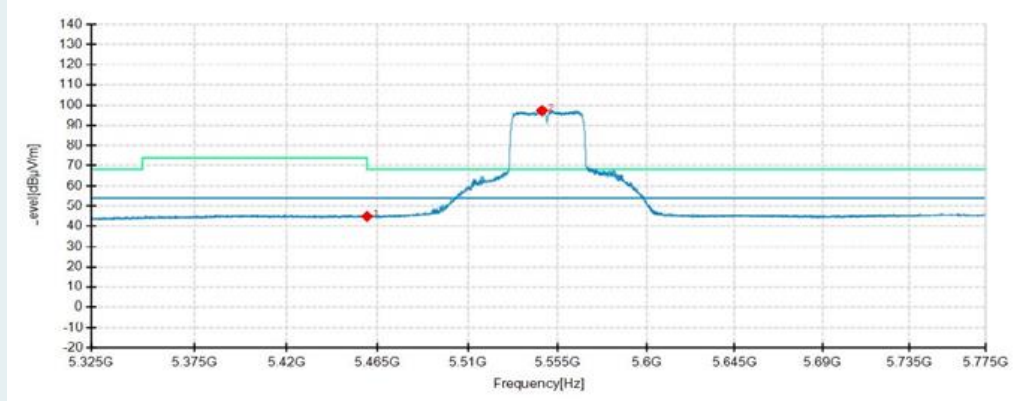


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5460.0000	29.35	45.17	15.82	54.00	8.83	200	59	Horizontal	/
2	5552.6100	81.45	97.90	16.45	54.00	-43.90	200	218	Horizontal	N/A
1	5460.0000	29.15	44.97	15.82	54.00	9.03	200	31	Vertical	/
2	5547.3900	80.82	97.27	16.45	54.00	-43.27	200	31	Vertical	N/A

802.11n HT40 mode/5670MHz


Detector mode: Peak

Polarity: Horizontal

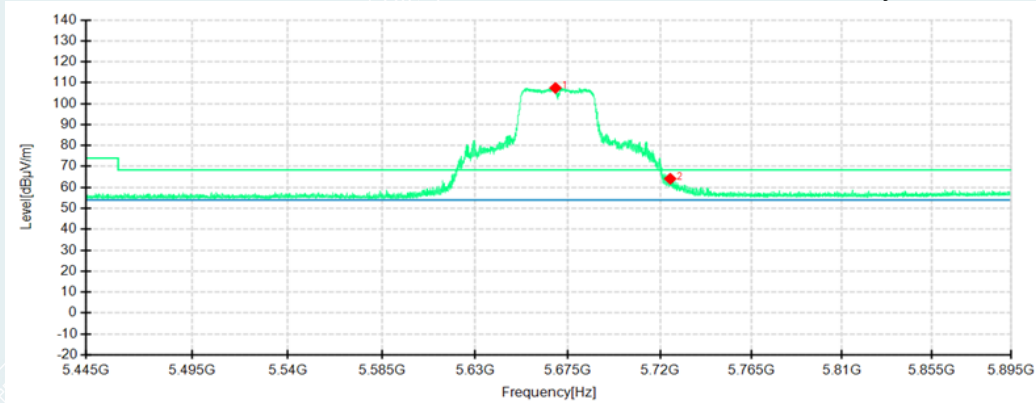

Detector mode: Peak

Polarity: Vertical

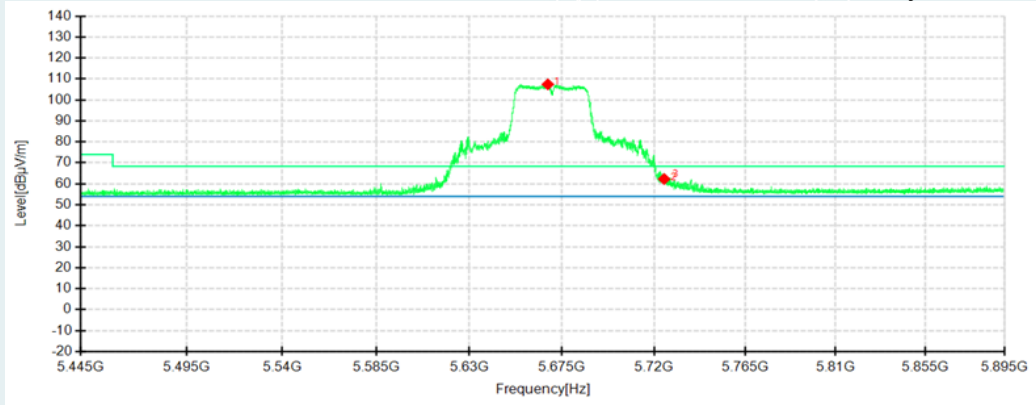


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5668.8750	90.87	107.51	16.64	68.30	-39.21	200	218	Horizontal	N/A
2	5725.0000	47.34	64.13	16.79	68.30	4.17	200	4	Horizontal	/
1	5668.0650	90.77	107.41	16.64	68.30	-39.11	200	25	Vertical	N/A
2	5725.0000	45.50	62.29	16.79	68.30	6.01	200	114	Vertical	/
3	5725.9800	46.89	63.70	16.81	68.30	4.60	200	25	Vertical	/

802.11n HT40 mode/5670MHz


Detector mode: Average

Polarity: Horizontal

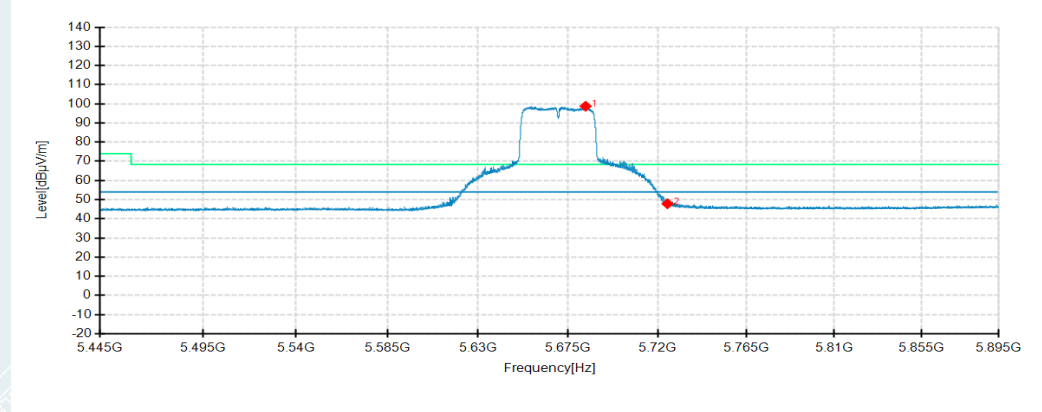

Detector mode: Average

Polarity: Vertical

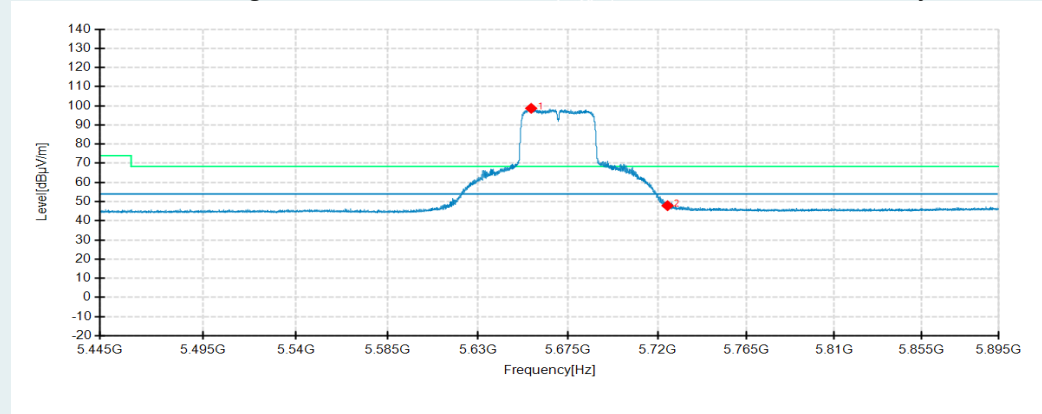


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5683.7250	82.24	98.73	16.49	54.00	-44.73	200	218	Horizontal	N/A
2	5725.0000	31.05	47.84	16.79	54.00	6.16	200	218	Horizontal	/
1	5656.4550	81.91	98.67	16.76	54.00	-44.67	200	24	Vertical	N/A
2	5725.0000	31.08	47.87	16.79	54.00	6.13	100	142	Vertical	/

802.11ac VHT80 mode/5210MHz


Detector mode: Peak

Polarity: Horizontal

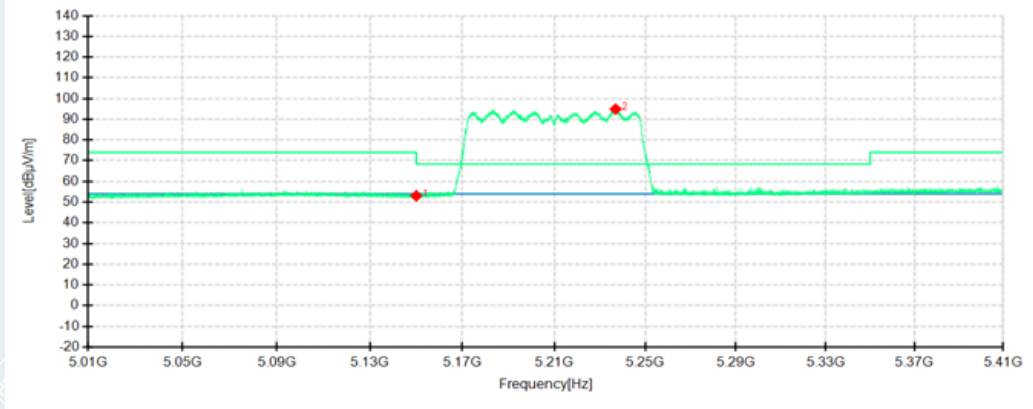

Detector mode: Peak

Polarity: Vertical

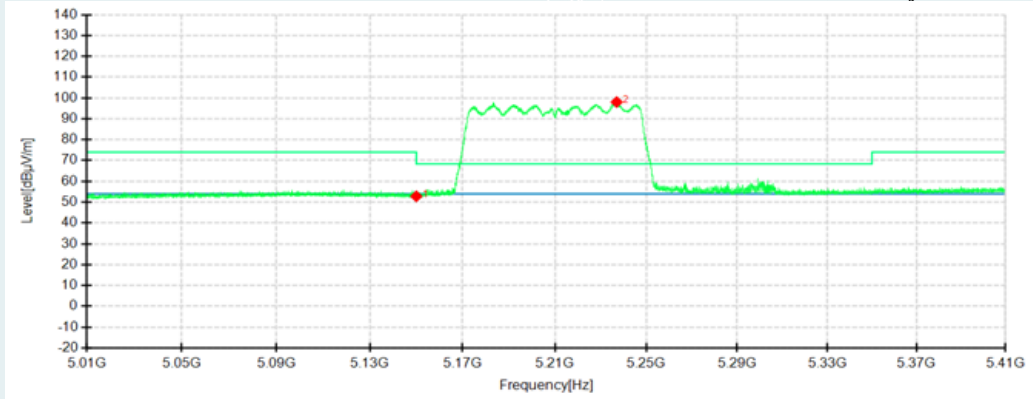


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5150.0000	39.27	53.04	13.77	74.00	20.96	100	142	Horizontal	/
2	5236.9200	80.49	94.88	14.39	68.30	-26.58	100	142	Horizontal	N/A
1	5150.0000	39.02	52.79	13.77	74.00	21.21	200	129	Vertical	/
2	5237.0000	83.64	98.03	14.39	68.30	-29.73	200	123	Vertical	N/A

802.11ac VHT80 mode/5210MHz


Detector mode: Average

Polarity: Horizontal

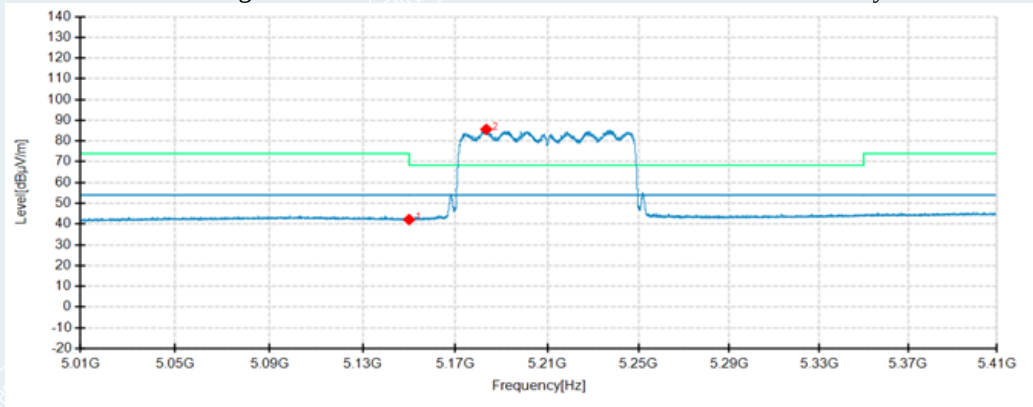

Detector mode: Average

Polarity: Vertical

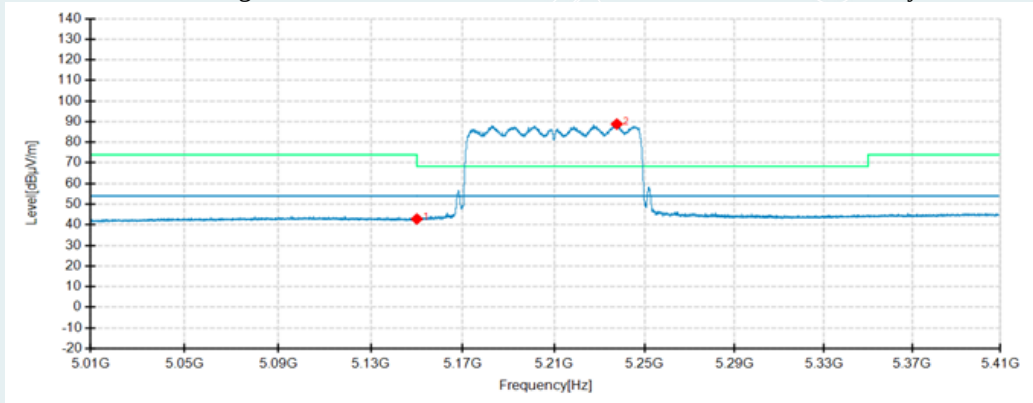


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5150.0000	28.37	42.14	13.77	54.00	11.86	100	142	Horizontal	/
2	5183.4000	71.07	85.65	14.58	54.00	-31.65	100	142	Horizontal	N/A
1	5150.0000	29.05	42.82	13.77	54.00	11.18	200	120	Vertical	/
2	5237.6800	74.46	88.84	14.38	54.00	-34.84	200	86	Vertical	N/A

802.11ac VHT80 mode/5290MHz


Detector mode: Peak

Polarity: Horizontal

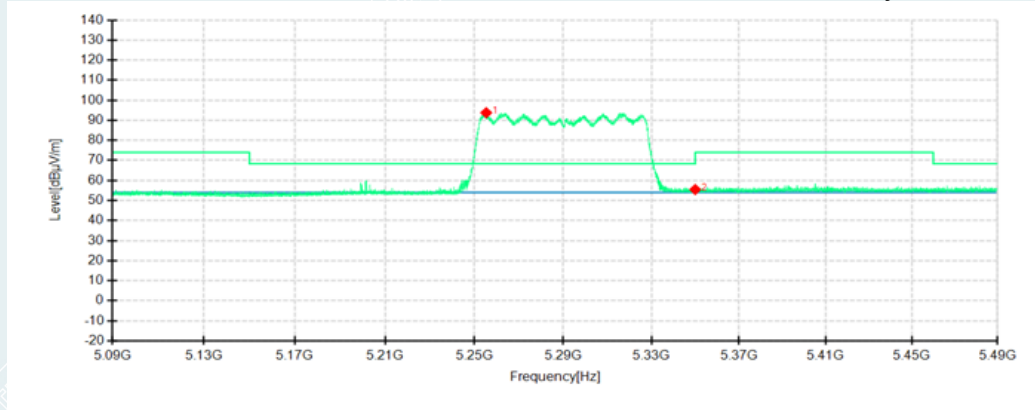

Detector mode: Peak

Polarity: Vertical

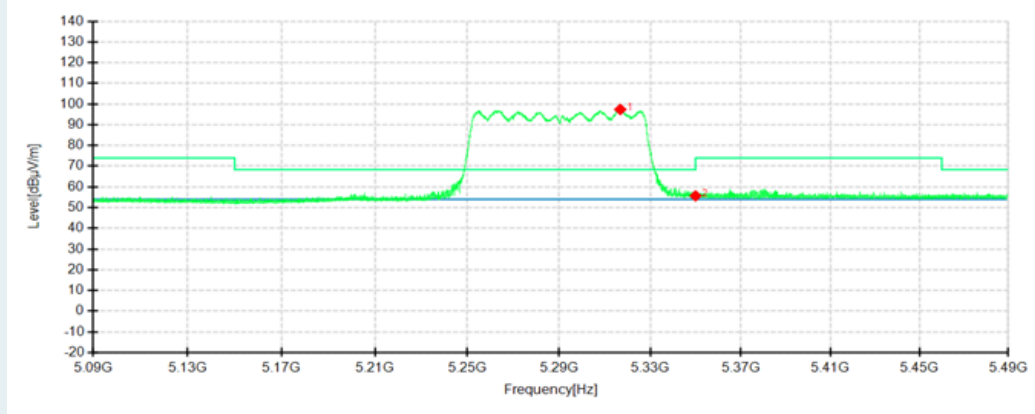


No.	Frequency MHz	Reading dB μ V/m	Level dB μ V/m	Factor dB	Limit dB μ V/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5255.2800	79.56	93.76	14.20	68.30	-25.46	100	142	Horizontal	N/A
2	5350.0000	40.44	55.46	15.02	68.30	12.84	100	245	Horizontal	/
1	5316.8000	82.84	97.40	14.56	68.30	-29.10	200	12	Vertical	N/A
2	5350.0000	40.64	55.66	15.02	68.30	12.64	200	19	Vertical	/

802.11ac VHT80 mode/5290MHz


Detector mode: Average

Polarity: Horizontal

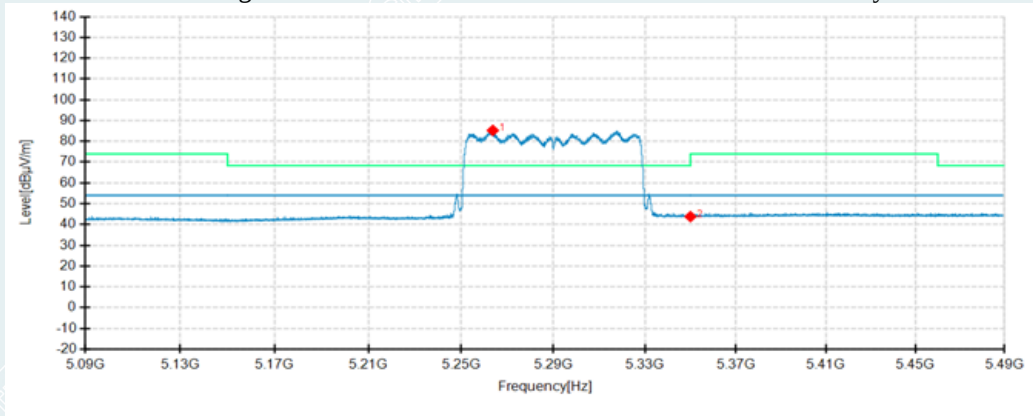

Detector mode: Average

Polarity: Vertical

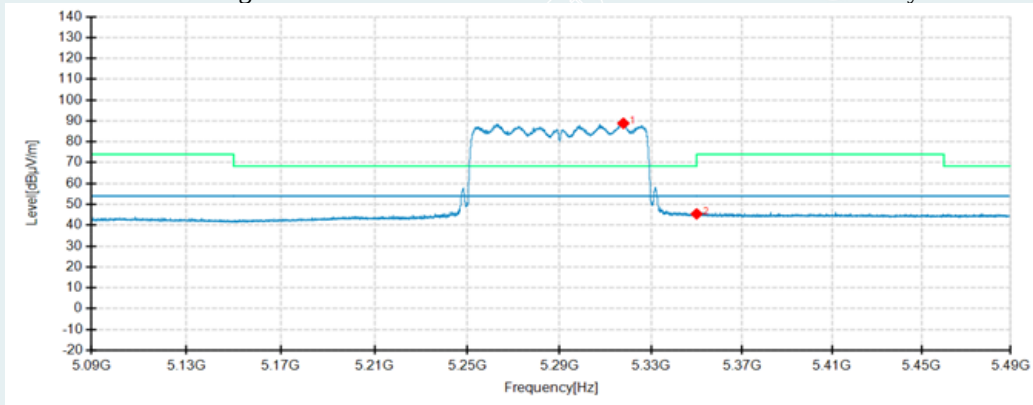


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5263.6800	71.04	85.26	14.22	54.00	-31.26	100	142	Horizontal	N/A
2	5350.0000	28.77	43.79	15.02	54.00	10.21	100	360	Horizontal	/
1	5317.8400	74.27	88.85	14.58	54.00	-34.85	200	12	Vertical	N/A
2	5350.0000	30.39	45.41	15.02	54.00	8.59	200	33	Vertical	/

802.11ac VHT80 mode/5530MHz


Detector mode: Peak

Polarity: Horizontal

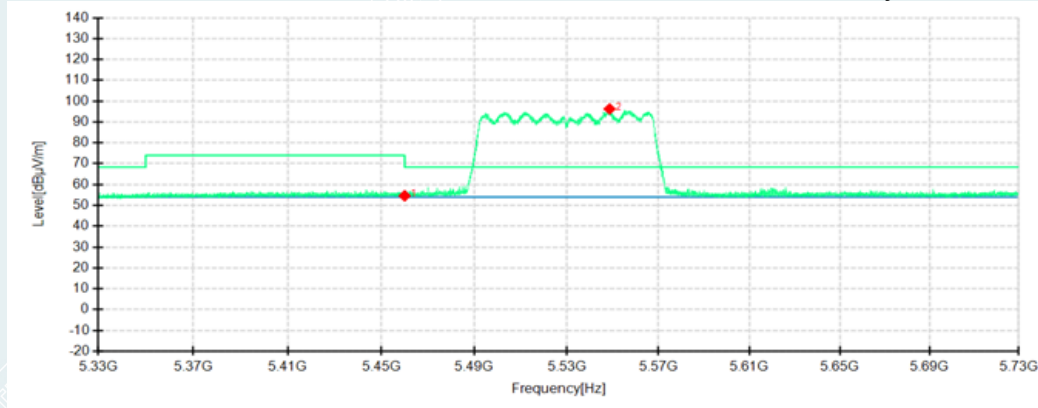

Detector mode: Peak

Polarity: Vertical

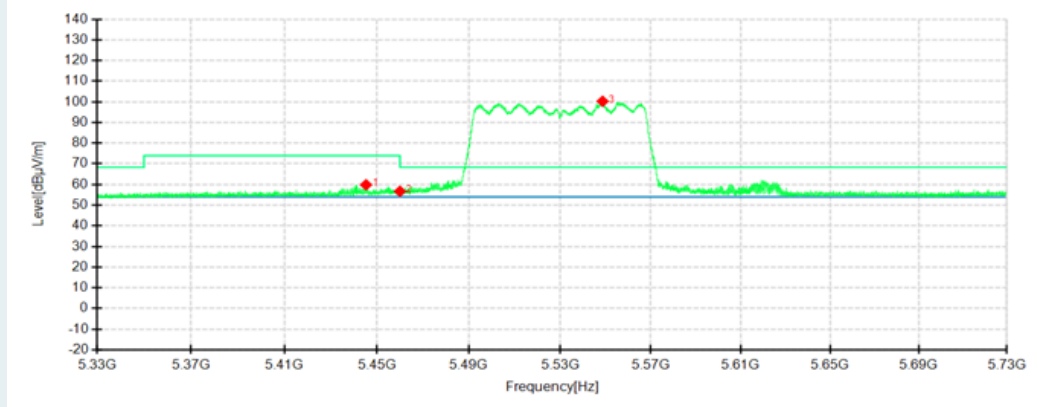


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5460.0000	38.76	54.58	15.82	74.00	19.42	200	184	Horizontal	/
2	5548.6800	79.77	96.24	16.47	68.30	-27.94	200	218	Horizontal	N/A
1	5445.2800	44.08	59.85	15.77	74.00	14.15	200	15	Vertical	/
2	5460.0000	40.86	56.68	15.82	74.00	17.32	200	127	Vertical	/
3	5548.7200	83.80	100.27	16.47	68.30	-31.97	200	9	Vertical	N/A

802.11ac VHT80 mode/5530MHz


Detector mode: Average

Polarity: Horizontal

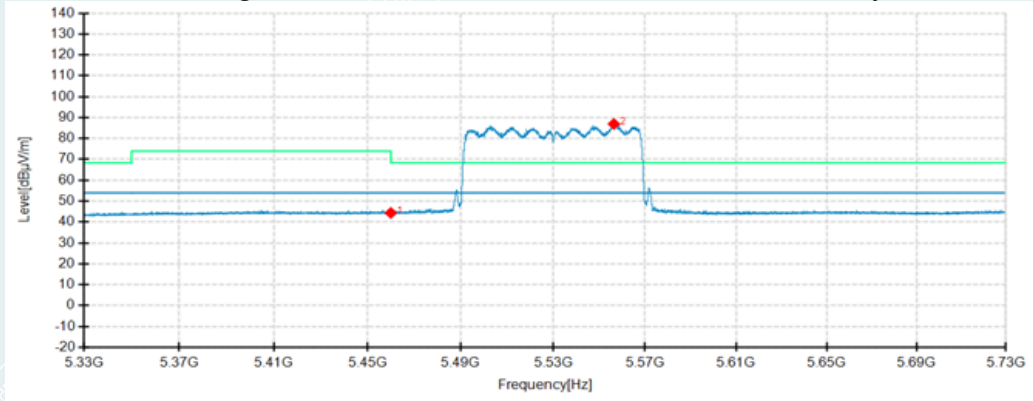

Detector mode: Average

Polarity: Vertical

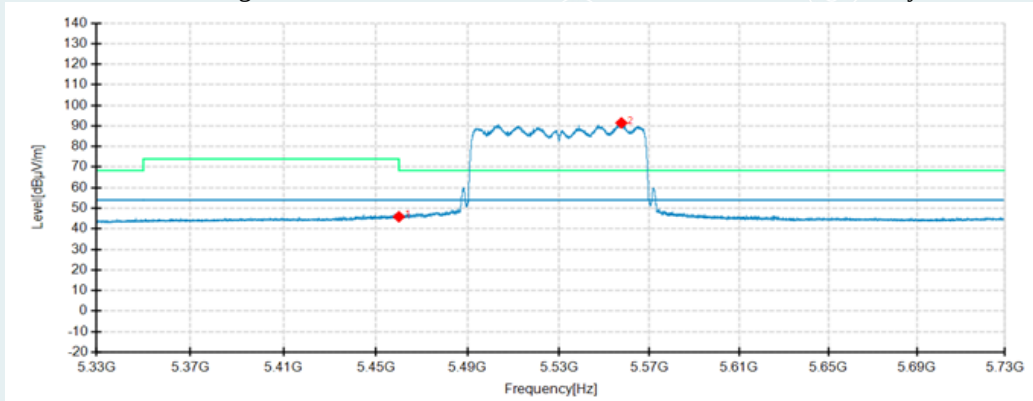


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5460.0000	28.54	44.36	15.82	54.00	9.64	100	142	Horizontal	/
2	5556.4000	70.53	86.94	16.41	54.00	-32.94	200	218	Horizontal	N/A
1	5460.0000	30.02	45.84	15.82	54.00	8.16	200	218	Vertical	/
2	5557.6400	75.06	91.46	16.40	54.00	-37.46	200	9	Vertical	N/A

802.11ac VHT80 mode/5610MHz


Detector mode: Peak

Polarity: Horizontal

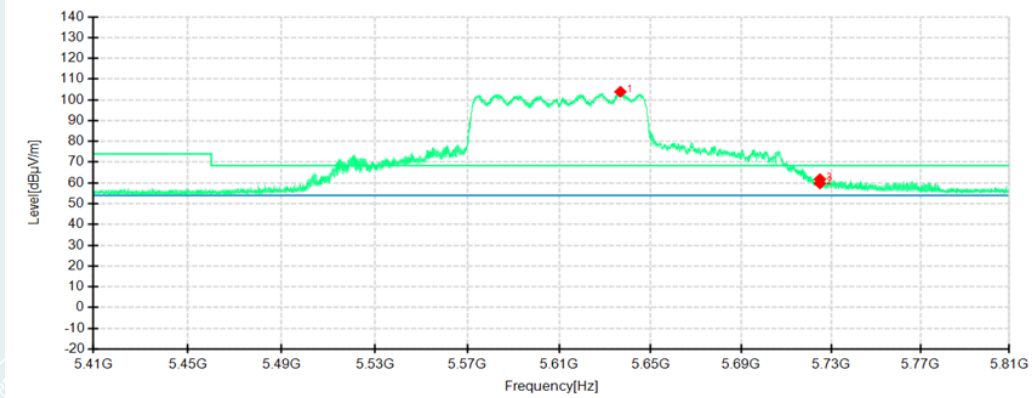

Detector mode: Peak

Polarity: Vertical

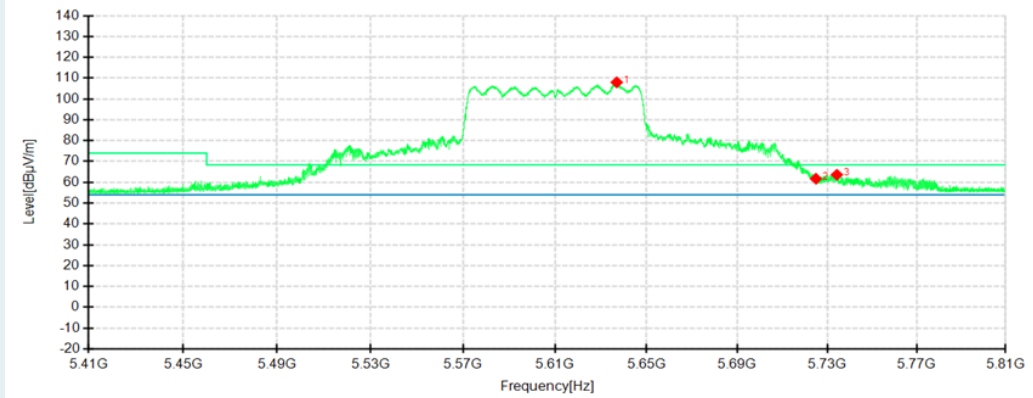


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5636.7600	87.31	103.90	16.59	68.30	-35.60	200	218	Horizontal	N/A
2	5725.0000	42.99	59.78	16.79	68.30	8.52	200	218	Horizontal	/
3	5725.0400	45.02	61.81	16.79	68.30	6.49	200	4	Horizontal	/
1	5636.9600	91.40	107.99	16.59	68.30	-39.69	200	6	Vertical	N/A
2	5725.0000	44.91	61.70	16.79	68.30	6.60	200	218	Vertical	/
3	5734.3200	46.67	63.63	16.96	68.30	4.67	200	46	Vertical	/

802.11ac VHT80 mode/5610MHz


Detector mode: Average

Polarity: Horizontal

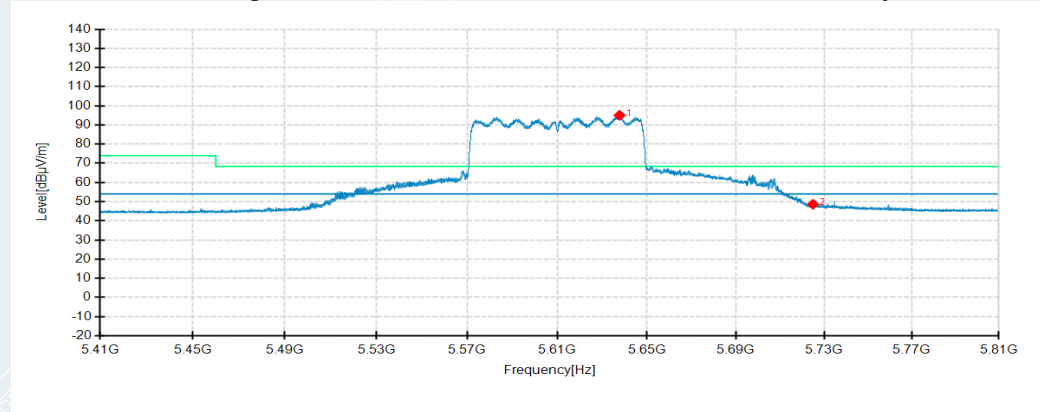

Detector mode: Average

Polarity: Vertical

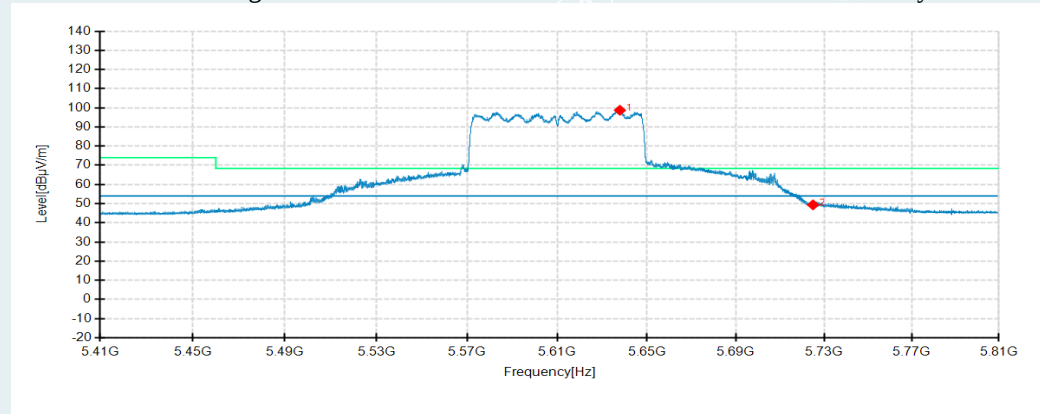

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5637.8000	78.42	95.03	16.61	54.00	-41.03	200	218	Horizontal	N/A
2	5725.0000	31.80	48.59	16.79	54.00	5.41	200	0	Horizontal	/
1	5637.9200	82.11	98.72	16.61	54.00	-44.72	200	12	Vertical	N/A
2	5725.0000	32.56	49.35	16.79	54.00	4.65	200	19	Vertical	/

Remark: Max field strength in 3m distance. No any other emission which falls in restricted bands can be detected and be reported.

8. 6DB BANDWIDTH & 26DB BANDWIDTH & 99% OCCUPIED BANDWIDTH

8.1. LIMITS

Band	Frequency (MHz)	Test Item	Limit
U-NII-1	5150-5250	26dB Bandwidth&99% Occupied Bandwidth	N/A
U-NII-2A	5250-5350	26dB Bandwidth&99% Occupied Bandwidth	N/A
U-NII-2C	5470-5725	26dB Bandwidth&99% Occupied Bandwidth	N/A
U-NII-3	5725-5850	6dB Bandwidth&99% Occupied Bandwidth	6dB Bandwidth $\geq$ 500KHz

8.2. TEST PROCEDURES

For 26dB Bandwidth Measurement :

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with table 1.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurements as needed until the RBW/EBW ratio is approximately 1%.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

For 6dB Bandwidth Measurement :

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with table 2.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

For 99% Occupied Bandwidth Measurement :

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with table 3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, use the 99% power bandwidth function to measure bandwidth.
- Repeat above procedures until all modes and channels were measured.

Record the results in the test report.

Table 1:

26dB Bandwidth	
Spectrum Parameters	Setting
RBW	approximately 1% of the emission bandwidth
VBW	> RBW
Span	40MHz(20MHz Bandwidth mode) 60MHz(40MHz Bandwidth mode) 120MHz(80MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


Table 2:

6dB Bandwidth	
Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	40MHz(20MHz Bandwidth mode) 60MHz(40MHz Bandwidth mode) 120MHz(80MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

Table 3:

99% Occupied Bandwidth	
Spectrum Parameters	Setting
RBW	1% to 5% of the OBW
VBW	approximately three times the RBW
Span	between 1.5 times and 5.0 times the OBW
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

8.3. TEST SETUP

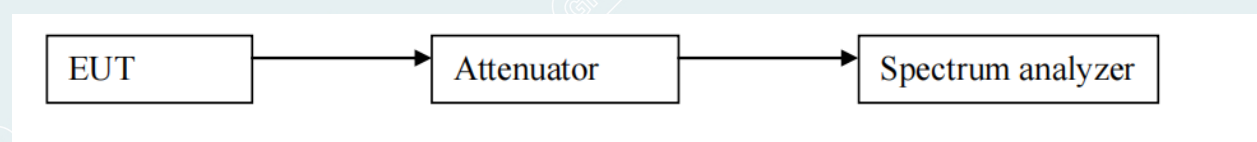

8.4. TEST RESULTS

6DB BANDWIDTH

TestMode	Antenna	Channel	6db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
802.11a	Ant1	5745	16.400	5736.920	5753.320	0.5	PASS
		5785	16.400	5776.920	5793.320	0.5	PASS
		5825	16.400	5816.920	5833.320	0.5	PASS
802.11n HT20	Ant1	5745	17.360	5736.560	5753.920	0.5	PASS
		5785	17.360	5776.560	5793.920	0.5	PASS
		5825	17.400	5816.520	5833.920	0.5	PASS
802.11n HT40	Ant1	5755	35.440	5737.480	5772.920	0.5	PASS
		5795	35.840	5777.240	5813.080	0.5	PASS
802.11ac VHT20	Ant1	5745	17.240	5736.680	5753.920	0.5	PASS
		5785	17.400	5776.520	5793.920	0.5	PASS
		5825	17.400	5816.520	5833.920	0.5	PASS
802.11ac VHT40	Ant1	5755	35.360	5737.400	5772.760	0.5	PASS
		5795	36.000	5777.080	5813.080	0.5	PASS
802.11ac VHT80	Ant1	5775	75.360	5737.400	5812.760	0.5	PASS

26DB BANDWIDTH

TestMode	Antenna	Channel	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
802.11a	Ant1	5180	20.240	5170.080	5190.320	---	PASS
		5200	20.280	5190.040	5210.320	---	PASS
		5240	20.120	5229.960	5250.080	---	PASS
		5260	20.320	5250.000	5270.320	---	PASS
		5300	20.560	5289.680	5310.240	---	PASS
		5320	20.240	5309.840	5330.080	---	PASS
		5500	20.080	5490.040	5510.120	---	PASS
		5580	20.240	5570.000	5590.240	---	PASS
		5700	20.400	5689.760	5710.160	---	PASS
		5745	20.160	5735.120	5755.280	---	PASS
		5785	20.040	5775.120	5795.160	---	PASS
		5825	20.000	5815.080	5835.080	---	PASS
802.11n HT20	Ant1	5180	20.480	5169.880	5190.360	---	PASS
		5200	20.720	5189.800	5210.520	---	PASS
		5240	20.480	5229.880	5250.360	---	PASS
		5260	20.760	5249.800	5270.560	---	PASS
		5300	20.920	5289.560	5310.480	---	PASS
		5320	20.480	5309.760	5330.240	---	PASS
		5500	20.560	5489.880	5510.440	---	PASS
		5580	20.880	5569.800	5590.680	---	PASS
		5700	20.680	5689.760	5710.440	---	PASS
		5745	20.560	5734.800	5755.360	---	PASS
		5785	20.800	5774.760	5795.560	---	PASS
		5825	20.880	5814.720	5835.600	---	PASS
802.11n HT40	Ant1	5190	40.480	5169.920	5210.400	---	PASS
		5230	41.200	5209.520	5250.720	---	PASS
		5270	41.440	5249.040	5290.480	---	PASS
		5310	41.040	5289.520	5330.560	---	PASS
		5510	41.280	5489.440	5530.720	---	PASS
		5550	41.040	5529.600	5570.640	---	PASS
		5670	41.840	5649.040	5690.880	---	PASS
		5755	40.560	5734.600	5775.160	---	PASS
		5795	41.360	5774.520	5815.880	---	PASS


802.11ac VHT20	Ant1	5180	20.760	5169.880	5190.640	---	PASS
		5200	20.920	5189.640	5210.560	---	PASS
		5240	20.480	5229.840	5250.320	---	PASS
		5260	20.480	5249.880	5270.360	---	PASS
		5300	20.760	5289.680	5310.440	---	PASS
		5320	20.520	5309.760	5330.280	---	PASS
		5500	20.760	5489.640	5510.400	---	PASS
		5580	20.440	5569.840	5590.280	---	PASS
		5700	21.000	5689.560	5710.560	---	PASS
		5745	20.720	5734.920	5755.640	---	PASS
		5785	20.800	5774.680	5795.480	---	PASS
		5825	20.800	5814.600	5835.400	---	PASS
802.11ac VHT40	Ant1	5190	40.960	5169.840	5210.800	---	PASS
		5230	40.560	5209.760	5250.320	---	PASS
		5270	41.360	5249.440	5290.800	---	PASS
		5310	41.360	5289.360	5330.720	---	PASS
		5510	41.360	5489.440	5530.800	---	PASS
		5550	41.600	5529.280	5570.880	---	PASS
		5670	40.960	5649.600	5690.560	---	PASS
		5755	41.520	5734.440	5775.960	---	PASS
802.11ac VHT80	Ant1	5795	40.800	5774.840	5815.640	---	PASS
		5210	80.800	5170.000	5250.800	---	PASS
		5290	80.000	5250.000	5330.000	---	PASS
		5530	79.840	5490.160	5570.000	---	PASS
		5610	81.280	5570.000	5651.280	---	PASS
		5775	79.680	5735.160	5814.840	---	PASS


99% OCCUPIED BANDWIDTH


TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
802.11a	Ant1	5180	17.263	5171.449	5188.711	---	PASS
		5200	17.383	5191.409	5208.791	---	PASS
		5240	17.502	5231.249	5248.751	---	PASS
		5260	17.343	5251.449	5268.791	---	PASS
		5300	17.343	5291.369	5308.711	---	PASS
		5320	17.343	5311.289	5328.631	---	PASS
		5500	17.343	5491.489	5508.831	---	PASS
		5580	17.423	5571.329	5588.751	---	PASS
		5700	17.383	5691.369	5708.751	---	PASS
		5745	17.463	5736.489	5753.951	---	PASS
		5785	17.263	5776.449	5793.711	---	PASS
		5825	17.622	5816.489	5834.111	---	PASS
802.11n HT20	Ant1	5180	18.222	5171.049	5189.271	---	PASS
		5200	18.422	5190.929	5209.351	---	PASS
		5240	18.262	5231.009	5249.271	---	PASS
		5260	18.222	5251.049	5269.271	---	PASS
		5300	18.142	5290.929	5309.071	---	PASS
		5320	18.182	5311.009	5329.191	---	PASS
		5500	18.342	5490.929	5509.271	---	PASS
		5580	18.262	5570.929	5589.191	---	PASS
		5700	18.302	5691.049	5709.351	---	PASS
		5745	18.142	5736.089	5754.231	---	PASS
		5785	18.142	5776.049	5794.191	---	PASS
		5825	18.262	5816.009	5834.271	---	PASS
802.11n HT40	Ant1	5190	36.444	5172.018	5208.462	---	PASS
		5230	36.843	5211.778	5248.621	---	PASS
		5270	36.683	5251.698	5288.382	---	PASS
		5310	36.444	5291.858	5328.302	---	PASS
		5510	36.603	5491.858	5528.462	---	PASS
		5550	36.923	5531.778	5568.701	---	PASS
		5670	36.603	5651.858	5688.462	---	PASS
		5755	36.683	5736.778	5773.462	---	PASS
		5795	36.683	5776.858	5813.541	---	PASS


802.11ac VHT20	Ant1	5180	18.182	5171.129	5189.311	---	PASS
		5200	18.182	5190.929	5209.111	---	PASS
		5240	18.062	5231.009	5249.071	---	PASS
		5260	18.222	5250.929	5269.151	---	PASS
		5300	17.982	5291.009	5308.991	---	PASS
		5320	18.062	5311.049	5329.111	---	PASS
		5500	18.342	5490.889	5509.231	---	PASS
		5580	18.262	5570.969	5589.231	---	PASS
		5700	18.182	5691.089	5709.271	---	PASS
		5745	18.342	5735.929	5754.271	---	PASS
		5785	18.262	5775.969	5794.231	---	PASS
		5825	18.222	5816.009	5834.231	---	PASS
802.11ac VHT40	Ant1	5190	36.523	5171.858	5208.382	---	PASS
		5230	36.523	5211.858	5248.382	---	PASS
		5270	36.603	5251.858	5288.462	---	PASS
		5310	36.523	5291.778	5328.302	---	PASS
		5510	36.763	5491.858	5528.621	---	PASS
		5550	36.603	5531.858	5568.462	---	PASS
		5670	36.683	5651.858	5688.541	---	PASS
		5755	36.523	5736.858	5773.382	---	PASS
802.11ac VHT80	Ant1	5795	36.683	5776.858	5813.541	---	PASS
		5210	76.244	5172.118	5248.362	---	PASS
		5290	75.924	5251.958	5327.882	---	PASS
		5530	76.563	5491.638	5568.202	---	PASS
		5610	76.563	5571.798	5648.362	---	PASS
		5775	75.764	5737.278	5813.042	---	PASS


6DB BANDWIDTH

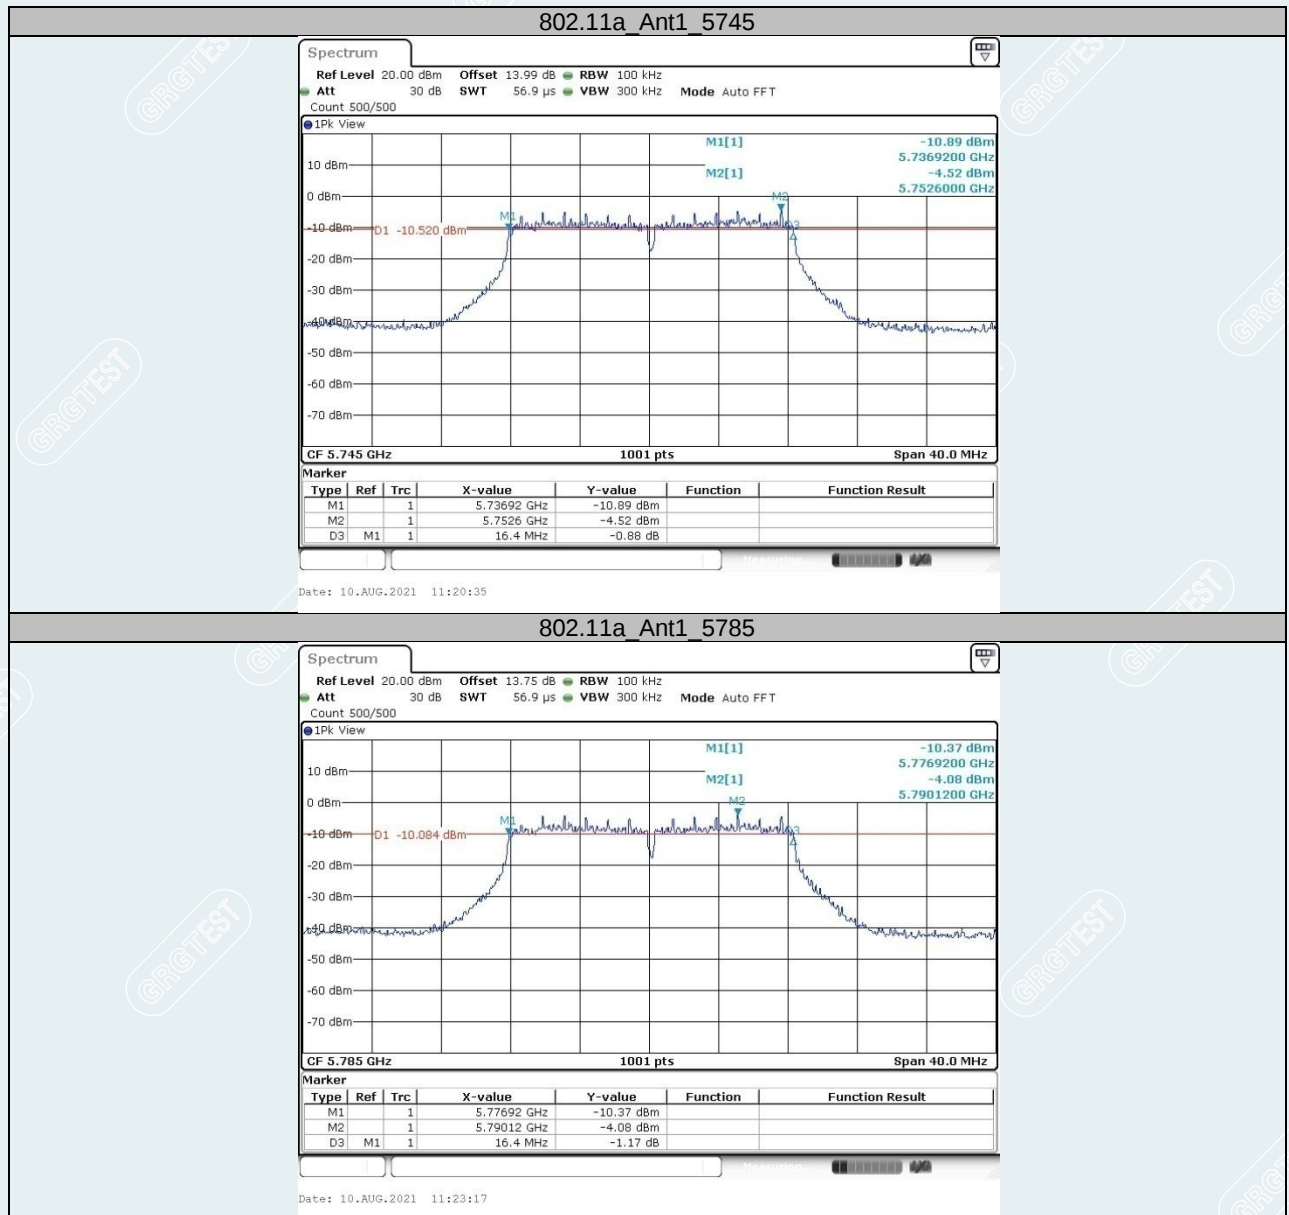

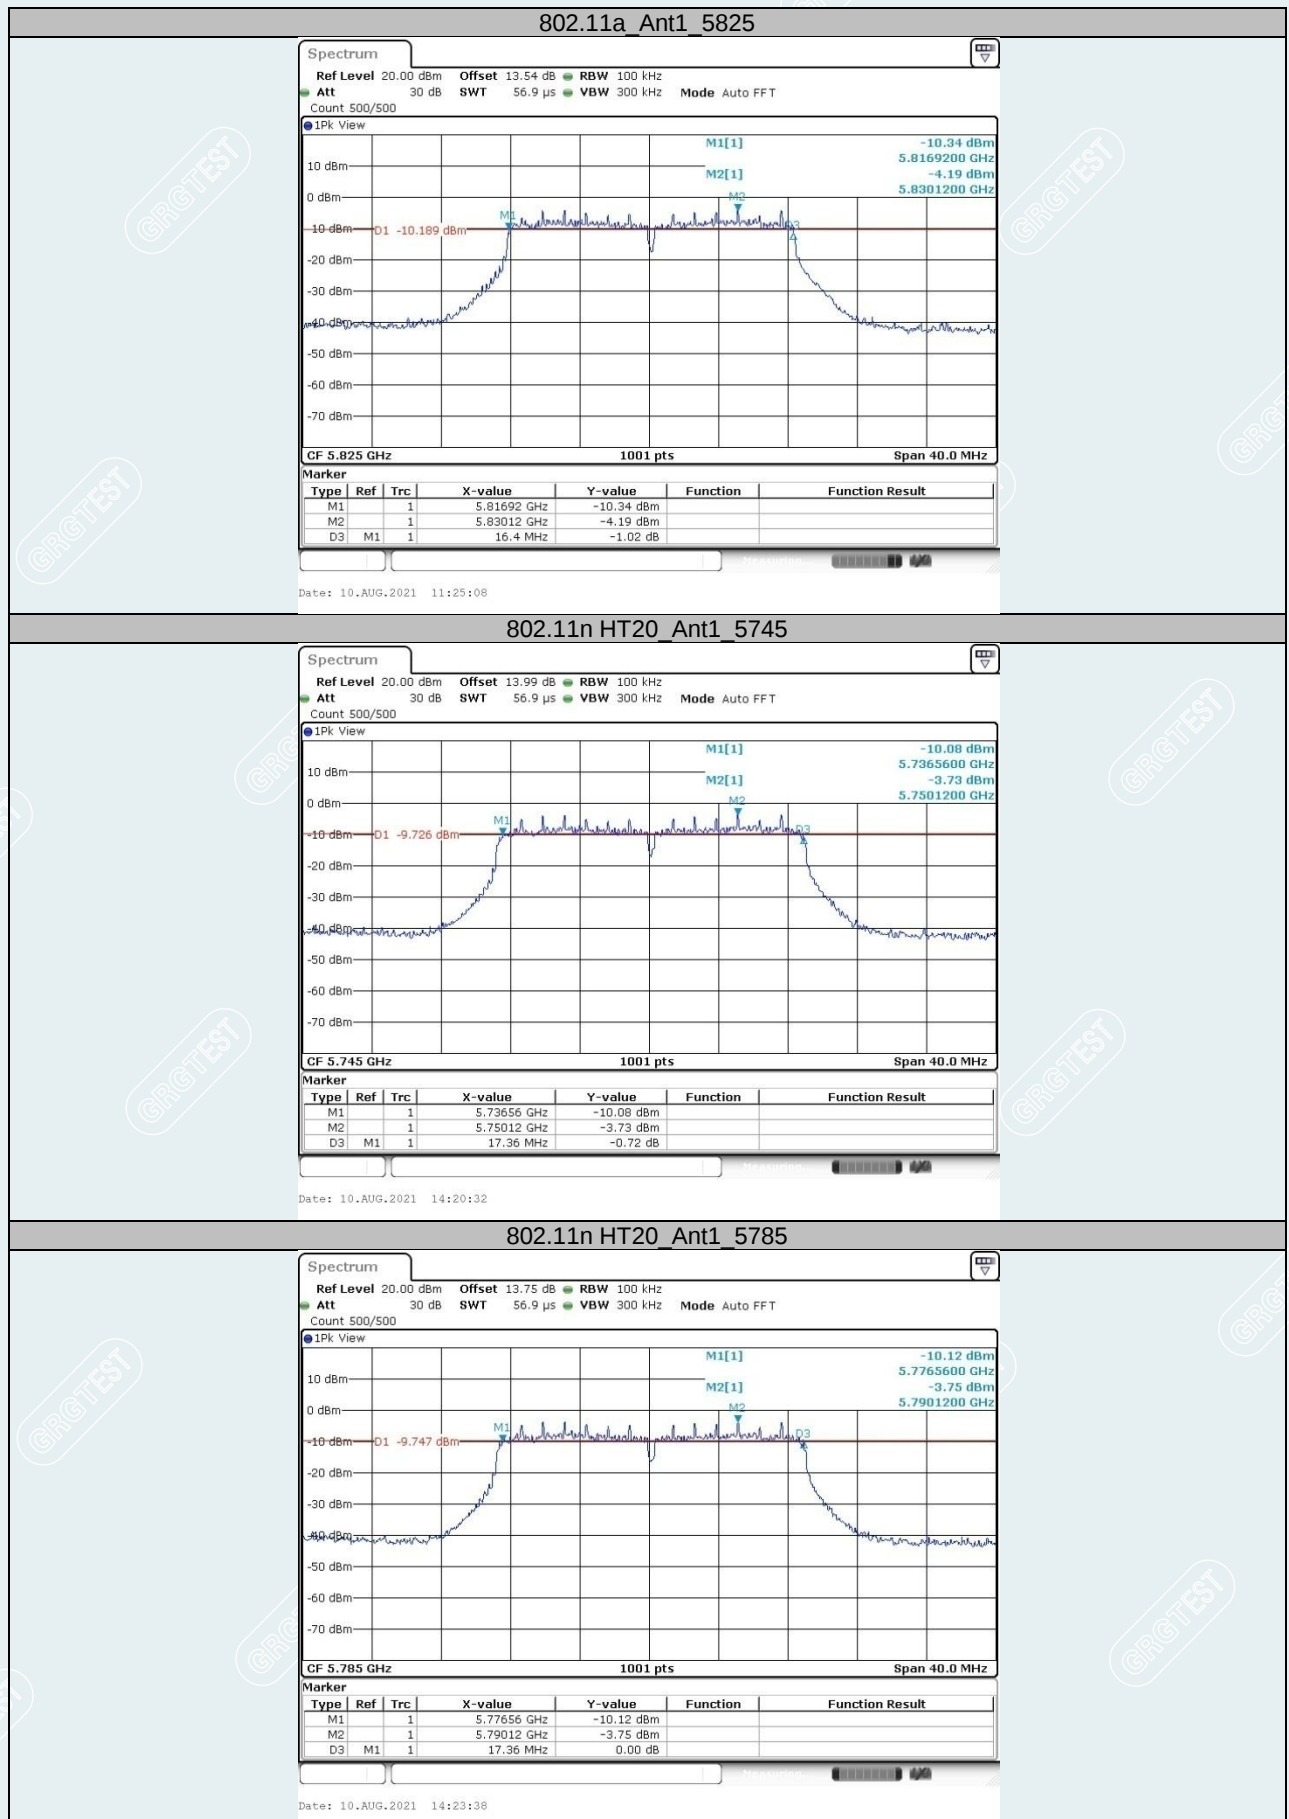


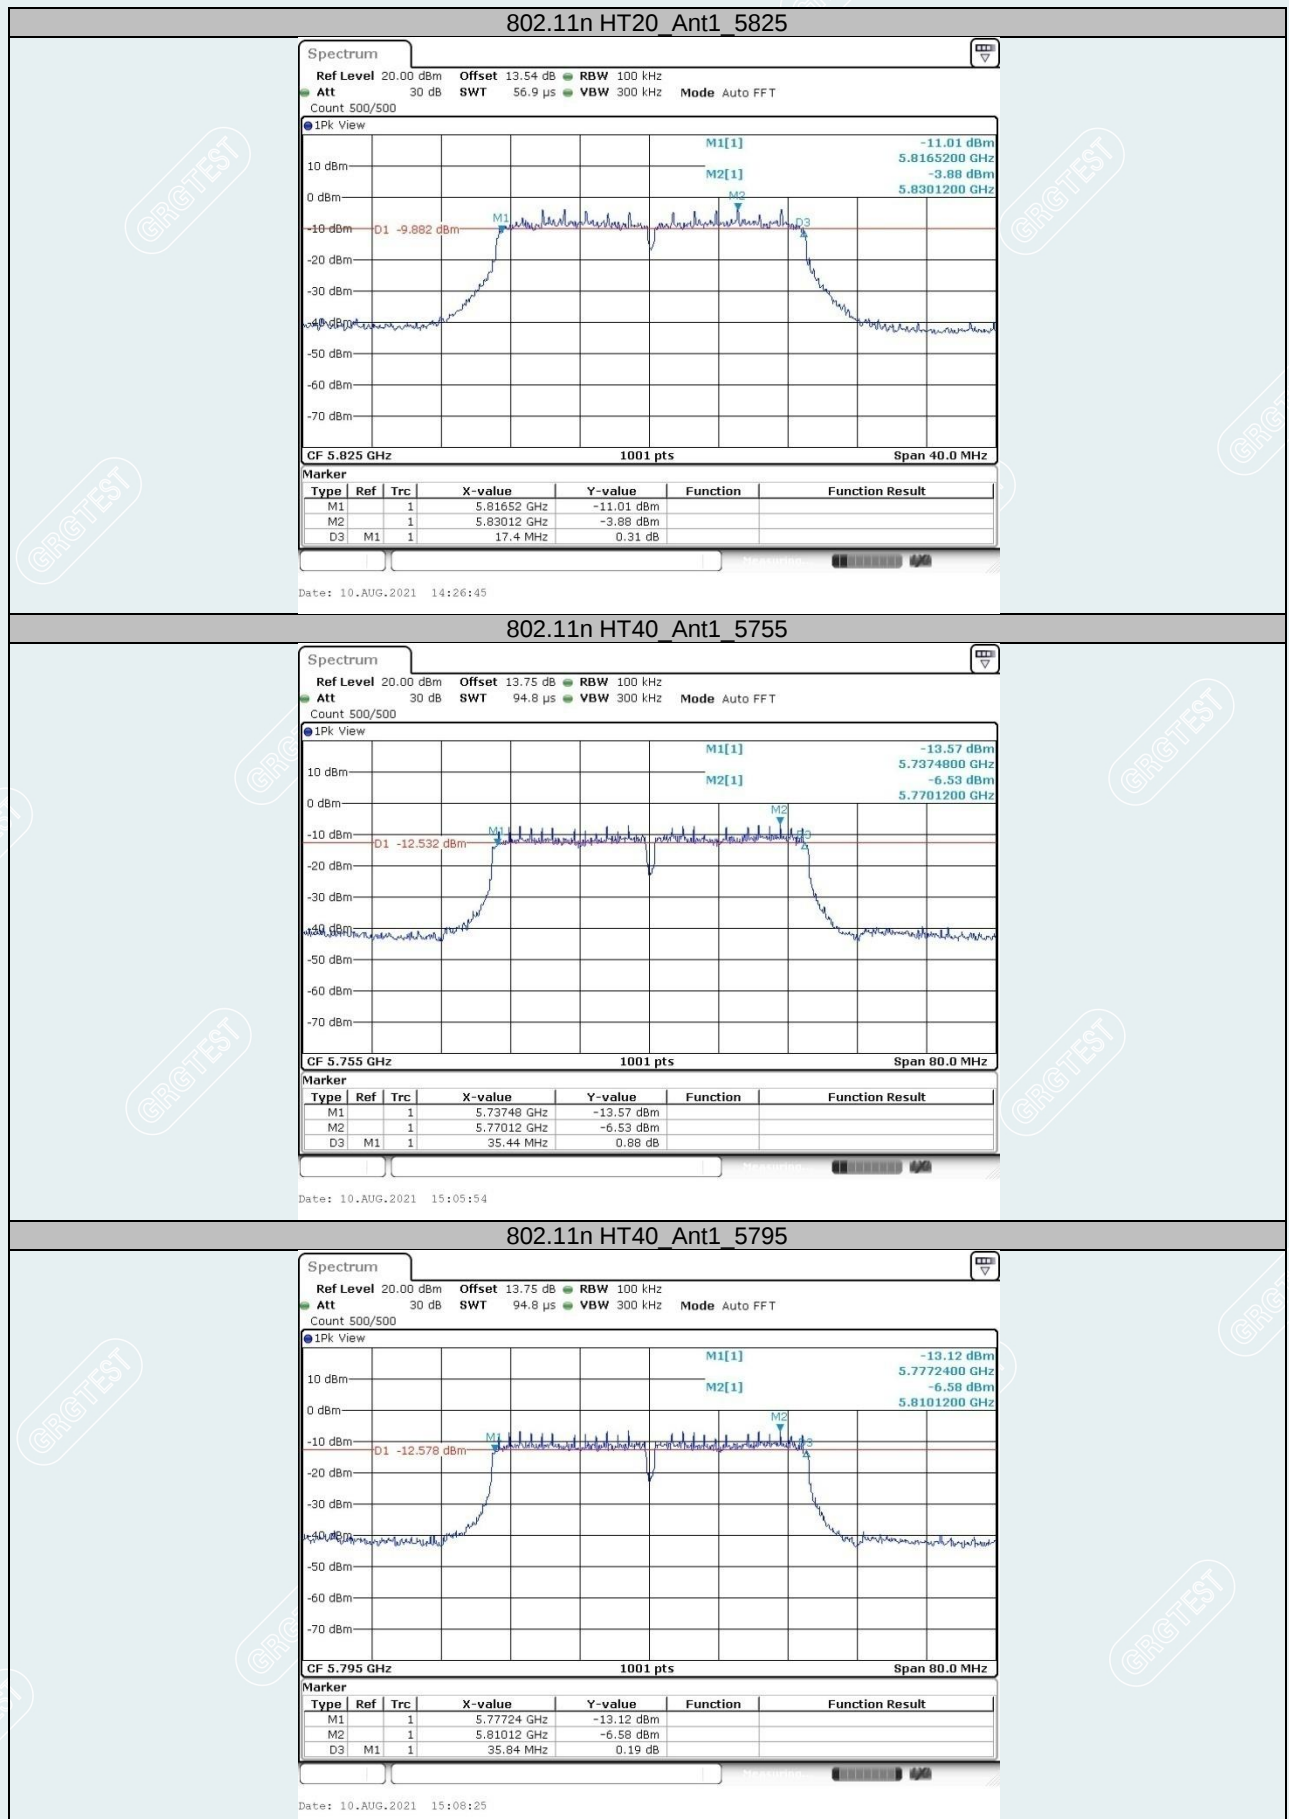

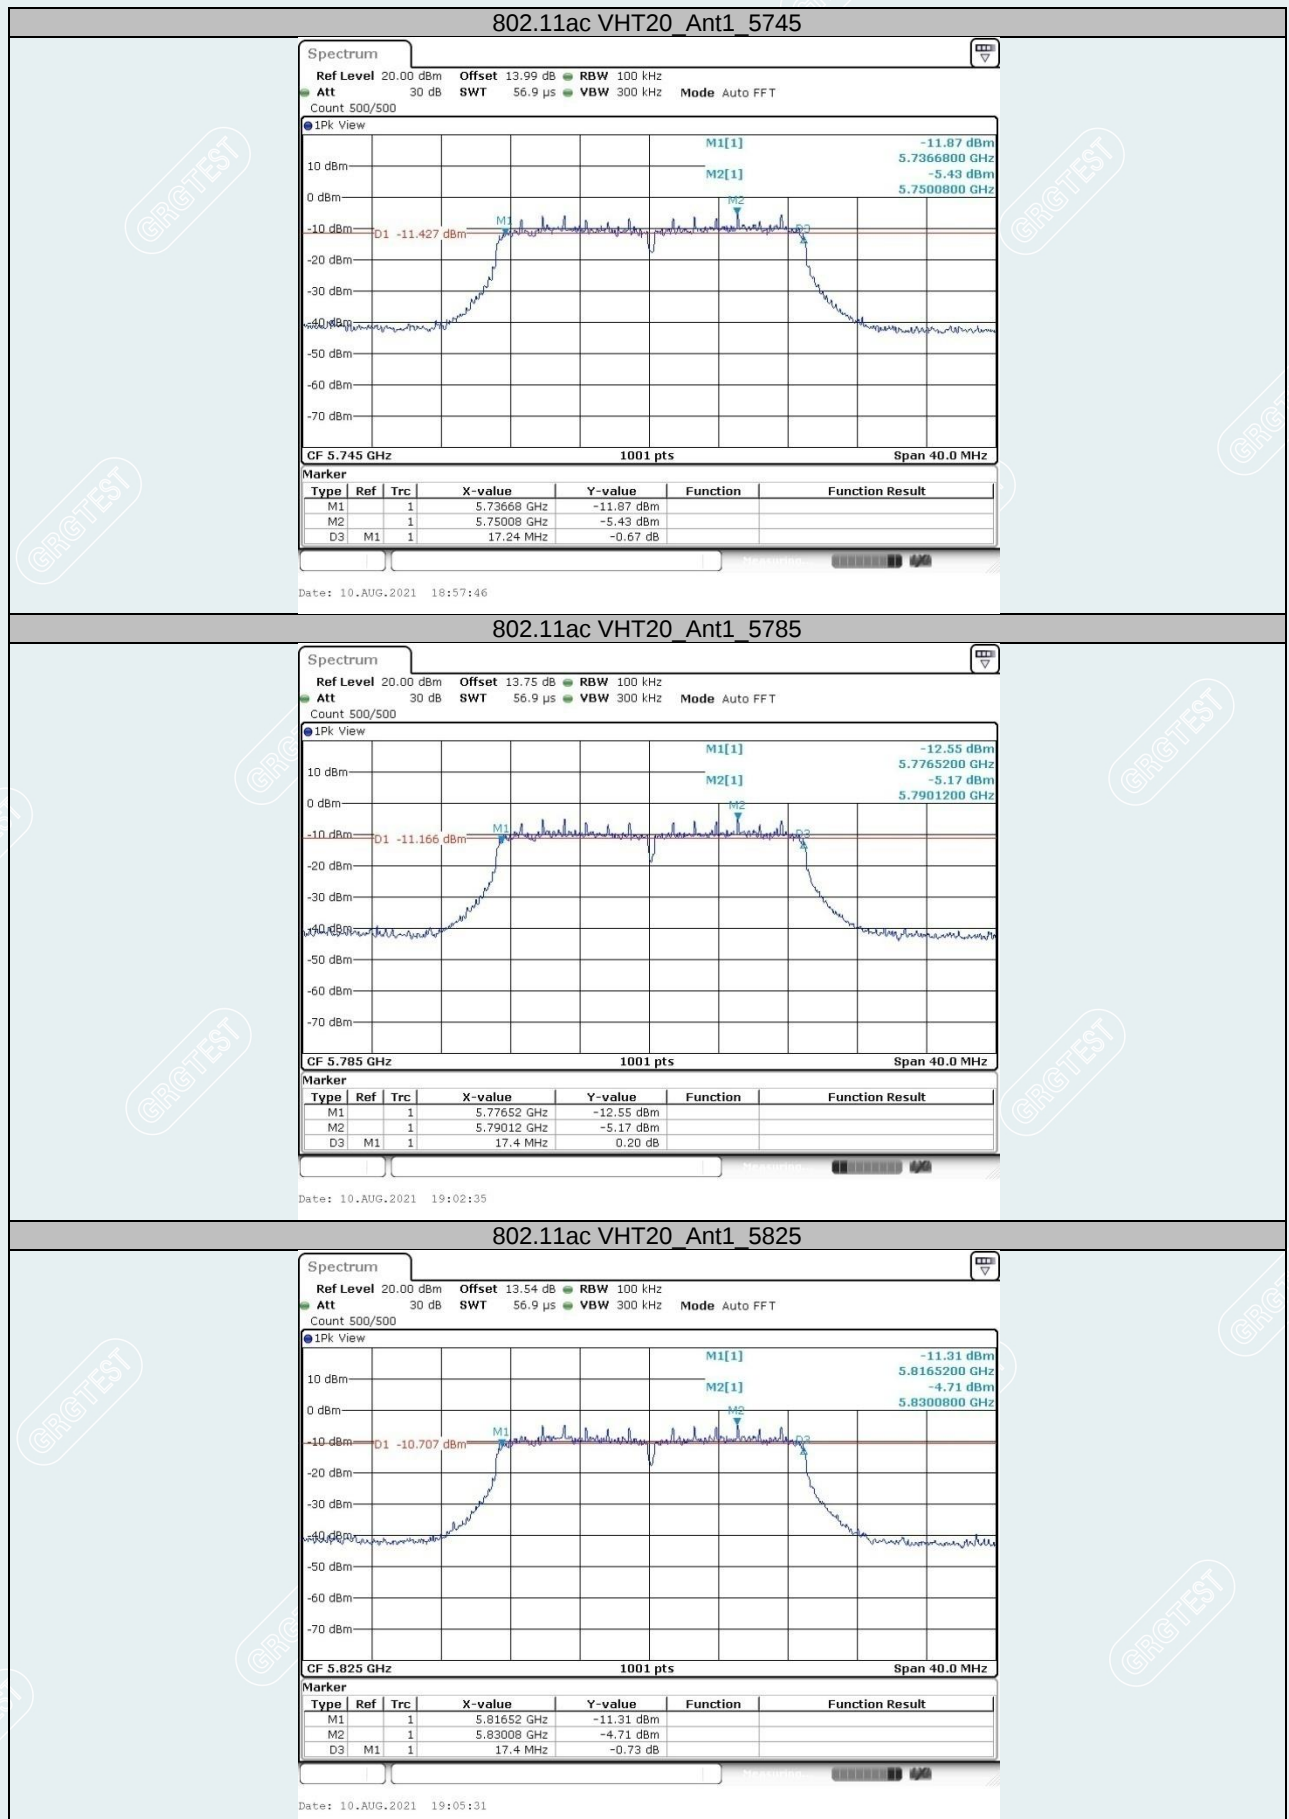


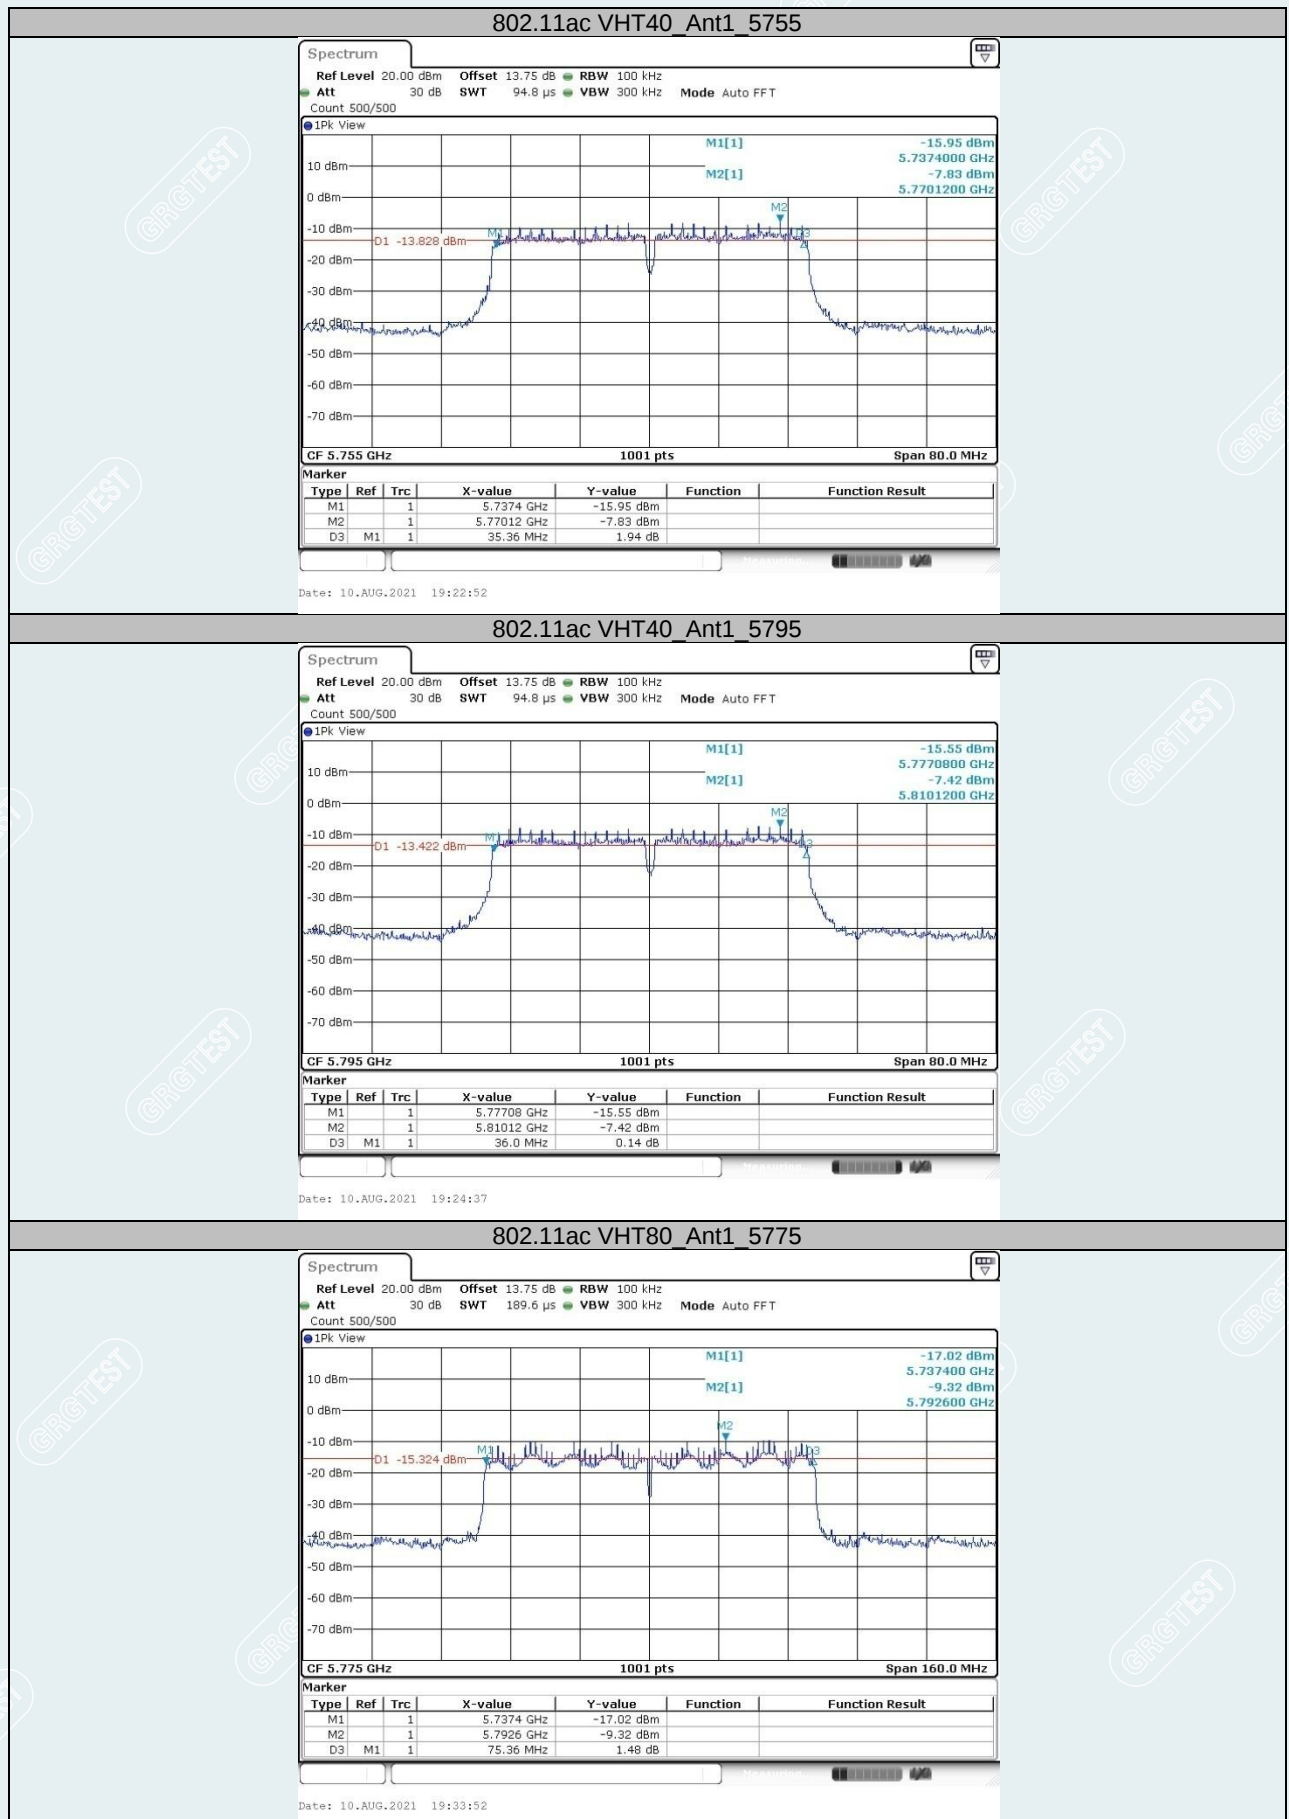


26DB BANDWIDTH

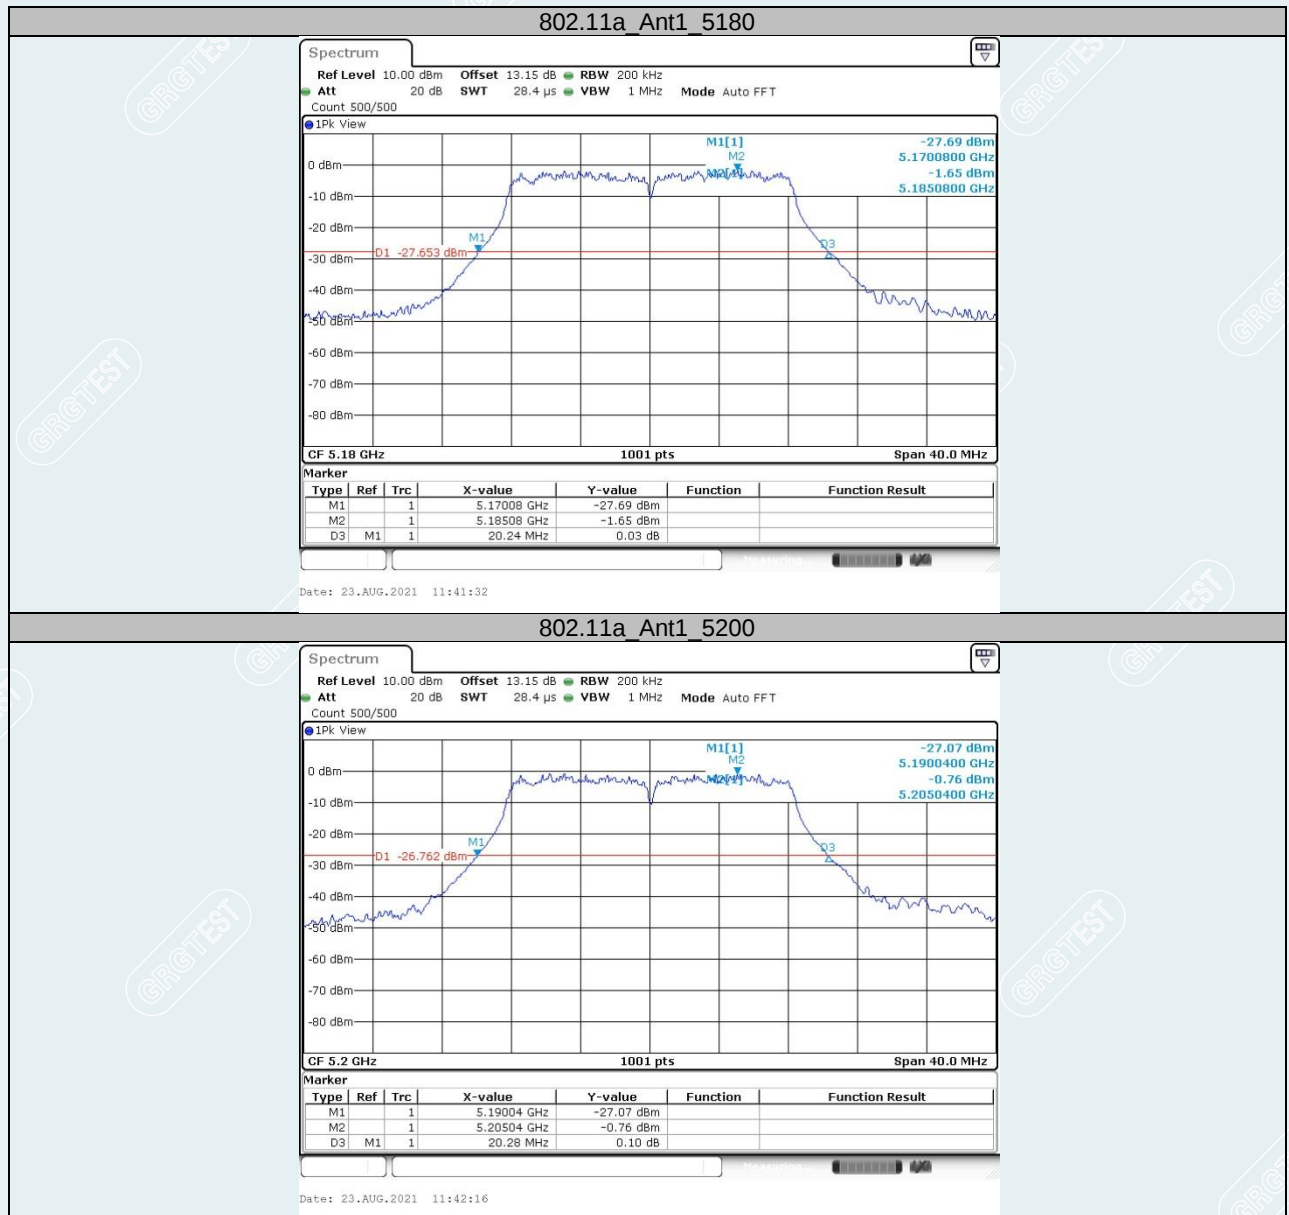

802.11a Ant1 5240

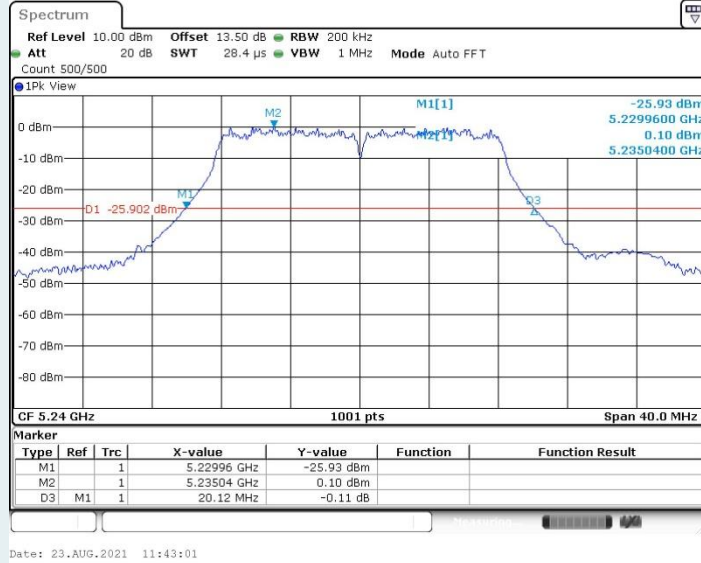

802.11a Ant1 5260

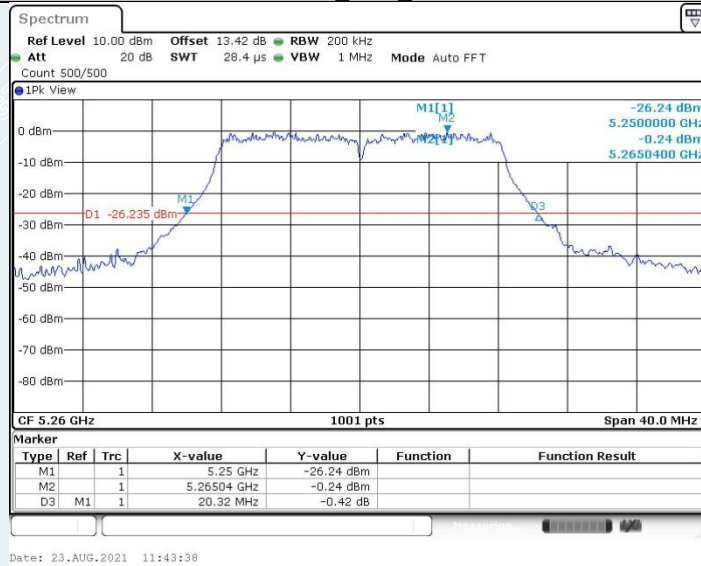

802.11a Ant1 5300

