



Test Report No.:  
**FCCSZ2025-0020-RF**

## RF Test Report

FCC ID : 2AKIT-PSS04

NAME OF SAMPLE : Presence Multi-Sensor FP300

APPLICANT : Lumi United Technology Co., Ltd

CLASSIFICATION OF TEST : N/A

**CVC Testing Technology (Shenzhen) Co., Ltd.**



<b>Applicant</b>	<b>Name:</b> Lumi United Technology Co., Ltd <b>Address:</b> B1, Chongwen Park, Nanshan iPark, Liuxian Avenue, Taoyuan Residential District, Nanshan District, Shenzhen, China		
<b>Manufacturer</b>	<b>Name:</b> Lumi United Technology Co., Ltd <b>Address:</b> B1, Chongwen Park, Nanshan iPark, Liuxian Avenue, Taoyuan Residential District, Nanshan District, Shenzhen, China		
<b>Equipment Under Test</b>	<b>Name:</b> Presence Multi-Sensor FP300 <b>Model/Type:</b> PS-S04E <b>Additional Model:</b> PS-S04D <b>Serial NO.:</b> N/A <b>Sample NO.:</b> FCCSZ2025-0020_2-1		
Date of Receipt.	Feb.14,2025	Date of Testing	Feb.14,2025~ May 30,2025
<b>Test Specification</b>		<b>Test Result</b>	
FCC Part 15, Subpart C (15.255)		PASS	
<b>Evaluation of Test Result</b>	The equipment under test was found to comply with the requirements of the standards applied.		
Seal of CVC <b>Issue Date:</b> May.22,2025			
Compiled by:  Liang Jiatong  Name      Signature	Reviewed by:  Mo Xianbiao  Name      Signature	Approved by:  Dong Sanbi  Name      Signature	
<b>Other Aspects:</b> NONE.			
Abbreviations:OK,    Pass= passed		Fail = failed	N/A= not applicable      EUT= equipment, sample(s) under tested

This test report relates only to the EUT, and shall not be reproduced except in full, without written approval of CVC.



## TABLE OF CONTENTS

RELEASE CONTROL RECORD .....	4
<b>1 SUMMARY OF TEST RESULTS.....</b>	<b>5</b>
1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
1.2 MEASUREMENT UNCERTAINTY .....	7
1.3 TEST LOCATION.....	7
<b>2 GENERAL INFORMATION.....</b>	<b>8</b>
2.1 GENERAL PRODUCT INFORMATION .....	8
2.2 OTHER INFORMATION .....	8
2.3 TEST MODE .....	8
2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	9
2.5 DESCRIPTION OF SUPPORT UNITS .....	9
2.6 FAR FIELD CONDITION FOR FREQUENCY ABOVE 18GHz .....	10
2.7 RADIATED TEST SETUP .....	11
<b>3 TEST TYPES AND RESULTS.....</b>	<b>13</b>
3.1 CONDUCTED EMISSION MEASUREMENT .....	13
3.2 TRANSMITTER SPURIOUS EMISSIONS MEASUREMENT.....	15
3.3 DUTY CYCLE, OFF TIME REQUIREMENT .....	26
3.4 BANDWIDTH MEASUREMENT .....	28
3.5 EIRP POWER MEASUREMENT.....	30
3.6 FREQUENCY STABILITY.....	32
3.7 ANTENNA REQUIREMENT .....	33
<b>4 PHOTOGRAPHS OF TEST SETUP .....</b>	<b>34</b>
<b>5 PHOTOGRAPHS OF THE EUT .....</b>	<b>35</b>



## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
FCCSZ2025-0020-RF	Original release	May.22,2025



## 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15.255			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	N/A	DC power supply
15.255(d)	Transmitter Spurious Emissions	PASS	See section 3.2
15.215(c)	Occupied Bandwidth	PASS	See section 3.4
15.255(c)(2)	Duty cycle, Off Time Requirement	PASS	See section 3.3
15.255(c)(2)	EIRP	PASS	See section 3.5
15.255(f)	Frequency stability	PASS	See section 3.6
15.255(h)	Group Installation	N/A	The test is not applicable since there are no external phase-locking inputs in this EUT
15.203	Antenna Requirement	PASS	See section 3.7



## 1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial Number	Cal. interval	Cal. Day	Cal. Due
RE Test - 3M Chamber						
Spectrum Analyzer	R&S	FSV 40	CS030001	1 year	2025/04/23	2026/04/22
EMI Test Receiver	R&S	ESR3	CS030005	1 year	2025/05/22	2026/05/21
Loop antenna (8.3k~30MHz)	Rohde&Schwarz	HFH2-Z2E	100951	1 year	2024/06/04	2025/06/03
Horn antenna(1GHz-18GHz)	ETS-Lindgren	3117	CS030007	1 year	2025/03/29	2026/03/28
Horn antenna(18GHz-40GHz)	STEATITE	QMS-00880	CS030008	1 year	2025/03/22	2026/03/21
Automatic control unit(RSE)	R&S	OSP220	CS030019	1 year	2024/07/03	2025/07/02
Filter group(RSE-BT/WiFi)	R&S	WiFi/BT Variant 1	CS030020	1 year	2025/04/23	2026/04/22
Filter group(RSE-Cellular)	R&S	Cellular Variant 1	CS030021	1 year	2025/04/23	2026/04/22
Preamplifier(1GHz-18GHz)	R&S	SCU18F	CS030031-1	1 year	2025/04/23	2026/04/22
Preamplifier(1GHz-18GHz)	R&S	SCU-18F	CS030031	1 year	2025/04/23	2026/04/22
Antenna(30MHz~1001MHz)	SCHWARZBECK	VULB9168	CS020006	1 year	2025/01/23	2026/01/22
Preamplifier(1GHz-18GHz)	R&S	SCU-01F	CS0200042	1 year	2025/04/23	2026/04/22
Preamplifier(18GHz-40GHz)	R&S	SCU40A	CS0200045	1 year	2025/04/23	2026/04/22
Attenuator	boyang	BY--N-2W-5dB	/	1 year	2025/01/23	2026/01/22
Temperature and humidity meter	yuhuaze	/	WK0001	1 year	2025/04/29	2026/04/28
#2 control room	MORI	433	CS030028	3 year	2023/05/17	2026/05/16
3m anechoic chamber	MORI	966	CS030011	3 year	2023/05/17	2026/05/16
Equipment	Manufacturer	Model No.	Serial Number	Cal. interval	Cal. Day	Cal. Due
RE Test - 3M Chamber						
3m anechoic chamber	MORI	966	CS030011	3 year	2023/05/19	2026/05/18
#2 control room	MORI	433	CS030028	3 year	2023/05/17	2026/05/16
Signal&Spectrum Analyzer	keysight	N9040B	CS030074	1 year	2025/05/22	2026/05/21
SA Expansion Module(40-60GHz)	VDI	N9029AV19	CS030075	3 year	2024/09/15	2025/09/14
SA Expansion Module(60-90GHz)	VDI	N9029AV12	CS030076	3 year	2024/09/15	2025/09/14
SA Expansion Module(90-140GHz)	VDI	N9029AV08	CS030077	3 year	2024/09/15	2025/09/14
SA Expansion Module(140-220GHz)	VDI	N9029AV05	CS030078	3 year	2024/09/15	2025/09/14



## 1.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement Uncertainty		
No.	Item	Measurement Uncertainty
1	Occupied Channel Bandwidth	±1.86%
2	Radiated emission(9kHz-30MHz)	+/-5.6 dB
3	Radiated Emissions(30MHz-1GHz)	±5.0dB
4	Radiated Emissions(1GHz-18GHz)	±4.8dB
5	Radiated Emissions(18GHz-40GHz)	±5.1dB
6	Radiated Emissions(40GHz-60GHz)	±4.8dB
7	Radiated Emissions(60GHz-90GHz)	±4.8dB
8	Radiated Emissions(90GHz-140GHz)	±5.0dB
9	Radiated Emissions(140GHz-220GHz)	±5.1dB
10	Radiated Emissions(220GHz-300GHz)	±4.8dB
11	Temperature	±0.73°C
12	Supply voltages	±0.37 %
13	Humidity	±3.9 %

**Remark: 95% Confidence Levels, k=2.**

## 1.3 TEST LOCATION

The tests and measurements refer to this report were performed by EMC testing Lab. of CVC Testing Technology (Shenzhen) Co., Ltd.

Lab Address: No. 1301-14&16, Guanguang Road, Xinlan Community, Guanlan Subdistrict, Longhua District, Shenzhen, Guangdong, China

Post Code: 518110 Tel: 0755-23763060-8805

Fax: 0755-23763060 E-mail: sz-kf@cvc.org.cn

FCC(Test firm designation number: CN1363)

IC(Test firm CAB identifier number: CN0137)

CNAS(Test firm designation number: L16091)



## 2 GENERAL INFORMATION

### 2.1 GENERAL PRODUCT INFORMATION

PRODUCT	Presence Multi-Sensor FP300
BRAND	N/A
TEST MODEL	PS-S04E
ADDITIONAL MODEL	PS-S04D
POWER SUPPLY	DC 3V from battery(2*CR2450*3V)
MODULATION TECHNOLOGY	FMCW
FREQUENCY RANGE	57 ~ 61.56GHz
PEAK OUTPUT POWER	19.57dBm (Maximum)
ANTENNA TYPE (Note 4)	AiP Antenna with 7.39dBi Gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A

Note:

1. For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. EUT photo refer to report.
4. Since the above data and/or information is provided by the client, CVC is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
5. Only differences are the model name

### 2.2 OTHER INFORMATION

The EUT only have one channel.

CHANNEL	FREQUENCY (MHz)
1	59800

### 2.3 TEST MODE

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis (if EUT with antenna diversity architecture) and packet type.

The worst case was found when positioned on x axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

MODE	MODEL	FREQUENCY (GHz)	TEST ITEM
TM1	PS-S04E	59.8	ALL



## 2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product, according to the specifications of the manufacturers. It must comply with the requirements of the following standards:

**FCC PART 15, SUBPART C. SECTION 15.255  
KDB 364244 D01 MEAS 15.255 RADARS V01R01**

**ANSI C63.10-2020**

TCBC Workshop(2023.10.25) Part 15.255 Rules Amendment  
Keysight Application Note 5952-1039

All test items have been performed and recorded as per the above standards.

## 2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support Equipment					
NO	Description	Brand	Model No.	Serial Number	Supplied by
Support Cable					
NO	Description	Quantity (Number)	Length (cm)	Detachable (Yes/ No)	Shielded (Yes/ No)




## 2.6 FAR FIELD CONDITION FOR FREQUENCY ABOVE 18GHz

The equipment under test was transmitting while connected to its integral antenna and is placed on a turn table. The measurement antenna is in the far field of the EUT per formula  $2D^2/\lambda$  where D is the larger between the dimension of the measurement antenna and the transmitting antenna of the EUT. In this case, "D" is the largest dimension of the measurement antenna. The EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.


Horn Antenna	Frequency (GHz)	Antenna Dimension A(m)	Wavelength ( $\lambda$ )(m)	Far field R(m)>=2D <sup>2</sup> /λ	Measurement Distance(D)(m)
QMS-00880	18	0.08	0.0167	0.77	3
	40	0.08	0.0075	1.71	
HO19R	40	0.046	0.0075	0.56	1
	60	0.046	0.005	0.85	
HO12R	60	0.03	0.005	0.36	1
	90	0.03	0.0033	0.55	
HO8R	90	0.019	0.0033	0.22	1
	140	0.019	0.0021	0.34	
HO5R	140	0.012	0.0021	0.14	1
	220	0.012	0.0014	0.21	
HO3R	220	0.008	0.0014	0.09	1
	330	0.008	0.0009	0.14	

## 2.7 RADIATED TEST SETUP


Below 30MHz Test Setup:

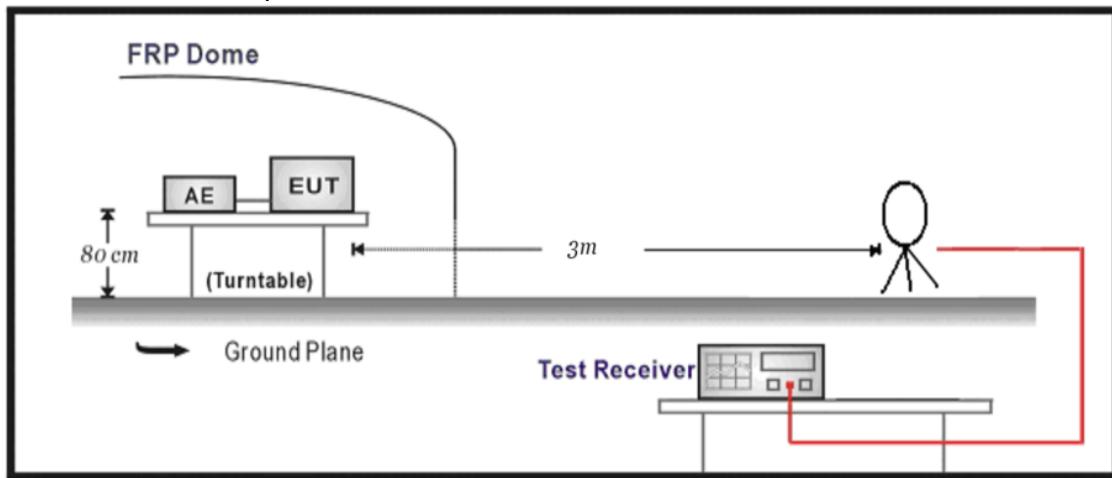


30MHz-1GHz Test Setup:

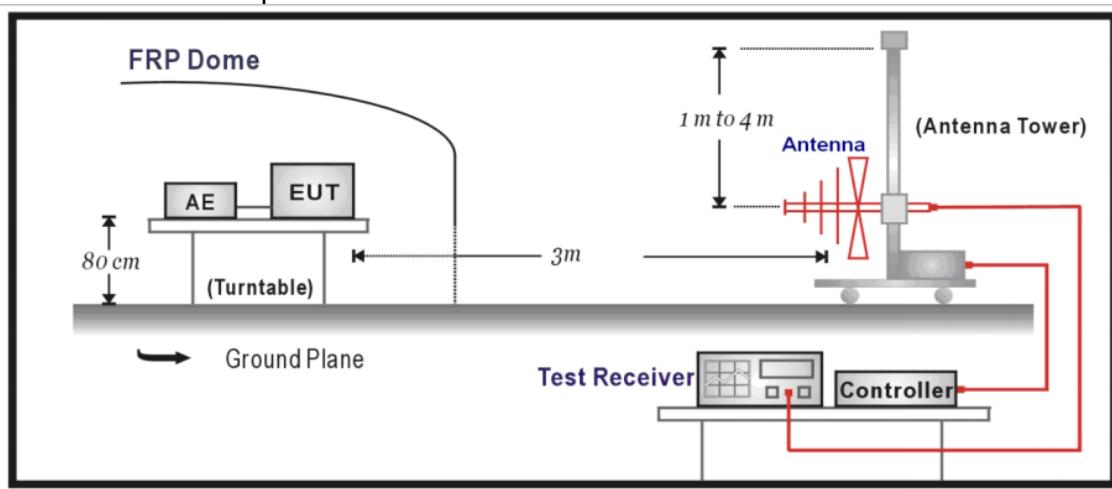


1GHz -40GHz Test Setup:

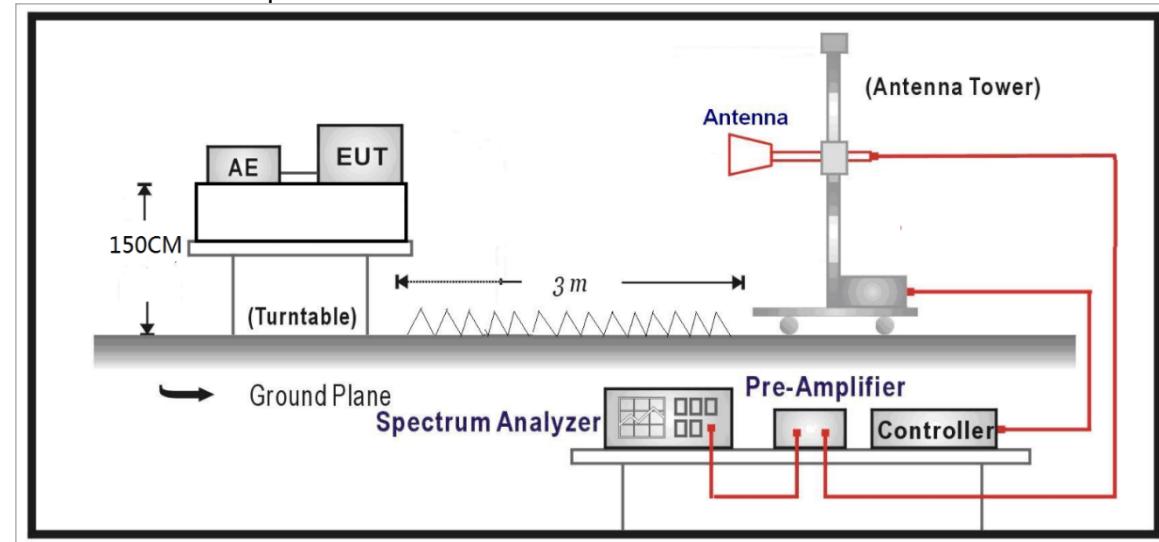

Above 40GHz Test Setup:

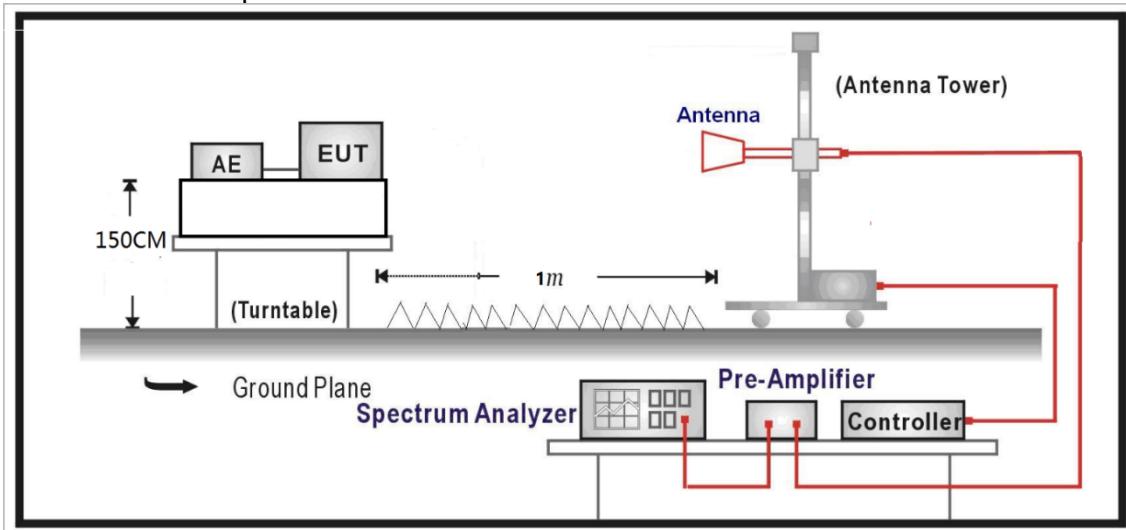

Configuration of Tested System

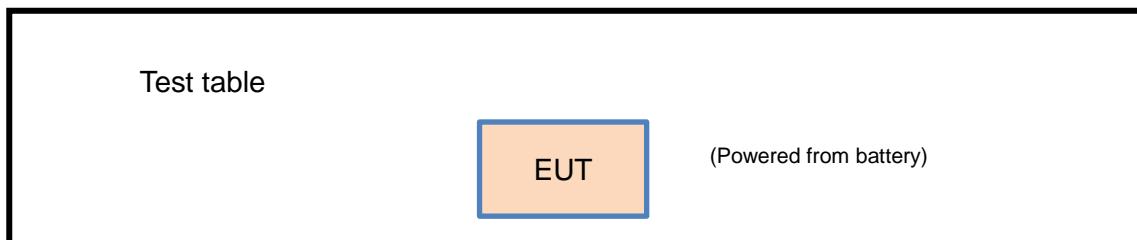

### 3 TEST TYPES AND RESULTS

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 Limit

Frequency (MHz)	Conducted Limits(dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50


NOTE: 1. The lower limit shall apply at the transition frequencies.

NOTE: 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

##### 3.1.2 Measurement procedure

- The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the Test photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source. The equipment under test shall be placed on a support of non-metallic material, the height of which shall be 1.5m above the ground,
- The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
- Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

##### 3.1.3 Test setup

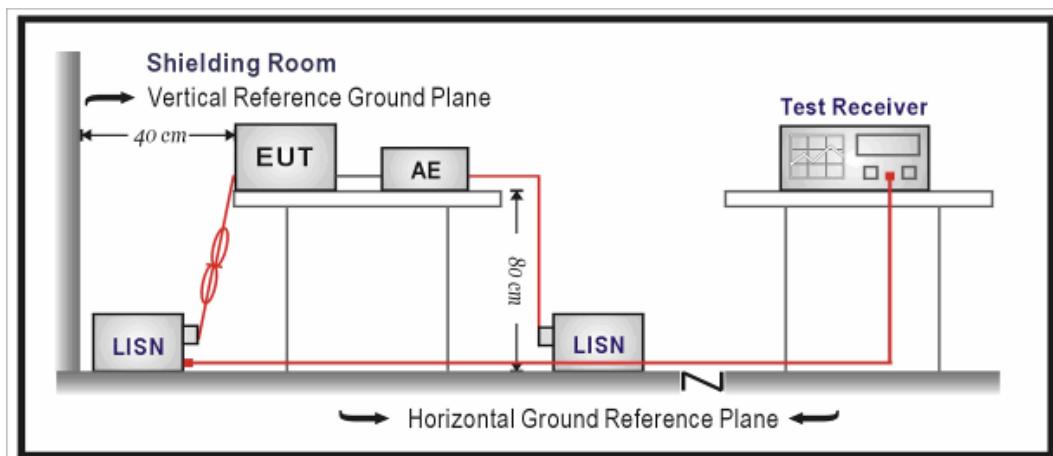



### 3.1.4 Test results

N/A,DC power supply



## 3.2 TRANSMITTER SPURIOUS EMISSIONS MEASUREMENT

### 3.2.1 Limit

Below 40 GHz radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (Microvolts/Meter)	MEASUREMENT DISTANCE (Meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE: 1. The lower limit shall apply at the transition frequencies.  
NOTE: 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).  
NOTE: 3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Between 40 GHz and 200 GHz, the level of these emissions shall not exceed 90pW/cm<sup>2</sup> at a distance of 3 meters.

FCC Frequency [GHz]	EIRP
40 - 200	-10dBm
Limit conversion according to ANSI C63.10-2020 9.2.3 (pW/cm <sup>2</sup> to dBm):	EIRP[dBm] = 10 × log(4 × π × d <sup>2</sup> × PD[W/m <sup>2</sup> ]) ----- According to this formula, an emission limit of PD = 90 pW/cm <sup>2</sup> at a distance of d = 3 m corresponds to an equivalent isotropically radiated power of EIRP = -10 dBm.

### 3.2.2 Measurement procedure

#### Measurement of harmonic and spurious emissions below 40 GHz

- a. The EUT was placed on the top of a rotating table 1.5 meters(above 1GHz) and 0.8 meters(below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

#### **NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.

#### Measurement of harmonic and spurious emissions above 40 GHz

- a. Connect the test antenna covering the appropriate frequency range to a spectrum analyzer via an external mixer.
- b. Set spectrum analyzer RBW = 1MHz, VBW = 3MHz, average detector.
- c. Maximize all observed emissions. Note the maximum power indicated on the spectrum analyzer. Adjust this reading, if necessary, by the conversion loss of the external mixer used at the frequency under investigation and the external mixer IF cable loss.
- d. Calculate the maximum field strength of the emission at the measurement distance
- e. Calculate the power density at the distance specified by the limit from the field strength at the distance specified by the limit
- f. Repeat the preceding sequence for every emission observed in the frequency band under investigation.

### 3.2.3 Test setup

See section 2.7 of this report.




### 3.2.4 Test results(9kHz-30MHz)

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

**3.2.5 Test results(30MHz-1GHz)**


Test Mode:	<b>TM1</b>	Frequency Range	30MHz-1000MHz
Detector Function	Quasi-Peak(QP)		

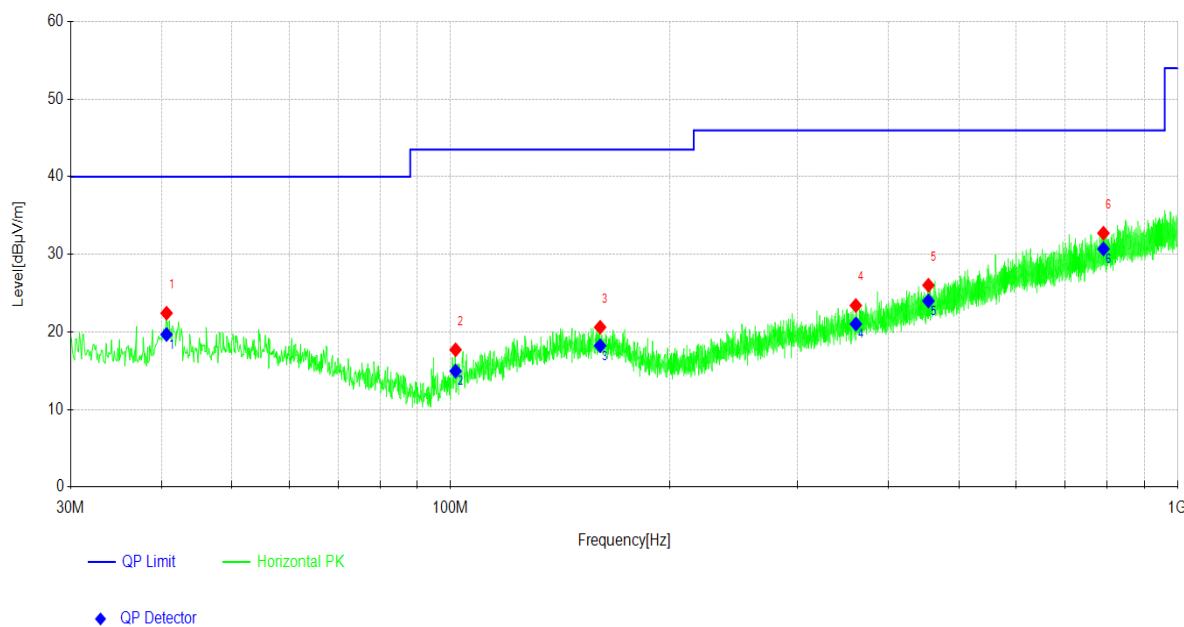

NO.	Freq. [MHz]	Factor [dB]	QP Value [dB $\mu$ V/m]	QP Limit [dB $\mu$ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	40.671	19.43	19.67	40.00	20.33	100	260	Horizontal
2	101.593	15.64	14.95	43.50	28.55	100	320	Horizontal
3	160.575	20.13	18.22	43.50	25.28	100	220	Horizontal
4	360.900	22.00	21.02	46.00	24.98	100	340	Horizontal
5	454.126	24.37	23.99	46.00	22.01	100	80	Horizontal
6	790.556	30.22	30.70	46.00	15.30	100	160	Horizontal

Remark: 1. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V) + Factor (dB/m).  
2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. Margin(dB) = Limit[dB $\mu$ V/m] - Level [dB $\mu$ V/m]

Test Mode:	<b>TM1</b>	Frequency Range	30MHz-1000MHz
Detector Function	Quasi-Peak(QP)		

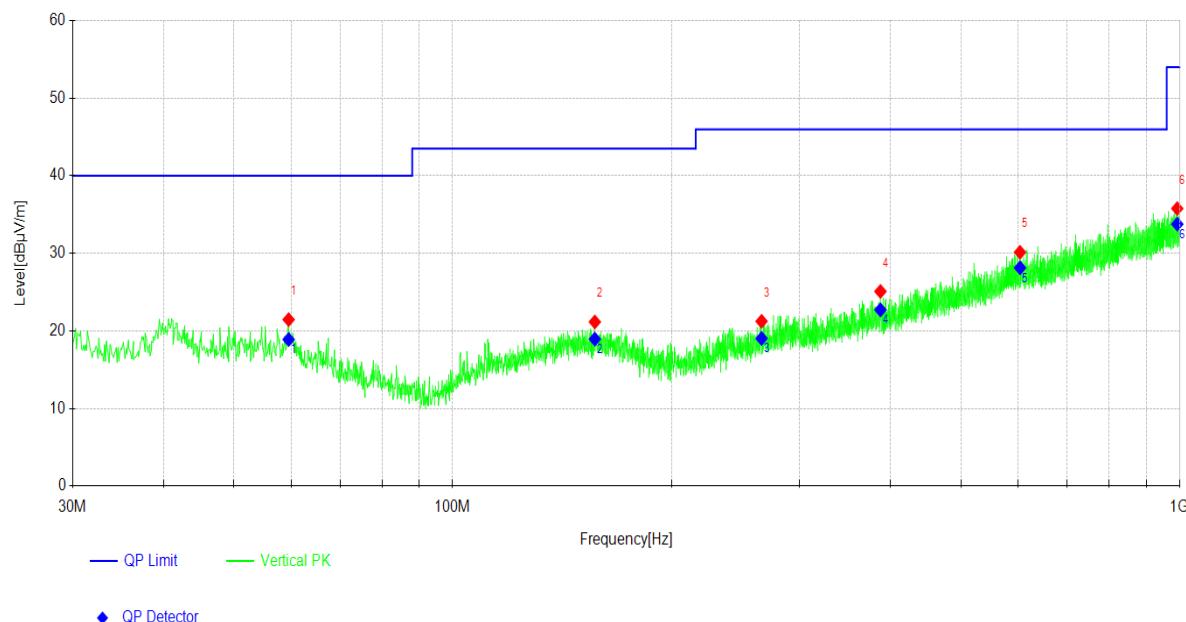


NO.	Freq. [MHz]	Factor [dB]	QP Value [dB $\mu$ V/m]	QP Limit [dB $\mu$ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	59.491	19.47	18.89	40.00	21.11	100	50	Vertical
2	156.889	20.20	18.95	43.50	24.55	100	160	Vertical
3	266.025	19.52	19.03	46.00	26.97	100	270	Vertical
4	387.675	22.86	22.72	46.00	23.28	100	330	Vertical
5	603.133	27.61	28.13	46.00	17.87	100	80	Vertical
6	992.433	32.50	33.77	54.00	20.23	100	200	Vertical

Remark: 1. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V) + Factor (dB/m).  
2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. Margin(dB) = Limit[dB $\mu$ V/m] - Level [dB $\mu$ V/m]



## 3.2.6 Test results(1GHz-18GHz)

Test Mode:	TM1	Frequency Range	1GHz-18GHz
Detector Function	PK/AV		

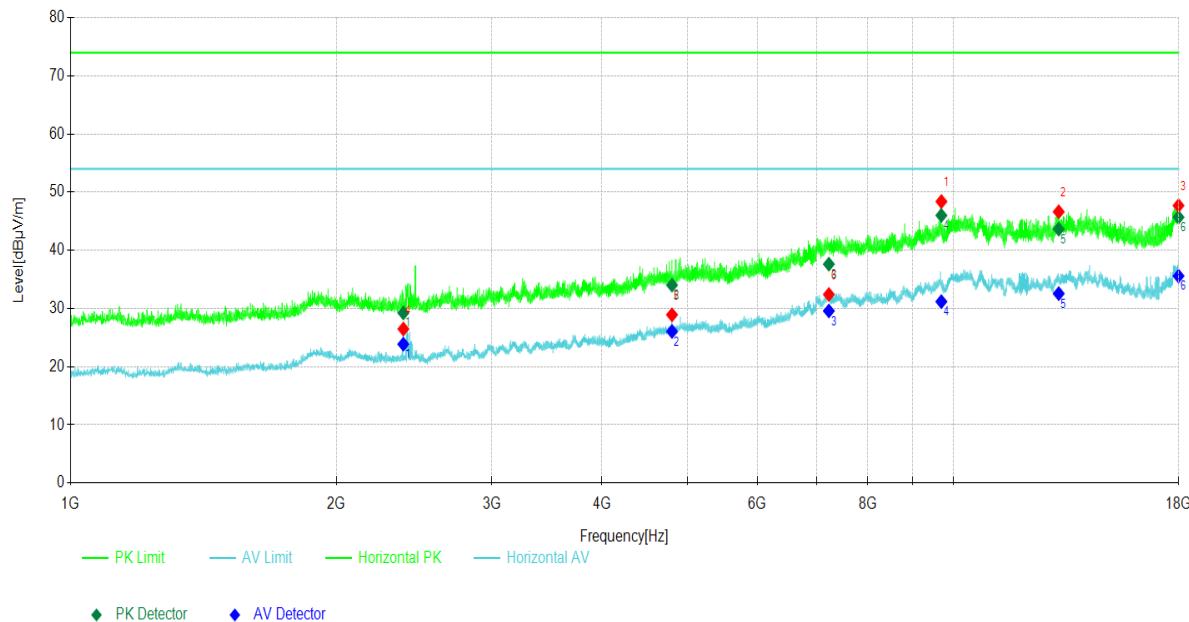


Frequency [MHz]	Factor [dB]	PK Value [dB $\mu$ V/m]	PK Limit [dB $\mu$ V/m]	PK Margin [dB]	AV Value [dB $\mu$ V/m]	AV Limit [dB $\mu$ V/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
2382.538	-20.39	29.24	74.00	44.76	23.87	54.00	30.13	100	356	Horizontal
4801.380	-12.63	34.03	74.00	39.97	26.06	54.00	27.94	100	146	Horizontal
7228.823	-5.75	37.63	74.00	36.37	29.58	54.00	24.42	100	211	Horizontal
9694.169	-2.13	46.01	74.00	27.99	31.19	54.00	22.81	100	128	Horizontal
13165.017	0.49	43.66	74.00	30.34	32.57	54.00	21.43	100	324	Horizontal
17995.600	6.11	45.70	74.00	28.30	35.59	54.00	18.41	100	199	Horizontal

**Remark:** 1. The emission levels of other frequencies were greater than 20dB margin.  
2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V) + Factor (dB/m).  
3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
4. Margin(dB) = Limit(dB $\mu$ V/m) - Level (dB $\mu$ V/m)



Test Mode:	TM1	Frequency Range	1GHz-18GHz
Detector Function	PK/AV		

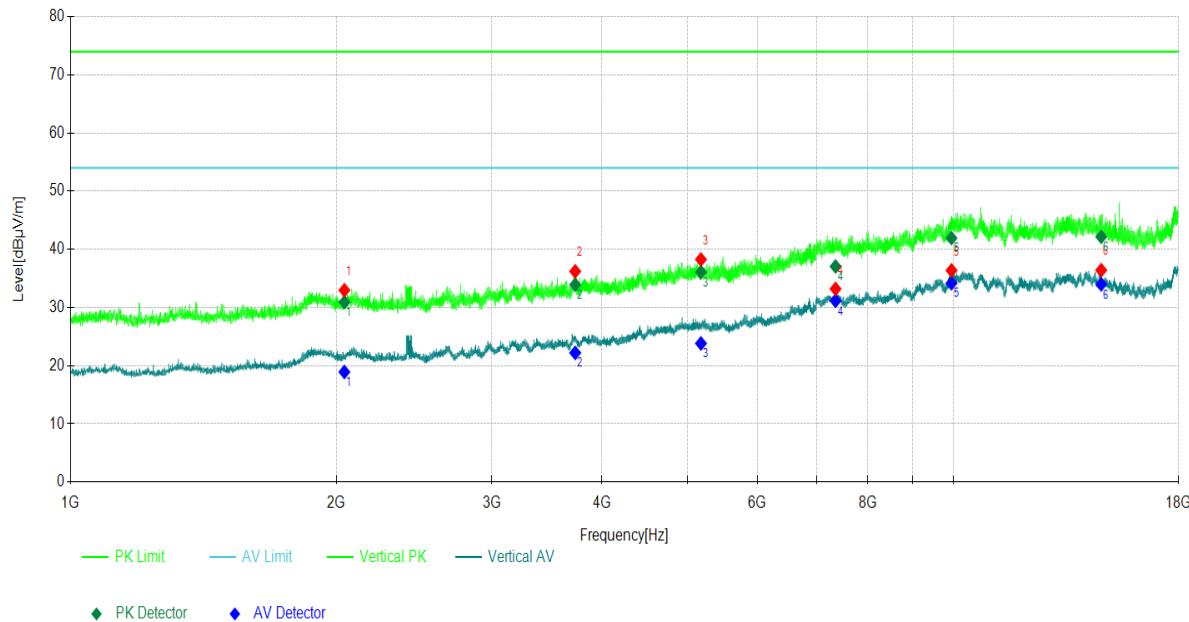


Frequency [MHz]	Factor [dB]	PK Value [dB $\mu$ V/m]	PK Limit [dB $\mu$ V/m]	PK Margin [dB]	AV Value [dB $\mu$ V/m]	AV Limit [dB $\mu$ V/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
2042.904	-20.23	30.93	74.00	43.07	18.92	54.00	35.08	100	320	Vertical
3729.673	-16.21	33.92	74.00	40.08	22.21	54.00	31.79	100	131	Vertical
5177.618	-11.48	36.08	74.00	37.92	23.83	54.00	30.17	100	229	Vertical
7355.336	-5.81	37.07	74.00	36.93	31.16	54.00	22.84	100	230	Vertical
9952.695	-1.04	41.94	74.00	32.06	34.18	54.00	19.82	100	90	Vertical
14709.571	1.14	42.17	74.00	31.83	33.99	54.00	20.01	100	251	Vertical

**Remark:** 1. The emission levels of other frequencies were greater than 20dB margin.  
2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V) + Factor (dB/m).  
3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
4. Margin(dB) = Limit(dB $\mu$ V/m) - Level (dB $\mu$ V/m)

**3.2.7 Test results(18GHz-40GHz)**

Test Mode:	<b>TM1</b>	Frequency Range	18GHz-40GHz
Detector Function	PK/AV		

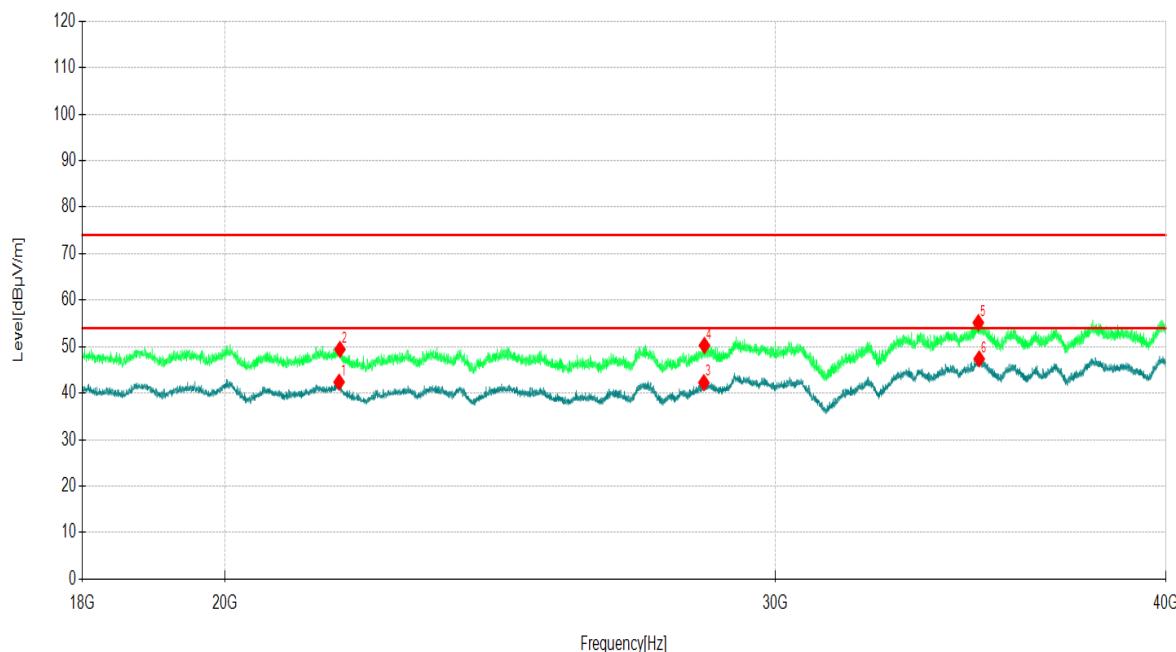

NO.	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	21751.	47.00	-4.62	42.38	54.00	11.62	100	236	Horizontal
2	21764.	54.16	-4.74	49.42	74.00	24.58	100	161	Horizontal
3	28457.	44.60	-2.34	42.26	54.00	11.74	100	325	Horizontal
4	28468.	52.67	-2.40	50.27	74.00	23.73	100	94	Horizontal
5	34833.	56.15	-0.98	55.17	74.00	18.83	100	85	Horizontal
6	34855.	48.35	-0.97	47.38	54.00	6.62	100	4	Horizontal

**Remark:** 1. The emission levels of other frequencies were greater than 20dB margin.


2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit(dB $\mu$ V/m) - Level (dB $\mu$ V/m)



Test Mode:	TM1	Frequency Range	18GHz-40GHz
Detector Function	PK/AV		

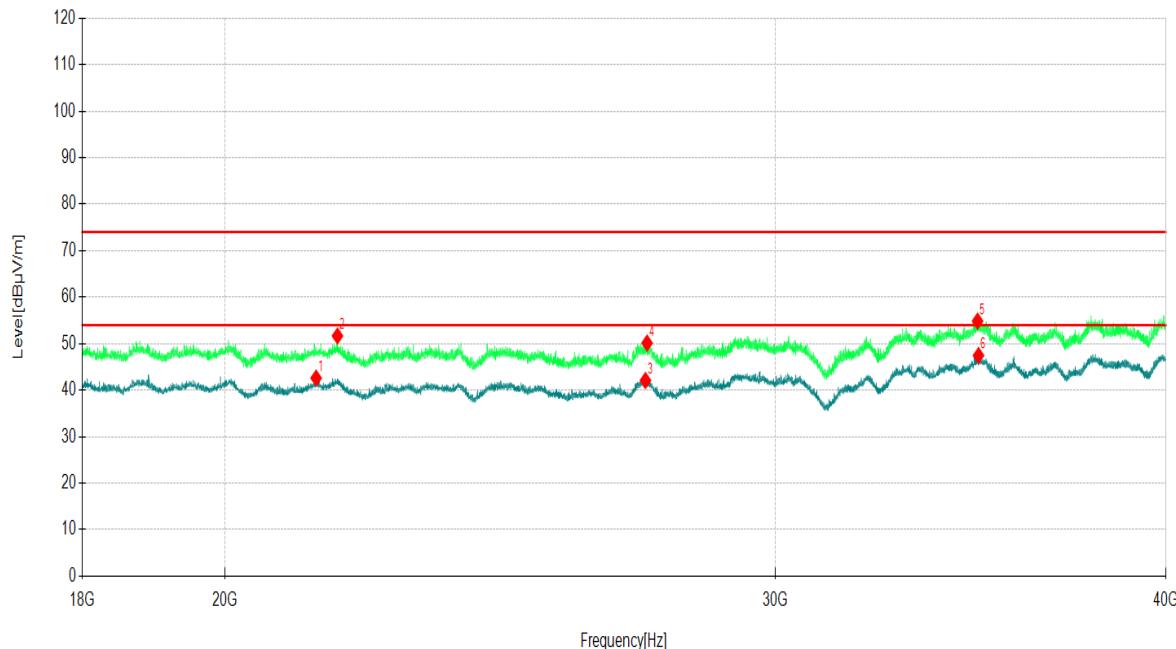

NO.	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	21386.	47.97	-5.37	42.60	54.00	11.40	100	300	Vertical
2	21724.	56.32	-4.65	51.67	74.00	22.33	100	90	Vertical
3	27258.	45.11	-3.02	42.09	54.00	11.91	100	224	Vertical
4	27291.	52.98	-2.85	50.13	74.00	23.87	100	147	Vertical
5	34814.	55.84	-0.98	54.86	74.00	19.14	100	24	Vertical
6	34838.	48.44	-0.98	47.46	54.00	6.54	100	215	Vertical

**Remark:** 1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dB $\mu$ V/m) = Reading (dB $\mu$ V) + Factor (dB/m).



3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit(dB $\mu$ V/m) - Level (dB $\mu$ V/m)




### 3.2.8 Test results(40GHz-200GHz)

Only showing the highest value, “worst case” (Vertical polarity-TM1)

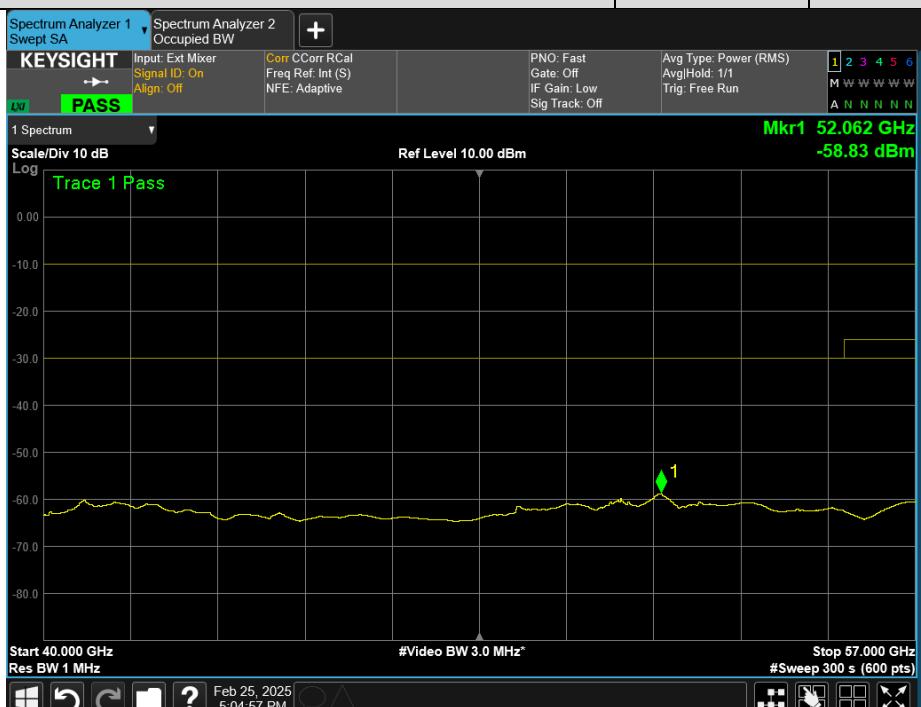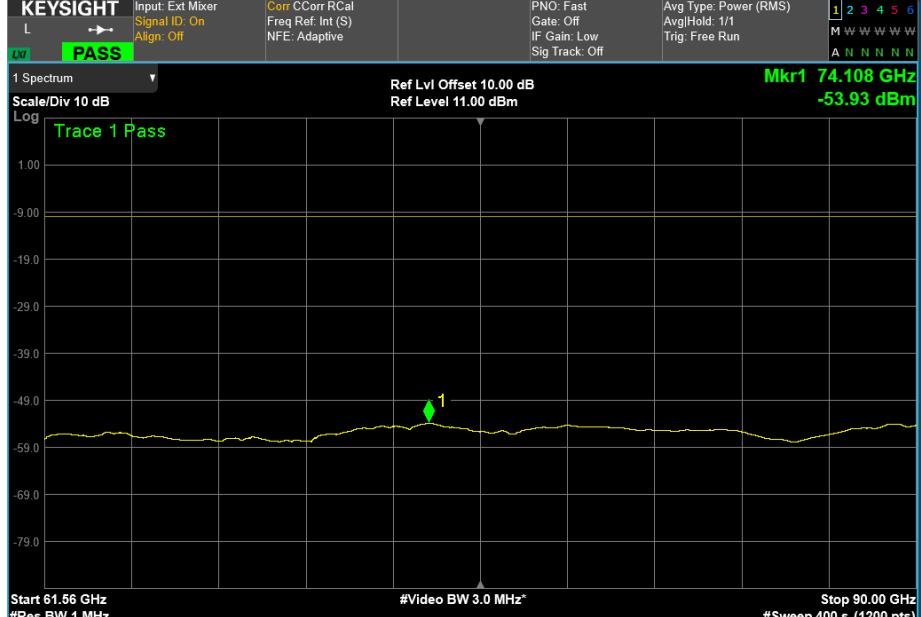Radiated Emission, 40 GHz to 57 GHz(TM1)	Emissions (dBm)	Emissions (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )	Verdict
	-58.83	0.001	90	Pass
				
Radiated Emission, 61.56 GHz to 90 GHz(TM1)	Emissions (dBm)	Emissions (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )	Verdict
	-53.93	0.004	90	Pass

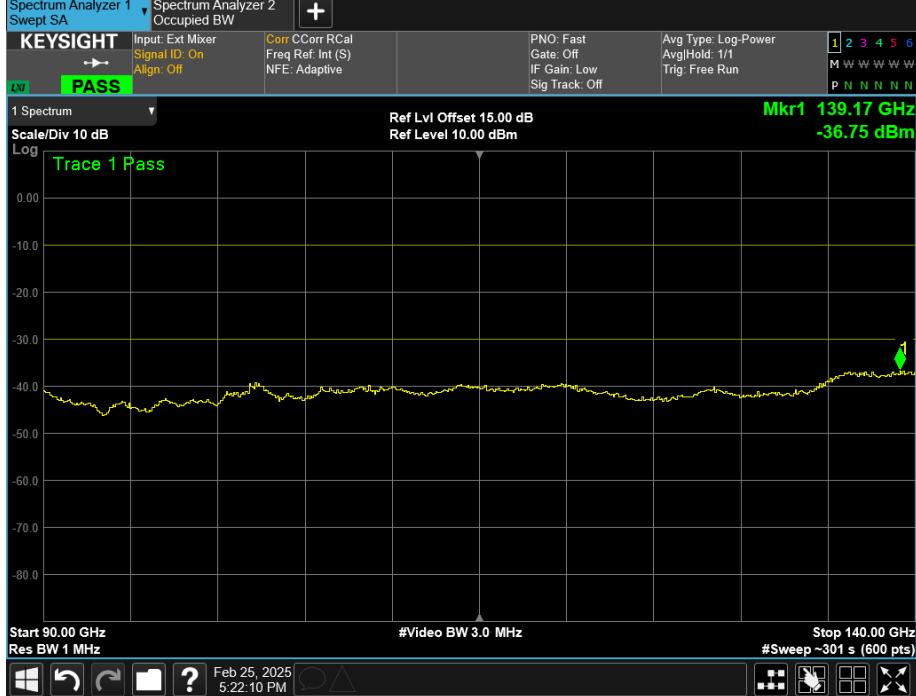

Radiated Emission, 90 GHz to 140 GHz(TM1)	Emissions (dBm)	Emissions (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )	Verdict
	-36.75	0.187	90	Pass
				
				

### 3.3 DUTY CYCLE, OFF TIME REQUIREMENT

#### 3.3.1 Limit

According to § 15.255(c)(2)(iii)

**57.0-61.56 GHz:** the peak EIRP shall not exceed 3 dBm except that the peak EIRP shall not exceed 20 dBm if the sum of continuous transmitter off-times of at least two milliseconds equals at least 16.5 milliseconds within any contiguous interval of 33 milliseconds

#### 3.3.2 Test Procedure

The duty cycle was tested with the spectrum analyzer set to zero-span.

#### 3.3.3 Test setup


See section 2.7 of this report.



### 3.3.4 Test results

Burst Period (ms)	TX ON Time (ms)	TX OFF Time (ms)*	TX OFF Limit(ms)	Verdict
33	0.004	32.996	$\geq 16.5$	PASS

\*OFF Time(ms) = 33(ms) – TX ON Time (ms)

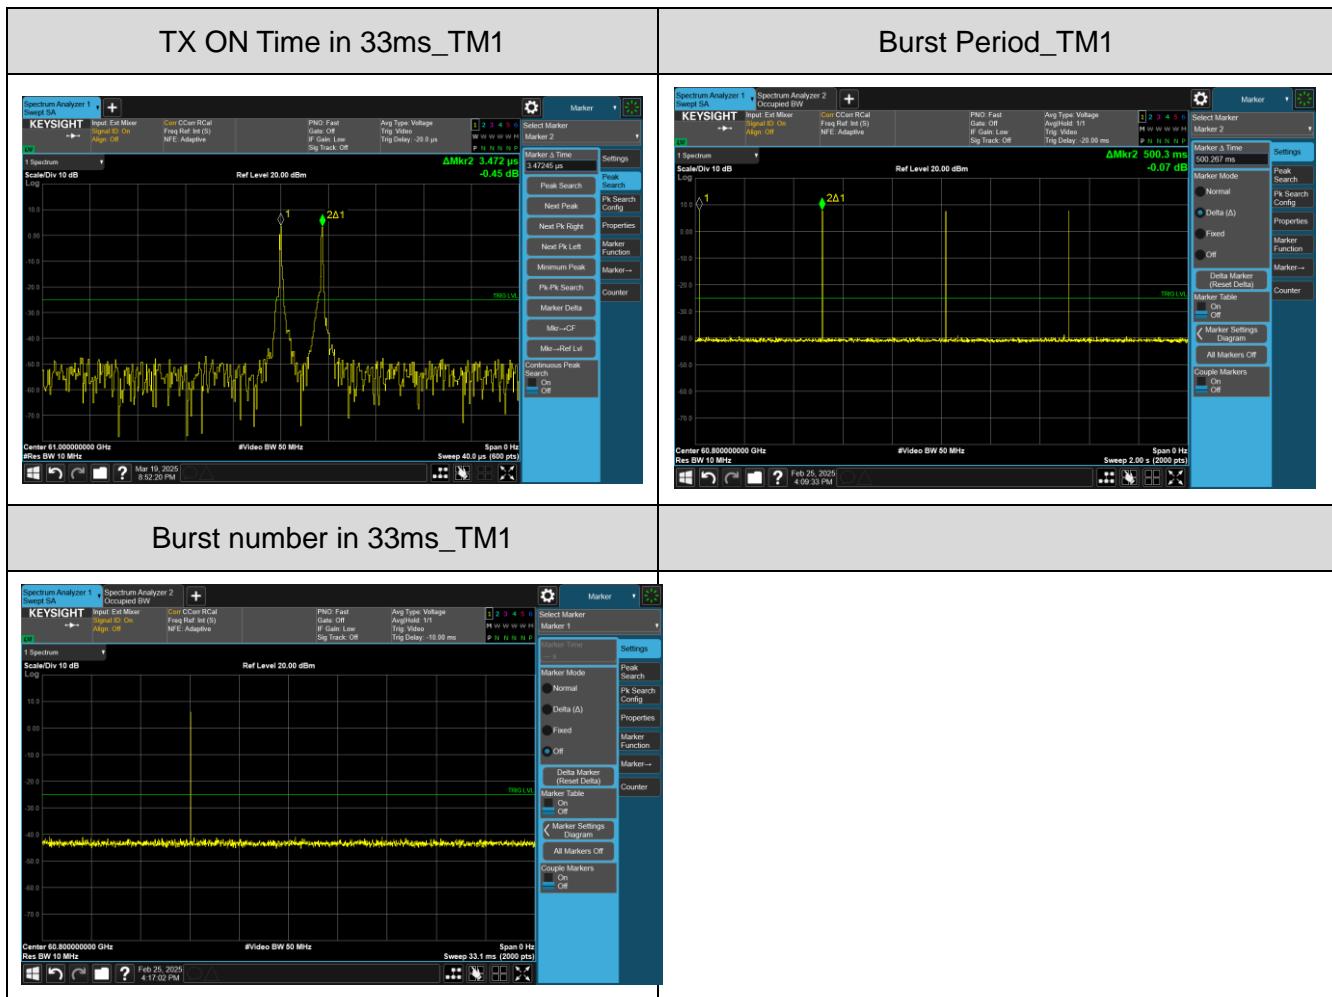

### 3.4 BANDWIDTH MEASUREMENT

#### 3.4.1 Limits

##### According to § 15.215(c)

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through § 15.257 and in subpart E of this part, must be designed to ensure that the **20 dB bandwidth** of the emission, **or** whatever bandwidth may otherwise be specified in the **specific rule section** under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

##### According to KDB 364244 D01 Meas 15.255 Radars v01

For pulsed transmitters, the fundamental emission bandwidth is defined at the -10 dB points specified in § 15.255(c)(3)

For other than pulsed radar transmitters, the fundamental emission bandwidth is presumed to be “the width of a frequency band such that, below the lower and above the upper-frequency limits, the mean powers emitted are each equal to a specified percentage  $\beta/2$  of the total mean power of a given emission. Unless otherwise specified in an ITU – R Recommendation for the appropriate class of emission, the value of  $\beta/2$  should be taken as 0.5%,” as defined in § 2.1(c) of the FCC rules. This is also known as the 99% occupied bandwidth (OBW).

##### According to § 15.255(c)(2)(iii)

**57.0-61.56 GHz:** the peak EIRP shall not exceed 3 dBm except that the peak EIRP shall not exceed 20 dBm if the sum of continuous transmitter off-times of at least two milliseconds equals at least 16.5 milliseconds within any contiguous interval of 33 milliseconds;

#### 3.4.2 Measurement procedure

99% OCCUPIED BANDWIDTH MEASUREMENT PARAMETER	
Detector:	Peak
Resolution bandwidth:	8 MHz (The analyzer limits maximum RBW at 8 MHz.)
Video bandwidth:	50 MHz
Trace-Mode:	Max Hold
Sweep	Auto couple.

Measurement procedures: Bandwidth: ANSI C63.10-2020 6.9 / 9.3

Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower)

#### 3.4.3 Test setup


See section 2.7 of this report.



### 3.4.4 Test results

Test Mode	99% Occupied Bandwidth Lower(GHz)	99% Occupied Bandwidth Upper(GHz)	99% Occupied Bandwidth (GHz)	Lower limit (GHz)	Upper limit (GHz)	Verdict
TM1	59.01183	60.69269	1.6809	57	61.56	Pass

#### 99% Occupied Bandwidth

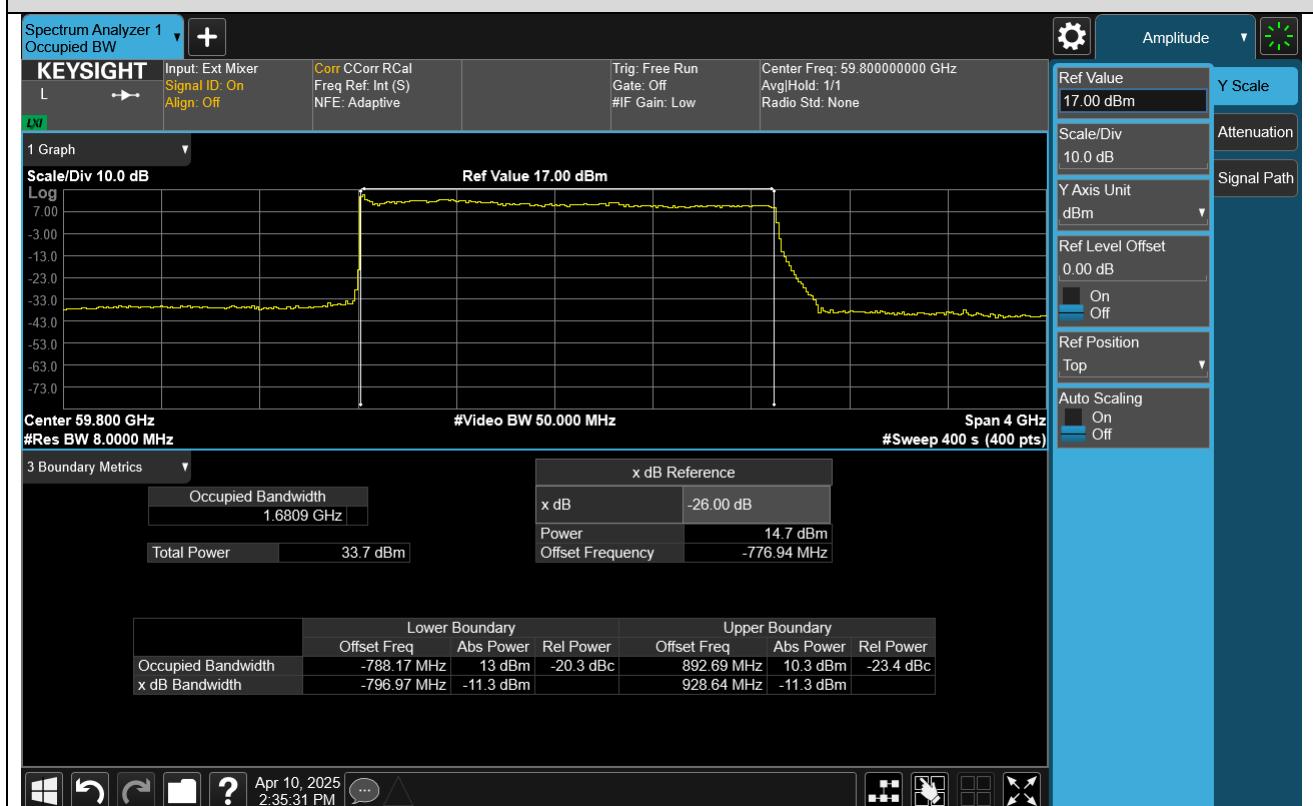

### 3.5 EIRP POWER MEASUREMENT

#### 3.5.1 Limits

According to § 15.255(c)(2)(ii)

**57.0-61.56 GHz:** the peak EIRP shall not exceed 3 dBm except that the peak EIRP shall not exceed 20 dBm if the sum of continuous transmitter off-times of at least two milliseconds equals at least 16.5 milliseconds within any contiguous interval of 33 milliseconds;

#### 3.5.2 Measurement procedure

##### Test Settings

1. Radiated power measurements are performed using the signal analyzer's swept mode measurement capability for signals with continuous operation.
2. RBW = 1MHz
3. VBW  $\geq$  3 x RBW
4. Span as required, enough to observe the fundamental spike around 61.5 GHz
5. No. of sweep points  $\geq$  2 x span / RBW
6. Detector and Trace mode = Suitable for peak and average measurements respectively over 100 sweeps
7. The trace was allowed to stabilize

##### Method of measurement:

Refer as TCBC Workshop(2023.10.25) Part 15.255 Rules Amendment

##### FMCW desensitization factor:

Desensitization factor and sweep time considerations for measurements of FMCW signals in ANSI C63.10-2020 Annex L

The derivation of the FMCW desensitization factor is given in Keysight Application Note 5952-1039 Appendix B.


#### 3.5.3 Test setup

See section 2.7 of this report.

### 3.5.4 Test results

Test Mode	Level (dBm)	Desensitization factor (dB)	Peak EIRP (dBm)	Peak EIRP Limit(dBm)	Verdict
TM1	15.86	3.71	19.57	20	PASS

Peak EIRP (dBm) = desensitization factor (dB) + Level(dBm)

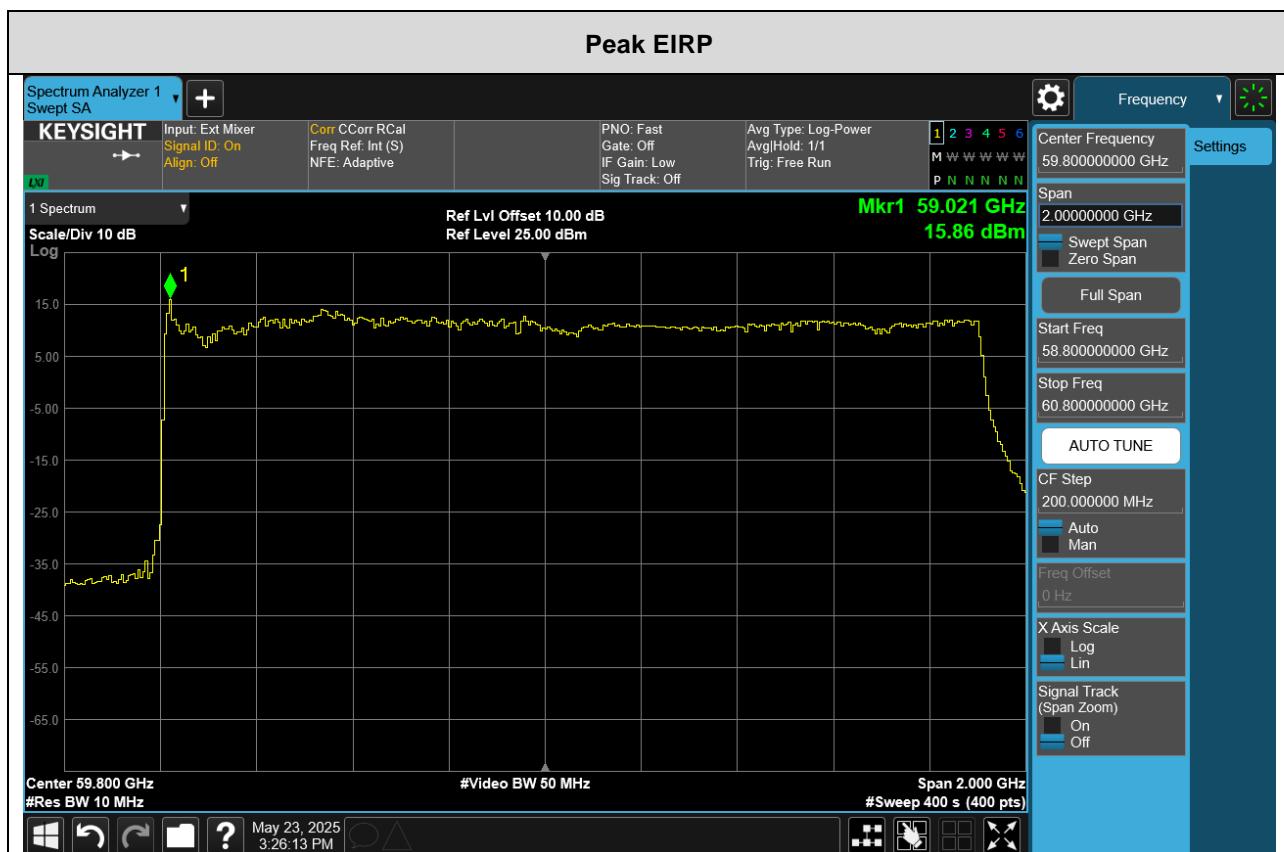

FMCW desensitization factor =  $-20 * \log(\alpha)$  = 3.71dB

$$\alpha = \frac{1}{\sqrt[4]{1 + \left( \frac{2\ln(2)}{\pi} \right)^2 \left( \frac{F_s}{T_s B^2} \right)^2}}$$

$F_s$  = Sweep width

$T_s$  = Sweep time

$B$  = 3 dB IF bandwidth



## 3.6 FREQUENCY STABILITY

### 3.6.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency range, 57GHz – 61.56GHz.

### 3.6.2 Measurement Procedure

Method of measurement: Refer as ANSI C63.10-2020 clause 9.5

### 3.6.3 Test setup

See section 2.7 of this report.

### 3.6.4 Test results

FREQUENCY STABILITY					
Temperature (°C)	Voltage (Volt)	FL	FH	Limit	Result
		(GHz)	(GHz)	(GHz)	
50	Normal Voltage	59.0095	60.6976	57-61.56GHz	PASS
40		59.0109	60.6973		
30		59.0108	60.6979		
20		59.0109	60.6977		
10		59.0079	60.6983		
0		59.0110	60.6960		
-10		59.0076	60.6980		
-20		59.0108	60.6961		
-30		59.0107	60.6989		
20	115%	59.0083	60.6989		
20	85%	59.0094	60.6985		



## 3.7 ANTENNA REQUIREMENT

### 3.7.1 LIMITS

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 3.7.2 ANTENNA ANTI-REPLACEMENT CONSTRUCTION

The antenna used for this product is AiP Antenna and that no antenna other than that furnished by the responsible party shall be used with the device



## 4 PHOTOGRAPHS OF TEST SETUP

Please refer to the attached file (Test Setup Photo).



## 5 PHOTOGRAPHS OF THE EUT

Please refer to the attached file (External Photos report and Internal Photos).

----- End of the Report -----

## Important

- (1) The test report is invalid without the official stamp of CVC;
- (2) Any part photocopies of the test report are forbidden without the written permission from CVC;
- (3) The test report is invalid without the signatures of Approval and Reviewer;
- (4) The test report is invalid if altered;
- (5) Objections to the test report must be submitted to CVC within 15 days.
- (6) Generally, commission test is responsible for the tested samples only.
- (7) As for the test result “-” or “N” means “not applicable”, “/” means “not test”, “P” means “pass” and “F” means “fail”

Address: No. 1301-14&16, Guanguang Road, Xinlan Community, Guanlan Subdistrict, Longhua District, Shenzhen, Guangdong, China

Post Code: 518110 Tel: 0755-23763060-8805

Fax: 0755-23763060 E-mail: sz-kf@cvc.org.cn

<http://www.cvc.org.cn>