

Appendix

BLE

Contents

1 EQUIPMENT LIST.....	3
2 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	3
3 DUTY CYCLE	4
3.1 Test Results.....	4
3.2 Test Plots.....	4
4 CONDUCTED OUTPUT POWER.....	5
4.1 Test Results.....	5
4.2 Test plots:.....	6
5 DTS (6 DB) BANDWIDTH & 99% OCCUPIED BANDWIDTH	8
5.1 Test Results.....	8
5.2 Test plots.....	9
6 POWER SPECTRAL DENSITY	12
6.1 Test Results.....	12
6.2 Test plots.....	13
7 BAND-EDGE FOR RF CONDUCTED EMISSIONS.....	15
7.1 Test plots.....	15
8 SPURIOUS RF CONDUCTED EMISSIONS.....	16
8.1 Test plots:.....	16

1 Equipment List

Conducted Emission					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal.Duedate
				(yyyy-mm-dd)	(yyyy-mm-dd)
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2017/5/10	2020/5/9
LISN	Rohde & Schwarz	ENV216	SEM007-01	2018/9/2	2019/9/2
LISN	ETS-LINDGREN	Feb-16	SEM007-02	2018/4/2	2019/4/1
				2019/4/1	2020/3/31
Measurement Software	AUDIX	e3 V5.4.1221d	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2018/7/12	2019/7/11
2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T2-02	EMC0122	2019/2/11	2020/2/10
EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2019/3/2	2020/3/1

RF conducted test					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal.Duedate
				(yyyy-mm-dd)	(yyyy-mm-dd)
DC Power Supply	Agilent Technologies Inc	66311B	W009-09	2018/9/15	2019/9/15
Signal Analyzer	Rohde & Schwarz	FSV	W025-05	2019/1/13	2020/1/12
Coaxial Cable	SGS	N/A	SEM031-01	2018/7/13	2019/7/12
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2018/9/2	2019/9/2
Temperature Chamber	GIANT FORCE	ICT-150-40-CP-AR	W027-03	2018/11/27	2019/11/27

2 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	±0.75dB
2	RF power density, conducted	±2.84dB
3	Spurious emissions, conducted	±0.75dB
4	Conduct emission test	±3.12 dB(9KHz- 30MHz)


3 Duty Cycle

3.1 Test Results

Test Mode	TX Freq. [MHz]	Duty cycle [%]
BLE	CH0	62.50

3.2 Test Plots

BLE

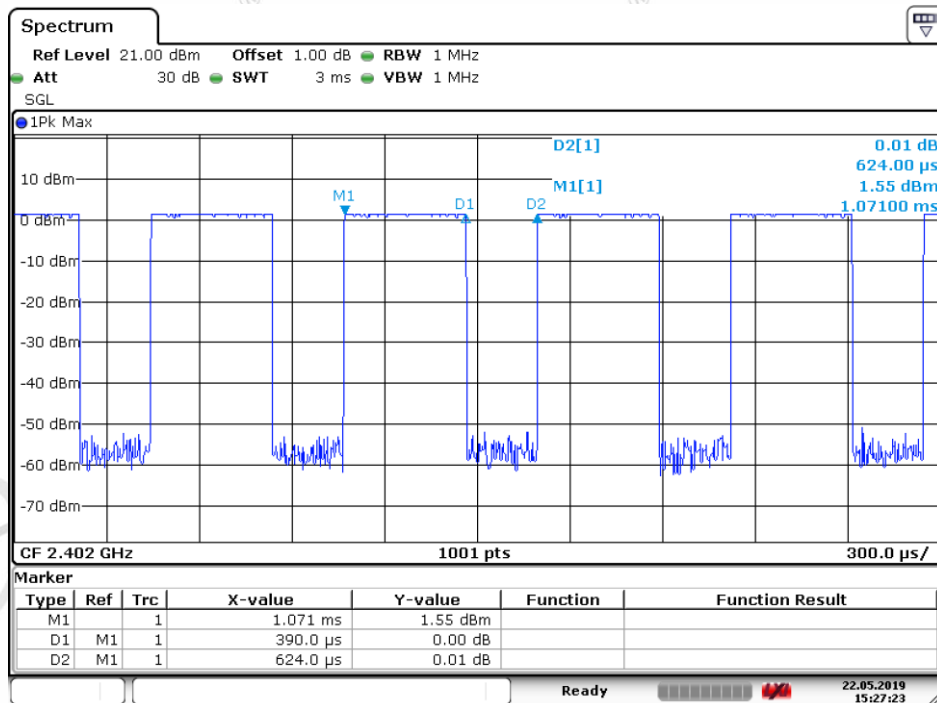

Date: 22.MAY.2019 15:27:24

4 Conducted Output Power


4.1 Test Results

Measurement Data of Peak Power :

GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	1.59	30.00	Pass
Middle	1.53	30.00	Pass
Highest	1.36	30.00	Pass


4.2 Test plots:

GFSK_Lowest Channel

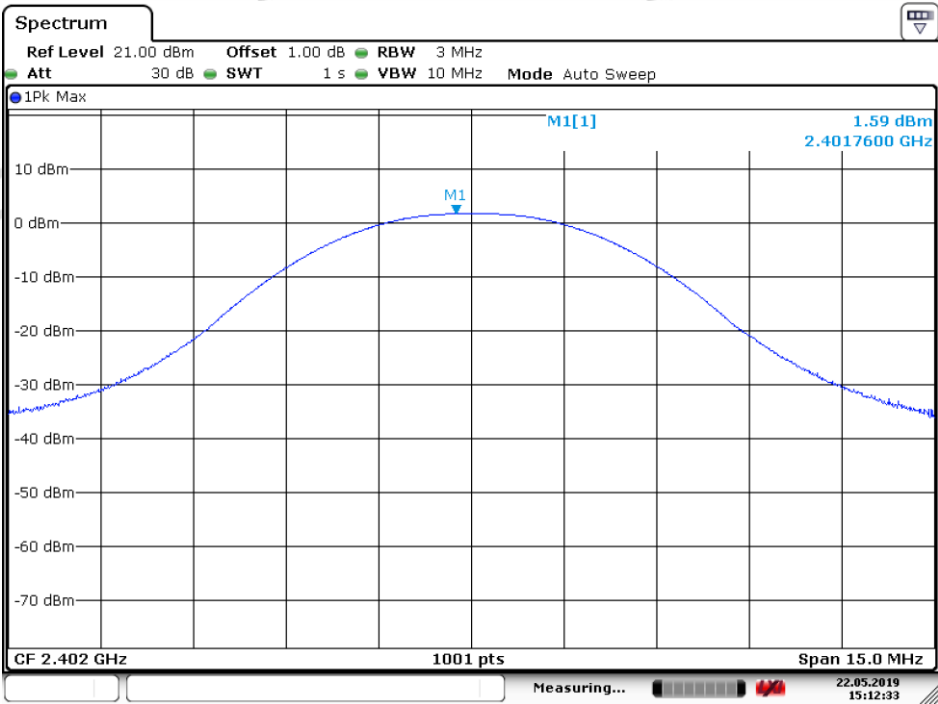


Date: 22.MAY.2019 15:12:33

GFSK_Middle Channel

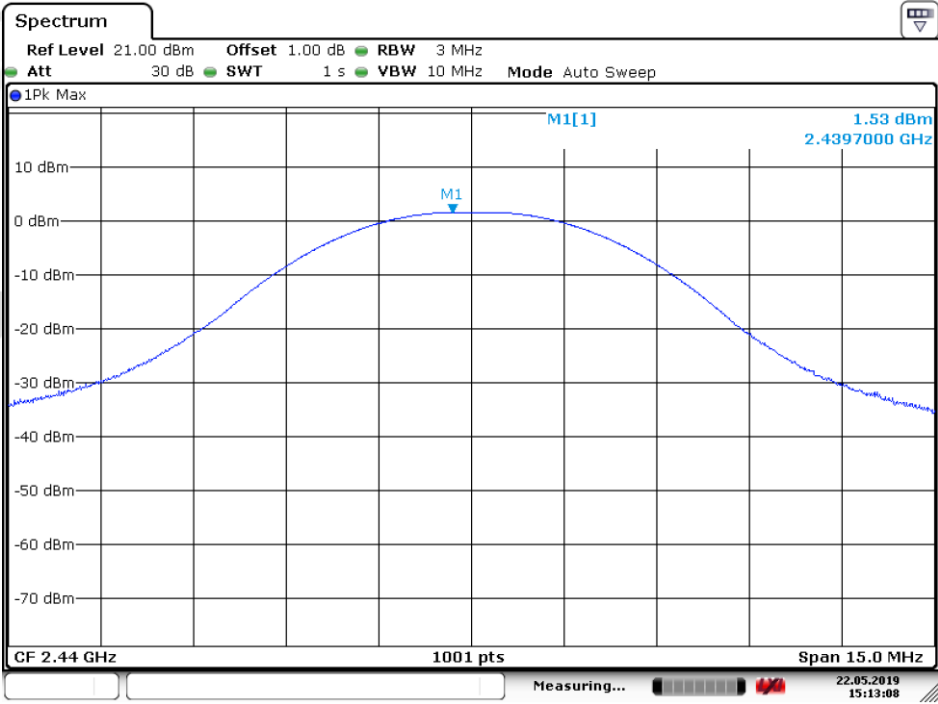

Date: 22.MAY.2019 15:13:08

GFSK_Highest Channel

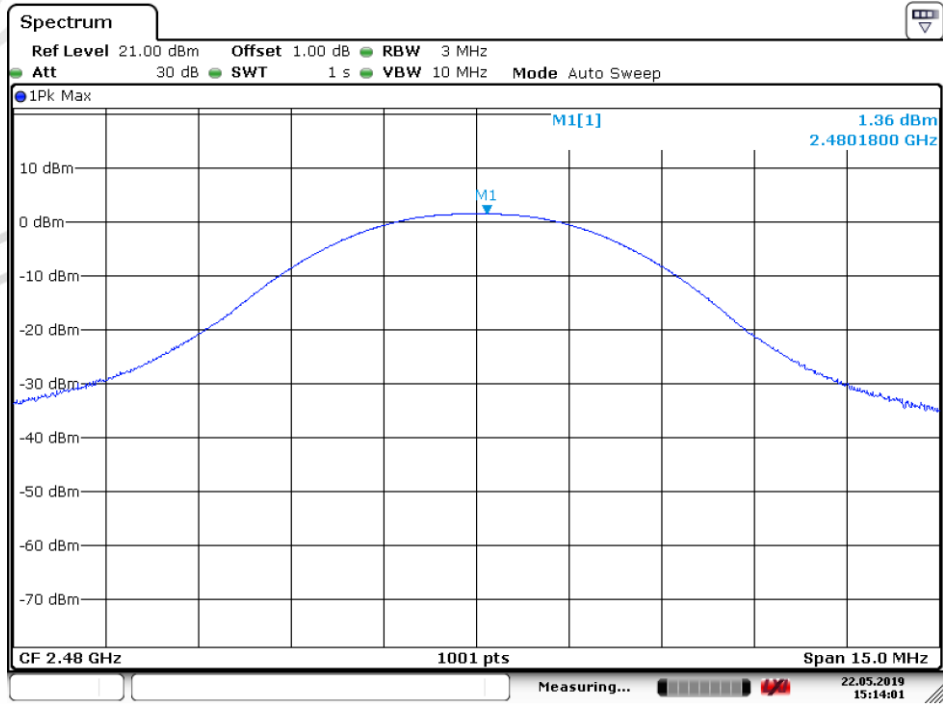

Date: 22.MAY.2019 15:14:01


5 DTS (6 dB) Bandwidth & 99% Occupied Bandwidth

5.1 Test Results


Mode	Test Channel	99% Occupied Bandwidth (MHz)	6dB Emission Bandwidth (MHz)	Limit (kHz)	Result
GFSK	Lowest	1.04	0.69	≥500	Pass
	Middle	1.04	0.69	≥500	Pass
	Highest	1.04	0.69	≥500	Pass

5.2 Test plots

GFSK_Lowest Channel

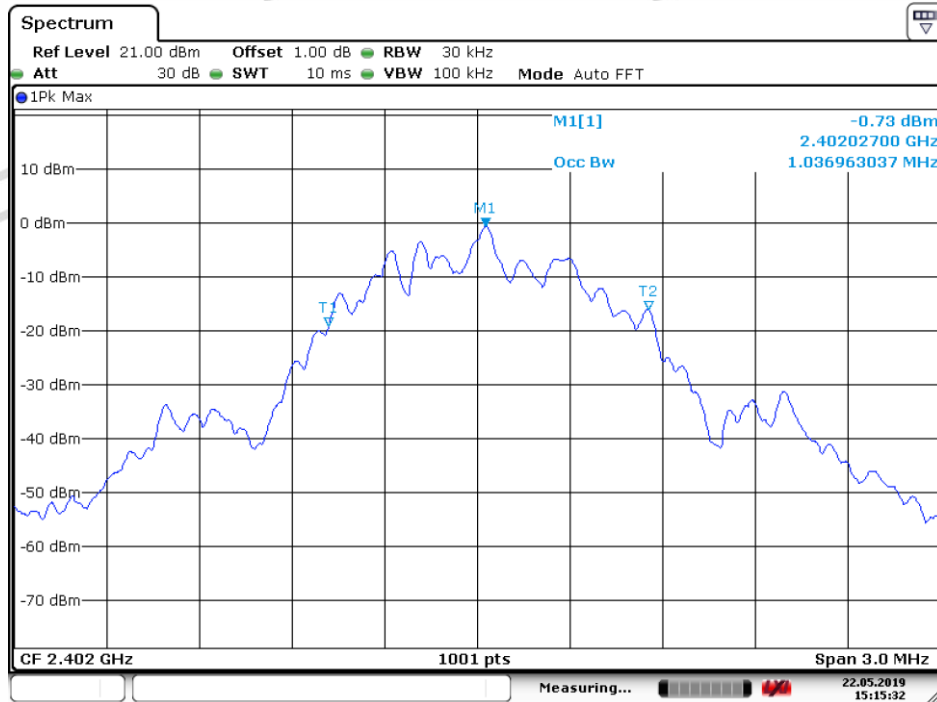


Date: 22.MAY.2019 15:15:32

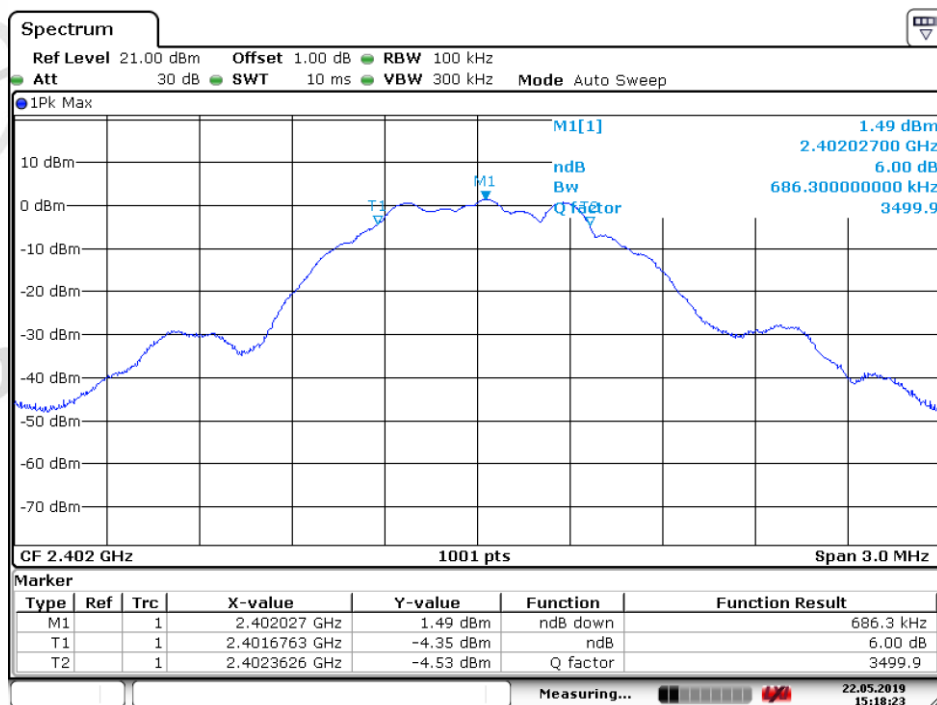


Date: 22.MAY.2019 15:18:24

GFSK_Middle Channel

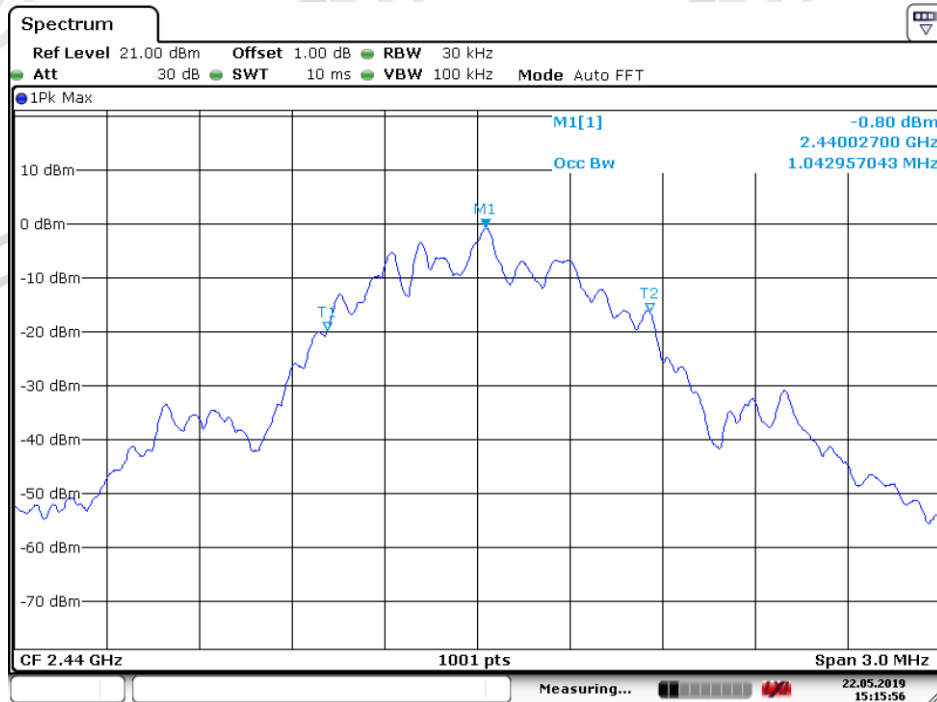


Date: 22.MAY.2019 15:15:57

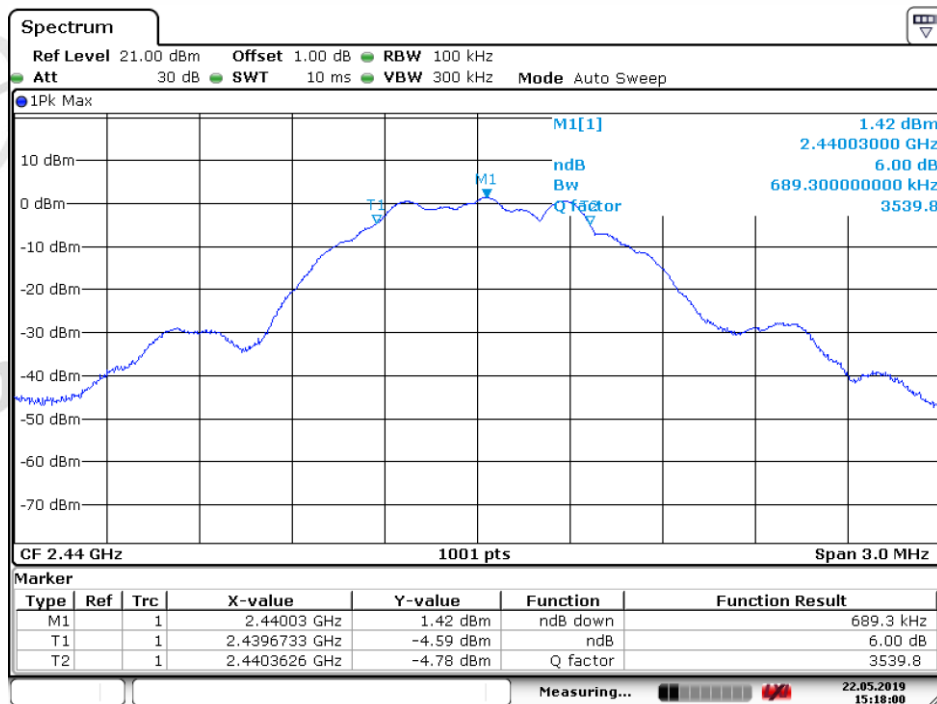


Date: 22.MAY.2019 15:18:01

GFSK_Highest Channel

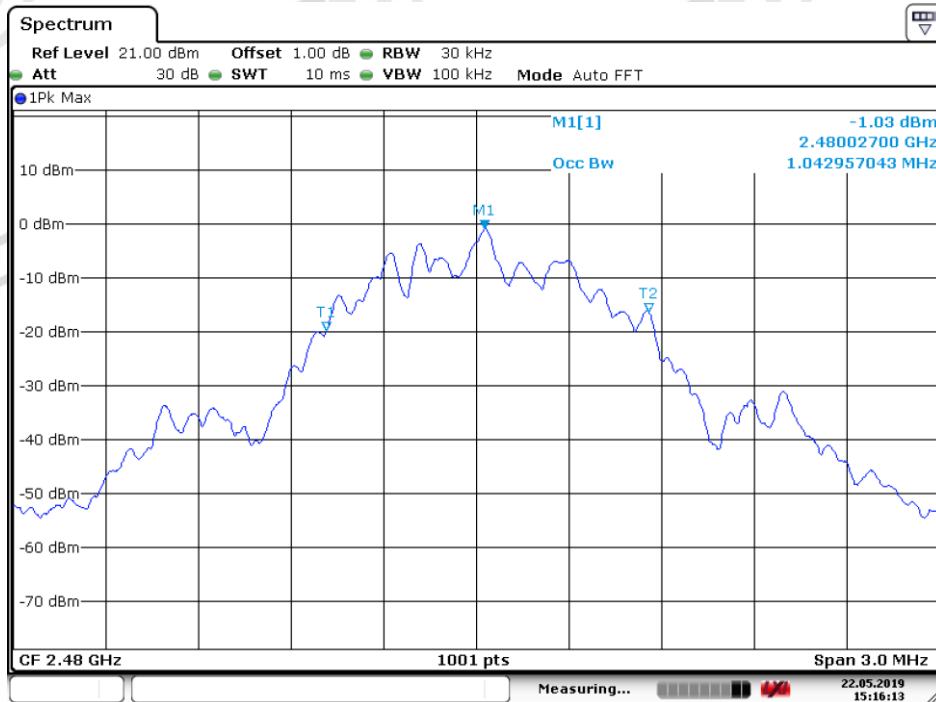

Date: 22.MAY.2019 15:16:12

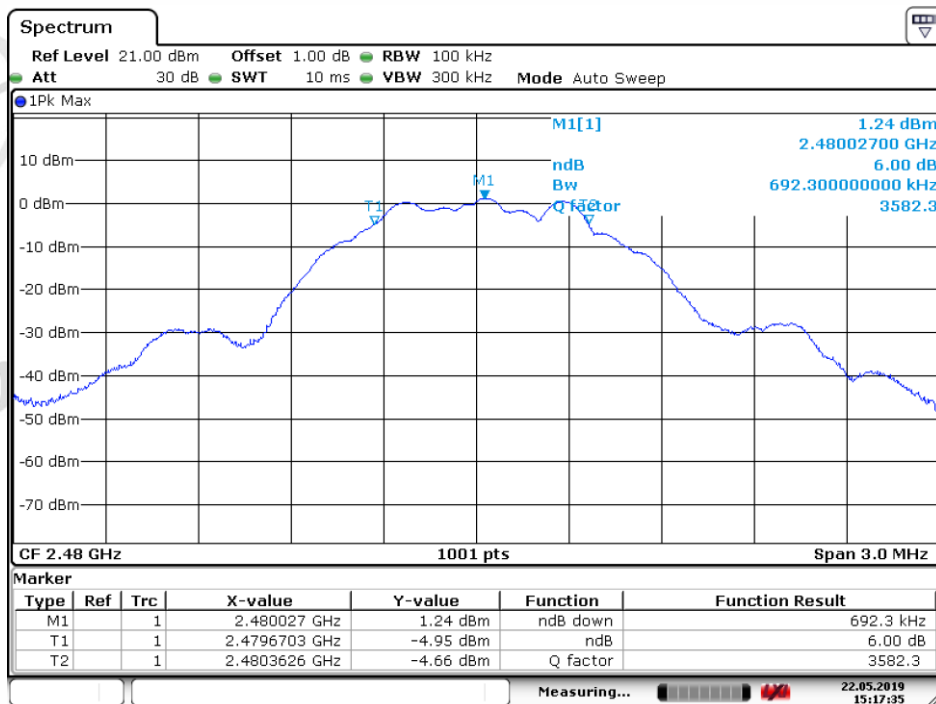

Date: 22.MAY.2019 15:17:35


6 Power Spectral Density

6.1 Test Results

Mode	Test Channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
GFSK	Lowest	-16.14	≤8.00	Pass
	Middle	-16.18	≤8.00	Pass
	Highest	-16.36	≤8.00	Pass


6.2 Test plots

GFSK_Lowest Channel

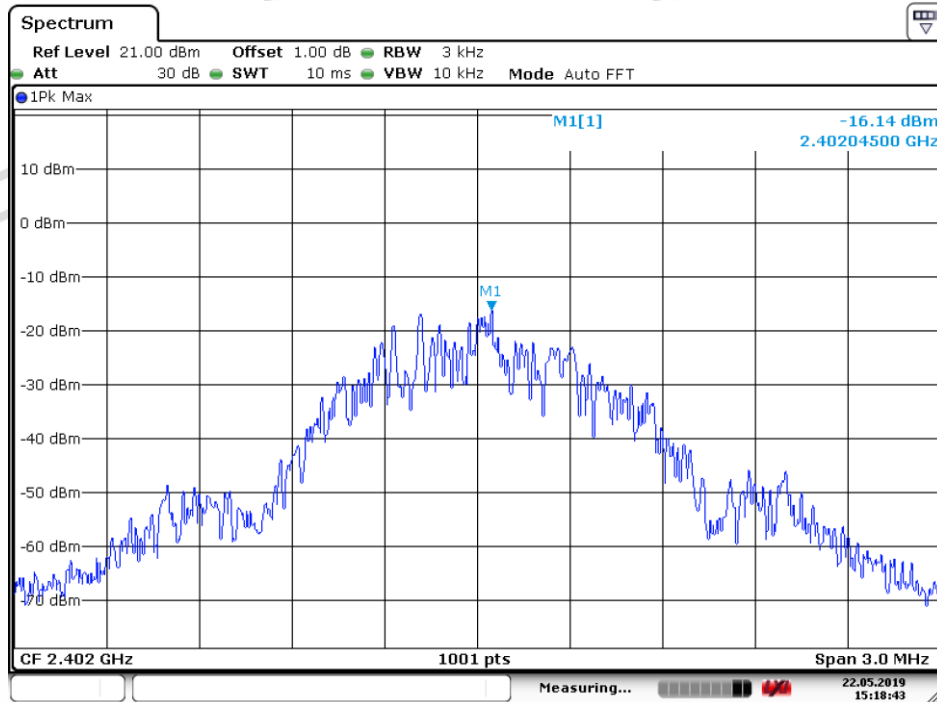


Date: 22.MAY.2019 15:18:43

GFSK_Middle Channel

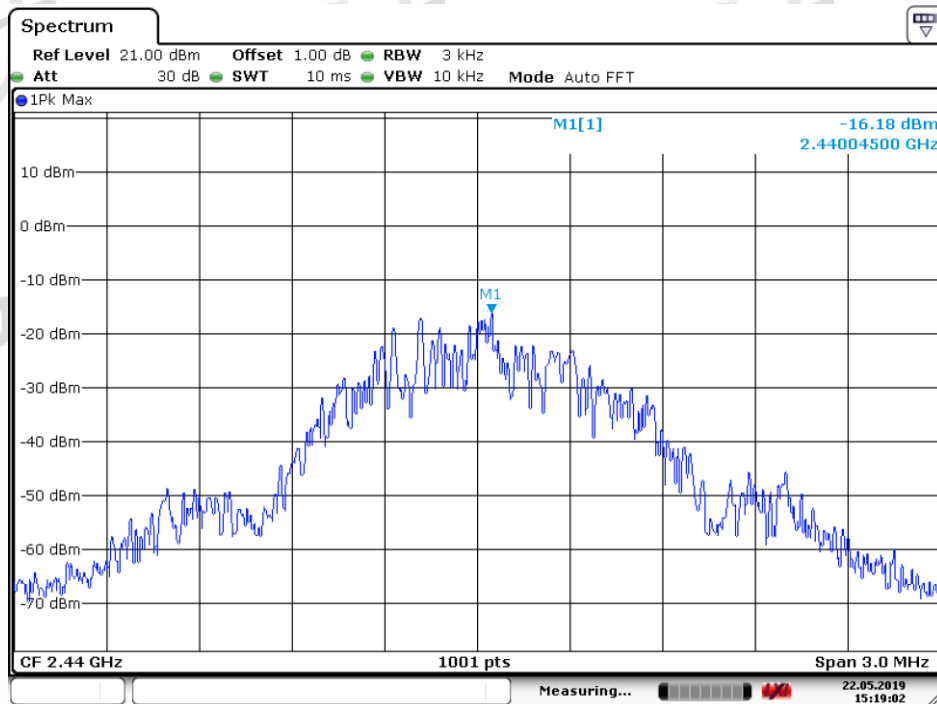

Date: 22.MAY.2019 15:19:02

GFSK_Highest Channel

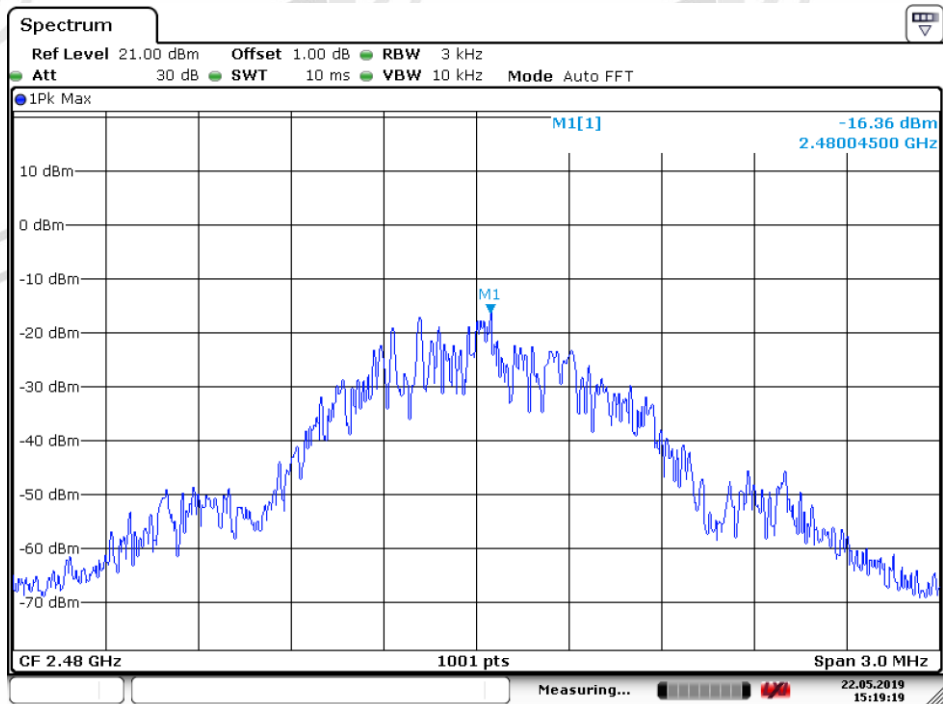


Date: 22.MAY.2019 15:19:19


7 Band-edge for RF Conducted Emissions

7.1 Test plots

GFSK _Lowest Channel

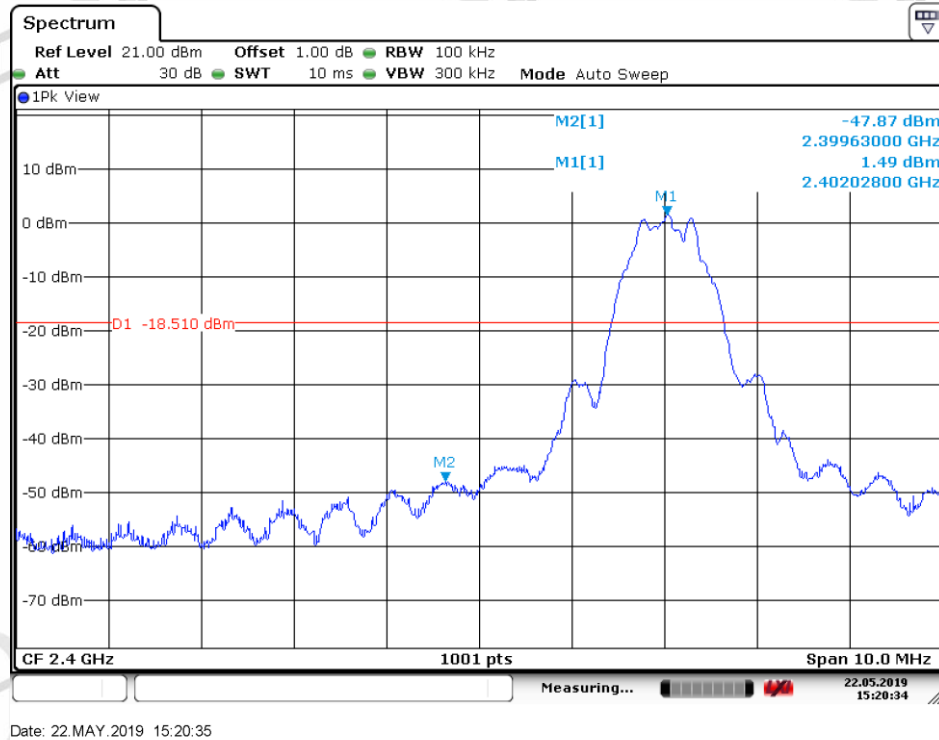


GFSK _Highest Channel

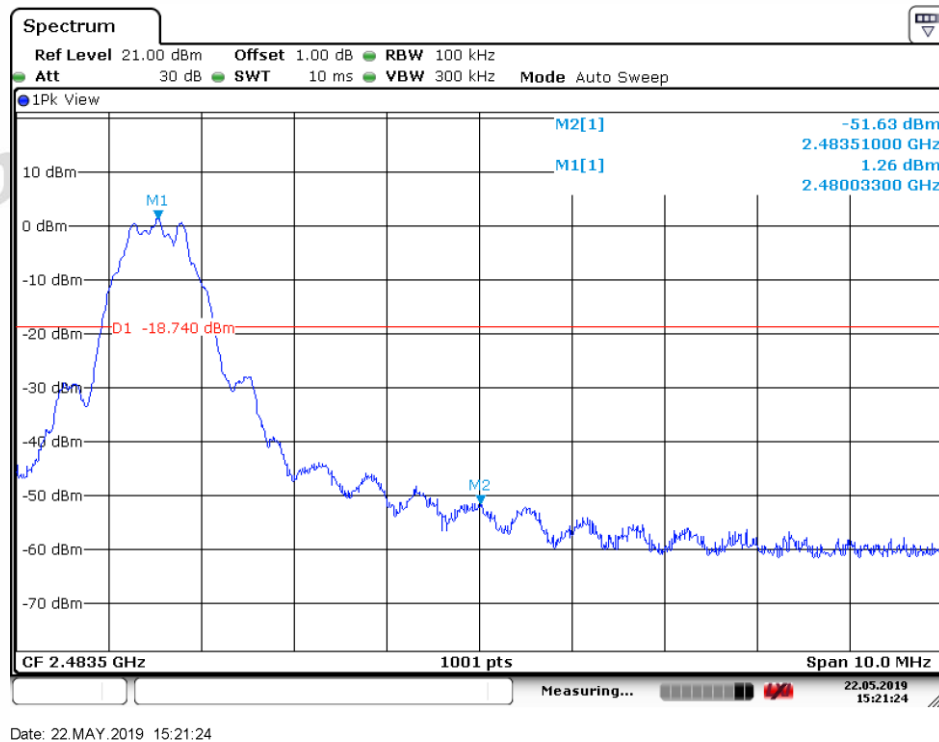


8 Spurious RF Conducted Emissions

8.1 Test plots:


GFSK _Lowest Channel

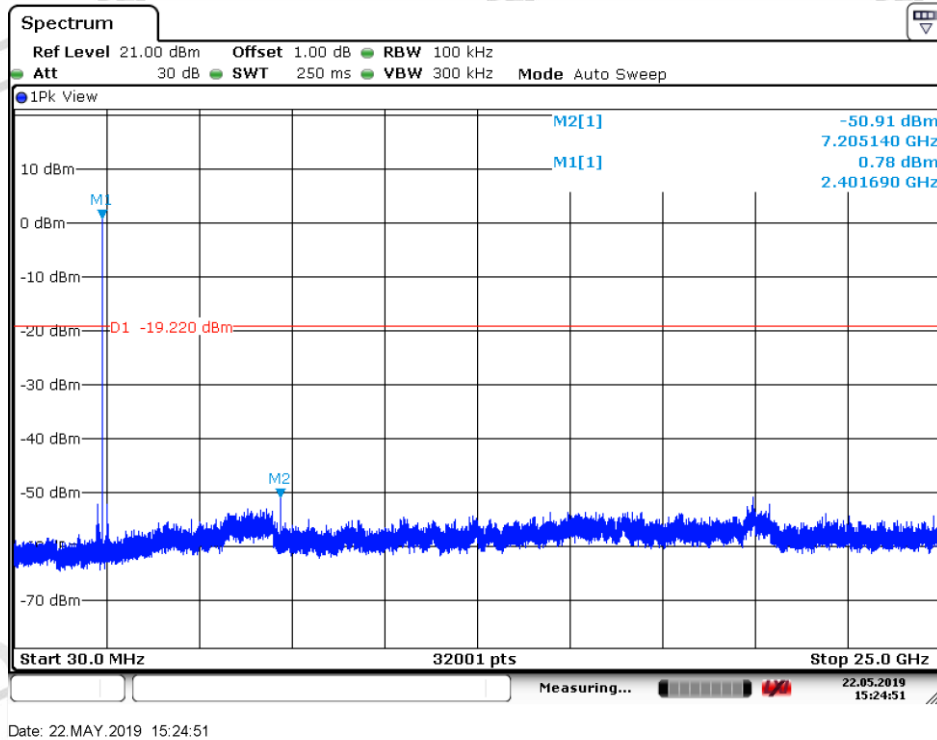

GFSK _Middle Channel

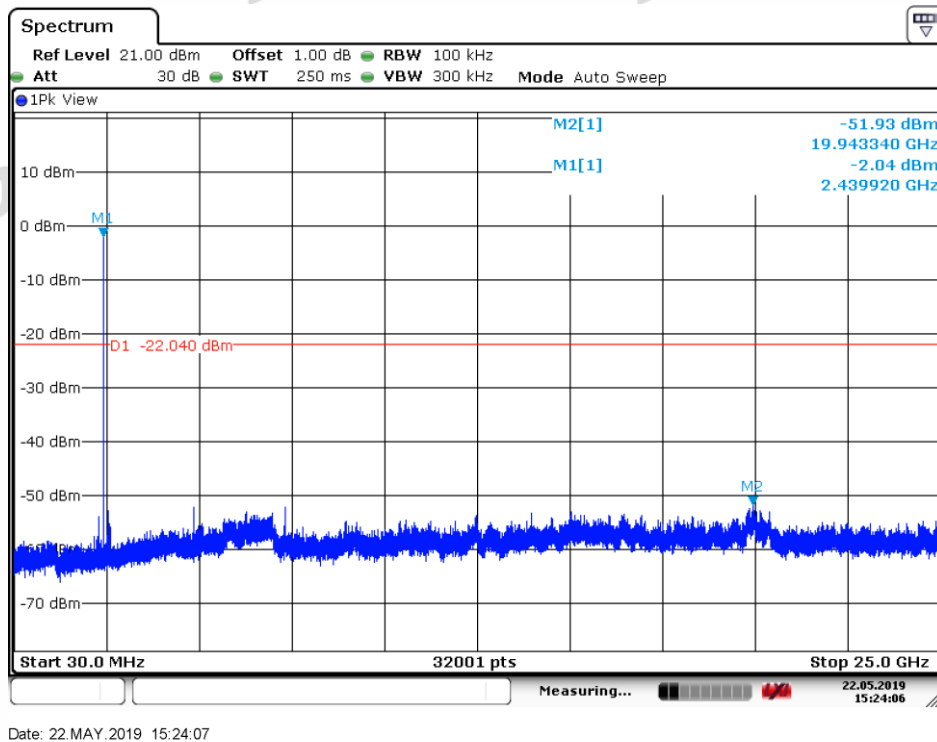

GFSK_Highest Channel

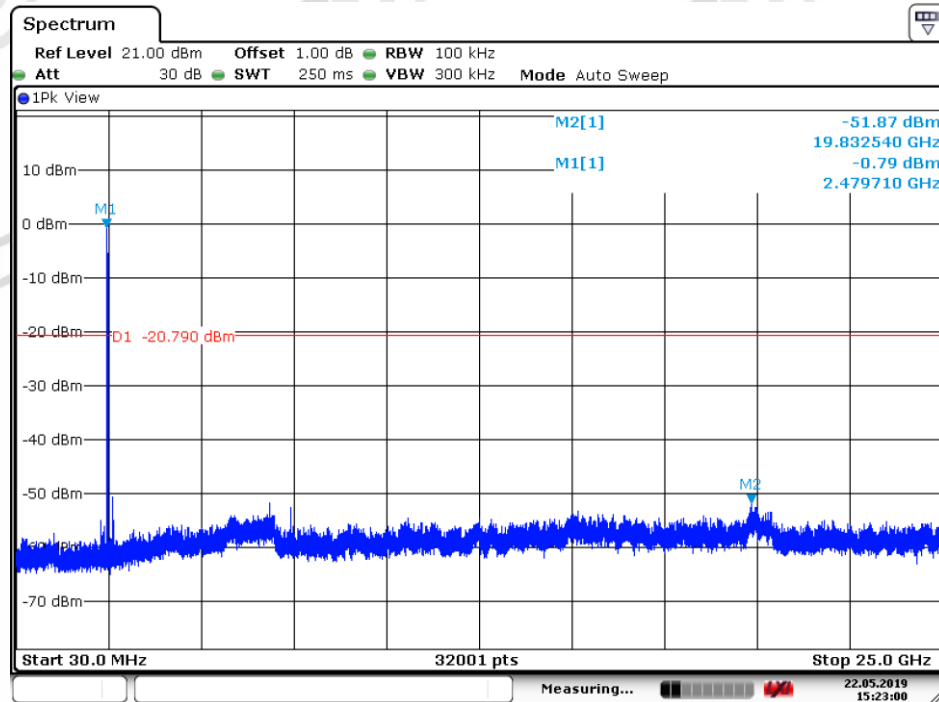

Date: 22.MAY.2019 15:23:01

Remark:

Scan from 9kHz to 25GHz, the disturbance between 9KHz to 30MHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

The End