

FCC PART 22H, PART 24E TEST REPORT

For

Advanced Mobile Payment Inc.

Units 401-403, 15 Wertheim Court. Richmond Hill, Ontario L4B 3H7 Canada

FCC ID: 2AKJB-AMP9000-2

Report Type: Product Type:

Original Report POS Payment Terminal

Report Number: RSZ170511006-00C

Report Date: 2017-05-23

Oscar Ye

Reviewed By: Engineer

Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan)

No.248 Chenghu Road, Kunshan, Jiangsu province,

Gscar. Ye

China

Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

Report No.: RSZ170511006-00C

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY	
MEASUREMENT UNCERTAINTY	
TEST FACILITY	4
SYSTEM TEST CONFIGURATION	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	
SUPPORT EQUIPMENT LIST AND DETAILS	5
BLOCK DIAGRAM OF TEST SETUP	5
SUMMARY OF TEST RESULTS	6
TEST EQUIPMENT LIST	7
FCC §1.1307 & §2.1093 - RF EXPOSURE	8
APPLICABLE STANDARD	
Test Result	
FCC §2.1047 - MODULATION CHARACTERISTIC	9
FCC § 2.1046, § 22.913 (A) & § 24.232 (C) - RF OUTPUT POWER	
APPLICABLE STANDARD	
TEST PROCEDURE	
FCC §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS	12
APPLICABLE STANDARD	12
TEST PROCEDURE	12
TEST DATA	12

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The Advanced Mobile Payment Inc.'s product, model number: AMP 9000-CO (FCC ID: 2AKJB-AMP9000-2) in this report is a POS Payment Terminal, which was measured approximately: 140 mm (L) * 80 mm (W) *29 mm (H), rated with input voltage: DC 3.7V battery or DC 5.0V from adapter.

Report No.: RSZ170511006-00C

Adapter Information:

Model: ADS-6MA-06 05050EPCU Input: AC 100-240V, 50/60Hz, 0.3A

Output: DC 5.0V, 1.0A

* All measurement and test data in this report was gathered from production sample serial number: 1700955 (Assigned by BACL, Kunshan). The EUT supplied by the applicant was received on 2017-05-11.

Objective

This test report is prepared on behalf of *Advanced Mobile Payment Inc.* in accordance with Part 2-Subpart J, Part 22-Subpart H and Part 24-Subpart E of the Federal Communication Commissions rules.

The objective is to determine the compliance of the EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability and band edge.

Related Submittal(s)/Grant(s)

FCC 15.225 DXX and Part 15B JBP submissions with FCC ID: 2AKJB-AMP9000-2.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2-Subpart J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E - Personal Communication Services

Applicable Standards: TIA/EIA 603-D.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

FCC Part 22H/24E Page 3 of 14

Measurement Uncertainty

	Item	Uncertainty
RF conducte	d test with spectrum	±0.9dB
RF Output Pov	wer with Power meter	±0.5dB
Dadistal amining	30MHz~1GHz	±5.91dB
Radiated emission	Above 1G	±4.92dB
Occupi	ed Bandwidth	±0.5kHz
Те	mperature	±1.0℃
H	Iumidity	±6%

Report No.: RSZ170511006-00C

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Test site at Bay Area Compliance Laboratories Corp. (Kunshan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 06, 2014. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

FCC Part 22H/24E Page 4 of 14

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.

Equipment Modifications


No modification was made to the EUT.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	110605

Report No.: RSZ170511006-00C

Block Diagram of Test Setup

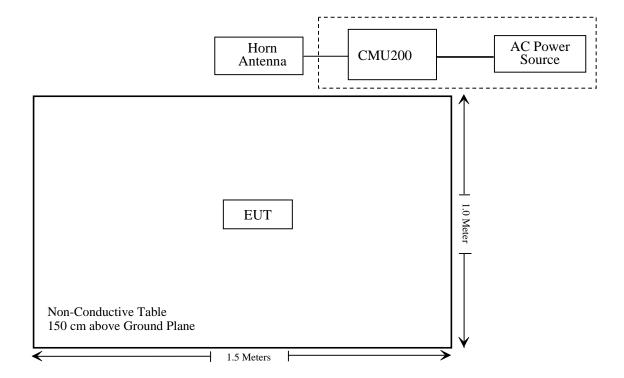

FCC Part 22H/24E Page 5 of 14

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307, §2.1093	RF Exposure (SAR)	Compliance
\$2.1046; \$ 22.913 (a); \$ 24.232 (c)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905 § 22.917; § 24.238	Bandwidth	Compliance*
§ 2.1051, § 22.917 (a); § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliance*
§ 2.1053 § 22.917 (a); § 24.238 (a)	Field Strength of Spurious Radiation	Compliance
§ 22.917 (a); § 24.238 (a)	Out of band emission, Band Edge	Compliance*
§ 2.1055 § 22.355; § 24.235	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance*

Report No.: RSZ170511006-00C

Note: Compliance*: The EUT is identical with the product which the Model named AMP 9000 and FCC ID is 2AKJB-AMP9000, the difference is the Wifi module was removed. So these test items please referred to FCC ID: 2AKJB-AMP9000 that has been certified on 2017-02-18, report No.: RSZ161123002-00C, which was tested by Bay Area Compliance Laboratories Corp.

FCC Part 22H/24E Page 6 of 14

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
	F	Radiated Emissio	n Test		
Sonoma Instrunent	Amplifier	330	171377	2016-10-21	2017-10-21
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2016-11-25	2017-11-25
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2016-01-09	2019-01-08
Sunol Sciences	Broadband Antenna	JB3	A090314-1	2016-01-09	2019-01-08
Narda	Pre-amplifier	AFS42- 00101800	2001270	2016-09-08	2017-09-08
EMCO	Horn Antenna	3116	00084159	2016-10-18	2019-10-17
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2016-11-25	2017-11-25
ETS	Horn Antenna	3115	6229	2016-12-12	2019-12-12
ETS	Horn Antenna	3115	9311-4159	2016-12-12	2019-12-12
R&S	Auto test Software	EMC32	V 09.10.0	NCR	NCR
haojintech	Coaxial Cable	Cable-1	001	2016-12-12	2017-12-12
haojintech	Coaxial Cable	Cable-2	002	2016-12-12	2017-12-12
haojintech	Coaxial Cable	Cable-3	003	2016-12-12	2017-12-12
MICRO-COAX	Coaxial Cable	Cable-4	004	2016-12-12	2017-12-12
MICRO-COAX	Coaxial Cable	Cable-5	005	2016-12-12	2017-12-12
MICRO-COAX	Coaxial Cable	Cable-7	007	2016-12-12	2017-12-12
НР	Signal Generator	8341B	2624A00116	2016-08-29	2017-08-29

Report No.: RSZ170511006-00C

FCC Part 22H/24E Page 7 of 14

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307 & §2.1093 - RF EXPOSURE

Report No.: RSZ170511006-00C

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliance, please refer to the SAR report: RSZ170511006-20.

FCC Part 22H/24E Page 8 of 14

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC $\S 2.1047(d)$, Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

Report No.: RSZ170511006-00C

FCC Part 22H/24E Page 9 of 14

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) - RF OUTPUT POWER

Applicable Standard

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.


Report No.: RSZ170511006-00C

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

Test Procedure

Conducted method:

The RF output of the transmitter was connected to the wireless test set and the spectrum analyzer through sufficient attenuation.



Radiated method:

TIA 603-D section 2.2.17

Test Data

Environmental Conditions

Temperature:	20 ℃
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Echo Wu on 2017-05-18.

EUT operation mode: Transmitting

FCC Part 22H/24E Page 10 of 14

Radiated Power

GPRS Mode:

	Receiver	Turntable	Rx An	tenna	Su	bstitute	d	Absolute		
Frequency	Reading (dBµV)	Angle Degree	Height (m)	Polar (H/V)	Substituted Level (dBm)	Cable loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
	ERP for Cellular Band (Part 22H), Middle channel									
836.6	96.72	324	1.9	Н	26.5	0.26	4.75	30.99	38.45	7.46
836.6	94.24	184	2.1	V	20.0	0.26	4.75	24.49	38.45	13.96
		Е	IRP for P	CS Ban	d (Part 24E).	Middle	channel			
1880.00	80.09	354	1.8	Н	18.6	0.45	8.84	26.99	33	6.01
1880.00	76.32	231	1.1	V	12.6	0.45	8.84	20.99	33	12.01

Report No.: RSZ170511006-00C

WCDMA Mode:

Frequency Readir	Receiver	Turntable	Rx An	tenna	Substituted			Absolute		
	Reading (dBµV)	Angle Degree	Height (m)	Polar (H/V)	Substituted Level (dBm)	Cable loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
	ERP for Cellular Band (Part 22H), Middle channel									
836.6	87.72	253	1.2	Н	17.5	0.26	4.75	21.99	38.45	16.46
836.6	86.34	31	2.0	V	12.1	0.26	4.75	16.59	38.45	21.86
		Е	IRP for P	CS Ban	d (Part 24E).	, Middle	channel			
1880.00	74.39	215	2.3	Н	12.9	0.45	8.84	21.29	33	11.71
1880.00	67.62	327	2.5	V	3.9	0.45	8.84	12.29	33	20.71

Note:

All above data were tested with no amplifier.

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

FCC Part 22H/24E Page 11 of 14

FCC §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS

Report No.: RSZ170511006-00C

Applicable Standard

FCC § 2.1053, §22.917 and § 24.238.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the receiving antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in $dB = 10 \lg (TXpwr in Watts/0.001) - the absolute level$

Spurious attenuation limit in $dB = 43 + 10 \text{ Log}_{10}$ (power out in Watts)

Test Data

Environmental Conditions

Temperature:	20 ℃
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Layne Li on 2017-05-18.

EUT operation mode: Transmitting

FCC Part 22H/24E Page 12 of 14

Pre-scan with Low, Middle and High channel, the worst case as below:

30 MHz ~ 10 GHz:

Cellular Band (Part 22H)

Report No.: RSZ170511006-00C

Receiver Turntable	Turntable	Rx An	Rx Antenna		Substituted					
Frequency (MHz)	Reading (dBµV)	Angle Degree	Height (m)	Polar (H/V)	Substituted Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	.evel	Limit (dBm)	Margin (dB)
	GPRS Mode, Middle channel									
399.88	62.86	274	1.8	Н	-39.8	0.23	4.65	-35.38	-13	22.38
399.88	67.20	268	1.1	V	-38.6	0.23	4.65	-34.18	-13	21.18
1673.20	61.70	77	1.9	Н	-40.1	0.40	8.52	-31.98	-13	18.98
1673.20	57.77	176	1.1	V	-46.0	0.40	8.52	-37.88	-13	24.88

30 MHz ~ 20 GHz:

PCS Band (Part 24E)

Rec	Receiver Turnta	Turntable	Turntable Rx Anten		enna Substituted					
Frequency (MHz)	Reading (dBµV)	Angle Degree	Height (m)	Polar (H/V)	Substituted Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
	GPRS Mode, Middle channel									
399.88	64.06	40	2.1	Н	-38.6	0.23	4.65	-34.18	-13	21.18
399.88	67.40	21	1.0	V	-38.4	0.23	4.65	-33.98	-13	20.98
3760.00	54.12	184	1.8	Н	-41.9	0.59	9.72	-32.77	-13	19.77
3760.00	58.41	248	1.5	V	-38.7	0.59	9.72	-29.57	-13	16.57

FCC Part 22H/24E Page 13 of 14

30 MHz ~ **10 GHz**:

Cellular Band (Part 22H)

Report No.: RSZ170511006-00C

Receiver Tur	Turntable Rx Antenna		tenna	Sı	ubstitute	d	Absolute			
Frequency (MHz)	quency Reading Angle	Height (m)	Polar (H/V)	Substituted Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	
			WC	DMA M	ode, Middle	channel				
399.88	65.16	204	1.3	Н	-37.5	0.23	4.65	-33.08	-13	20.08
399.88	69.40	60	1.9	V	-36.4	0.23	4.65	-31.98	-13	18.98
1673.20	43.20	354	1.3	Н	-58.6	0.40	8.52	-50.48	-13	37.48
1673.20	43.17	40	1.4	V	-60.6	0.40	8.52	-52.48	-13	39.48

30 MHz ~ 20 GHz:

PCS Band (Part 24E)

Frequency (MHz)	Receiver Reading (dBµV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute		
			Height (m)	Polar (H/V)	Substituted Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
WCDMA Mode, Middle channel										
399.88	63.76	86	2.2	Н	-38.9	0.23	4.65	-34.48	-13	21.48
399.88	68.90	217	2.0	V	-36.9	0.23	4.65	-32.48	-13	19.48
3760.00	53.02	331	2.1	Н	-43.0	0.59	9.72	-33.87	-13	20.87
3760.00	54.21	14	2.4	V	-42.9	0.59	9.72	-33.77	-13	20.77

Note:

1) Absolute Level = SG Level - Cable loss + Antenna Gain

2) Margin = Limit- Absolute Level

***** END OF REPORT *****

FCC Part 22H/24E Page 14 of 14