

MEASUREMENT REPORT

FCC PART 15.231(a) / RSS-210

FCC ID: 2AKKN-R001

IC: 22222-R001

APPLICANT: HAINING ZHONGYUAN PLASTIC CO., LTD.

Application Type: Certification

Product: Remote Control

Model No.: ZYPS-R001

FCC Classification: FCC Part 15 Security/Remote Control Transmitter
(DSC)

FCC Rule Part(s): Part 15.231(a)

IC Rule(s): RSS-210 Issue 9 – Annex A

Test Procedure(s): ANSI C63.10-2013

Test Date: November 25 ~ December 06, 2016

Reviewed By : Robin Wu

(Robin Wu)

Approved By : Marlin Chen

(Marlin Chen)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
1611RSU04301	Rev. 01	Initial report	12-15-2016	Valid

CONTENTS

Description	Page
1. INTRODUCTION	5
1.1. Scope	5
1.2. MRT Test Location	5
2. PRODUCT INFORMATION	6
2.1. Equipment Description.....	6
2.2. Test Standards	6
2.3. Test Methodology	6
2.4. EUT Setup and Test Mode	7
3. ANTENNA REQUIREMENTS	8
4. TEST EQUIPMENT CALIBRATION DATA	9
5. MEASUREMENT UNCERTAINTY	11
6. TEST RESULT	12
6.1. Summary	12
6.2. Radiated Emissions.....	13
6.2.1. Standard Applicable	13
6.2.2. Test Procedure.....	13
6.2.3. Test Setup.....	14
6.2.4. Test Results	16
6.3. 20dB Bandwidth	20
6.3.1. Standard Applicable	20
6.3.2. Test Procedure.....	20
6.3.3. Test Setup.....	20
6.3.4. Test Result.....	21
6.4. Release Time.....	22
6.4.1. Standard Applicable	22
6.4.2. Test Procedure.....	22
6.4.3. Test Setup.....	22
6.4.4. Test Result.....	23
6.5. Duty Cycle	24
6.5.1. Standard Applicable	24
6.5.2. Test Procedure.....	24
6.5.3. Test Setup.....	24
6.5.4. Test Result.....	25
7. CONCLUSION	26

§2.1033 General Information

Applicant:	HAINING ZHONGYUAN PLASTIC CO., LTD.
Applicant Address:	No.23 Shuangxue Road, Socks Industry Zone, Haining, Zhejiang Province, China
Manufacturer:	HAINING ZHONGYUAN PLASTIC CO., LTD.
Manufacturer Address:	No.23 Shuangxue Road, Socks Industry Zone, Haining, Zhejiang Province, China
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
MRT Registration No.:	809388
FCC Rule Part(s):	Part 15.231(a)
IC Rule(s):	RSS-210 Issue 9 – Annex A
Model No.	ZYPS-R001
FCC ID:	2AKKN-R001
IC:	22222-R001
Test Device Serial No.:	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering
FCC Classification:	FCC Part 15 Security/Remote Control Transmitter(DSC)

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 809388) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-4179, G-814, C-4664, T-2206) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, EU and TELEC Rules.



1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	Remote Control
Model No.	ZYPS-R001
Frequency Range	433.92 MHz
Type of modulation	ASK
Antenna Type	Integral Antenna
Antenna Gain	0 dBi

2.2. Test Standards

The following report is prepared on behalf of the **HAINING ZHONGYUAN PLASTIC CO., LTD.** in accordance with FCC Part 15, Subpart C, and section 15.231, 15.203, 15.205 and 15.209 of the Federal Communication Commission rules, and RSS-210 Issue 9 & RSS-Gen Issue 4 rules of IC rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.231, 15.203, 15.205 and 15.209 of the Federal Communication Commission rules, and RSS-210 Issue 9 & RSS-Gen Issue 4 rules of IC rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

2.3. Test Methodology

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013).

Deviation from measurement procedure..........**None**

2.4. EUT Setup and Test Mode

The EUT was operated at continuous transmitting mode that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
Mode 1	Transmitting	With modulation

3. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the **Remote Control** is permanently attached.
- There are no provisions for connection to an external antenna.

Conclusion:

The Remote Control FCC ID: **2AKKN-R001** unit complies with the requirement of §15.203.

4. TEST EQUIPMENT CALIBRATION DATA

Radiated Disturbance – AC2

Instrument	Manufacturer	Type No.	Serial No.	Cal. Interval	Cal. Due Date
Spectrum Analyzer	Agilent	N9020A	MY52090106	1 year	2017/05/07
Microwave System Amplifier	Agilent	83017A	MY53270040	1 year	2017/03/28
Bilog Period Antenna	Schwarzbeck	VULB 9168	662	1 year	2016/12/11
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1167	1 year	2017/11/07
Preamplifier	Agilent	83017A	MRTSUE06076	1 year	2017/03/29
Loop Antenna	Schwarzbeck	FMZB1519	MRTSUE06025	1 year	2016/12/14
RF Cable	HUBER+SU HNER	Cable 01	MRTSUE06055-1	1 year	2017/03/29
RF Cable	HUBER+SU HNER	Cable 02	MRTSUE06055-2	1 year	2017/03/29
Temperature/Humidity Meter	Yuhuaze	HTC-2	N/A	1 year	2016/12/20
Anechoic Chamber	TDK	Chamber-AC1	N/A	1 year	2017/05/10

20dB Bandwidth – AC2

Instrument	Manufacturer	Type No.	Serial No.	Cal. Interval	Cal. Due Date
Spectrum Analyzer	Agilent	N9020A	MY52090106	1 year	2017/05/07
Bilog Period Antenna	Schwarzbeck	VULB 9168	662	1 year	2016/12/11
RF Cable	HUBER+SU HNER	Cable 01	MRTSUE06055-1	1 year	2017/03/29
RF Cable	HUBER+SU HNER	Cable 02	MRTSUE06055-2	1 year	2017/03/29
Temperature/Humidity Meter	Yuhuaze	HTC-2	N/A	1 year	2016/12/20
Anechoic Chamber	TDK	Chamber-AC1	N/A	1 year	2017/05/10

Release Time – AC2

Instrument	Manufacturer	Type No.	Serial No.	Cal. Interval	Cal. Due Date
Spectrum Analyzer	Agilent	N9020A	MY52090106	1 year	2017/05/07
Bilog Period Antenna	Schwarzbeck	VULB 9168	662	1 year	2016/12/11
RF Cable	HUBER+SU HNER	Cable 01	MRTSUE06055-1	1 year	2017/03/29
RF Cable	HUBER+SU HNER	Cable 02	MRTSUE06055-2	1 year	2017/03/29
Temperature/Humidity Meter	Yuhuaze	HTC-2	N/A	1 year	2016/12/20
Anechoic Chamber	TDK	Chamber-AC1	N/A	1 year	2017/05/10

Duty Cycle – AC2

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cal. Due Date
Spectrum Analyzer	Agilent	N9020A	MY52090106	1 year	2017/05/07
Bilog Period Antenna	Schwarzbeck	VULB 9168	662	1 year	2016/12/11
RF Cable	HUBER+SU HNER	Cable 01	MRTSUE06055-1	1 year	2017/03/29
RF Cable	HUBER+SU HNER	Cable 02	MRTSUE06055-2	1 year	2017/03/29
Temperature/Humidity Meter	Yuhuaze	HTC-2	N/A	1 year	2016/12/20
Anechoic Chamber	TDK	Chamber-AC1	N/A	1 year	2017/05/10

5. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Radiated Emission Measurement – AC2

Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$):

9kHz ~ 1GHz: 4.18dB

1GHz ~ 18GHz: 4.76dB

Release Time Measurement – AC2

Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$):

0.09ms

6. TEST RESULT

6.1. Summary

Company Name: HAINING ZHONGYUAN PLASTIC CO., LTD.

FCC ID: 2AKKN-R001

IC: 22222-R001

FCC Part Section(s)	IC Section(s)	Test Description	Test Condition	Test Result
15.205 15.231(b)	RSS-210, A1.2	Radiated Spurious Emissions	Radiated	Pass
15.231(c)	RSS-210, A1.3	20dB Bandwidth / 99% Bandwidth		Pass
15.231(a)(1)	RSS-210, A1.1(a)	Release Time		Pass
15.231(b)	RSS-Gen, 6.10	Duty Cycle		Pass

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

6.2. Radiated Emissions

6.2.1. Standard Applicable

According to §15.231(b), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 - 40.70	2250	225
70 - 130	1250	125
130 - 174	¹ 1250 to 3750	¹ 125 to 375
174 - 260	3750	375
260 - 470	¹ 3750 to 12500	¹ 375 to 1250
Above 470	12500	1250

The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements start below or at the lowest crystal frequency.

Compliance with the provisions of §15.205 shall be demonstrated using the measurement instrumentation specified in that section.


6.2.2. Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.231(b) and FCC Part 15.209 Limit.


6.2.3. Test Setup


The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.231(b) and FCC Part 15.209 Limit.

9kHz ~ 30MHz Test Setup:

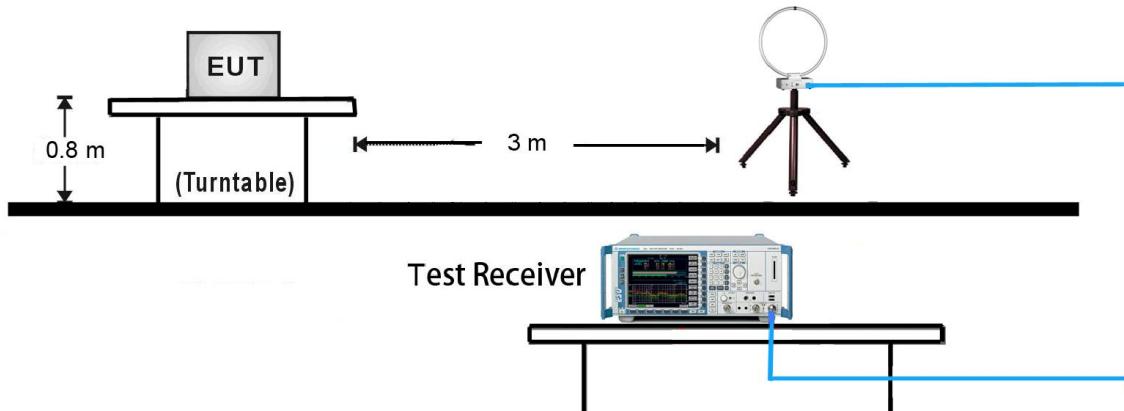


30MHz ~ 1GHz Test Setup:

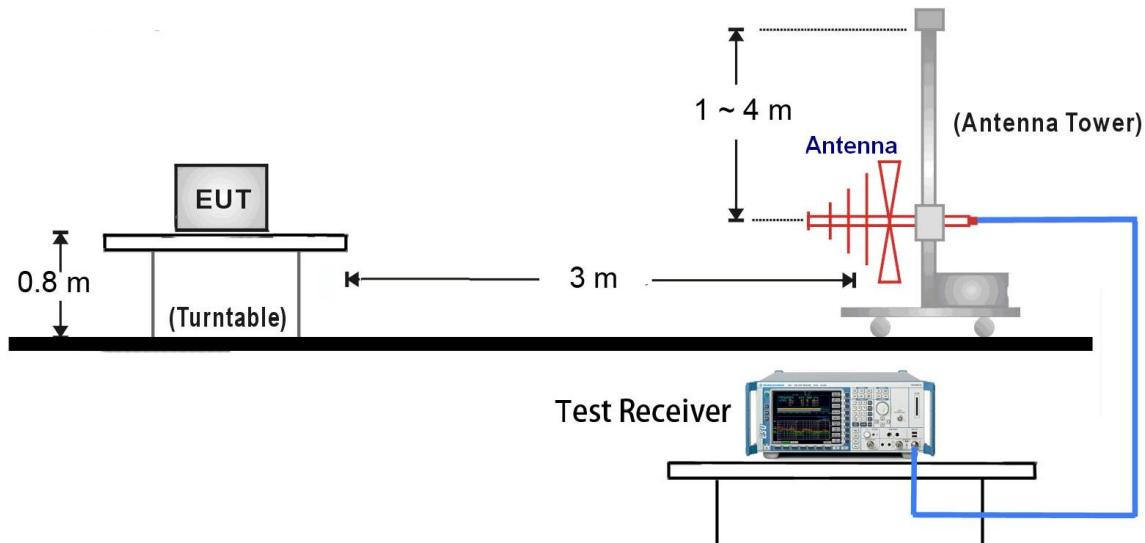

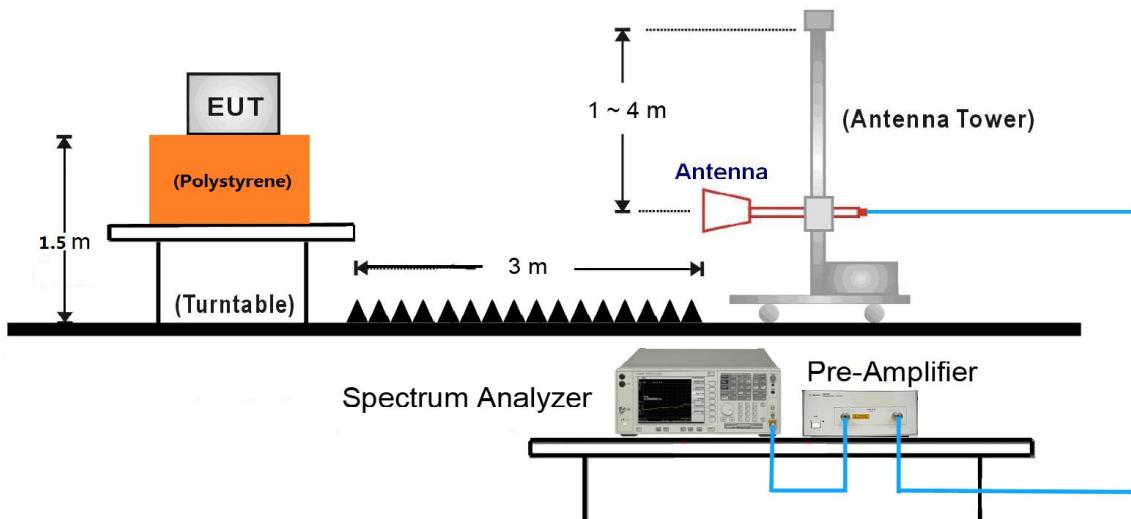1GHz ~ 18GHz Test Setup:

6.2.4. Test Results

Site: AC2	Time: 2016/12/01 - 20:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: VULB9162_0.03-8GHz	Polarity: Horizontal
EUT: ZYPS-R001	Power: DC 3V
Test Mode 1	

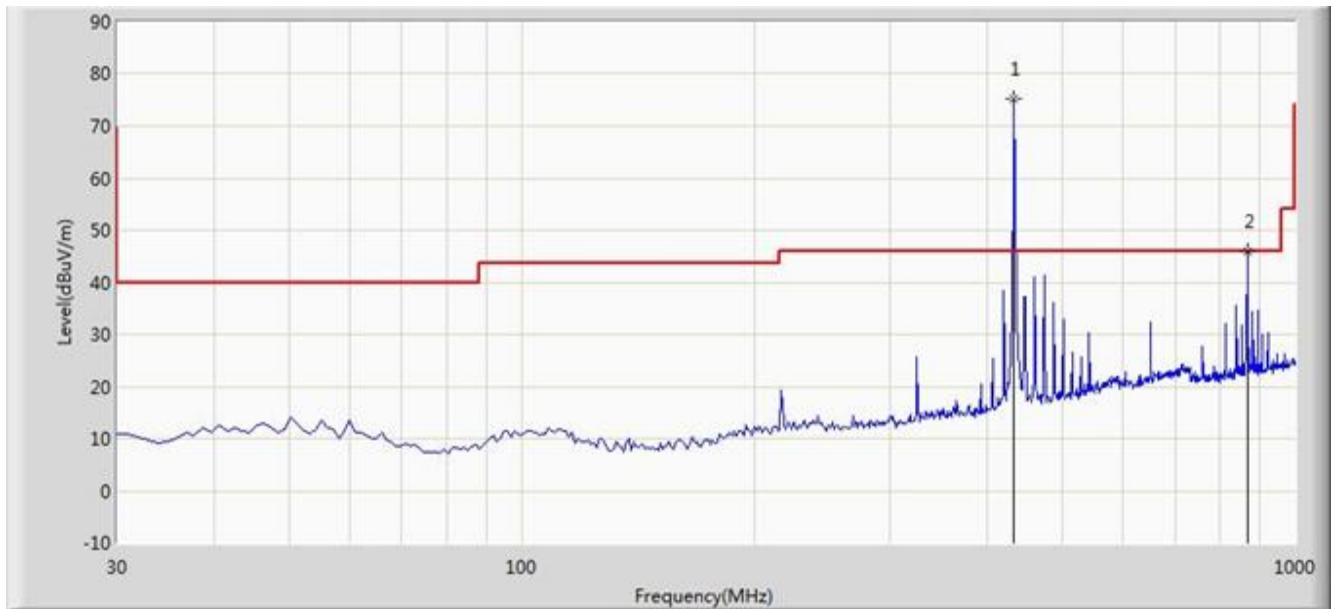

No	Frequency (MHz)	Reading Level (dBuV)	Factor (dB)	Duty Cycle Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Type
1	433.520	58.122	17.196	N/A	75.318	100.825	-25.507	PK
	433.520	58.122	17.196	14.20	61.118	80.825	-19.707	AV
2	868.080	22.050	23.872	N/A	45.922	80.825	-34.903	PK
	868.080	22.050	23.872	14.20	31.722	60.825	-29.103	AV

Note 1: Testing is carried out with frequency rang 9 kHz to the tenth harmonics. There is the ambient noise within frequency range 9 kHz ~ 30 MHz, the permissible value is not show in the report.


Note 2: The fundamental frequency is 433.92MHz, so the fundamental and spurious emissions radiated limit base on the operating frequency 433.92MHz.

Note 3: Peak Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB).

AV Measure Level = Peak Measure Level - Duty Cycle Factor.

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2016/12/01 - 20:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: VULB9162_0.03-8GHz	Polarity: Vertical
EUT: ZYPS-R001	Power: DC 3V
Test Mode 1	

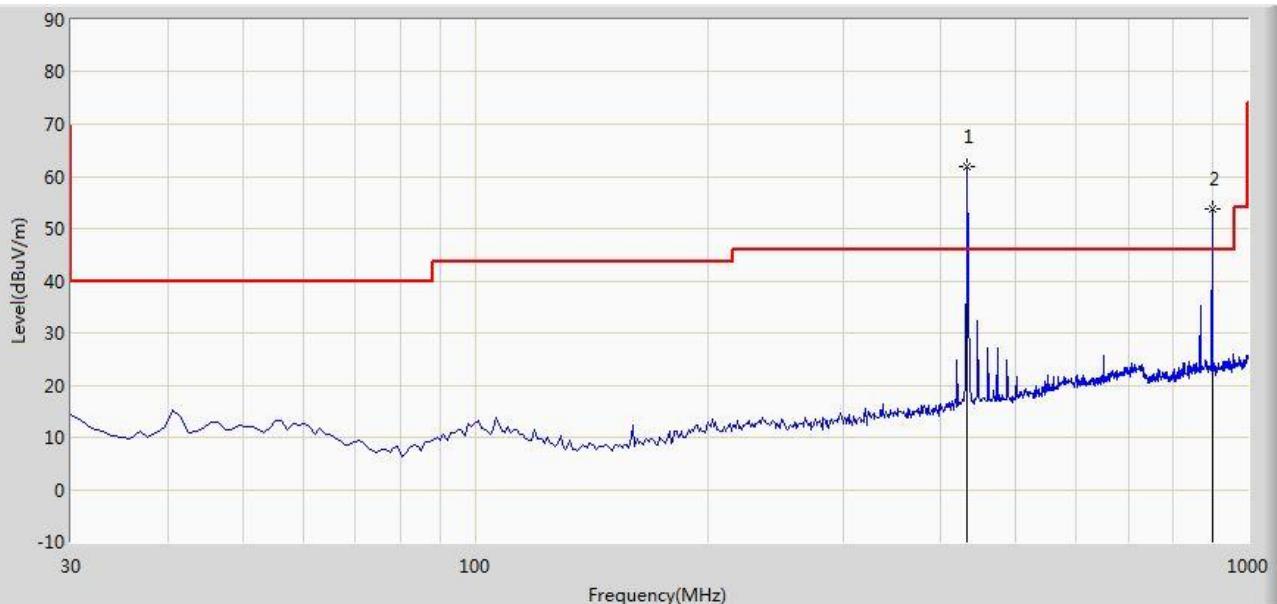

No	Frequency (MHz)	Reading Level (dBuV)	Factor (dB)	Duty Cycle Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Type
1	433.520	44.695	17.196	N/A	61.891	100.825	-38.934	PK
	433.520	44.695	17.196	14.20	47.691	80.825	-33.134	AV
2	899.120	29.497	24.138	N/A	53.635	80.825	-27.190	PK
	899.120	29.497	24.138	14.20	39.435	60.825	-21.390	AV

Note 1: Testing is carried out with frequency rang 9 kHz to the tenth harmonics. There is the ambient noise within frequency range 9 kHz ~ 30 MHz, the permissible value is not show in the report.


Note 2: The fundamental frequency is 433.92MHz, so the fundamental and spurious emissions radiated limit base on the operating frequency 433.92MHz.

Note 3: Peak Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB).

AV Measure Level = Peak Measure Level – Duty Cycle Factor.

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2016/12/01 - 22:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: ZYPS-R001	Power: DC 3V
Test Mode 1	

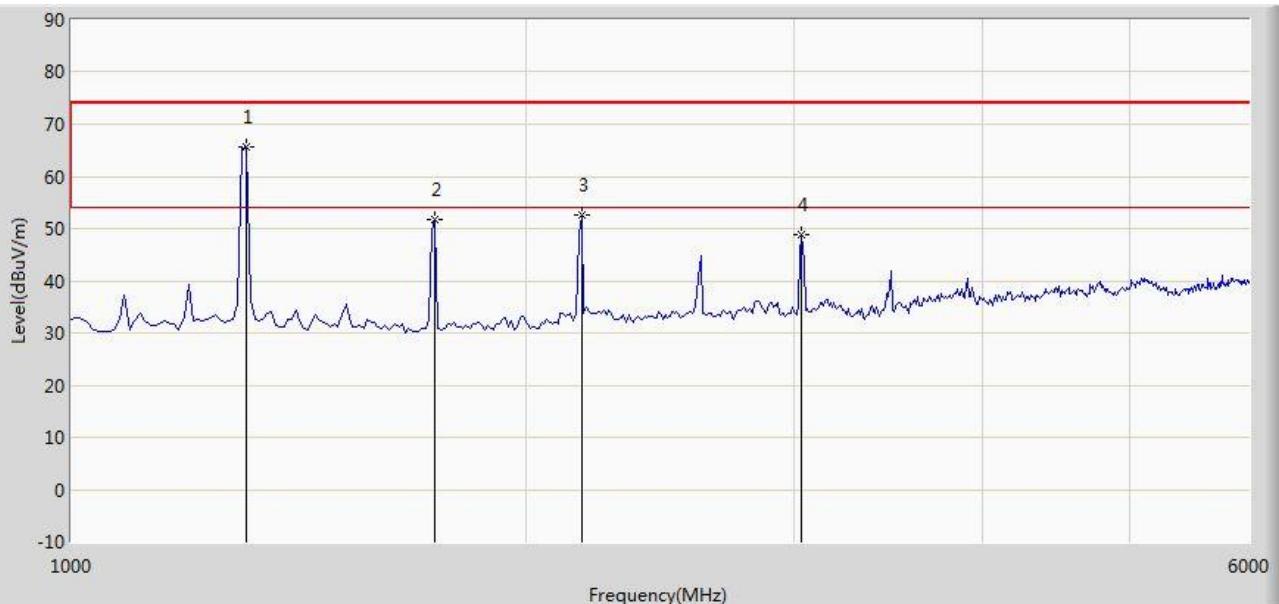

No	Frequency (MHz)	Reading Level (dBuV)	Factor (dB)	Dutycycle Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Type
1	1306.000	70.894	-5.310	N/A	65.584	74.000	-8.416	PK
	1306.000	70.894	-5.310	14.20	51.384	54.000	-2.616	AV
2	1739.500	57.954	-6.074	N/A	51.881	74.000	-22.119	PK
	1739.500	57.954	-6.074	14.20	37.681	54.000	-16.319	AV
3	2173.000	55.446	-2.798	N/A	52.648	74.000	-21.352	PK
	2173.000	55.446	-2.798	14.20	38.448	54.000	-15.552	AV
4	3040.000	51.813	-2.895	N/A	48.917	74.000	-25.083	PK
	3040.000	51.813	-2.895	14.20	34.717	54.000	-19.283	AV

Note 1: Testing is carried out with frequency rang 9 kHz to the tenth harmonics. There is the ambient noise within frequency range 9 kHz ~ 30 MHz, the permissible value is not show in the report.


Note 2: The fundamental frequency is 433.92MHz, so the fundamental and spurious emissions radiated limit base on the operating frequency 433.92MHz.

Note 3: Peak Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB).

AV Measure Level = Peak Measure Level – Duty Cycle Factor.

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Site: AC2	Time: 2016/12/01 - 22:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: ZYPS-R001	Power: DC 3V
Test Mode 1	

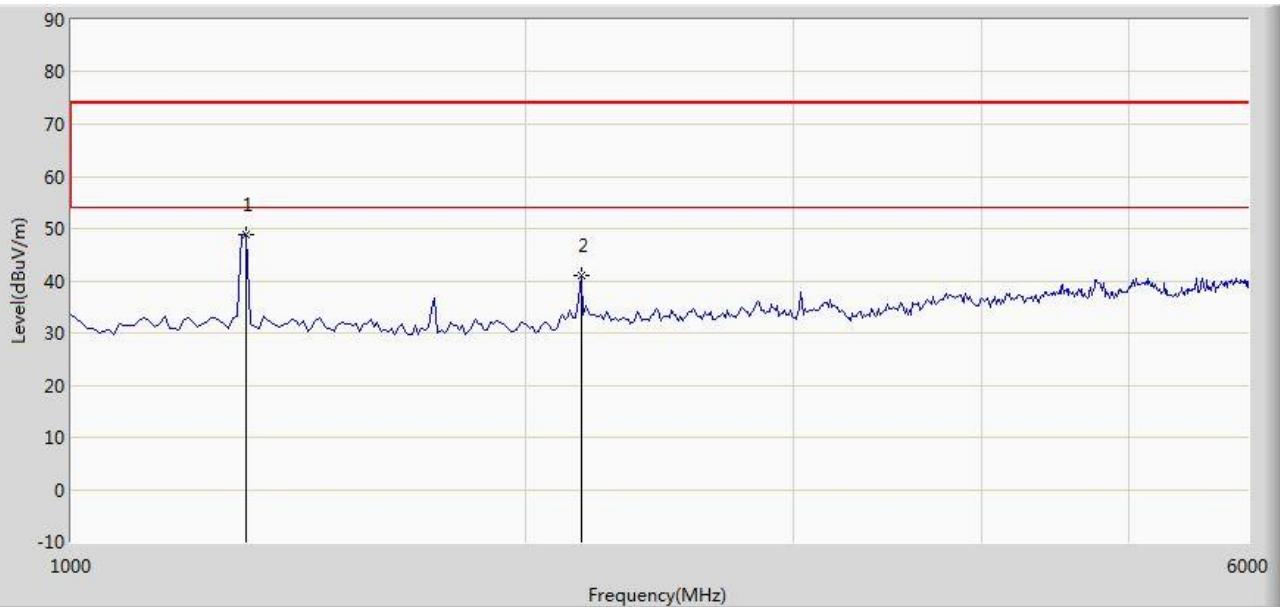

No	Frequency (MHz)	Reading Level (dBuV)	Factor (dB)	Dutycycle Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Type
1	1306.000	54.212	-5.310	N/A	48.902	74.000	-25.098	PK
	1306.000	54.212	-5.310	14.20	34.702	54.000	-19.298	AV
2	2173.000	43.714	-2.798	N/A	40.916	74.000	-33.084	PK
	2173.000	43.714	-2.798	14.20	26.716	54.000	-27.284	AV

Note 1: Testing is carried out with frequency rang 9 kHz to the tenth harmonics. There is the ambient noise within frequency range 9 kHz ~ 30 MHz, the permissible value is not show in the report.

Note 2: The fundamental frequency is 433.92MHz, so the fundamental and spurious emissions radiated limit base on the operating frequency 433.92MHz.

Note 3: Peak Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB).

AV Measure Level = Peak Measure Level – Duty Cycle Factor.

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

6.3. 20dB Bandwidth

6.3.1. Standard Applicable


According to FCC Part 15.231(c), the bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

According to RSS-210, A1.3, the 99% bandwidth of momentarily operated devices shall be less or equal to 0.25% of the centre frequency for devices operating between 70 MHz and 900 MHz. For devices operating above 900 MHz, the 99% bandwidth shall be less or equal to 0.5% of the centre frequency.

6.3.2. Test Procedure

With the EUT's antenna attached, the EUT's 20dB Bandwidth power was received by the test antenna, which was connected to the spectrum analyzer with the START, and STOP frequencies set to the EUT's operation band.

6.3.3. Test Setup

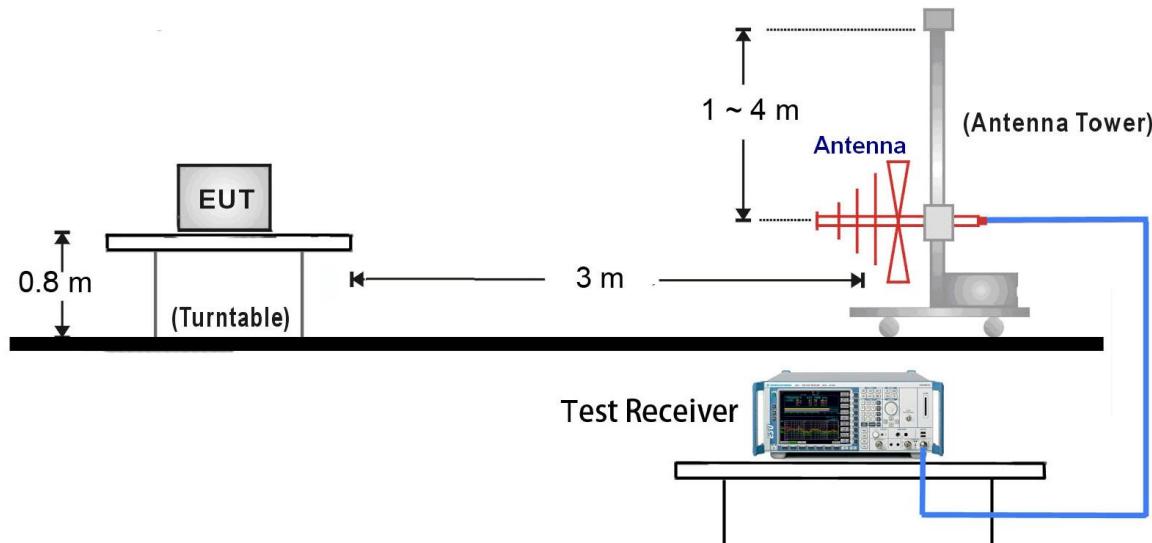

6.3.4. Test Result

Test Frequency (MHz)	20dB Bandwidth (KHz)	99% Bandwidth (KHz)	Limit (KHz)	Result
433.92	63.75	340.000	≤ 1084.8	Pass

Limit = Fundamental Frequency * 0.25% = 433.92MHz * 0.25% = 1084.8KHz

20dB & 99% Bandwidth Test Plot



6.4. Release Time


6.4.1. Standard Applicable

According to FCC 15.231(a), (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

6.4.2. Test Procedure

With the EUT's antenna attached, the EUT's output signal was received by the test antenna, which was connected to the spectrum analyzer. Set the center frequency to 433.92MHz, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the switch was released then the EUT automatically deactivated.


6.4.3. Test Setup

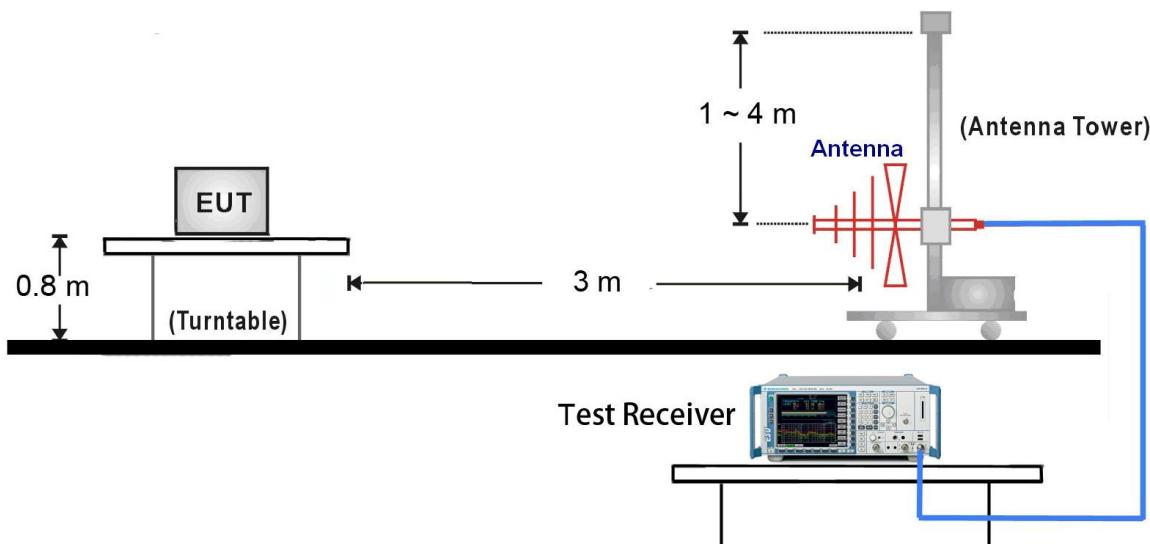

6.4.4. Test Result

Item	Measured Value	Limit	Result
Release Time	3.480 s	≤ 5 s	Pass

Release Time

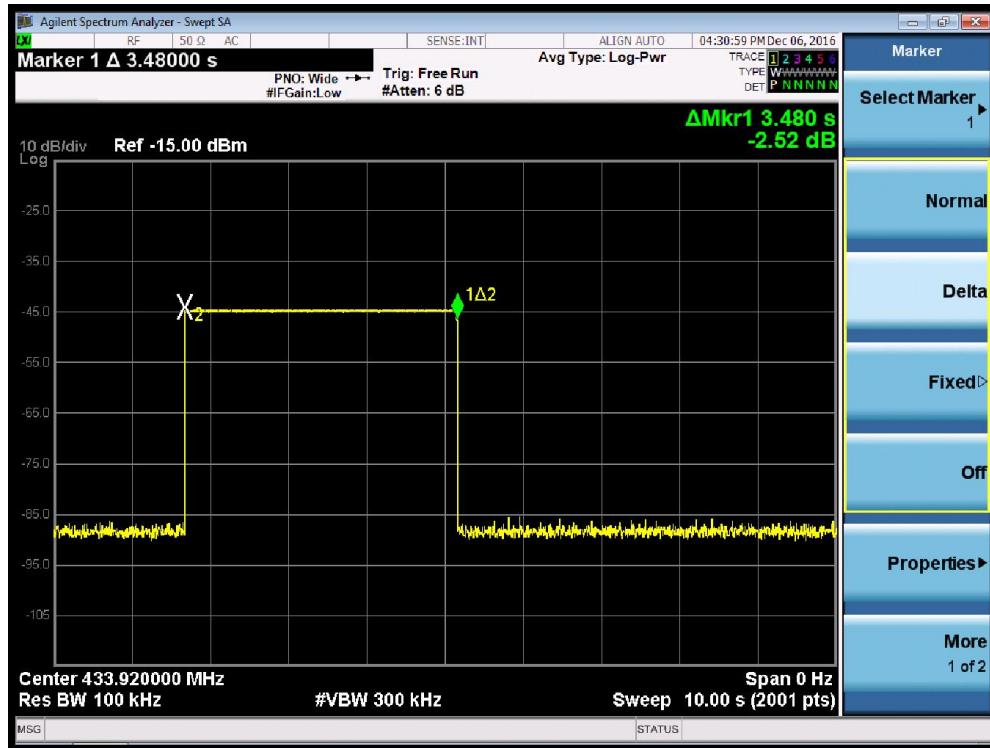

6.5. Duty Cycle


6.5.1. Standard Applicable

According to FCC Part 15.231(b) and 15.35(c), for pulse operation transmitter, the averaging pulsed emissions are calculated by peak value of measured emission plus duty cycle factor.

6.5.2. Test Procedure

With the EUT's antenna attached, the EUT's output signal was received by the test antenna, which was connected to the spectrum analyzer. Set the center frequency to 433.92MHz, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the switch was released then the EUT automatically deactivated.

6.5.3. Test Setup

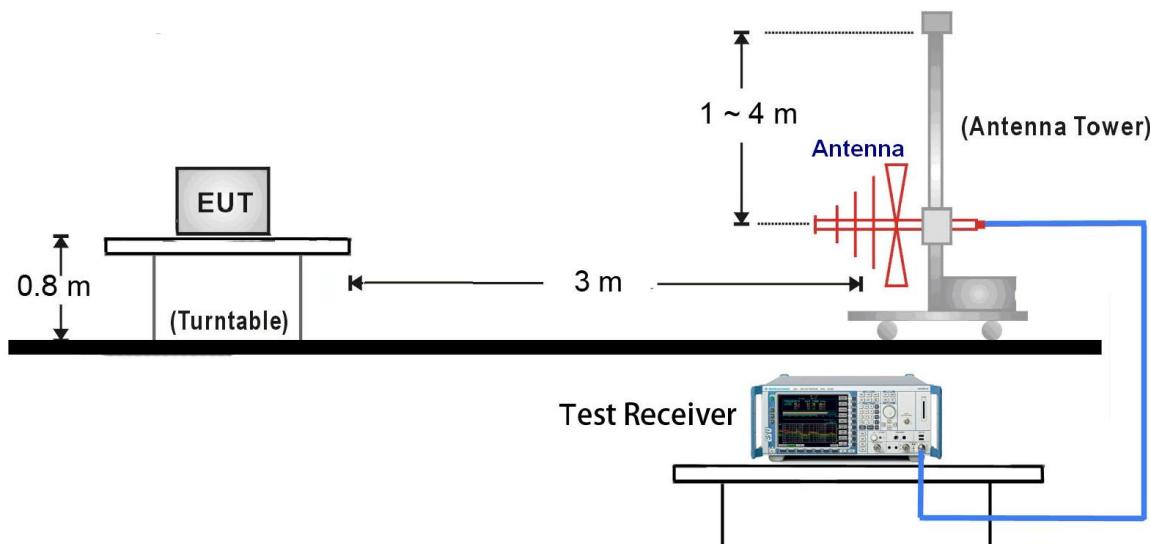

6.5.4. Test Result

Total Time (Ton) (ms)	The duration of one cycle (ms)	Duty Cycle (%)	Duty Cycle Factor (dB)
19.5	100	19.500	14.20

Note: Duty Cycle Factor = $-20 \times \log(\text{Duty Cycle})$.

Total Time (T_{on})(ms)= $0.200 \times 15 + 0.15 \times 110 = 19.500$ (ms)

Width of Pulse



7. CONCLUSION

The data collected relate only the item(s) tested and show that the **Remote Control FCC ID:**

2AKKN-R001 / IC: 22222-R001 is in compliance with FCC Part 15.231(a) of the FCC Rules and RSS-210 Issue 9 – Annex A of IC Rules.

The End
