

FCC RADIO TEST REPORT

FCC ID: 2AKKZHT308A

Product : Data Collector

Trade Name : Jepower

Model Name : HT308A

Serial Model : N/A

Report No. : POCE20161213231RF4

Prepared for

GuangZhou JieBao Technology Co.,Ltd

8th Floor,NO.1025,Gaopu Road,Tianhe District,
Guangzhou,Guangdong,China

Prepared by

Shenzhen POCE Technology Co.,Ltd.

Room 502, Bldg. 1, Xinghua Garden, Baoan Road Xixiang,
Baoan District,Shenzhen, China

TEST RESULT CERTIFICATION

Applicant's name : GuangZhou JieBao Technology Co.,Ltd

Address : 8th Floor,NO.1025,Gaopu Road,TianheDistrict,
Guangzhou,Guangdong,China

Manufacture's Name : GuangZhou JieBao Technology Co.,Ltd The First Branch

Address : NO.2,Floor 3,Building 3,NO.257,Junye Road,Economic And
Technological Development Zone,Guangzhou , Guangdong,China

Product description

Product name : Data Collector

Model and/or type reference : HT308A

Serial Model : N/A

Standards : FCC Part15.247

Test procedure ANSI C63.10-2013

This device described above has been tested by POCE, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of POCE, this document may be altered or revised by POCE, personal only, and shall be noted in the revision of the document.

Date of Test :

Date (s) of performance of tests : 1 Dec. 2016 ~17 Dec. 2016

Date of Issue : 17 Dec. 2016

Test Result : **Pass**

Testing Engineer : 

(Ken Li)

Technical Manager : 

(Jimmy Yao)

Authorized Signatory : 

(Terry Yang)

Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
3 . EMC EMISSION TEST	12
3.1 CONDUCTED EMISSION MEASUREMENT	12
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	12
3.1.2 TEST PROCEDURE	13
3.1.3 DEVIATION FROM TEST STANDARD	13
3.1.4 TEST SETUP	13
3.1.5 EUT OPERATING CONDITIONS	13
3.1.6 TEST RESULTS	14
3.2 RADIATED EMISSION MEASUREMENT	16
3.2.1 RADIATED EMISSION LIMITS	16
3.2.2 TEST PROCEDURE	17
3.2.3 DEVIATION FROM TEST STANDARD	17
3.2.4 TEST SETUP	18
3.2.5 EUT OPERATING CONDITIONS	19
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	20
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	21
3.2.8 TEST RESULTS (1G-26GHZ)	23
4 . POWER SPECTRAL DENSITY TEST	25
4.1 APPLIED PROCEDURES / LIMIT	25
4.1.1 TEST PROCEDURE	25
4.1.2 DEVIATION FROM STANDARD	25
4.1.3 TEST SETUP	25
4.1.4 EUT OPERATION CONDITIONS	25
4.1.5 TEST RESULTS	26
5 . BANDWIDTH TEST	28
5.1 APPLIED PROCEDURES / LIMIT	28
5.1.1 TEST PROCEDURE	28
5.1.2 DEVIATION FROM STANDARD	28
5.1.3 TEST SETUP	28

Table of Contents

	Page
5.1.4 EUT OPERATION CONDITIONS	28
5.1.5 TEST RESULTS	29
6 . PEAK OUTPUT POWER TEST	31
6.1 APPLIED PROCEDURES / LIMIT	31
6.1.1 TEST PROCEDURE	31
6.1.2 DEVIATION FROM STANDARD	31
6.1.3 TEST SETUP	31
6.1.4 EUT OPERATION CONDITIONS	31
6.1.5 TEST RESULTS	32
7 . ANTENNA REQUIREMENT	33
7.1 STANDARD REQUIREMENT	33
7.2 EUT ANTENNA	33
8. CONDUCTED SPURIOUS & BAND EDGE EMISSION	34
9 . EUT TEST PHOTO	38

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

1.1 TEST FACILITY

Shenzhen POCE Technology Co.,Ltd.

Add.: Room 502, Bldg. 1, Xinghua Garden, Baoan Road Xixiang, Baoan District, Shenzhen, China

FCC Registration No.: 222278

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %** .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Data Collector	
Trade Name	Jepower	
Model Name	HT308A	
Serial Model	N/A	
Model Difference	N/A	
Product Description	The EUT is a Data Collector	
	Operation Frequency:	2402~2480 MHz
	Modulation Type:	GFSK
	Bluetooth	Bluetooth 4.0
	Number Of Channel	40CH
	Antenna Designation:	Please see Note 3.
	Output Power(Peak):	-3.123dbm
Channel List	Please refer to the Note 2.	
Adapter	Input: AC 100-240V; 50/60Hz; 1.5A Output: DC 5V, 1A	
Battery	Model: HT380-A Capacity: 4000mAh Related Voltage: 3.8V	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	10	2422	20	2442	30	2462
01	2404	11	2424	21	2444	31	2464
02	2406	12	2426	22	2446	32	2466
03	2408	13	2428	23	2448	33	2468
04	2410	14	2430	24	2450	34	2470
05	2412	15	2432	25	2452	35	2472
06	2414	16	2434	26	2454	36	2474
07	2416	17	2436	27	2456	37	2476
08	2418	18	2438	28	2458	38	2478
09	2420	19	2440	29	2460	39	2480

3.

Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	FPCB	N/A	0	BT Antenna

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX 2402
Mode 2	TX 2440
Mode 3	TX 2480
Mode 4	Link Mode


For Conducted Emission	
Final Test Mode	Description
Mode 4	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	TX 2402
Mode 2	TX 2440
Mode 3	TX 2480

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

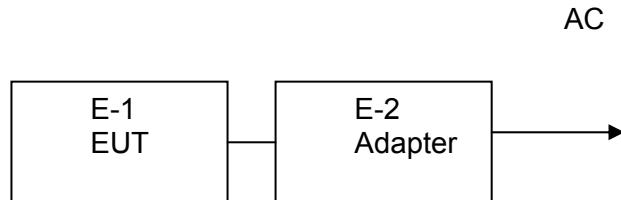

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Data Collector	Jepower	HT308A	N/A	EUT
E-2	Adapter	--			

Item	Shielded Type	Ferrite Core	Length	Note
C-1	USB Cable	NO	90cm	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY4510840	2016.07.06	2017.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2016.06.07	2017.06.06	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2015.07.06	2017.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2016.06.07	2017.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2016.06.07	2017.06.06	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	2016.07.06	2017.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2016.07.06	2017.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2015.12.22	2016.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2016.06.08	2017.06.07	1 year
10	Power Meter	R&S	NRVS	100696	2016.07.06	2017.07.05	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619.05	2016.07.06	2017.07.05	1 year

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2016.06.06	2017.06.05	1 year
2	LISN	R&S	ENV216	101313	2016.08.24	2017.08.23	1 year
3	LISN	EMCO	3816/2	00042990	2016.08.24	2017.08.23	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2016.06.07	2017.06.06	1 year
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2016.06.07	2017.06.06	1 year
6	Absorbing clamp	R&S	MOS-21	100423	2016.06.08	2017.06.07	1 year

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

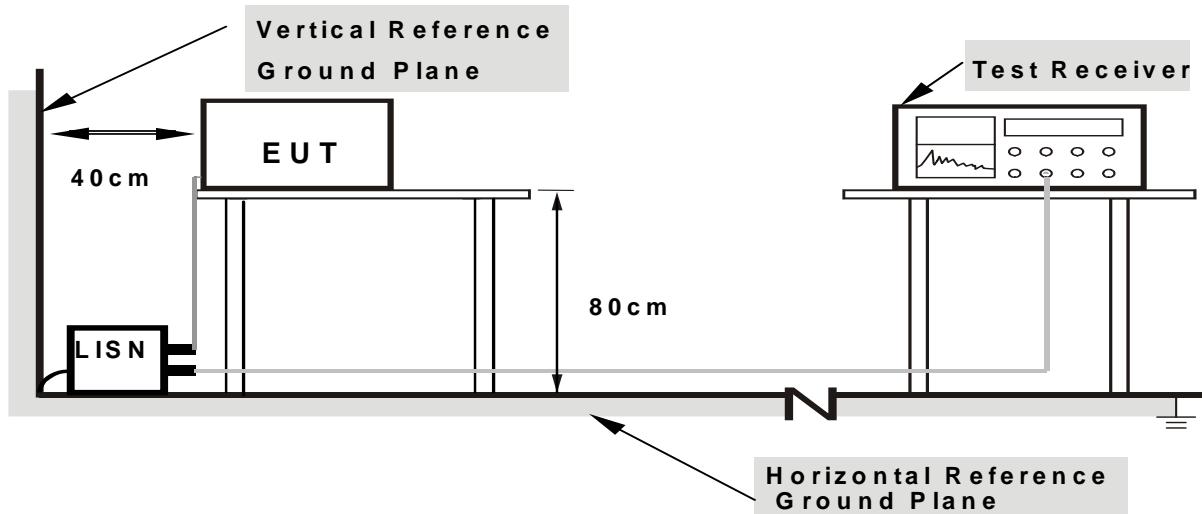

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


3.1.6 TEST RESULTS

EUT :	Data Collector	Model Name :	HT308A
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	AC120V/60Hz	Test Mode :	Mode 4

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V)	Limits (dB μ V)	Margin (dB)	Detector Type
0.634	38.91	10.13	49.04	56	-6.96	QP
0.634	21.32	10.13	31.45	46	-14.55	AVG
0.854	34.19	10.15	44.34	56	-11.66	QP
0.854	15.29	10.15	25.44	46	-20.56	AVG
1.414	34.07	10.17	44.24	56	-11.76	QP
1.414	14.31	10.17	24.48	46	-21.52	AVG
1.954	33.29	10.18	43.47	56	-12.53	QP
1.954	12.67	10.18	22.85	46	-23.15	AVG
2.946	13.67	10.19	23.86	46	-22.14	AVG
2.9539	31.82	10.19	42.01	56	-13.99	QP
10.626	39.5	10.13	49.63	60	-10.37	QP

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

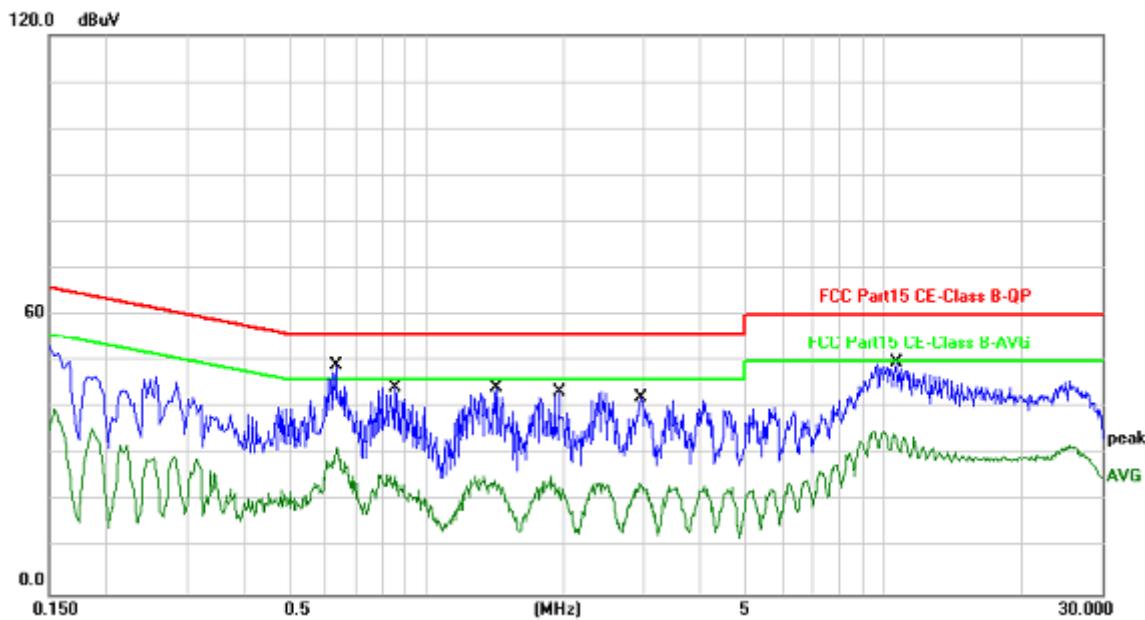


EUT :	Data Collector	Model Name. :	HT308A
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	AC120V/60Hz	Test Mode :	Mode 1

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V)	Limits (dB μ V)	Margin (dB)	Detector Type
0.634	40.77	10.13	50.9	56	-5.1	QP
0.634	27.31	10.13	37.44	46	-8.56	AVG
1.386	34.13	10.17	44.3	56	-11.7	QP
1.386	20.69	10.17	30.86	46	-15.14	AVG
1.842	33.83	10.18	44.01	56	-11.99	QP
1.842	21.01	10.18	31.19	46	-14.81	AVG
2.366	33.44	10.18	43.62	56	-12.38	QP
2.366	21.26	10.18	31.44	46	-14.56	AVG
10.162	40.7	10.12	50.82	60	-9.18	QP
10.162	29.22	10.12	39.34	50	-10.66	AVG
12.226	38.04	10.13	48.17	60	-11.83	QP
12.226	26.84	10.13	36.97	50	-13.03	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

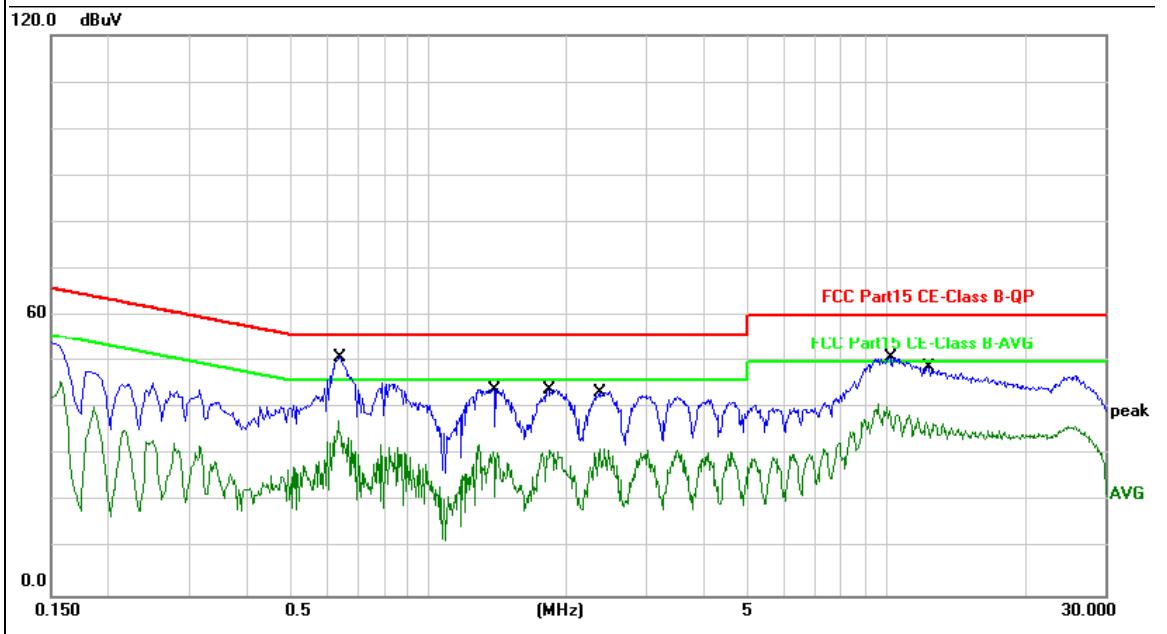

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3M)		Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

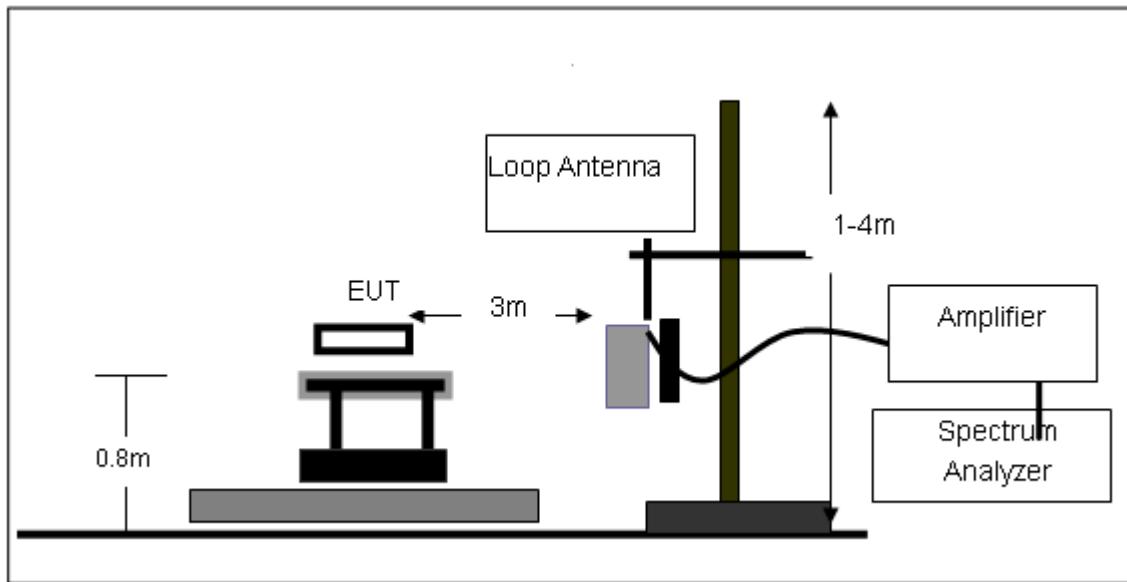

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

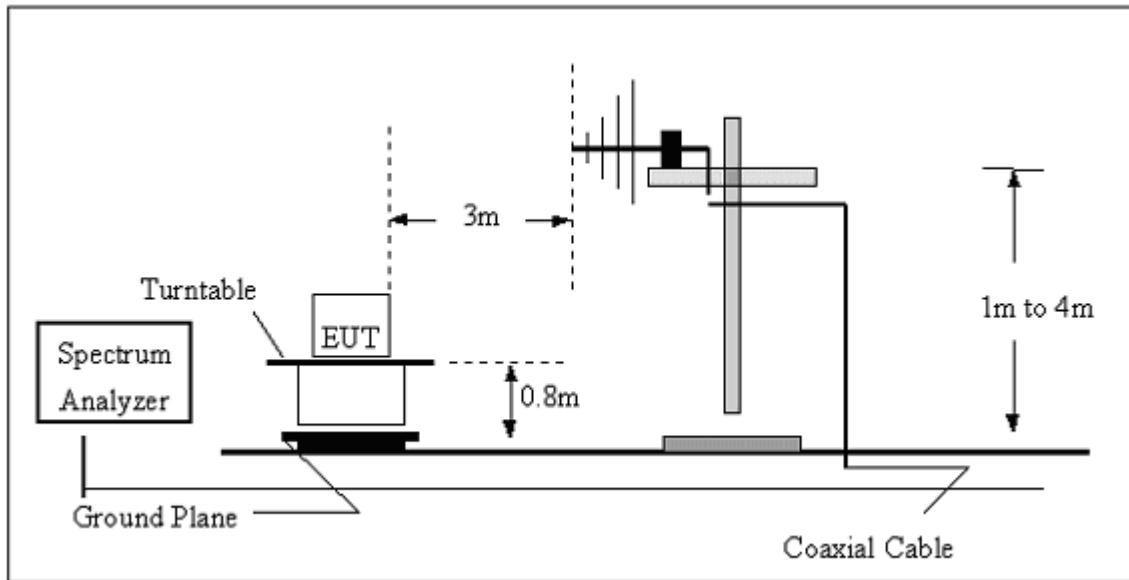

(C) Radiated Emission Test-Up Frequency Above 1GHz

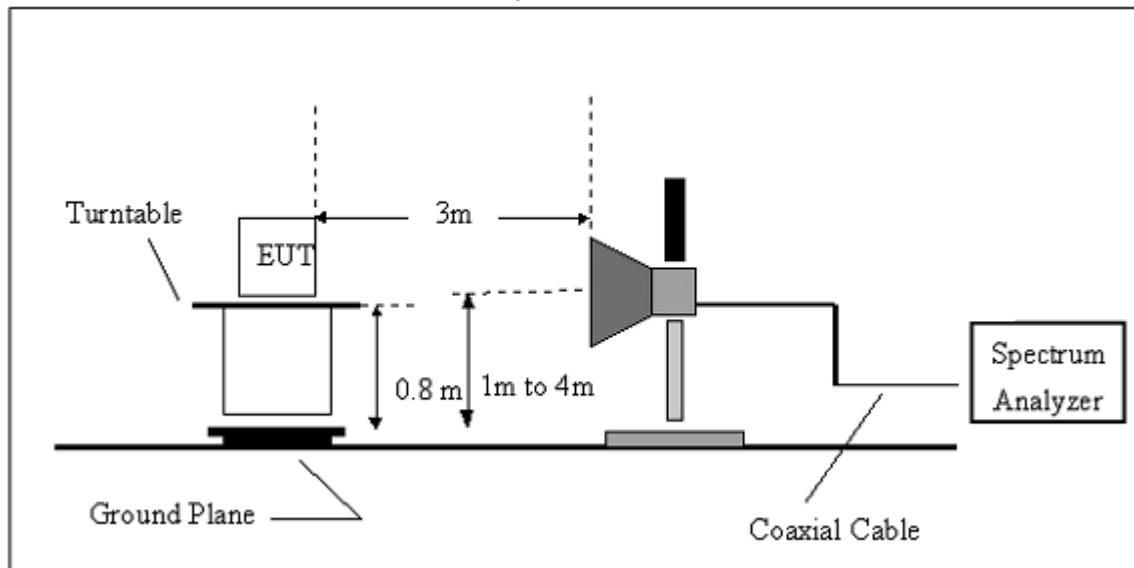**3.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)

EUT:	Data Collector	Model Name. :	HT308A
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC3.7V
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);
 Limit line = specific limits(dBuV) + distance extrapolation factor.


3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

EUT :	Data Collector	Model Name :	HT308A
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC3.7V
Test Mode :	Mode 2	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
83.8156	45.61	-18.13	27.48	40.00	-12.52	
119.8556	48.05	-14.72	33.33	43.50	-10.17	QP
239.9874	49.18	-14.49	34.69	46.00	-11.31	QP
300.3672	46.29	-12.57	33.72	46.00	-12.28	QP
801.7863	42.11	-2.49	39.62	46.00	-6.38	QP
962.1623	42.49	-0.42	42.07	54.00	-11.93	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.
All interfaces was connected, and BT TX mode was link.

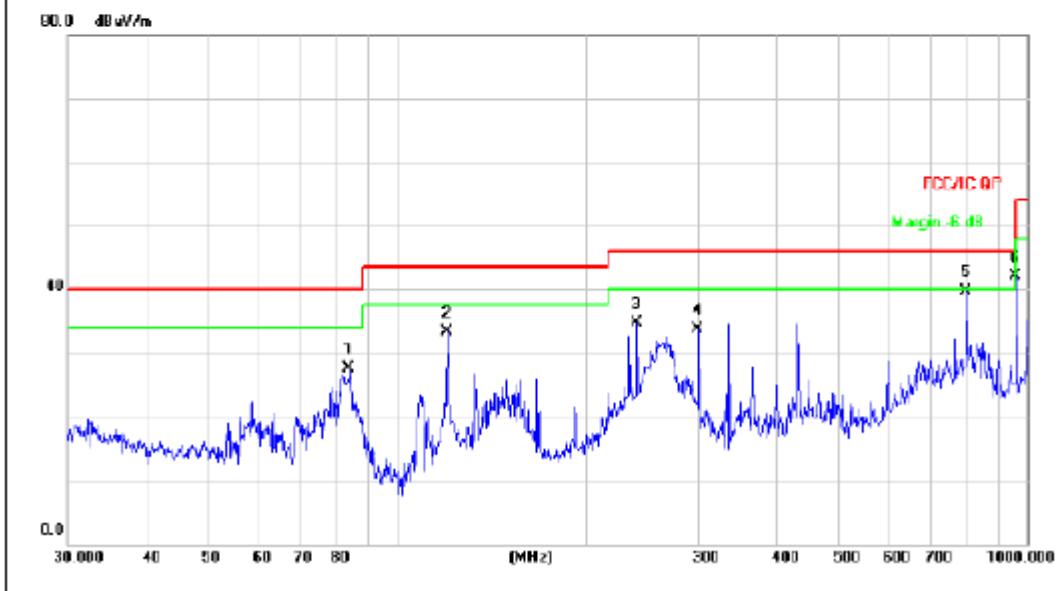


EUT :	Data Collector	Model Name :	HT308A
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC3.7V
Test Mode :	Mode 2	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
33.0950	45.64	-8.39	37.25	40.00	-2.75	
42.8998	44.31	-9.21	35.10	40.00	-4.90	QP
82.9385	54.08	-18.12	35.96	40.00	-4.04	QP
119.8556	50.80	-14.72	36.08	43.50	-7.42	QP
336.0352	47.52	-11.66	35.86	46.00	-10.14	QP
601.4265	43.66	-5.66	38.00	46.00	-8.00	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All interfaces was connected, and BT TX mode was link.

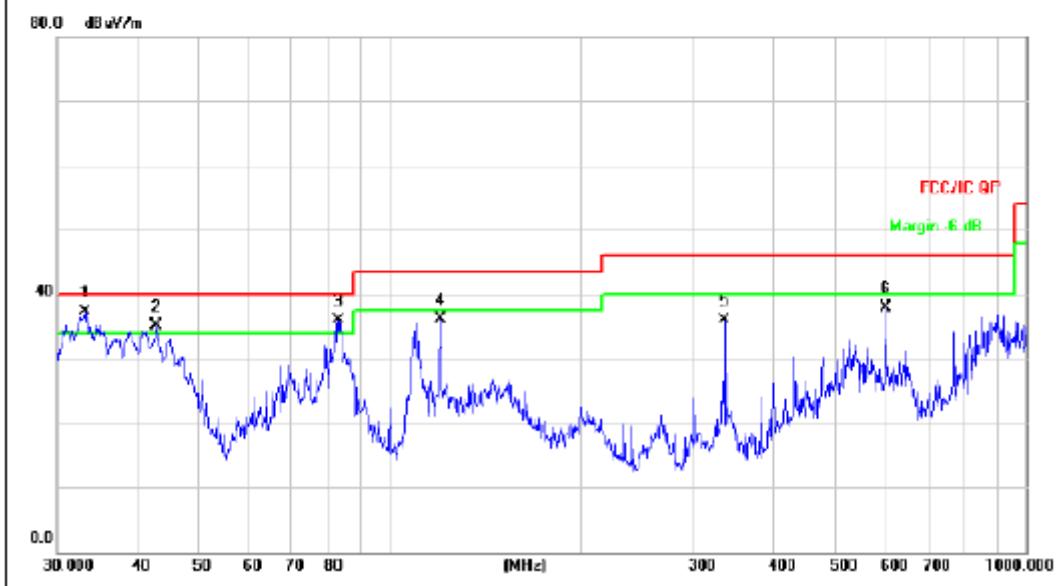

3.2.8 TEST RESULTS (1G-26GHZ)

EUT :	Data Collector		Model Name :		HT308A		
Temperature :	20 °C		Relative Humidity :		48%		
Pressure :	1010 hPa		Test Voltage :		DC3.7V		

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark	Comment
Low Channel (2402 MHz)-Above 1G							
4804.225	55.36	-3.64	59.00	74.00	-15.00	Pk	Vertical
4804.225	39.36	-3.64	43.00	54.00	-11.00	AV	Vertical
7206.177	60.25	-0.95	61.20	74.00	-12.80	Pk	Vertical
7206.177	41.36	-0.95	42.31	54.00	-11.69	AV	Vertical
4804.336	58.58	-3.64	62.22	74.00	-11.78	Pk	Horizontal
4804.336	41.69	-3.64	45.33	54.00	-8.67	AV	Horizontal
7206.258	57.15	-0.95	58.10	74.00	-15.90	Pk	Horizontal
7206.258	41.33	-0.95	42.28	54.00	-11.72	AV	Horizontal
Mid Channel (2441 MHz)-Above 1G							
4880.274	60.25	-3.68	63.93	74.00	-10.07	Pk	Vertical
4880.274	38.58	-3.68	42.26	54.00	-11.74	AV	Vertical
7320.175	58.58	-0.82	59.40	74.00	-14.60	Pk	Vertical
7320.175	41.25	-0.82	42.07	54.00	-11.93	AV	Vertical
4880.258	58.33	-3.68	62.01	74.00	-11.99	Pk	Horizontal
4880.258	41.02	-3.68	44.70	54.00	-9.30	AV	Horizontal
7320.102	57.36	-0.82	58.18	74.00	-15.82	Pk	Horizontal
7320.102	41.25	-0.82	42.07	54.00	-11.93	AV	Horizontal
High Channel (2480 MHz)- Above 1G							
4960.584	57.15	-3.59	60.74	74.00	-13.26	Pk	Vertical
4960.584	40.02	-3.59	43.61	54.00	-10.39	AV	Vertical
7440.299	57.33	-0.68	58.01	74.00	-15.99	Pk	Vertical
7440.299	39.33	-0.68	40.01	54.00	-13.99	AV	Vertical
4960.175	57.58	-3.59	61.17	74.00	-12.83	Pk	Horizontal
4960.175	39.66	-3.59	43.25	54.00	-10.75	AV	Horizontal
7440.332	61.02	-0.68	61.70	74.00	-12.30	Pk	Horizontal
7440.332	40.47	-0.68	41.15	54.00	-12.85	AV	Horizontal

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).

(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

(3)All other emissions more than 20dB below the limit.

EUT :	Data Collector	Model Name :	HT308A
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC3.7V

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type	Comment
1Mbps							
2329.29	62.43	-13.06	49.37	74	-24.63	Pk	Vertical
2329.29	56.57	-13.06	43.51	54	-10.49	AV	Vertical
2400	65.61	-13.06	52.55	74	-21.45	Pk	Vertical
2400	56.08	-13.06	43.02	54	-10.98	AV	Vertical
2380.8	62.31	-13.06	49.25	74	-24.75	Pk	Horizontal
2380.8	57.46	-13.06	44.4	54	-9.6	AV	Horizontal
2400	66.06	-13.06	53	74	-21	Pk	Horizontal
2400	56.89	-13.06	43.83	54	-10.17	AV	Horizontal
2483.5	63.14	-12.78	50.36	74	-23.64	Pk	Vertical
2483.5	62.66	-12.78	49.88	54	-4.12	AV	Vertical
2483.5	62.86	-12.78	50.08	74	-23.92	Pk	Horizontal
2483.5	62.52	-12.78	49.74	54	-4.26	AV	Horizontal

Note: (1) All other emissions more than 20dB below the limit.

4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW ≥ 3 kHz.
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP

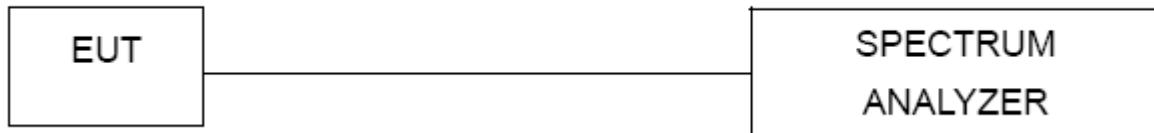


4.1.4 EUT OPERATION CONDITIONS



The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

4.1.5 TEST RESULTS

EUT :	Data Collector	Model Name :	HT308A
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC3.7V
Test Mode :	TX Mode /CH00, CH19, CH39		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2402 MHz	-21.78	8	PASS
2440 MHz	-21.25	8	PASS
2480 MHz	-21.32	8	PASS

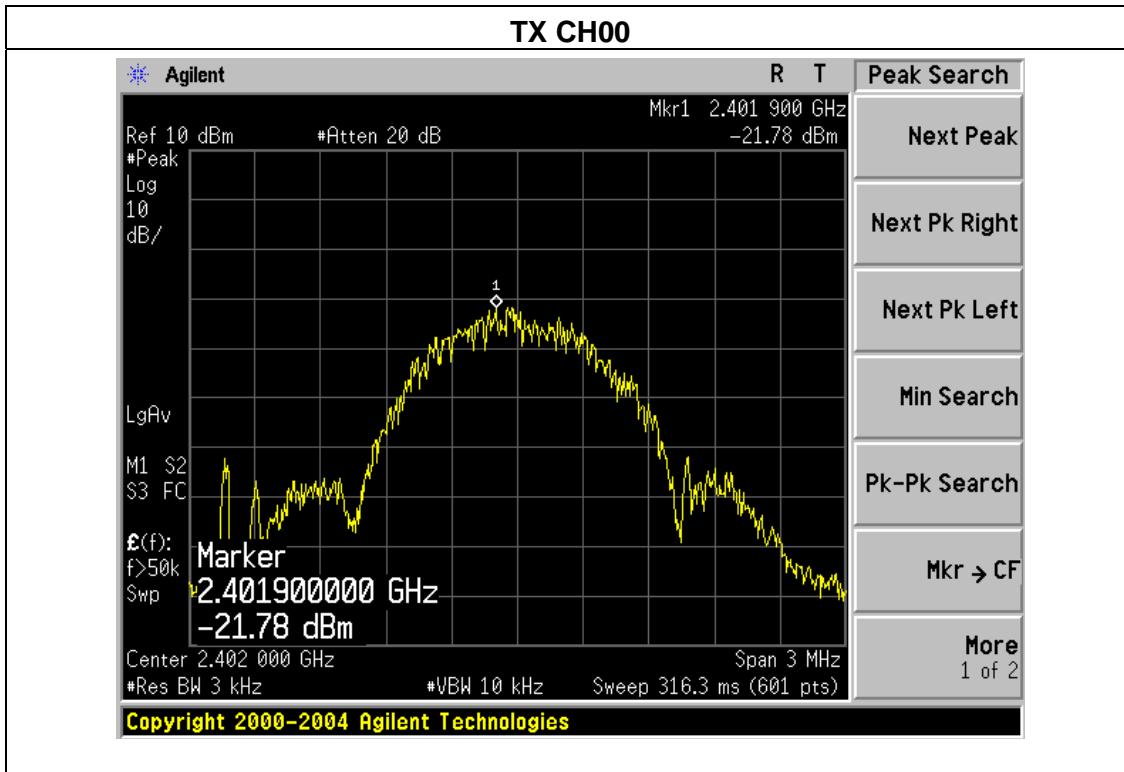

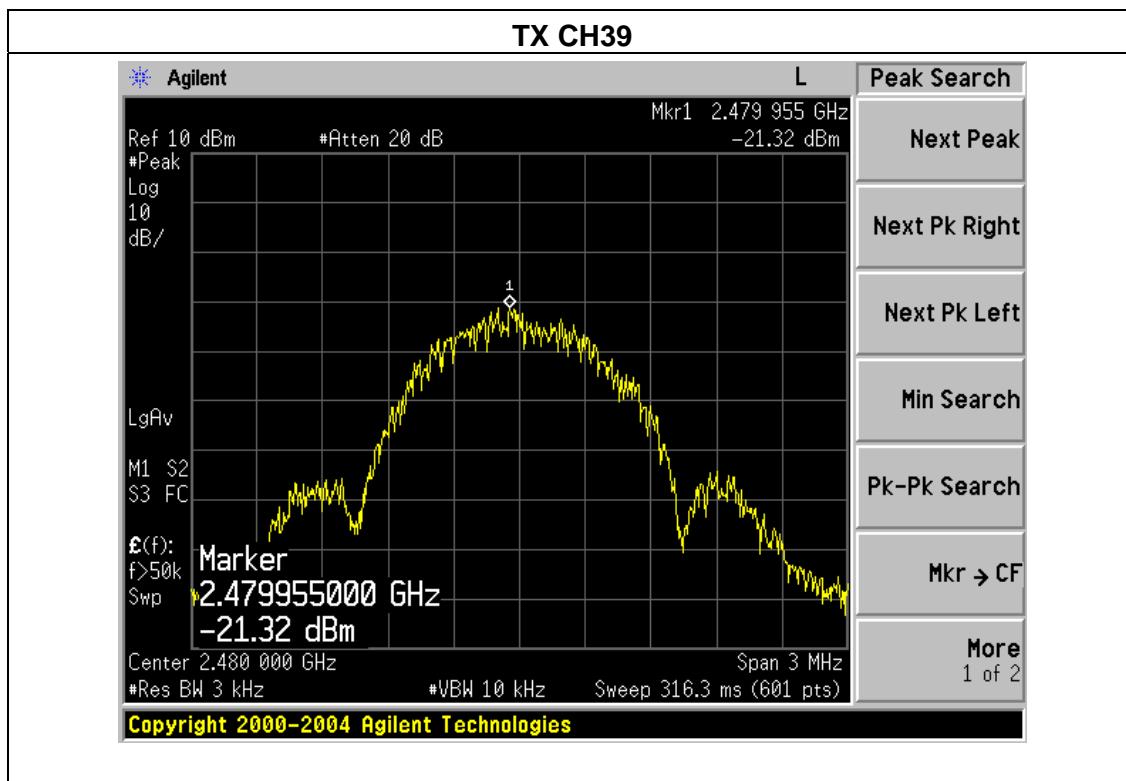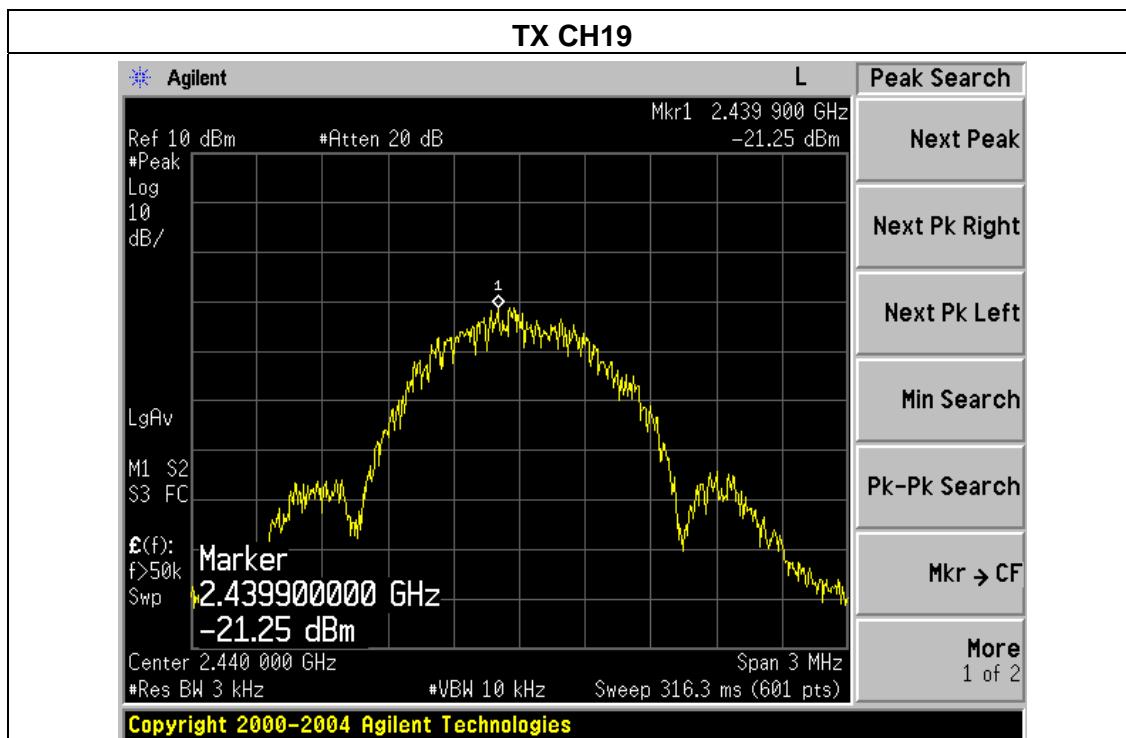

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP




5.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 TEST RESULTS

EUT :	Data Collector	Model Name :	HT308A
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC3.7V
Test Mode :	TX Mode/CH00, CH19, CH39		

Frequency	6dB Bandwidth (kHz)	Channel Separation (MHz)	Result
2402 MHz	681.816	>=500KHz	PASS
2440 MHz	706.845	>=500KHz	PASS
2480 MHz	668.542	>=500KHz	PASS

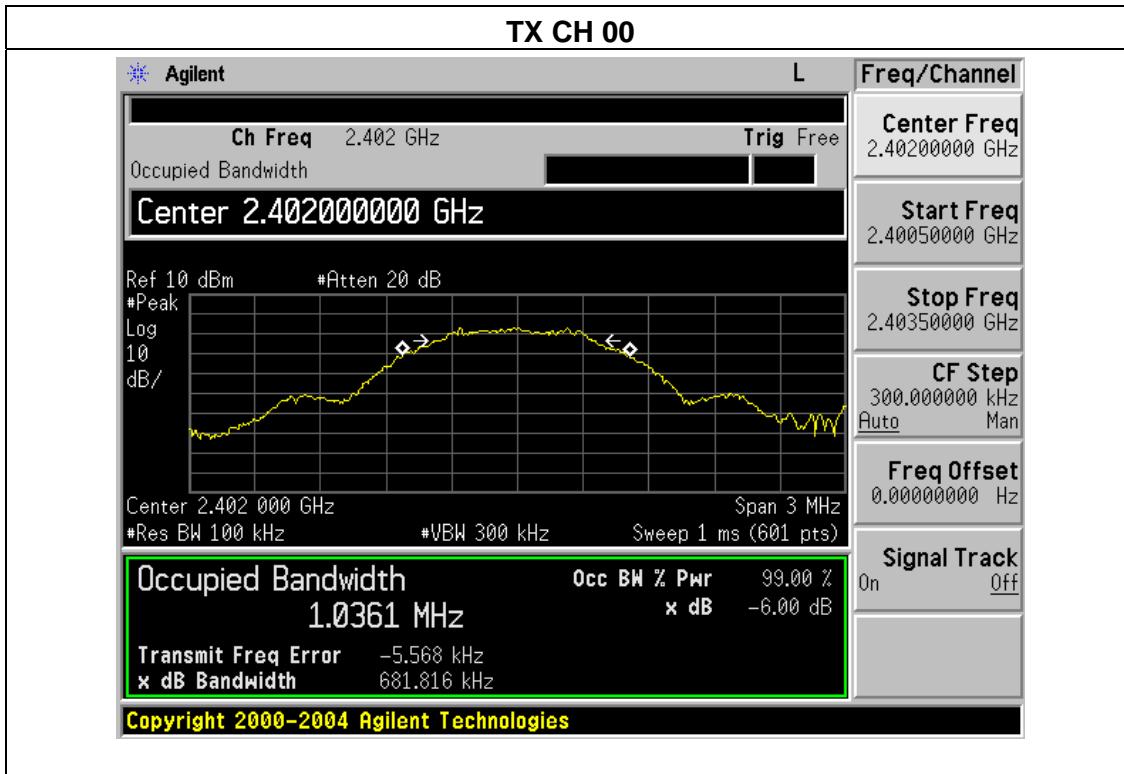

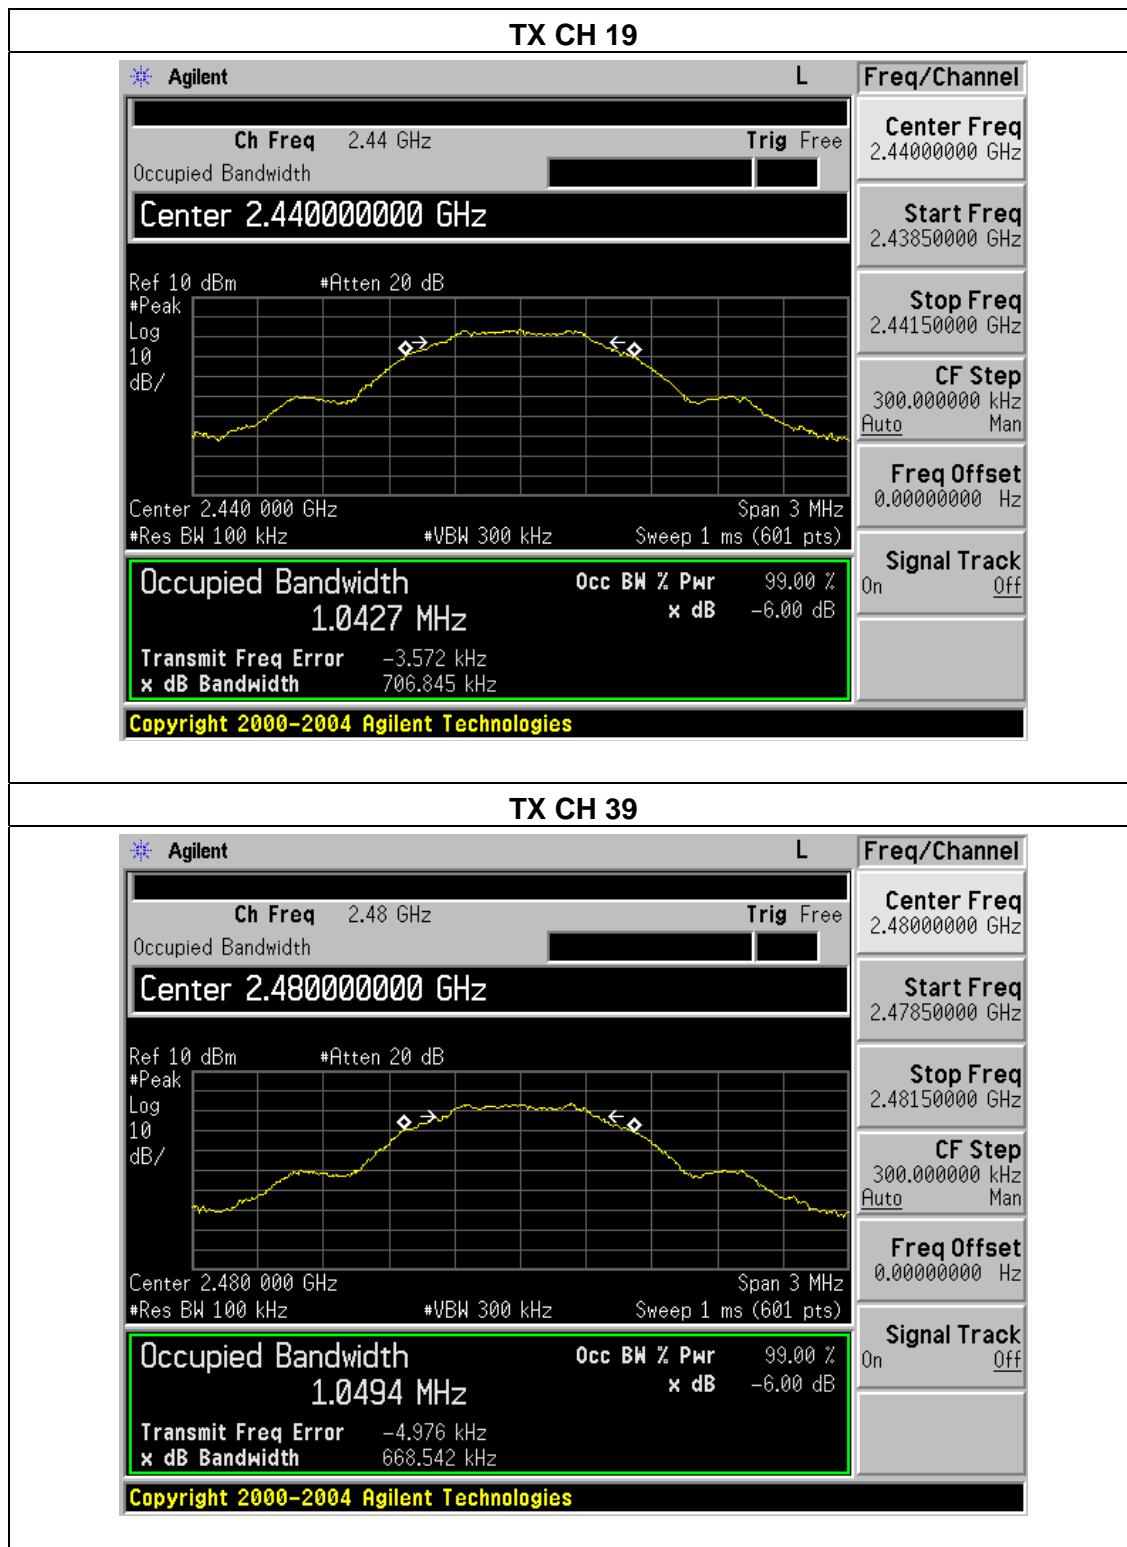

6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS


6.1.1 TEST PROCEDURE

- The EUT was directly connected to the Power meter

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

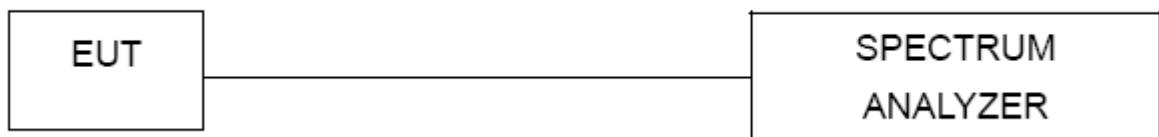

6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 TEST RESULTS

EUT :	Data Collector	Model Name :	HT308A
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC3.7V
Test Mode :	TX Mode /CH00, CH19, CH39		

1Mbps

Test Channel	Frequency (MHz)	Peak Output Power(dBm)	AV Output Power(dBm)	LIMIT (dBm)
CH00	2402	-3.123	-6.312	30
CH19	2440	-3.244	-6.421	30
CH39	2480	-3.422	-6.321	30

7. ANTENNA REQUIREMENT

7.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.2 EUT ANTENNA


The EUT antenna is FPCB Antenna. It comply with the standard requirement.

8. CONDUCTED SPURIOUS & BAND EDGE EMISSION

8.1 REQUIREMENT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

8.2 TEST SETUP


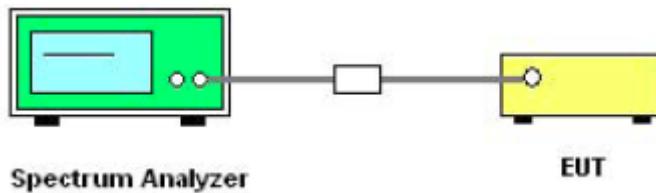


The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading. Make the measurement with the spectrum analyzer's resolution bandwidth(RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.


8.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



8.4. TEST RESULTS

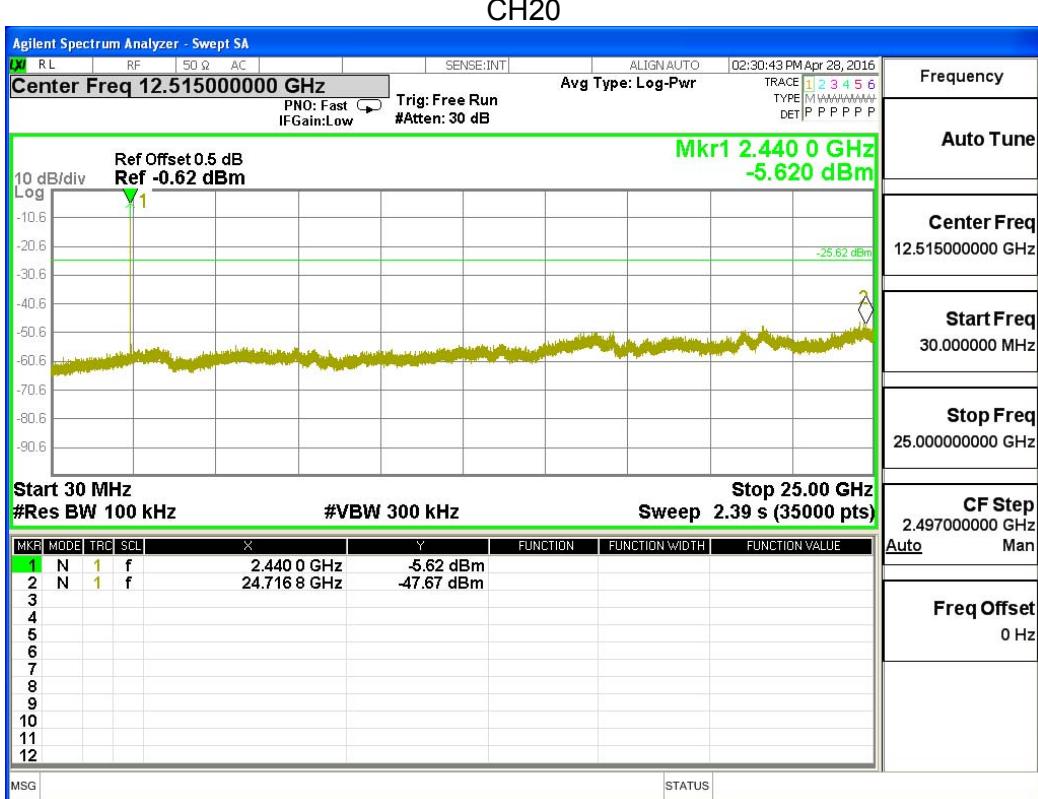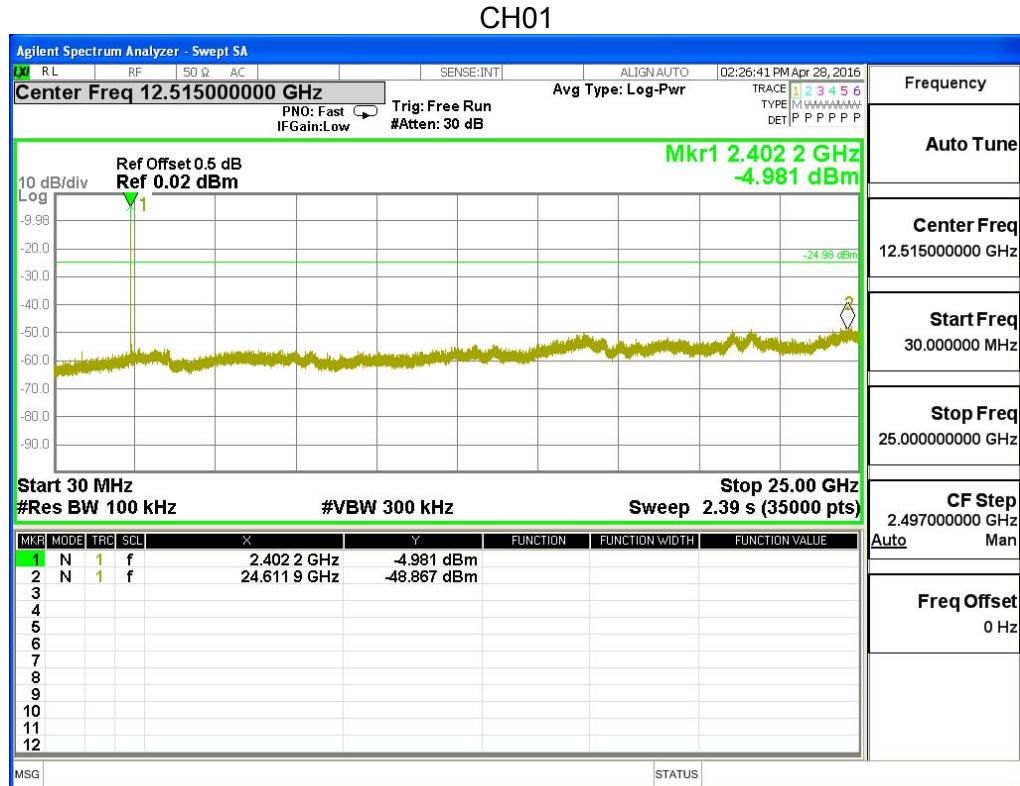

CH40

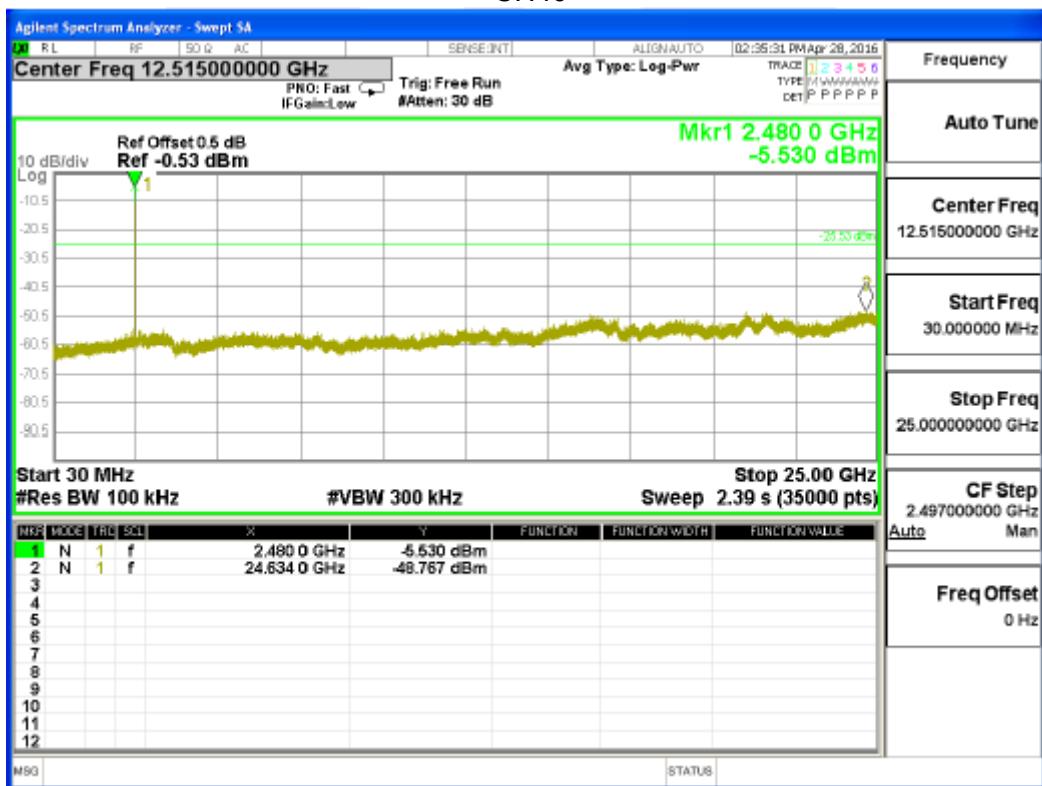


For Band edge:

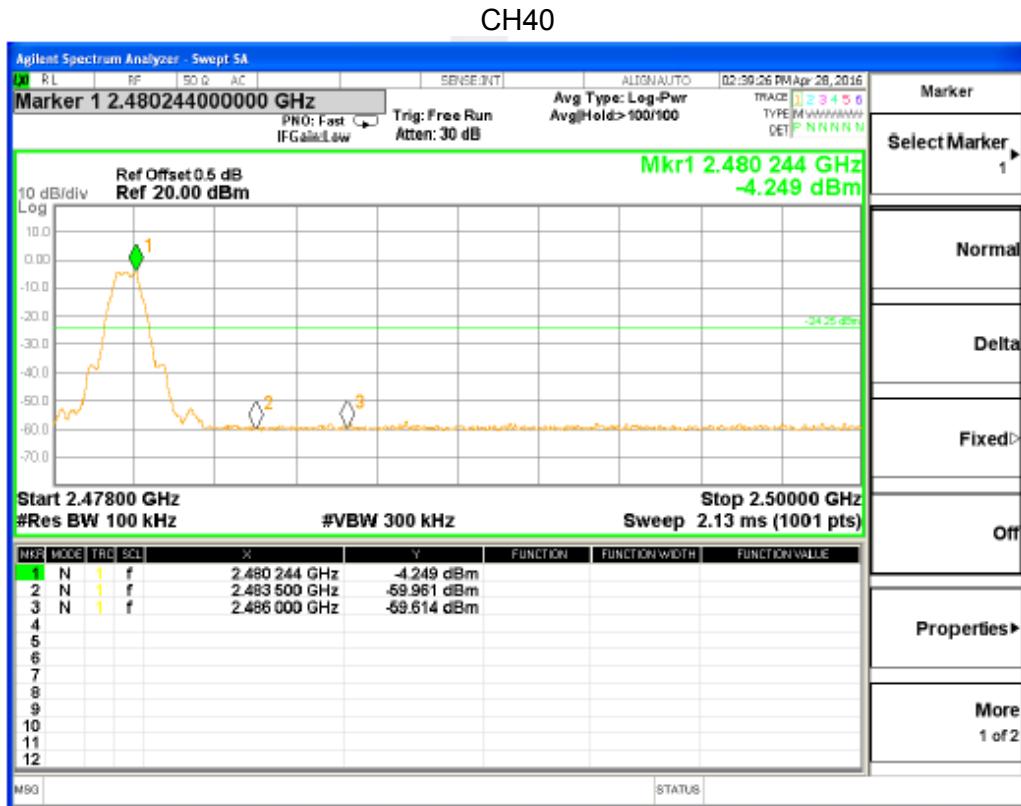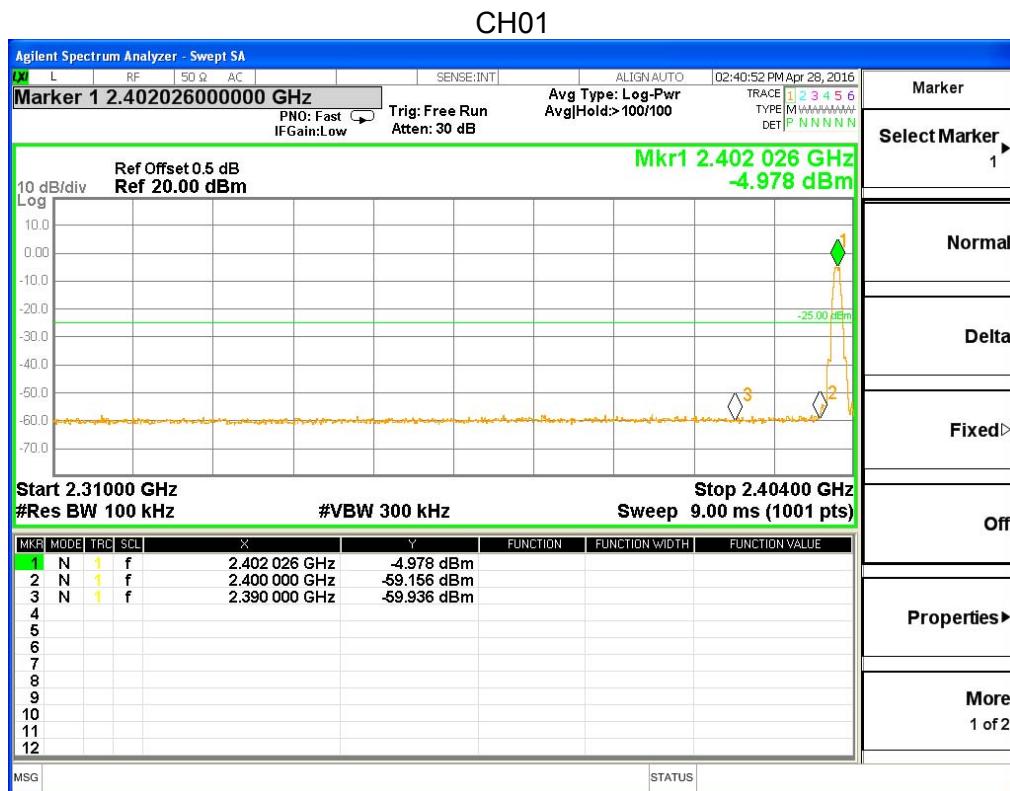

9. EUT TEST PHOTO

Radiated Measurement Photos

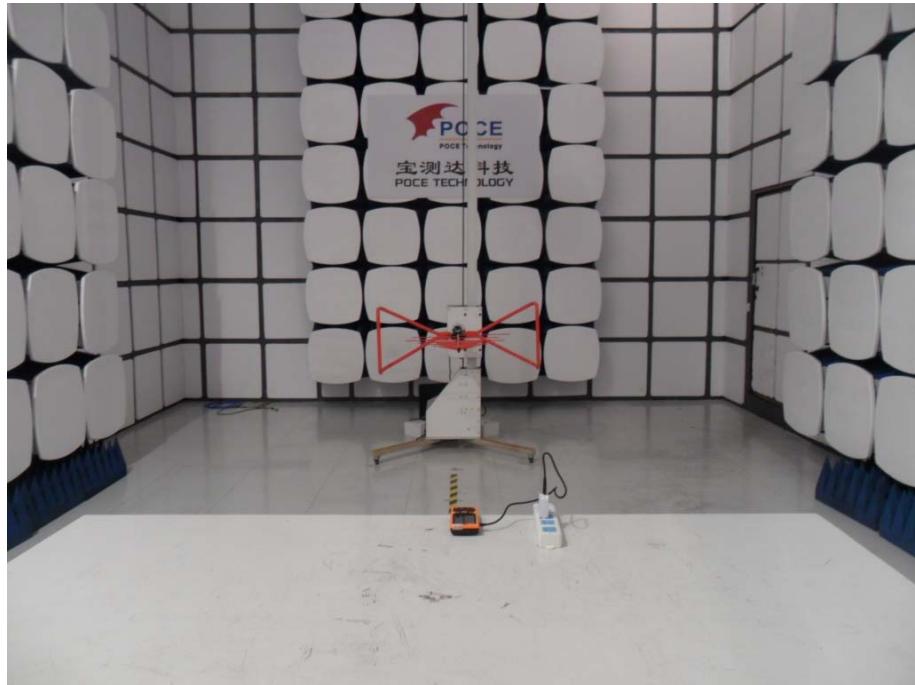

Conducted Emission

