

Test Report No. 7191147393-EEC16/07

dated 10 May 2018



PSB Singapore

Choose certainty.
Add value.

FORMAL REPORT ON TESTING IN ACCORDANCE WITH 47 CFR FCC Parts 15B & C OF A Sirius Contactless Transit Reader [Model : SR272B] [FCC ID : 2AKLKS272B]

TEST FACILITY

TÜV SÜD PSB Pte Ltd
Electrical & Electronics Centre (EEC), Product Services,
No. 1 Science Park Drive, Singapore 118221

FCC REG. NO.

994109 (Test Firm Registration Number)
SG0002 (Designation Number)

IND. CANADA REG. NO.

2932I-1 (3m and 10m Semi-Anechoic Chamber, Science Park)

PREPARED FOR

Land Transport Authority
71 Chai Chee Street,
Singapore 468981

QUOTATION NUMBER

2191045111

JOB NUMBER

7191147393

TEST PERIOD

19 Apr 2018 – 04 May 2018

PREPARED BY

Quek Keng Huat
Higher Associate Engineer

APPROVED BY

Foo Kai Maun
Assistant Manager



LA-2007-0380-A LA-2007-0384-G
LA-2007-0381-F LA-2007-0385-E
LA-2007-0382-B LA-2007-0386-C
LA-2007-0383-G LA-2010-0464-D

The results reported herein have been performed in accordance with the terms of accreditation under the Singapore Accreditation Council. Inspections/Calibrations/Tests marked "Not SAC-SINGLAS Accredited" in this Report are not included in the SAC-SINGLAS Accreditation Schedule for our inspection body/laboratory.

Laboratory:
TÜV SÜD PSB Pte. Ltd.
No.1 Science Park Drive
Singapore 118221

Phone : +65-6885 1333
Fax : +65-6776 8670
E-mail: enquiries@tuv-sud-psb.sg
www.tuv-sud-psb.sg
Co. Reg : 199002667R


Regional Head Office:
TÜV SÜD Asia Pacific Pte. Ltd.
1 Science Park Drive, #02-01
Singapore 118221



PSB Singapore

TABLE OF CONTENTS

TEST SUMMARY	3
PRODUCT DESCRIPTION	4
SUPPORTING EQUIPMENT DESCRIPTION.....	5
EUT OPERATING CONDITIONS.....	6
RADIATED EMISSION TEST.....	7
RADIATED EMISSION (FUNDAMENTAL) TEST	11
FREQUENCY STABILITY VERSUS TEMPERATURE TEST	14
FREQUENCY STABILITY VERSUS INPUT VOLTAGE TEST	16
ANNEX A TEST SETUP / EUT PHOTOGRAPHS / DIAGRAMS	19
ANNEX B USER MANUAL/TECHNICAL DESCRIPTION BLOCK & CIRCUIT DIAGRAMS.....	35
ANNEX C FCC LABEL & POSITION.....	36

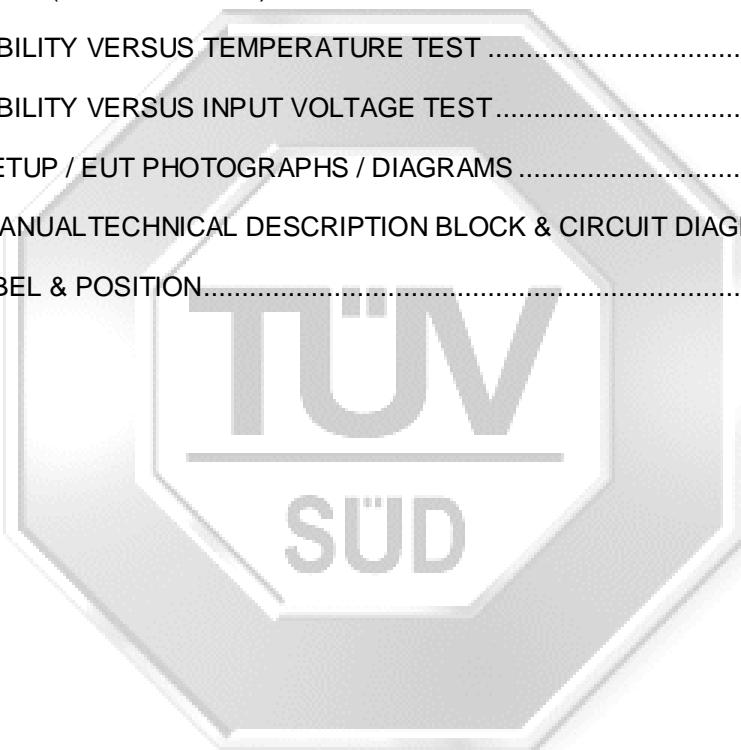

TEST SUMMARY

The product was tested in accordance with the customer's specifications.

Test Results Summary

Test Standard	Description	Pass / Fail
47 CFR FCC Part 15		
15.107(a), 15.207	Conducted Emissions	Not Applicable *See Note 4
15.109(a), 15.205, 15.209, 15.225(d)	Radiated Emissions (Spurious Emissions inclusive Restricted Bands Requirement)	Pass
15.225(a)	Radiated Emissions (Fundamental) (applicable if EUT's carrier is in 13.553 -13.567MHz)	Pass
15.225(b)	Radiated Emissions (Fundamental) (applicable if EUT's carrier is in 13.410 -13.553MHz or / and 13.567-13.710MHz)	Not Applicable *See Note 1
15.225(c)	Radiated Emissions (Fundamental) (applicable if EUT's carrier is in 13.110 -13.410MHz or / and 13.710-14.010MHz)	Not Applicable *See Note 1
15.225(e)	Frequency Stability Versus Temperature	Pass
15.225(e)	Frequency Stability Versus Input Voltage	Pass

Notes

1. The Equipment Under Test (EUT) was configured and tested to operate at 13.56MHz.
2. The EUT is a Class B device when in non-transmitting state and meets the 47 CFR FCC Part15B Class B requirements.
3. All test measurement procedures are according to ANSI C63.4: 2014 and ANSI C63.10: 2013.
4. The Equipment Under Test (EUT) is a DC operated device and contains no provision for public utility connections.

Modifications

No modifications were made.



PSB Singapore

PRODUCT DESCRIPTION


Description	: The Equipment Under Test (EUT) is a Sirius Contactless Transit Reader .
Applicant	: Land Transport Authority 71 Chai Chee Street, Singapore 468981
Manufacturer	: STYL Solutions Pte Ltd, 81 Ubi Avenue 4 #05-07, Singapore 408830
Factory	: EASTOOL INDUSTRIES SDN. BHD. No 6, 7 & 8, Jalan Gangsa 3, Desa Perindustrian Kulai 2, Kelapa Sawit, 81030 Kulai, Johor, Malaysia
FCC ID	: 2AKLKS272B
Model Number(s)	: SR72B
Serial Number(s)	: Nil
Microprocessor(s)	: Freescale iMX6D, Maxim MAX32550, NXP PN5180
Operating Frequency	: 13.56MHz
Clock / Oscillator Frequency	: 24MHz, 12MHz, 27.12MHz
Modulation	: Amplitude Shift Keying (ASK)
Antenna Gain	: Refer to manufacturer's user manual / operating manual
Port / Connectors	: Refer to manufacturer's user manual / operating manual
Rated Input Power	: 12Vdc
Accessories	: Refer to manufacturer's user manual / operating manual



PSB Singapore

SUPPORTING EQUIPMENT DESCRIPTION

Equipment Description (Including Brand Name)	Model, Serial & FCC ID Number	Cable Description (List Length, Type & Purpose)
Lenovo Ideapad 310-15IKB Laptop	M/N: 80TV S/N: PF0P8DLD FCC ID: DoC	
Lenovo AC Adapter	M/N: ADLX65CCGK2A S/N: 8SSA10M42735C1SG6A807 FCC ID: DoC	1.80m unshielded power cable
Unbranded USB to RS232 Converter	M/N: Unbranded S/N: U5017959 FCC ID: DoC	0.50m unshielded USB cable
Ten Pao Group Holdings Limited Switching Power Supply	M/N: S030ABM1200250 S/N: Nil FCC ID: DoC	1.50m unshielded power cable

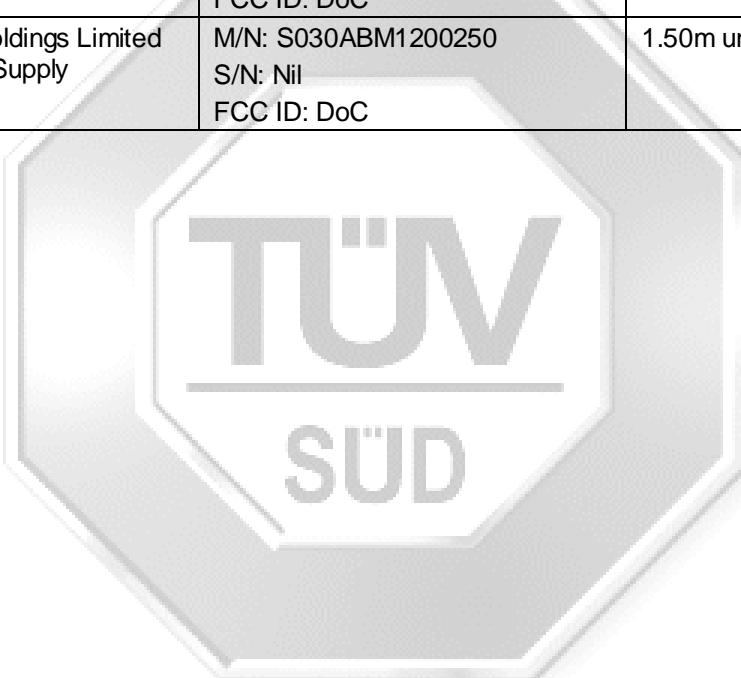



PSB Singapore

EUT OPERATING CONDITIONS

47 CFR FCC Part 15

1. Radiated Emissions (Spurious Emissions inclusive Restricted Bands Requirement)
2. Radiated Emissions (Fundamental)
3. Frequency Stability Versus Temperature
4. Frequency Stability Versus Input Voltage

The EUT was exercised by operating in maximum continuous transmission in test mode, i.e transmitting at 13.56MHz continuously.



RADIATED EMISSION TEST

47 CFR FCC Part 15.205 Restricted Bands

MHz	MHz	MHz	GHz
0.090	-	0.110	4.5
0.495	-	0.505	5.35
2.1735	-	2.1905	7.25
4.125	-	4.128	8.025
4.17725	-	4.17775	9.0
4.20725	-	4.20775	9.3
6.215	-	6.218	10.6
6.26775	-	6.26825	13.25
6.31175	-	6.31225	14.47
8.291	-	8.294	15.35
8.362	-	8.366	17.7
8.37625	-	8.38675	22.01
8.41425	-	8.41475	23.6
12.29	-	12.293	31.2
12.51975	-	12.52025	36.43
12.57675	-	12.57725	Above 38.6
13.36	-	13.41	

47 CFR FCC Parts 15.109(a), 15.209 and 15.225(d) Radiated Emission Limits

Frequency Range (MHz)	Quasi-Peak Limit Values (dBμV/m)
0.009 - 0.490	20 log [2400 / F (kHz)] @ 300m
0.490 - 1.705	20 log [24000 / F (kHz)] @ 30m
1.705 - 30.0	30.0 @ 30m
30 - 88	40.0 @ 3m
88 - 216	43.5 @ 3m
216 - 960	46.0 @ 3m
Above 960	54.0* @ 3m

* For frequency bands 9kHz – 90kHz, 110kHz – 490kHz and above 1GHz, average detector was used. A peak limit of 20dB above the average limit does apply.

47 CFR FCC Parts 15.109(a), 15.209 and 15.225(d) Radiated Emission Test Instrumentation

Instrument	Model	S/No	Cal Due Date
R&S Test Receiver – ESI1	ESI40	100010	25 Oct 2018
Com-Power Preamplifier(1MHz-1GHz)	PAM-103	441158	22 Sep 2018
Schaffner Bilog Antenna –(30MHz-2GHz)	CBL6112B	2597	20 Feb 2019
EMCO Loop Ant (ext)_red_00134413	6502	134413	28 Oct 2018

RADIATED EMISSION TEST

47 CFR FCC Parts 15.109(a), 15.209 and 15.225(d) Radiated Emission Test Setup

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table for measurement up to 1GHz. For measurement above 1GHz, 1.5m height table was used.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

47 CFR FCC Parts 15.109(a), 15.209 and 5.225(d) Radiated Emission Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A prescan was carried out to pick the worst emission frequencies from the EUT. For EUT which is a portable device, the prescan was carried out by rotating the EUT through three orthogonal axes to determine which altitude and equipment arrangement produces such emissions.
3. The test was carried out at the selected frequency points obtained from the prescan in step 2. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
 - a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
 - b. The EUT was then rotated to the direction that gave the maximum emission.
 - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
4. A Quasi-peak measurement was made for that frequency point if it was less than or equal to 1GHz. For frequency point in the range of 9kHz – 90kHz, 110kHz – 490kHz and above 1GHz, both Peak and Average measurements were carried out.
5. Steps 3 and 4 were repeated for the next frequency point, until all selected frequency points were measured.
6. The frequency range covered was from the lowest radio frequency signal generated from the EUT, without going below 9kHz to 10th harmonics of the EUT fundamental frequency, using the loop antenna for frequency below 30MHz, Bi-log antenna for frequencies from 30MHz up to 1GHz, and the Horn antenna above 1GHz.

Sample Calculation Example

At 300 MHz

Q-P limit = 46.0 dB μ V/m

Log-periodic antenna factor & cable loss at 300 MHz = 18.5 dB

Q-P reading obtained directly from EMI Receiver = 40.0 dB μ V/m
(Calibrated level including antenna factors & cable losses)

Therefore, Q-P margin = 46.0 - 40.0 = 6.0

i.e. 6.0 dB below Q-P limit



PSB Singapore

RADIATED EMISSION TEST

47 CFR FCC Parts 15.109(a), 15.205, 15.209 and 15.225(d) Radiated Emission Results

Test Input Power	12Vdc	Temperature	24°C
Test Distance	10m (<30MHz) 3m (≥30MHz – 1GHz)	Relative Humidity	55%
		Atmospheric Pressure	1030mbar
		Tested By	Dylan Lin

Spurious Emissions ranging from 9kHz – 30MHz (for 9kHz – 90kHz, 110kHz – 490kHz) *See Note 2 & 3

Freq (GHz)	Peak Value (dB μ V/m)	Peak Limit (dB μ V/m)	Peak Margin (dB)	AV Value (dB μ V/m)	AV Limit (dB μ V/m)	AV Margin (dB)	Height (cm)	Azimuth (Degrees)
0.0240	57.7	147.4	89.7	46.4	127.4	81.0	120	141
0.0400	51.8	146.3	94.5	42.2	126.3	84.1	120	80
0.0600	48.2	144.8	96.6	38.5	124.8	86.3	120	142
0.0850	45.8	143.1	97.3	35.7	123.1	87.4	120	124
0.4530	50.6	116.5	65.9	39.6	96.5	56.9	120	136
-	-	-	-	-	-	-	-	-

Spurious Emissions ranging from 9kHz – 30MHz *See Note 2 & 3

Frequency (MHz)	Q-P Value (dB μ V/m)	Q-P Limit (dB μ V/m)	Q-P Margin (dB)	Height (cm)	Azimuth (Degrees)
0.0940	38.3	122.4	84.1	120	124
0.5090	42.5	73.6	31.1	120	123
6.4370	18.6	70.0	51.4	120	12
7.1550	17.6	70.0	52.4	120	231
22.6260	17.5	70.0	52.5	120	70
-	-	-	-	-	-

Spurious Emissions ranging from 30MHz – 1GHz

Frequency (MHz)	Q-P Value (dB μ V/m)	Q-P Limit (dB μ V/m)	Q-P Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)
40.7690	29.8	40.0	10.2	100	352	V
49.5830	34.7	40.0	5.3	114	62	V
85.3720	34.5	40.0	5.5	100	226	V
94.2230	35.4	43.5	8.1	100	113	V
384.0300	35.1	46.0	10.9	100	146	H
408.0500	39.6	46.0	6.4	101	15	H

RADIATED EMISSION TEST

Notes

1. All possible modes of operation were investigated. Only the worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. A closer test distance of 10m was used for the measurement instead of 30m as the fundamental (carrier) electric field strength of the EUT at the 10m distance shows compliance to the limit of 30m test distance.
3. The measurement was done at 10m. The measured results were extrapolated to the specified test limits as specified in § 15.209 (a) based on 40dB/decade.
4. “--” indicates no emissions were found and shows compliance to the limits.
5. Quasi-peak measurement was used for frequency measurement up to 1GHz. Average and peak measurements were used for emissions above 1GHz. The average measurement was done by averaging over a complete cycle of the pulse train, including the blanking interval as the pulse train duration does not exceed 0.1 second.
6. A "positive" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency. Conversely, a “negative” margin indicates a FAIL.
7. EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:

9kHz - 150kHz

RBW: 100Hz VBW: 300Hz

150kHz - 30MHz

RBW: 10kHz VBW: 30kHz

30MHz - 1GHz

RBW: 120kHz VBW: 1MHz

>1GHz

RBW: 1MHz VBW: 3MHz

8. The upper frequency of radiated emission investigations was according to requirements stated in Section 15.33(a) for intentional radiators & Section 15.33(b) for unintentional radiators.
9. The channel in the table refers to the transmit channel of the EUT.

Radiated Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 30MHz – 1GHz is ± 3.8 dB and >1GHz – 40GHz is ± 4.5 dB.



PSB Singapore


RADIATED EMISSION (FUNDAMENTAL) TEST

47 CFR FCC Parts 15.225(a), 15.225(b) and 15.225(c) Radiated Emission (Fundamental) Limits

Fundamental Frequency (MHz)	Field Strength of Fundamental Limit Values @ 30m (dB μ V/m)
13.553 - 13.567	84.0
13.410 - 13.553	50.5
13.567 - 13.710	50.5
13.110 - 13.410	40.5
13.710 - 14.010	40.5

47 CFR FCC Parts 15.225(a), 15.225(b) and 15.225(c) Radiated Emission (Fundamental) Test Instrumentation

Instrument	Model	S/No	Cal Due Date
R&S Test Receiver – ESI1	ESI40	100010	25 Oct 2018
EMCO Loop Ant (ext)_red_00134413	6502	134413	28 Oct 2018

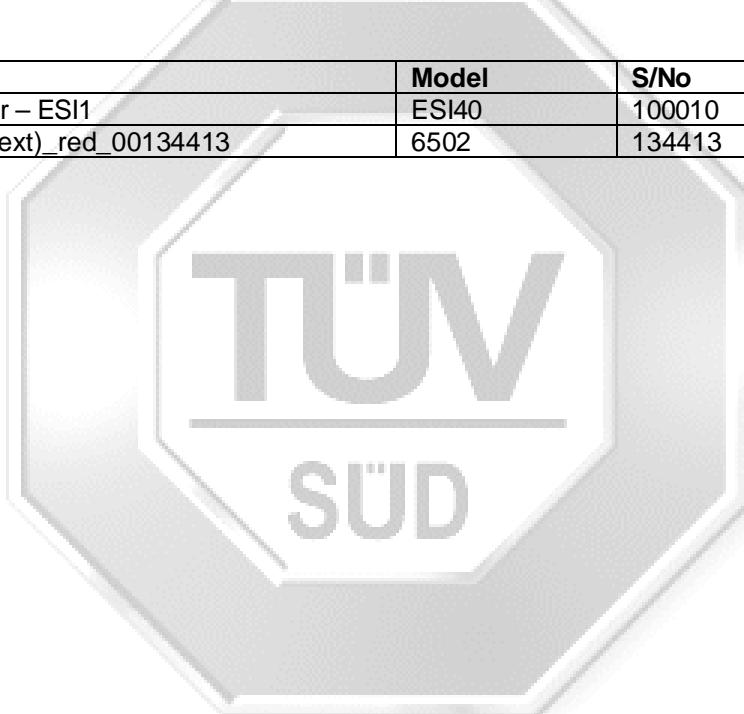



RADIATED EMISSION (FUNDAMENTAL) TEST

47 CFR FCC Parts 15.225(a), 15.225(b) and 15.225(c) Radiated Emission (Fundamental) Test Setup

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table for measurement up to 1GHz. For measurement above 1GHz, 1.5m height table was used.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

47 CFR FCC Parts 15.225(a), 15.225(b) and 15.225(c) Radiated Emission (Fundamental) Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A prescan was carried out to pick the fundamental frequency from the EUT. For EUT which is a portable device, the prescan was carried out by rotating the EUT through three orthogonal axes to determine which altitude and equipment arrangement produces such emissions.
3. The test was carried out at the selected frequency points obtained from the prescan in step 2. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
 - a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
 - b. The EUT was then rotated to the direction that gave the maximum emission.
 - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
4. A Quasi-peak measurement was made for that frequency point if it was less than or equal to 1GHz. For frequency point that above 1GHz, both Peak and Average measurements were carried out.
5. Steps 3 and 4 were repeated for the next frequency point, until all selected frequency points were measured.

Sample Calculation Example

At 300 MHz

Q-P limit = 46.0 dB μ V/m

Log-periodic antenna factor & cable loss at 300 MHz = 18.5 dB

Q-P reading obtained directly from EMI Receiver = 40.0 dB μ V/m
(Calibrated level including antenna factors & cable losses)

Therefore, Q-P margin = 46.0 - 40.0 = 6.0

i.e. 6.0 dB below Q-P limit



PSB Singapore

RADIATED EMISSION (FUNDAMENTAL) TEST

47 CFR FCC Part 15.225(a / b / c) Radiated Emission (Fundamental) Results

Test Input Power	12Vdc	Temperature	24°C
Test Distance	10m *see Note 2	Relative Humidity	55%
		Atmospheric Pressure	1030mbar
		Tested By	Dylan Lin

Frequency (MHz)	Q-P Value (dB μ V/m)	Q-P Limit (dB μ V/m)	Q-P Margin (dB)	Height (cm)	Azimuth (Degrees)
13.3530	29.7	84.0	10.8	120	189

Notes

1. All possible modes of operation were investigated. Only the worst case emissions measured, using the average and peak detectors, are reported. All other emissions were relatively insignificant.
2. A closer test distance of 10m was used for the measurement instead of 30m as the fundamental (carrier) electric field strength of the EUT at the 10m distance shows compliance to the limit of 30m test distance.
3. A "positive" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency. Conversely, a "negative" margin indicates a FAIL.
4. EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:
150kHz - 30MHz
RBW: 10kHz VBW: 30kHz
30MHz - 1GHz
RBW: 120kHz VBW: 1MHz
>1GHz
RBW: 1MHz VBW: 3MHz
5. Radiated Emissions (Fundamental) Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 30MHz – 25GHz is ± 4.0 dB.

FREQUENCY STABILITY VERSUS TEMPERATURE TEST

47 CFR FCC Part 15.225(e) Frequency Stability Versus Temperature Limits

The EUT shows compliance to the requirements of this section, which states that the frequency tolerance of the carrier frequency shall be $\pm 0.01\%$ for a temperature variation of -20°C to $+50^{\circ}\text{C}$ at normal supply voltage.

47 CFR FCC Part 15.225(e) Frequency Stability Versus Temperature Test Instrumentation

Instrument	Model	S/No	Cal Due Date
HP Universal Counter	53132A	3736A06236	05 Oct 2018
Agilent DC Power Supply	E3620A	MY40000448	Output Monitor
Cincinnati Sub-Zero Products, INC. Temperature & Humidity Chamber	ZH-8-1-1-H/AC	ZF9722653	28 Dec 2018

47 CFR FCC Part 15.225(e) Frequency Stability Versus Temperature Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo. The EUT was placed in an environmental temperature chamber with a nominal supply voltage. For the battery operated EUT, a new battery was used.
2. The RF antenna connector of the EUT was connected to the frequency counter via a low-loss coaxial cable.

47 CFR FCC Part 15.225(e) Frequency Stability Versus Temperature Test Method

1. The EUT was switched off and the environmental temperature was set to the highest temperature, i.e, $+50^{\circ}\text{C}$.
2. Upon reaching the highest set temperature with 30 minutes of stabilisation period, the EUT was switched on and configured to operate in the test mode with transmitting frequency at 13.56MHz.
3. The EUT's transmitting frequency was then measured at start up, and two, five and ten minutes after start up with the frequency counter until no further changes were observed. Four measurements were made in total.
4. The EUT was switched off. The environmental chamber temperature was lowered by 10°C and was allowed the temperature inside the chamber to stabilize.
5. The EUT was turned on and the step 3 was repeated.
6. The steps 3 and 4 were repeated until the lowest temperature was reached, i.e, -20°C .



PSB Singapore

FREQUENCY STABILITY VERSUS TEMPERATURE TEST

47 CFR FCC Part 15.225(e) Frequency Stability Versus Temperature Results

Test Input Power	12Vdc	Temperature	See table below
		Relative Humidity	60%
		Atmospheric Pressure	1030mbar
		Tested By	Win Min Htwe

Channel Frequency (MHz)	Temperature (°C)	± 0.01% Carrier Tolerance (kHz)	Measured Tolerance (kHz)	Measurement with respects to Start Up Time (Mins)
13.5600	50.0	±1.3560	0.1290	0
		±1.3560	0.1180	2
		±1.3560	0.1960	5
		±1.3560	0.1046	10
	40.0	±1.3560	0.0900	0
		±1.3560	0.0850	2
		±1.3560	0.0490	5
		±1.3560	0.0850	10
	30.0	±1.3560	0.0900	0
		±1.3560	0.0880	2
		±1.3560	0.0890	5
		±1.3560	0.0900	10
	20.0	±1.3560	0.1000	0
		±1.3560	0.1000	2
		±1.3560	0.7000	5
		±1.3560	0.1000	10
	10.0	±1.3560	0.2590	0
		±1.3560	0.2591	2
		±1.3560	0.2597	5
		±1.3560	0.2600	10
	0.0	±1.3560	0.0200	0
		±1.3560	0.0300	2
		±1.3560	0.0400	5
		±1.3560	0.0300	10
	-10.0	±1.3560	0.0800	0
		±1.3560	0.0700	2
		±1.3560	0.0700	5
		±1.3560	0.0700	10
	-20.0	±1.3560	0.0020	0
		±1.3560	0.0200	2
		±1.3560	0.0200	5
		±1.3560	0.0300	10



PSB Singapore

FREQUENCY STABILITY VERSUS INPUT VOLTAGE TEST

47 CFR FCC Part 15.225(e) Frequency Stability Versus Input Voltage Limits

The EUT shows compliance to the requirements of this section, which states that the frequency tolerance of the carrier frequency shall be $\pm 0.01\%$ for variation of a primary voltage from 85% to 115% of the rated supply voltage at a temperature of 20°C. For a battery operated equipment, the equipment tests shall be performed using a new battery.

47 CFR FCC Part 15.225(e) Frequency Stability Versus Input Voltage Test Instrumentation

Instrument	Model	S/No	Cal Due Date
HP Universal Counter	53132A	3736A06236	05 Oct 2018
Agilent DC Power Supply	E3620A	MY40000448	Output Monitor
Cincinnati Sub-Zero Products, INC. Temperature & Humidity Chamber	ZH-8-1-1-H/AC	ZF9722653	28 Dec 2018

47 CFR FCC Part 15.225(e) Frequency Stability Versus Input Voltage Test Setup

1. The EUT and supporting equipment were set up as shown in the setup photo. The EUT was placed in an environmental temperature chamber with a nominal supply voltage. For the battery operated EUT, the EUT was supplied using a variable power supply.
2. The RF antenna connector of the EUT was connected to the frequency counter via a low-loss coaxial cable.

47 CFR FCC Part 15.225(e) Frequency Stability Versus Input Voltage Test Method

1. The EUT was switched off and the environmental temperature was set to 20°C.
2. Upon reaching the set temperature with 30 minutes of stabilisation period, the EUT was switched on and configured to operate in the test mode with transmitting frequency at 13.56MHz.
3. The EUT's transmitting frequency was then measured with the frequency counter until no further changes were observed. Four measurements were made in total.
4. Repeat steps 1 to 3 with the supply voltage set to 85% and 115% of the nominal voltage supply respectively.



PSB Singapore

FREQUENCY STABILITY VERSUS INPUT VOLTAGE TEST

47 CFR FCC Part 15.225(e) Frequency Stability Versus Input Voltage Results

Test Input Power	See table below	Temperature	20°C
		Relative Humidity	60%
		Atmospheric Pressure	1030mbar
		Tested By	Win Min Htwe

Channel Frequency (MHz)	Test Input Power (Vac / Vdc)	± 1% Carrier Tolerance (kHz)	Measured Tolerance (kHz)
13.5600	12Vdc (<i>nominal voltage</i>)	±1.3560	0.1000
	10.2Vdc (85% of <i>nominal voltage</i>)	±1.3560	0.1080
	13.8Vdc (115% of <i>nominal voltage</i>)	±1.3560	0.1060





PSB Singapore

Please note that this Report is issued under the following terms :

1. This report applies to the sample of the specific product/equipment given at the time of its testing/calibration. The results are not used to indicate or imply that they are applicable to other similar items. In addition, such results must not be used to indicate or imply that TÜV SÜD PSB approves, recommends or endorses the manufacturer, supplier or user of such product/equipment, or that TÜV SÜD PSB in any way "guarantees" the later performance of the product/equipment. Unless otherwise stated in this report, no tests were conducted to determine long term effects of using the specific product/equipment.
2. The sample/s mentioned in this report is/are submitted/supplied/manufactured by the Client. TÜV SÜD PSB therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.
3. Nothing in this report shall be interpreted to mean that TÜV SÜD PSB has verified or ascertained any endorsement or marks from any other testing authority or bodies that may be found on that sample.
4. This report shall not be reproduced wholly or in parts and no reference shall be made by the Client to TÜV SÜD PSB or to the report or results furnished by TÜV SÜD PSB in any advertisements or sales promotion.
5. Unless otherwise stated, the tests were carried out in TÜV SÜD PSB Pte Ltd, No.1 Science Park Drive Singapore 118221.

July 2011

