

FCC RF Test Report

(2.4G Wi-Fi)

Report No.: JYTSZ-R12-2501240

Applicant: Beijing LLVision Technology Co., Ltd.

Address of Applicant: 501, 5th Floor, Building 8, No.10 Kegou 1st Street, BDA, BEIJING, CHINA

Equipment Under Test (EUT)

Product Name: LEION HEY2 AR Glasses

Model No.: G36A

Trade Mark: LEION HEY

FCC ID: 2AKLNG36A0

Applicable Standards: FCC CFR Title 47 Part 15C (§15.247)

Date of Sample Receipt: 01 Jul., 2025

Date of Test: 02 Jul., to 22 Aug., 2025

Date of Report Issued: 23 Aug., 2025

Test Result: PASS

Project by: _____

Date: 23 Aug., 2025

Reviewed by: _____

Date: 23 Aug., 2025

Approved by: _____

Date: 23 Aug., 2025

Manager

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

1 Version

Version No.	Date	Description
00	23 Aug., 2025	Original

2 Contents

Page

Cover Page	1
1 Version	2
2 Contents.....	3
3 General Information.....	4
3.1 Client Information	4
3.2 General Description of E.U.T.	4
3.3 Test Mode and Environment	5
3.4 Description of Test Auxiliary Equipment	5
3.5 Measurement Uncertainty	5
3.6 Additions to, Deviations, or Exclusions from the Method	5
3.7 Laboratory Facility	6
3.8 Laboratory Location.....	6
3.9 Test Instruments List	6
4 Measurement Setup and Procedure	8
4.1 Test Channel	8
4.2 Test Setup	8
4.3 Test Procedure	10
5 Test Results.....	11
5.1 Summary	11
5.1.1 Clause and Data Summary.....	11
5.1.2 Test Limit.....	12
5.2 Antenna Requirement	13
5.3 Emissions in Restricted Frequency Bands.....	14
5.4 Emissions in Non-restricted Frequency Bands	30

3 General Information

3.1 Client Information

Applicant:	Beijing LLVision Technology Co., Ltd.
Address:	501, 5th Floor, Building 8, No.10 Kegu 1st Street, BDA, BEIJING, CHINA
Manufacturer:	Beijing LLVision Technology Co., Ltd.
Address:	501, 5th Floor, Building 8, No.10 Kegu 1st Street, BDA, BEIJING, CHINA
Factory:	Suzhou Lingye Intelligent Technology Co., Ltd.
Address:	No. 2988 Taidong Road Huangdai Town, Xiangcheng District, Suzhou City, JiangSu PR China

3.2 General Description of E.U.T.

Product Name:	LEION HEY2 AR Glasses
Model No.:	G36A
Operation Frequency:	2412 MHz - 2462 MHz (802.11b, g, n-HT20, ax-HE20)
Channel Numbers:	11 (802.11b, g, n-HT20, ax-HE20)
Channel Separation:	5MHz
Modulation Technology: (IEEE 802.11b)	DSSS-DBPSK, DQPSK, CCK
Modulation Technology: (IEEE 802.11g/802.11n)	OFDM-BPSK, QPSK, 16QAM, 64QAM
Modulation Technology: (IEEE 802.11ax)	OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM
Antenna Type:	Internal Antenna
Antenna Gain:	1.29 dBi (declare by applicant)
Antenna Transmit Mode:	SISO (1TX, 1RX)
Power Supply:	Rechargeable Li-ion Battery DC3.87V, 245mAh
Charging case:	Rechargeable Li-ion Battery DC3.6V, 3100mAh USB Input: DC 5V, 1A Magnetic PogoPin connector output: DC 5V, 0.4A
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

3.3 Test Mode and Environment

Test Mode:	
Transmitting mode:	Keep the EUT in continuous transmitting with modulation
Per-scan all kind of data rate, the follow list were the worst case:	
Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n-HT20	6.5Mbps
802.11ax-HE20	8.6Mbps
Remark:	
- For AC power line conducted emission and radiated spurious emission (below 1GHz), pre-scan 802.11b, g, n modulation mode, found 802.11b modulation and middle channel mode was worse case mode. The report only reflects the test data of worst mode. - Channel Low, Mid and High for each type band with rated data rate were chosen for full testing. The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for these modes. Just the worst case position (H mode) shown in report.	
Operating Environment:	
Temperature:	15°C ~ 35°C
Humidity:	20 % ~ 75 % RH
Atmospheric Pressure:	1008 mbar
Voltage:	Nominal: 3.87Vdc, Extreme: Low 3.00Vdc, High 4.45Vdc
Test Engineer:	Hopper Li(Conducted measurement) Robin Gu (Radiated measurement)

3.4 Description of Test Auxiliary Equipment

The EUT has been tested as an independent unit.

3.5 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
Occupied Channel Bandwidth	0.250 MHz
RF output power, conducted	0.75dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	2.86 dB
Radiated Emission (9kHz ~ 30MHz) (3m SAC)	±3.3 dB
Radiated Emission (30MHz ~ 200MHz) (3m SAC)	±4.6 dB
Radiated Emission (200MHz ~ 1000MHz) (3m SAC)	±5.8 dB
Radiated Emission (1GHz ~ 6GHz) (3m SAC)	±4.5 dB
Radiated Emission (6GHz ~ 18GHz) (3m SAC)	4.7 dB
Radiated Emission (18GHz ~ 40GHz) (3m SAC)	5.34 dB
Radiated Emission (30MHz ~ 1GHz) (3m FAR)	3.39 dB
Radiated Emission (1GHz ~ 18GHz) (3m FAR)	5.15 dB
Radiated Emission (18GHz ~ 40GHz) (3m FAR)	5.30 dB
Note: All the measurement uncertainty value were shown with a coverage k=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.	

3.6 Additions to, Deviations, or Exclusions from the Method

No

3.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

- **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **CNAS - Registration No.: CNAS L15527**

JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

3.8 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

3.9 Test Instruments List

Radiated Emission(3m SAC):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	ETS	9m*6m*6m	WXJ001-1	04-14-2021	04-13-2026
Loop Antenna	Schwarzbeck	FMZB 1519 B	WXJ002-4	01-03-2025	01-02-2026
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ002	01-03-2025	01-02-2026
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-2	01-03-2025	01-02-2026
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-5	12-25-2024	12-24-2025
Pre-amplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9743B	WXJ001-2	12-16-2024	12-15-2025
Pre-amplifier (1GHz ~ 18GHz)	SKET	LNPA_0118G-50	WXJ001-3	12-16-2024	12-15-2025
Pre-amplifier (18GHz ~ 40GHz)	RF System	TRLA-180400G45B	WXJ002-7	12-16-2024	12-15-2025
EMI Test Receiver	Rohde & Schwarz	ESRP7	WXJ003-1	12-16-2024	12-15-2025
Spectrum Analyzer	Rohde & Schwarz	FSP 30	WXJ004	12-16-2024	12-15-2025
Spectrum Analyzer	KEYSIGHT	N9010B	WXJ004-2	09-09-2024	09-08-2025
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-8M	WXG001-4	01-15-2025	01-14-2026
Coaxial Cable (1GHz ~ 18GHz)	JYTSZ	JYT3M-18G-NN-8M	WXG001-5	01-15-2025	01-14-2026
Coaxial Cable (18GHz ~ 40GHz)	JYTSZ	JYT3M-40G-SS-8M	WXG001-7	01-15-2025	01-14-2026
Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Test Software	Tonscend	TS+	Version: 3.0.0.1		

Radiated Emission(3m FAR):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m FAR	YUNYI	9m*6m*6m	WXJ097	06-15-2023	06-14-2028
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ097-2	04-24-2025	04-23-2026
Biconical Antenna	Schwarzbeck	VUBA9117	WXJ002-1	07-01-2024	06-30-2027
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ097-3	05-23-2025	05-22-2026
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-3	12-25-2024	12-24-2025
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-5	12-25-2024	12-24-2025
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-6	12-25-2024	12-24-2025
Pre-amplifier (30MHz ~ 1GHz)	YUNYI	PAM-310N	WXJ097-5	04-21-2025	04-20-2026
Pre-amplifier (1GHz ~ 18GHz)	YUNYI	PAM-118N	WXJ097-6	04-21-2025	04-20-2026
Pre-amplifier (18GHz ~ 40GHz)	RF System	TRLA-180400G45B	WXJ002-7	12-16-2024	12-15-2025
EMI Test Receiver	Rohde & Schwarz	ESCI3	WXJ003	12-16-2024	12-15-2025
Spectrum Analyzer	Rohde & Schwarz	FSP 30	WXJ004	12-16-2024	12-15-2025
Spectrum Analyzer	KEYSIGHT	N9020B	WXJ081-1	05-08-2025	05-07-2026
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-13M	WXG097-1	07-30-2024	07-29-2025
				07-28-2025	07-27-2026
Coaxial Cable (1GHz ~ 18GHz)	JYTSZ	JYT3M-18G-NN-8M	WXG097-2	07-30-2024	07-29-2025
				07-28-2025	07-27-2026
Coaxial Cable (18GHz ~ 40GHz)	JYTSZ	JYT3M-40G-SS-8M	WXG097-3	07-30-2024	07-29-2025
				07-28-2025	07-27-2026
High Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Low Band Reject Filter Group	Tonscend	JS0806-F	WXJ097-4	N/A	
Test Software	Tonscend	TS+	Version: 5.0.0		

Conducted Method:					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
Spectrum Analyzer	Keysight	N9010B	WXJ004-3	09-10-2024	09-09-2025
Temperature Humidity Chamber	ZHONG ZHI	CZ-A-80D	WXJ032-3	12-17-2024	12-16-2026
Power Detector Box	MWRFTTEST	MW100-PSB	WXJ007-4	09-10-2024	09-09-2025
DC Power Supply	Keysight	E3642A	WXJ025-2	N/A	
RF Control Unit	MWRFTTEST	MW100-RFCB	WXG006	N/A	
Test Software	MWRFTTEST	MTS 8310	Version: 2.0.0.0		

4 Measurement Setup and Procedure

4.1 Test Channel


According to ANSI C63.10-2020 chapter 5.6.1 Table 4 requirement, select lowest channel, middle channel, and highest channel in the frequency range in which device operates for testing. The detailed frequency points are as follows:

802.11b, 802.11g, 802.11n-HT20, 802.11ax-HE20					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	6	2437	11	2462


4.2 Test Setup

1) Radiated emission measurement:


Below 30MHz (3m SAC)

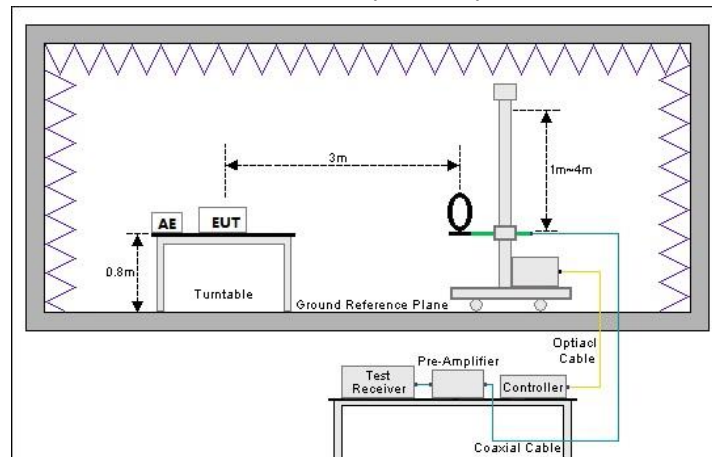


Below 1GHz (3m SAC)

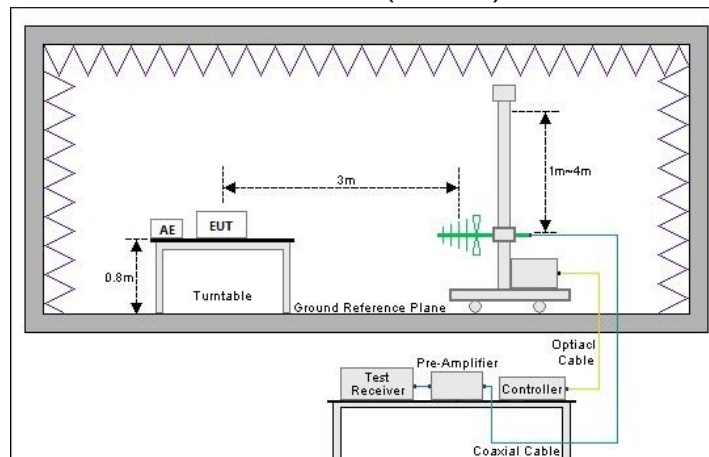

Above 1GHz (3m FAR)

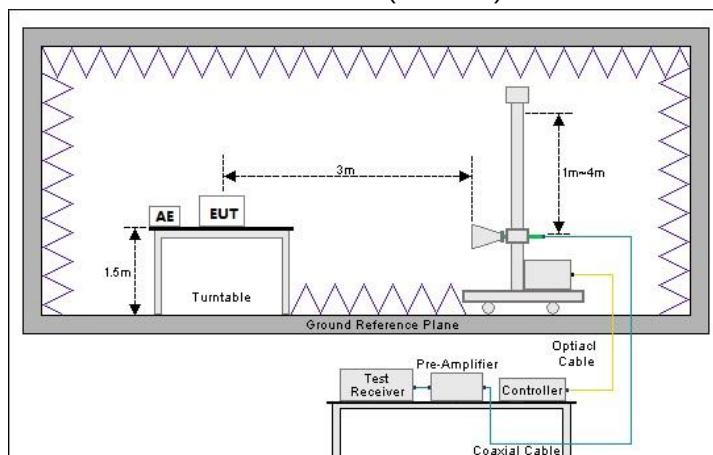

2) Conducted test method

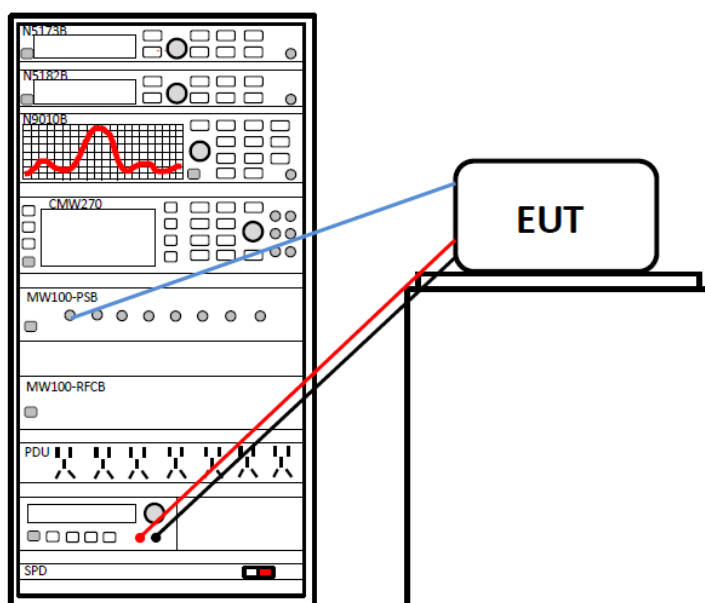

4.3 Test Procedure

Test method	Test step
Radiated emission	For below 30MHz: 1. The EUT was placed on the table top of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. For below 1GHz: 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. For above 1GHz: 1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.
Conducted test method	1. The Wi-Fi antenna port of EUT was connected to the test port of the test system through an RF cable. 2. The EUT is keeping in continuous transmission mode and tested in all modulation modes. 3. Open the test software, prepare a test plan, and control the system through the software. After the test is completed, the test report is exported through the test software.

5 Test Results

5.1 Summary

5.1.1 Clause and Data Summary

Test items	Standard clause	Test Method	Test data	Result
Antenna Requirement	15.203 15.247 (b)(4)	/	See Section 5.2	Pass
AC Power Line Conducted Emission	15.207	ANSI C63.10 clause 6.2	N/A	N/A
Duty Cycle	ANSI C63.10-2013	ANSI C63.10 clause 11.6	Appendix – 2.4G Wi-Fi	Pass
Conducted Output Power	15.247 (b)(3)	ANSI C63.10 clause 11.9.2.3.2	Appendix – 2.4G Wi-Fi	Pass
6dB Emission Bandwidth 99% Occupied Bandwidth	15.247 (a)(2)	ANSI C63.10 clause 11.8.1 and 6.9.3	Appendix – 2.4G Wi-Fi	Pass
Power Spectral Density	15.247 (e)	ANSI C63.10 clause 11.10.5	Appendix – 2.4G Wi-Fi	Pass
Band-edge Emission Conduction Spurious Emission	15.247 (d)	ANSI C63.10 clause 6.10.4	Appendix – 2.4G Wi-Fi	Pass
Emissions in Restricted Frequency Bands	15.205 15.247 (d)	ANSI C63.10 clause 6.10.5, 11.12.1 and 11.12.2.5.2	See Section 5.3	Pass
Emissions in Non-restricted Frequency Bands	15.209 15.247(d)	ANSI C63.10 clause 6.3, 6.5, 6.6, 6.2.3 and 11.12.2.5.2	See Section 5.4	Pass
Remark: 1. Pass: The EUT complies with the essential requirements in the standard. 2. N/A: not Applicable, EUT cannot work while charging. 3. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB (provided by the customer).				
Test Method:	ANSI C63.10-2020 KDB 558074 D01 15.247 Meas Guidance v05r02			

5.1.2 Test Limit


Test items	Limit																																								
Conducted Output Power	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.																																								
6dB Emission Bandwidth	The minimum 6 dB bandwidth shall be at least 500 kHz.																																								
99% Occupied Bandwidth	N/A																																								
Power Spectral Density	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.																																								
Band-edge Emission Conduction Spurious Emission	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).																																								
Emissions in Restricted Frequency Bands Emissions in Non-restricted Frequency Bands	<table><tr><th rowspan="2">Frequency (MHz)</th><th colspan="2">Limit (dBµV/m)</th><th rowspan="2">Detector</th></tr><tr><th>@ 3m</th><th>@ 10m</th></tr><tr><td>30 – 88</td><td>40.0</td><td>30.0</td><td>Quasi-peak</td></tr><tr><td>88 – 216</td><td>43.5</td><td>33.5</td><td>Quasi-peak</td></tr><tr><td>216 – 960</td><td>46.0</td><td>36.0</td><td>Quasi-peak</td></tr><tr><td>960 – 1000</td><td>54.0</td><td>44.0</td><td>Quasi-peak</td></tr><tr><td colspan="4">Note: The more stringent limit applies at transition frequencies.</td></tr><tr><th rowspan="2">Frequency</th><th colspan="2">Limit (dBµV/m) @ 3m</th><th rowspan="2">Peake</th></tr><tr><th colspan="2">Average</th></tr><tr><td>Above 1 GHz</td><td colspan="2">54.0</td><td>74.0</td></tr><tr><td colspan="4">Note: The measurement bandwidth shall be 1 MHz or greater.</td></tr></table>	Frequency (MHz)	Limit (dBµV/m)		Detector	@ 3m	@ 10m	30 – 88	40.0	30.0	Quasi-peak	88 – 216	43.5	33.5	Quasi-peak	216 – 960	46.0	36.0	Quasi-peak	960 – 1000	54.0	44.0	Quasi-peak	Note: The more stringent limit applies at transition frequencies.				Frequency	Limit (dBµV/m) @ 3m		Peake	Average		Above 1 GHz	54.0		74.0	Note: The measurement bandwidth shall be 1 MHz or greater.			
Frequency (MHz)	Limit (dBµV/m)		Detector																																						
	@ 3m	@ 10m																																							
30 – 88	40.0	30.0	Quasi-peak																																						
88 – 216	43.5	33.5	Quasi-peak																																						
216 – 960	46.0	36.0	Quasi-peak																																						
960 – 1000	54.0	44.0	Quasi-peak																																						
Note: The more stringent limit applies at transition frequencies.																																									
Frequency	Limit (dBµV/m) @ 3m		Peake																																						
	Average																																								
Above 1 GHz	54.0		74.0																																						
Note: The measurement bandwidth shall be 1 MHz or greater.																																									

5.2 Antenna Requirement

Standard Requirement:	FCC Part 15 C Section 15.203/15.247 (b)(4)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247 (b)(4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
E.U.T Antenna:	
The Wi-Fi antenna is an internal antenna which cannot replace by end-user, the best case gain of the antenna is 1.29 dBi. See product internal photos for details.	

5.3 Emissions in Restricted Frequency Bands

Product Name:	LEION HEY2 AR Glasses	Product Model:	G36A
Test By:	Robin Gu	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 3.87V		

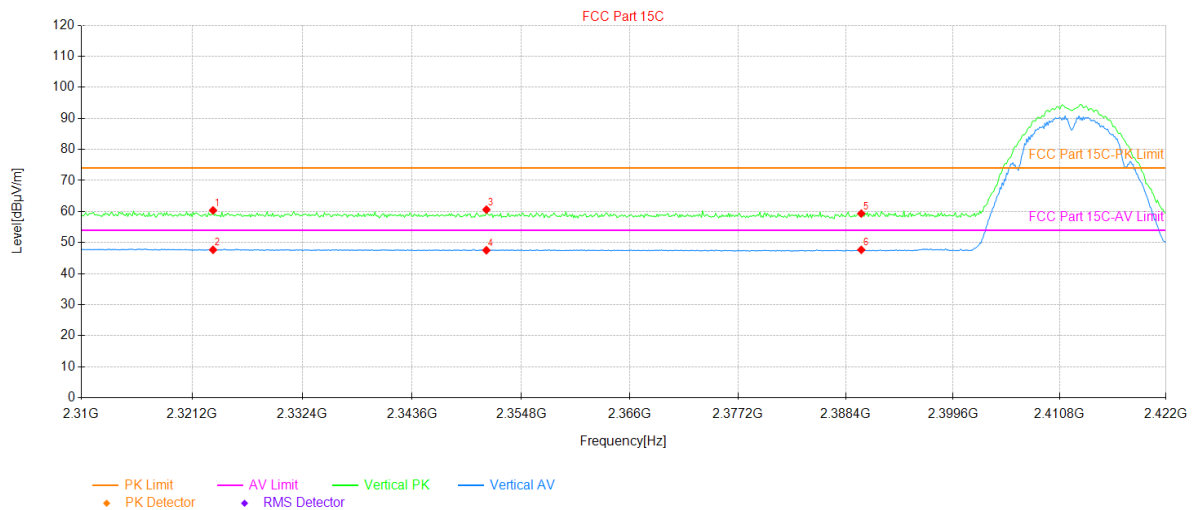


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2323.33	24.35	36.02	60.37	74.00	13.63	7	PK	PASS	Vertical
2	2323.33	11.65	36.02	47.67	54.00	6.33	282	AV	PASS	Vertical
3	2351.22	24.55	36.07	60.62	74.00	13.38	150	PK	PASS	Vertical
4	2351.22	11.46	36.07	47.53	54.00	6.47	229	AV	PASS	Vertical
5	2390.00	23.17	36.19	59.36	74.00	14.64	19	PK	PASS	Vertical
6	2390.00	11.48	36.19	47.67	54.00	6.33	293	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	LEION HEY2 AR Glasses	Product Model:	G36A
Test By:	Robin Gu	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 3.87V		

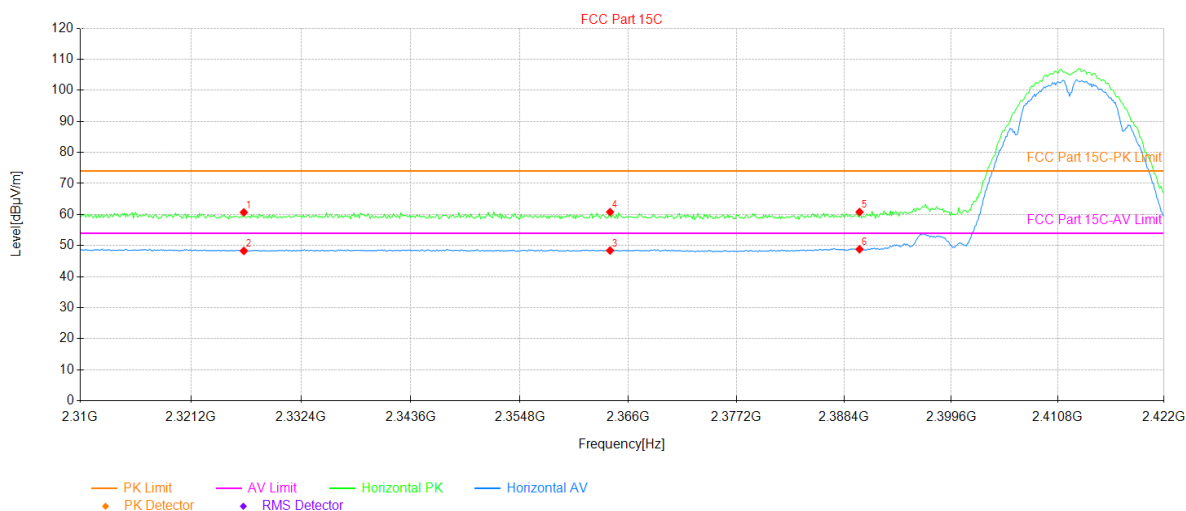


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2326.58	24.70	36.01	60.71	74.00	13.29	303	PK	PASS	Horizontal
2	2326.58	12.29	36.01	48.30	54.00	5.70	109	AV	PASS	Horizontal
3	2364.10	12.31	36.11	48.42	54.00	5.58	207	AV	PASS	Horizontal
4	2364.10	24.69	36.11	60.80	74.00	13.20	192	PK	PASS	Horizontal
5	2390.00	24.62	36.19	60.81	74.00	13.19	213	PK	PASS	Horizontal
6	2390.00	12.64	36.19	48.83	54.00	5.17	213	AV	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	LEION HEY2 AR Glasses	Product Model:	G36A
Test By:	Robin Gu	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 3.87V		

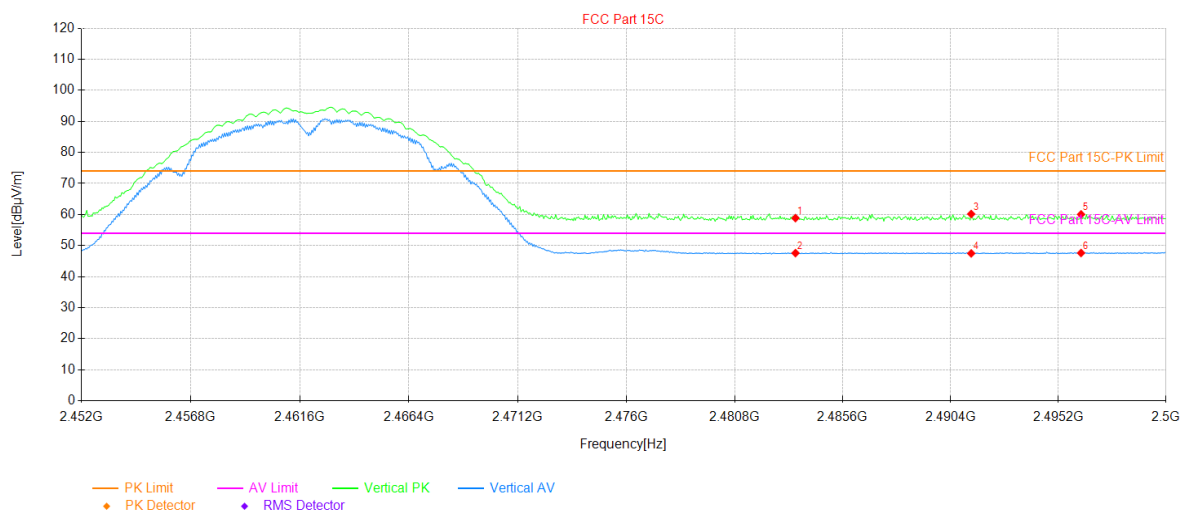


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	22.62	36.24	58.86	74.00	15.14	24	PK	PASS	Vertical
2	2483.50	11.35	36.24	47.59	54.00	6.41	352	AV	PASS	Vertical
3	2491.31	23.87	36.31	60.18	74.00	13.82	24	PK	PASS	Vertical
4	2491.31	11.18	36.31	47.49	54.00	6.51	0	AV	PASS	Vertical
5	2496.21	23.71	36.34	60.05	74.00	13.95	143	PK	PASS	Vertical
6	2496.21	11.28	36.34	47.62	54.00	6.38	229	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	LEION HEY2 AR Glasses	Product Model:	G36A
Test By:	Robin Gu	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 3.87V		

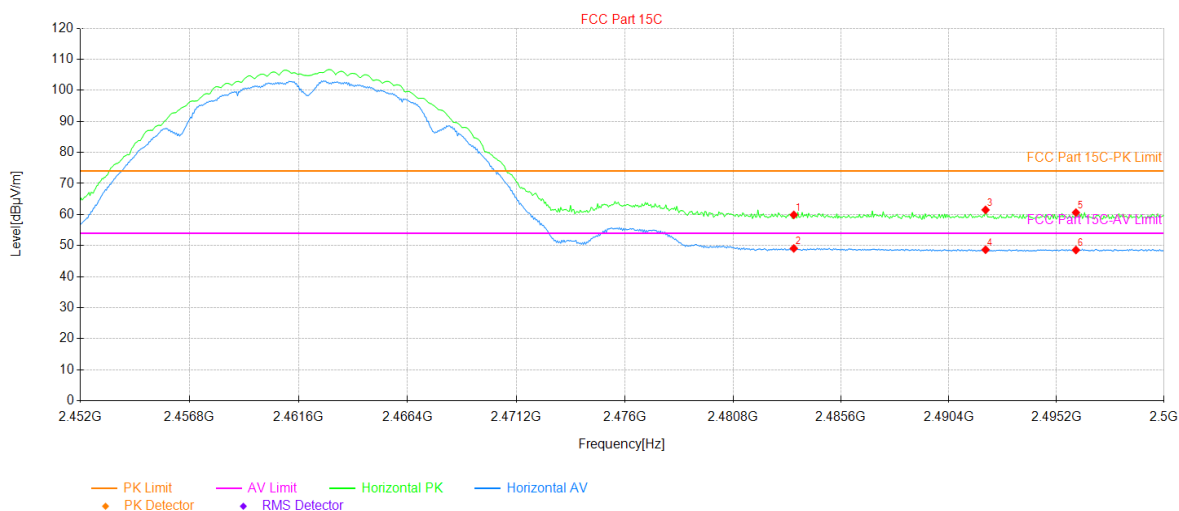


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	23.65	36.24	59.89	74.00	14.11	211	PK	PASS	Horizontal
2	2483.50	12.85	36.24	49.09	54.00	4.91	211	AV	PASS	Horizontal
3	2492.03	25.19	36.31	61.50	74.00	12.50	234	PK	PASS	Horizontal
4	2492.03	12.36	36.31	48.67	54.00	5.33	211	AV	PASS	Horizontal
5	2496.06	24.30	36.34	60.64	74.00	13.36	204	PK	PASS	Horizontal
6	2496.06	12.25	36.34	48.59	54.00	5.41	211	AV	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	LEION HEY2 AR Glasses	Product Model:	G36A
Test By:	Robin Gu	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 3.87V		

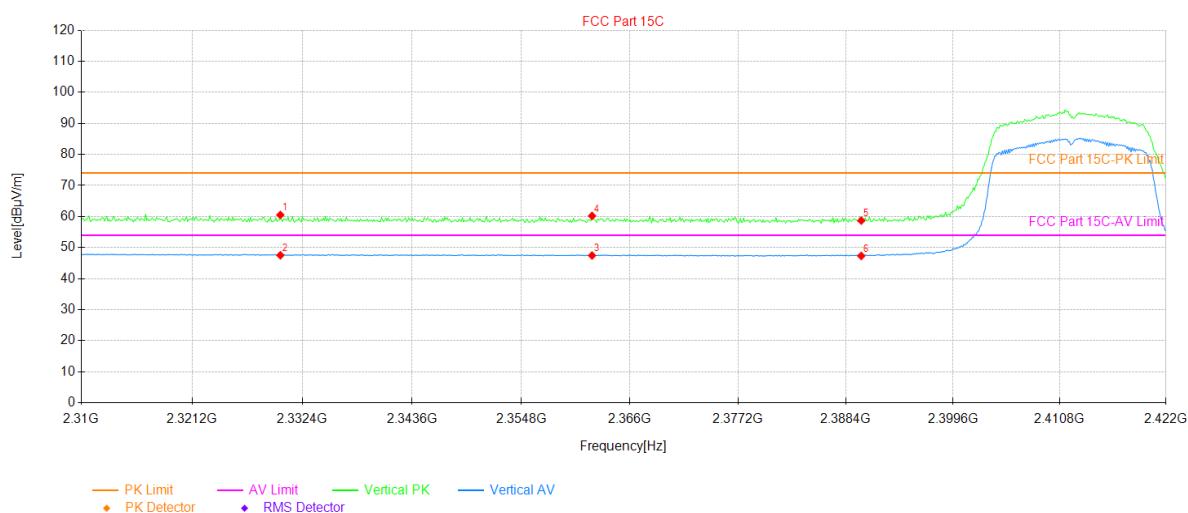


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2330.16	24.50	36.01	60.51	74.00	13.49	217	PK	PASS	Vertical
2	2330.16	11.52	36.01	47.53	54.00	6.47	78	AV	PASS	Vertical
3	2362.08	11.34	36.11	47.45	54.00	6.55	251	AV	PASS	Vertical
4	2362.08	24.09	36.11	60.20	74.00	13.80	141	PK	PASS	Vertical
5	2390.00	22.50	36.19	58.69	74.00	15.31	358	PK	PASS	Vertical
6	2390.00	11.14	36.19	47.33	54.00	6.67	14	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	LEION HEY2 AR Glasses	Product Model:	G36A
Test By:	Robin Gu	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 3.87V		

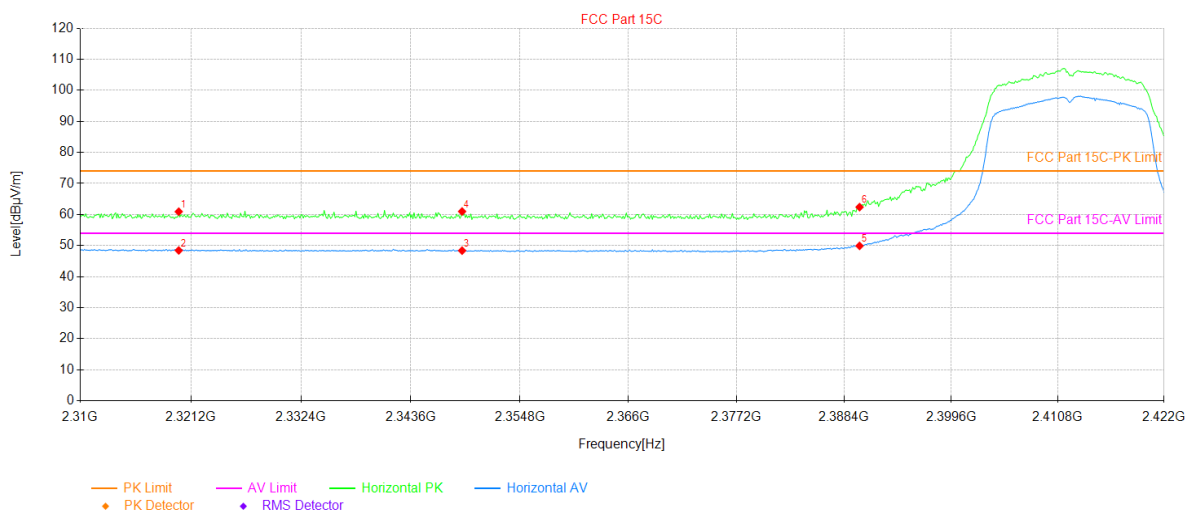


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2319.97	24.91	36.02	60.93	74.00	13.07	288	PK	PASS	Horizontal
2	2319.97	12.42	36.02	48.44	54.00	5.56	213	AV	PASS	Horizontal
3	2348.86	12.31	36.07	48.38	54.00	5.62	216	AV	PASS	Horizontal
4	2348.86	24.91	36.07	60.98	74.00	13.02	92	PK	PASS	Horizontal
5	2390.00	13.72	36.19	49.91	54.00	4.09	292	AV	PASS	Horizontal
6	2390.00	26.20	36.19	62.39	74.00	11.61	122	PK	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	LEION HEY2 AR Glasses	Product Model:	G36A
Test By:	Robin Gu	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 3.87V		

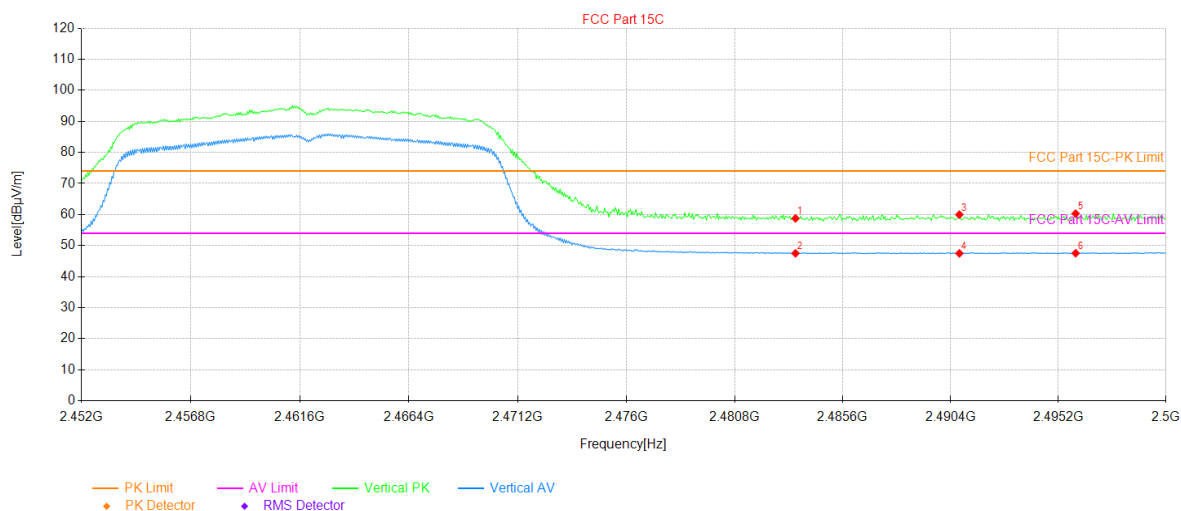


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	22.51	36.24	58.75	74.00	15.25	220	PK	PASS	Vertical
2	2483.50	11.26	36.24	47.50	54.00	6.50	239	AV	PASS	Vertical
3	2490.78	23.67	36.30	59.97	74.00	14.03	2	PK	PASS	Vertical
4	2490.78	11.20	36.30	47.50	54.00	6.50	38	AV	PASS	Vertical
5	2495.97	23.96	36.34	60.30	74.00	13.70	0	PK	PASS	Vertical
6	2495.97	11.22	36.34	47.56	54.00	6.44	34	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	LEION HEY2 AR Glasses	Product Model:	G36A
Test By:	Robin Gu	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 3.87V		

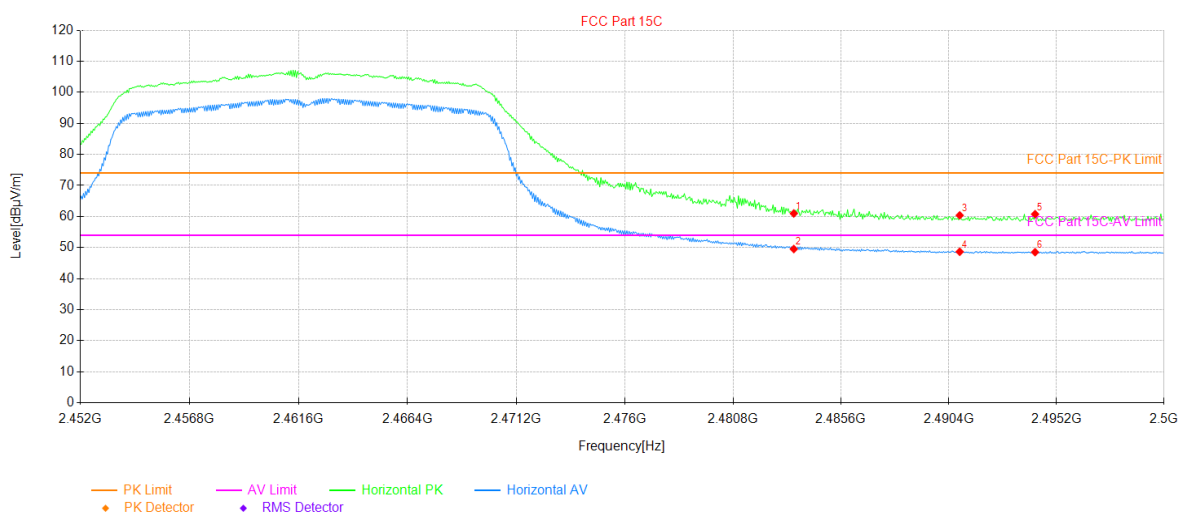


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	24.76	36.24	61.00	74.00	13.00	118	PK	PASS	Horizontal
2	2483.50	13.30	36.24	49.54	54.00	4.46	210	AV	PASS	Horizontal
3	2490.88	24.09	36.30	60.39	74.00	13.61	293	PK	PASS	Horizontal
4	2490.88	12.37	36.30	48.67	54.00	5.33	210	AV	PASS	Horizontal
5	2494.24	24.42	36.33	60.75	74.00	13.25	285	PK	PASS	Horizontal
6	2494.24	12.20	36.33	48.53	54.00	5.47	210	AV	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	LEION HEY2 AR Glasses	Product Model:	G36A
Test By:	Robin Gu	Test mode:	802.11n-HT20 Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 3.87V		

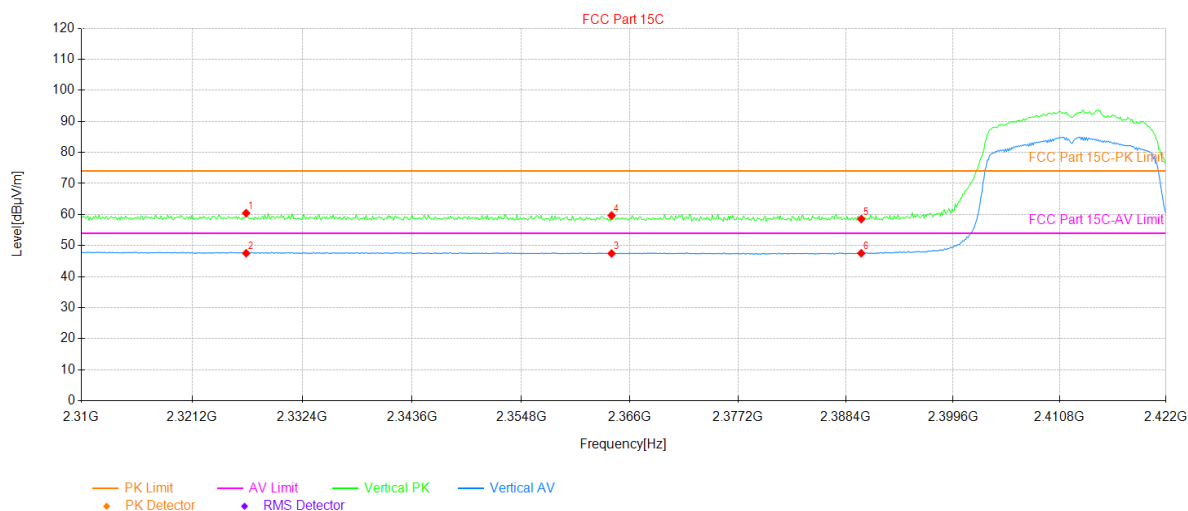


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2326.69	24.44	36.01	60.45	74.00	13.55	255	PK	PASS	Vertical
2	2326.69	11.53	36.01	47.54	54.00	6.46	143	AV	PASS	Vertical
3	2364.10	11.35	36.11	47.46	54.00	6.54	199	AV	PASS	Vertical
4	2364.10	23.59	36.11	59.70	74.00	14.30	87	PK	PASS	Vertical
5	2390.00	22.35	36.19	58.54	74.00	15.46	207	PK	PASS	Vertical
6	2390.00	11.34	36.19	47.53	54.00	6.47	166	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	LEION HEY2 AR Glasses	Product Model:	G36A
Test By:	Robin Gu	Test mode:	802.11n-HT20 Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 3.87V		

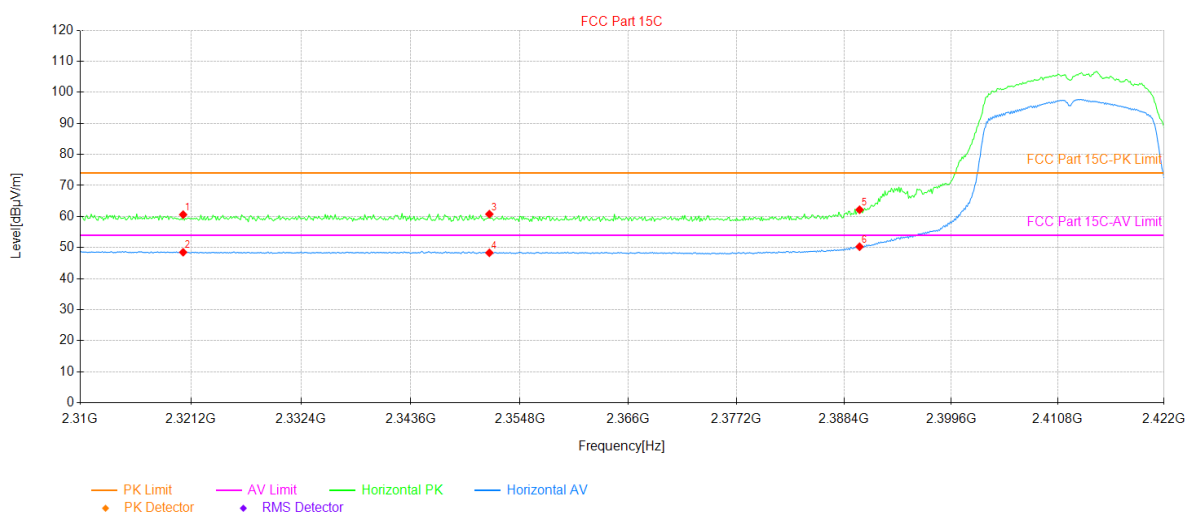


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2320.42	24.60	36.02	60.62	74.00	13.38	296	PK	PASS	Horizontal
2	2320.42	12.48	36.02	48.50	54.00	5.50	199	AV	PASS	Horizontal
3	2351.66	24.70	36.07	60.77	74.00	13.23	208	PK	PASS	Horizontal
4	2351.66	12.25	36.07	48.32	54.00	5.68	296	AV	PASS	Horizontal
5	2390.00	26.00	36.19	62.19	74.00	11.81	216	PK	PASS	Horizontal
6	2390.00	14.10	36.19	50.29	54.00	3.71	216	AV	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	LEION HEY2 AR Glasses	Product Model:	G36A
Test By:	Robin Gu	Test mode:	802.11n-HT20 Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 3.87V		

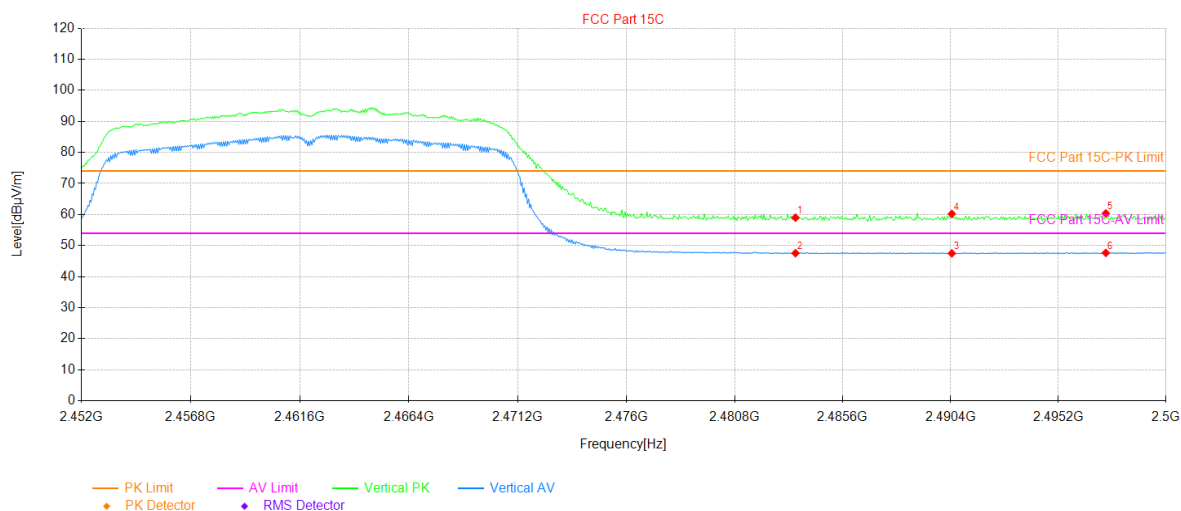


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	22.76	36.24	59.00	74.00	15.00	74	PK	PASS	Vertical
2	2483.50	11.31	36.24	47.55	54.00	6.45	58	AV	PASS	Vertical
3	2490.45	11.19	36.30	47.49	54.00	6.51	3	AV	PASS	Vertical
4	2490.45	23.91	36.30	60.21	74.00	13.79	171	PK	PASS	Vertical
5	2497.31	24.01	36.36	60.37	74.00	13.63	43	PK	PASS	Vertical
6	2497.31	11.30	36.36	47.66	54.00	6.34	10	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	LEION HEY2 AR Glasses	Product Model:	G36A
Test By:	Robin Gu	Test mode:	802.11n-HT20 Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 3.87V		

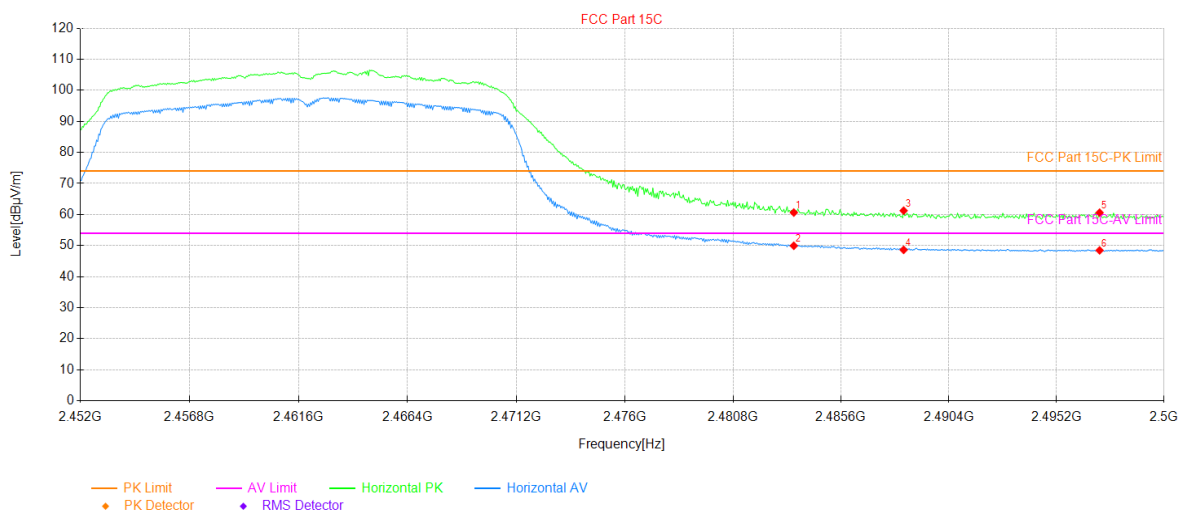


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	24.40	36.24	60.64	74.00	13.36	289	PK	PASS	Horizontal
2	2483.50	13.71	36.24	49.95	54.00	4.05	209	AV	PASS	Horizontal
3	2488.38	24.97	36.28	61.25	74.00	12.75	213	PK	PASS	Horizontal
4	2488.38	12.36	36.28	48.64	54.00	5.36	217	AV	PASS	Horizontal
5	2497.12	24.22	36.36	60.58	74.00	13.42	118	PK	PASS	Horizontal
6	2497.12	12.11	36.36	48.47	54.00	5.53	217	AV	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	LEION HEY2 AR Glasses	Product Model:	G36A
Test By:	Robin Gu	Test mode:	802.11ax-HE20 Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 3.87V		

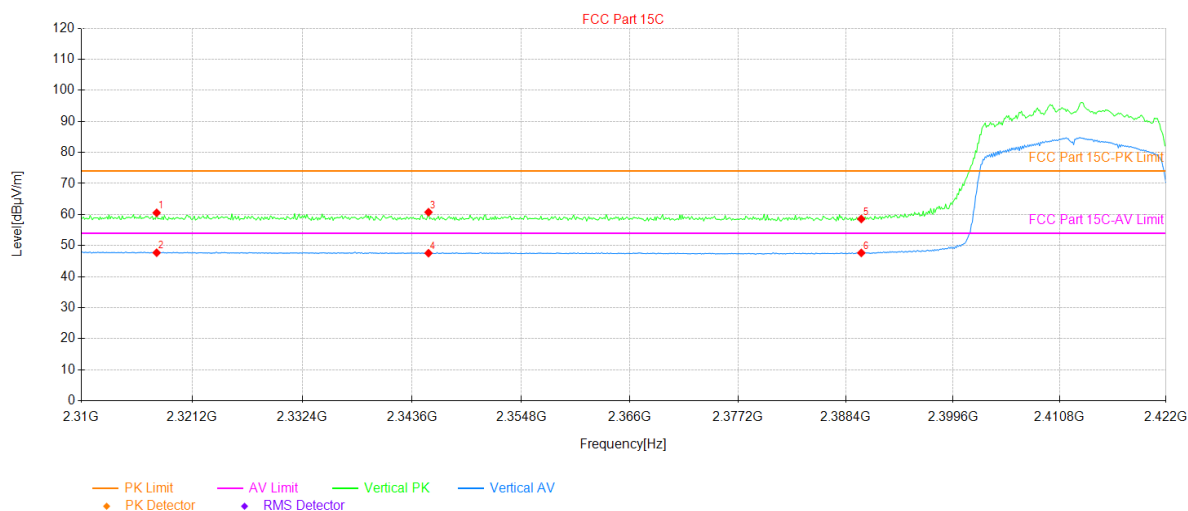


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2317.62	24.53	36.03	60.56	74.00	13.44	123	PK	PASS	Vertical
2	2317.62	11.68	36.03	47.71	54.00	6.29	27	AV	PASS	Vertical
3	2345.28	24.69	36.06	60.75	74.00	13.25	134	PK	PASS	Vertical
4	2345.28	11.51	36.06	47.57	54.00	6.43	283	AV	PASS	Vertical
5	2390.00	22.38	36.19	58.57	74.00	15.43	230	PK	PASS	Vertical
6	2390.00	11.45	36.19	47.64	54.00	6.36	127	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	LEION HEY2 AR Glasses	Product Model:	G36A
Test By:	Robin Gu	Test mode:	802.11ax-HE20 Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 3.87V		

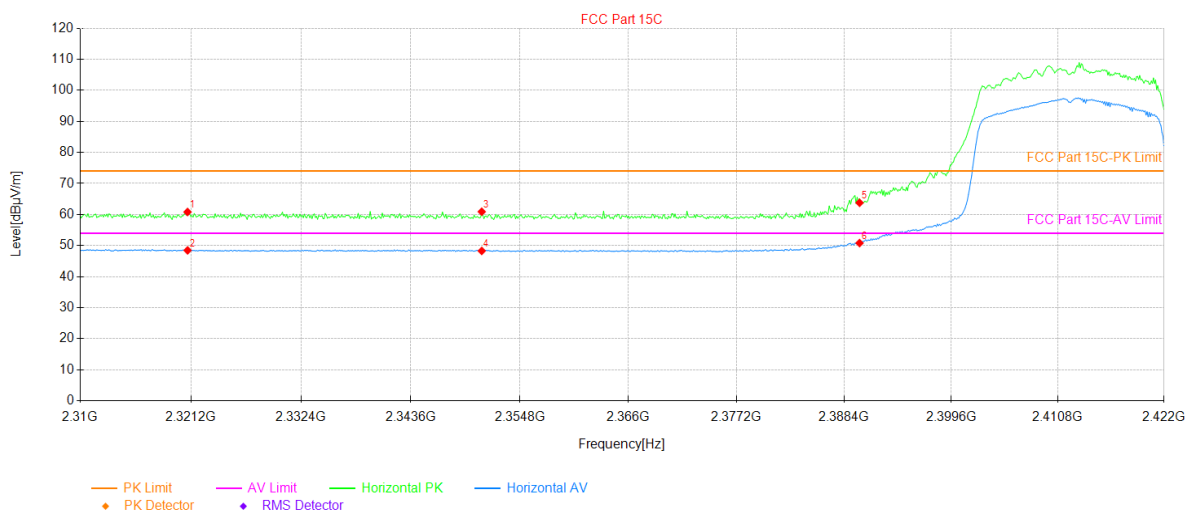


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2320.86	24.80	36.02	60.82	74.00	13.18	202	PK	PASS	Horizontal
2	2320.86	12.45	36.02	48.47	54.00	5.53	292	AV	PASS	Horizontal
3	2350.88	24.84	36.07	60.91	74.00	13.09	60	PK	PASS	Horizontal
4	2350.88	12.22	36.07	48.29	54.00	5.71	296	AV	PASS	Horizontal
5	2390.00	27.59	36.19	63.78	74.00	10.22	292	PK	PASS	Horizontal
6	2390.00	14.62	36.19	50.81	54.00	3.19	292	AV	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	LEION HEY2 AR Glasses	Product Model:	G36A
Test By:	Robin Gu	Test mode:	802.11ax-HE20 Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 3.87V		

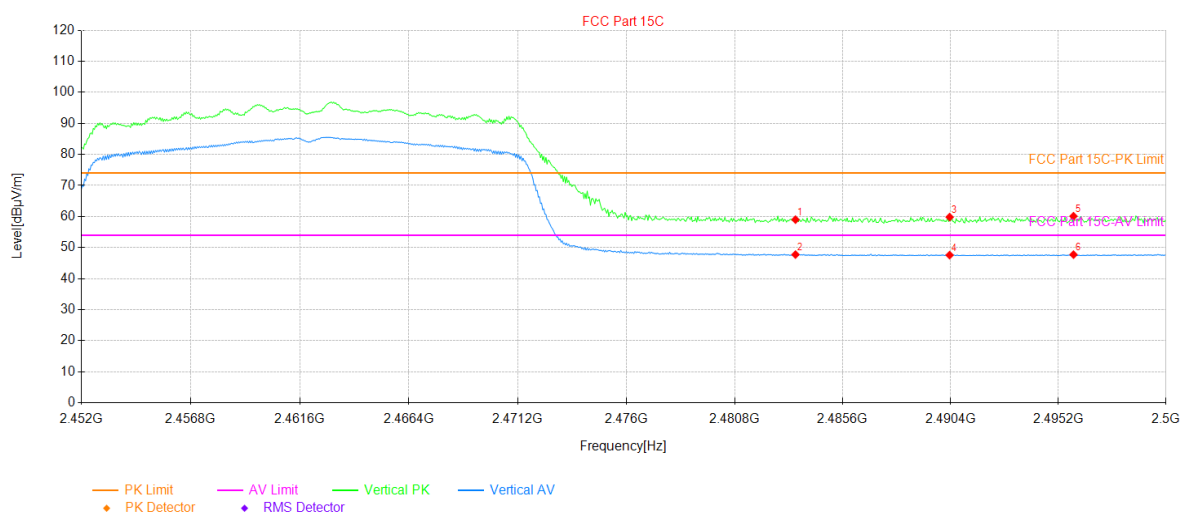


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	22.76	36.24	59.00	74.00	15.00	214	PK	PASS	Vertical
2	2483.50	11.52	36.24	47.76	54.00	6.24	292	AV	PASS	Vertical
3	2490.35	23.53	36.30	59.83	74.00	14.17	330	PK	PASS	Vertical
4	2490.35	11.28	36.30	47.58	54.00	6.42	57	AV	PASS	Vertical
5	2495.87	23.76	36.34	60.10	74.00	13.90	341	PK	PASS	Vertical
6	2495.87	11.40	36.34	47.74	54.00	6.26	113	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	LEION HEY2 AR Glasses	Product Model:	G36A
Test By:	Robin Gu	Test mode:	802.11ax-HE20 Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 3.87V		

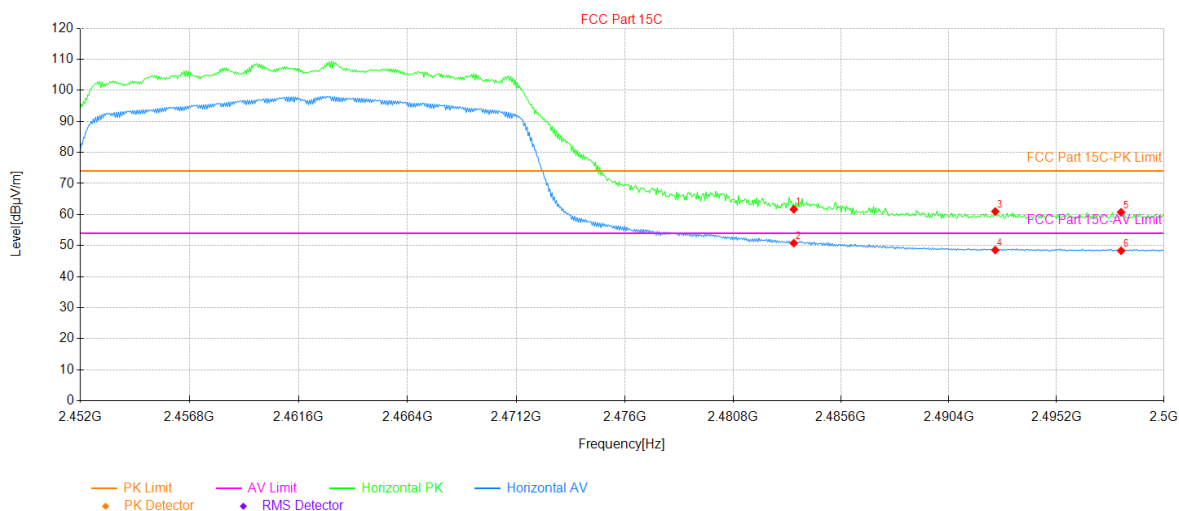

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	25.43	36.24	61.67	74.00	12.33	293	PK	PASS	Horizontal
2	2483.50	14.55	36.24	50.79	54.00	3.21	209	AV	PASS	Horizontal
3	2492.46	24.68	36.32	61.00	74.00	13.00	225	PK	PASS	Horizontal
4	2492.46	12.24	36.32	48.56	54.00	5.44	209	AV	PASS	Horizontal
5	2498.08	24.40	36.36	60.76	74.00	13.24	209	PK	PASS	Horizontal
6	2498.08	11.99	36.36	48.35	54.00	5.65	206	AV	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)


5.4 Emissions in Non-restricted Frequency Bands

Below 30MHz:

Test Frequency from 9kHz to 30MHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.

Below 1GHz:

Product Name:	LEION HEY2 AR Glasses	Product Model:	G36A
Test By:	Kiran Zeng	Test mode:	2.4G Wi-Fi mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	DC 3.87V		

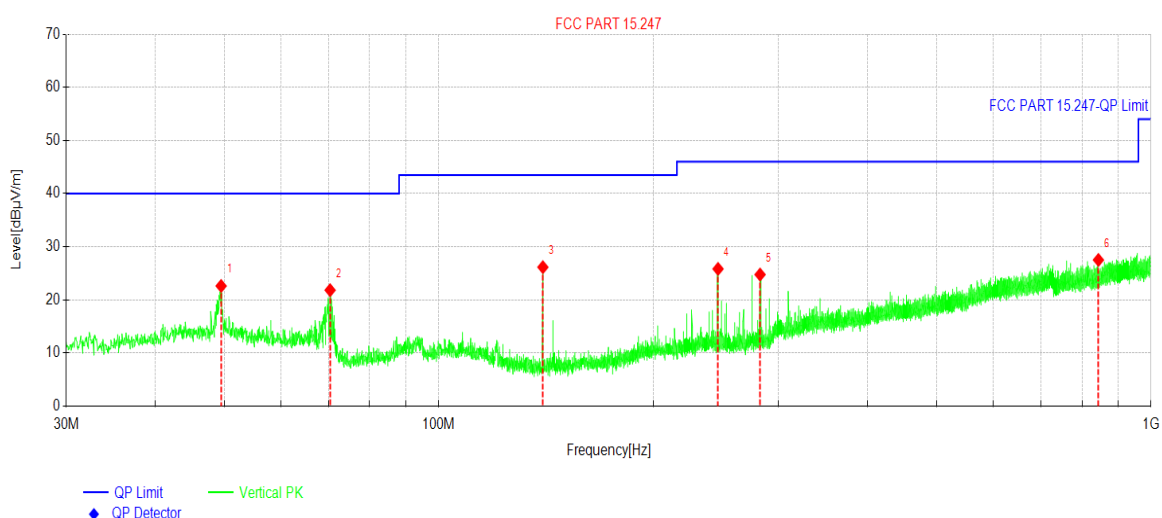


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	49.4980	35.02	-12.41	22.61	40.00	17.39	PK	Vertical
2	70.4025	38.62	-16.80	21.82	40.00	18.18	PK	Vertical
3	140.0520	44.15	-18.00	26.15	43.50	17.35	PK	Vertical
4	246.7088	39.49	-13.67	25.82	46.00	20.18	PK	Vertical
5	282.6491	37.86	-13.10	24.76	46.00	21.24	PK	Vertical
6	843.7252	30.79	-3.28	27.51	46.00	18.49	PK	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss - Preamplifier Factor)

Product Name:	LEION HEY2 AR Glasses	Product Model:	G36A
Test By:	Kiran Zeng	Test mode:	2.4G Wi-Fi mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	DC 3.87V		

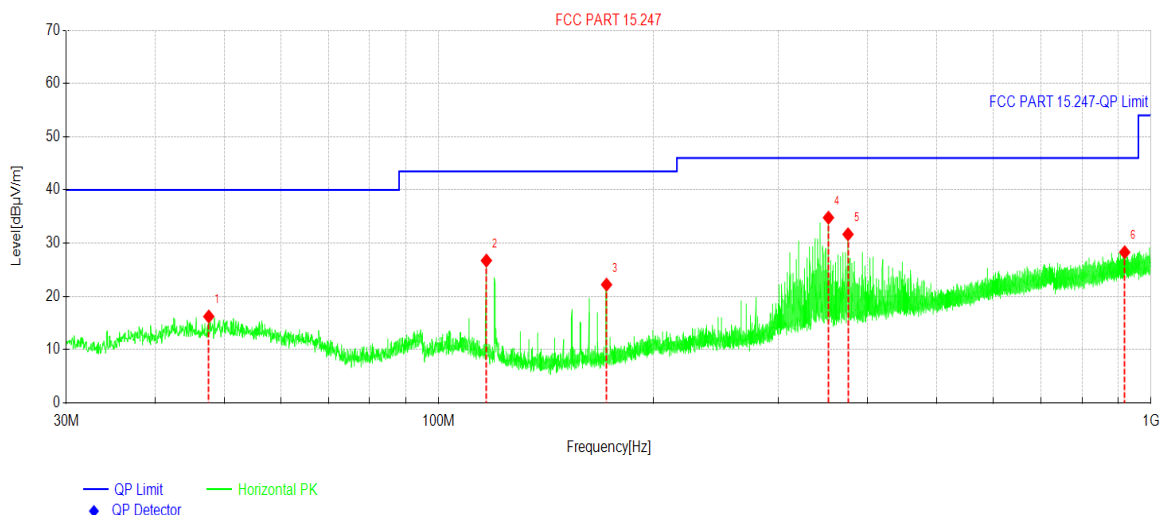

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	47.5579	28.65	-12.42	16.23	40.00	23.77	PK	Horizontal
2	116.6738	42.35	-15.62	26.73	43.50	16.77	PK	Horizontal
3	172.0636	39.30	-17.09	22.21	43.50	21.29	PK	Horizontal
4	352.5411	46.05	-11.26	34.79	46.00	11.21	PK	Horizontal
5	375.5313	42.59	-10.92	31.67	46.00	14.33	PK	Horizontal
6	918.5644	30.39	-2.10	28.29	46.00	17.71	PK	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss - Preamplifier Factor)

Above 1GHz

802.11b						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	61.66	-7.92	53.74	74.00	20.26	Vertical
4824.00	60.64	-7.92	52.72	74.00	21.28	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	55.53	-7.92	47.61	54.00	6.39	Vertical
4824.00	54.16	-7.92	46.24	54.00	7.76	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	61.15	-7.55	53.60	74.00	20.40	Vertical
4874.00	60.37	-7.55	52.82	74.00	21.18	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	55.53	-7.55	47.98	54.00	6.02	Vertical
4874.00	54.16	-7.55	46.61	54.00	7.39	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	60.87	-7.21	53.66	74.00	20.34	Vertical
4924.00	59.90	-7.21	52.69	74.00	21.31	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	55.53	-7.21	48.32	54.00	5.68	Vertical
4924.00	54.16	-7.21	46.95	54.00	7.05	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

802.11g						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	61.29	-7.82	53.47	74.00	20.53	Vertical
4824.00	60.30	-7.82	52.48	74.00	21.52	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	55.53	-7.82	47.71	54.00	6.29	Vertical
4824.00	54.16	-7.82	46.34	54.00	7.66	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	61.00	-7.50	53.50	74.00	20.50	Vertical
4874.00	60.20	-7.50	52.70	74.00	21.30	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	55.53	-7.50	48.03	54.00	5.97	Vertical
4874.00	54.16	-7.50	46.66	54.00	7.34	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	61.25	-7.21	54.04	74.00	19.96	Vertical
4924.00	60.29	-7.21	53.08	74.00	20.92	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	55.53	-7.21	48.32	54.00	5.68	Vertical
4924.00	54.16	-7.21	46.95	54.00	7.05	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

802.11n-HT20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	60.90	-7.82	53.08	74.00	20.92	Vertical
4824.00	60.24	-7.82	52.42	74.00	21.58	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	55.53	-7.82	47.71	54.00	6.29	Vertical
4824.00	54.16	-7.82	46.34	54.00	7.66	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	61.02	-7.50	53.52	74.00	20.48	Vertical
4874.00	59.90	-7.50	52.40	74.00	21.60	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	55.53	-7.50	48.03	54.00	5.97	Vertical
4874.00	54.16	-7.50	46.66	54.00	7.34	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	61.28	-7.21	54.07	74.00	19.93	Vertical
4924.00	59.96	-7.21	52.75	74.00	21.25	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	55.53	-7.21	48.32	54.00	5.68	Vertical
4924.00	54.16	-7.21	46.95	54.00	7.05	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

802.11ax-HE20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	61.20	-7.82	53.38	74.00	20.62	Vertical
4824.00	60.07	-7.82	52.25	74.00	21.75	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	55.53	-7.82	47.71	54.00	6.29	Vertical
4824.00	54.16	-7.82	46.34	54.00	7.66	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	60.93	-7.50	53.43	74.00	20.57	Vertical
4874.00	60.03	-7.50	52.53	74.00	21.47	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	55.53	-7.50	48.03	54.00	5.97	Vertical
4874.00	54.16	-7.50	46.66	54.00	7.34	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	61.32	-7.21	54.11	74.00	19.89	Vertical
4924.00	59.86	-7.21	52.65	74.00	21.35	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	55.53	-7.21	48.32	54.00	5.68	Vertical
4924.00	54.16	-7.21	46.95	54.00	7.05	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

-----End of report-----