

A1-1改

Freq

EfficiencGain

Efficiency(%)

2400	-4.48	0.9	35.65
2410	-4.34	1.08	36.81
2420	-4.19	1.16	38.11
2430	-4.07	1.29	39.17
2440	-3.97	1.22	40.09
2450	-3.96	1.26	40.18
2460	-3.95	1.28	40.27
2470	-4.02	1.29	39.63
2480	-4.09	1.23	38.99
2490	-4.28	1.22	37.33
2500	-4.39	1.28	36.39
5150	-4.77	1.35	33.38
5160	-4.6	1.68	34.69
5170	-4.46	1.92	35.78
5180	-4.49	2.01	35.52
5190	-4.38	2.13	36.45
5200	-4.3	2.23	37.13
5210	-4.1	2.43	38.93
5220	-4.19	2.33	38.1
5230	-4.19	2.33	38.14
5240	-4.1	2.46	38.93
5250	-3.96	2.57	40.21
5260	-3.92	2.68	40.59
5270	-3.88	2.77	40.95
5280	-3.98	2.75	40.03
5290	-4	2.74	39.81
5300	-3.96	2.78	40.17
5310	-3.92	2.82	40.59
5320	-3.8	2.91	41.67
5330	-3.86	2.84	41.16
5340	-3.87	2.86	40.98
5350	-3.82	2.92	41.47
5360	-3.74	3.05	42.31
5370	-3.6	3.16	43.68
5380	-3.64	3.15	43.23
5390	-3.73	3.11	42.37
5400	-3.74	3.08	42.31
5410	-3.77	3.07	41.96
5420	-3.67	3.08	43
5430	-3.67	3.13	42.98
5440	-3.58	3.17	43.82
5450	-3.74	3.02	42.24
5460	-3.63	3.02	43.31
5470	-3.6	3.01	43.66
5480	-3.62	2.9	43.48
5490	-3.63	2.79	43.36
5500	-3.82	2.52	41.46
5510	-3.87	2.35	41.05
5520	-3.74	2.44	42.24
5530	-3.77	2.24	42
5540	-3.71	2.24	42.54
5550	-3.72	2.26	42.49

S11






Mode	CH	TRP	TIS
WIFI B	1	13.88	-81.36
	7	13.91	-80.91
	13	14.08	-81.49
WIFI A	36 (54M)	10.5	-63.9
	64 (54M)	10.52	-65.15
	161 (54M)	10.08	-65.54


EDR	chNO	TRP	TIS
BT	0	3.33	-82.41
	39	3.04	-82.01
	78	3.83	-82.33

天线	B10458-A2	WIFI&BT 2.4GHz/ WIFI 5GHz	浙江海通通讯电子股份有限公司
----	-----------	---------------------------	----------------


5560	-3.68	2.36	42.86
5570	-3.73	2.34	42.4
5580	-3.66	2.4	43.08
5590	-3.81	2.32	41.6
5600	-3.74	2.37	42.3
5610	-3.83	2.26	41.39
5620	-3.79	2.32	41.76
5630	-3.84	2.29	41.35
5640	-3.99	2.18	39.87
5650	-4.02	2.13	39.65
5660	-4.19	2.03	38.12
5670	-4.23	1.97	37.8
5680	-4.3	1.9	37.13
5690	-4.09	2.06	39.01
5700	-4.24	1.9	37.66
5710	-4.16	1.94	38.36
5720	-4.28	1.78	37.35
5730	-4.4	1.62	36.33
5740	-4.28	1.74	37.31
5750	-4.45	1.51	35.87
5760	-4.49	1.47	35.54
5770	-4.62	1.38	34.51
5780	-4.68	1.37	34.05
5790	-4.68	1.3	34.04
5800	-4.59	1.32	34.76
5810	-4.69	1.21	33.94
5820	-4.79	1.1	33.19
5830	-4.88	0.93	32.52
5840	-4.88	0.83	32.47
5850	-4.76	0.98	33.42

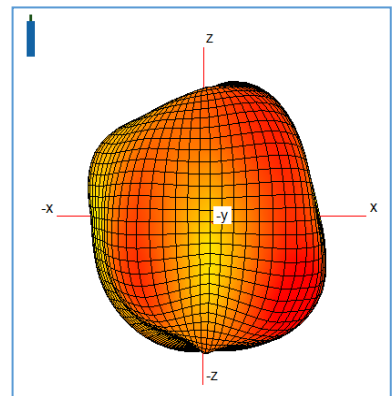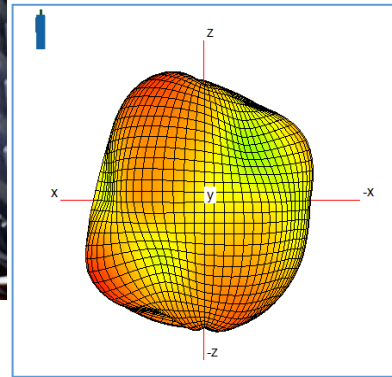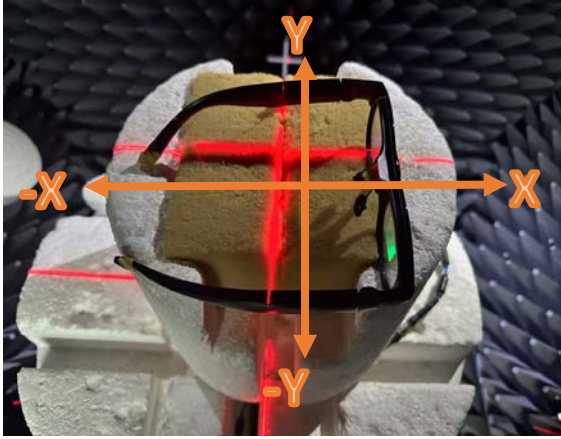


Theta90°



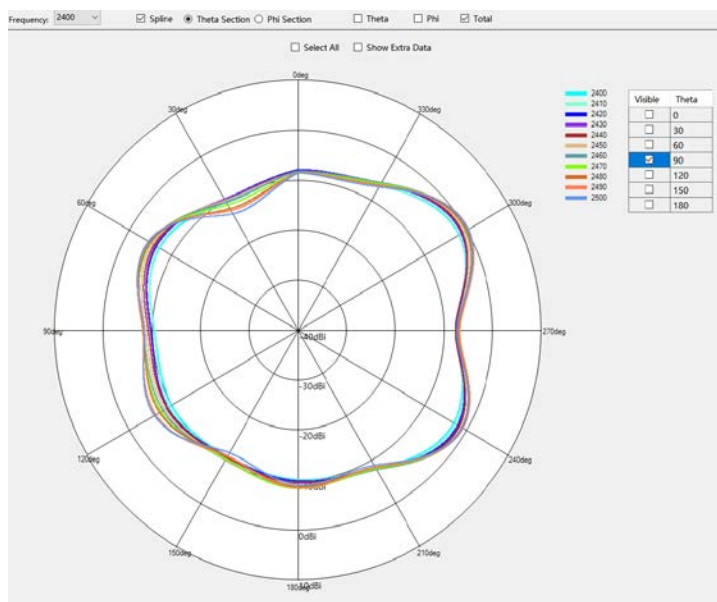


Phi0°

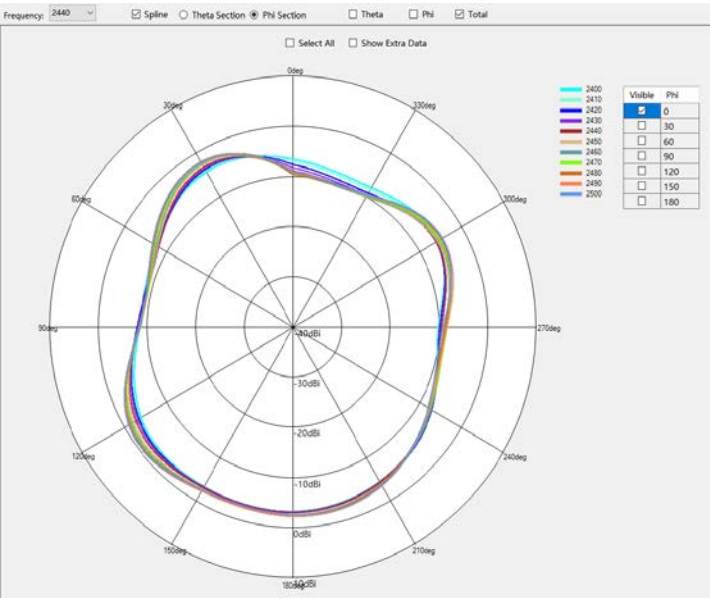


Phi90°

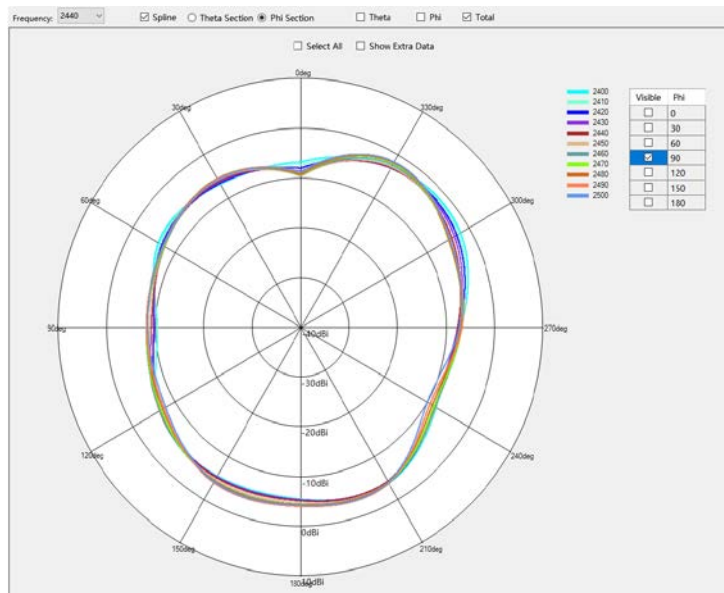


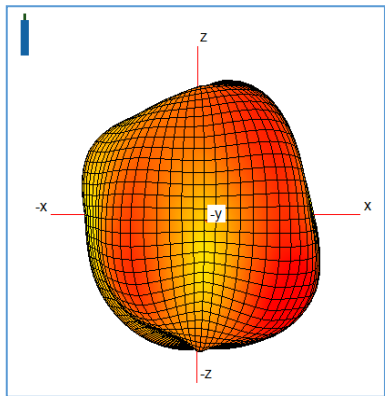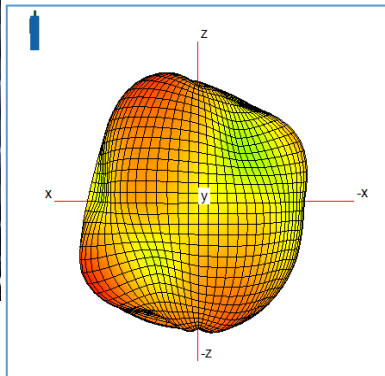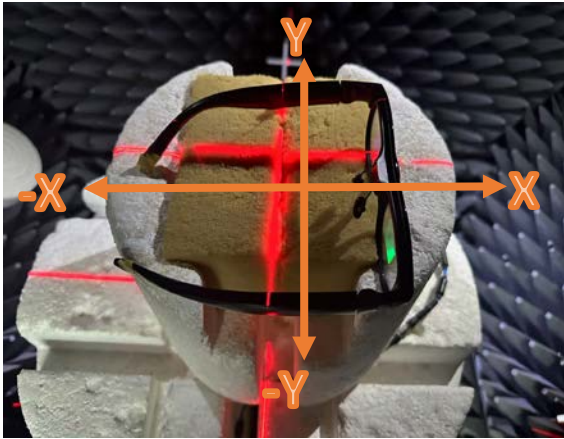


Theta90°

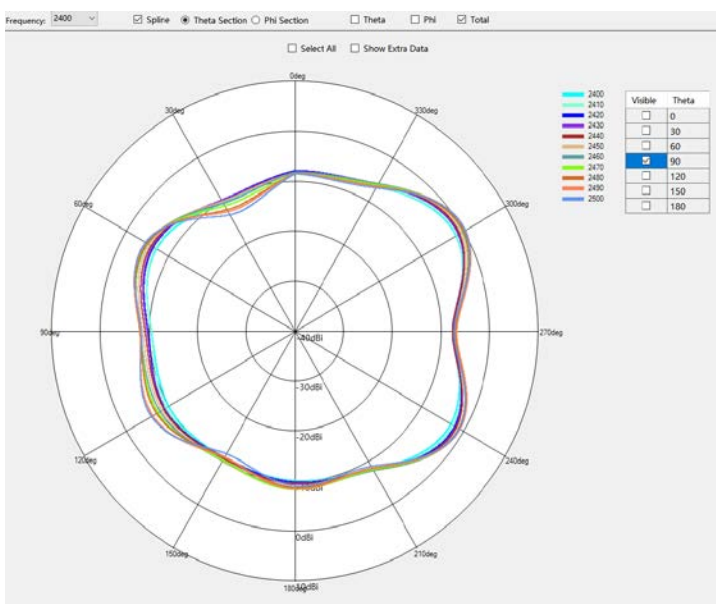


Theta90°

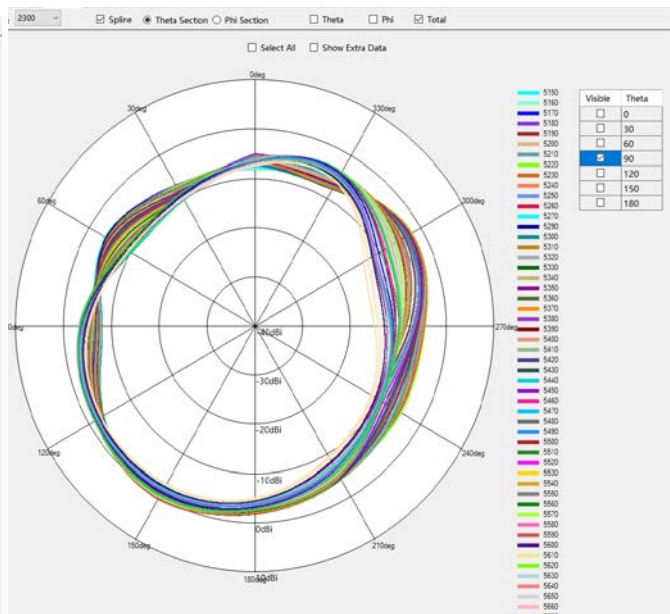


Phi0°

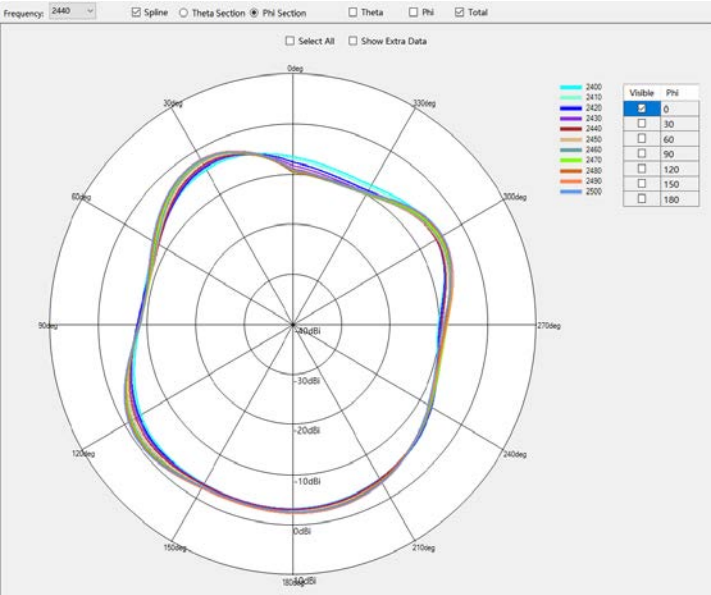

Phi0°

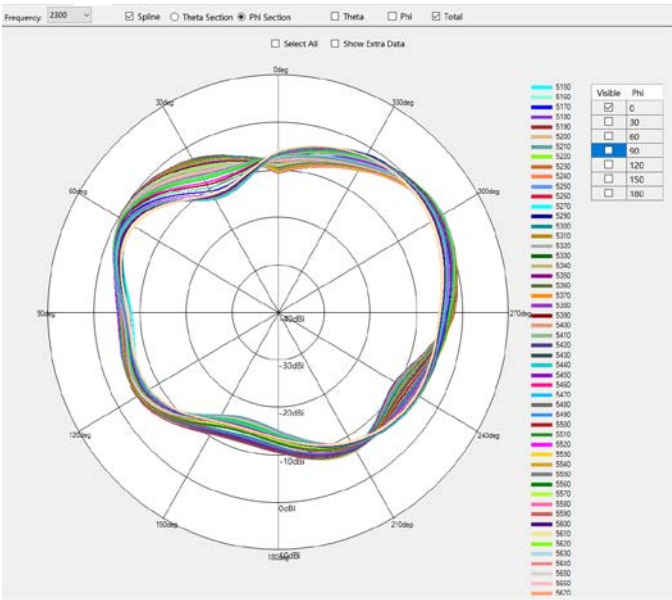

Phi90°

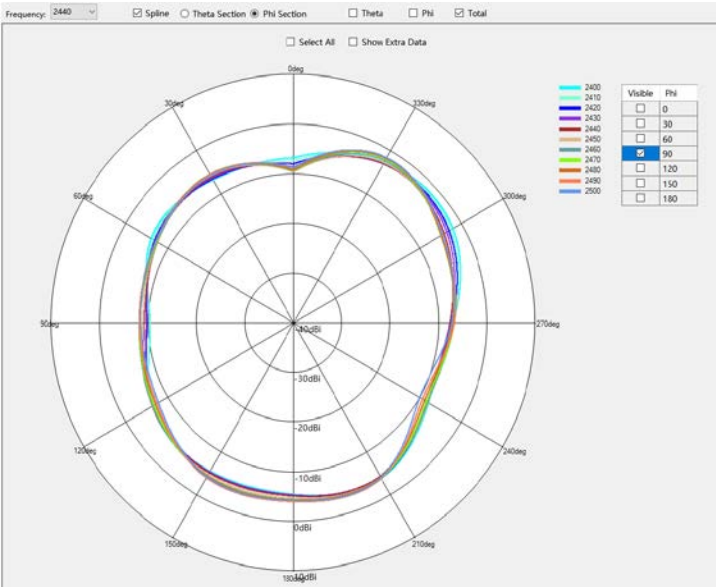

Phi90°

