

Report on the Radio Testing

For

Sound Devices LLC

on

A20-TX

Report no. TRA-061998-47-03B

6<sup>th</sup> February 2024

RF915 11.0



Report Number: TRA-061998-47-03B  
Issue: B

REPORT ON THE RADIO TESTING OF A  
Sound Devices LLC  
A20-TX  
WITH RESPECT TO SPECIFICATION  
FCC 47CFR 15.247

TEST DATE: 8th August 2023 - 13th September 2023

Tested by: D Winstanley, S Garwell

Written by: D Winstanley  
Radio Senior Test Engineer

Approved by: J Charters  
Lab Manager  
Date: 6th February 2024

Disclaimers:

- [1] THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE
- [2] THE RESULTS CONTAINED IN THIS DOCUMENT RELATE ONLY TO THE ITEM(S) TESTED

RF915 11.0



## 1 Revision Record

<b><i>Issue Number</i></b>	<b><i>Issue Date</i></b>	<b><i>Revision History</i></b>
A	6th February 2024	Original
B	6th February 2024	RMS output power results table added

## 2 Summary

TEST REPORT NUMBER: TRA-061998-47-03B

WORKS ORDER NUMBER: TRA-061998-00

PURPOSE OF TEST: Certification

TEST SPECIFICATION: 47CFR15.247 RSS-247

EQUIPMENT UNDER TEST (EUT): A20-TX

FCC IDENTIFIER: 2AKLX-9808

EUT SERIAL NUMBER: SP0223137018, SP0223137019

MANUFACTURER/AGENT: Sound Devices LLC

ADDRESS: E7556 State Road 23 and 33  
Reedsburg  
WI 53959

CLIENT CONTACT: Lee Stone  
☎ 01494 511711  
✉ lee.stone@audioltd.com

TEST DATE: 8th August 2023 - 13th September 2023

TESTED BY: D Winstanley, S Garwell  
Element

## 2.1 Test Summary

<b>Test Method and Description</b>		<b>Requirement Clause 47CFR15</b>	<b>Applicable to this equipment</b>	<b>Result / Note</b>
Radiated spurious emissions (restricted bands of operation and cabinet radiation)		15.247 (d)	<input checked="" type="checkbox"/>	Pass
AC power line conducted emissions		15.207	<input type="checkbox"/>	Note 1
Occupied bandwidth		15.247 (a) (2)	<input checked="" type="checkbox"/>	Pass
Conducted carrier power	Peak	15.247 (b) (3)	<input checked="" type="checkbox"/>	Pass
	Max.		<input type="checkbox"/>	
Out of band emissions		15.247 (d)	<input checked="" type="checkbox"/>	Pass
Power spectral density		15.247 (e)	<input checked="" type="checkbox"/>	Pass
Calculation of duty correction		-	<input type="checkbox"/>	-

### Specific Note:

1. The EUT is a battery powered device and can be used with rechargeable batteries, but as per client's declaration, it doesn't transmit while charging.

### General Notes:

The results contained in this report relate only to the items tested, in the condition at time of test, and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only. Any modifications made are identified in Section 8 of this report.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 5.2 of this test report (Deviations from Test Standards).

### General notes

The decision rule for compliance is not inherent within this specification and compliance is based on the customer requesting a simple acceptance rule based on understanding and acceptance of Elements Measurement Uncertainty values.

### 3 Contents

1	Revision Record .....	3
2	Summary .....	4
2.1	Test Summary .....	5
3	Contents .....	6
4	Introduction .....	7
5	Test Specifications .....	8
5.1	Normative References .....	8
5.2	Deviations from Test Standards .....	8
6	Glossary of Terms .....	9
7	Equipment under Test .....	10
7.1	EUT Identification .....	10
7.2	System Equipment .....	10
7.3	EUT Mode of Operation .....	10
7.4	EUT Radio Parameters .....	10
7.4.1	General .....	10
7.4.2	Antennas .....	11
7.4.3	Product specific declarations .....	11
7.5	EUT Description .....	11
8	Modifications .....	12
9	EUT Test Setup .....	13
9.1	Block Diagram .....	13
9.2	General Set-up Photograph .....	14
9.3	Measurement software .....	15
10	General Technical Parameters .....	16
10.1	Normal Conditions .....	16
10.2	Varying Test Conditions .....	16
11	Radiated emissions .....	17
11.1	Definitions .....	17
11.2	Test Parameters .....	17
11.3	Test Limit .....	17
11.4	Test Method .....	18
11.5	Test Equipment .....	19
11.6	Test Results .....	20
12	Occupied Bandwidth .....	23
12.1	Definition .....	23
12.2	Test Parameters .....	23
12.3	Test Limit .....	23
12.4	Test Method .....	24
12.5	Test Equipment .....	24
12.6	Test Results .....	25
13	Maximum peak conducted output power .....	26
13.1	Definition .....	26
13.2	Test Parameters .....	26
13.3	Test Limit .....	26
13.4	Test Method .....	27
13.5	Test Equipment .....	27
13.6	Test Results .....	28
13.7	Test Results (RMS) .....	29
14	Out-of-band and conducted spurious emissions .....	30
14.1	Definition .....	30
14.2	Test Parameters .....	30
14.3	Test Limit .....	30
14.4	Test Method .....	31
14.5	Test Equipment .....	31
14.6	Test Results .....	32
15	Power spectral density .....	35
15.1	Definition .....	35
15.2	Test Parameters .....	35
15.3	Test Limit .....	35
15.4	Test Method .....	36
15.5	Test Equipment .....	36
15.6	Test Results .....	37
16	Measurement Uncertainty .....	38

## 4 Introduction

This report TRA-061998-47-03B presents the results of the Radio testing on a Sound Devices LLC, A20-TX to specification 47CFR15 Radio Frequency Devices.

The testing was carried out for Sound Devices LLC by Element, at the address detailed below.

<input type="checkbox"/> Element Hull	<input checked="" type="checkbox"/> Element Skelmersdale	<input type="checkbox"/> Element Surrey Hills
Unit E	Unit 1	Unit 15 B
South Orbital Trading Park	Pendle Place	Henley Business Park
Hedon Road	Skelmersdale	Pirbright Road
Hull	West Lancashire	Normandy
HU9 1NJ	WN8 9PN	Guildford
UK	UK	GU3 2DX
		UK

This report details the configuration of the equipment, the test methods used and any relevant modifications where appropriate.

All test and measurement equipment under the control of the laboratory and requiring calibration is subject to an established programme and procedures to control and maintain measurement standards. The quality management system meets the principles of ISO 9001, and has quality control procedures for monitoring the validity of tests undertaken. Records and sufficient detail are retained to establish an audit trail of calibration records relating to its test results for a defined period. Under control of the established calibration programme, key quantities or values of the test & measurement instrumentation are within specification and comply with the relevant traceable internationally recognised and appropriate standard specifications, which are UKAS calibrated as such where these properties have a significant effect on results. Participation in inter-laboratory comparisons and proficiency testing ensures satisfactory correlation of results conform to Elements own procedures, as well as statistical techniques for analysis of test data providing the appropriate confidence in measurements.

Throughout this report EUT denotes equipment under test.

### FCC Site Listing:

The test laboratory is accredited for the above sites under the US-UK MRA,

#### Designation number(s):

Element Hull	UK2007
Element Skelmersdale	UK2020

The test site requirements of ANSI C63.4-2014 are met up to 1GHz.

The test site SVSWR requirements of CISPR 16-1-4:2010 are met over the frequency range 1 GHz to 18 GHz.

## 5 Test Specifications

### 5.1 *Normative References*

- FCC 47 CFR Ch. I – Part 15 – Radio Frequency Devices.
- ANSI C63.10-2013 – American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.
- ANSI C63.4-2014 – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

### 5.2 *Deviations from Test Standards*

There were no deviations from the test standard.

## 6 Glossary of Terms

<b>§</b>	denotes a section reference from the standard, not this document
<b>AC</b>	Alternating Current
<b>ANSI</b>	American National Standards Institute
<b>BW</b>	bandwidth
<b>C</b>	Celsius
<b>CFR</b>	Code of Federal Regulations
<b>CW</b>	Continuous Wave
<b>dB</b>	decibel
<b>dBm</b>	dB relative to 1 milliwatt
<b>DC</b>	Direct Current
<b>DSSS</b>	Direct Sequence Spread Spectrum
<b>EIRP</b>	Equivalent Isotropically Radiated Power
<b>ERP</b>	Effective Radiated Power
<b>EUT</b>	Equipment under Test
<b>FCC</b>	Federal Communications Commission
<b>FHSS</b>	Frequency Hopping Spread Spectrum
<b>Hz</b>	hertz
<b>IC</b>	Industry Canada
<b>ITU</b>	International Telecommunication Union
<b>LBT</b>	Listen before Talk
<b>m</b>	metre
<b>max</b>	maximum
<b>MIMO</b>	Multiple Input and Multiple Output
<b>min</b>	minimum
<b>MRA</b>	Mutual Recognition Agreement
<b>N/A</b>	Not Applicable
<b>PCB</b>	Printed Circuit Board
<b>PDF</b>	Portable Document Format
<b>Pt-mpt</b>	Point-to-multipoint
<b>Pt-pt</b>	Point-to-point
<b>RF</b>	Radio Frequency
<b>RH</b>	Relative Humidity
<b>RMS</b>	Root Mean Square
<b>Rx</b>	receiver
<b>s</b>	second
<b>SVSWR</b>	Site Voltage Standing Wave Ratio
<b>Tx</b>	transmitter
<b>UKAS</b>	United Kingdom Accreditation Service
<b>V</b>	volt
<b>W</b>	watt
<b>Ω</b>	ohm

## 7 Equipment under Test

### 7.1 EUT Identification

- Name: A20-TX
- Serial Number: SP0223137018, SP0223137019
- Model Number: 9808
- Software Revision: 7.50.8629
- Build Level / Revision Number: 02

### 7.2 System Equipment

Equipment listed below forms part of the overall test setup and is required for equipment functionality and/or monitoring during testing. The compliance levels achieved in this report relate only to the EUT and not items given in the following list.

*Element S15 USB Serial Cable*

*Element S23 Laptop*

### 7.3 EUT Mode of Operation

The EUT was programmed to operate on the required frequency and power setting. For setting the required parameters the EUT was connected to a PC via a USB serial cable and scripts were sent to the EUT. All other radios were disabled during test.

### 7.4 EUT Radio Parameters

#### 7.4.1 General

<b>Frequency of operation:</b>	902.4 MHz – 927.6 MHz
<b>Modulation type(s):</b>	COFDM
<b>Occupied channel bandwidth(s):</b>	520 kHz
<b>ITU emission designator(s):</b>	G2E
<b>Declared output power(s):</b>	27 dBm (Peak)
<b>Power Setting:</b>	40 mW (Mean Power)
<b>Nominal Supply Voltage:</b>	4.5 Vdc (Batteries)
<b>Duty cycle:</b>	100%

#### 7.4.2 Antennas

<b>Type:</b>	Whip Antenna
<b>Frequency range:</b>	902 MHz – 1015 MHz
<b>Impedance:</b>	50 Ohms
<b>Gain:</b>	3.47 dBi
<b>Polarisation:</b>	Omni
<b>Connector type:</b>	SMA
<b>Length:</b>	1/4 Wave
<b>Mounting:</b>	Screw on

#### 7.4.3 Product specific declarations

<b>Multiple antenna configuration(s), e.g. MIMO:</b>	No
<b>Fixed pt-pt operations (yes/no):</b>	No
<b>Installation manual advice on pt-pt operational restrictions (yes/no):</b>	No
<b>Fixed pt-mpt operations (yes/no):</b>	No
<b>Simultaneous tx (yes/no):</b>	No

#### 7.5 EUT Description

The A20-TX is a body-worn wireless microphone transmitter intended for professional "Programme Making and Special Events" (PMSE) applications.


## **8 Modifications**

No modifications were performed during this assessment.

## 9 EUT Test Setup

### 9.1 *Block Diagram*

The following diagram shows basic EUT interconnections with cable type and cable lengths identified:

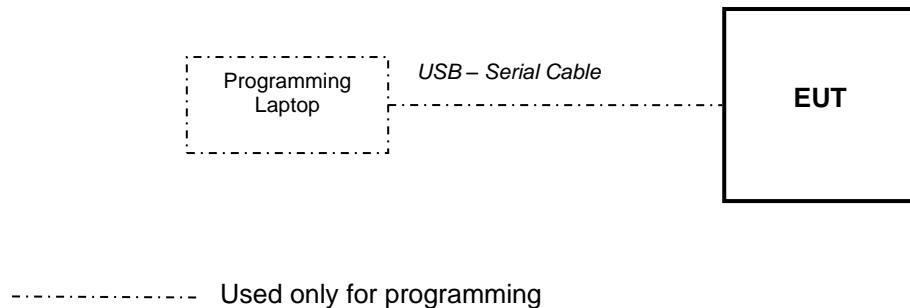

## 9.2 General Set-up Photograph

The following photograph shows basic EUT set-up:



### **9.3 *Measurement software***

Where applicable, the following software was used to perform measurements contained within this report.

Element Emissions R5

## 10 General Technical Parameters

### 10.1 Normal Conditions

The EUT was tested under the normal environmental conditions of the test laboratory, except where otherwise stated. The normal power source applied was 4.5 Vdc from batteries supplied by the manufacturer.

### 10.2 Varying Test Conditions

There are no specific frequency stability requirements for the type of device. The results contained in this report demonstrate that the occupied bandwidth is contained within the authorised band.

Variation of supply voltage is required to ensure stability of the declared output power. During carrier power testing the following variations were made:

	<b>Category</b>	<b>Nominal</b>	<b>Variation</b>
<input type="checkbox"/>	Mains	110 Vac +/- 2 %	85 % and 115 %
<input checked="" type="checkbox"/>	Battery	New battery	N/A

## 11 Radiated emissions

### 11.1 Definitions

#### *Spurious emissions*

Emissions on a frequency or frequencies, which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude out-of-band emissions.

#### *Restricted bands*

A frequency band in which intentional radiators are permitted to radiate only spurious emissions but not fundamental signals.

### 11.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	SK03 Radio Chamber
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.5 and 6.6
EUT Frequencies Measured:	902.4 MHz, 915.0 MHz & 927.6 MHz
Deviations from Standard:	None
Measurement BW:	30 MHz to 1 GHz: 120 kHz; Above 1 GHz: 1 MHz
Measurement Detector:	Up to 1 GHz: quasi-peak; Above 1 GHz: RMS average and Peak

### Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 54 % RH	20 % RH to 75 % RH (as declared)
Supply: 4.5 Vdc	4.5 Vdc (as declared)

### 11.3 Test Limit

Unwanted emissions that fall within the restricted frequency bands shall comply with the limits specified:

#### General Field Strength Limits for License-Exempt Transmitters at Frequencies above 30 MHz

Frequency (MHz)	Field Strength (µV/m at 3 m)	Field Strength (dBµV/m at 3 m)
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

On frequencies below or equal to 1000 MHz, the limits shown are based on measuring equipment employing a CISPR quasi-peak detector function. On frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit.

#### 11.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure i, the emissions from the EUT were measured on a spectrum analyzer / EMI receiver.

Radiated electromagnetic emissions from the EUT are checked first by preview scans. Preview scans for all spectrum and modulation characteristics are checked, using a peak detector and where applicable worst-case determined for function, operation, orientation, etc. for both vertical and horizontal polarisations. Pre-scan plots are shown with a peak detector and 100 kHz RBW.

If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.10 are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed, (see EUT setup photographs for more detail).

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. Emissions above 1 GHz are characterized using standard gain horn antennas. Pre-amplifiers and filters are used where required. Care is taken to ensure that test receiver resolution bandwidth, video bandwidth and detector type(s) meet the regulatory requirements.

For both horizontal and vertical polarizations, the EUT is then rotated through 360 degrees in azimuth until the highest emission is detected. At the previously determined azimuth the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected, this maximum value is recorded.

Power values measured on the test receiver / analyzer are converted to field strength, FS, in  $\text{dB}\mu\text{V}/\text{m}$  at the regulatory distance, using:

$$\text{FS} = \text{PR} + \text{CL} + \text{AF} - \text{PA} + \text{DC} - \text{CF}$$

$$\text{Factor} = \text{PR} + \text{CL} + \text{AF}$$

Where,

PR is the power recorded on the receiver / spectrum analyzer in  $\text{dB}\mu\text{V}$ ;

CL is the cable loss in dB;

AF is the test antenna factor in dB/m;


PA is the pre-amplifier gain in dB (where used);

DC is the duty correction factor in dB (where used, e.g. harmonics of pulsed fundamental);

CF is the distance factor in dB (where measurement distance different to limit distance);

This field strength value is then compared with the regulatory limit.

**Figure i Test Setup**

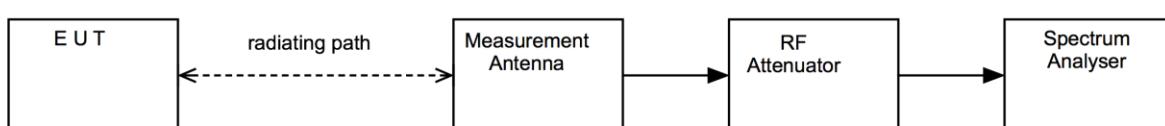


### 11.5 Test Equipment



<i>Equipment Type</i>	<i>Manufacturer</i>	<i>Equipment Description</i>	<i>Element No</i>	<i>Due For Calibration</i>
Spectrum Analyser	R&S	FSU26	U405	2024-05-22
Bilog	Chase	CBL611/B	U573	2024-10-14
PreAmp	Watkins Johnson	6201-69	U372	2024-03-07
1-18GHz Horn	EMCO	3115	L139	2024-07-01
Horn 18-26GHz (&U330)	Flann	20240-20	L300	2024-06-30
Pre Amp	Agilent	8449B	U457	2024-01-24
High Pass Filter	MiniCircuits	VHF-1500+	U519	2024-02-08
High Pass Filter	Atlantic Microwave	AFH-07000	U558	2024-02-13
Radiated Test Software	Element	Emissions R5	REF9000	Cal not required
Radio Chamber - PP	Rainford EMC	ATS	REF940	2023-11-06

## 11.6 Test Results



FREQUENCY: 902.40 MHz; POWER SETTING: 40 mW

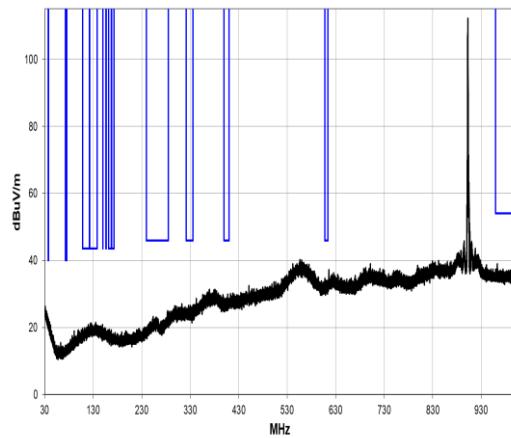

30 MHz to 1 GHz

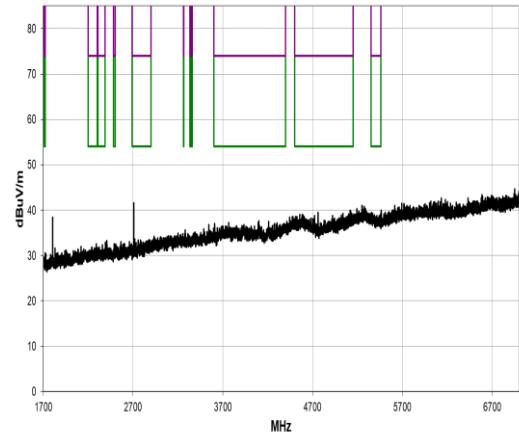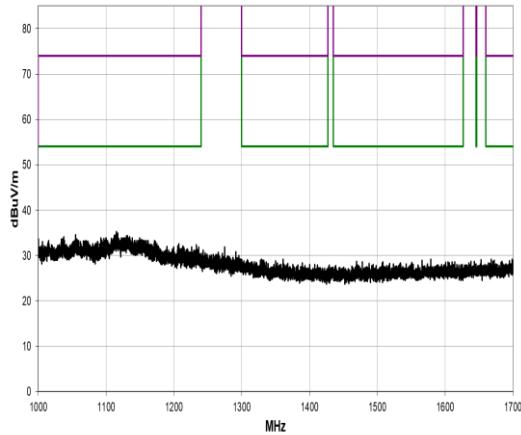

1 GHz to 1.7 GHz

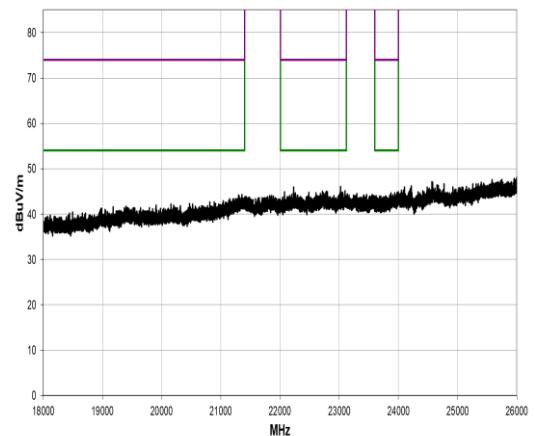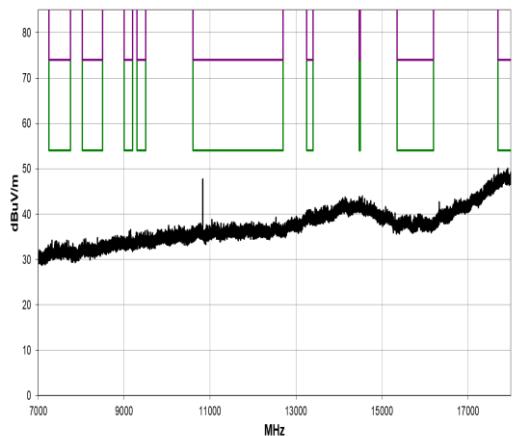


7 GHz to 18 GHz



18 GHz to 26 GHz

Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
2707.133	57.0	-1.8	1.76	151.9	3.0	0.0	Vert	PK	0.0	55.2	74.0	-18.8
2707.325	54.6	-1.8	1.06	133.9	3.0	0.0	Horz	PK	0.0	52.8	74.0	-21.2
2707.367	33.3	-1.8	1.76	151.9	3.0	0.0	Vert	AV	0.0	31.5	54.0	-22.5
2707.250	33.0	-1.8	1.06	133.9	3.0	0.0	Horz	AV	0.0	31.2	54.0	-22.8
10828.880	43.9	13.5	1.5	348.9	1.0	0.0	Horz	AV	-9.5	47.9	54.0	-6.1
10829.040	35.7	13.5	1.5	306.0	1.0	0.0	Vert	AV	-9.5	39.7	54.0	-14.3
10828.820	50.0	13.5	1.5	348.9	1.0	0.0	Horz	PK	-9.5	54.0	74.0	-20.0
10829.010	47.5	13.5	1.5	306.0	1.0	0.0	Vert	PK	-9.5	51.5	74.0	-22.5


FREQUENCY: 915.00 MHz; POWER SETTING: 40 mW

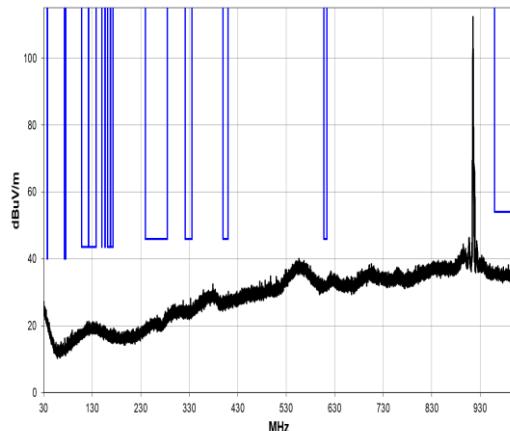


30 MHz to 1 GHz

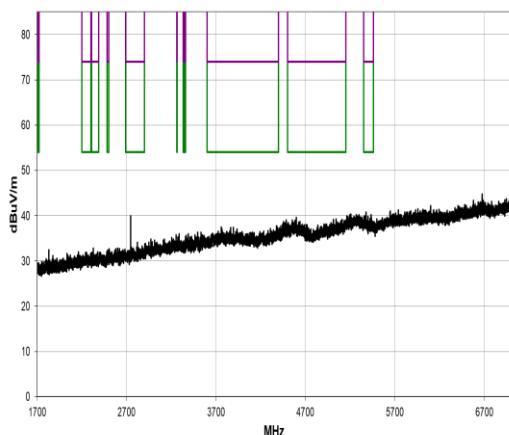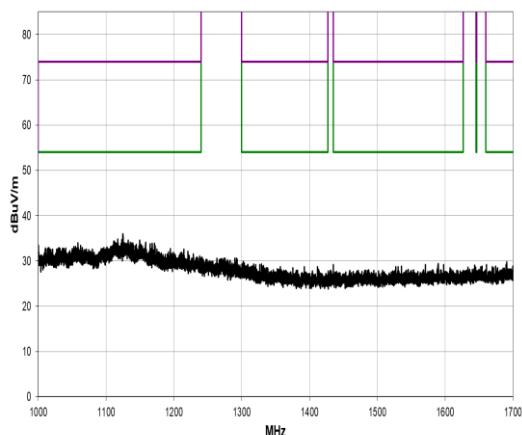

1 GHz to 1.7 GHz

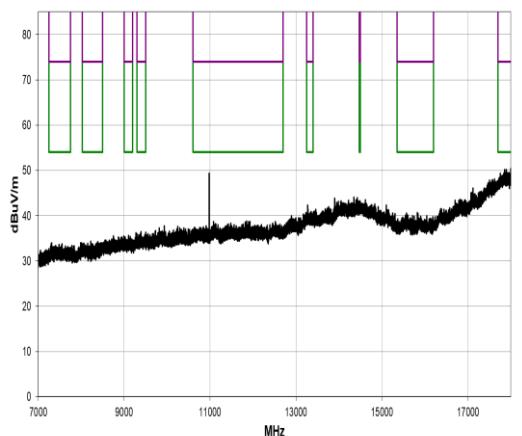

1.7 GHz to 7 GHz

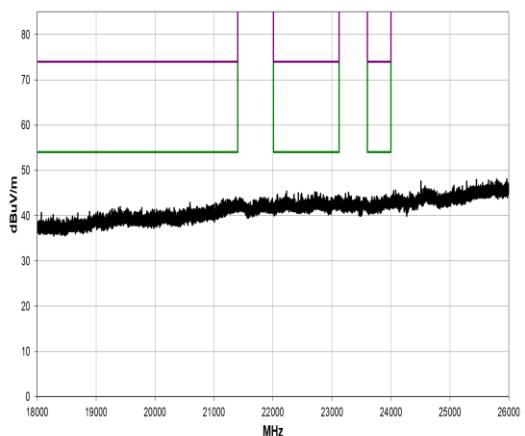


7 GHz to 18 GHz



18 GHz to 26 GHz

Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
2745.175	59.2	-1.8	1.39	144.0	3.0	0.0	Horz	PK	0.0	57.4	74.0	-16.6
2744.933	55.8	-1.8	1.5	167.0	3.0	0.0	Vert	PK	0.0	54.0	74.0	-20.0
2745.075	34.2	-1.8	1.39	144.0	3.0	0.0	Horz	AV	0.0	32.4	54.0	-21.6
2745.025	33.6	-1.8	1.5	167.0	3.0	0.0	Vert	AV	0.0	31.8	54.0	-22.2
10979.940	44.1	13.7	1.5	338.1	1.0	0.0	Horz	AV	-9.5	48.3	54.0	-5.7
10980.000	43.2	13.7	1.85	340.0	1.0	0.0	Vert	AV	-9.5	47.4	54.0	-6.6
10980.020	49.6	13.7	1.5	338.1	1.0	0.0	Horz	PK	-9.5	53.8	74.0	-20.2
10980.030	48.7	13.7	1.85	340.0	1.0	0.0	Vert	PK	-9.5	52.9	74.0	-21.1


FREQUENCY: 927.60 MHz; POWER SETTING: 40 mW

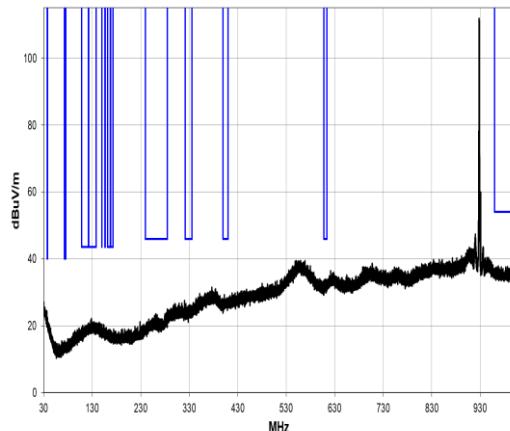


30 MHz to 1 GHz

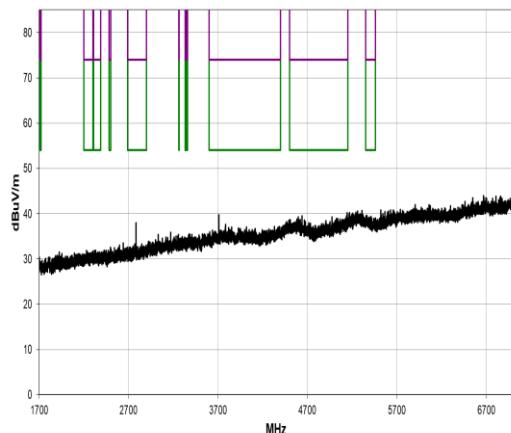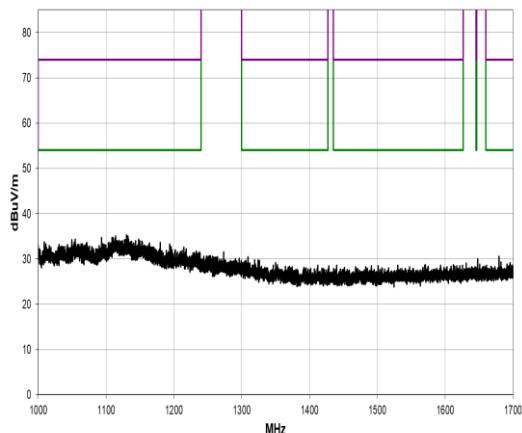

1 GHz to 1.7 GHz

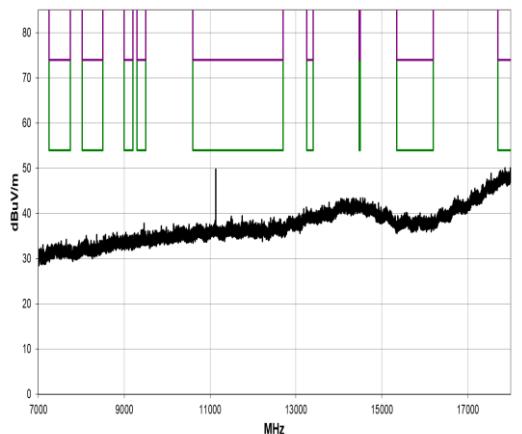

1.7 GHz to 7 GHz

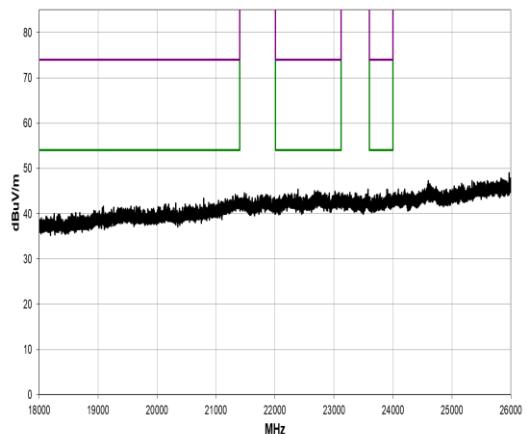

7 GHz to 18 GHz

18 GHz to 26 GHz

Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
2783.570	56.4	-1.6	1.46	139.0	3.0	0.0	Vert	PK	0.0	54.8	74.0	-19.2
3711.270	52.2	2.4	1.5	178.0	3.0	0.0	Vert	PK	0.0	54.6	74.0	-19.4
3711.062	32.0	2.4	1.5	178.0	3.0	0.0	Vert	AV	0.0	34.4	54.0	-19.6
3711.170	31.2	2.4	1.7	60.0	3.0	0.0	Horz	AV	0.0	33.6	54.0	-20.4
2783.695	54.2	-1.6	1.5	214.0	3.0	0.0	Horz	PK	0.0	52.6	74.0	-21.4
3710.953	49.2	2.4	1.7	60.0	3.0	0.0	Horz	PK	0.0	51.6	74.0	-22.4
2783.420	33.2	-1.6	1.46	139.0	3.0	0.0	Vert	AV	0.0	31.6	54.0	-22.4
2783.245	32.8	-1.7	1.5	214.0	3.0	0.0	Horz	AV	0.0	31.1	54.0	-22.9
11133.580	45.9	13.7	1.79	321.1	1.0	0.0	Vert	AV	-9.5	50.1	54.0	-3.9
11133.500	44.9	13.7	1.5	17.0	1.0	0.0	Horz	AV	-9.5	49.1	54.0	-4.9
11133.540	50.8	13.7	1.79	321.1	1.0	0.0	Vert	PK	-9.5	55.0	74.0	-19.0
11133.540	50.6	13.7	1.5	17.0	1.0	0.0	Horz	PK	-9.5	54.8	74.0	-19.2

## 12 Occupied Bandwidth

### 12.1 *Definition*

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal.

The 99% emission bandwidth is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained.

### 12.2 *Test Parameters*

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 11.8
EUT Frequencies Measured:	902.4 MHz / 915.0 MHz / 927.6 MHz
EUT Test Modulations:	COFDM
Deviations From Standard:	None
Measurement BW:	100kHz
Spectrum Analyzer Video BW:	300 kHz
Measurement Span:	2 MHz
Measurement Detector:	Peak

### Environmental Conditions (Normal Environment)

Temperature: 24 °C	+15 °C to +35 °C (as declared)
Humidity: 58 % RH	20 % RH to 75 % RH (as declared)

### 12.3 *Test Limit*


The minimum -6 dB bandwidth shall be at least 500 kHz.

## 12.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure iii, the bandwidth of the EUT was measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

**Figure iii Test Setup**


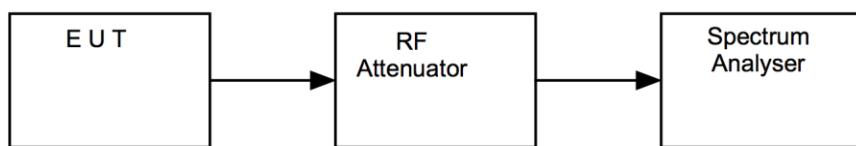


## 12.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
Spectrum Analyser	R&S	FSU46	REF910	2024-01-10
Signal Generator	R&S	SMBV100A	U674	2024-05-02
20 dB Attenuator	Atlantec	AA18-20H	U631	In Use

## 12.6 Test Results

Bandwidth Type: 6 dB; Power setting: 40 mW Setting				
Frequency (MHz)	$F_L$ (MHz)	$F_H$ (MHz)	Bandwidth (kHz)	Result
902.4	902.1403846	902.6724359	532.051282	PASS
915.0	914.7275641	915.2692308	541.666666	PASS
927.6	927.3339744	927.8628205	528.846154	PASS

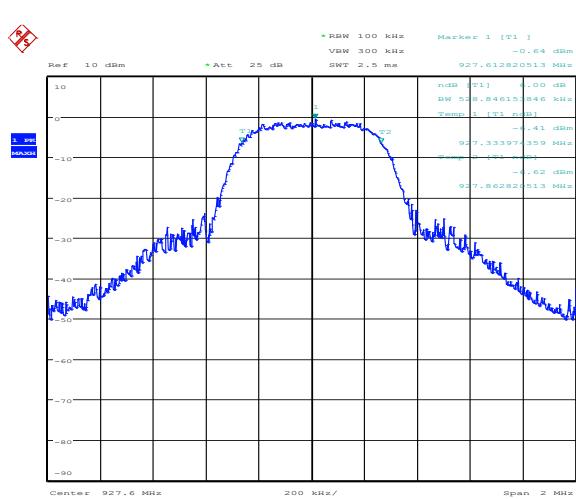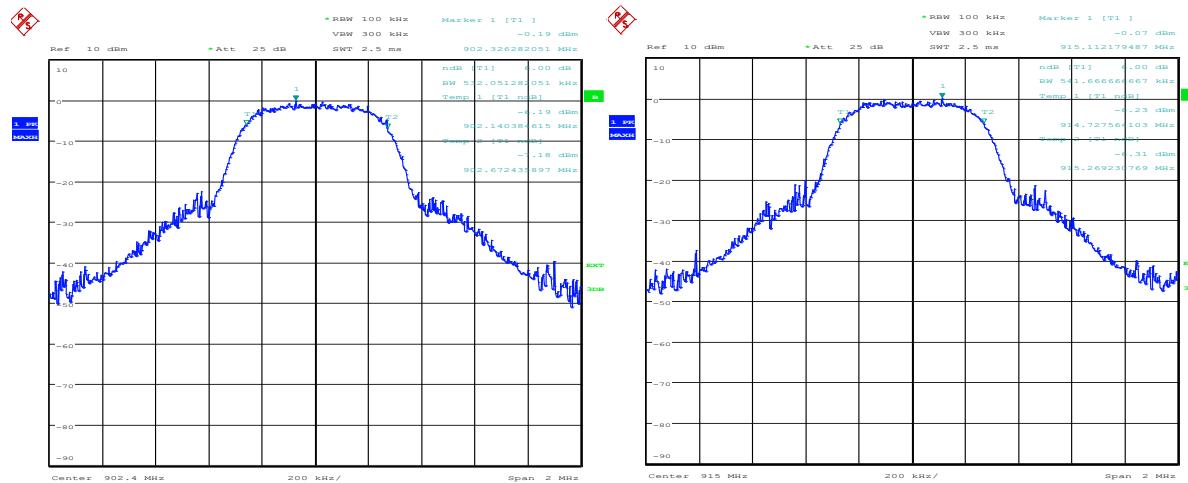

## 13 Maximum peak conducted output power

### 13.1 *Definition*

The maximum peak conducted output power is defined as the maximum power level measured with a peak detector using a filter with width and shape of which is sufficient to accept the signal bandwidth.

The effective isotropic radiated power (EIRP) is defined as the product of the power supplied to the antenna and the antenna gain in a given direction relative to an isotropic antenna.

### 13.2 *Test Parameters*

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 11.9.1
EUT Channels / Frequencies Measured:	902.4 MHz / 915.0 MHz / 927.6 MHz
Deviations From Standard:	None
Measurement BW:	3 MHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	10 MHz
Measurement Detector:	Peak
Voltage Extreme Environment Test Range:	Battery Power = new battery.

### Environmental Conditions (Normal Environment)

Temperature: 24 °C	+15 °C to +35 °C (as declared)
Humidity: 58 % RH	20 % RH to 75 % RH (as declared)

### 13.3 *Test Limit*


For systems employing digital modulation techniques operating in the bands 902 to 928 MHz, 2400 to 2483.5 MHz and 5725 to 5850 MHz, the maximum peak conducted output power shall not exceed 1 W.

### 13.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure iv, the resolution bandwidth of the spectrum analyser was increased above the EUT occupied bandwidth and the peak emission data noted.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

**Figure iv Test Setup**


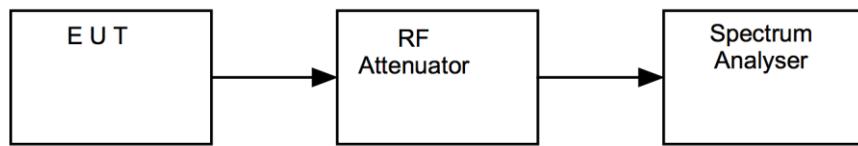


### 13.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
Spectrum Analyser	R&S	FSU46	REF910	2024-01-10
Signal Generator	R&S	SMBV100A	U674	2024-05-02
20 dB Attenuator	Atlantec	AA18-20H	U631	In Use
RF Power Meter	Dare	RPR3006W	REF2333	2024-03-03

### 13.6 Test Results

Power setting: 40 mW Setting			
Frequency (MHz)	Maximum peak conducted output power		Result
	(dBm)	(mW)	
902.4	27.49	561.05	PASS
915.0	27.44	554.63	PASS
927.6	27.72	591.56	PASS

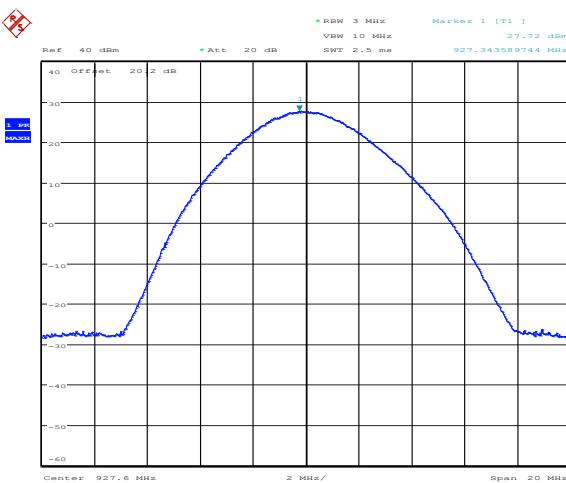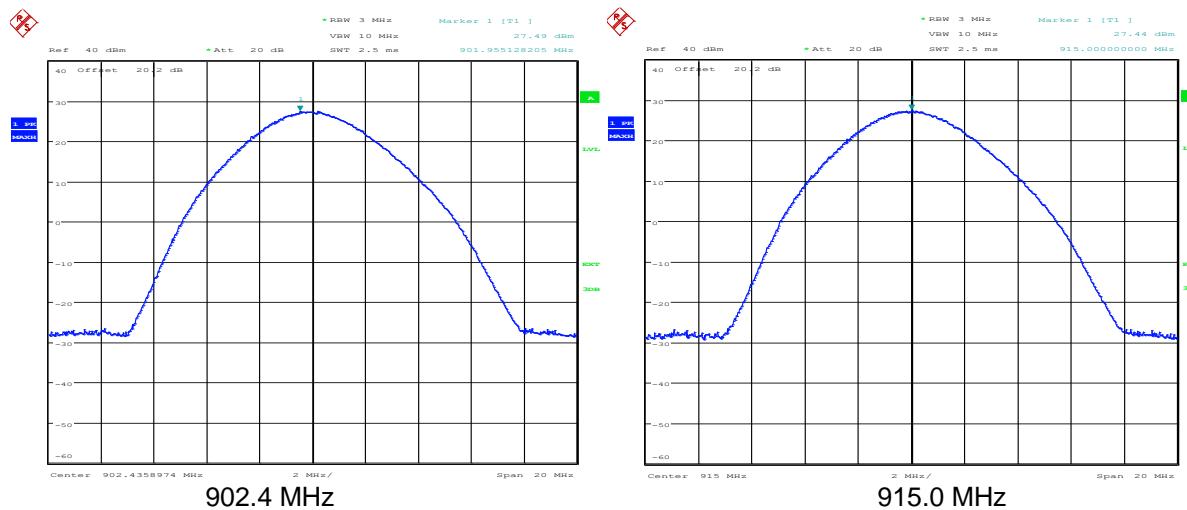

### 13.7 Test Results (RMS)

<b>Power setting: 40 mW Setting</b>			
<b>Frequency (MHz)</b>	<b>Maximum RMS conducted output power</b>		<b>Result</b>
	<b>(dBm)</b>	<b>(mW)</b>	
902.4	15.66	36.81	PASS
915.0	16.00	39.81	PASS
927.6	15.70	37.15	PASS

## 14 Out-of-band and conducted spurious emissions

### 14.1 Definition

*Out-of-band emission.*

Emission on a frequency or frequencies immediately outside the necessary bandwidth that results from the modulation process but excluding spurious emissions.

*Spurious emission.*

Emission on a frequency or frequencies that are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products, and frequency conversion products, but exclude out-of-band emissions.

### 14.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 11.11
EUT Channels / Frequencies Measured:	902.4 MHz / 915.0 MHz / 927.6 MHz
Deviations From Standard:	None
Measurement BW:	100 kHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	300 kHz
Measurement Detector:	Peak
Measurement Range:	9 kHz to 10 GHz

### Environmental Conditions (Normal Environment)

Temperature: 24 °C	+15 °C to +35 °C (as declared)
Humidity: 58 % RH	20 % RH to 75 % RH (as declared)

### 14.3 Test Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in FCC 47CFR15.209(a) / RSS-Gen is not required.

#### 14.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure v, the emissions from the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst case configuration in each bandwidth.

**Figure v Test Setup**

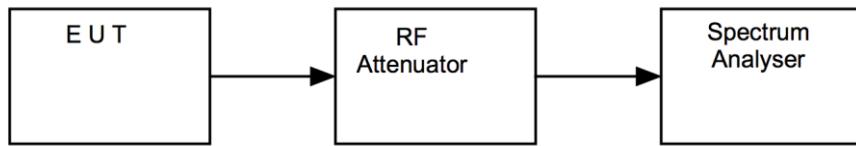


#### 14.5 Test Equipment


Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
Spectrum Analyser	R&S	FSU46	REF910	2024-01-10
Signal Generator	R&S	SMBV100A	U674	2024-05-02
20 dB Attenuator	Atlantec	AA18-20H	U631	In Use

## 14.6 Test Results


Frequency: 902.4 MHz, Power setting: 40 mW Setting						
Channel Frequency (MHz)	Emission Frequency (MHz)	Analyzer Level (dBm)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
No Significant Emissions within 20 dB of limit						PASS

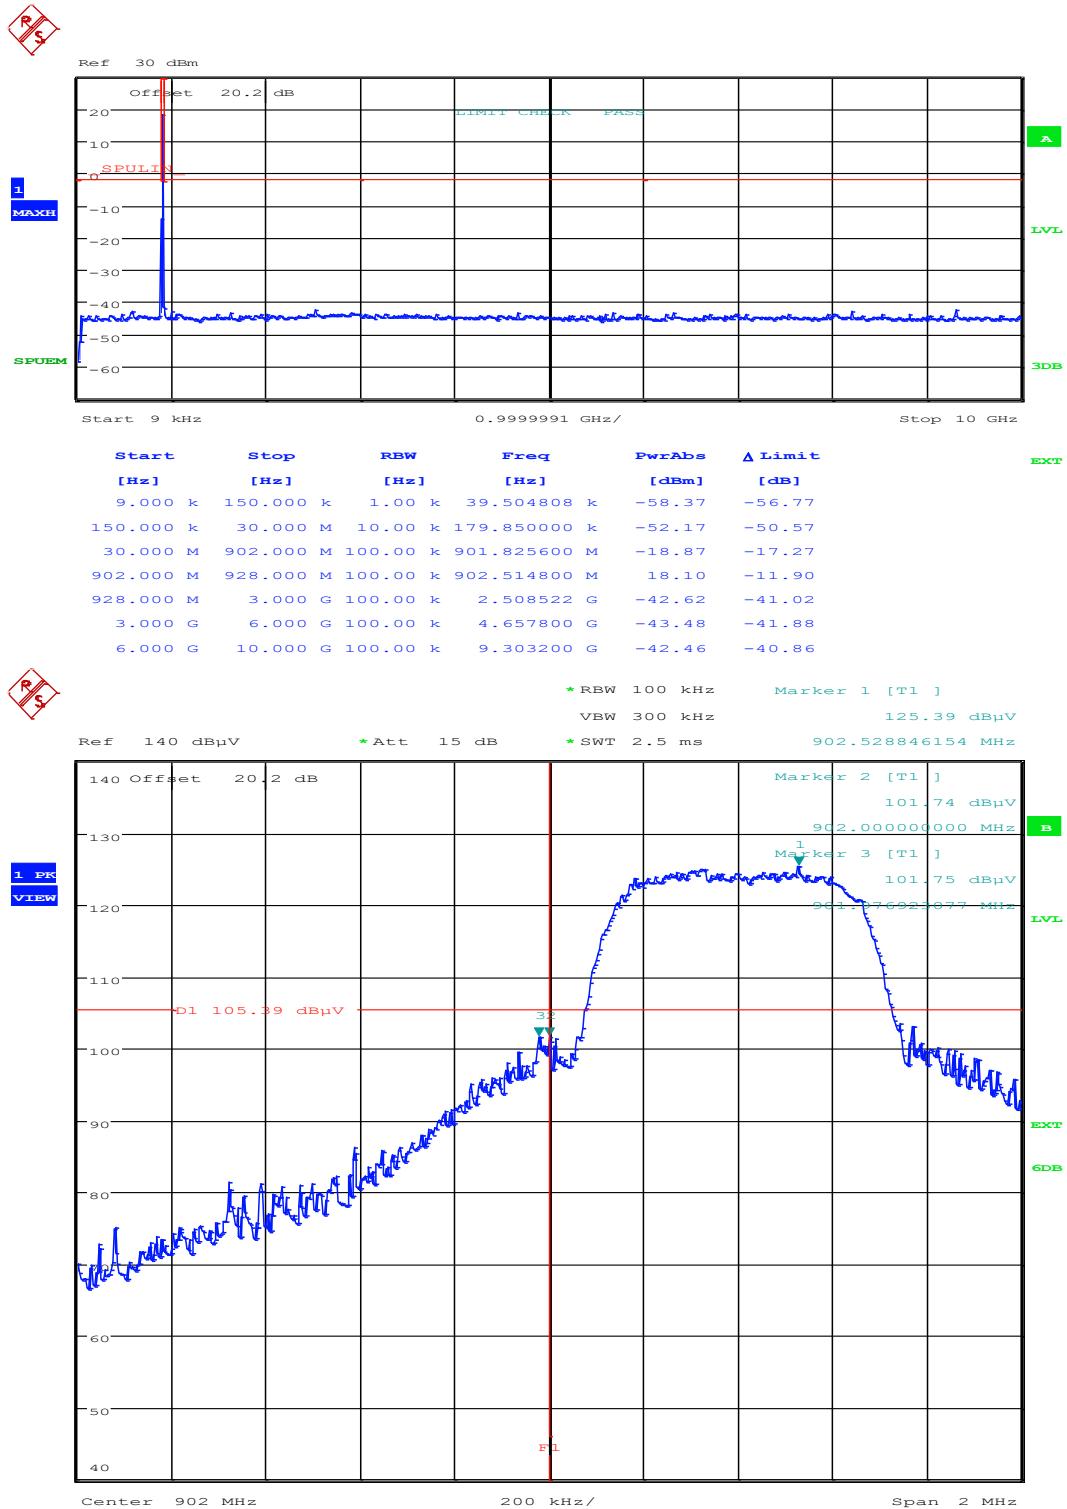

Frequency: 915.0 MHz, Power setting: 40 mW Setting						
Channel Frequency (MHz)	Emission Frequency (MHz)	Analyzer Level (dBm)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
No Significant Emissions within 20 dB of limit					PASS	

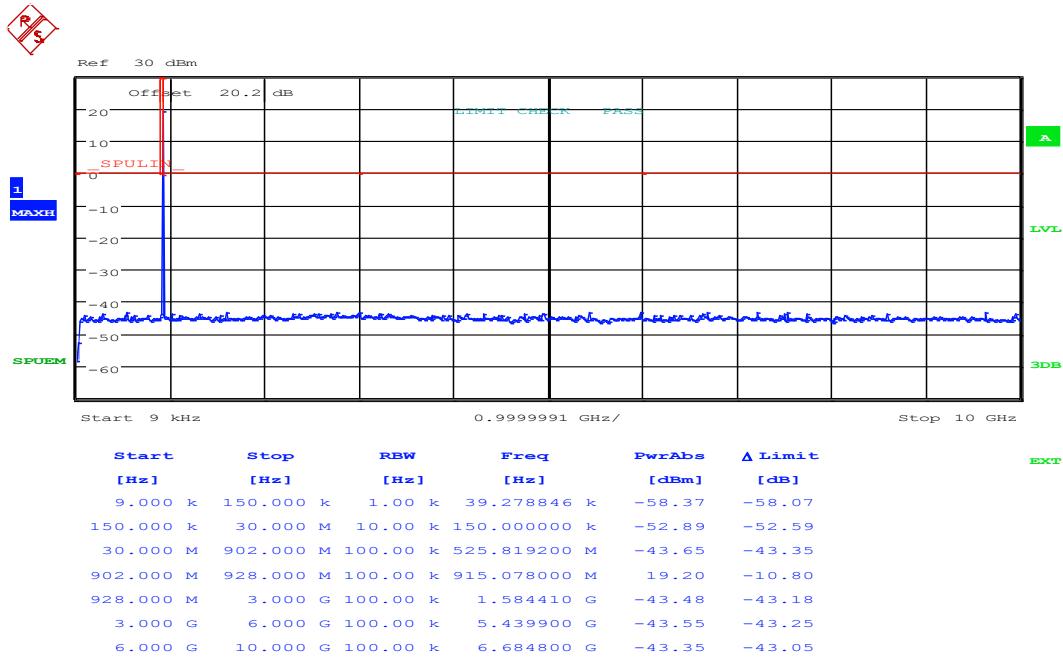

Frequency: 927.6 MHz, Power setting: 40 mW Setting						
Channel Frequency (MHz)	Emission Frequency (MHz)	Analyzer Level (dBm)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
No Significant Emissions within 20 dB of limit						PASS

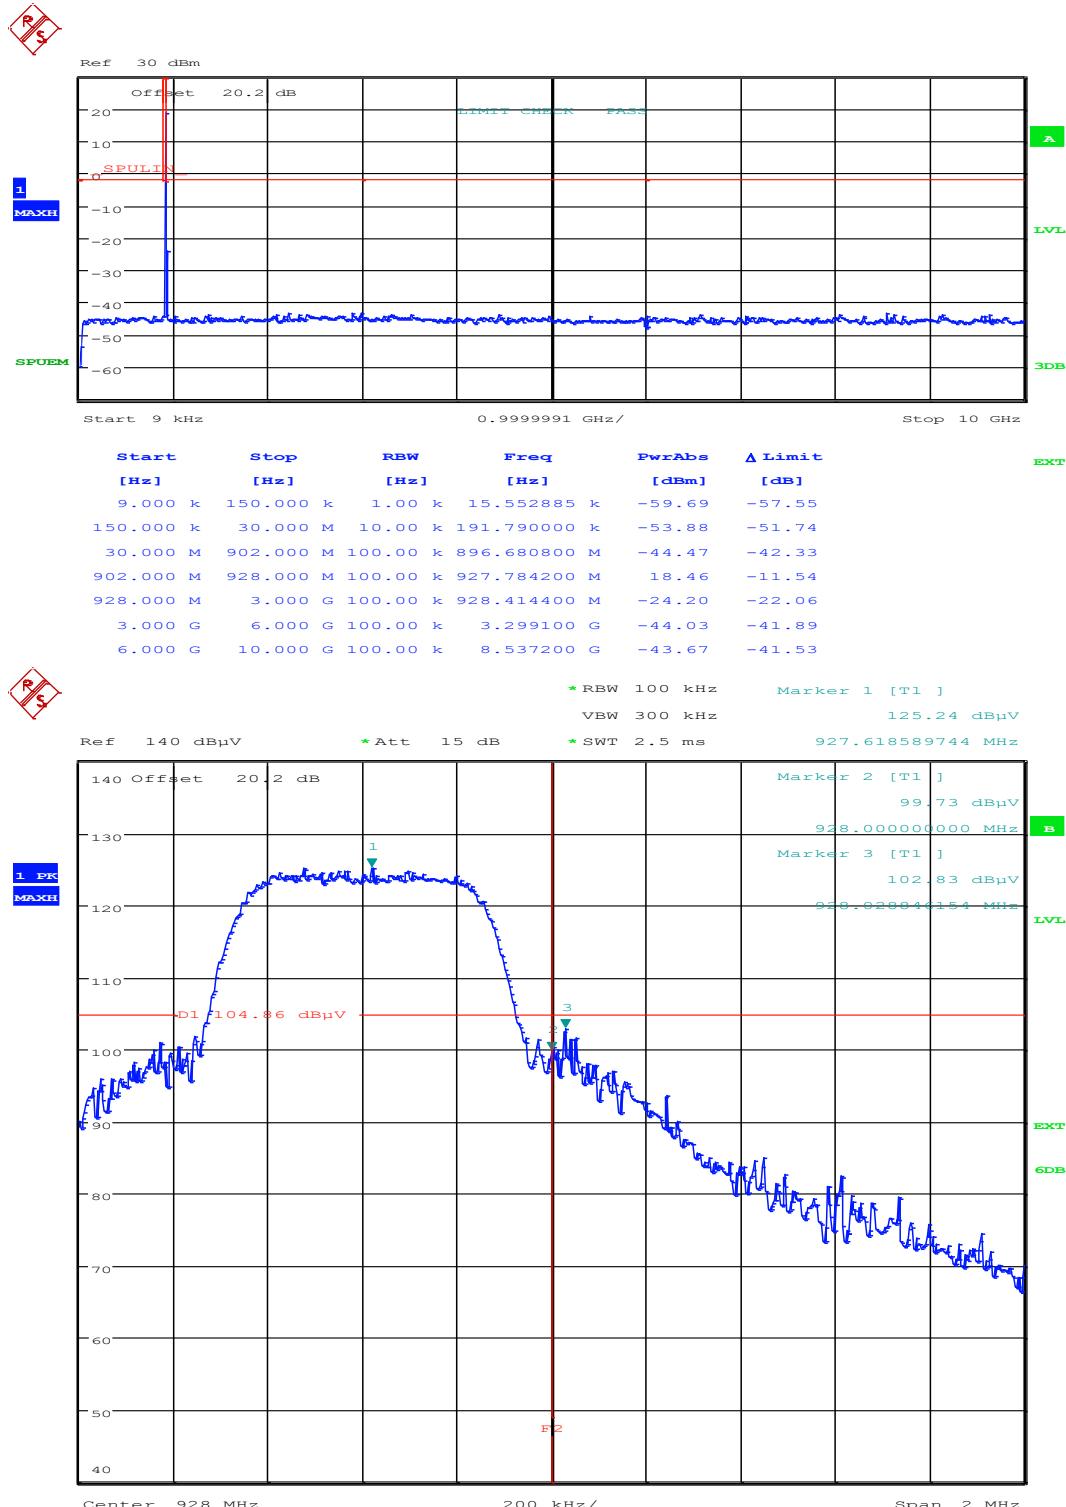

## 15 Power spectral density

### 15.1 *Definition*

The power per unit bandwidth.

### 15.2 *Test Parameters*

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 11.10
EUT Channels / Frequencies Measured:	902.4 MHz / 915.0 MHz / 927.6 MHz
Deviations From Standard:	None
Measurement BW:	3 kHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	10 kHz
Measurement Span: (requirement 1.5 times Channel BW)	800 kHz
Measurement Detector:	Peak

### **Environmental Conditions (Normal Environment)**

Temperature: 24 °C	+15 °C to +35 °C (as declared)
Humidity: 58 % RH	20 % RH to 75 % RH (as declared)

### 15.3 *Test Limit*


The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 15.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure vi, the peak emission of the EUT was measured on a spectrum analyser, with path losses taken into account.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst case configuration in each bandwidth.

**Figure vi Test Setup**

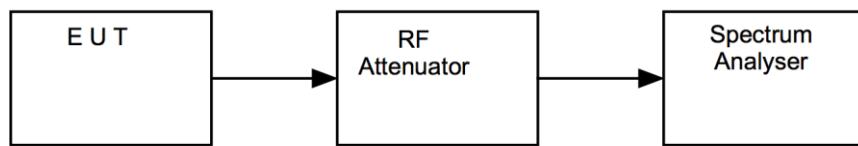


#### 15.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
Spectrum Analyser	R&S	FSU46	REF910	2024-01-10
Signal Generator	R&S	SMBV100A	U674	2024-05-02
20 dB Attenuator	Atlantec	AA18-20H	U631	In Use


## 15.6 Test Results

PSD Results, Power setting: 40 mW Setting				
Channel Frequency (MHz)	Analyzer Level (dBm)	Cable loss (dB)	Power (dBm)	Result
902.4	-17.75	20.20	2.45	PASS
915	-17.62	20.20	2.58	PASS
927.6	-16.78	20.20	3.42	PASS

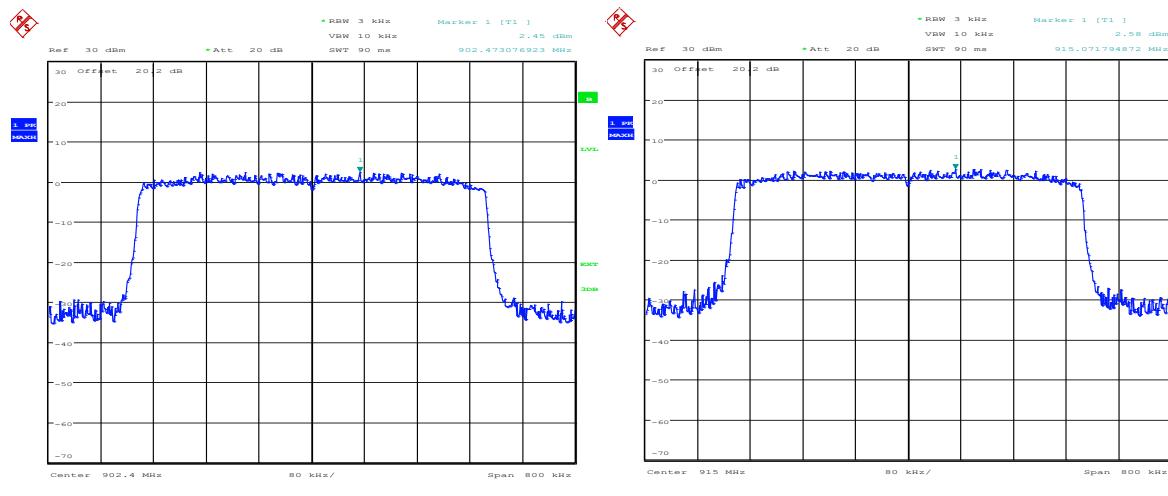

902.4 MHz

915.0 MHz

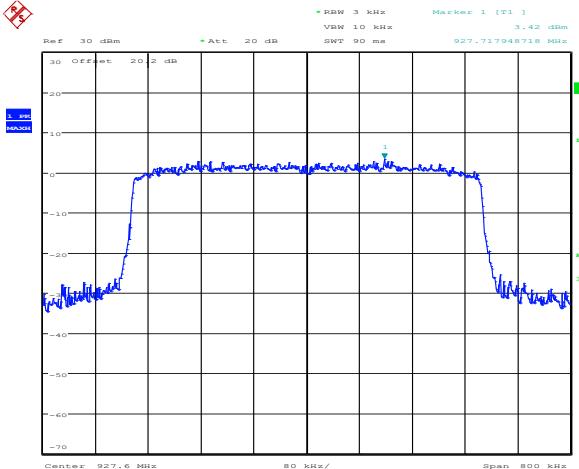

927.6 MHz

## 16 Measurement Uncertainty

### Radio Testing – General Uncertainty Schedule

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95 % confidence where no required test level exists.

Test/Measurement	Budget Number	MU
<b>Conducted RF Power, Power Spectral Density, Adjacent Channel Power and Spurious emissions</b>		
Absolute RF power (via antenna connector) DARE RPR3006W Power Head	MU4001	<b>0.9 dB</b>
Carrier Power and PSD - Spectrum Analysers	MU4004	<b>0.9 dB</b>
Adjacent Channel Power	MU4002	<b>1.9 dB</b>
Transmitter conducted spurious emissions	MU4041	<b>0.9 dB</b>
Conducted power and spurious emissions 40 GHz to 50 GHz	MU4042	<b>2.4 dB</b>
Conducted power and spurious emissions 50 GHz to 75 GHz	MU4043	<b>2.5 dB</b>
Conducted power and spurious emissions 75 GHz to 110 GHz	MU4044	<b>2.4 dB</b>
<b>Radiated RF Power and Spurious emissions ERP and EIRP</b>		
Effective Radiated Power Reverb Chamber	MU4020	<b>3.7 dB</b>
Effective Radiated Power	MU4021	<b>4.7 dB</b>
TRP Emissions 30 MHz to 1 GHz using CBL6111 or CBL6112 Bilog Antenna	MU4046	<b>5.3 dB</b>
TRP Emissions 1 GHz to 18 GHz using HL050 Log Periodic Antenna	MU4047	<b>5.1 dB</b>
TRP Emissions 18 GHz to 26.5 GHz using Standard Gain Horn	MU4048	<b>2.7 dB</b>
TRP Emissions 26.5 GHz to 40 GHz using Standard Gain Horn	MU4049	<b>2.7 dB</b>
<b>Spurious Emissions Electric and Magnetic Field</b>		
Radiated Spurious Emissions 30 MHz to 1 GHz	MU4037	<b>4.7 dB</b>
Radiated Spurious Emissions 1-18 GHz	MU4032	<b>4.5 dB</b>
E Field Emissions 18GHz to 26 GHz	MU4024	<b>3.2 dB</b>
E Field Emissions 26GHz to 40 GHz	MU4025	<b>3.3 dB</b>
E Field Emissions 40GHz to 50 GHz	MU4026	<b>3.5 dB</b>
E Field Emissions 50GHz to 75 GHz	MU4027	<b>3.6 dB</b>
E Field Emissions 75GHz to 110 GHz	MU4028	<b>3.6 dB</b>
Radiated Magnetic Field Emissions	MU4031	<b>2.3 dB</b>
<b>Frequency Measurements</b>		
Frequency Deviation	MU4022	<b>0.316 kHz</b>
Frequency error using CMTA test set	MU4023	<b>113.441 Hz</b>
Frequency error using GPS locked frequency source	MU4045	<b>0.0413 ppm</b>
<b>Bandwidth/Spectral Mask Measurements</b>		
Channel Bandwidth	MU4005	<b>3.87 %</b>
Transmitter Mask Amplitude	MU4039	<b>1.3 dB</b>
Transmitter Mask Frequency	MU4040	<b>2.59 %</b>
<b>Time Domain Measurements</b>		
Transmission Time	MU4038	<b>4.40 %</b>
<b>Dynamic Frequency Selection (DFS) Parameters</b>		
DFS Analyser - Measurement Time	MU4006	<b>679 µs</b>
DFS Generator - Frequency Error	MU4007	<b>92 Hz</b>
DFS Threshold Conducted	MU4008	<b>1.3 dB</b>
DFS Threshold Radiated	MU4009	<b>3.2 dB</b>

<b>Test/Measurement</b>	<b>Budget Number</b>	<b>MU</b>
<b>Receiver Parameters</b>		
EN300328 Receiver Blocking	MU4010	<b>1.1 dB</b>
EN301893 Receiver Blocking	MU4011	<b>1.1 dB</b>
EN303340 Adjacent Channel Selectivity	MU4012	<b>1.1 dB</b>
EN303340 Overloading	MU4013	<b>1.1 dB</b>
EN303340 Receiver Blocking	MU4014	<b>1.1 dB</b>
EN303340 Receiver Sensitivity	MU4015	<b>0.9 dB</b>
EN303372-1 Image Rejection	MU4016	<b>1.4 dB</b>
EN303372-1 Receiver Blocking	MU4017	<b>1.1 dB</b>
EN303372-2 Adjacent Channel Selectivity	MU4018	<b>1.1 dB</b>
EN303372-2 Dynamic Range	MU4019	<b>0.9 dB</b>
Receiver Blocking Talk Mode Conducted	MU4033	<b>1.2 dB</b>
Receiver Blocking Talk Mode- radiated	MU4034	<b>3.4 dB</b>
Rx Blocking, listen mode, blocking level	MU4035	<b>3.2 dB</b>
Rx Blocking, listen mode, radiated Threshold Measurement	MU4036	<b>3.4 dB</b>
Adjacent Sub Band Selectivity	MU4003	<b>4.2 dB</b>