

Report on the Radio Testing

For

Sound Devices LLC

on

A20-TX

Report no. TRA-061998-47-14B

26th January 2024

RF993 1.0



Report Number: TRA-061998-47-14B  
Issue: B

REPORT ON THE RADIO TESTING OF A  
Sound Devices LLC  
A20-TX  
WITH RESPECT TO SPECIFICATION  
FCC 47CFR Part 74 Subpart H

TEST DATE: 11th July to 6th September 2023

Tested by: M Else/S Hodgkinson

Written by:

S Hodgkinson  
Radio Test Engineer

Approved by:

John Charters  
Lab Manager

Date: 26th January 2024

Disclaimers:

- [1] THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE
- [2] THE RESULTS CONTAINED IN THIS DOCUMENT RELATE ONLY TO THE ITEM(S) TESTED

## 1 Revision Record

<b><i>Issue Number</i></b>	<b><i>Issue Date</i></b>	<b><i>Revision History</i></b>
A	26th January 2024	Original
B	26 <sup>th</sup> January 2024	Antenna details updated

## 2 Summary

TEST REPORT NUMBER: TRA-061998-47-14B

WORKS ORDER NUMBER: TRA-061998-00

PURPOSE OF TEST: Certification

TEST SPECIFICATION: 47CFRPart 74 Subpart H

EQUIPMENT UNDER TEST (EUT): A20-TX

FCC IDENTIFIER: 2AKLX-9808

EUT SERIAL NUMBER: SP0223137019

MANUFACTURER/AGENT: Sound Devices LLC

ADDRESS: E7556 State Road 23 and 33  
Reedsburg  
WI 53959

CLIENT CONTACT: Lee Stone  
✉ [lee.stone@audioltd.com](mailto:lee.stone@audioltd.com)

ORDER NUMBER: 73795

TEST DATE: 11th July to 6th September 2023

TESTED BY: M Else/S Hodgkinson  
Element

## 2.1 Test Summary

<b>Test Method and Description</b>	<b>Requirement Clause 47CFR Part 74</b>	<b>Applicable to this equipment</b>	<b>Result / Note</b>
Conducted Power Output	2.1046	<input checked="" type="checkbox"/>	Pass
Spurious Emissions Emission Mask	2.1051	<input checked="" type="checkbox"/>	Pass
Field Strength of Spurious Emissions	2.1053	<input checked="" type="checkbox"/>	Pass
Occupied bandwidth	2.1049	<input checked="" type="checkbox"/>	Pass
Frequency Stability	2.1055	<input checked="" type="checkbox"/>	Pass

### Specific Note:

1. The EUT is a battery powered device

### General Notes:

The results contained in this report relate only to the items tested, in the condition at time of test, and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only. Any modifications made are identified in Section 8 of this report.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 5.2 of this test report (Deviations from Test Standards).

The decision rule for compliance is not inherent within this test specification and compliance is based on the customer requesting a simple acceptance rule based on understanding and acceptance of Elements Measurement Uncertainty values.

### 3 Contents

1	Revision Record .....	3
2	Summary .....	4
2.1	Test Summary .....	5
3	Contents .....	6
4	Introduction .....	7
5	Test Specifications .....	8
5.1	Normative References .....	8
5.2	Deviations from Test Standards .....	8
6	Glossary of Terms .....	9
7	Equipment under Test .....	10
7.1	EUT Identification .....	10
7.2	System Equipment .....	10
7.3	EUT Mode of Operation .....	10
7.4	EUT Radio Parameters .....	10
7.4.1	General .....	10
7.4.2	Antennas .....	10
7.5	EUT Description .....	10
8	Modifications .....	11
9	EUT Test Setup .....	12
9.1	Block Diagram .....	12
9.2	General Set-up Photograph .....	13
9.3	Measurement software .....	13
10	General Technical Parameters .....	14
10.1	Normal Conditions .....	14
10.2	Extreme Test Conditions .....	14
11	Conducted output power .....	15
11.1	Definition .....	15
11.2	Test Parameters .....	15
11.3	Test Limit .....	15
11.4	Test Method .....	16
11.5	Test Equipment .....	16
11.6	Test Results .....	17
12	Emissions Mask .....	18
12.1	Definition .....	18
12.2	Test Parameters .....	18
12.3	Test Limit .....	18
12.4	Test Method .....	19
12.5	Test Equipment .....	19
12.6	Test Results .....	20
13	Field strength of Spurious Emissions .....	23
13.1	Definitions .....	23
13.2	Test Parameters .....	23
13.3	Test Limits .....	24
13.4	Test Method .....	25
13.5	Test Equipment .....	26
13.6	Test Results .....	27
14	Bandwidth Limitations .....	30
14.1	Definition .....	30
14.2	Test Parameters .....	30
14.3	Test Limit .....	30
14.4	Test Method .....	31
14.5	Test Equipment .....	31
14.6	Test Results .....	32
15	Frequency stability .....	33
15.1	Definition .....	33
15.2	Test Parameters .....	33
15.3	Test Limit .....	33
15.4	Test Method .....	34
15.5	Test Equipment .....	34
15.6	Test Results .....	35
16	Measurement Uncertainty .....	37

## 4 Introduction

This report TRA-061998-47-14B presents the results of the Radio testing on a Sound Devices LLC, A20-TX to specification 47CFR74 Experimental Radio, Auxiliary, Special Broadcast and Other Program Distributional services.

The testing was carried out for Sound Devices LLC by Element, at the address detailed below.

<input type="checkbox"/> Element Hull Unit E South Orbital Trading Park Hedon Road Hull HU9 1NJ UK	<input checked="" type="checkbox"/> Element Skelmersdale Unit 1 Pendle Place Skelmersdale West Lancashire WN8 9PN UK	<input type="checkbox"/> Element Surrey Hills Unit 15 B Henley Business Park Pirbright Road Normandy Guildford GU3 2DX UK
--	--	--

This report details the configuration of the equipment, the test methods used and any relevant modifications where appropriate.

All test and measurement equipment under the control of the laboratory and requiring calibration is subject to an established programme and procedures to control and maintain measurement standards. The quality management system meets the principles of ISO 9001, and has quality control procedures for monitoring the validity of tests undertaken. Records and sufficient detail are retained to establish an audit trail of calibration records relating to its test results for a defined period. Under control of the established calibration programme, key quantities or values of the test & measurement instrumentation are within specification and comply with the relevant traceable internationally recognised and appropriate standard specifications, which are UKAS calibrated as such where these properties have a significant effect on results. Participation in inter-laboratory comparisons and proficiency testing ensures satisfactory correlation of results conform to Elements own procedures, as well as statistical techniques for analysis of test data providing the appropriate confidence in measurements.

Throughout this report EUT denotes equipment under test.

### FCC Site Listing:

The test laboratory is accredited for the above sites under the following US-UK MRA, Designation numbers.

Element Hull	UK2007
Element Skelmersdale	UK2020

The test site requirements of ANSI C63.4-2014 are met up to 1GHz.

The test site SVSWR requirements of CISPR 16-1-4:2010 are met over the frequency range 1 GHz to 18 GHz.

## 5 Test Specifications

### 5.1 *Normative References*

- FCC 47 CFR Ch. I – Part 2 - Code of Federal Regulations, Title 47, Part 2, “Frequency allocations and Radio Telemetry Matters; General Rules and Regulations”
- FCC 47 CFR Ch. I – Part 74 - Code of Federal Regulations, Title 47, Part 74 Experimental Radio, Auxiliary, Special Broadcast and Other Program Distributional Services.
- KDB 206256 D01 Wireless Microphone Certification v02r01,
- KDB 971168 D01 Power Meas License Digital Systems v03r01
- ANSI C63.26-2015 American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

### 5.2 *Deviations from Test Standards*

There were no deviations from the test standard.

## 6 Glossary of Terms

<b>§</b>	denotes a section reference from the standard, not this document
<b>AC</b>	Alternating Current
<b>ANSI</b>	American National Standards Institute
<b>BW</b>	bandwidth
<b>C</b>	Celsius
<b>CFR</b>	Code of Federal Regulations
<b>CW</b>	Continuous Wave
<b>dB</b>	decibel
<b>dBm</b>	dB relative to 1 milliwatt
<b>DC</b>	Direct Current
<b>DSSS</b>	Direct Sequence Spread Spectrum
<b>EIRP</b>	Equivalent Isotropically Radiated Power
<b>ERP</b>	Effective Radiated Power
<b>EUT</b>	Equipment under Test
<b>FCC</b>	Federal Communications Commission
<b>FHSS</b>	Frequency Hopping Spread Spectrum
<b>Hz</b>	hertz
<b>IC</b>	Industry Canada
<b>ITU</b>	International Telecommunication Union
<b>LBT</b>	Listen before Talk
<b>m</b>	metre
<b>max</b>	maximum
<b>MIMO</b>	Multiple Input and Multiple Output
<b>min</b>	minimum
<b>MRA</b>	Mutual Recognition Agreement
<b>N/A</b>	Not Applicable
<b>PCB</b>	Printed Circuit Board
<b>PDF</b>	Portable Document Format
<b>Pt-mpt</b>	Point-to-multipoint
<b>Pt-pt</b>	Point-to-point
<b>RF</b>	Radio Frequency
<b>RH</b>	Relative Humidity
<b>RMS</b>	Root Mean Square
<b>Rx</b>	receiver
<b>s</b>	second
<b>SVSWR</b>	Site Voltage Standing Wave Ratio
<b>Tx</b>	transmitter
<b>UKAS</b>	United Kingdom Accreditation Service
<b>V</b>	volt
<b>W</b>	watt
<b>Ω</b>	ohm

## 7 Equipment under Test

### 7.1 EUT Identification

- Name: A20-TX
- Serial Number: SP0223137019
- Model Number: 9808
- Software Revision: 7.50.8469
- Build Level / Revision Number: 02

### 7.2 System Equipment

Equipment listed below forms part of the overall test setup and is required for equipment functionality and/or monitoring during testing. The compliance levels achieved in this report relate only to the EUT and not items given in the following list.

*HP Spectre Laptop*

### 7.3 EUT Mode of Operation

Transmission: The channels were selected using the client supplied test scripts

### 7.4 EUT Radio Parameters

#### 7.4.1 General

<b>Frequency of operation:</b>	653.0 MHz – 657.0 MHz
<b>Modulation type(s):</b>	COFDM
<b>Occupied channel bandwidth(s):</b>	192 kHz
<b>Channel spacing:</b>	200 kHz
<b>ITU emission designator(s):</b>	200KG2E
<b>Rated output power(s):</b>	10 mW
<b>Nominal Supply Voltage:</b>	4.5 Vdc from batteries
<b>Duty cycle:</b>	100%

#### 7.4.2 Antennas

<b>Type:</b>	1/4 Wave whip antenna
<b>Gain:</b>	2.66 dBi

### 7.5 EUT Description

The EUT is a professional (Body-worn) Wireless Microphone Transmitter, which incorporates the following radios, BTLE, Proprietary LoRa and various frequency bands for the digital Wireless Audio, this report is reporting on the Digital Wireless Audio radio


## **8 Modifications**

No modifications were performed during this assessment.

## 9 EUT Test Setup

### 9.1 Block Diagram

The following diagram shows basic EUT interconnections:

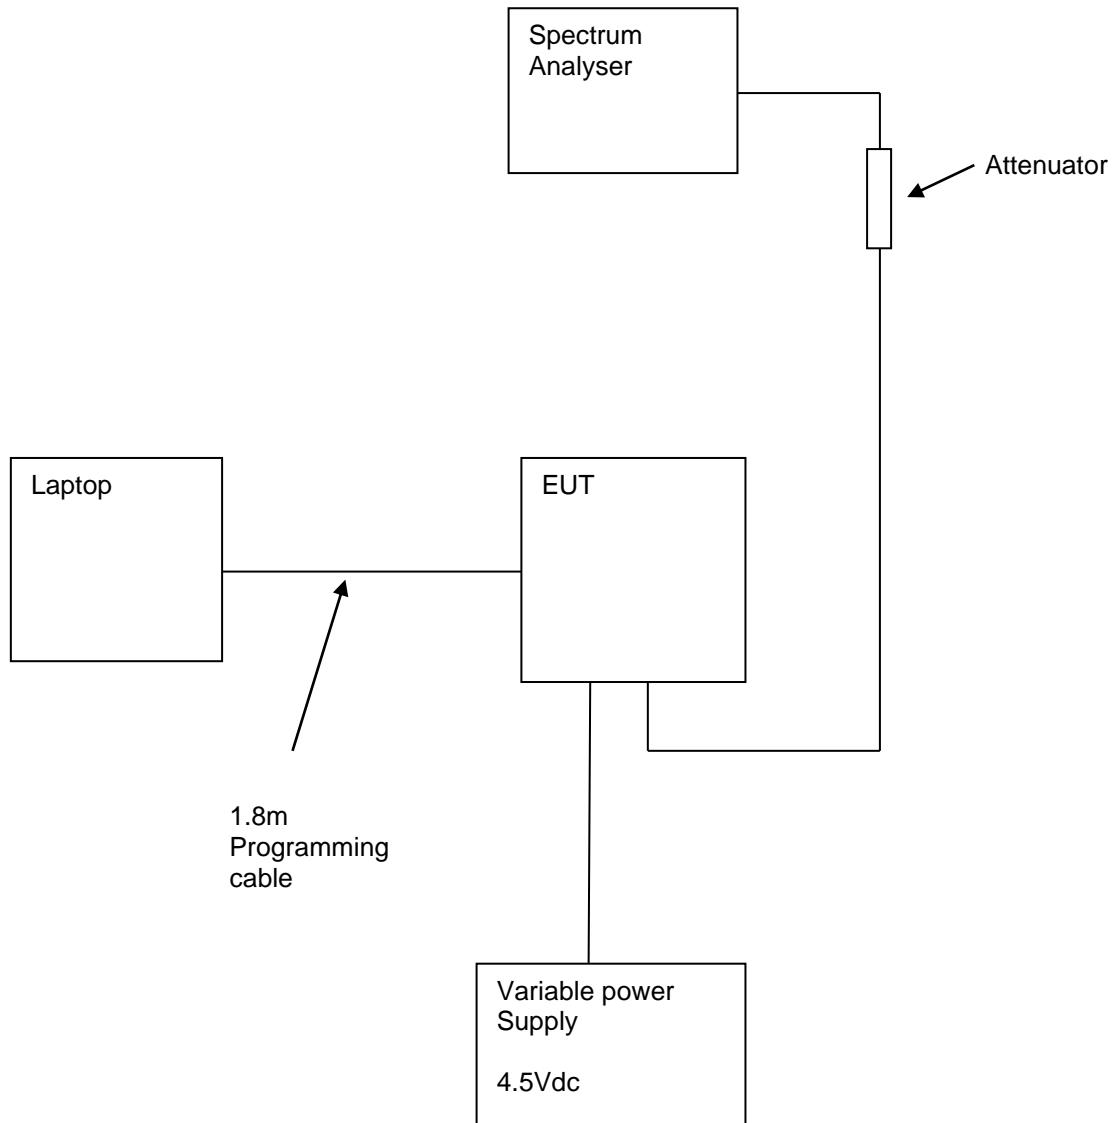

## 9.2 General Set-up Photograph

The following photograph shows basic EUT set-up:



## 9.3 Measurement software

Where applicable, the following software was used to perform measurements contained within this report.

Element Emissions R5  
Element Transmitter Bench Test  
ETS Lindgren EMPower V1.0.4.2

## 10 General Technical Parameters

### 10.1 Normal Conditions

The EUT was tested under the normal environmental conditions of the test laboratory, except where otherwise stated. The normal power source applied was 4.5 Vdc from batteries .

### 10.2 Extreme Test Conditions

Extreme temperatures and voltages are required to be tested, the following extremes were used:

<b><i>Voltage</i></b>	<b><i>Temperature</i></b>
Nominal	-30°C to +50°C in 10°C steps
85% Nominal	20°C
100% Nominal	20°C

Extreme voltage range as Per TIA-603-E 1.4.4.5, specified by the manufacturer.

## 11 Conducted output power

### 11.1 *Definition*

The conducted carrier power output rating for a transmitter is the power available at the output terminals of the transmitter when the output terminals are connected to the standard transmitter load.

### 11.2 *Test Parameters*

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	KDB 971168 D01 v03r01 and KDB 206256 D01 v02r01 as required by KDB 206256 D01 Section III (c), which states that all technical requirements should be demonstrated using the procedures in ANSI C63.26.5 where applicable ANSI C63.26 and 2.1046 Part 74.861(e)(1) ETSI EN 300 422-1 V1.4.2 (2011-08) Clause 14.3.2.1
Frequencies Measured:	653.10 MHz / 655.00 MHz / 656.90 MHz
EUT Channel Bandwidths:	200 kHz
Deviations from Standard:	None
Measurement BW:	1 MHz
Spectrum Analyzer Video BW:	3 MHz
Measurement Detector:	RMS Average

### Environmental Conditions (Normal Environment)

Temperature: 20 °C	+15 °C to +35 °C (as declared)
Humidity: 56 % RH	20 % RH to 75 % RH (as declared)

### 11.3 *Test Limit*

Part 74.861(e)(1)

(e) For low power auxiliary stations operating in the 600 MHz duplex gap and the bands allocated for TV broadcasting, the following technical requirements apply:


- (1) The power may not exceed the following values.
  - (i) 54–72, 76–88, and 174–216 MHz bands: 50 mW EIRP.
  - (ii) 470–608 and 614–698: 250 mW conducted power.
  - (iii) 600 MHz duplex gap: 20 mW EIRP.

#### 11.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure i, the resolution bandwidth of the spectrum analyser was increased above the EUT occupied bandwidth and the peak emission data noted.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

**Figure i Test Setup**




#### 11.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
FSU46	R&S	Spectrum Analyser	REF910	2024-01-10
20dB SMA	AtlanTech	Attenuator	U631	Cal in use
SMBV100A	R&S	Signal Generator	U674	2024-05-02
IPS 303A	ISO-Tech	Power Supply	U748	Use REF976
34405a	Agilent	Multimeter	REF976	2024-01-24

## 11.6 Test Results


Tx RF Output power setting: 10.0dBm: 10.0mW							
Channel Frequency (MHz)	Conducted Carrier Output Power (dBm)	Conducted Carrier Output Power (mW)	Rated Output Power (mW)	Antenna Gain (dBi)	EIRP Result (mW)	Limit EIRP (mW)	Result
653.10	9.75	9.44	10.0	2.66	17.41	20.0	Pass
655.00	9.69	9.31	10.0	2.66	17.18	20.0	Pass
656.90	9.79	9.53	10.0	2.66	17.58	20.0	Pass

653.10 MHz

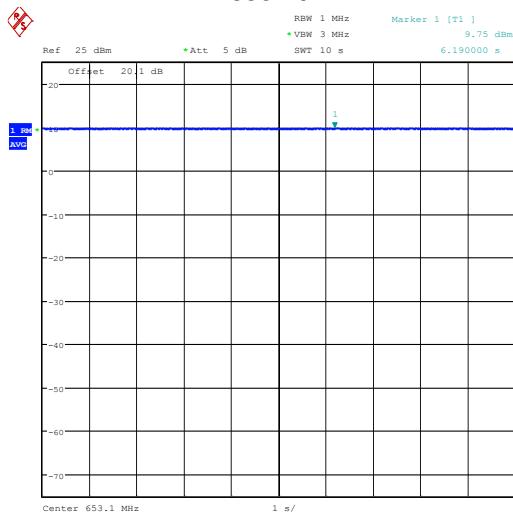


Date: 8.AUG.2023 11:40:04

655.00 MHz

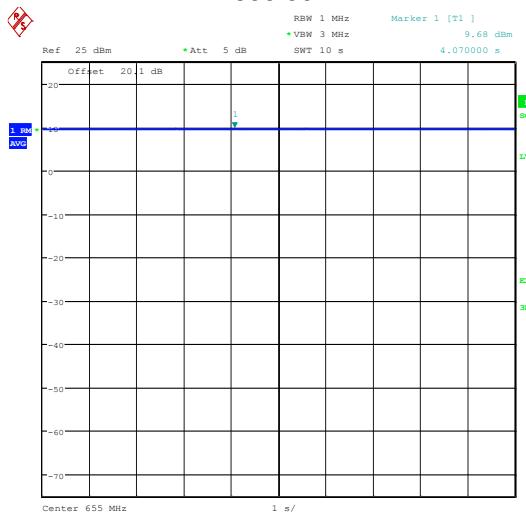

Date: 8.AUG.2023 11:41:54

656.90MHz

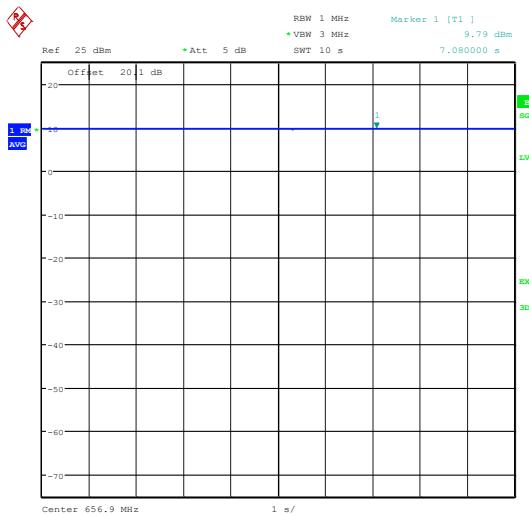

Date: 8.AUG.2023 11:42:45

## 12 Emissions Mask

### 12.1 Definition

*Necessary bandwidth.* For a given class of emission, the minimum value of the occupied bandwidth sufficient to ensure the transmission of information at the rate and with the quality required for the system employed, under specified conditions. Emissions useful for the good functioning of the receiving equipment, as for example, the emission corresponding to the carrier of reduced carrier systems, shall be included in the necessary bandwidth.

### 12.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	KDB 971168 D01 v03r01, KDB 206256 D01 v02r01 as required by KDB 206256 D01 Section III (c), which states that all technical requirements should be demonstrated using the procedures in ANSI C63.26 where applicable. ANSI C63.26, 2.1053 Part 15.236)(g ) / ETSI EN 300 422-1 v1.4.2 (2011-08) Clause 8.3.
Frequencies Measured:	653.1 MHz / 655.0 MHz / 656.9 MHz
EUT Channel Bandwidths:	200 kHz
Deviations from Standard:	None
Measurement BW:	1 MHz / 1 kHz
Measurement Detector:	RMS Average/RMS Peak Hold
Measurement Range:	2 MHz

### Environmental Conditions (Normal Environment)

Temperature: 20 °C	+15 °C to +35 °C (as declared)
Humidity: 56 % RH	20 % RH to 75 % RH (as declared)
Supply: 4.5 V/dc	

### 12.3 Test Limit

#### Part 15.236(g)


Emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in [§ 8.3](#) of ETSI EN 300 422-1 V1.4.2 (2011-08),

## 12.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure ii, the emissions from the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst case configuration in each bandwidth.

**Figure ii Test Setup**

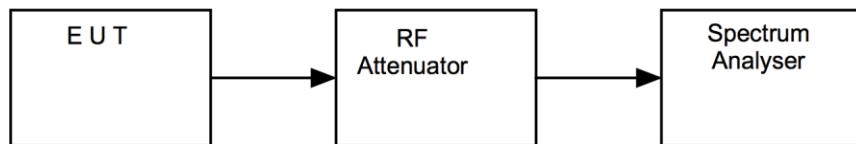


## 12.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
FSU46	R&S	Spectrum Analyser	REF910	2024-01-10
20dB SMA	AtlanTech	Attenuator	U631	Cal in use
SMBV100A	R&S	Signal Generator	U674	2024-05-02
IPS 303A	ISO-Tech	Power Supply	U748	Use REF976
34405a	Agilent	Multimeter	REF976	2024-01-24


## 12.6 Test Results

653.1 MHz

REF Step1

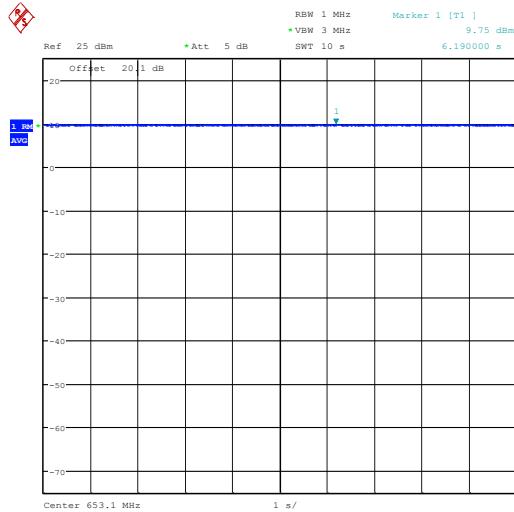


Step 2

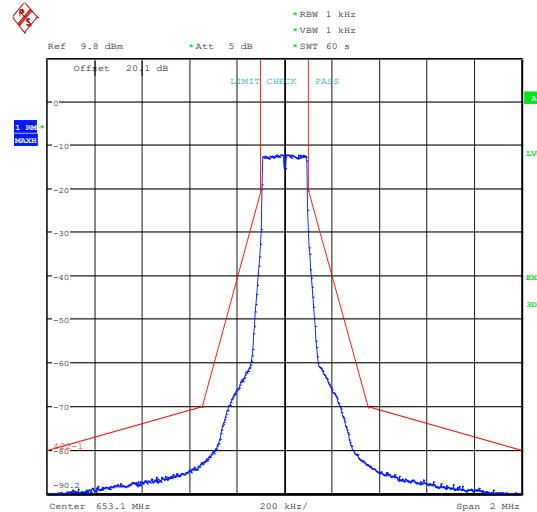

Date: 8.AUG.2023 11:40:04


Date: 3.AUG.2023 16:21:41

Step 3 Lower

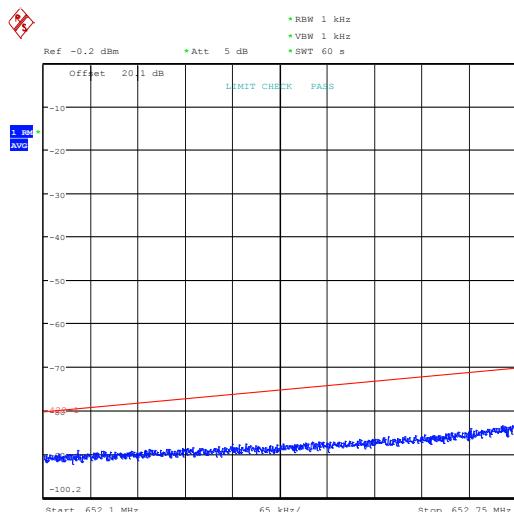

Date: 7.SEP.2023 15:01:55


Step 3 Higher

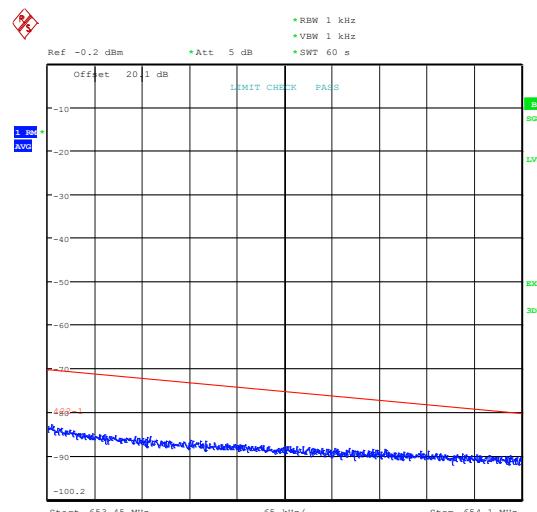

Date: 7.SEP.2023 14:57:41


655.0 MHz

## REF Step1

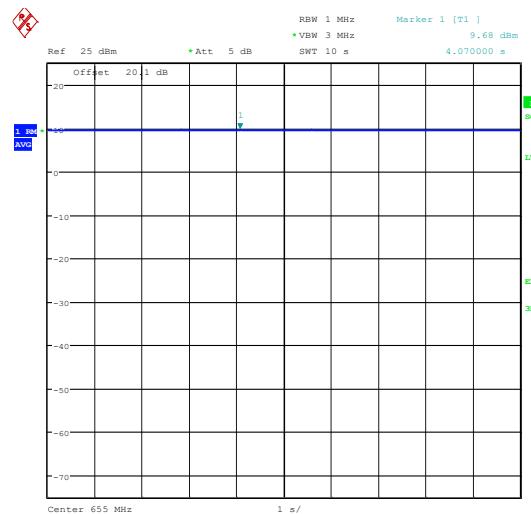


Date: 8.AUG.2023 11:41:54

## Step 2

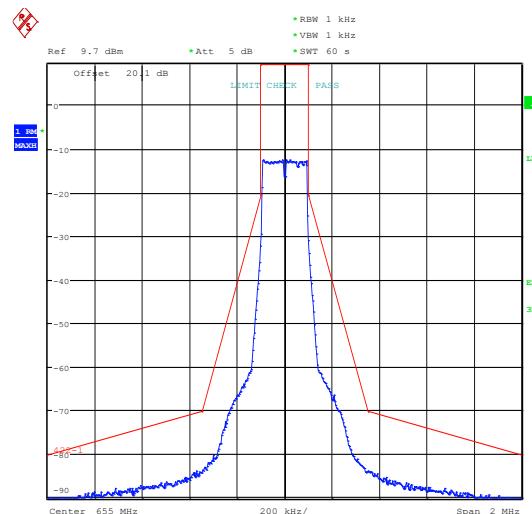


Date: 3.AUG.2023 16:53:55

## Step 3 Lower

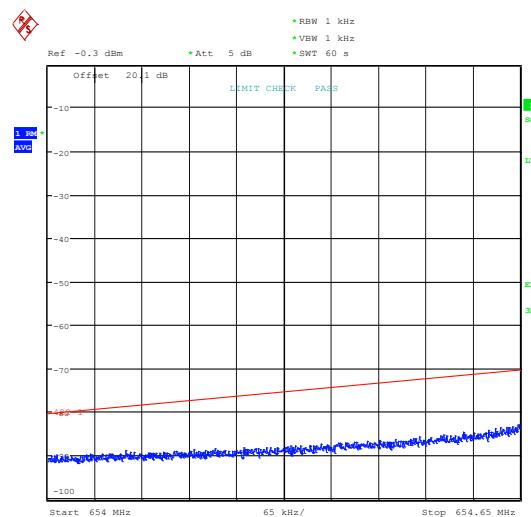

Date: 7.SEP.2023 15:08:41


## Step 3 Higher

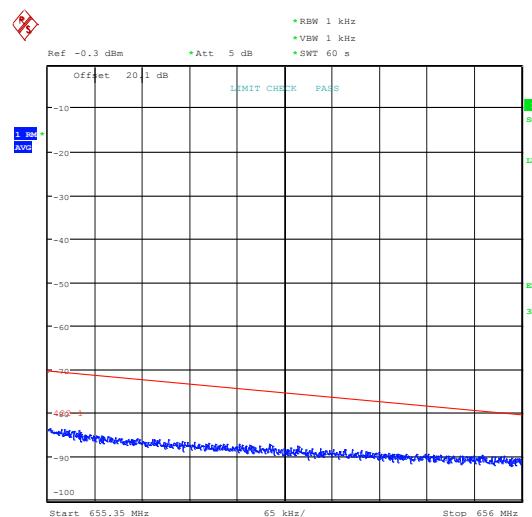

Date: 7.SEP.2023 15:12:56


656.9 MHz

## REF Step1

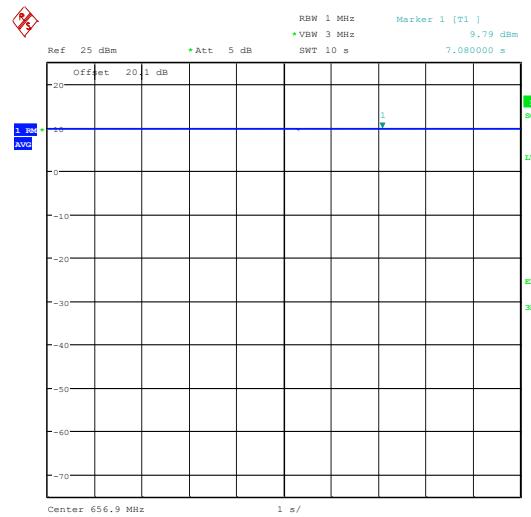


Date: 8.AUG.2023 11:42:45

## Step 2

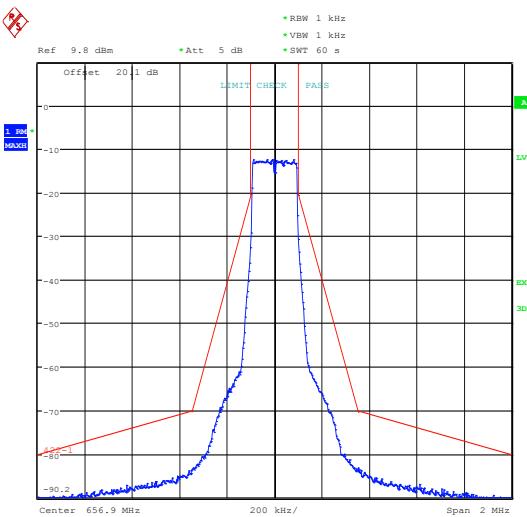


Date: 3.AUG.2023 17:20:43

### Step 3 Lower

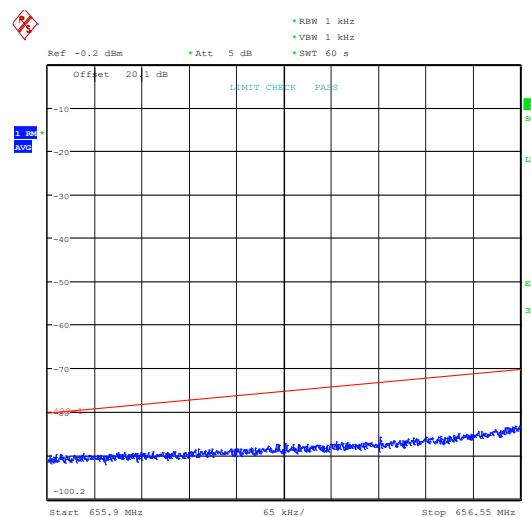

Date: 7.SEP.2023 15:22:38

### Step 3 Higher

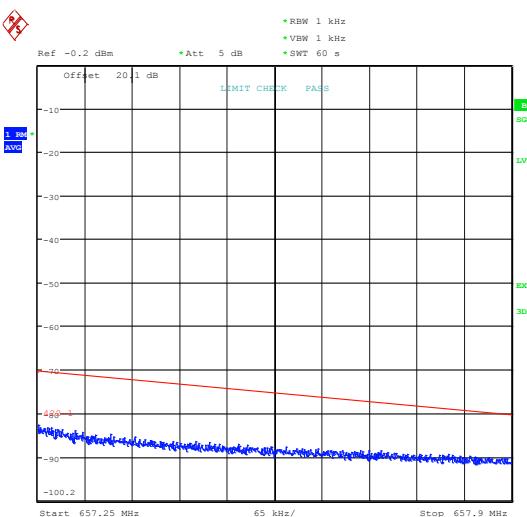

Date: 7.SEP.2023 15:18:26

## 13 Field strength of Spurious Emissions

### 13.1 Definitions

#### *Spurious emissions*

Emissions on a frequency or frequencies, which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude out-of-band emissions.

#### *Restricted bands*

A frequency band in which intentional radiators are permitted to radiate only spurious emissions but not fundamental signals.

### 13.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	SK03 Radio Chamber
Test Standards and Clauses:	KDB 971168 D01 v03r01, KDB 206256 D01 v02r01 as required by KDB 206256 D01 Section III (c), which states that all technical requirements should be demonstrated using the procedures in ANSI C63.26 where applicable. ANSI C63.26, 2.1053 FCC Part 74.861 Clause (d)(4)(ii); FCC Part 74.861 Clause (e)(7) Referencing ETSI EN 300 422-1 V1.4.2 (2011-08) Clause 8.4 653.1 MHz, 655.0 MHz & 656.9 MHz
EUT Frequencies Measured:	653.1 MHz, 655.0 MHz & 656.9 MHz
Deviations from Standard:	None
Measurement BW:	30 MHz to 1 GHz: 120 kHz; Above 1 GHz: 1 MHz
Measurement Detector:	Up to 1 GHz: Peak; Above 1 GHz: Peak

### Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 49 % RH	20 % RH to 75 % RH (as declared)
Supply: 4.5 Vdc	4.5 Vdc (as declared)

### 13.3 Test Limits

#### FCC Part 74.861 (d)(4)(ii)

Microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Beyond one megahertz below and above the carrier frequency, emissions shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 v1.4.2.

#### FCC Part 74.861 (e)(7)

Analog emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.1.2 of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Digital emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.2.2 (Figure 4) of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Beyond one megahertz below and above the carrier frequency, emissions shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 v1.4.2 (2011-08). The requirements of this paragraph (e)(7) shall not apply to applications for certification of equipment in these bands until nine months after release of the Commission's Channel Reassignment Public Notice, as defined in § 73.3700(a)(2) of this chapter.

**Limits for spurious emissions EN 300 422-1 V1.4.2 (2011-08)**

<b>State</b>	<b>Frequency</b>		
	<b>47 MHz to 74 MHz</b> <b>87,5 MHz to 137 MHz</b> <b>174 MHz to 230 MHz</b> <b>470 MHz to 862 MHz</b>	<b>Other Frequencies below 1 000 MHz</b>	<b>Frequencies above 1 000 MHz</b>
<b>Operation</b>	4 nW	250 nW	1 $\mu$ W
<b>Standby</b>	2 nW	2 nW	20 nW

### 13.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure iii, the emissions from the EUT were measured on a spectrum analyzer / EMI receiver.

Radiated electromagnetic emissions from the EUT are checked first by preview scans. Preview scans for all spectrum and modulation characteristics are checked, using a peak detector and where applicable worst-case determined for function, operation, orientation, etc. for both vertical and horizontal polarisations. Pre-scan plots are shown with a peak detector and 100 kHz RBW.

If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.10 are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed, (see EUT setup photographs for more detail).

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. Emissions above 1 GHz are characterized using standard gain horn antennas. Pre-amplifiers and filters are used where required. Care is taken to ensure that test receiver resolution bandwidth, video bandwidth and detector type(s) meet the regulatory requirements.

For both horizontal and vertical polarizations, the EUT is then rotated through 360 degrees in azimuth until the highest emission is detected. At the previously determined azimuth the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected, this maximum value is recorded.

Power values measured on the test receiver / analyzer are converted to field strength, FS, in dB $\mu$ V/m at the regulatory distance, using:

$$FS = PR + CL + AF - PA + DC - CF$$

Factor = CL + AF - PA

Where,

PR is the power recorded on the receiver / spectrum analyzer in dB $\mu$ V;

CL is the cable loss in dB;

AF is the test antenna factor in dB/m;


PA is the pre-amplifier gain in dB (where used);

DC is the duty correction factor in dB (where used, e.g. harmonics of pulsed fundamental);

CF is the distance factor in dB (where measurement distance different to limit distance);

This field strength value is then compared with the regulatory limit.

**Figure iii Test Setup**

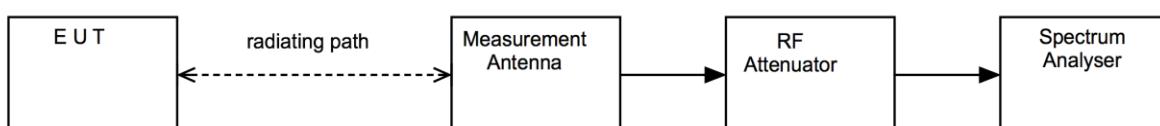


### 13.5 Test Equipment


<b>Equipment Type</b>	<b>Manufacturer</b>	<b>Equipment Description</b>	<b>Element No</b>	<b>Due For Calibration</b>
Spectrum Analyser	R&S	FSU26	U405	2024-05-22
Signal Generator	R&S	SMB100A	U677	2024-02-03
Bilog	Chase	CBL611/B	U573	2024-10-14
Log Periodic Ant	Chase	UPA6108	L203	2024-06-15
PreAmp	Watkins Johnson	6201-69	U372	2024-03-07
1-18GHz Horn	EMCO	3115	L139	2024-07-01
Horn 18-26GHz (&U330)	Flann	20240-20	L300	2024-06-30
Horn Antenna	EMCO	3115	L138	2024-05-23
Pre Amp	Agilent	8449B	U457	2024-01-24
High Pass Filter	Mini-Circuits	VHF-1500+	U519	2024-02-08
High Pass Filter	Atlantic Microwave	AFH-07000	U558	2024-02-13
High Pass Filter 1.1-4 GHz	Atlantic Microwave	F-HPC5-730008-S5S5	U719	2024-02-09
High Pass Filter 300-1 GHz	Mini-Circuits	NHP-300	RFG 351-8	Cal In Use
Radiated Test Software	Element	Emissions R5	REF9000	Cal not required
Radio Chamber - PP	Rainford EMC	ATS	REF940	2023-11-06

### 13.6 Test Results


BAND: 653.0 MHz-657.0 MHz

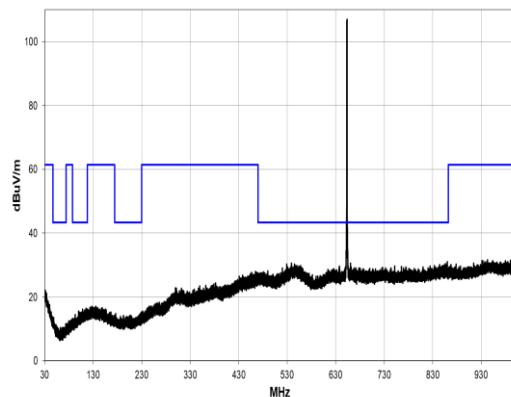


30 MHz to 1 GHz

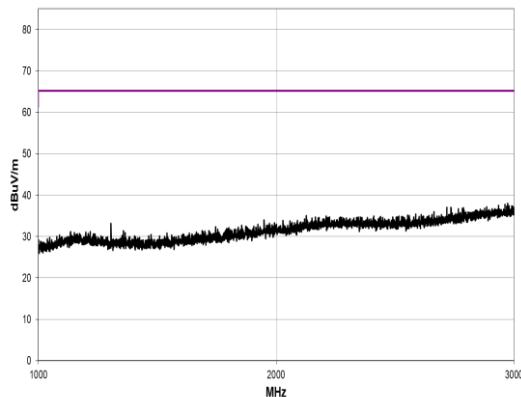


1 GHz to 3 GHz

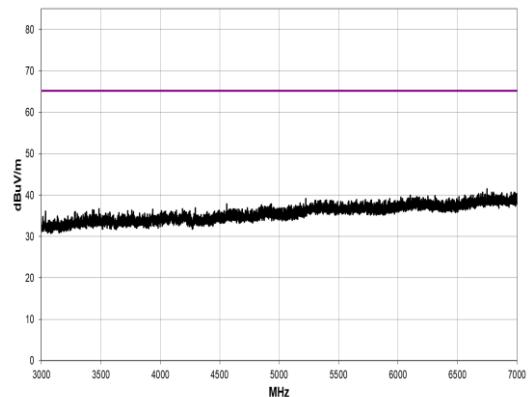

3 GHz to 7 GHz

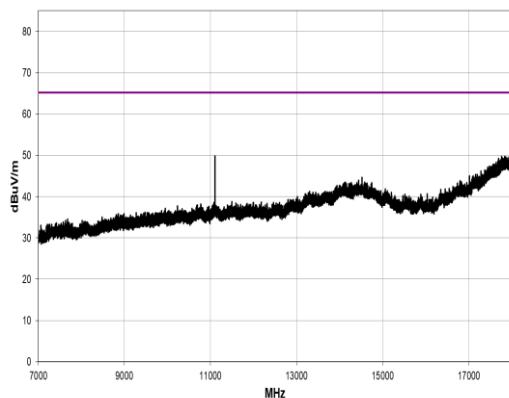


7 GHz to 18 GHz

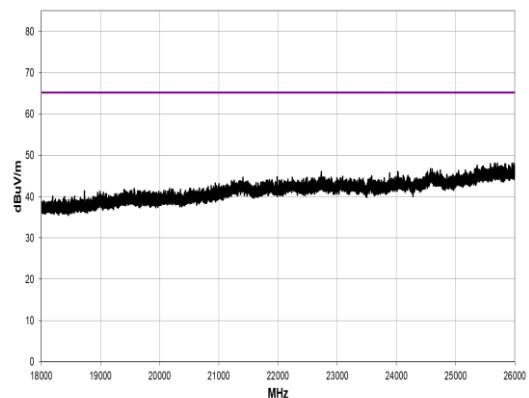



18 GHz to 26 GHz

FREQUENCY: 653.1 MHz; POWER SETTING: 10 mW					
Emission	Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
1	11102.66	-43.87	-30.00	-13.87	PASS


BAND: 653.0 MHz-657.0 MHz

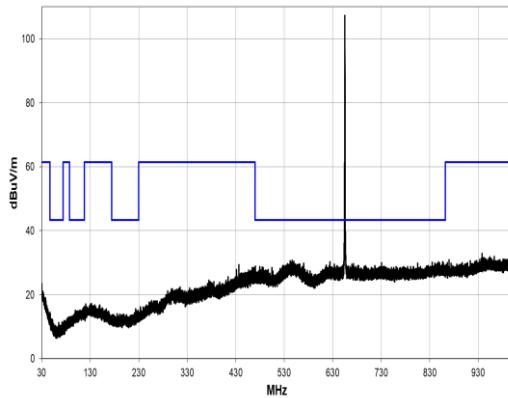


30 MHz to 1 GHz

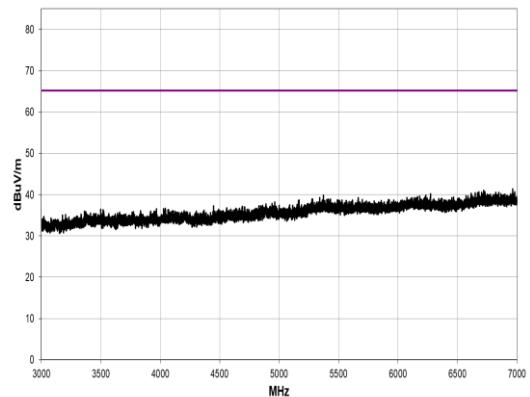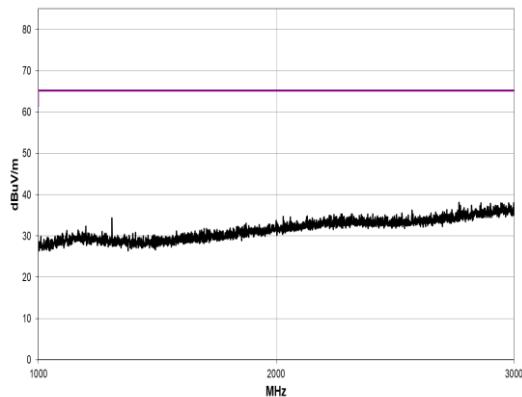

1 GHz to 3 GHz

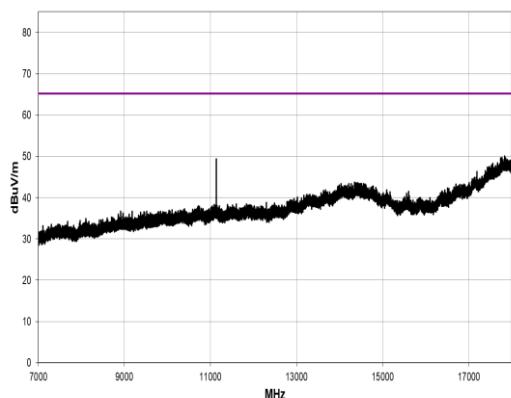


7 GHz to 18 GHz

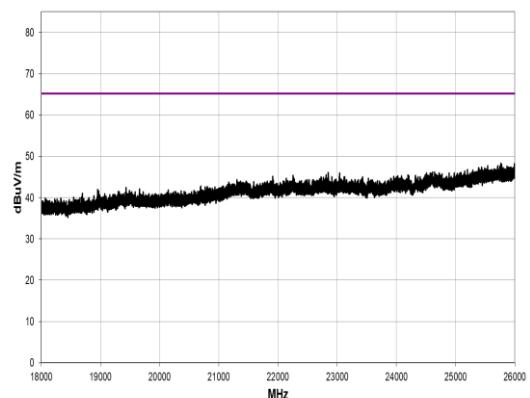



18 GHz to 26 GHz

FREQUENCY: 655 MHz; POWER SETTING: 10 mW					
Emission	Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
1	11134.98	-42.96	-30.00	-12.96	PASS



BAND: 653.0 MHz-657.0 MHz

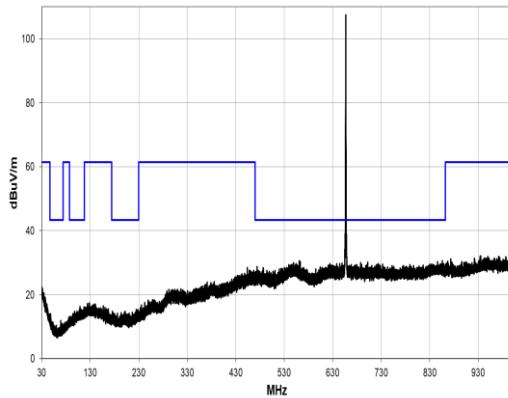

30 MHz to 1 GHz

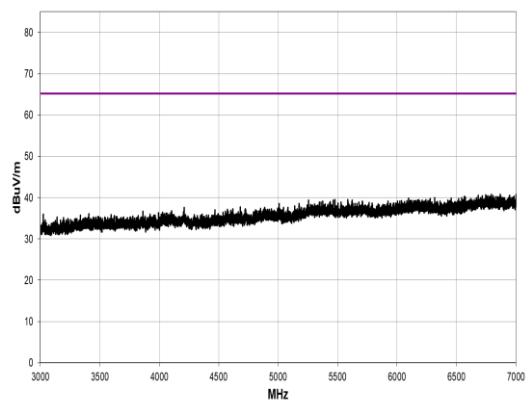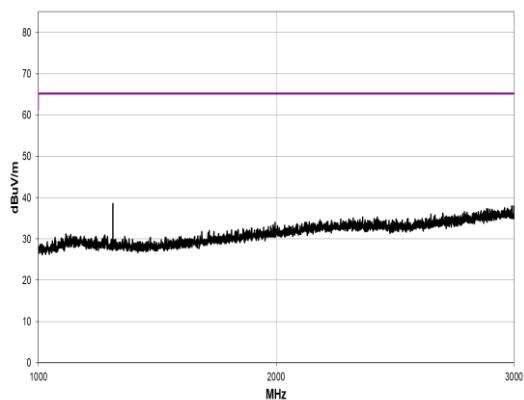

1 GHz to 3 GHz

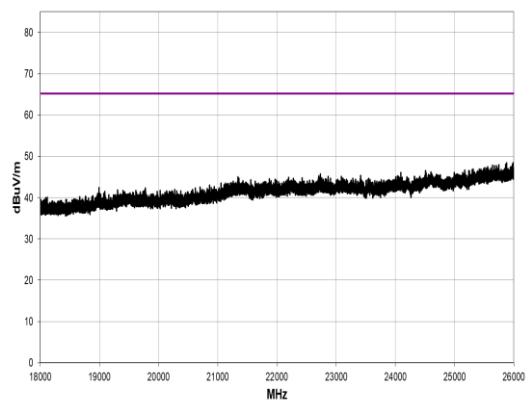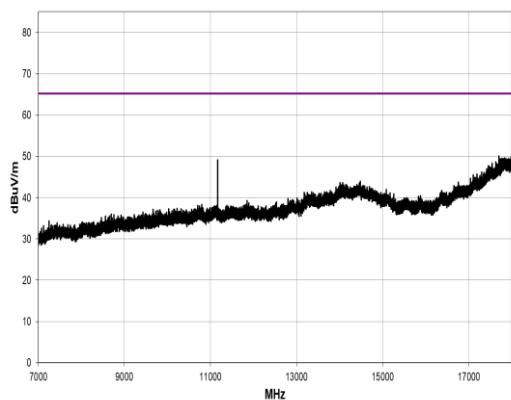

7 GHz to 18 GHz

18 GHz to 26 GHz

FREQUENCY: 656.9 MHz; POWER SETTING: 10 mW					
Emission	Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
1	11167.27	-43.77	-30.00	-13.77	PASS

## 14 Bandwidth Limitations

### 14.1 *Definition*

The 99% emission bandwidth is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained.

### 14.2 *Test Parameters*

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	KDB 971168 D01 v03r01, and 74.861(e)(5). 99% Bandwidth: Part 2.1049
Frequencies Measured:	ANSI C63.26-2015, Clause 5.4 653.1 MHz / 655.0 MHz / 656.9 MHz
EUT Channel Bandwidths:	200 kHz
EUT Test Modulations:	1 kHz
Deviations From Standard:	None
Measurement BW:	2 kHz
Spectrum Analyzer Video BW:	10 kHz
Measurement Span:	500 kHz
Measurement Detector:	Peak

### Environmental Conditions (Normal Environment)

Temperature: 20 °C	+15 °C to +35 °C (as declared)
Humidity: 56 % RH	20 % RH to 75 % RH (as declared)
Supply: 4.5 Vdc	

### 14.3 *Test Limit*


Part 74.861(e)(5)

The operating bandwidth shall not exceed 200 kHz.

#### 14.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure iv, the bandwidth of the EUT was measured on a spectrum analyser.

**Figure iv Test Setup**

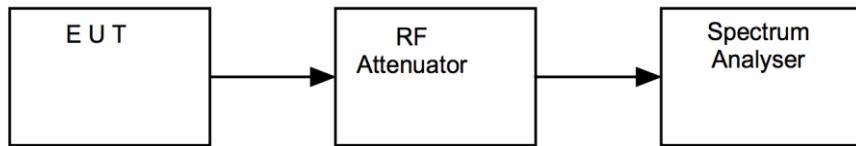


#### 14.5 Test Equipment

<i>Equipment Type</i>	<i>Manufacturer</i>	<i>Equipment Description</i>	<i>Element No</i>	<i>Due For Calibration</i>
FSU46	R&S	Spectrum Analyser	REF910	2024-01-10
20dB SMA	AtlanTech	Attenuator	U631	Cal in use
SMBV100A	R&S	Signal Generator	U674	2024-05-02
IPS 303A	ISO-Tech	Power Supply	U748	Use REF976
34405a	Agilent	Multimeter	REF976	2024-01-24


## 14.6 Test Results

Channel Frequency (MHz)	$F_L$ (MHz)	$F_H$ (MHz)	99% Bandwidth (kHz)	Result
653.1	653.005000	653.197000	192.000000	PASS
655.0	654.905000	655.097000	192.000000	PASS
656.9	656.805000	656.997000	192.000000	PASS

653.1 MHz

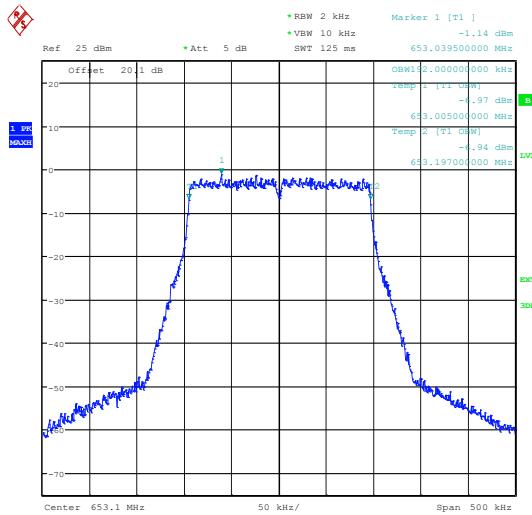


655.0 MHz

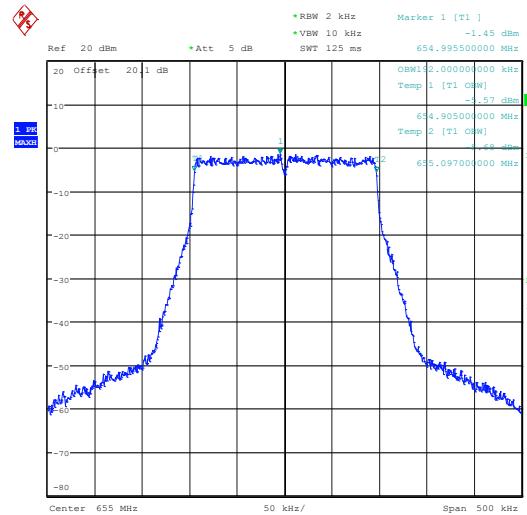

Date: 16.AUG.2023 10:28:58

Date: 3.AUG.2023 16:49:13

656.9 MHz

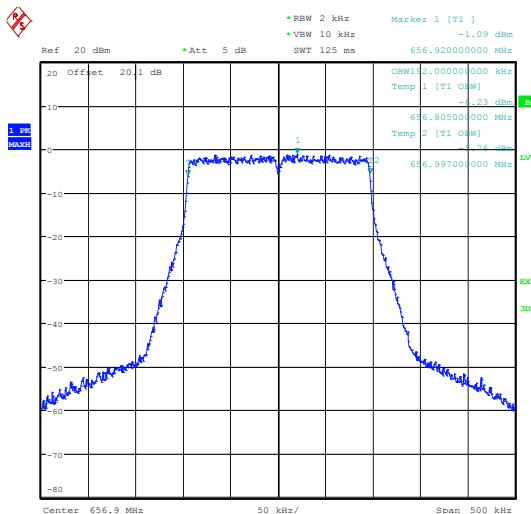

Date: 3.AUG.2023 17:17:04

## 15 Frequency stability

### 15.1 Definition

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage.

### 15.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	KDB 971168 D01 v03r01, and ANSI C63.26 where applicable. Part 74.861(e)(4); Part 2.1055
Frequencies Measured:	653.1 MHz / 655.00 MHz / 656.90 MHz
EUT Channel Bandwidths:	200 kHz
Deviations from Standard:	None
Measurement BW:	1 MHz
Spectrum Analyzer Video BW:	3 MHz
Measurement Detector:	RMS Average

### Environmental Conditions (Normal Environment)

Temperature: 20 °C	+15 °C to +35 °C (as declared)
Humidity: 56 % RH	20 % RH to 75 % RH (as declared)
Voltage: 4.5 Vdc Via batteries	(as Declared)

### 15.3 Test Limit

Part 74.861(e)(4)

The frequency tolerance of the transmitter shall be 0.005 percent

### 15.4 Test Method

The operating carrier frequency shall be set up in accordance with the manufacturer's published operation and instruction manual prior to the commencement of these tests. No adjustment of any frequency determining circuit element shall be made subsequent to this initial set-up. Frequency stability is tested:


- At 10 °C intervals of temperatures between -30 °C and +50 °C at the manufacturer's rated supply voltage, and
- At +20 °C temperature and  $\pm 15\%$  supply voltage variations. If a product is specified to operate over a range of input voltage then the -15% variation is applied to the lowermost voltage and the +15% is applied to the uppermost voltage.

During the test all necessary settings, adjustments and control of the EUT have to be performed without disturbing the test environment, i.e., without opening the environmental chamber. The frequency stabilities can be maintained to a lesser temperature range provided that the transmitter is automatically inhibited from operating outside the lesser temperature range. For handheld equipment that is only capable of operating from internal batteries and the supply voltage cannot be varied, the frequency stability tests shall be performed at the nominal battery voltage and the battery end point voltage specified by the manufacturer. An external supply voltage can be used and set at the internal battery nominal voltage, and again at the battery operating end point voltage which shall be specified by the equipment manufacturer.

$V_{\text{nominal}}$	4.5 Vdc
$V_{\text{minimum}}$	3.2 Vdc
$V_{\text{maximum}}$	4.5 Vdc

The measurements were performed with a modulated signal, The 99% occupied bandwidth was used to determine  $f_c$  using the formula  $f_c = f_l + f_h / 2$  Measurements were made once temperature stability was achieved at each temperature.

### Figure v Test Setup

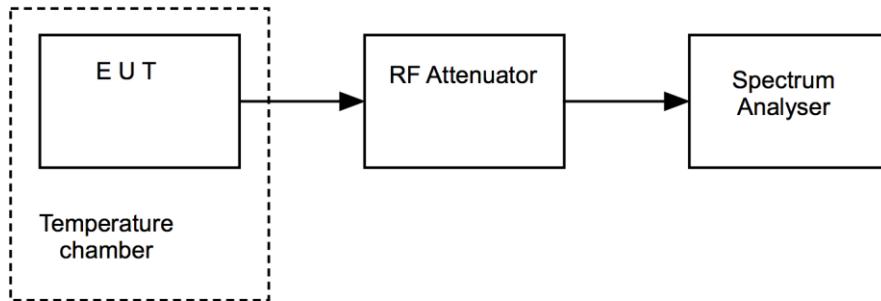

### 15.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
FSU46	R&S	Spectrum Analyser	REF910	2024-01-10
20dB SMA	AtlanTech	Attenuator	U631	Cal in use
SMBV100A	R&S	Signal Generator	U674	2024-05-02
IPS 303A	ISO-Tech	Power Supply	U748	Use REF976
34405a	Agilent	Multimeter	REF976	2024-01-24
52 Series II	Fluke	Temperature Indicator	L426	2024-07-19
VT 4002	Votsch	Temperature Chamber	U521	Use L426 or U720

## 15.6 Test Results

EUT Frequency: 653.1 MHz						
Test Environment		Measured Frequency (MHz)	Frequency error (kHz)	Frequency error (ppm)	Frequency Tolerance (%)	Result
+50 C	V <sub>nominal</sub>	653.101000	1.00	1.53	0.00015	Pass
+40 C	V <sub>nominal</sub>	653.101000	1.00	1.53	0.00015	Pass
+30 C	V <sub>nominal</sub>	653.101000	1.00	1.53	0.00015	Pass
+20 C	V <sub>nominal</sub>	653.101000	1.00	1.53	0.00015	Pass
+10 C	V <sub>nominal</sub>	653.101000	1.00	1.53	0.00015	Pass
+0 C	V <sub>nominal</sub>	653.101250	1.25	1.91	0.00019	Pass
-10 C	V <sub>nominal</sub>	653.101500	1.50	2.30	0.00023	Pass
-20 C	V <sub>nominal</sub>	653.102000	2.00	3.06	0.00031	Pass
-30 C	V <sub>nominal</sub>	653.102500	2.50	3.83	0.00038	Pass

Test Environment		Measured Frequency (MHz)	Frequency error (kHz)	Frequency error (ppm)	Frequency Tolerance (%)	Result
+20 C	V <sub>nominal</sub>	653.101000	1.00	1.53	0.00015	Pass
+20 C	V <sub>Minimal</sub>	653.101000	1.00	1.53	0.00015	Pass

EUT Frequency: 655.0 MHz						
Test Environment		Measured Frequency (MHz)	Frequency error (kHz)	Frequency error (ppm)	Frequency Tolerance (%)	Result
+50 C	V <sub>nominal</sub>	655.001000	1.00	1.53	0.00015	Pass
+40 C	V <sub>nominal</sub>	655.001000	1.00	1.53	0.00015	Pass
+30 C	V <sub>nominal</sub>	655.001000	1.00	1.53	0.00015	Pass
+20 C	V <sub>nominal</sub>	655.001000	1.00	1.53	0.00015	Pass
+10 C	V <sub>nominal</sub>	655.001000	1.00	1.53	0.00015	Pass
+0 C	V <sub>nominal</sub>	655.001000	1.00	1.53	0.00015	Pass
-10 C	V <sub>nominal</sub>	655.001500	1.50	2.29	0.00023	Pass
-20 C	V <sub>nominal</sub>	655.002000	2.00	3.05	0.00031	Pass
-30 C	V <sub>nominal</sub>	655.002500	2.50	3.82	0.00038	Pass

Test Environment		Measured Frequency (MHz)	Frequency error (kHz)	Frequency error (ppm)	Frequency Tolerance (%)	Result
+20 C	V <sub>nominal</sub>	655.001000	1.00	1.53	0.00015	Pass
+20 C	V <sub>Minimal</sub>	655.001000	1.00	1.53	0.00015	Pass

EUT Frequency: 656.9 MHz						
Test Environment		Measured Frequency (MHz)	Frequency error (kHz)	Frequency error (ppm)	Frequency Tolerance (%)	Result
+50 C	V <sub>nominal</sub>	656.901000	1.00	1.52	0.00015	Pass
+40 C	V <sub>nominal</sub>	656.901000	1.00	1.52	0.00015	Pass
+30 C	V <sub>nominal</sub>	656.901000	1.00	1.52	0.00015	Pass
+20 C	V <sub>nominal</sub>	656.901000	1.00	1.52	0.00015	Pass
+10 C	V <sub>nominal</sub>	656.901000	1.00	1.52	0.00015	Pass
+0 C	V <sub>nominal</sub>	656.901250	1.25	1.90	0.00019	Pass
-10 C	V <sub>nominal</sub>	656.901500	1.50	2.28	0.00023	Pass
-20 C	V <sub>nominal</sub>	656.902000	2.00	3.04	0.00030	Pass
-30 C	V <sub>nominal</sub>	656.902250	2.25	3.43	0.00034	Pass

Test Environment		Measured Frequency (MHz)	Frequency error (kHz)	Frequency error (ppm)	Frequency Tolerance (%)	Result
+20 C	V <sub>nominal</sub>	656.901000	1.00	1.52	0.00015	Pass
+20 C	V <sub>Minimal</sub>	656.901000	1.00	1.52	0.00015	Pass

## 16 Measurement Uncertainty

### Radio Testing – General Uncertainty Schedule

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95 % confidence where no required test level exists.

Test/Measurement	Budget Number	MU
<b>Conducted RF Power, Power Spectral Density, Adjacent Channel Power and Spurious emissions</b>		
Absolute RF power (via antenna connector) DARE RPR3006W Power Head	MU4001	<b>0.9 dB</b>
Carrier Power and PSD - Spectrum Analysers	MU4004	<b>0.9 dB</b>
Adjacent Channel Power	MU4002	<b>1.9 dB</b>
Transmitter conducted spurious emissions	MU4041	<b>0.9 dB</b>
Conducted power and spurious emissions 40 GHz to 50 GHz	MU4042	<b>2.4 dB</b>
Conducted power and spurious emissions 50 GHz to 75 GHz	MU4043	<b>2.5 dB</b>
Conducted power and spurious emissions 75 GHz to 110 GHz	MU4044	<b>2.4 dB</b>
<b>Radiated RF Power and Spurious emissions ERP and EIRP</b>		
Effective Radiated Power Reverb Chamber	MU4020	<b>3.7 dB</b>
Effective Radiated Power	MU4021	<b>4.7 dB</b>
TRP Emissions 30 MHz to 1 GHz using CBL6111 or CBL6112 Bilog Antenna	MU4046	<b>5.3 dB</b>
TRP Emissions 1 GHz to 18 GHz using HL050 Log Periodic Antenna	MU4047	<b>5.1 dB</b>
TRP Emissions 18 GHz to 26.5 GHz using Standard Gain Horn	MU4048	<b>2.7 dB</b>
TRP Emissions 26.5 GHz to 40 GHz using Standard Gain Horn	MU4049	<b>2.7 dB</b>
<b>Spurious Emissions Electric and Magnetic Field</b>		
Radiated Spurious Emissions 30 MHz to 1 GHz	MU4037	<b>4.7 dB</b>
Radiated Spurious Emissions 1-18 GHz	MU4032	<b>4.5 dB</b>
E Field Emissions 18GHz to 26 GHz	MU4024	<b>3.2 dB</b>
E Field Emissions 26GHz to 40 GHz	MU4025	<b>3.3 dB</b>
E Field Emissions 40GHz to 50 GHz	MU4026	<b>3.5 dB</b>
E Field Emissions 50GHz to 75 GHz	MU4027	<b>3.6 dB</b>
E Field Emissions 75GHz to 110 GHz	MU4028	<b>3.6 dB</b>
Radiated Magnetic Field Emissions	MU4031	<b>2.3 dB</b>
<b>Frequency Measurements</b>		
Frequency Deviation	MU4022	<b>0.316 kHz</b>
Frequency error using CMTA test set	MU4023	<b>113.441 Hz</b>
Frequency error using GPS locked frequency source	MU4045	<b>0.0413 ppm</b>
<b>Bandwidth/Spectral Mask Measurements</b>		
Channel Bandwidth	MU4005	<b>3.87 %</b>
Transmitter Mask Amplitude	MU4039	<b>1.3 dB</b>
Transmitter Mask Frequency	MU4040	<b>2.59 %</b>
<b>Time Domain Measurements</b>		
Transmission Time	MU4038	<b>4.40 %</b>
<b>Dynamic Frequency Selection (DFS) Parameters</b>		
DFS Analyser - Measurement Time	MU4006	<b>679 µs</b>
DFS Generator - Frequency Error	MU4007	<b>92 Hz</b>
DFS Threshold Conducted	MU4008	<b>1.3 dB</b>
DFS Threshold Radiated	MU4009	<b>3.2 dB</b>

<b>Test/Measurement</b>	<b>Budget Number</b>	<b>MU</b>
<b>Receiver Parameters</b>		
EN300328 Receiver Blocking	MU4010	<b>1.1 dB</b>
EN301893 Receiver Blocking	MU4011	<b>1.1 dB</b>
EN303340 Adjacent Channel Selectivity	MU4012	<b>1.1 dB</b>
EN303340 Overloading	MU4013	<b>1.1 dB</b>
EN303340 Receiver Blocking	MU4014	<b>1.1 dB</b>
EN303340 Receiver Sensitivity	MU4015	<b>0.9 dB</b>
EN303372-1 Image Rejection	MU4016	<b>1.4 dB</b>
EN303372-1 Receiver Blocking	MU4017	<b>1.1 dB</b>
EN303372-2 Adjacent Channel Selectivity	MU4018	<b>1.1 dB</b>
EN303372-2 Dynamic Range	MU4019	<b>0.9 dB</b>
Receiver Blocking Talk Mode Conducted	MU4033	<b>1.2 dB</b>
Receiver Blocking Talk Mode- radiated	MU4034	<b>3.4 dB</b>
Rx Blocking, listen mode, blocking level	MU4035	<b>3.2 dB</b>
Rx Blocking, listen mode, radiated Threshold Measurement	MU4036	<b>3.4 dB</b>
Adjacent Sub Band Selectivity	MU4003	<b>4.2 dB</b>