



TEST REPORT

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-4904-0113 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR25-SRF0132 Page (1) of (115)	KCTL
---	---	---

1. Client

- Name : EVERINT Co., Ltd.
- Address : 129, Chungjusan-dan 1-ro, Chungju-si, Chungcheongbuk-do, Republic of Korea
- Date of Receipt : 2025-05-21

2. Use of Report : Certification

3. Name of Product / Model : Wi-Fi and Bluetooth Combo Module / WBT-MSO

4. Manufacturer / Country of Origin : EVERINT Co., Ltd. / Korea

5. FCC ID : 2AKMF-WBT-MSO

6. IC Certificate No. : 22266-WBTMSO

7. Date of Test : 2025-06-04 to 2025-07-01

8. Location of Test : ☒ Permanent Testing Lab ☐ On Site Testing
 (Address: 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea)

9. Test method used : FCC Part 15 Subpart E, 15.407
 RSS-247 Issue 3 August 2023
 RSS-Gen Issue 5 February 2021

10. Test Result : Refer to the test result in the test report

Affirmation	Tested by Name : Minki Kim (Signature)	Technical Manager Name : Harim Lee (Signature)
-------------	--	--

2025-07-23

Eurofins KCTL Co.,Ltd.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by Eurofins KCTL Co.,Ltd.

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-4904-0113 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR25-SRF0132 Page (2) of (115)	
---	---	---

REPORT REVISION HISTORY

Date	Revision	Page No
2025-07-23	Originally issued	-

This report shall not be reproduced except in full, without the written approval of Eurofins KCTL Co.,Ltd. This document may be altered or revised by Eurofins KCTL Co.,Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by Eurofins KCTL Co.,Ltd. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

General remarks for test reports

Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

☐ Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:

Procedure number, issue date and title:

Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

☒ Statement not required by the standard or client used for type testing

CONTENTS

1.	General information	4
2.	Device information	4
2.1.	Frequency/channel operations.....	5
2.2.	RF power setting in TEST SW	6
2.3.	Duty Cycle Factor	8
2.4.	Antenna information.....	10
2.5.	Directional Gain Calculations.....	10
3.	Antenna requirement	11
4.	Summary of tests	12
5.	Measurement uncertainty	13
6.	Measurement results explanation example	14
7.	Test results	15
7.1.	Maximum conducted output power	15
7.2.	Maximum Power Spectral Density	21
7.3.	26 dB Bandwidth & 99% Bandwidth.....	29
7.4.	6 dB Bandwidth & 99% Bandwidth.....	36
7.5.	Straddle channel	40
7.6.	Frequency stability	47
7.7.	Spurious Emission, Band Edge and Restricted bands.....	52
7.8.	AC Conducted emission	113
8.	Measurement equipment	115

1. General information

Client : EVERINT Co., Ltd.
 Address : 129, Chungjusan 1-ro, Chungju-si, Chungcheongbuk-do, Republic of Korea
 Manufacturer : EVERINT Co., Ltd.
 Address : 129, Chungjusan 1-ro, Chungju-si, Chungcheongbuk-do, Republic of Korea
 Laboratory : Eurofins KCTL Co.,Ltd.
 Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
 Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
 VCCI Registration No. : R-20080, G-20078, C-20059, T-20056
 CAB Identifier: KR0040, ISED Number: 8035A
 KOLAS No.: KT231

2. Device information

Equipment under test : Wi-Fi and Bluetooth Combo Module
 Model : WBO-MSO
 Modulation technique : Bluetooth(BDR/EDR)_GFSK, $\pi/4$ DQPSK, 8DPSK
 Bluetooth(BLE)_GFSK
 WLAN(802.11b/g/n/a/ac)_DSSS, OFDM, OFDMA

Number of channels : BT/LE : 79 ch(BDR/EDR), 40 ch(BLE)
 2.4 GHz band : 11 ch (20 MHz), 9 ch (40 MHz)
 5 GHz band
 UNII-1 : 4 ch (20 MHz), 2 ch (40 MHz), 1 ch (80 MHz)
 UNII-2A : 4 ch (20 MHz), 2 ch (40 MHz), 1 ch (80 MHz)
 UNII-2C : 12 ch (20 MHz), 6 ch (40 MHz), 3 ch (80 MHz)
 UNII-3 : 5 ch (20 MHz), 2 ch (40 MHz), 1 ch (80 MHz)

Power source : DC 3.3 V
 Antenna type : BT/LE : Ceramic chip Antenna
 WLAN : Chip Antenna

Antenna gain	BT/LE	: 0.01 dBi	
		Antenna 1	Antenna 2
	2.4 GHz band	: 0.27 dBi	0.27 dBi
	5 GHz band		
	UNII-1	: 0.38 dBi	0.38 dBi
	UNII-2A	: 0.27 dBi	0.27 dBi
	UNII-2C	: 0.82 dBi	0.82 dBi
	UNII-3	: 1.34 dBi	1.34 dBi

Frequency range : 2.4 GHz band : 2 402 MHz ~ 2 480 MHz (Bluetooth/BLE)
 2 412 MHz ~ 2 462 MHz (802.11b/g/n_HT20)
 2 422 MHz ~ 2 452 MHz (802.11n_HT40)
 5 GHz band
 UNII-1 : 5 180 MHz ~ 5 240 MHz (802.11a/n/ac_HT20/VHT20)
 : 5 190 MHz ~ 5 230 MHz (802.11n/ac_HT40/VHT40)
 : 5 210 MHz (802.11ac_VHT80)
 UNII-2A : 5 260 MHz ~ 5 320 MHz (802.11a/n/ac_HT20/VHT20)
 : 5 270 MHz ~ 5 310 MHz (802.11n/ac_HT40/VHT40)
 : 5 290 MHz (802.11ac_VHT80)
 UNII-2C : 5 500 MHz ~ 5 720 MHz (802.11a/n/ac_HT20/VHT20)
 : 5 510 MHz ~ 5 710 MHz (802.11n/ac_HT40/VHT40)
 : 5 530 MHz ~ 5 690 MHz (802.11ac_VHT80)
 UNII-3 : 5 745 MHz ~ 5 825 MHz (802.11a/n/ac_HT20/VHT20)
 : 5 755 MHz ~ 5 795 MHz (802.11n/ac_HT40/VHT40)
 : 5 775 MHz (802.11ac_VHT80)

Software version : V001
 Hardware version : V001
 Test device serial No. : WBTMSO00001
 Operation temperature : 0 °C ~ 70 °C

2.1. Frequency/channel operations

This device contains the following capabilities:

WLAN 5 GHz_802.11a/n(HT20/40)/ac(VHT20/40/80)

UNII-1		UNII-2A		UNII-2C		UNII-3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5 180	52	5 260	100	5 500	149	5 745
40	5 200	56	5 280	116	5 580	157	5 785
48	5 240	64	5 320	140	5 700	165	5 825
				144	5 720		

Table 2.1.1. WLAN 5 GHz(802.11a/n/ac_HT20/VHT20)

UNII-1		UNII-2A		UNII-2C		UNII-3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5 190	54	5 270	102	5 510	151	5 755
46	5 230	62	5 310	118	5 590	159	5 795
				134	5 670		
				142	5 710		

Table 2.1.2. WLAN 5 GHz(802.11n/ac_HT40/VHT40)

UNII-1		UNII-2A		UNII-2C		UNII-3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
42	5 210	58	5 290	106	5 530	155	5 775
				122	5 610		
				138	5 690		

Table 2.1.3. WLAN 5 GHz(802.11ac_VHT80)

2.2. RF power setting in TEST SW

Test Program	Test Mode	Frequency [MHz]	Power Level Setting
Tera Term v4.91	802.11a	5 180	55.00
		5 200	55.00
		5 240	41.00
		5 260	66.00
		5 280	66.00
		5 320	66.00
		5 500	66.00
		5 580	66.00
		5 700	66.00
		5 720	66.00
		5 745	66.00
		5 785	66.00
		5 825	66.00
	802.11n_HT20	5 180	55.00
		5 200	55.00
		5 240	41.00
		5 260	66.00
		5 280	66.00
		5 320	66.00
		5 500	66.00
		5 580	66.00
		5 700	66.00
		5 720	66.00
		5 745	66.00
		5 785	66.00
		5 825	66.00
	802.11ac_VHT20	5 180	55.00
		5 200	55.00
		5 240	41.00
		5 260	66.00
		5 280	66.00
		5 320	66.00
		5 500	66.00
		5 580	66.00
		5 700	66.00
		5 720	66.00
		5 745	66.00
		5 785	66.00
		5 825	66.00

Test Program	Test Mode	Frequency [MHz]	Power Level Setting
Tera Term v4.91	802.11n_HT40	5 190	55.00
		5 230	42.00
		5 270	66.00
		5 310	66.00
		5 510	66.00
		5 590	66.00
		5 670	66.00
		5 710	66.00
		5 755	66.00
		5 795	66.00
	802.11ac_VHT40	5 190	55.00
		5 230	42.00
		5 270	65.00
		5 310	65.00
		5 510	65.00
		5 590	65.00
		5 670	65.00
		5 710	65.00
		5 755	64.00
		5 795	64.00
	802.11ac_VHT80	5 210	55.00
		5 290	65.00
		5 530	65.00
		5 610	65.00
		5 690	65.00
		5 775	63.00


2.3. Duty Cycle Factor

Test mode	Period (ms)	T _{On} time (ms)	Duty cycle		Duty Cycle Factor (dB)
			(Linear)	(%)	
802.11a	2.196 5	2.063 5	0.939 4	93.94	0.27
802.11n_HT20	2.124 9	1.920 6	0.903 9	90.39	0.44
802.11n_HT40	1.121 5	0.944 0	0.841 7	84.17	0.75
802.11ac_VHT20	1.238 5	0.991 5	0.800 6	80.06	0.97
802.11ac_VHT40	0.710 4	0.499 2	0.702 7	70.27	1.53
802.11ac_VHT80	0.466 6	0.256 0	0.548 6	54.86	2.61


Notes:

1. Duty cycle (Linear) = T_{On} time / Period
2. DCF(Duty cycle factor) = 10log(1/duty cycle)
3. DCF is not compensated to average result if the duty cycle is more than 98%


802.11a

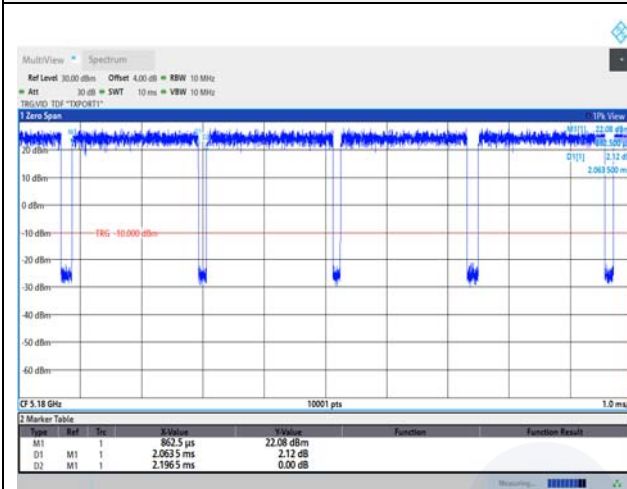


802.11ac_VHT20

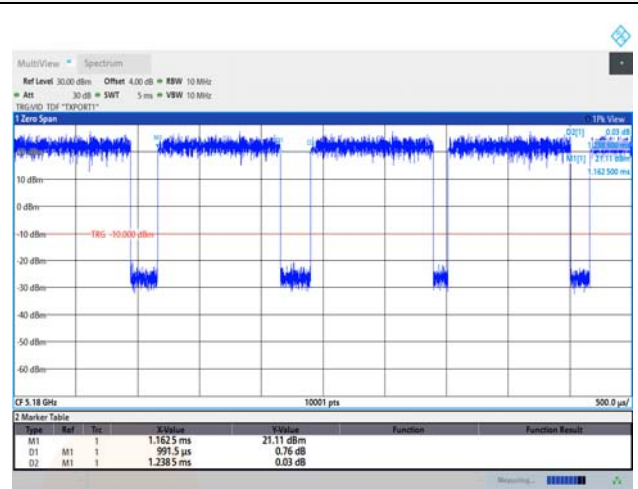


802.11n_HT20

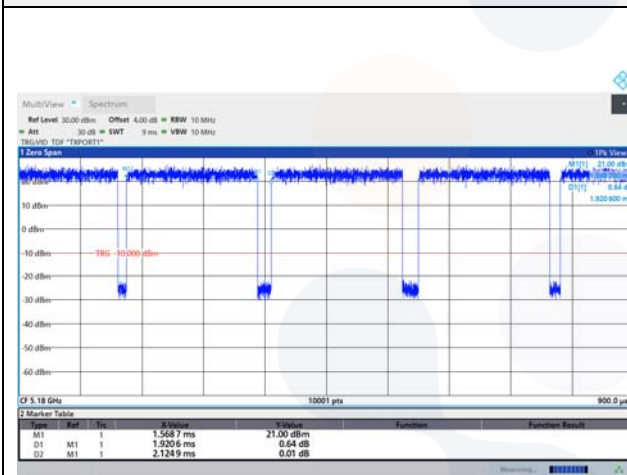


802.11ac_VHT40

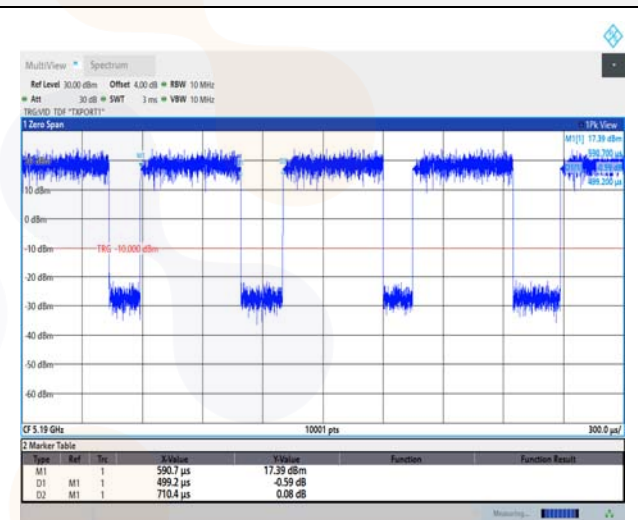

802.11n_HT40

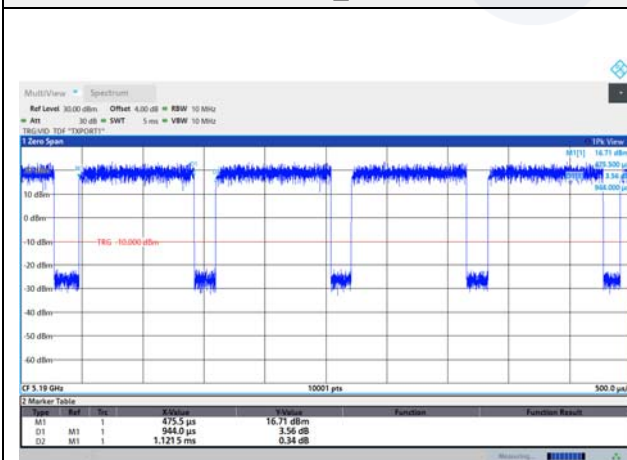

802.11ac_VHT80

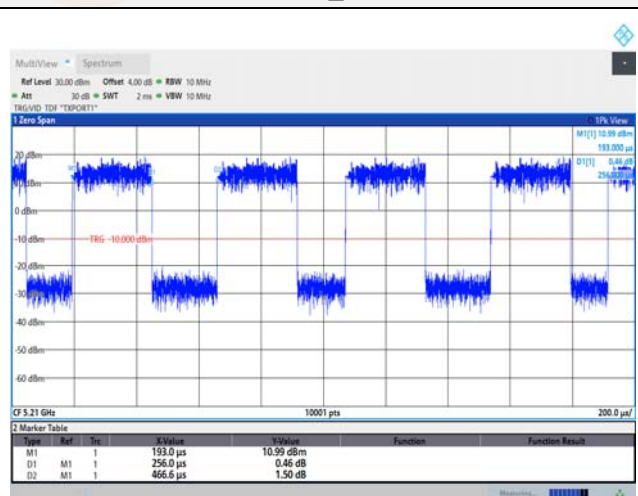

2.4. Antenna information

Mode	SISO	CDD	SDM
	ANT 1, 2	ANT 1+2	ANT 1+2
802.11a	X	√	X
802.11n_HT20	X	√	√
802.11n_HT40	X	√	√
802.11ac_VHT20	X	√	√
802.11ac_VHT40	X	√	√
802.11ac_VHT80	X	√	√

Note.

1. √ = Support, X = Not support
2. This device employs only CDD and SDM technology output power as ANT 1 and ANT 2.

2.5. Directional Gain Calculations

According to KDB 662911 D01 Multiple Transmitter Output, Directional gain may be calculated by using the formulas as below.

Directional Antenna Gain

Band	ANT 1 Gain (dBi)	ANT 2 Gain (dBi)	Power Directional Gain (dBi)
UNII-1	0.38	0.38	3.39
UNII-2A	0.27	0.27	3.28
UNII-2C	0.82	0.82	3.83
UNII-3	1.34	1.34	4.35

Note.

Unequal antenna gains, with equal transmit powers. For antenna gains given by $G_1, G_2, \dots, G_N$ dBi

Directional gain = $10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dBi

Sample calculation

In case of UNII 1, Directional gain = $10 \log[(10^{0.38/20} + 10^{0.38/20})^2 / 2] = 3.39$

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-4904-0113 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR25-SRF0132 Page (11) of (115)	
--	--	---

3. Antenna requirement

Requirement of FCC part section 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Requirement of RSS-Gen Section 6.8:

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p..) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

- The transmitter has permanently attached Chip Antenna (Internal antenna) on board.
- The E.U.T Complies with the requirement of §15.203, §15.407.

4. Summary of tests

FCC Part section(s)	IC Rule Reference	Parameter	Test Condition	Test results
15.407(a)	RSS-247 Issue 3, 6.2	Maximum conducted output power	Conducted	Pass
15.407(a)	RSS-247 Issue 3, 6.2	Maximum power spectral density		Pass
15.407(a)	RSS-Gen Issue 5, 6.7	26 dB Channel Bandwidth		Pass
15.407(e)	RSS-247 Issue 3, 6.2.4	6 dB Channel Bandwidth		Pass
-	RSS-Gen Issue 5, 6.7	Occupied Bandwidth		Pass
15.407(g)	RSS-247 Issue 3, 6	Frequency Stability		Pass
15.207(a)	RSS-Gen Issue 5, 8.8	AC Conducted Emissions		Pass
15.407(b), 15.205(a), 15.209(a)	RSS-Gen Issue 5, 8.9, 8.10 RSS-247 Issue 3, 6.2	Spurious emission	Radiated	Pass
		Band-edge, restricted band		Pass

Notes:

- All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
- EUT was investigated in three orthogonal orientations X, Y and Z. it was determined that **X** orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in **X** orientation.
- This product does not support simultaneous operation under all conditions.
- The test procedure(s) in this report were performed in accordance as following.
 - ANSI C63.10-2013
 - KDB 662911 D01 v02r01
 - KDB 789033 D02 v02r01
- The analysis of the overall rate output in the 5 GHz WLAN band showed that the lowest rate had the highest output, so the RF test was conducted using this lowest rate
- Based on the baseline scan, the worst-case data rates were:
802.11a mode: 6Mbps
802.11n_HT20/40 mode: MCS0
802.11ac_VHT20/40/80 mode: MCS0

5. Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicated a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded uncertainty ($\pm$)	
Maximum Peak Output Power	0.9 dB	
Peak Power Spectral Density	1.0 dB	
6, 26 dB Channel Bandwidth	0.1 %	
Occupied Bandwidth	0.1 %	
Conducted spurious emission	2.0 dB	
Radiated spurious Emissions (Bandedge, restricted band)	Below 30 MHz	2.3 dB
	30 MHz to 1 000 MHz	2.6 dB
	1 000 MHz to 18 000 MHz	4.8 dB
	Above 18 000 MHz	4.8 dB
AC Conducted Emissions	150 kHz to 30 MHz	2.9 dB

6. Measurement results explanation example

The offset level is set in the spectrum analyzer to compensate the RF cable loss factor between EUT conducted output port and spectrum analyzer.

With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Frequency(MHz)	Factor(dB)	Frequency(MHz)	Factor(dB)
30	10.07	9 000	13.00
50	10.31	10 000	12.93
100	10.42	11 000	12.86
200	10.66	12 000	12.76
300	10.68	13 000	12.70
400	10.66	14 000	12.88
500	10.76	15 000	12.82
600	10.78	16 000	12.98
700	11.04	17 000	13.01
800	11.23	18 000	13.33
900	11.22	19 000	13.80
1 000	11.42	20 000	13.60
2 000	12.98	21 000	13.65
3 000	13.24	22 000	13.31
4 000	13.70	23 000	13.29
5 000	12.80	24 000	13.32
6 000	12.40	25 000	13.94
7 000	13.51	26 000	13.76
8 000	13.20	26 500	13.71


Notes:

Offset(dB) = RF cable loss(dB) + Attenuator(dB)

7. Test results

7.1. Maximum conducted output power

Test setup



Limit

According to §15.407(a), RSS-247(6.2)

FCC

Band	EUT category		Conducted output power limit
UNII-1		Outdoor access point	1 W (30 dBm)
		Indoor access point	
		Fixed point-to-point access point	
	√	Client device	250 mW (23.98 dBm)
UNII-2A	√		250 mW or 11 dBm + 10logB ¹⁾
UNII-2C	√		250 mW or 11 dBm + 10logB ¹⁾
UNII-3	√		1 W (30 dBm)

IC

Band	Maximum e.i.r.p. limit
UNII-1	200 mW or 10 + 10 logB ²⁾ , dBm
UNII-2A	1 W or 17 dBm + 10logB ²⁾
UNII-2C	1 W or 17 dBm + 10logB ²⁾
UNII-3	1 W (30 dBm)

Note:

- 1) Conducted output power limit B is the 26 dB emission bandwidth.
- 2) Maximum e.i.r.p. limit B is the 99% emission bandwidth.

Test procedure

ANSI C63.10-2013-Section 12.3.2.4 or 12.3.3.1, 14.2
 KDB 789033 D02 v02r01 - Section E.2.d) or E.3.a)
 KDB 662911 D01 v02r01 – Section E).1) and Section F)

Test settings

Used test method is Section E.2.d)

◆ KDB 789033 D02 v02r01

Section E.2.d)

Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction):

- (i) Measure the duty cycle, x , of the transmitter output signal as described in II.B..
- (ii) Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (iii) Set RBW = 1 MHz
- (iv) Set RBW $\geq$ 3 MHz
- (v) Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- (vi) Sweep time = auto.
- (vii) Detector = power averaging (rms), if available. Otherwise use sample detector mode.
- (viii) Do not use sweep triggering. Allow the sweep to “free run.”
- (ix) Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
- (x) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (xi) Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \log (1/0.25) = 6 \text{ dB}$ if the duty cycle is 25%.

Test results

Conducted Output Power							
Test mode	Band	Frequency (MHz)	Measured output power				Limit (dBm)
			Reading (dBm)		DCF (dB)	Result (dBm)	
			ANT1	ANT2			
802.11a	UNII 1	5 180	13.85	14.80	0.27	17.63	23.98
		5 200	14.15	14.79		17.76	
		5 240	10.59	10.24		13.70	
	UNII 2A	5 260	17.41	16.28		20.16	23.68
		5 280	16.90	16.25		19.87	
		5 320	16.55	16.18		19.65	
	UNII 2C	5 500	17.46	17.19		20.61	23.70
		5 580	17.32	16.79		20.34	
		5 700	17.16	17.23		20.48	
	UNII 3	5 745	17.01	17.10		20.34	30.00
		5 785	16.94	16.49		20.00	
		5 825	16.93	17.30		20.40	
802.11n HT20	UNII 1	5 180	13.71	14.49	0.44	17.57	23.98
		5 200	14.07	14.59		17.79	
		5 240	10.37	10.17		13.72	
	UNII 2A	5 260	15.79	16.03		19.36	23.93
		5 280	15.87	16.02		19.39	
		5 320	15.91	16.05		19.43	
	UNII 2C	5 500	17.26	17.09		20.63	23.93
		5 580	17.43	17.43		20.88	
		5 700	16.88	17.10		20.44	
	UNII 3	5 745	16.60	16.84		20.17	30.00
		5 785	16.76	16.96		20.31	
		5 825	16.79	17.26		20.48	
802.11n HT40	UNII 1	5 190	13.34	13.73	0.75	17.30	23.98
		5 230	9.53	10.19		13.63	
	UNII 2A	5 270	15.49	15.28		19.14	23.98
		5 310	15.32	15.56		19.20	
	UNII 2C	5 510	15.15	14.85		18.76	23.98
		5 590	15.61	15.27		19.20	
		5 670	16.47	16.97		20.49	
	UNII 3	5 755	16.88	16.81		20.60	30.00
		5 795	16.69	16.77		20.49	

Notes:

1. $\text{Result(dBm)} = \text{Reading } 10\log(10^{(\text{ANT1}/10)} + 10^{(\text{ANT2}/10)}) \text{ (dBm)} + \text{D.C.F (dB)}$

Conducted Output Power							
Test mode	Band	Frequency (MHz)	Measured output power				Limit (dBm)
			Reading (dBm)		DCF (dB)	Result (dBm)	
			ANT1	ANT2			
802.11ac VHT20	UNII 1	5 180	13.72	14.01	0.97	17.84	23.98
		5 200	14.04	14.11		18.05	
		5 240	9.96	9.99		13.95	
	UNII 2A	5 260	15.59	15.80		19.67	23.90
		5 280	15.43	16.01		19.71	
		5 320	15.57	15.97		19.75	
	UNII 2C	5 500	17.12	16.87		20.97	23.89
		5 580	17.41	17.44		21.40	
		5 700	16.66	16.89		20.75	
	UNII 3	5 745	16.70	16.85		20.75	30.00
		5 785	16.73	16.98		20.83	
		5 825	16.70	17.01		20.83	
802.11ac VHT40	UNII 1	5 190	12.92	13.17	1.53	17.59	23.98
		5 230	9.30	9.66		14.03	
	UNII 2A	5 270	15.59	16.22		20.46	23.98
		5 310	15.62	15.83		20.27	
	UNII 2C	5 510	15.51	15.38		19.99	23.98
		5 590	15.74	15.42		20.13	
		5 670	15.69	16.15		20.47	
	UNII 3	5 755	14.88	15.42		19.70	30.00
		5 795	14.24	15.40		19.40	
802.11ac VHT80	UNII 1	5 210	12.52	12.54	2.61	18.15	23.98
	UNII 2A	5 290	15.57	15.71		21.26	23.98
	UNII 2C	5 530	16.02	15.71		21.49	23.98
		5 610	15.16	15.50		20.95	
	UNII 3	5 775	14.99	15.13		20.68	30.00

Notes:

1. Result(dBm) = Reading $10\log(10^{(ANT1/10)} + 10^{(ANT2/10)})$ (dBm) + D.C.F (dB)

e.i.r.p.						
Test mode	Band	Frequency (MHz)	Measured output power			MAX e.i.r.p Limit (dBm)
			Conducted output Power (dBm)	ANT gain (dBi)	MAX e.i.r.p (dBm)	
802.11a	UNII 1	5 180	17.63	3.39	21.02	22.14
		5 200	17.76		21.15	
		5 240	13.70		17.09	
	UNII 2A	5 260	20.16	3.28	23.44	29.14
		5 280	19.87		23.15	
		5 320	19.65		22.93	
	UNII 2C	5 500	20.61	3.83	24.44	29.14
		5 580	20.34		24.17	
		5 700	20.48		24.31	
	UNII 3	5 745	20.34	4.35	24.69	30.00
		5 785	20.00		24.35	
		5 825	20.40		24.75	
802.11n HT20	UNII 1	5 180	17.57	3.39	20.96	22.44
		5 200	17.79		21.18	
		5 240	13.72		17.11	
	UNII 2A	5 260	19.36	3.28	22.64	29.44
		5 280	19.39		22.68	
		5 320	19.43		22.71	
	UNII 2C	5 500	20.63	3.83	24.46	29.44
		5 580	20.88		24.71	
		5 700	20.44		24.27	
	UNII 3	5 745	20.17	4.35	24.52	30.00
		5 785	20.31		24.66	
		5 825	20.48		24.83	
802.11n HT40	UNII 1	5 190	17.30	3.39	20.69	23.01
		5 230	13.63		17.02	
	UNII 2A	5 270	19.14	3.28	22.43	30.00
		5 310	19.20		22.48	
	UNII 2C	5 510	18.76	3.83	22.59	30.00
		5 590	19.20		23.03	
		5 670	20.49		24.32	
	UNII 3	5 755	20.60	4.35	24.95	30.00
		5 795	20.49		24.84	

Notes:

1. Conducted output power (dBm) = $10\log(10^{(ANT1/10)} + 10^{(ANT2/10)})$ (dBm) + D.C.F (dB)
2. e.i.r.p. Calculation : e.i.r.p. (dBm) = Conducted output power (dBm) + Directional gain (dBi)
3. Directional gain = Correlated (CDD) and referred to 2.5 tables in the applicable report.


e.i.r.p.						
Test mode	Band	Frequency (MHz)	Measured output power			MAX e.i.r.p Limit (dBm)
			Conducted output Power (dBm)	ANT gain (dBi)	MAX e.i.r.p (dBm)	
802.11ac VHT20	UNII 1	5 180	17.84	3.39	21.23	22.44
		5 200	18.05		21.44	
		5 240	13.95		17.34	
	UNII 2A	5 260	19.67	3.28	22.95	29.44
		5 280	19.71		22.99	
		5 320	19.75		23.03	
	UNII 2C	5 500	20.97	3.83	24.80	29.44
		5 580	21.40		25.23	
		5 700	20.75		24.58	
	UNII 3	5 745	20.75	4.35	25.10	30.00
		5 785	20.83		25.18	
		5 825	20.83		25.18	
802.11ac VHT40	UNII 1	5 190	17.59	3.39	20.98	23.01
		5 230	14.03		17.42	
	UNII 2A	5 270	20.46	3.28	23.74	30.00
		5 310	20.27		23.55	
	UNII 2C	5 510	19.99	3.83	23.82	30.00
		5 590	20.13		23.96	
		5 670	20.47		24.30	
	UNII 3	5 755	19.70	4.35	24.05	30.00
		5 795	19.40		23.75	
	UNII 1	5 210	18.15	3.39	21.54	23.01
802.11ac VHT80	UNII 2A	5 290	21.26	3.28	24.54	30.00
	UNII 2C	5 530	21.49	3.83	25.32	30.00
		5 610	20.95		24.78	
	UNII 3	5 775	20.68	4.35	25.03	30.00

Notes:

1. Conducted output power (dBm) = $10\log(10^{(ANT1/10)} + 10^{(ANT2/10)})$ (dBm) + D.C.F (dB)
2. e.i.r.p. Calculation : e.i.r.p. (dBm) = Conducted output power (dBm) + Directional gain (dBi)
3. Directional gain = Correlated (CDD) and referred to 2.5 tables in the applicable report.

7.2. Maximum Power Spectral Density

Test setup



Limit

According to §15.407(a), RSS-247(6.2)

Band	EUT category		Limit
UNII-1		Outdoor access point	17dBm/MHz
		Indoor access point	
		Fixed point-to-point access point	
	√	Client device	11 dBm /MHz
UNII-2A		√	11 dBm /MHz
UNII-2C		√	11 dBm /MHz
UNII-3		√	30 dBm /500 kHz

Test procedure

ANSI C63.10-2013 Section 12.3.2.2, 14.3.2.2

KDB 789033 D02 v02r01 – Section E and F

KDB 662911 D01 v02r01 - Section E). 2) and Section F)

Test settings

Section F

The rules requires “maximum power spectral density” measurements where the intent is to measure the maximum value of the time average of the power spectral density measured during a period of continuous transmission. Refer to III.A for additional guidance for devices that use channel aggregation.

- Create an average power spectrum for the EUT operating mode being tested by following the instructions in II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, “Compute power...” (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
- Search function on the instrument to find the peak of the spectrum and record its value.
- Adjustments to the peak value of the spectrum, if applicable:
 - If Method SA-2 or SA-2 Alternative was used, add $10 \log (1/x)$, where x is the duty cycle, to the peak of the spectrum.
 - If Method SA-3 Alternative was used and the linear mode was used in II.E.2.g) (viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
- The result is the Maximum PSD over 1MHz reference bandwidth
- For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the preceding procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in Section 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of RBWs less than 1MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth(i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-4904-0113 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR25-SRF0132 Page (22) of (115)	
--	--	---

MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

- Set $RBW \geq 1/T$, where T is defined in II.B.I.a).
- Set $VBW \geq 3 RBW$.
- If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500 \text{ kHz} / RBW)$ to the measured result, whereas RBW (<500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1 \text{ MHz} / RBW)$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note:

- As a practical matter, it is recommended to use reduced RBW of 100 kHz for the II.F.5.c) and II.F.5.d), since RBW=100 kHz is available on nearly all spectrum analyzers.
- Method SA-2 is used.

Test results

Power spectral density							
Test mode	Band	Frequency (MHz)	Measured PSD (dBm/MHz)		DCF (dB)	Maximum PSD (dB m/MHz)	Limit (dBm/MHz)
			ANT1	ANT2			
802.11a	UNII 1	5 180	2.76	3.48	0.27	6.42	11.00
		5 200	2.59	3.64		6.43	
		5 240	-1.15	-2.02		1.72	
	UNII 2A	5 260	6.06	4.40		8.59	11.00
		5 280	5.17	5.28		8.51	
		5 320	5.30	5.09		8.48	
	UNII 2C	5 500	6.45	5.59		9.32	11.00
		5 580	6.17	6.00		9.37	
		5 700	5.83	5.70		9.05	
802.11n HT20	UNII 1	5 180	2.38	2.68	0.44	5.98	11.00
		5 200	1.01	2.77		5.43	
		5 240	-1.57	-2.26		1.55	
	UNII 2A	5 260	3.58	4.39		7.45	11.00
		5 280	4.07	4.71		7.85	
		5 320	4.06	4.47		7.72	
	UNII 2C	5 500	5.55	5.55		9.00	11.00
		5 580	5.71	5.70		9.15	
		5 700	5.42	4.86		8.60	
802.11n HT40	UNII 1	5 190	-0.87	-1.22	0.75	2.72	11.00
		5 230	-5.80	-3.93		-1.01	
	UNII 2A	5 270	0.58	1.27		4.70	11.00
		5 310	0.51	0.33		4.18	
	UNII 2C	5 510	0.95	0.96		4.71	11.00
		5 590	1.23	1.54		5.15	
		5 670	2.30	2.30		6.06	

Notes:

1. Maximum PSD(dBm/MHz) = Measured PSD($10\log(10^{(ANT1/10)} + 10^{(ANT2/10)})$ (dBm/MHz) + D.C.F(dB))

Power spectral density							
Test mode	Band	Frequency (MHz)	Measured PSD (dBm/MHz)		DCF (dB)	Maximum PSD (dB m/MHz)	Limit (dBm/MHz)
			ANT1	ANT2			
802.11ac VHT20	UNII 1	5 180	2.08	2.22	0.97	6.13	11.00
		5 200	2.49	1.70		6.09	
		5 240	-1.85	-3.19		1.51	
	UNII 2A	5 260	3.85	3.90		7.85	11.00
		5 280	3.68	4.67		8.18	
		5 320	3.97	3.99		7.96	
	UNII 2C	5 500	5.43	5.05		9.22	11.00
		5 580	5.84	5.58		9.69	
		5 700	5.31	5.62		9.44	
802.11ac VHT40	UNII 1	5 190	-0.85	-1.04	1.53	3.60	11.00
		5 230	-4.83	-5.29		-0.51	
	UNII 2A	5 270	1.56	1.95		6.30	11.00
		5 310	1.47	1.58		6.07	
	UNII 2C	5 510	1.20	1.25		5.77	11.00
		5 590	1.86	0.75		5.88	
		5 670	1.49	1.33		5.95	
802.11ac VHT80	UNII 1	5 210	-4.58	-4.24	2.61	1.21	11.00
	UNII 2A	5 290	-2.01	-1.74		3.74	11.00
	UNII 2C	5 530	0.16	-1.15		5.17	11.00
		5 610	-1.55	-1.56		4.06	

Notes:

1. Maximum PSD(dBm/MHz) = Measured PSD($10\log(10^{(ANT1/10)} + 10^{(ANT2/10)})$ (dBm/MHz) + D.C.F(dB))

Power spectral density							
Test mode	Band	Frequency (MHz)	Measured PSD (dBm/500 kHz)		DCF (dB)	Maximum PSD (dBm /500 kHz)	Limit (dBm /500 kHz)
			ANT1	ANT2			
802.11a	UNII 3	5 745	2.23	3.03	0.27	5.93	30.00
		5 785	2.70	3.43		6.36	
		5 825	2.53	3.40		6.27	
802.11n HT20		5 745	2.55	2.45	0.44	5.95	
		5 785	2.70	2.98		6.29	
		5 825	2.35	2.80		6.03	
802.11n HT40		5 755	-0.15	-0.56	0.75	3.41	
		5 795	-0.22	-0.65		3.33	
802.11ac VHT20		5 745	1.66	1.97	0.97	5.79	
		5 785	1.97	2.61		6.28	
		5 825	2.52	2.26		6.37	
802.11ac VHT40		5 755	-1.86	-1.76	1.53	2.73	
		5 795	-2.35	-1.66		2.55	
802.11ac VHT80		5 775	-5.24	-4.11	2.61	0.98	

Notes:


1. Maximum PSD(dBm/500 kHz) = Measured PSD($10\log(10^{(ANT1/10)} + 10^{(ANT2/10)})$) (dBm/500 kHz) + D.C.F(dB))

e.i.r.p. spectral density									
Test mode	Band	Frequency (MHz)	Measured PSD (dBm/MHz)		DCF (dB)	Maximum PSD (dBm/MHz)	ANT Gain (dBi)	e.i.r.p. PSD (dBm/MHz)	Limit (dBm/MHz)
			ANT1	ANT2					
802.11a	UNII 1	5 180	2.76	3.48	0.27	6.42	3.39	9.81	11.00
		5 200	2.59	3.64		6.43		9.82	
		5 240	-1.15	-2.02		1.72		5.11	
802.11n HT20	UNII 1	5 180	2.38	2.68	0.44	5.98	3.39	9.37	11.00
		5 200	1.01	2.77		5.43		8.82	
		5 240	-1.57	-2.26		1.55		4.94	
802.11n HT40	UNII 1	5 190	-0.87	-1.22	0.75	2.72	3.39	6.11	11.00
		5 230	-5.80	-3.93		-1.01		2.38	
802.11ac VHT20	UNII 1	5 180	2.08	2.22	0.97	6.13	3.39	9.52	11.00
		5 200	2.49	1.70		6.09		9.48	
		5 240	-1.85	-3.19		1.51		4.90	
802.11ac VHT40	UNII 1	5 190	-0.85	-1.04	1.53	3.60	3.39	6.99	11.00
		5 230	-4.83	-5.29		-0.51		2.88	
802.11ac VHT80	UNII 1	5 210	-4.58	-4.24	2.61	1.21	3.39	4.60	11.00

Notes:

1. Maximum PSD(dBm/MHz) = Measured PSD($10\log(10^{(ANT1/10)} + 10^{(ANT2/10)})$) (dBm/MHz) + D.C.F(dB))
2. e.i.r.p. PSD (dBm/MHz) = Maximum PSD (dBm/MHz) + Directional gain (dBi)
3. Directional gain = Correlated (CDD) and referred to 2.5 tables in the applicable report.



In order to simplify the report, attached plots were the worst case per bandwidth

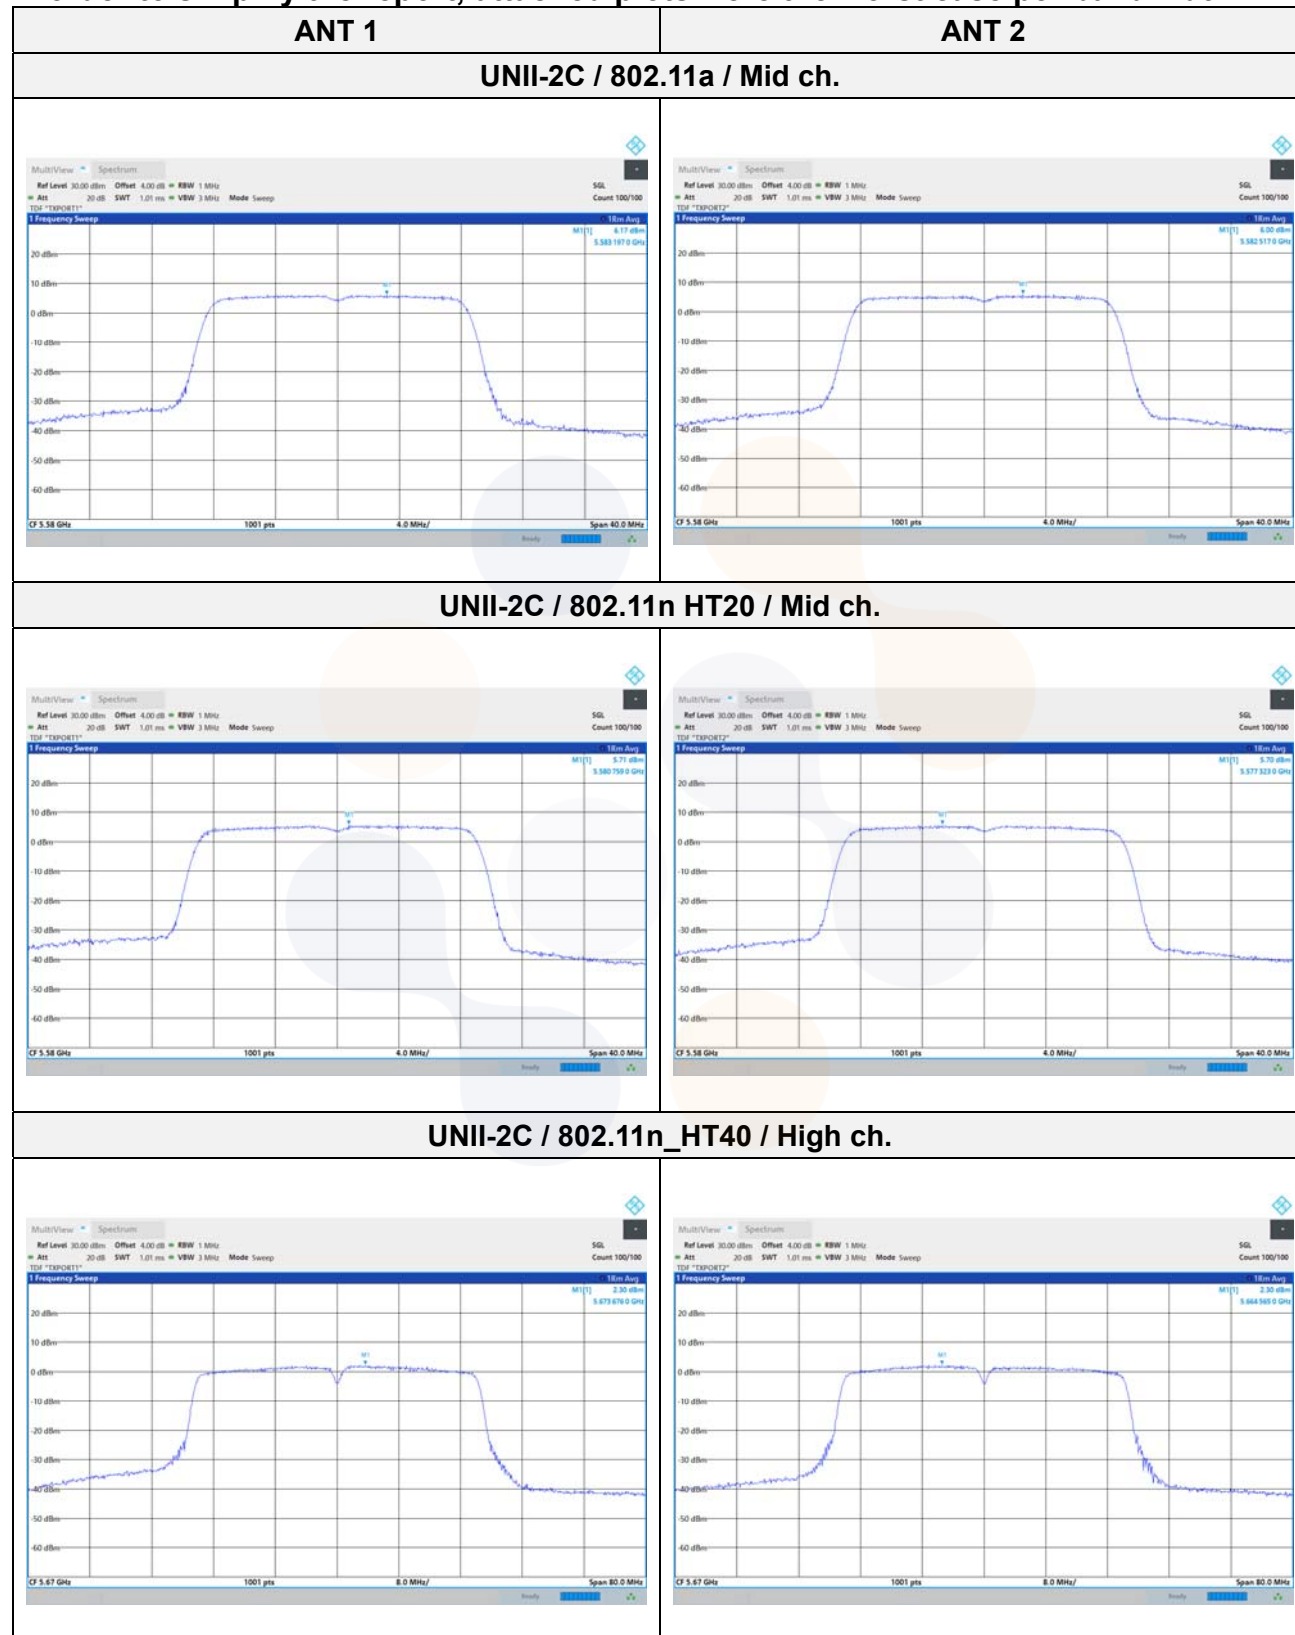



ANT 1

ANT 2



UNII-2C / 802.11ac_VHT20 / Mid ch.

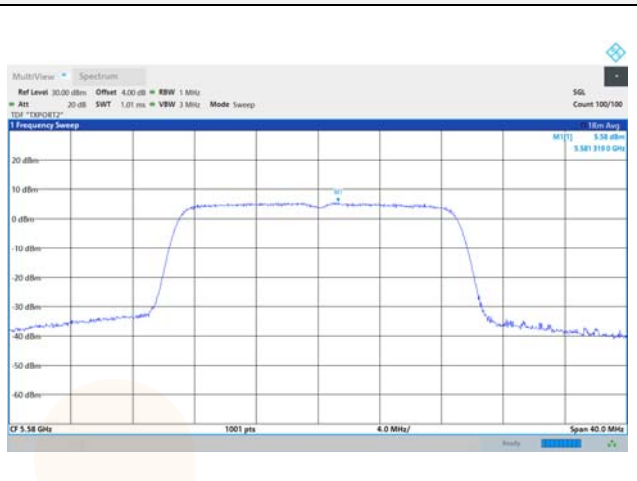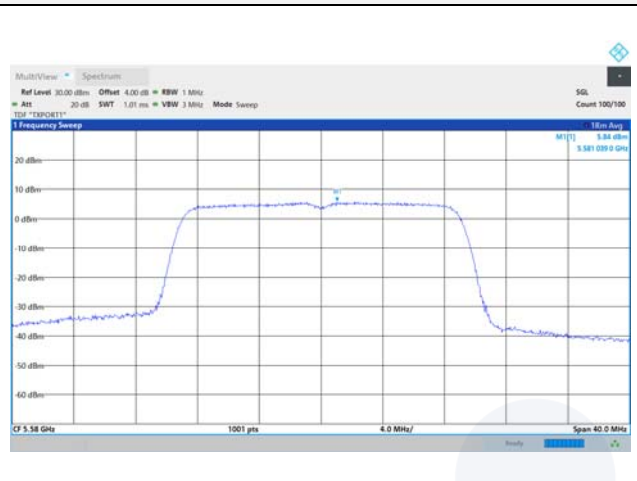

UNII-2A / 802.11ac_VHT40 / Low ch.

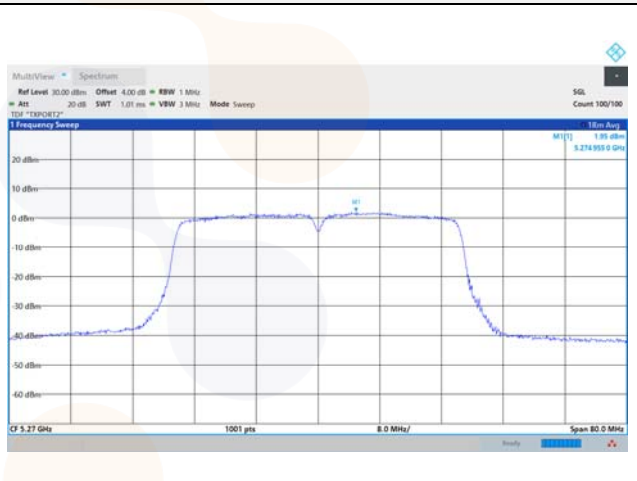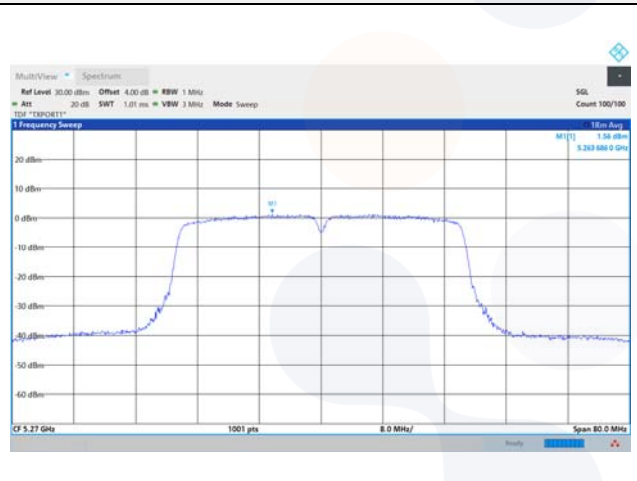


UNII-2C / 802.11ac_VHT80 / Low ch.

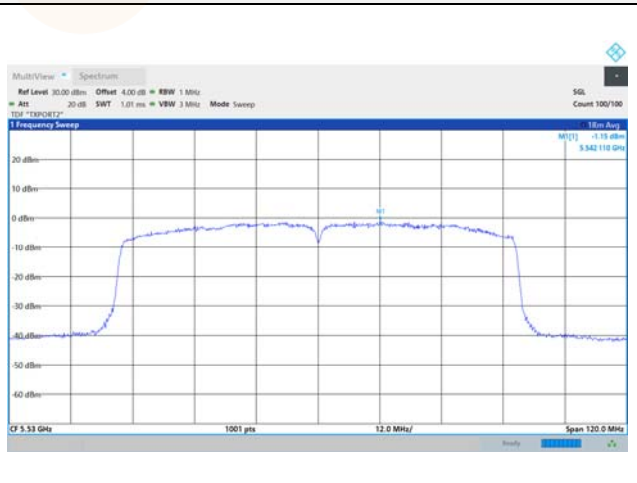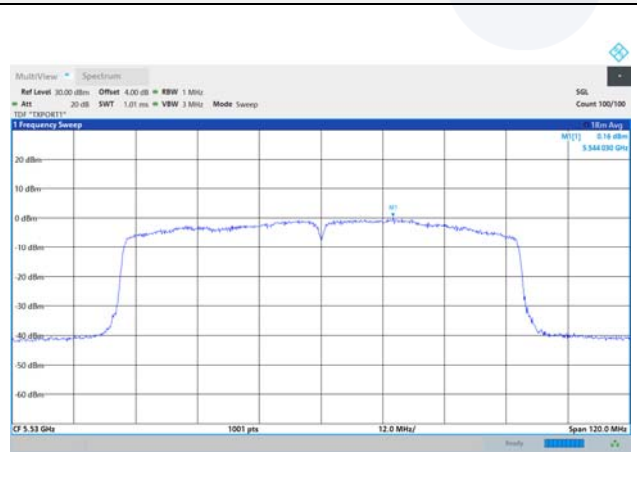

7.3. 26 dB Bandwidth & 99% Bandwidth

Test setup



Limit

N/A

Test procedure

ANSI C63.10-2013 Section 12.4

KDB 789033 D02 v02r01 - Section C.1 (26dB bandwidth)

KDB 789033 D02 v02r01 - Section D (99% bandwidth)

Test settings

1. 26 dB Bandwidth

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. 99% Occupied Bandwidth

- Set center frequency to the nominal EUT channel center frequency.
- Set span = 1.5 times to 5.0 times the OBW.
- Set RBW = 1% to 5% of the OBW
- Set VBW $\geq 3 \times$ RBW
- Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- Use the 99% power bandwidth function of the instrument (if available).
- If the instrument does not have a 99% power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

Test results

Test mode	Band	Frequency(MHz)	26 dB bandwidth (MHz)		99% bandwidth (MHz)	
			ANT 1	ANT 2	ANT 1	ANT 2
802.11a	UNII-1	5 180	18.80	18.75	16.41	16.39
		5 200	18.85	18.60	16.42	16.39
		5 240	19.00	18.65	16.42	16.38
	UNII-2A	5 260	19.05	18.70	16.43	16.38
		5 280	18.90	18.55	16.40	16.36
		5 320	18.95	18.65	16.43	16.38
	UNII-2C	5 500	18.90	18.60	16.40	16.38
		5 580	19.05	18.60	16.43	16.40
		5 700	19.00	18.65	16.41	16.37
802.11n HT20	UNII-1	5 180	19.80	19.90	17.56	17.57
		5 200	19.80	19.75	17.56	17.54
		5 240	19.85	19.75	17.58	17.55
	UNII-2A	5 260	19.80	19.70	17.57	17.56
		5 280	19.70	19.70	17.54	17.55
		5 320	19.80	19.65	17.56	17.54
	UNII-2C	5 500	19.75	19.75	17.55	17.54
		5 580	19.85	20.00	17.57	17.58
		5 700	19.85	19.65	17.55	17.55
802.11n HT40	UNII-1	5 190	41.50	41.60	36.18	36.23
		5 230	42.70	41.50	36.40	36.26
	UNII-2A	5 270	41.60	41.70	36.27	36.28
		5 310	41.60	41.50	36.18	36.26
	UNII-2C	5 510	42.00	41.80	36.28	36.27
		5 590	41.50	42.20	36.18	36.43
		5 670	42.20	42.10	36.24	36.27
802.11ac VHT20	UNII-1	5 180	19.65	19.65	17.57	17.56
		5 200	19.85	19.55	17.57	17.53
		5 240	19.75	19.60	17.56	17.57
	UNII-2A	5 260	19.75	19.65	17.56	17.57
		5 280	19.70	19.50	17.56	17.58
		5 320	19.85	19.50	17.57	17.54
	UNII-2C	5 500	19.70	19.55	17.55	17.58
		5 580	19.90	19.45	17.58	17.57
		5 700	19.85	19.50	17.58	17.56


Test mode	Band	Frequency(MHz)	26 dB bandwidth (MHz)		99% bandwidth (MHz)	
			ANT 1	ANT 2	ANT 1	ANT 2
802.11ac VHT40	UNII-1	5 190	41.30	40.40	36.18	36.11
		5 230	41.90	40.50	36.24	36.03
	UNII-2A	5 270	41.70	40.50	36.27	36.11
		5 310	41.40	40.50	36.24	36.07
	UNII-2C	5 510	41.50	40.80	36.20	36.11
		5 590	41.50	40.40	36.20	36.08
		5 670	41.70	40.20	36.29	36.15
802.11ac VHT80	UNII-1	5 210	81.60	80.52	74.71	74.67
	UNII-2A	5 290	81.36	80.88	74.78	74.65
	UNII-2C	5 530	81.12	81.12	74.60	74.67
		5 610	81.60	80.64	74.72	74.65

In order to simplify the report, the attached plot is the widest bandwidth in Test mode.

26 dB bandwidth


ANT 1

UNII-2A / 802.11a / Low ch.

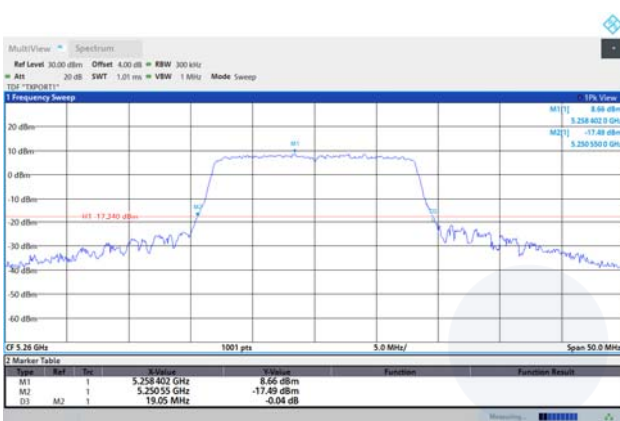

ANT 2


UNII-1 / 802.11a / Low ch.

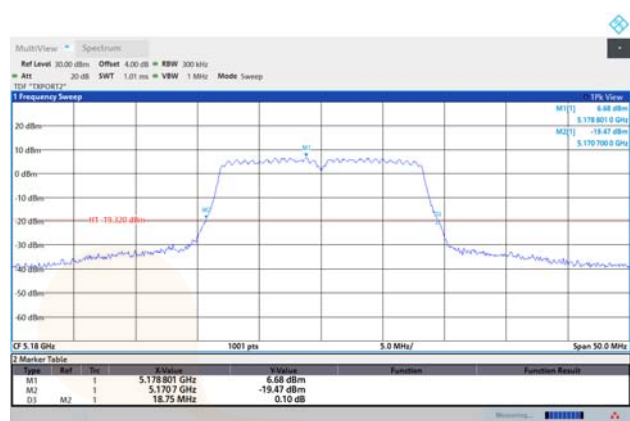


UNII-1 / 802.11n_HT20 / High ch.




UNII-2C / 802.11n_HT20 / Mid ch.

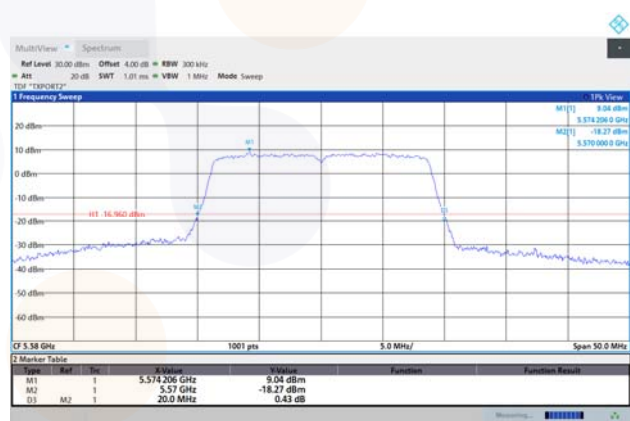

UNII-1 / 802.11n_HT40 / High ch.

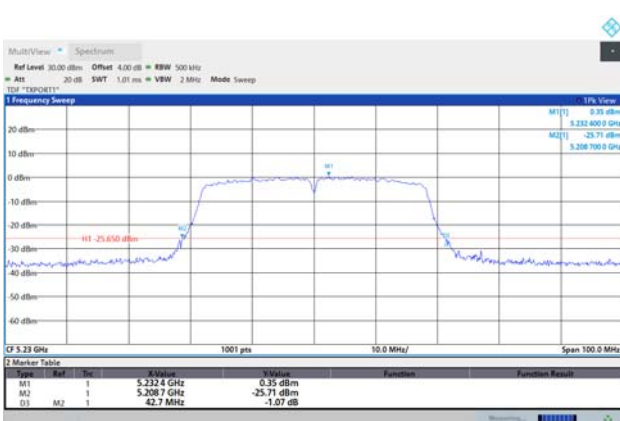


UNII-2C / 802.11n_HT40 / Mid ch.

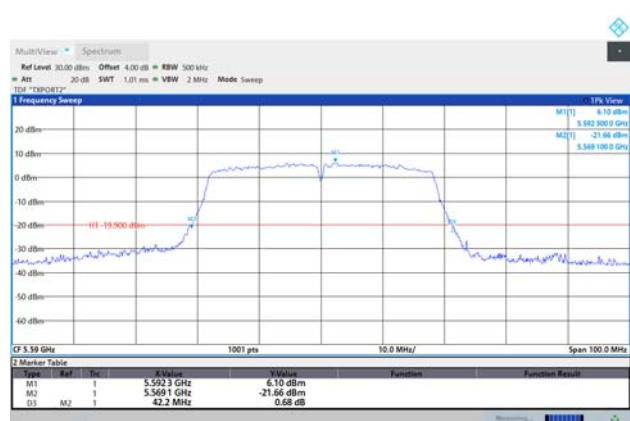

26 dB bandwidth


ANT 1

UNII-2C / 802.11ac_VHT20 / Mid ch.

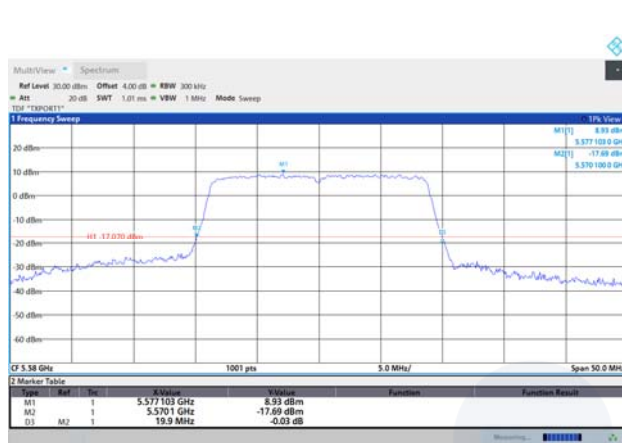

ANT 2

UNII-1 / 802.11ac_VHT20 / Low ch.

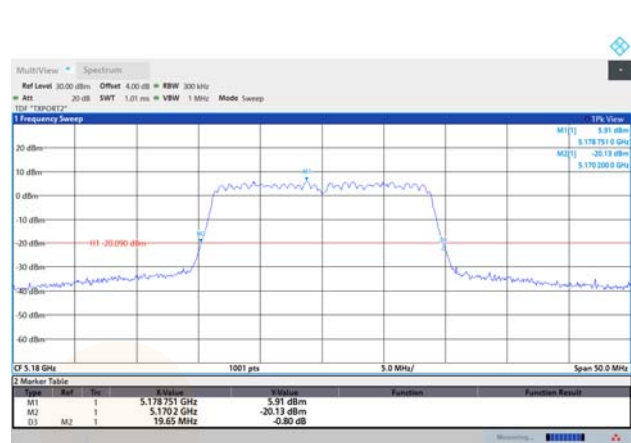


UNII-1 / 802.11ac_VHT40 / High ch.



UNII-2C / 802.11ac_VHT40 / Low ch.




UNII-1 / 802.11ac_VHT80 / Mid ch.

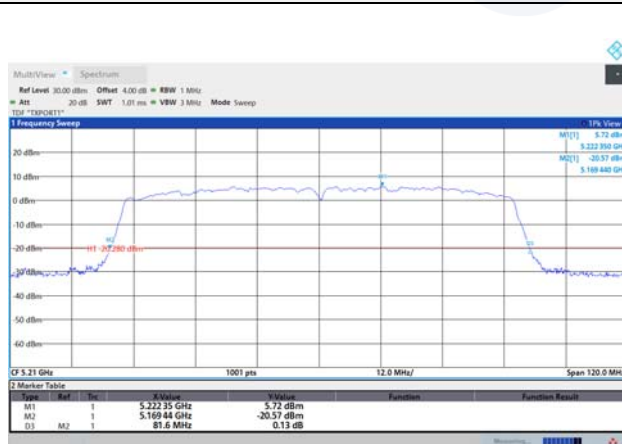

UNII-2C / 802.11ac_VHT80 / Low ch.




In order to simplify the report, the attached plot is the widest bandwidth in Test mode.

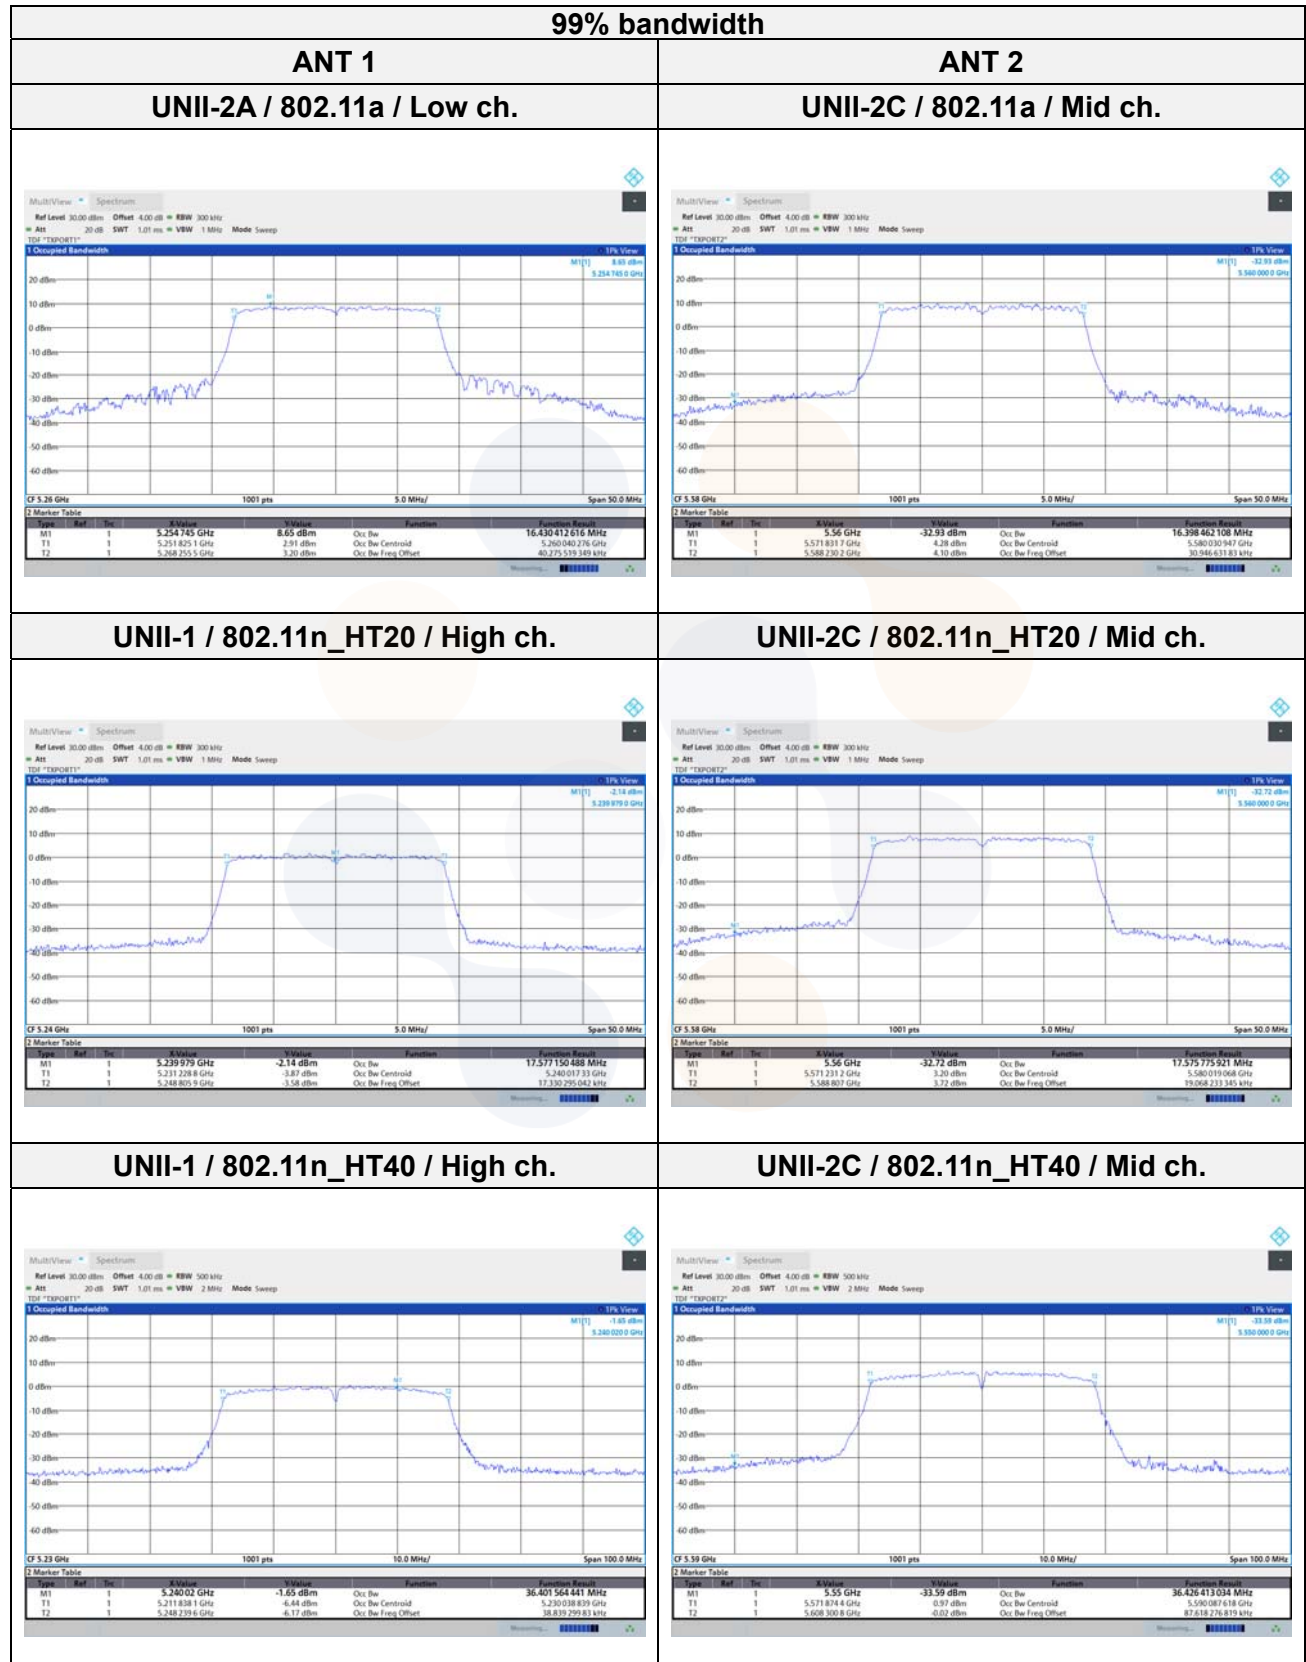

99% bandwidth


ANT 1

UNII-2C / 802.11ac_VHT20 / Mid ch.

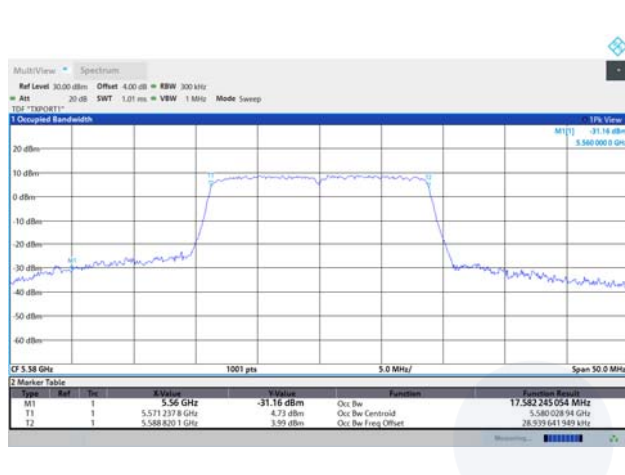

ANT 2

UNII-2A / 802.11ac_VHT20 / Mid ch.

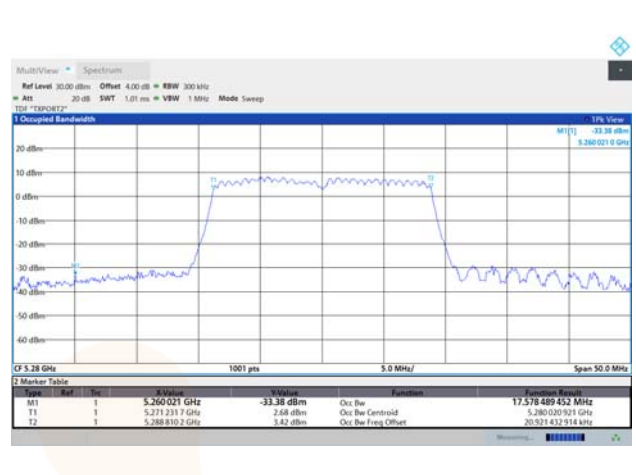


UNII-2C / 802.11ac_VHT40 / High ch.




UNII-2C / 802.11ac_VHT40 / High ch.



UNII-2A / 802.11ac_VHT80 / Mid ch.

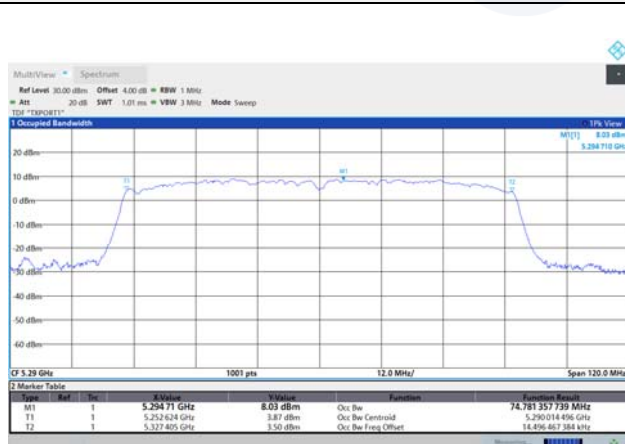


UNII-1 / 802.11ac_VHT80 / Mid ch.

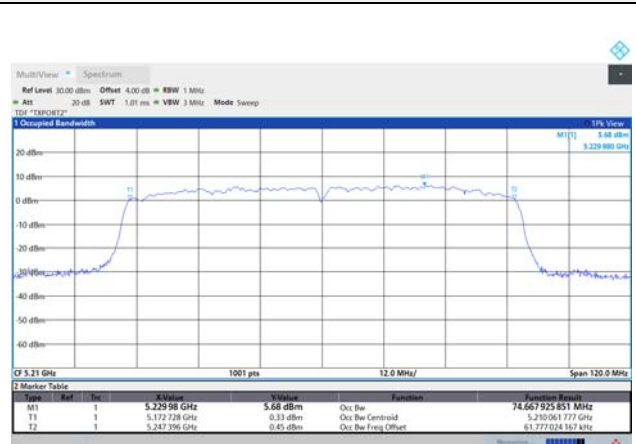

7.4. 6 dB Bandwidth & 99% Bandwidth

Test setup



Limit

According to §15.407(e), Within the 5.725-5.850 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500kHz.

Test procedure

ANSI C63.10-2013 Section 6.9.2

KDB 789033 D02 v02r01 - Section C.2

Test settings

Minimum Emission Bandwidth for the band 5.725–5.85 GHz.


Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 kHz for the band 5.725–5.85 GHz band. The following procedure shall be used for measuring this Bandwidth:

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test results

Test mode	Band	Frequency (MHz)	6dB bandwidth (MHz)		Limit (MHz)	99% bandwidth (MHz)	
			ANT 1	ANT 2		ANT 1	ANT 2
802.11a	UNII-3	5 745	16.40	16.45	0.50	16.40	16.37
		5 785	16.45	16.45	0.50	16.41	16.40
		5 825	16.45	16.45	0.50	16.41	16.39
802.11n HT20	UNII-3	5 745	17.65	17.40	0.50	17.58	17.56
		5 785	17.65	17.40	0.50	17.56	17.55
		5 825	17.40	17.65	0.50	17.55	17.56
802.11n HT40	UNII-3	5 755	35.30	35.30	0.50	36.27	36.29
		5 795	35.30	35.30	0.50	36.20	36.32
802.11ac VHT20	UNII-3	5 745	17.65	17.65	0.50	17.57	17.56
		5 785	17.65	17.65	0.50	17.58	17.58
		5 825	17.65	17.65	0.50	17.56	17.58
802.11ac VHT40	UNII-3	5 755	35.40	35.30	0.50	36.33	36.04
		5 795	35.30	35.30	0.50	36.21	36.02
802.11ac VHT80	UNII-3	5 775	75.48	75.36	0.50	74.51	74.71


In order to simplify the report, the attached plot is the widest bandwidth in Band
6 dB bandwidth

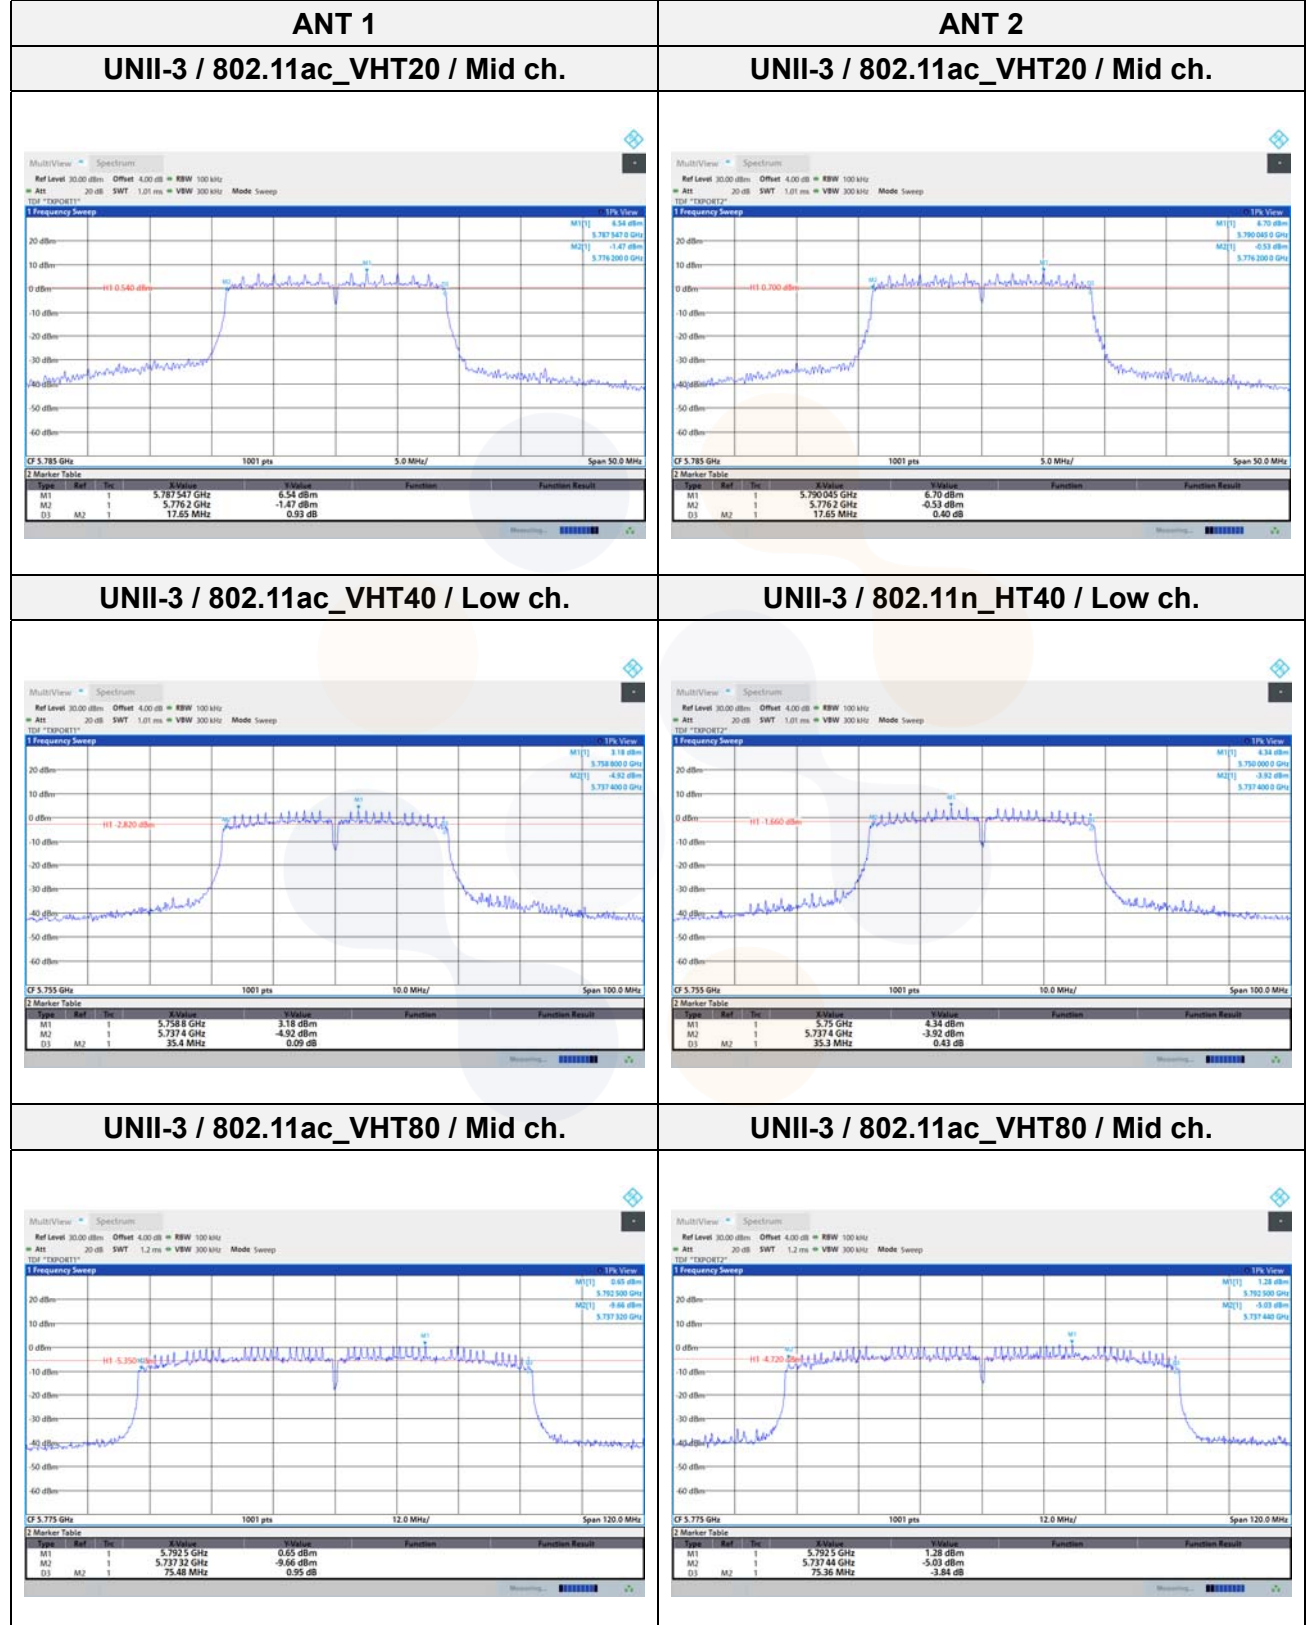

99% bandwidth


ANT 1

UNII-3 / 802.11n_HT20 / Low ch.

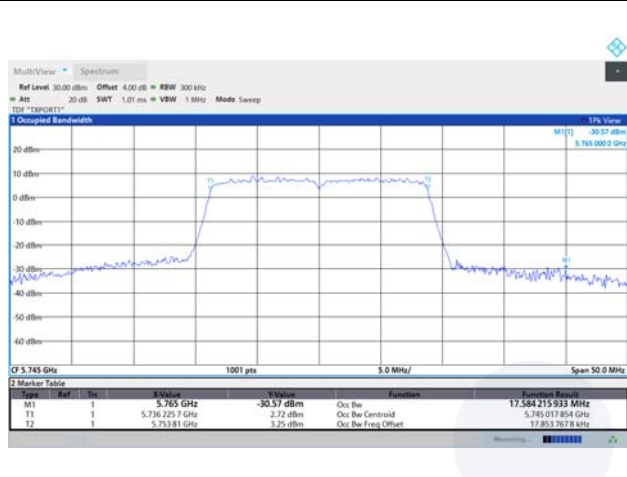

ANT 2


UNII-3 / 802.11ac_VHT20 / Mid ch.

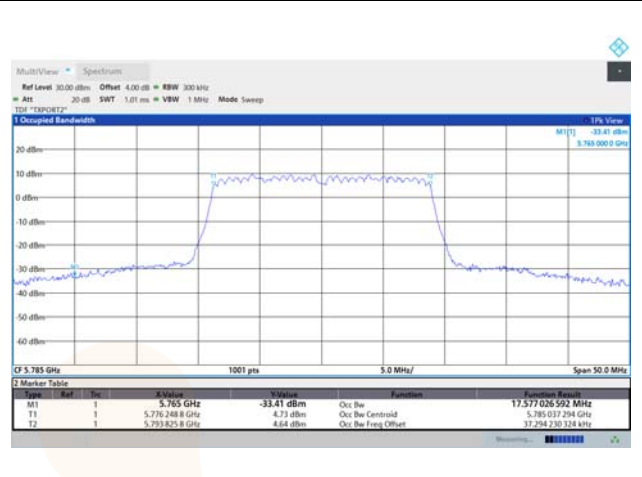


UNII-3 / 802.11ac_VHT40 / Low ch.




UNII-3 / 802.11n_HT40 / High ch.

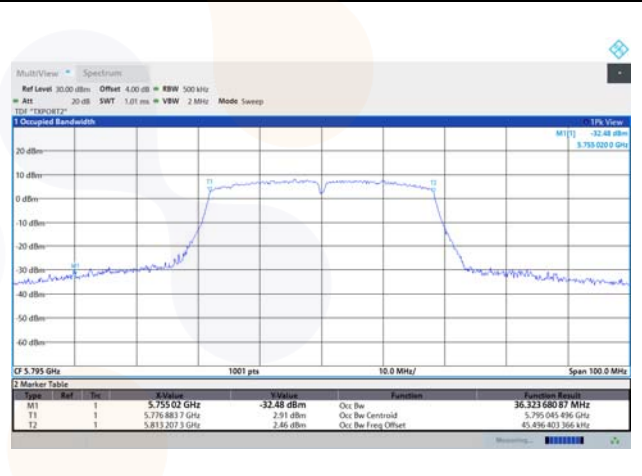

UNII-3 / 802.11ac_VHT80 / Mid ch.

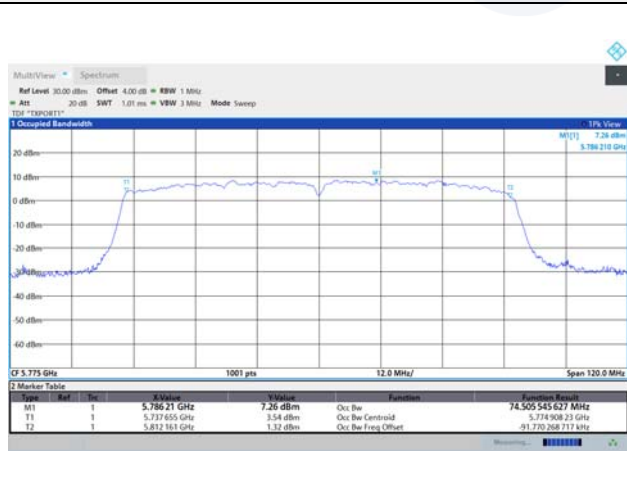

UNII-3 / 802.11ac_VHT80 / Mid ch.

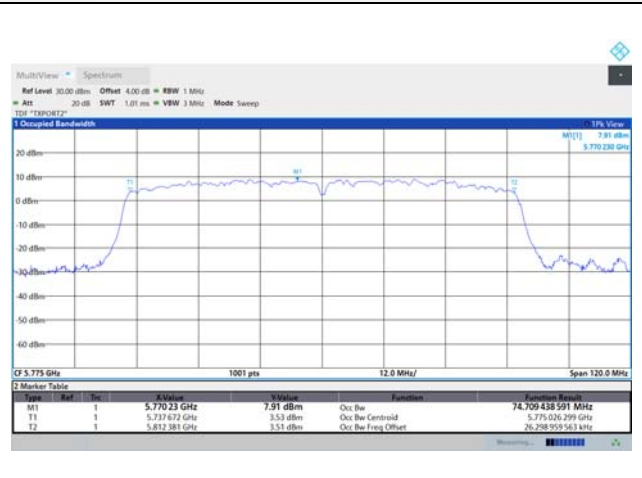

7.5. Straddle channel

Test mode	Band	Frequency (MHz)	26dB Bandwidth (MHz)		99% Bandwidth (MHz)	
			ANT1	ANT2	ANT1	ANT2
802.11a	UNII-2C	5 720	14.50	14.35	16.39	16.40
802.11n_HT20		5 720	14.90	14.95	17.58	17.56
802.11n_HT40		5 710	35.90	35.90	36.27	36.29
802.11ac_VHT20		5 720	14.90	14.80	17.58	17.58
802.11ac_VHT40		5 710	36.00	35.30	36.29	36.11
802.11ac_VHT80		5 690	75.68	75.44	74.75	74.74
802.11a	UNII-3	5 720	4.40	4.45	-	-
802.11n_HT20		5 720	4.90	4.90	-	-
802.11n_HT40		5 710	5.70	5.90	-	-
802.11ac_VHT20		5 720	4.90	4.85	-	-
802.11ac_VHT40		5 710	6.00	5.00	-	-
802.11ac_VHT80		5 690	5.80	5.80	-	-

Notes:


- For 99% Bandwidth, measured 99% occupied bandwidth is separated as below.
 - For UNII band 2C = 5 725 MHz – T1 (Measured frequency on the marker table)
 - For UNII band 3 = T2 (Measured frequency on the marker table) – 5 725 MHz

In order to simplify the report, the attached plot is the widest bandwidth in Band.

26dB bandwidth


ANT 1

UNII-2C / 802.11ac_VHT80 / 5 690 MHz

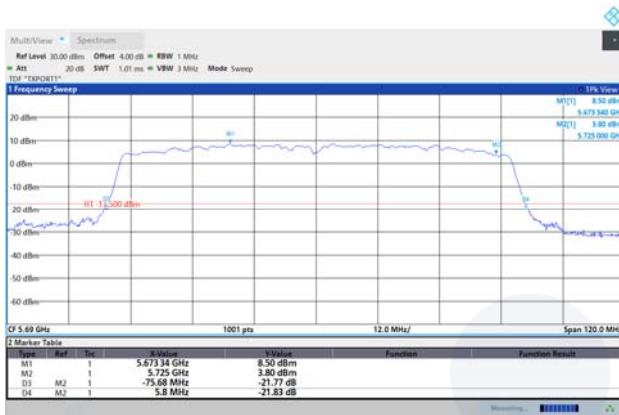


ANT 2

UNII-2C / 802.11ac_VHT80 / 5 690 MHz

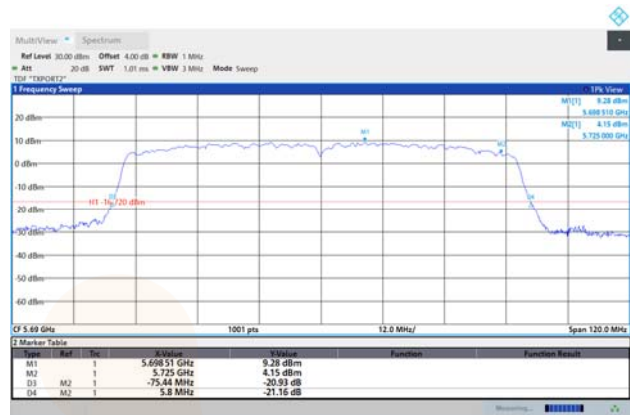

UNII-3 / 802.11ac_VHT40 / 5 710 MHz

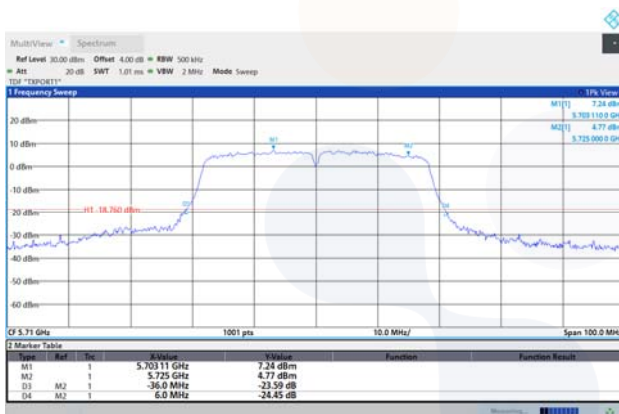


UNII-3 / 802.11n_HT40 / 5 710 MHz



99% bandwidth

ANT 1

UNII-2C / 802.11ac_VHT80 / 5 690 MHz

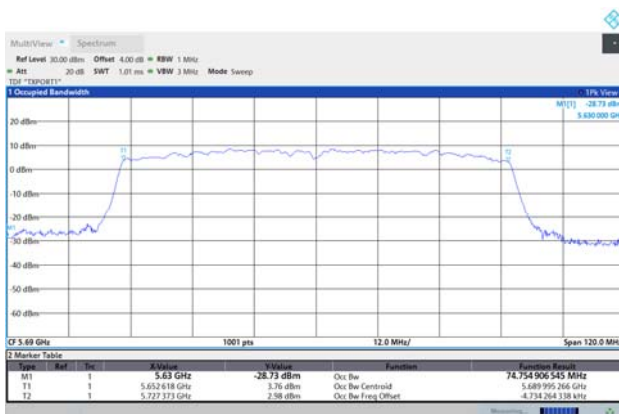


ANT 2

UNII-2C / 802.11ac_VHT80 / 5 690 MHz



Test mode	Band	Frequency (MHz)	6dB Bandwidth (MHz)		Limit (MHz)
			ANT1	ANT2	
802.11a	UNII-3	5 720	3.25	3.25	0.50
802.11n_HT20		5 720	3.85	3.85	0.50
802.11n_HT40		5 710	2.70	2.70	0.50
802.11ac_VHT20		5 720	3.85	3.85	0.50
802.11ac_VHT40		5 710	2.80	2.70	0.50
802.11ac_VHT80		5 690	2.80	2.68	0.50

In order to simplify the report, the attached plot is the widest bandwidth in Band.

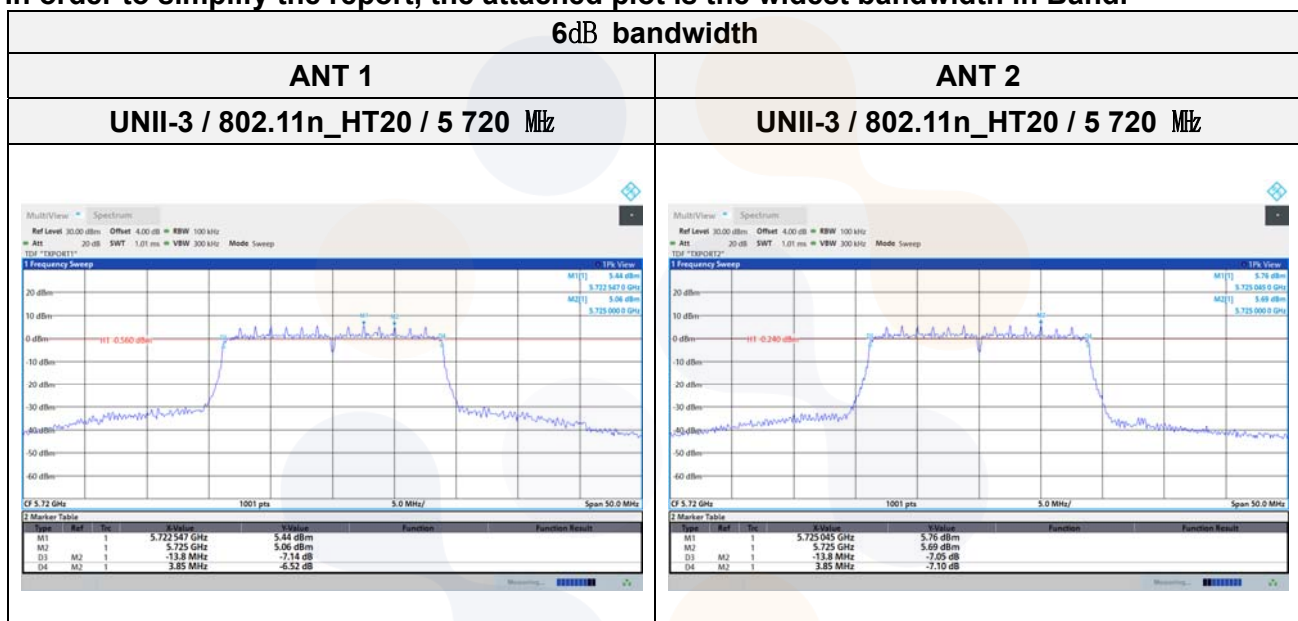

Conducted output power							
Test mode	Band	Frequency (MHz)	Measured output power				Limit (dBm)
			Reading (dBm)		DCF (dB)	Result (dBm)	
			ANT1	ANT2			
802.11a	UNII 2C	5 720	15.72	15.92	0.27	19.10	22.57
802.11n_HT20		5 720	15.52	15.83	0.44	19.13	22.73
802.11n_HT40		5 710	15.88	16.19	0.75	19.80	23.98
802.11ac_VHT20		5 720	15.35	15.68	0.97	19.49	22.70
802.11ac_VHT40		5 710	15.21	15.71	1.53	20.01	23.98
802.11ac_VHT80		5 690	14.92	15.16	2.61	20.66	23.98
802.11a	UNII 3	5 720	9.51	9.41	0.27	12.74	30.00
802.11n_HT20		5 720	9.46	10.06	0.44	13.22	30.00
802.11n_HT40		5 710	4.39	4.05	0.75	7.98	30.00
802.11ac_VHT20		5 720	9.90	9.67	0.97	13.76	30.00
802.11ac_VHT40		5 710	3.85	3.93	1.53	8.43	30.00
802.11ac_VHT80		5 690	-1.77	-1.87	2.61	3.80	30.00

Notes:

1. Result(dBm) = Reading $10\log(10^{(ANT1/10)} + 10^{(ANT2/10)})$ (dBm) + D.C.F (dB)

e.i.r.p.						
Test mode	Band	Frequency (MHz)	Measured output power			Limit (dBm)
			Conducted output Power (dBm)	ANT gain (dBi)	MAX e.i.r.p. (dBm)	
802.11a	UNII 2C	5 720	19.10	3.83	22.93	29.15
802.11n_HT20		5 720	19.13		22.96	29.45
802.11n_HT40		5 710	19.80		23.63	30.00
802.11ac_VHT20		5 720	19.49		23.32	29.45
802.11ac_VHT40		5 710	20.01		23.84	30.00
802.11ac_VHT80		5 690	20.66		24.49	30.00
802.11a	UNII 3	5 720	12.74	4.35	17.09	30.00
802.11n_HT20		5 720	13.22		17.57	30.00
802.11n_HT40		5 710	7.98		12.33	30.00
802.11ac_VHT20		5 720	13.76		18.11	30.00
802.11ac_VHT40		5 710	8.43		12.78	30.00
802.11ac_VHT80		5 690	3.80		8.15	30.00

Notes:

- Conducted output power (dBm) = $10\log(10^{(ANT1/10)} + 10^{(ANT2/10)})$ (dBm) + D.C.F (dB)
- e.i.r.p. Calculation : e.i.r.p. (dBm) = Conducted output power (dBm) + Directional gain (dBi)
- Directional gain = Correlated (CDD) and referred to 2.5 tables in the applicable report.



In order to simplify the report, the attached plot is the worst Conducted output power in Band.

Conducted output power



ANT 1

ANT 2

UNII-2C / 802.11ac_VHT80 / 5 690 MHz

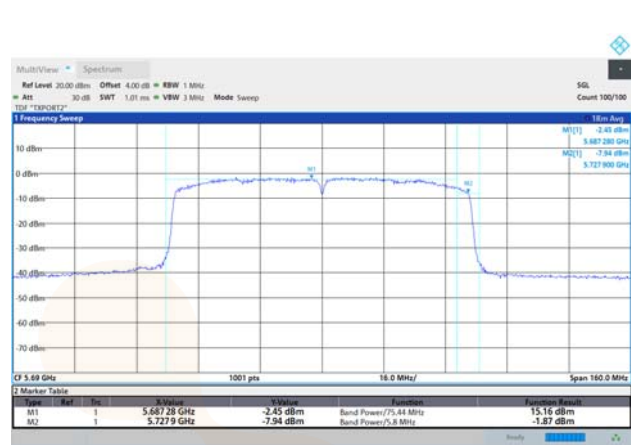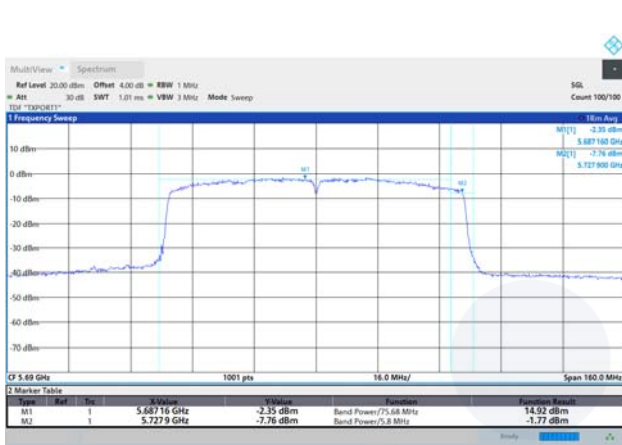

UNII-3 / 802.11ac_VHT20 / 5 720 MHz

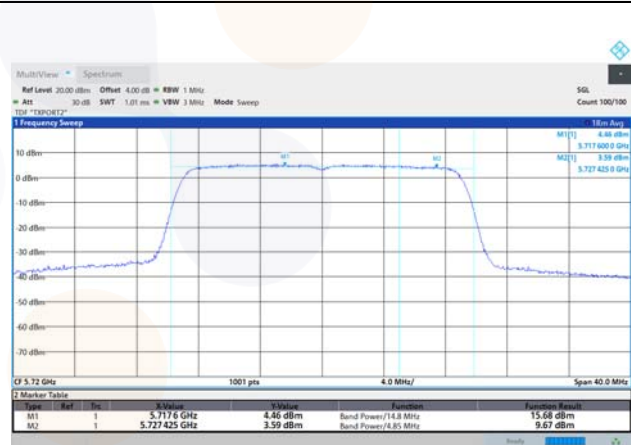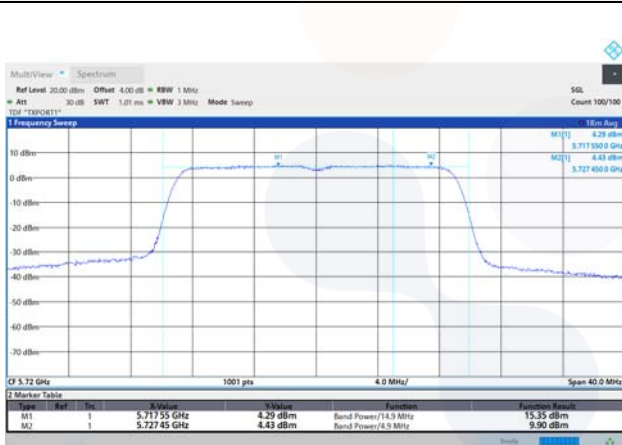


Power spectral density							
Test mode	Band	Frequency (MHz)	Measured PSD (dBm/MHz)		DCF (dB)	Maximum PSD (dB m/MHz)	Limit (dBm/MHz)
			ANT 1	ANT 2		ANT 1+ ANT 2	
802.11a	UNII-2C	5 720	5.03	5.24	0.27	8.42	11.00
802.11n_HT20		5 720	5.08	5.46	0.44	8.72	
802.11n_HT40		5 710	2.05	2.39	0.75	5.98	
802.11ac_VHT20		5 720	4.69	5.42	0.97	9.05	
802.11ac_VHT40		5 710	1.89	1.88	1.53	6.43	
802.11ac_VHT80		5 690	-1.77	-1.31	2.61	4.08	

Test mode	Band	Frequency (MHz)	Measured PSD (dBm/500 kHz)		DCF (dB)	Maximum PSD (dB m/500 kHz)	Limit (dBm/500 kHz)
			ANT 1	ANT 2		ANT 1+ ANT 2	
802.11a	UNII-3	5 720	2.11	1.73	0.27	5.21	30.00
802.11n_HT20		5 720	2.14	1.98	0.44	5.51	
802.11n_HT40		5 710	-2.83	-2.11	0.75	1.30	
802.11ac_VHT20		5 720	1.44	2.18	0.97	5.80	
802.11ac_VHT40		5 710	-3.01	-2.70	1.53	1.69	
802.11ac_VHT80		5 690	-7.48	-8.19	2.61	-2.20	

Note:


- Maximum PSD(dB m/MHz, 500 kHz) = Measured PSD($10\log(10^{(ANT1/10)} + 10^{(ANT2/10)})$) (dB m/MHz, 500 kHz) + DCF(dB)
- The Unit of UNII-2C is (dB m / MHz) and Unit of UNII-3 is (dB m / 500 kHz)

In order to simplify the report, the attached plot is the worst output power in Band.

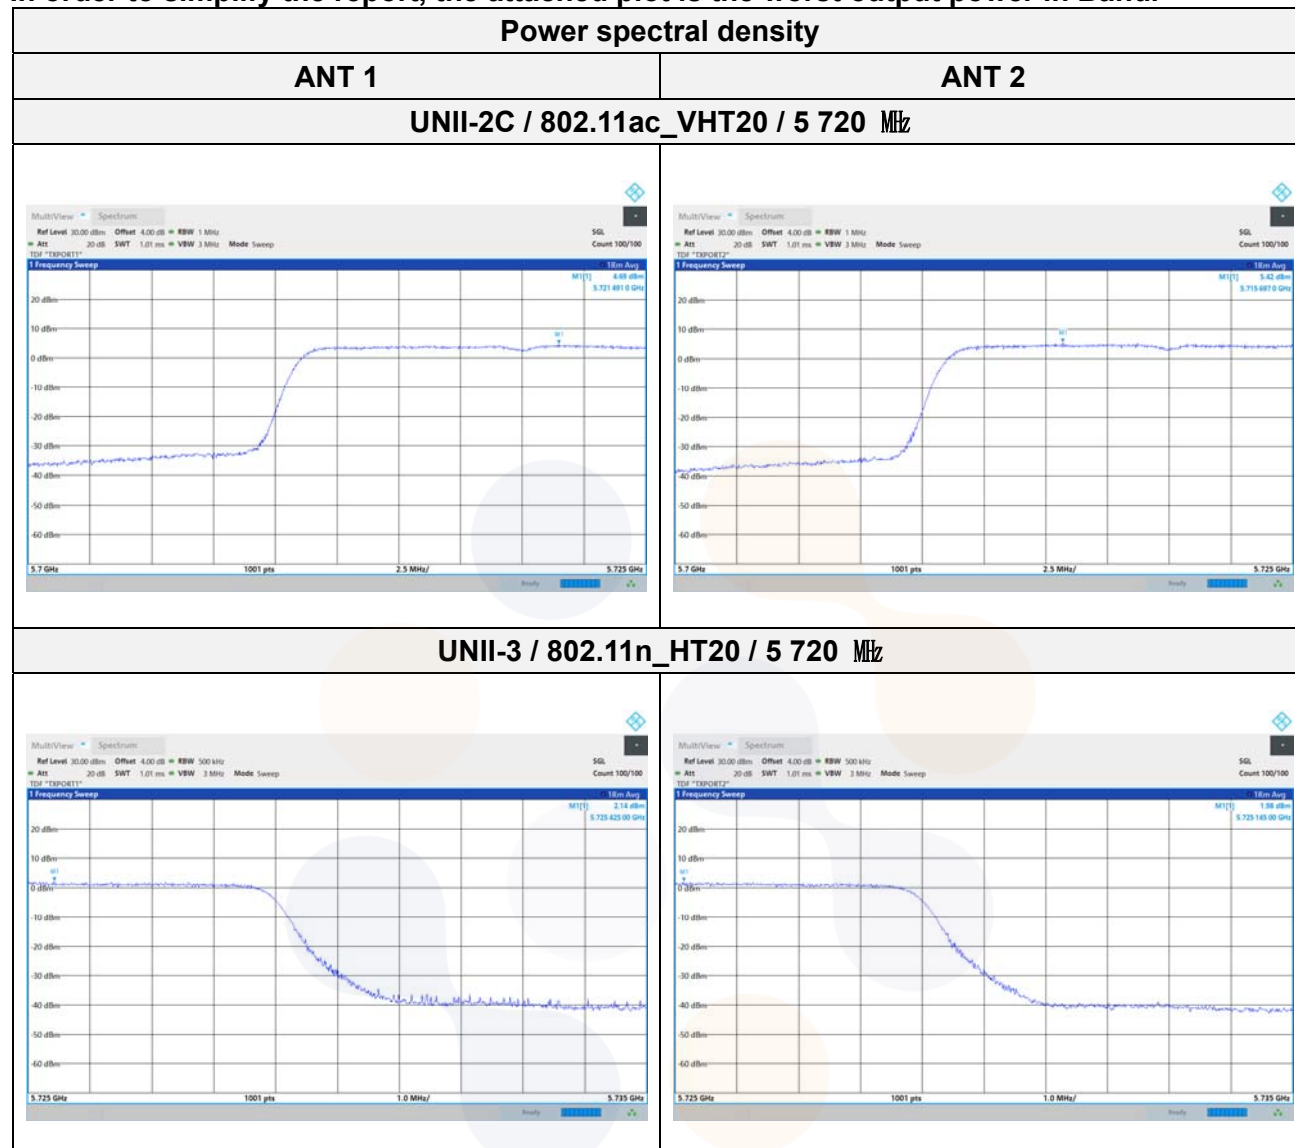

7.6. Frequency stability

Test setup

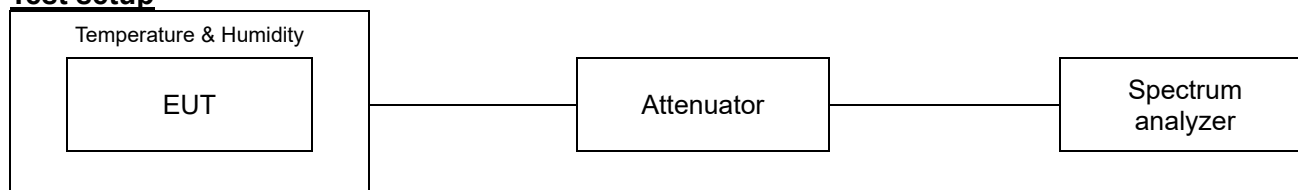

Limit

According to §15.407(g), Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

According to RSS-GEN(6.11),
 For licence-exempt devices, the following conditions apply:

- (a) at the temperatures of -20°C (-4°F), +20°C (+68°F) and +50°C (+122°F), and at the manufacturer's rated supply voltage
- (b) at the temperature of +20°C (+68°F) and at ±15% of the manufacturer's rated supply voltage

If the frequency stability limits are only met within a temperature range that is smaller than the range specified in (a) for licensed or licence-exempt devices, the frequency stability requirement will be deemed to be met if the transmitter is automatically prevented from operating outside this smaller temperature range and if the published operating characteristics for the equipment are revised to reflect this restricted temperature range.

If the device contains both licence and licence-exempt transmitter modules, the device's frequency stability shall be measured under the most stringent condition specified in the applicable RSS of the transmitter module.

In addition, if an unmodulated carrier is not available, the method used to measure frequency stability shall be described in the test report.

According to RSS-GEN(8.11),

If the frequency stability of the licence-exempt radio apparatus is not specified in the applicable RSS, the fundamental emissions of the radio apparatus should be kept within at least the central 80% of its permitted operating frequency band in order to minimize the possibility of out-of-band operation. In addition, its occupied bandwidth shall be entirely outside the restricted bands and the prohibited TV bands of 54-72 MHz, 76-88 MHz, 174-216 MHz, and 470-602 MHz, unless otherwise indicated.


Test procedure

ANSI C63.10-2013 - Section 6.8.1

Test results


Test band : UNII-1
 Frequency (Hz) : 5 180 000 000

Voltage (%)	Power (V)	Temp. (°C)	Frequency (Hz)	Frequency error (Hz)	Deviation	
					(ppm)	(%)
100	3.30	21(Ref.)	5 179 984 000	-16 000	-3.09	-0.000 31
		0	5 180 044 000	44 000	8.49	0.000 85
		10	5 180 030 000	30 000	5.79	0.000 58
		20	5 180 030 000	30 000	5.79	0.000 58
		30	5 180 018 000	18 000	3.47	0.000 35
		40	5 180 008 000	8 000	1.54	0.000 15
		50	5 179 984 000	-16 000	-3.09	-0.000 31
		60	5 179 988 000	-12 000	-2.32	-0.000 23
		70	5 180 016 000	16 000	3.09	0.000 31
85	2.81	21(Ref.)	5 179 982 000	-18 000	-3.47	-0.000 35
115	3.80	21(Ref.)	5 179 984 000	-16 000	-3.09	-0.000 31

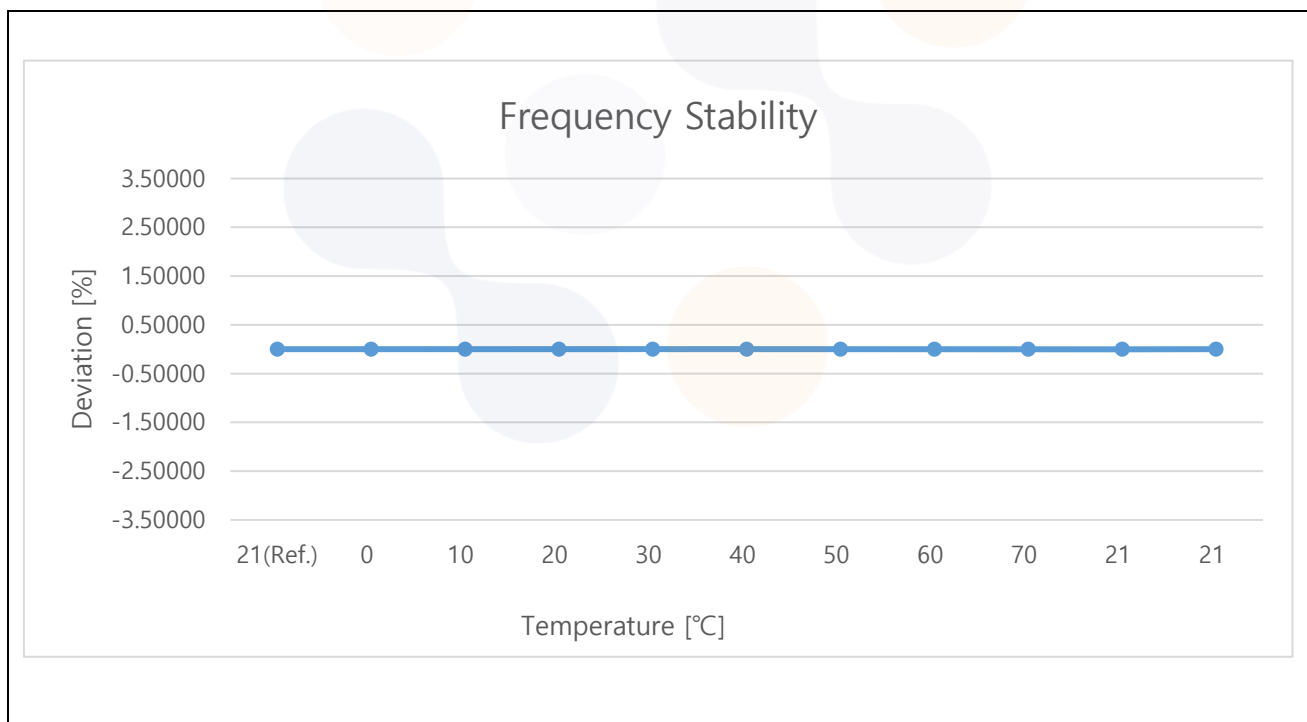


Test band : UNII-2A
 Frequency (Hz) : 5 260 000 000

Voltage (%)	Power (V)	Temp. (°C)	Frequency (Hz)	Frequency error (Hz)	Deviation	
					(ppm)	(%)
100	3.30	21(Ref.)	5 259 984 000	-16 000	-3.04	-0.000 30
		0	5 260 048 000	48 000	9.13	0.000 91
		10	5 260 026 000	26 000	4.94	0.000 49
		20	5 260 020 000	20 000	3.80	0.000 38
		30	5 260 006 000	6 000	1.14	0.000 11
		40	5 259 982 000	-18 000	-3.42	-0.000 34
		50	5 259 986 000	-14 000	-2.66	-0.000 27
		60	5 260 008 000	8 000	1.52	0.000 15
		70	5 260 042 000	42 000	7.98	0.000 80
85	2.81	21(Ref.)	5 259 984 000	-16 000	-3.04	-0.000 30
115	3.80	21(Ref.)	5 259 982 000	-18 000	-3.42	-0.000 34

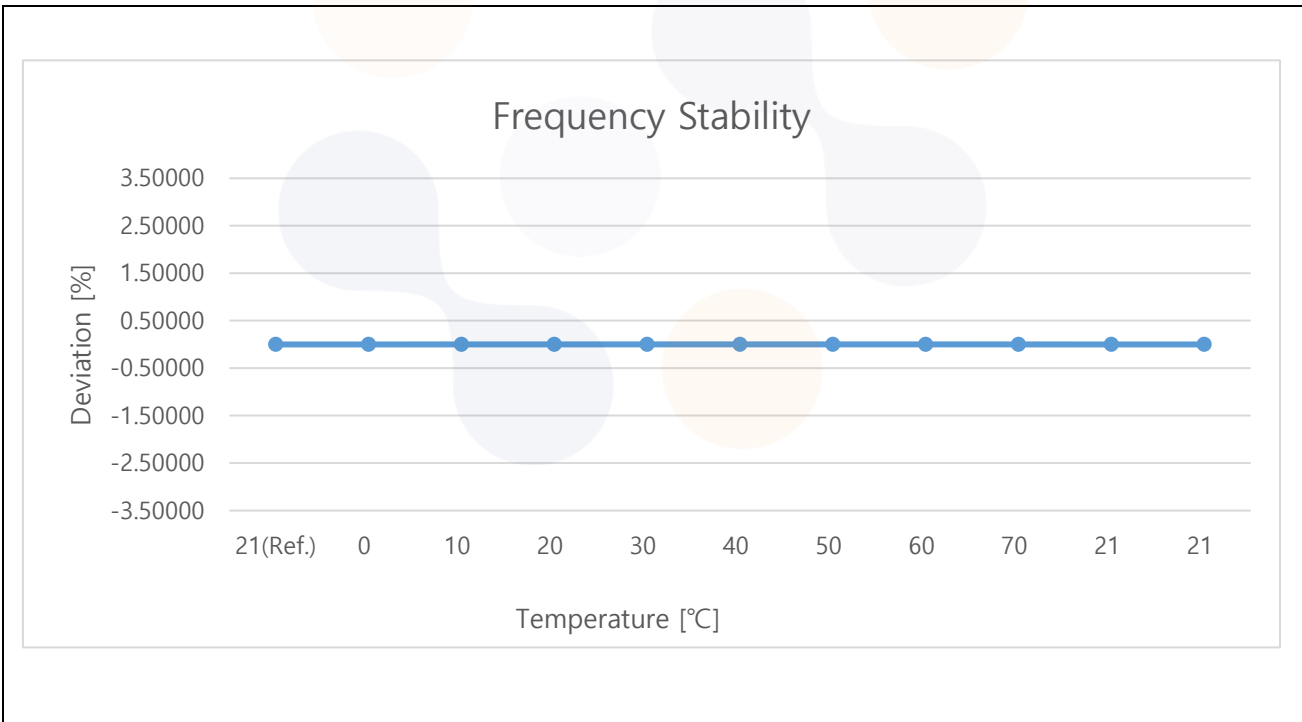


Test band : UNII-2C
 Frequency (Hz) : 5 500 000 000

Voltage (%)	Power (V)	Temp. (°C)	Frequency (Hz)	Frequency error (Hz)	Deviation	
					(ppm)	(%)
100	3.30	21(Ref.)	5 499 984 000	-16 000	-2.91	-0.000 29
		0	5 500 046 000	46 000	8.36	0.000 84
		10	5 500 032 000	32 000	5.82	0.000 58
		20	5 500 018 000	18 000	3.27	0.000 33
		30	5 500 012 000	12 000	2.18	0.000 22
		40	5 499 978 000	-22 000	-4.00	-0.000 40
		50	5 499 984 000	-16 000	-2.91	-0.000 29
		60	5 500 018 000	18 000	3.27	0.000 33
		70	5 500 052 000	52 000	9.45	0.000 95
85	2.81	21(Ref.)	5 499 984 000	-16 000	-2.91	-0.000 29
115	3.80	21(Ref.)	5 499 984 000	-16 000	-2.91	-0.000 29

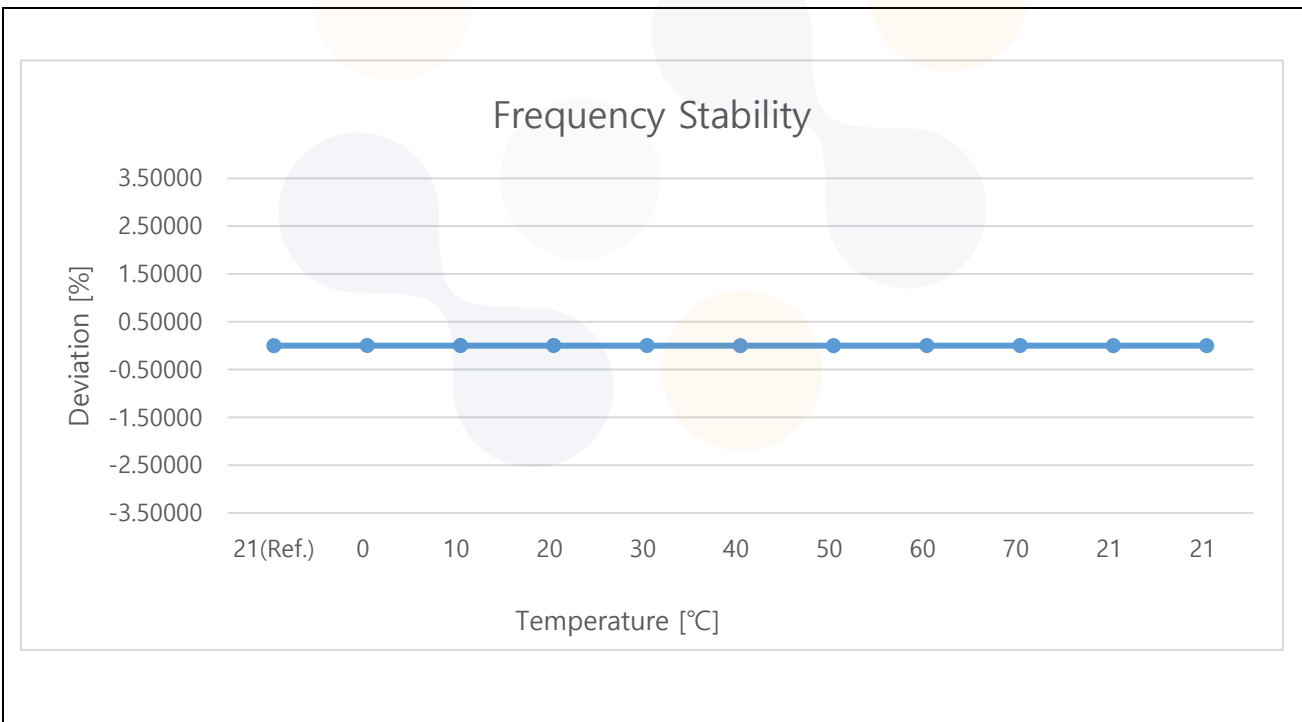

Test band : UNII-3
 Frequency (Hz) : 5 745 000 000


Voltage (%)	Power (V)	Temp. (°C)	Frequency (Hz)	Frequency error (Hz)	Deviation	
					(ppm)	(%)
100	3.30	21(Ref.)	5 744 988 000	-12 000	-2.09	-0.000 21
		0	5 745 046 000	46 000	8.01	0.000 80
		10	5 745 030 000	30 000	5.22	0.000 52
		20	5 745 020 000	20 000	3.48	0.000 35
		30	5 745 010 000	10 000	1.74	0.000 17
		40	5 744 980 000	-20 000	-3.48	-0.000 35
		50	5 744 982 000	-18 000	-3.13	-0.000 31
		60	5 745 020 000	20 000	3.48	0.000 35
		70	5 745 054 000	54 000	9.40	0.000 94
85	2.81	21(Ref.)	5 744 984 000	-16 000	-2.79	-0.000 28
115	3.80	21(Ref.)	5 744 988 000	-12 000	-2.09	-0.000 21

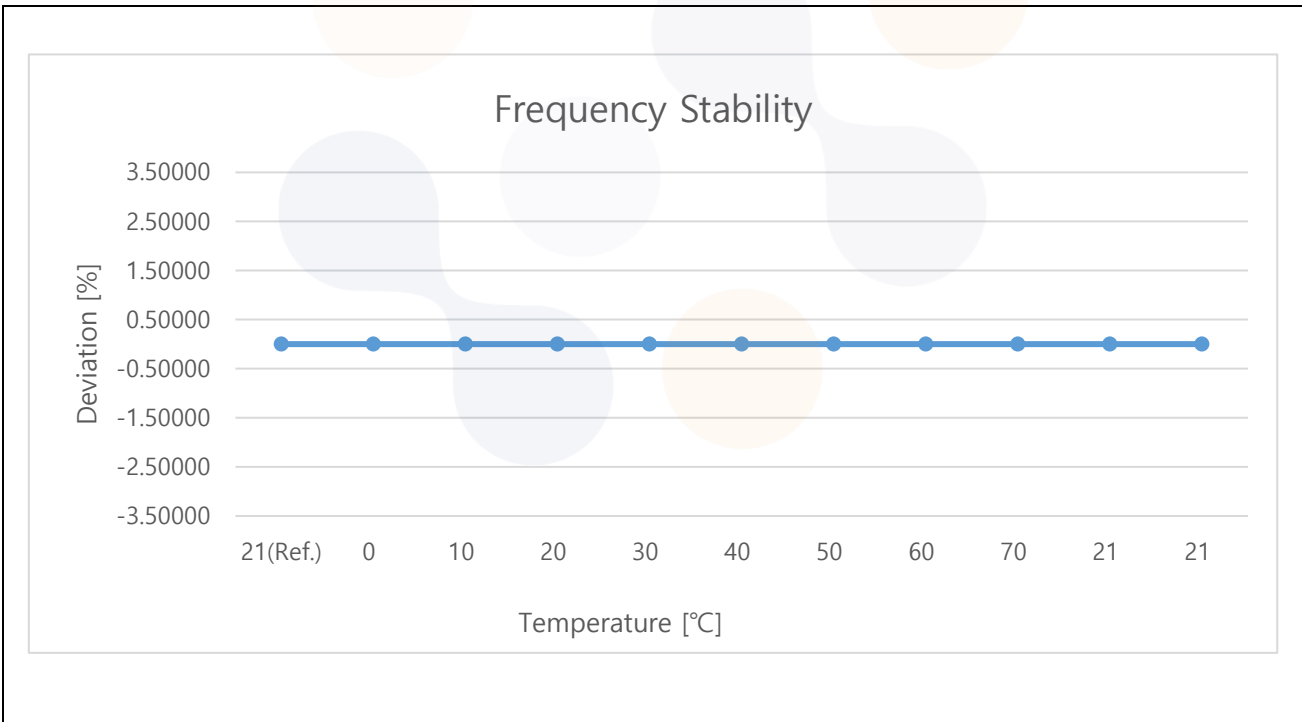


7.7. Spurious Emission, Band Edge and Restricted bands

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions

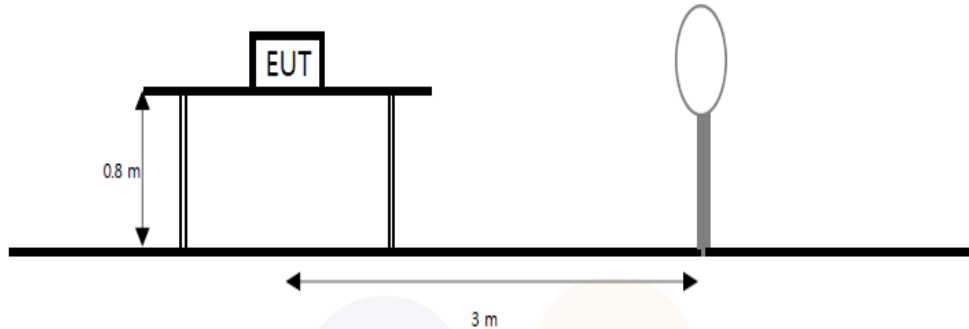

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

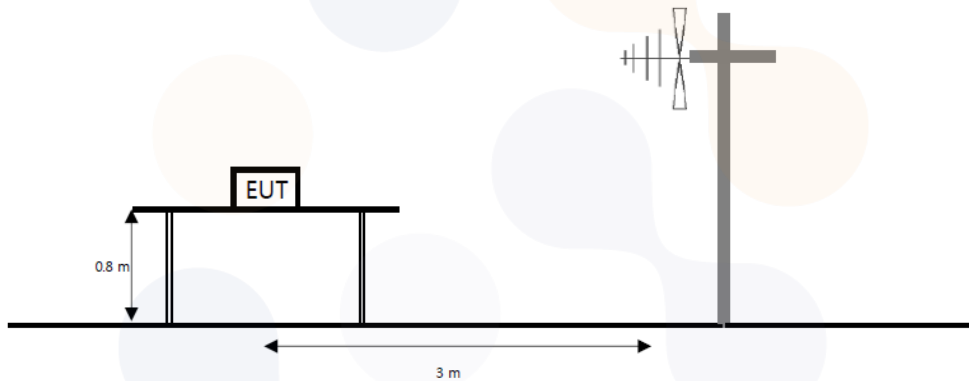

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

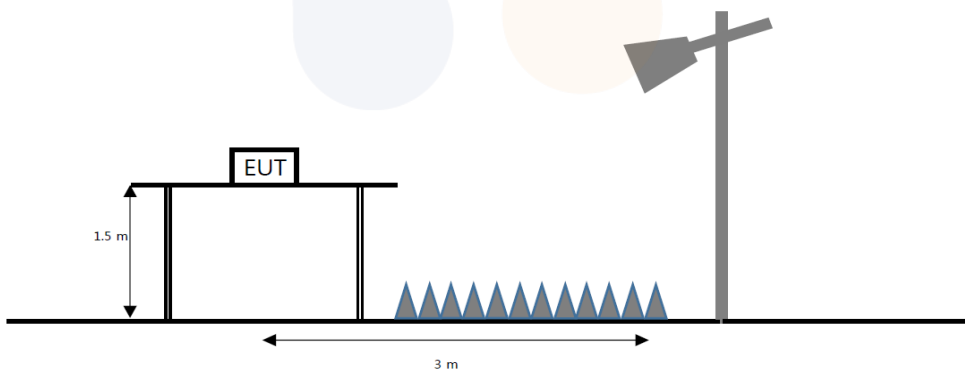

Limit FCC

According to section 15.209(a) except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength ($\mu V/m$)	Measurement distance (m)
0.009 - 0.490	2 400/F(kHz)	300
0.490 - 1.705	24 000/F(kHz)	30
1.705 - 30	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., Section 15.231 and 15.241.

According to section 15.205(a) and (b) only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.009 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.694 75 - 16.695 25	608 - 614	5.35 - 5.46
2.173 5 - 2.190 5	16.804 25 - 16.804 75	960 - 1 240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1 300 - 1 427	8.025 - 8.5
4.177 25 - 4.177 75	37.5 - 38.25	1 435 - 1 626.5	9.0 - 9.2
4.207 25 - 4.207 75	73 - 74.6	1 645.5 - 1 646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1 660 - 1 710	10.6 - 12.7
6.267 75 - 6.268 25	108 - 121.94	1 718.8 - 1 722.2	13.25 - 13.4
6.311 75 - 6.312 25	123 - 138	2 200 - 2 300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2 310 - 2 390	15.35 - 16.2
8.362 - 8.366	156.524 75 - 156.525 25	2 483.5 - 2 500	17.7 - 21.4
8.376 25 - 8.386 75	25	2 690 - 2 900	22.01 - 23.12
8.414 25 - 8.414 75	156.7 - 156.9	3 260 - 3 267	23.6 - 24.0
12.29 - 12.293	162.012 5 - 167.17	3 332 - 3 339	31.2 - 31.8
12.519 75 - 12.520 25	167.72 - 173.2	3 345.8 - 3 358	36.43 - 36.5
12.576 75 - 12.577 25	240 - 285	3 600 - 4 400	Above 38.6
13.36 - 13.41	322 - 335.4		

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in section 15.209. At frequencies equal to or less than 1 000 MHz, compliance with the limits in section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 MHz, compliance with the emission limits in section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in section 15.35 apply to these measurements.

According to section 15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p.. of -27 dBm/MHz

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p.. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p.. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

IC

According to RSS-247(5.5), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

According to RSS-Gen(8.9), Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

Table 5- General field strength limits at frequencies above 30 MHz

Frequency(MHz)	Field strength ($\mu\text{V}/\text{m}$ at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

Table 6- General field strength limits at frequencies below 30 MHz

Frequency	Magnetic field strength (H-Field) ($\mu\text{A}/\text{m}$)	Measurement distance(m)
9 – 490 kHz ¹⁾	6.37/F (F in kHz)	300
490 – 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

According to RSS-Gen(8.10), Restricted frequency bands, identified in table 7, are designated primarily for safety-of-life services (distress calling and certain aeronautical activities), certain satellite downlinks, radio astronomy and some government uses. Except where otherwise indicated, the following conditions related to the restricted frequency bands apply:

- The transmit frequency, including fundamental components of modulation, of licence-exempt radio apparatus shall not fall within the restricted frequency bands listed in table 7 except for apparatus compliant with RSS-287, Emergency Position Indicating Radio Beacons (EPIRB), Emergency Locator Transmitters (ELT), Personal Locator Beacons (PLB), and Maritime Survivor Locator Devices (MSLD).
- Unwanted emissions that fall into restricted frequency bands listed in table 7 shall comply with the limits specified in table 5 and table 6.
- Unwanted emissions that do not fall within the restricted frequency bands listed in table 7 shall comply either with the limits specified in the applicable RSS or with those specified in table 5 and table 6.

Table 7- Restricted frequency bands*

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138	--	

* Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

Test procedure

ANSI C63.10-2013 Section 12.7.7.2, 12.7.5, 12.7.6
KDB 789033 D02 v02r01 – Section G

Test settings

Peak field strength measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in table
3. VBW $\geq$ (3 $\times$ RBW)
4. Detector = peak
5. Sweep time = auto
6. Trace mode = max hold
7. Allow sweeps to continue until the trace stabilizes

Table. RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1 000 MHz	100 kHz to 120 kHz
> 1 000 MHz	1 MHz

Average field strength measurements

Trace averaging with continuous EUT transmission at full power

If the EUT can be configured or modified to transmit continuously ($D \geq 98\%$), then the average emission levels shall be measured using the following method (with EUT transmitting continuously):

1. RBW = 1 MHz (unless otherwise specified).
2. VBW $\geq$ (3 $\times$ RBW).
3. Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq (\text{RBW} / 2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
4. Averaging type = power (i.e., rms):
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
5. Sweep time = auto.
6. Perform a trace average of at least 100 traces.

Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT ($D \geq 98\%$) cannot be achieved and the duty cycle is constant (duty cycle variations are less than $\pm 2\%$), then the following procedure shall be used:

1. The EUT shall be configured to operate at the maximum achievable duty cycle.
2. Measure the duty cycle D of the transmitter output signal as described in 11.6.
3. $RBW = 1 \text{ MHz}$ (unless otherwise specified).
4. $VBW \geq [3 \times RBW]$.
5. Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq (RBW / 2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
6. Averaging type = power (i.e., rms):
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
7. Sweep time = auto.
8. Perform a trace average of at least 100 traces.
9. A correction factor shall be added to the measurement results prior to comparing with the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (rms) mode was used in step f), then the applicable correction factor is $[10 \log (1 / D)]$, where D is the duty cycle.
 - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $[20 \log (1 / D)]$, where D is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous ($D \geq 98\%$) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

Band edge measurements

Integration Method

For maximum emissions measurements, follow the procedures described in II.G.5., "Procedures for unwanted maximum Emissions Measurements above 1000 MHz. Except for the following changes:

1. Set $RBW = 100 \text{ kHz}$
2. Set $VBW \geq 3 \times RBW$
3. Perform a band-power integration across the 1 MHz bandwidth in which the band edge emission level is to be measured. CAUTION: you must ensure that the spectrum analyzer or EMI receiver is set for peak detection and max-hold for this measurement.

For average emissions measurements, follow the procedures described in II.G.6., "Procedures for average unwanted Emissions Measurements above 1000 MHz. Except for the following changes:


1. Set $RBW = 100 \text{ kHz}$
2. Set $VBW \geq 3 \times RBW$
3. Perform a band-power integration across the 1 MHz bandwidth in which the band edge emission level is to be measured.

Notes:

1. $f < 30$ MHz, extrapolation factor of 40 dB/decade of distance. $F_d = 40\log(D_m/D_s)$
 $f \geq 30$ MHz, extrapolation factor of 20 dB/decade of distance. $F_d = 20\log(D_m/D_s)$
 Where:
 F_d = Distance factor in dB
 D_m = Measurement distance in meters
 D_s = Specification distance in meters
2. Factors(dB) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB) + or F_d (dB)
3. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
4. Average test would be performed if the peak result were greater than the average limit.
5. ¹⁾ means restricted band.
6. Above 1 GHz the worst results between two antenna polarizations (H and V) were documented in the test report.
7. Below 30 MHz frequency range, In order to search for the worst result, all orientations about parallel, perpendicular, and ground-parallel were investigated then reported. when the emission level was higher than 20 dB of the limit, then the following statement shall be made: "No spurious emissions were detected within 20 dB of the limit."
8. For above 1 GHz pre-scan to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.
9. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω. For example, the measurement frequency X kHz resulted in a level of Y dBμV/m, which is equivalent to $Y - 51.5 = Z$ dBμA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.


Test results (Below 30 MHz) – Worst case: 802.11ac VHT80 / UNII-2C_5 530 MHz

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Quasi peak data								
No spurious emissions were detected within 20 dB of the limit.								

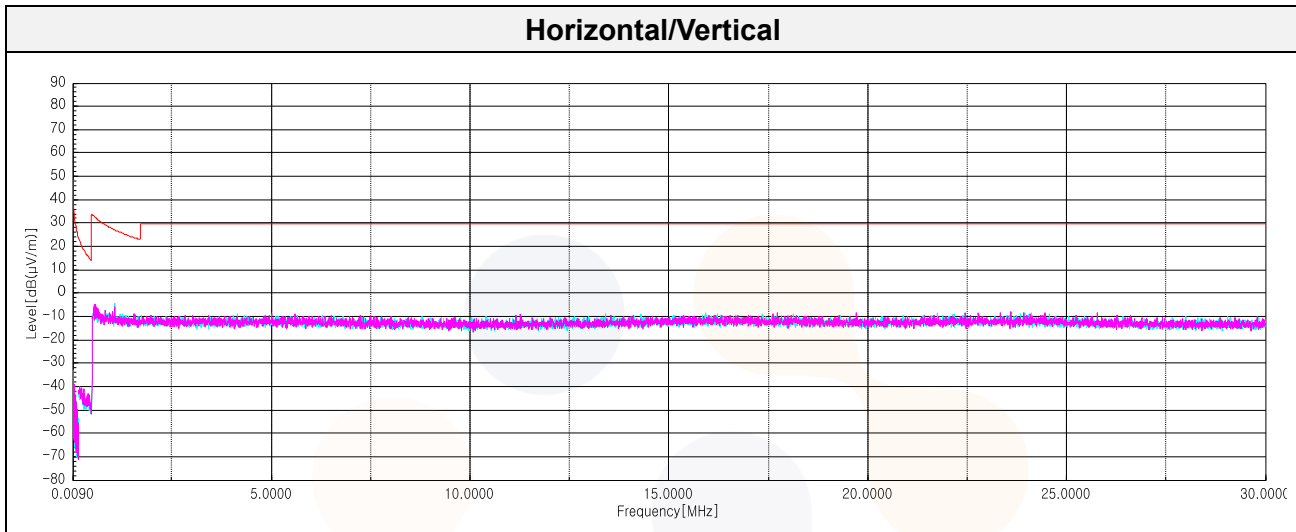

Test results (Below 1 000 MHz) – Worst case: 802.11ac VHT80 / UNII-2C_5 530 MHz

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Quasi peak data								
47.95	V	44.40	15.02	-31.99	-	27.43	40.00	12.57
80.93	V	46.80	13.19	-31.77	-	28.22	40.00	11.78
191.99	H	50.90	15.10	-31.46	-	34.54	43.50	8.96
240.01 ¹⁾	H	56.50	17.30	-31.36	-	42.44	46.00	3.56
431.94	H	49.70	22.50	-31.04	-	41.16	46.00	4.84
624.00	H	45.40	24.80	-30.83	-	39.37	46.00	6.63

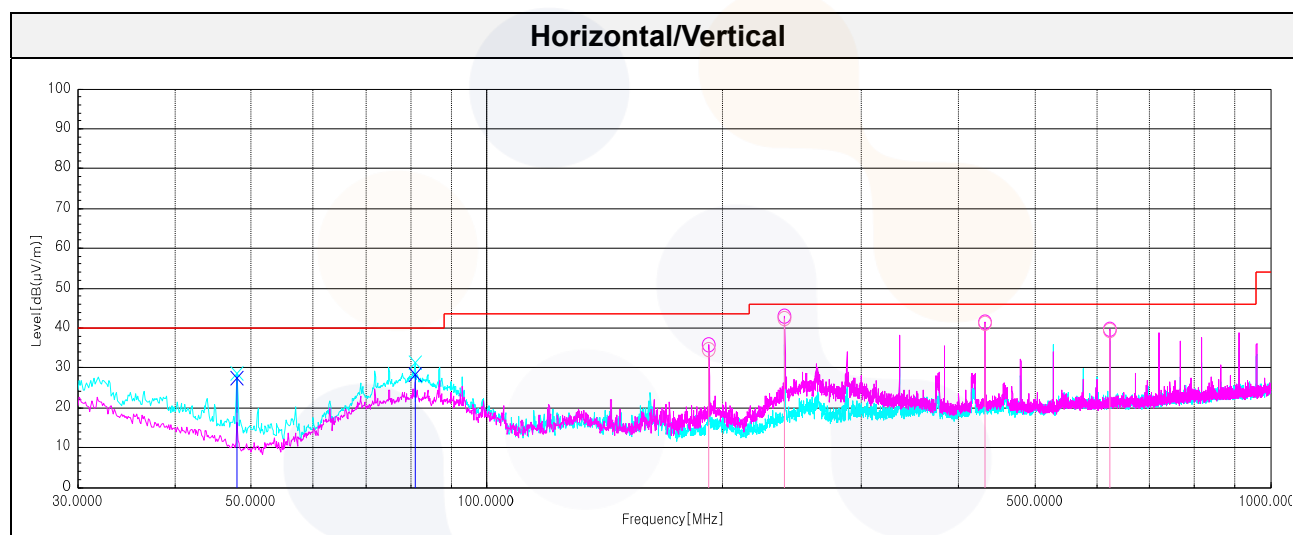

Test results (Above 1 000 MHz)

UNII-1

802.11a_Lowest Channel (5 180 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
5 148.82 ¹⁾	V	45.60	33.20	-26.63	-	52.17	74.00	21.83
10 360.55	H	58.50	38.78	-43.04	-	54.24	68.20	13.96
15 542.19 ¹⁾	H	56.20	38.12	-41.04	-	53.28	74.00	20.72
Average Data								
5 148.82 ¹⁾	V	33.96	33.20	-26.63	0.27	40.80	54.00	13.20
15 542.19 ¹⁾	H	45.13	38.12	-41.04	0.27	42.48	54.00	11.52

802.11a_Middle Channel (5 200 MHz)



Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
10 396.58	H	56.60	38.71	-43.05	-	52.26	68.20	15.94
15 596.40 ¹⁾	H	58.50	37.81	-40.97	-	55.34	74.00	18.66
Average Data								
15 596.40 ¹⁾	H	45.54	37.81	-40.97	0.27	42.65	54.00	11.35

802.11a_Highest Channel (5 240 MHz)


Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
10 491.27	H	56.60	38.98	-43.06	-	52.52	68.20	15.68
15 723.73 ¹⁾	H	58.00	37.90	-40.82	-	55.08	74.00	18.92
Average Data								
15 723.73 ¹⁾	H	46.38	37.90	-40.82	0.27	43.73	54.00	10.27

802.11a _Lowest Channel (5 180 MHz)

Average data

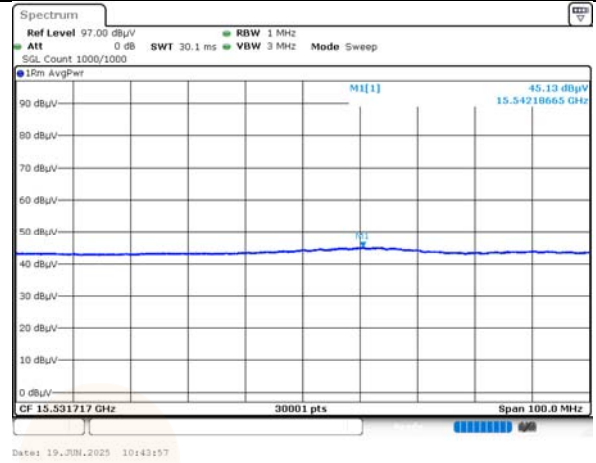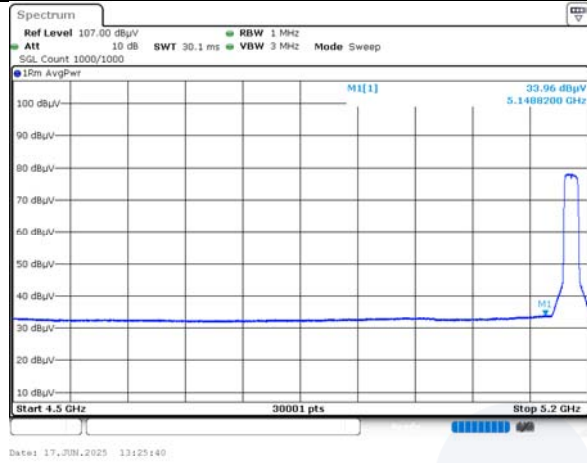

Horizontal/Vertical for Band-edge

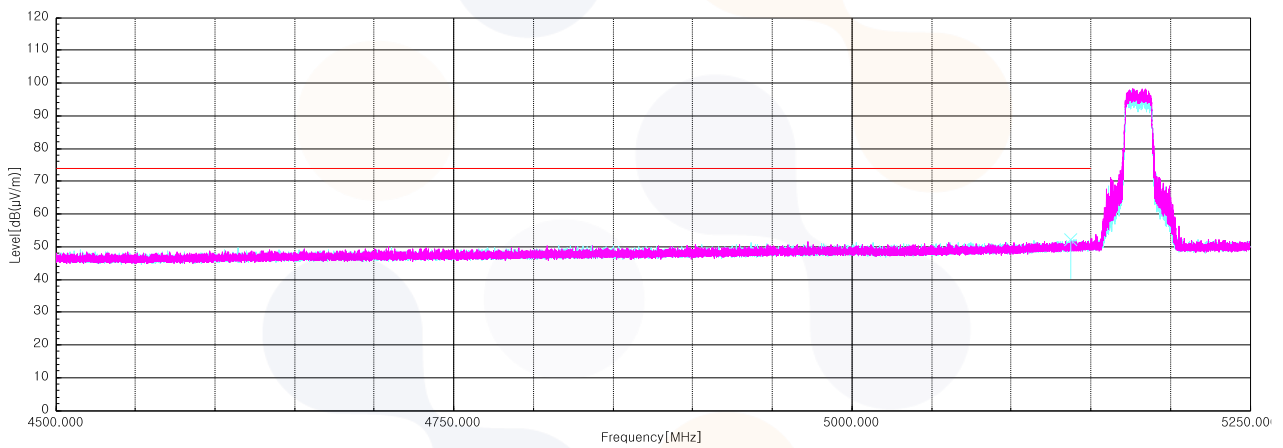

802.11n_HT20_Lowest Channel (5 180 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
5 149.85 ¹⁾	H	45.90	33.20	-26.63	-	52.47	74.00	21.53
10 353.65	H	58.50	38.79	-43.04	-	54.25	68.20	13.95
15 542.30 ¹⁾	H	57.70	38.12	-41.04	-	54.78	74.00	19.22
Average Data								
5 149.85 ¹⁾	H	34.09	33.20	-26.63	0.44	41.10	54.00	12.90
15 542.30 ¹⁾	H	45.19	38.12	-41.04	0.44	42.71	54.00	11.29

802.11n_HT20_Middle Channel (5 200 MHz)



Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
10 400.03	H	57.00	38.80	-43.05	-	52.75	68.20	15.45
15 596.54 ¹⁾	H	57.30	37.81	-40.97	-	54.14	74.00	19.86
Average Data								
15 596.54 ¹⁾	H	45.39	37.81	-40.97	0.44	42.67	54.00	11.33

802.11n_HT20_Highest Channel (5 240 MHz)


Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
10 475.93	H	56.20	38.95	-43.06	-	52.09	68.20	16.11
15 724.78 ¹⁾	H	59.80	37.90	-40.82	-	56.88	74.00	17.12
Average Data								
15 724.78 ¹⁾	H	46.09	37.90	-40.82	0.44	43.61	54.00	10.39

802.11n_HT20_Lowest Channel (5 180 MHz)

Average data

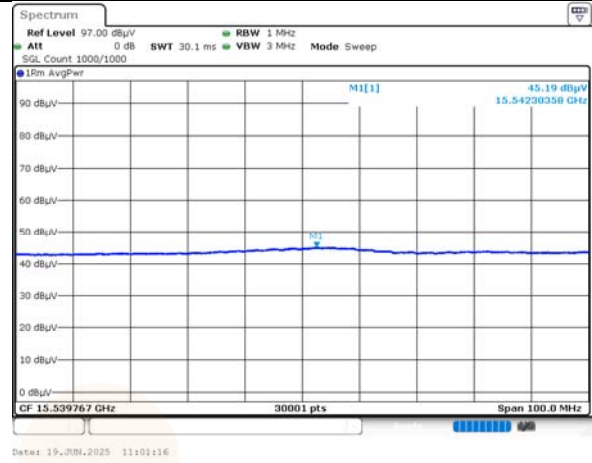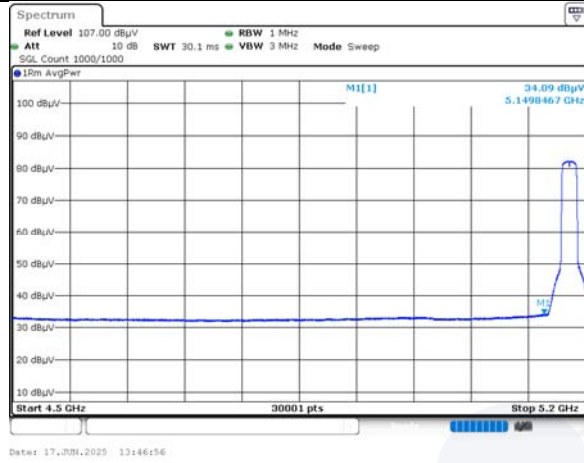

Horizontal/Vertical for Band-edge

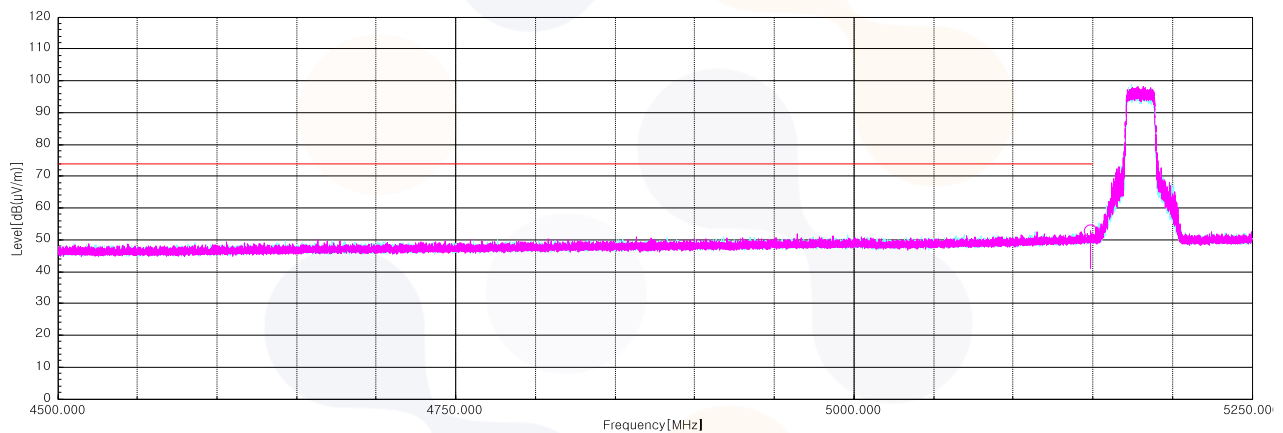

802.11n_HT40_Lowest Channel (5 190 MHz)



Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
5 149.99 ¹⁾	V	52.90	33.20	-26.63	-	59.47	74.00	14.53
10 334.48	H	55.60	38.90	-43.04	-	51.46	68.20	16.74
15 620.12 ¹⁾	V	56.60	37.86	-40.95	-	53.51	74.00	20.49
Average Data								
5 149.99 ¹⁾	V	37.93	33.20	-26.63	0.75	45.25	54.00	8.75
15 620.12 ¹⁾	V	44.09	37.86	-40.95	0.75	41.75	54.00	12.25

802.11n_HT40_Highest Channel (5 230 MHz)


Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
10 439.90	V	55.50	38.80	-43.05	-	51.25	68.20	16.95
15 683.15 ¹⁾	H	55.50	37.90	-40.87	-	52.53	74.00	21.47
Average Data								
15 683.15 ¹⁾	H	45.23	37.90	-40.87	0.75	43.01	54.00	10.99

802.11n_HT40_Lowest Channel (5 190 MHz)

Average data

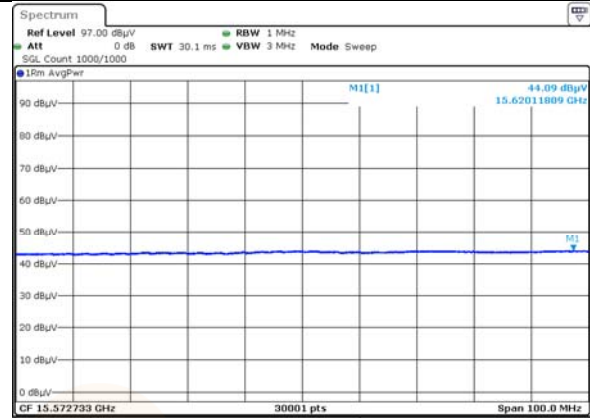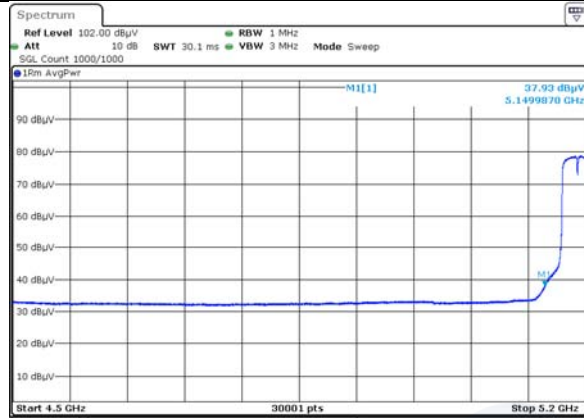

Horizontal/Vertical for Band-edge

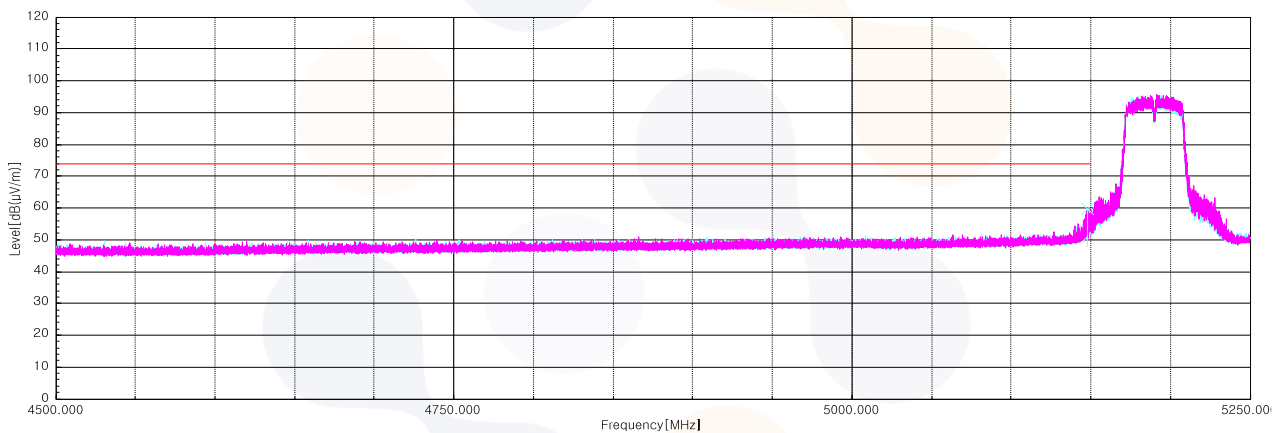

802.11ac_VHT20_Lowest Channel (5 180 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
5 149.29 ¹⁾	V	45.70	33.20	-26.63	-	52.27	74.00	21.73
10 355.18	H	56.60	38.79	-43.04	-	52.35	68.20	15.85
15 549.04 ¹⁾	H	57.00	38.10	-41.03	-	54.07	74.00	19.93
Average Data								
5 149.29 ¹⁾	V	33.79	33.20	-26.63	0.97	41.33	54.00	12.67
15 549.04 ¹⁾	H	43.93	38.10	-41.03	0.97	41.97	54.00	12.03

802.11ac_VHT20_Middle Channel (5 200 MHz)



Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
10 396.97	H	57.50	38.71	-43.05		53.16	68.20	15.04
15 596.72 ¹⁾	H	58.40	37.81	-40.97		55.24	74.00	18.76
Average Data								
15 596.72 ¹⁾	H	45.62	37.81	-40.97	0.97	43.43	54.00	10.57

802.11ac_VHT20_Highest Channel (5 240 MHz)


Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
10 479.00	H	56.20	38.96	-43.06	-	52.10	68.20	16.10
15 722.31 ¹⁾	H	58.10	37.90	-40.82	-	55.18	74.00	18.82
Average Data								
15 722.31 ¹⁾	H	46.33	37.90	-40.82	0.97	44.38	54.00	9.62

802.11ac_VHT20_Lowest Channel (5 180 MHz)

Average data

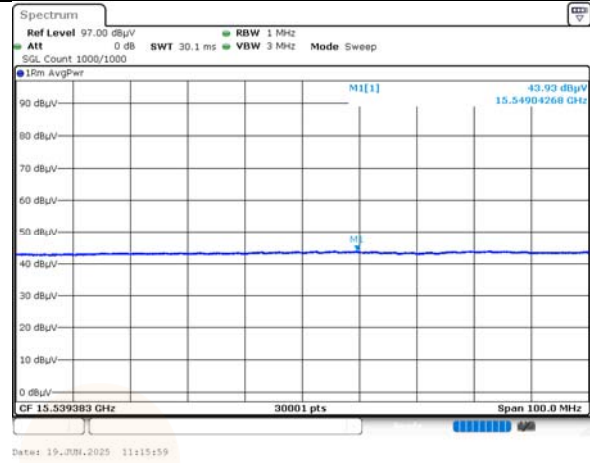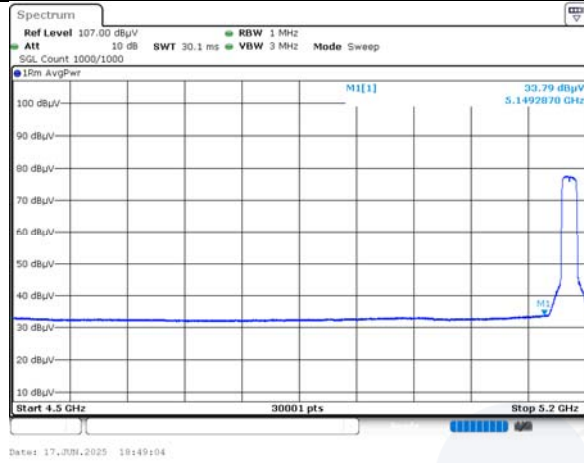

Horizontal/Vertical for Band-edge

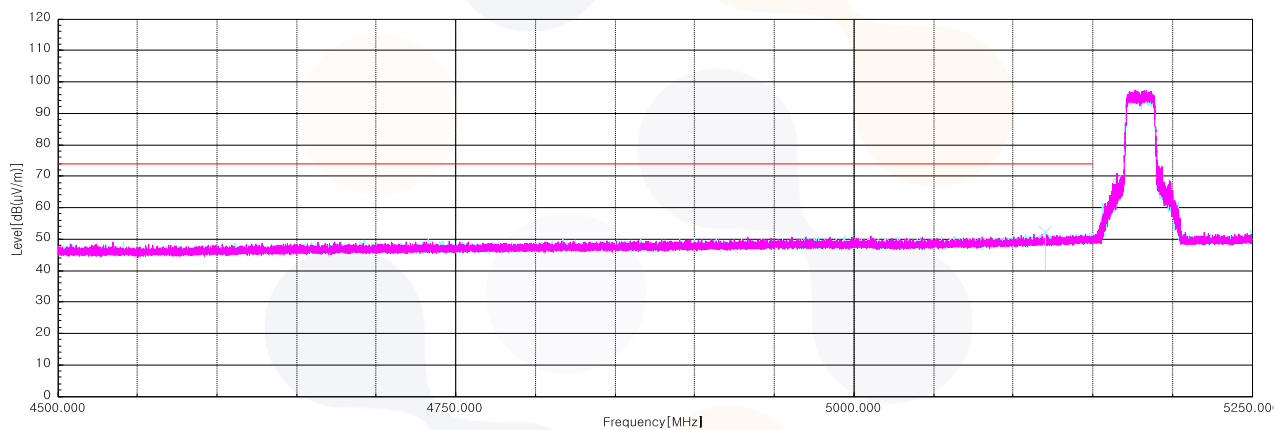

802.11ac_VHT40_Lowest Channel (5 190 MHz)



Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
5 149.80 ¹⁾	H	53.00	33.20	-26.63	-	59.57	74.00	14.43
10 376.27	H	56.30	38.75	-43.05	-	52.00	68.20	16.20
15 618.98 ¹⁾	H	55.00	37.86	-40.95	-	51.91	74.00	22.09
Average Data								
5 149.80 ¹⁾	H	38.58	33.20	-26.63	1.53	46.68	54.00	7.32
15 618.98 ¹⁾	H	44.15	37.86	-40.95	1.53	42.59	54.00	11.41

802.11ac_VHT40_Highest Channel (5 230 MHz)


Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
10 459.45	H	56.50	38.92	-43.06	-	52.36	68.20	15.84
15 683.22 ¹⁾	H	56.70	37.90	-40.87	-	53.73	74.00	20.27
Average Data								
15 683.22 ¹⁾	H	45.26	37.90	-40.87	1.53	43.82	54.00	10.18

802.11ac_VHT40_Lowest Channel (5 190 MHz)

Average data

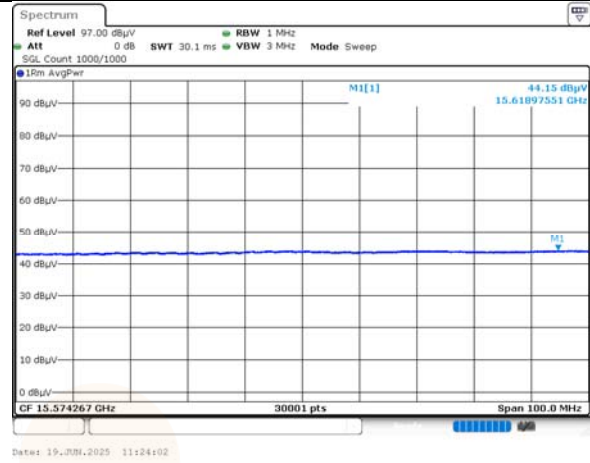
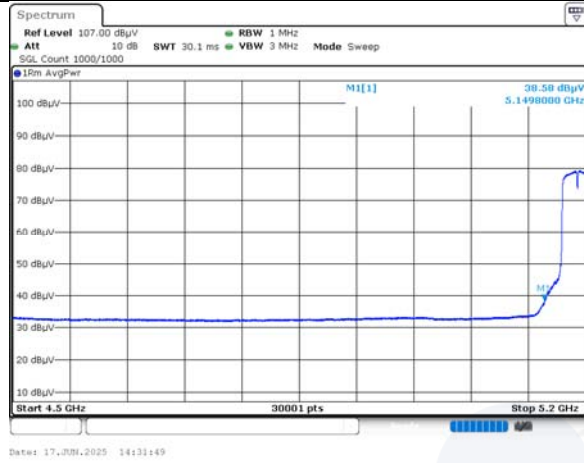


Horizontal/Vertical for Band-edge

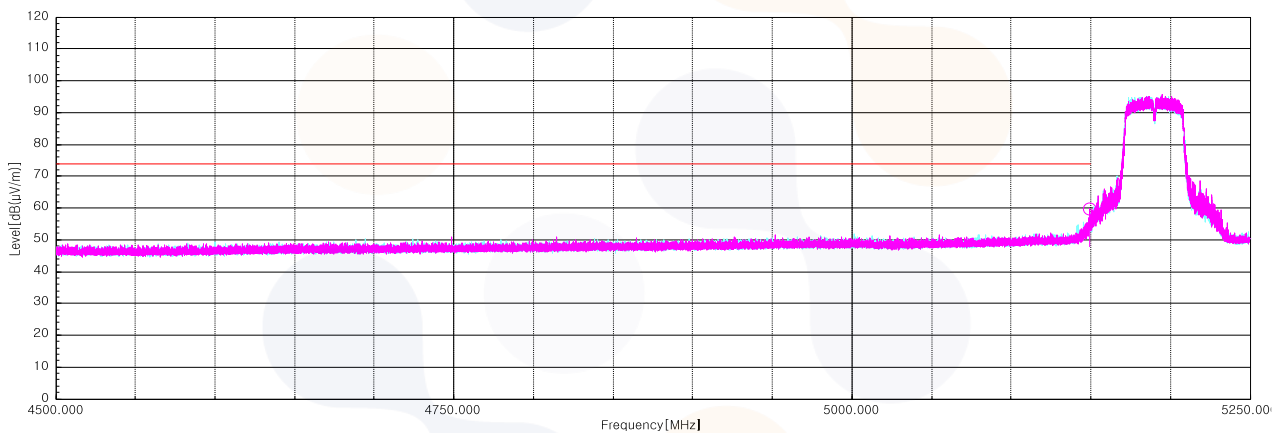

802.11ac_VHT80_Middle Channel (5 210 MHz)


Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
5 148.12 ¹⁾	V	52.90	33.20	-26.63	-	59.47	74.00	14.53
10 488.20	V	56.30	38.98	-43.06	-	52.22	68.20	15.98
15 799.43 ¹⁾	H	55.10	37.90	-40.74	-	52.26	74.00	21.74
Average Data								
5 148.12 ¹⁾	V	39.30	33.20	-26.63	2.61	48.48	54.00	5.52
15 799.43 ¹⁾	H	44.29	37.90	-40.74	2.61	44.06	54.00	9.94

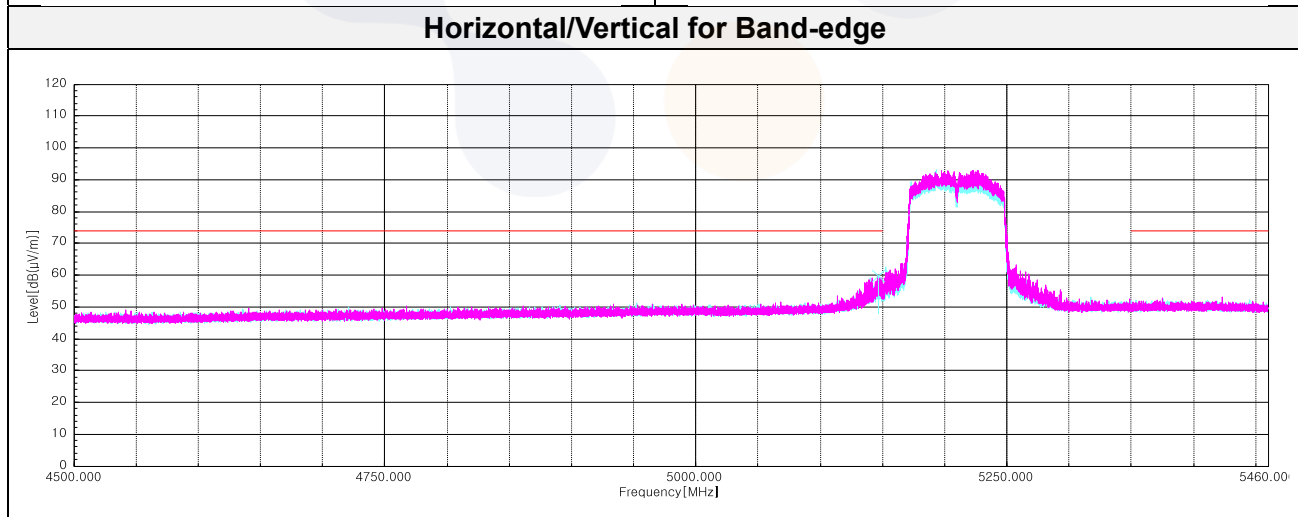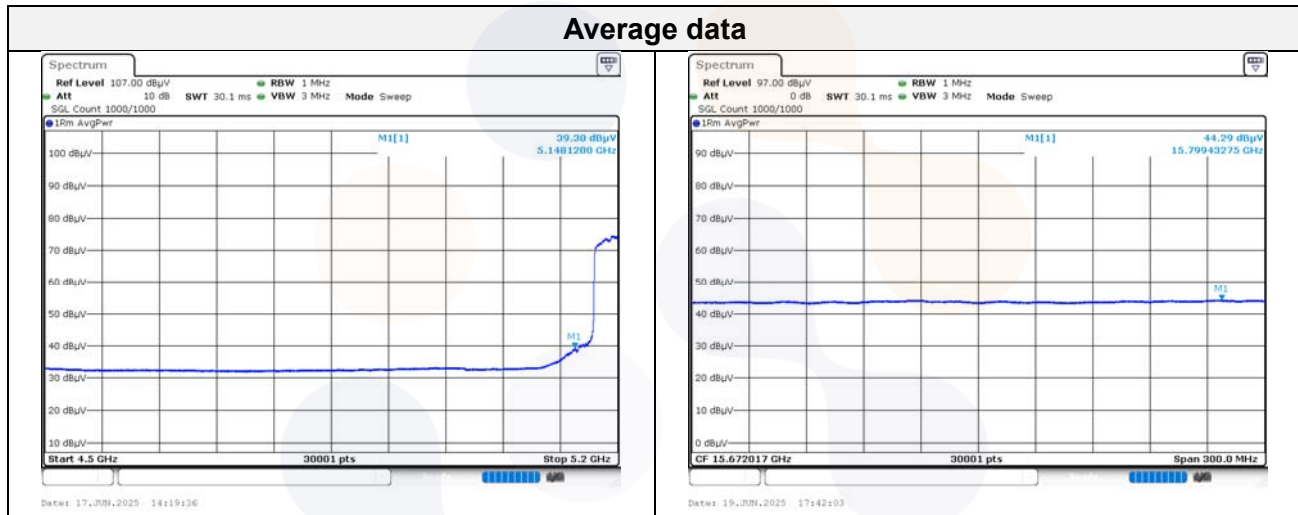


Plot of Harmonics and Spurious Emissions

In order to simplify the report, attached plots were only the lowest margin condition
802.11ac_VHT80_UNII-1_Middle Channel (5 210 MHz)


Horizontal/Vertical for 1 GHz ~ 6.5 GHz

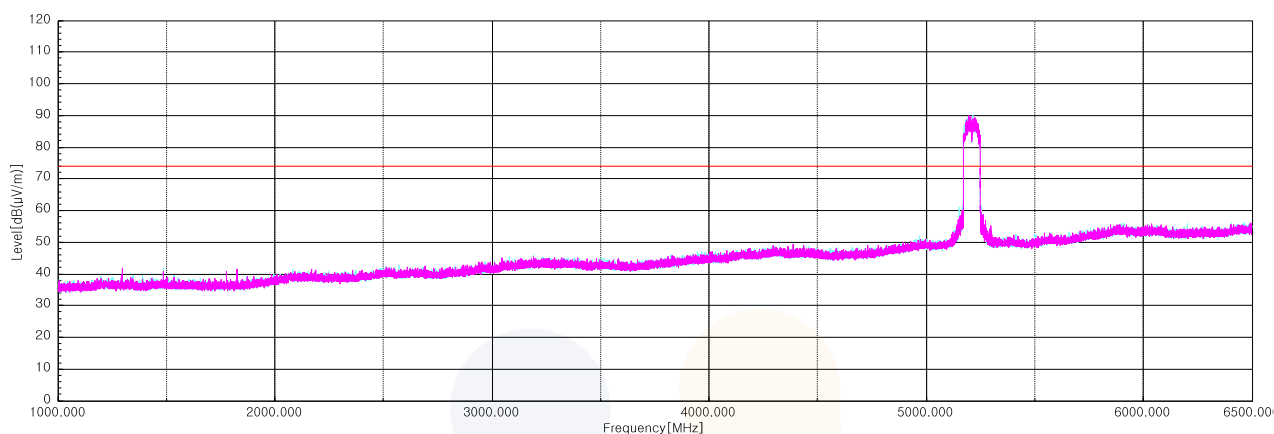

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

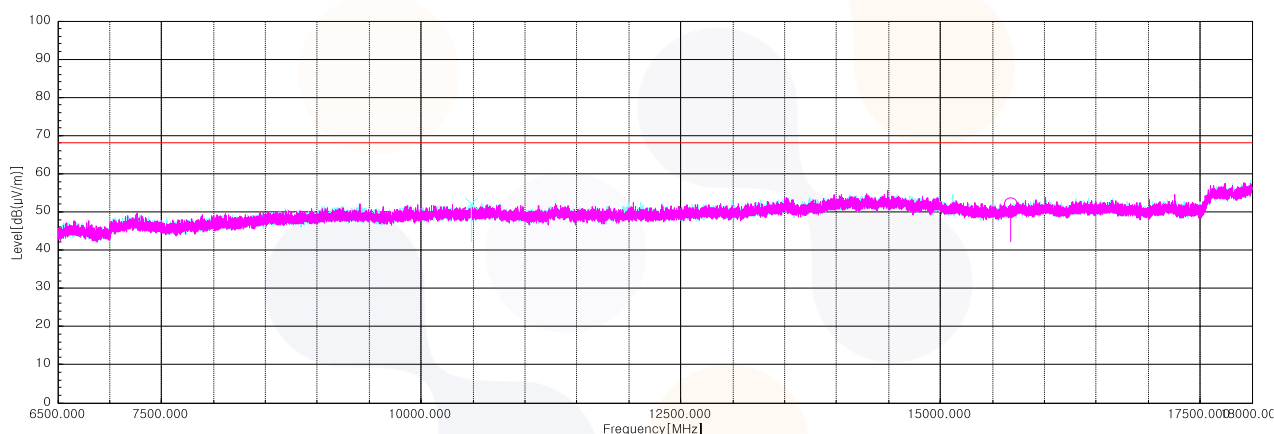

Horizontal/Vertical for 18 GHz ~ 40 GHz

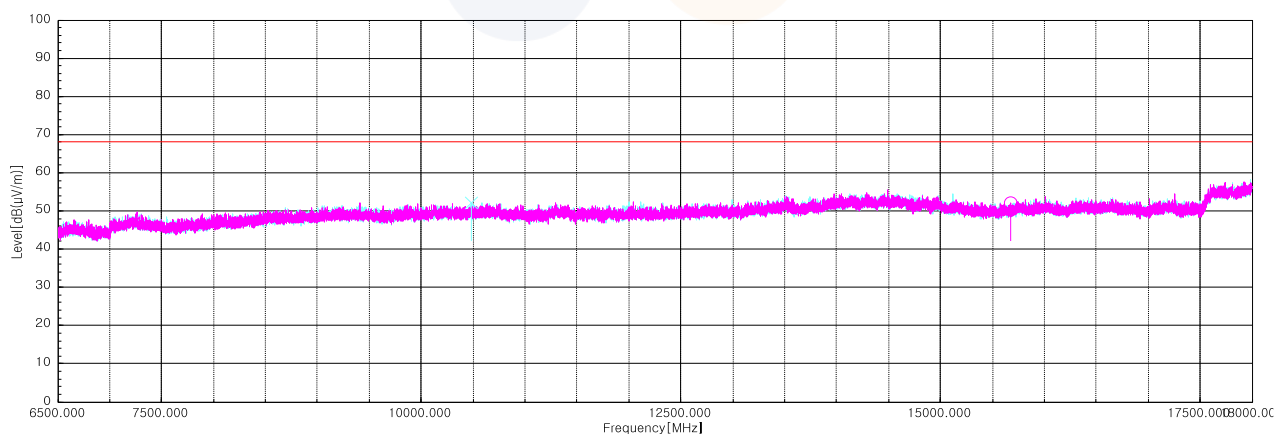

UNII-2A

802.11a_Lowest Channel (5 260 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
10 524.23	H	57.10	38.90	-43.11	-	52.89	68.20	15.31
15 775.90 ¹⁾	H	65.10	37.90	-40.77	-	62.23	74.00	11.77
Average Data								
15 775.90 ¹⁾	H	51.43	37.90	-40.77	0.27	48.83	54.00	5.17

802.11a_Middle Channel (5 280 MHz)



Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
10 564.48	V	57.80	39.03	-43.19	-	53.64	68.20	14.56
15 841.51 ¹⁾	H	65.80	37.90	-40.70	-	63.00	74.00	11.00
Average Data								
15 841.51 ¹⁾	H	51.05	37.90	-40.70	0.27	48.52	54.00	5.48

802.11a_Highest Channel (5 320 MHz)


Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
5 404.85 ¹⁾	V	46.90	33.00	-26.26	-	53.64	74.00	20.36
10 637.79 ¹⁾	H	57.50	39.18	-43.35	-	53.33	74.00	20.67
15 957.87 ¹⁾	H	65.50	38.00	-40.59	-	62.91	74.00	11.09
Average Data								
5 404.85 ¹⁾	V	33.70	33.00	-26.26	0.27	40.71	54.00	13.29
10 637.79 ¹⁾	H	46.56	39.18	-43.35	0.27	42.66	54.00	11.34
15 957.87 ¹⁾	H	50.72	38.00	-40.59	0.27	48.40	54.00	5.60

802.11a_Highest Channel (5 320 MHz)

Average data

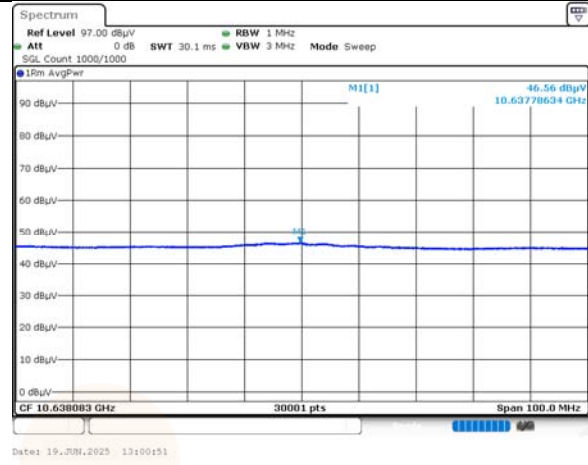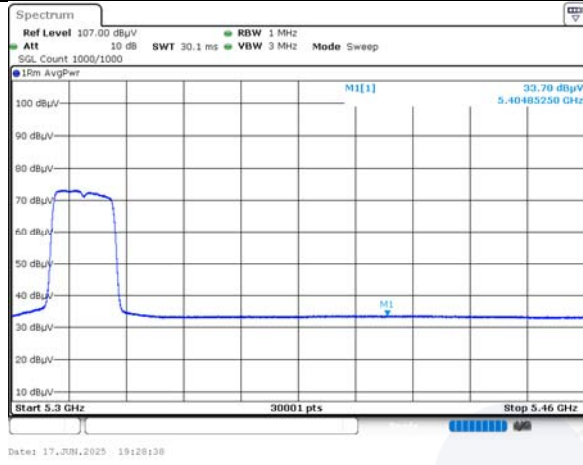


Average data

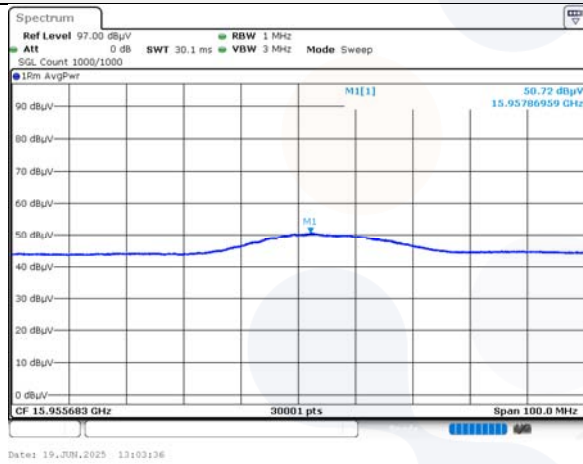

Blank

Horizontal/Vertical for Band-edge

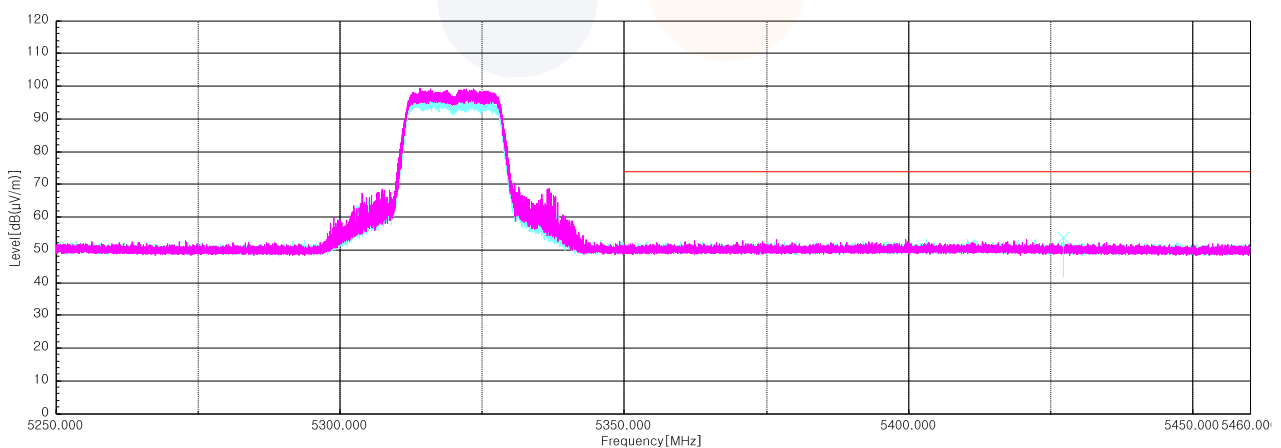

802.11n_HT20_Lowest Channel (5 260 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
10 519.63	H	58.60	38.90	-43.10	-	54.40	68.20	13.80
15 776.13 ¹⁾	H	65.20	37.90	-40.76	-	62.34	74.00	11.66
Average Data								
15 776.13 ¹⁾	H	51.20	37.90	-40.76	0.44	48.78	54.00	5.22

802.11n_HT20_Middle Channel (5 280 MHz)



Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
10 562.95	H	57.40	39.03	-43.19	-	53.24	68.20	14.96
15 842.05 ¹⁾	H	63.20	37.90	-40.70	-	60.40	74.00	13.60
Average Data								
15 842.05 ¹⁾	H	50.59	37.90	-40.70	0.44	48.23	54.00	5.77

802.11n_HT20_Highest Channel (5 320 MHz)


Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
5 412.71 ¹⁾	H	46.20	33.00	-26.26	-	52.94	74.00	21.06
10 639.91 ¹⁾	H	57.00	39.18	-43.35	-	52.83	74.00	21.17
15 957.01 ¹⁾	H	62.00	38.00	-40.59	-	59.41	74.00	14.59
Average Data								
5 412.71 ¹⁾	H	33.85	33.00	-26.26	0.44	41.03	54.00	12.97
10 639.91 ¹⁾	H	47.10	39.18	-43.35	0.44	43.37	54.00	10.63
15 957.01 ¹⁾	H	49.89	38.00	-40.59	0.44	47.74	54.00	6.26

802.11n_HT20_Highest Channel (5 320 MHz)

Average data

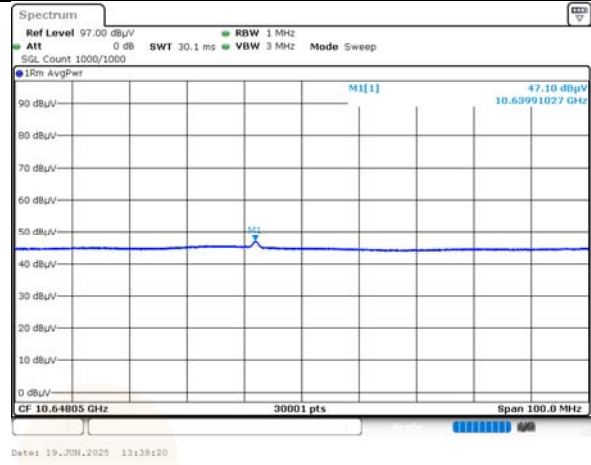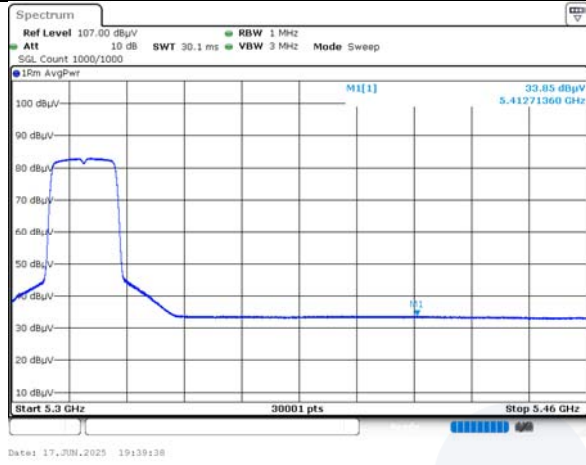


Average data

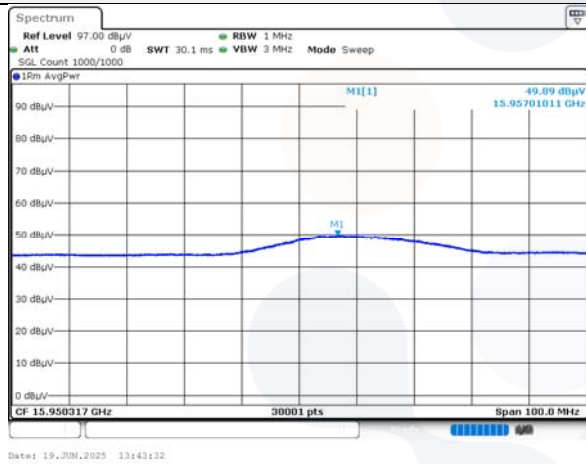

Blank

Horizontal/Vertical for Band-edge

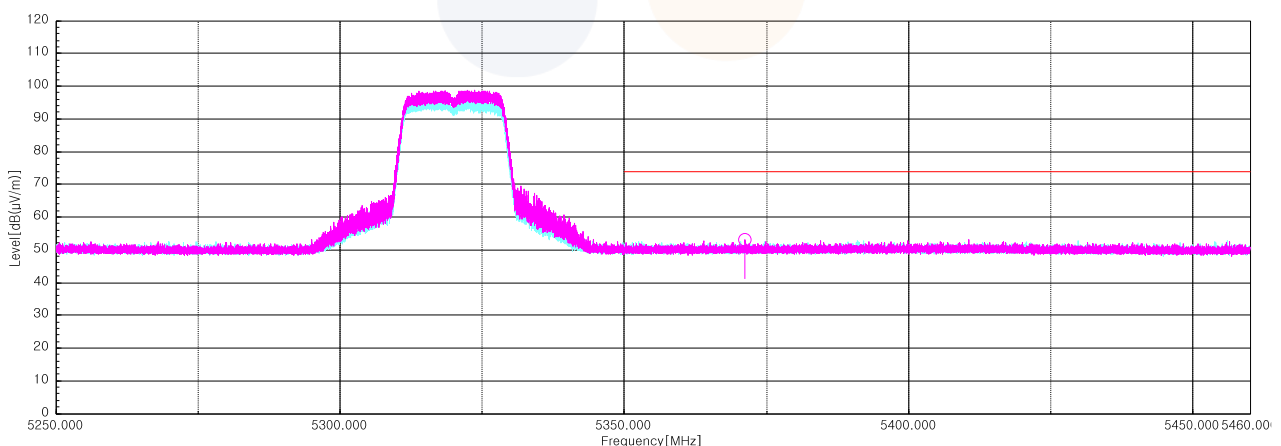

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-4904-0113 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR25-SRF0132 Page (77) of (115)	
---	---	---

802.11n_HT40_Lowest Channel (5 270 MHz)



Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
10 532.28	H	56.20	38.90	-43.13	-	51.97	68.20	16.23
15 816.36 ¹⁾	H	61.20	37.90	-40.73	-	58.37	74.00	15.63
Average Data								
15 816.36 ¹⁾	H	48.80	37.90	-40.73	0.75	46.72	54.00	7.28

802.11n_HT40_Highest Channel (5 310 MHz)


Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
5 350.08 ¹⁾	H	56.60	33.00	-26.26	-	63.34	74.00	10.66
10 620.05 ¹⁾	H	57.20	39.14	-43.31	-	53.03	74.00	20.97
15 931.08 ¹⁾	H	62.60	38.00	-40.62	-	59.98	74.00	14.02
Average Data								
5 350.08 ¹⁾	H	37.83	33.00	-26.26	0.75	45.32	54.00	8.68
10 620.05 ¹⁾	H	47.71	39.14	-43.31	0.75	44.29	54.00	9.71
15 931.08 ¹⁾	H	48.70	38.00	-40.62	0.75	46.83	54.00	7.17

802.11n_HT40_Highest Channel (5 310 MHz)

Average data

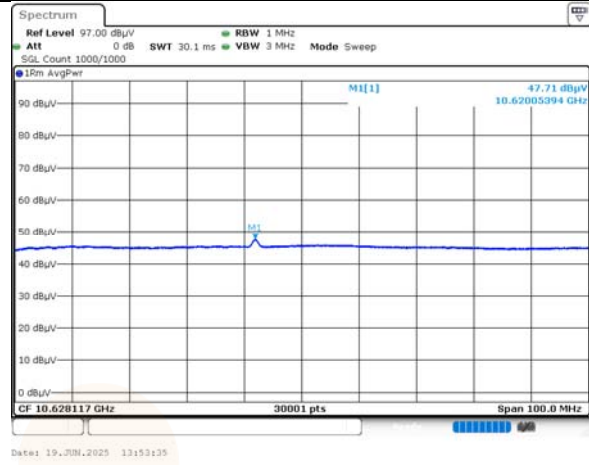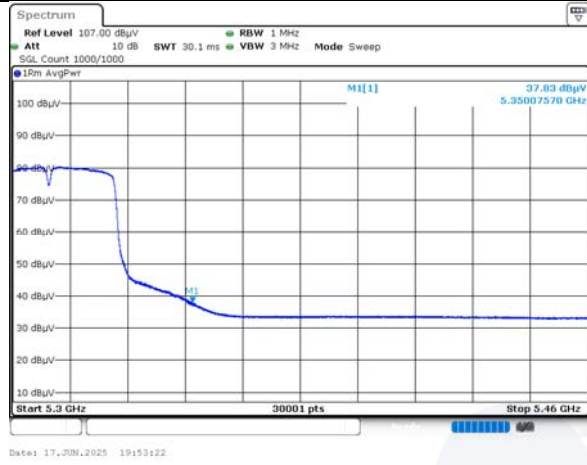


Average data

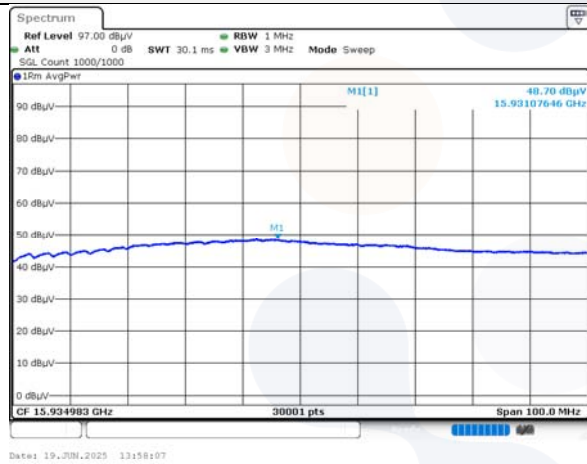

Blank

Horizontal/Vertical for Band-edge

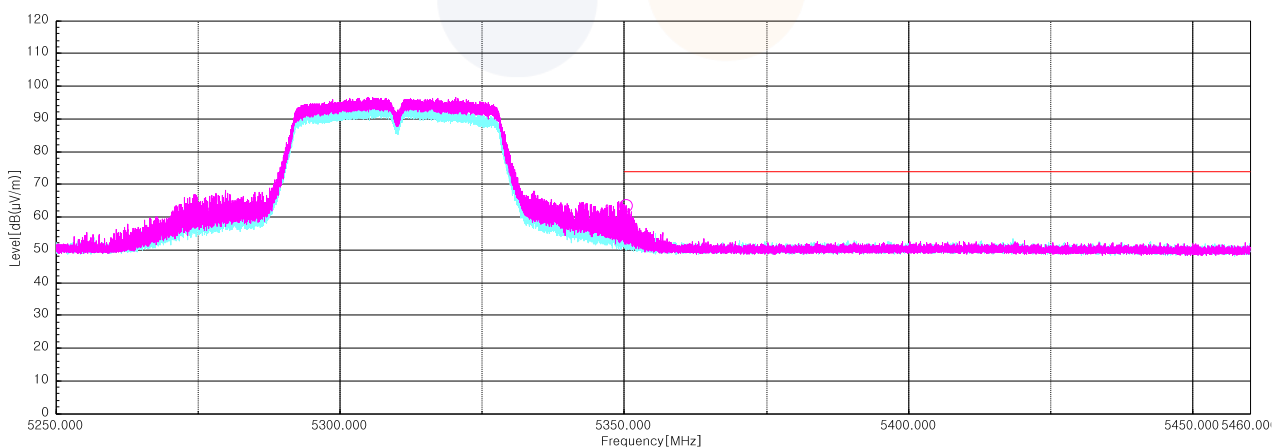

802.11ac_VHT20_Lowest Channel (5 260 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
10 520.02	H	57.20	38.90	-43.10	-	53.00	68.20	15.20
15 776.38 ¹⁾	H	65.20	37.90	-40.76	-	62.34	74.00	11.66
Average Data								
15 776.38 ¹⁾	H	51.35	37.90	-40.76	0.97	49.46	54.00	4.54

802.11ac_VHT20_Middle Channel (5 280 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
10 559.50	H	57.00	39.02	-43.18	-	52.84	68.20	15.36
15 839.78 ¹⁾	H	63.90	37.90	-40.70	-	61.10	74.00	12.90
Average Data								
15 839.78 ¹⁾	H	51.59	37.90	-40.70	0.97	49.76	54.00	4.24

802.11ac_VHT20_Highest Channel (5 320 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
5 389.08 ¹⁾	V	46.40	33.00	-26.26	-	53.14	74.00	20.86
10 640.10 ¹⁾	H	56.60	39.18	-43.35	-	52.43	74.00	21.57
15 957.37 ¹⁾	H	61.50	38.00	-40.59	-	58.91	74.00	15.09
Average Data								
5 389.08 ¹⁾	V	33.71	33.00	-26.26	0.97	41.42	54.00	12.58
10 640.10 ¹⁾	H	46.29	39.18	-43.35	0.97	43.09	54.00	10.91
15 957.37 ¹⁾	H	49.82	38.00	-40.59	0.97	48.20	54.00	5.80