

FCC TEST REPORT

Report No: STS1612149F01

Issued for

SwissTIP S.A.

Place des Perrières 1, Coppet 1296, Switzerland

Product Name:	PACHOM Zoning and Detection Unit
Brand Name:	N/A
Model Name:	UBEP-C
Series Model:	UBEP-S, UBEP-N, UBEP-P, UBEP-E
FCC ID:	2AKO2UBEP-C
Test Standard:	FCC Part 15.249

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.

APPROVAL

Shenzhen STS Test Services Co., Ltd.
1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,
Fuyong Street, Bao'an District, Shenzhen, Guangdong, China
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail:sts@stsapp.com



TEST RESULT CERTIFICATION

Applicant's name: SwissTIP S.A.

Address: Place des Perrières 1, Coppet 1296, Switzerland

Manufacture's Name : SwissTIP S.A.

Address: Place des Perrières 1, Coppet 1296, Switzerland

Product description

Product name: PACHOM Zoning and Detection Unit

Brand name : N/A

Model and/or type reference: UBEP-C, UBEP-S, UBEP-N, UBEP-P, UBEP-E

Standards : FCC Part15.249

Test procedure : ANSI C63.10-2013

This device described above has been tested by STS, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test :

Date of performance of tests: 20 Dec. 2016 ~31 Dec. 2016

Date of Issue: 03 Jan. 2017

Test Result : Pass

Testing Engineer :

(Sean she)

Technical Manager :

Authorized Signatory:

(Tony liu)

12000

(Bovey Yang)



Table of Contents	Page
1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	8
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
2.4 DESCRIPTION OF SUPPORT UNITS	10
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
3. EMC EMISSION TEST	12
3.1 CONDUCTED EMISSION MEASUREMENT	12
3.2 RADIATED EMISSION MEASUREMENT	15
4. CONDUCTED SPURIOUS & BAND EDGE EMISSION	24
4.1 REQUIREMENT	24
4.2 TEST PROCEDURE	24
4.3 TEST SETUP	24
4.4 EUT OPERATION CONDITIONS	24
4.5 TEST RESULTS	25
5. BANDWIDTH TEST	26
5.1 TEST PROCEDURE	26
5.2 TEST SETUP	26
5.3 EUT OPERATION CONDITIONS	26
5.4 TEST RESULTS	27
6. ANTENNA REQUIREMENT	28
6.1 STANDARD REQUIREMENT	28
6.2 EUT ANTENNA	28
APPENDIX- PHOTOS OF TEST SETUP	29







Revision History

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	03 Jan. 2017	STS1612149F01	ALL	Initial Issue





1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part 15.249 , Subpart C						
Standard Section	Test Item	Judgment	Remark			
15.207	Conducted Emission	N/A				
15.203	Antenna Requirement	Pass				
15.249	Radiated Spurious Emission	Pass				
	conduction Spurious Emission	N/A				
15 205	Radiated Band Edge Emission	Pass				
15.205	conduction Band Edge Emission	N/A				
15.249	20dB Bandwidth	Pass				

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

(2) All tests are according to ANSI C63.10-2013



1.1 TEST FACTORY

Shenzhen STS Test Services Co., Ltd.

Add.: 1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,

Fuyong Street, Bao'an District, Shenzhen, Guangdong, China FCC Registration No.: 842334; IC Registration No.: 12108A-1

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $\mathbf{y} \pm \mathbf{U}$, where expended uncertainty \mathbf{U} is based on a standard uncertainty multiplied by a coverage factor of $\mathbf{k=2}$, providing a level of confidence of approximately $\mathbf{95}$ %.

No.	Item	Uncertainty
1	Conducted Emission (9KHz-150KHz)	±2.88Db
2	Conducted Emission (150KHz-30MHz)	±2.67Db
3	RF power,conducted	±0.70Db
4	Spurious emissions,conducted	±1.19Db
5	All emissions,radiated(<1G) 30MHz-200MHz	±2.83Db
6	All emissions,radiated(<1G) 200MHz-1000MHz	±2.94Db
7	All emissions,radiated(>1G)	±3.03Db
8	Temperature	±0.5°C
9	Humidity	±2%



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	PACHOM Zoning and Detection Unit			
Trade Name	N/A			
Model Name	UBEP-C			
Series Model	UBEP-S, UBEP-N, UBE	P-P, UBEP-E		
Model Difference	Only different in model r	name		
	The EUT is a PACHOM Zoning and Detection Unit Operation Frequency: 2482MHz			
	Modulation Type:	GFSK		
	Antenna Designation:	PCB Antenna		
Product Description	Antenna Gain(Peak)	1.3 dBi		
·	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.			
Channel List	Please refer to the Note 2.			
Power Supply	Input: DC 9V ~58V			

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2

Channel	Frequency (MHz)	
01	2482	

3. Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	UBEP-C	Dipole	NA	1.3	Antenna

The EUT antenna is PCB Antenna. No antenna other than that furnished by the responsible party shall be used with the device.

2.2 DESCRIPTION OF TEST MODES

For conducted test items and radiated spurious emissions Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively..

Pretest Mode	Description	Data/Modulation
Mode 1	TX CH01	1 MHz/GFSK

Note:

(1) All above mode have been measurement, only worst data was reported.



2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Radiated Spurious Emission Test

E-1 EUT





2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
E-1	PACHOM Zoning and Detection Unit	N/A	UBEP-C	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note
N/A	N/A	N/A	N/A	N/A

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in <code>"Length_"</code> column.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

rtadiation root oq	Tadiation foot oddipmont						
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until		
Spectrum Analyzer	Agilent	E4407B	MY50140340	2016.10.23	2017.10.22		
Test Receiver	R&S	ESCI	101427	2016.10.23	2017.10.22		
Bilog Antenna	TESEQ	CBL6111D	34678	2014.11.24	2017.11.23		
Horn Antenna	Schwarzbeck	BBHA 9120D(1201)	9120D-1343	2015.03.05	2018.03.04		
Loop Antenna	EMCO	6502	9003-2485	2016.03.06	2019.03.03		
50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2016.06.06	2017.06.05		
PreAmplifier	Agilent	8449B	60538	2016.10.23	2017.10.22		
USB RF power sensor	DARE	RPR3006W	15I00041SNO0 3	2016.10.23	2017.10.22		
Semi-anechoic chamber	Changling	966	N/A	2016.10.23	2017.10.22		

Conduction Test equipment

Conduction lest equi	priient				
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESPI	102086	2016.10.23	2017.10.22
LISN	R&S	ENV216	101242	2016.10.23	2017.10.22
LISN	EMCO	3810/2NM	000-23625	2016.10.23	2017.10.22
Shielding Room	Changling	854	N/A	2016.10.23	2017.10.22



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

Operating frequency band. In case the emission fall within the restricted band specified on Part 15.249 limit in the table below has to be followed.

FREQUENCY (MHz)	(dB	Standard	
FREQUENCT (MIDZ)	Quasi-peak	Average	Standard
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz



3.1.2 TEST PROCEDURE

- a. The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

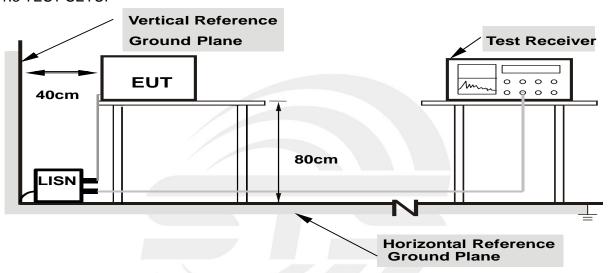

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.5 TEST RESULTS

Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	L/N
Test Voltage:	DC 12V	Test Mode:	N/A

Note: denotes test is not applicable in this test report.





3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on Part 15.249 and the Part 15.209(a) limit in the table below has to be followed.

Standard FCC 15.209

Frequencies	Field Strength	Measurement Distance
(MHz)	(micorvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3
Above 1000	74.0 dB(µV)/m (Peak)	3
	54.0 dB(µV)/m (Average)	

Standard FCC 15.249

Frequency of Emission (MHz)	Field Strength of fundamental (millivolts /meter)	Field Strength of Harmonics (microvolts/meter)
900~928	50	500
2400~2483.5	50	500
5725~5875	50	500
24000~242500	250	2500

Notes:

(1) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Spectrum Parameter	Setting	
Detector	Peak/AV	
Attenuation	Auto	
Start Frequency	1000 MHz	
Stop Frequency	10th carrier harmonic	
RB (emission in restricted band)	>20BW	
VB (emission in restricted band)	=3xRB	



Receiver Parameter	Setting		
Attenuation	Auto		
	9kHz~90kHz / RB 200Hz for PK & AV		
	90kHz~110kHz / RB 200Hz for QP		
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV		
	490kHz~30MHz / RB 9kHz for QP		
	30MHz~1000MHz / RB 120kHz for QP		

3.2.2 TEST PROCEDURE


- a. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of arotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
- b. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
- c. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
- d. The initial step in collecting radiated emission data is a receive peak detector mode.
 Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform (Below 1GHz)
- f. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)
- 9. For the actual test configuration, please refer to the related Item –EUT Test Photos.
 Note: Both horizontal and vertical antenna polarities were tested
 and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD No deviation





3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

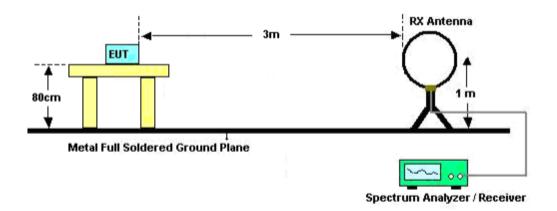

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

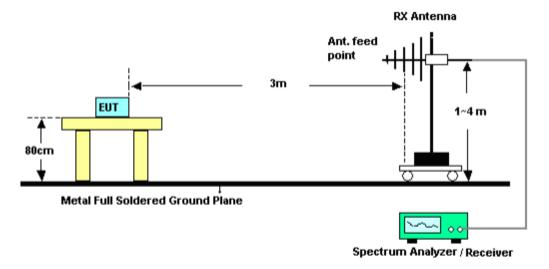



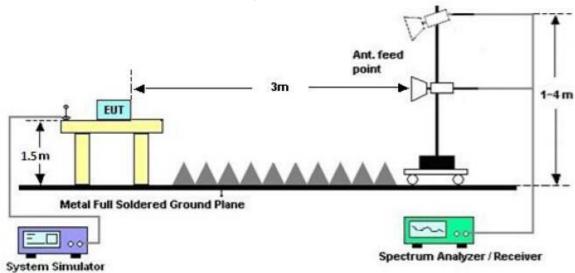



3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

Below 30 MHz

Temperature :	23 ℃	Relative Humidity:	50%
Pressure :	1010 hPa	Polarization :	
Test Voltage:	DC 12V		
Test Mode :	TX Mode		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
				PASS
	/			PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =40 log (specific distance/test distance)(dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.



Between 30MHz - 1000 MHz Radiation Spurious


Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	Horizontal
Test Voltage:	DC 12V	Test Mode:	Mode 1

Frequency	Reading	Correct	Result	Limit	Margin	Remark
(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
47.6584	48.07	-20.27	27.80	40.00	-12.20	QP
69.8450	52.48	-24.10	28.38	40.00	-11.62	QP
99.8777	43.40	-19.20	24.20	43.50	-19.30	QP
234.1682	57.06	-18.18	38.88	46.00	-7.12	QP
323.3204	47.65	-14.14	33.51	46.00	-12.49	QP
689.5643	34.45	-5.57	28.88	46.00	-17.12	QP

Remark:

- All readings are Quasi-Peak .
 Margin = Result (Result = Reading + Factor)

 –Limit

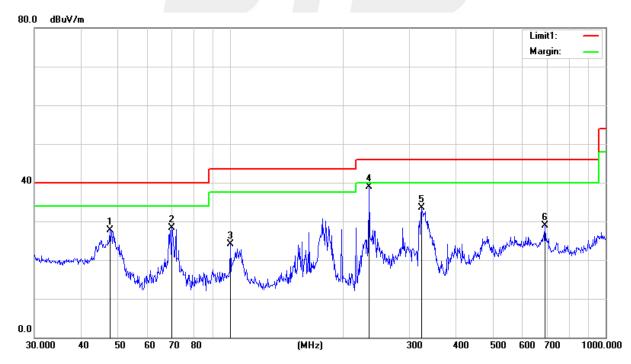




Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	Vertical
Test Voltage:	DC 12V	Test Mode:	Mode 1

Frequency	Reading	Correct	Result	Limit	Margin	Remark
(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
47.6584	39.76	-20.27	19.49	40.00	-20.51	QP
70.0901	52.00	-24.09	27.91	40.00	-12.09	QP
105.6414	41.71	-18.71	23.00	43.50	-20.50	QP
179.3863	48.85	-19.43	29.42	43.50	-14.08	QP
234.1682	54.74	-18.18	36.56	46.00	-9.44	QP
287.9904	46.88	-15.49	31.39	46.00	-14.61	QP

Remark:

- 1. All readings are Quasi-Peak.
- 2. Margin = Result (Result = Reading + Factor)-Limit

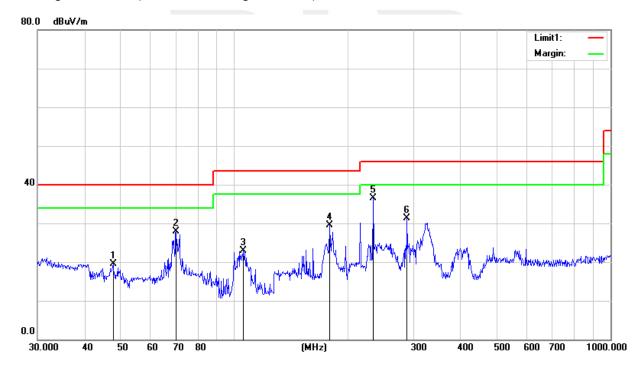



Fundamental frequency:

PΚ

	Reading	Amalifian	Loop	Antenna	Fastar(dD)	Result	Limit	Marain(dD)	
Frequency	(dBµV/m)	Amplifier	Loss	Factor	Factor(dB)	(dBµV/m)	(dBµV/m)	Margin(dB)	Polarization
(MHz)	PEAK	(dB)	(dB)	(dB/m)	Corr.	PEAK	PEAK	PEAK	
2482	94.214	44.40	6.06	27.66	-10.68	83.54	114	-30.46	Vertical
2482	92.348	44.40	6.06	27.66	-10.68	81.67	114	-32.33	Horizontal

 AV

	Reading	Amplifier	Loop	Antenna	Factor/dD)	Result	Limit	Marain(dD)	
Frequency	(dBµV/m)	Amplinei	Loss	Factor	Factor(dB)	(dBµV/m)	(dBµV/m)	Margin(dB)	Polarization
(MHz)	AV	(dB)	(dB)	(dB/m)	Corr.	AV	PEAK	PEAK	
2482	74.617	44.40	6.06	27.66	-10.68	63.94	94	-30.06	Vertical
2482	72.520	44.40	6.06	27.66	-10.68	61.84	94	-32.16	Horizontal

Note: RBW>20BW; VBW=3xRBW



Above 1G Radiation Spurious

Frequency	Meter Reading	Amplifier	Loss	Antenna Factor	Orrected Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBµV)	(dB)	(dB)	(dB/m)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре	
				Low C	hannel (2482	2 MHz)				
3264.87	48.87	44.70	6.70	28.20	-9.80	39.07	74.00	-34.93	PK	Vertical
3264.87	39.66	44.70	6.70	28.20	-9.80	29.86	54.00	-24.14	AV	Vertical
3264.61	47.85	44.70	6.70	28.20	-9.80	38.05	74.00	-35.95	PK	Horizontal
3264.61	38.28	44.70	6.70	28.20	-9.80	28.48	54.00	-25.52	AV	Horizontal
4964.40	58.54	44.20	9.04	31.60	-3.56	54.98	74.00	-19.02	PK	Vertical
4964.40	38.97	44.20	9.04	31.60	-3.56	35.41	54.00	-18.59	AV	Vertical
4964.32	58.66	44.20	9.04	31.60	-3.56	55.10	74.00	-18.90	PK	Horizontal
4964.32	38.41	44.20	9.04	31.60	-3.56	34.85	54.00	-19.15	AV	Horizontal
5359.63	45.77	44.20	9.86	32.00	-2.34	43.43	74.00	-30.57	PK	Vertical
5359.63	38.02	44.20	9.86	32.00	-2.34	35.68	54.00	-18.32	AV	Vertical
5359.77	45.90	44.20	9.86	32.00	-2.34	43.56	74.00	-30.44	PK	Horizontal
5359.77	38.27	44.20	9.86	32.00	-2.34	35.93	54.00	-18.07	AV	Horizontal
7445.94	50.68	43.50	11.40	35.50	3.40	54.08	74.00	-19.92	PK	Vertical
7445.94	32.92	43.50	11.40	35.50	3.40	36.32	54.00	-17.68	AV	Vertical
7445.96	50.50	43.50	11.40	35.50	3.40	53.90	74.00	-20.10	PK	Horizontal
7445.96	32.58	43.50	11.40	35.50	3.40	35.98	54.00	-18.02	AV	Horizontal
9927.74	40.18	43.60	14.30	39.50	10.20	50.38	74.00	-23.62	PK	Vertical
9927.74	30.66	43.60	14.30	39.50	10.20	40.86	54.00	-13.14	AV	Vertical
9928.07	40.12	43.60	14.30	39.50	10.20	50.32	74.00	-23.68	PK	Horizontal
9928.07	29.88	43.60	14.30	39.50	10.20	40.08	54.00	-13.92	AV	Horizontal
13299.17	39.66	42.70	18.00	37.10	12.40	52.06	74.00	-21.94	PK	Vertical
13299.17	28.54	42.70	18.00	37.10	12.40	40.94	54.00	-13.06	AV	Vertical
13299.46	40.54	42.70	18.00	37.10	12.40	52.94	74.00	-21.06	Pk	Horizontal
13299.46	30.00	42.70	18.00	37.10	12.40	42.40	54.00	-11.60	AV	Horizontal
17997.68	30.13	42.70	19.40	46.50	23.20	53.33	74.00	-20.67	PK	Vertical
17997.68	19.94	42.70	19.40	46.50	23.20	43.14	54.00	-10.86	AV	Vertical
17997.57	30.45	42.70	19.40	46.50	23.20	53.65	74.00	-20.35	PK	Horizontal
17997.57	18.71	42.70	19.40	46.50	23.20	41.91	54.00	-12.09	AV	Horizontal



(Radiation Band edge)

Frequency	Meter Reading	Amplifier	Loss	Antenna Factor	Orrected Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBµV)	(dB)	(dB)	(dB/m)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре	
					GFSK					
2400.00	68.37	43.80	4.91	25.90	-12.99	55.38	74	-18.62	PK	Vertical
2400.00	53.23	43.80	4.91	25.90	-12.99	40.24	54	-13.76	AV	Vertical
2400.00	69.67	43.80	4.91	25.90	-12.99	56.68	74	-17.32	PK	Horizontal
2400.00	52.73	43.80	4.91	25.90	-12.99	39.74	54	-14.26	AV	Horizontal
2483.50	70.06	43.80	5.12	25.90	-12.78	57.28	74	-16.72	PK	Vertical
2483.50	53.18	43.80	5.12	25.90	-12.78	40.40	54	-13.60	AV	Vertical
2483.50	70.52	43.80	5.12	25.90	-12.78	57.74	74	-16.26	PK	Horizontal
2483.50	53.02	43.80	5.12	25.90	-12.78	40.24	54	-13.76	AV	Horizontal

Low measurement frequencies is range from 2310 to 2400 MHz, high measurement frequencies is range from 2483.5 to 2500 MHz.

Only show the worst point data of the emissions in the frequency 2310-2400 MHz and 2483.5-2500 MHz.



4. CONDUCTED SPURIOUS & BAND EDGE EMISSION

4.1 REQUIREMENT

According to FCC section 15.249, in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 50dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.


4.2 TEST PROCEDURE

Spectrum Parameter	Setting		
Detector	Peak		
Start/Stop Frequency	30 MHz to 10th carrier harmonic		
RB / VB (emission in restricted band)	100 KHz/300 KHz		
Trace-Mode:	Max hold		

For Band edge

Spectrum Parameter	Setting			
Detector	Peak			
Stort/Stop Eroguanay	Lower Band Edge: 2310 – 2404 MHz			
Start/Stop Frequency	Upper Band Edge: 2478 – 2500 MHz			
RB / VB (emission in restricted band)	100 KHz/300 KHz			
Trace-Mode:	Max hold			

4.3 TEST SETUP



The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading. Make the measurement with the spectrum analyzer's resolution bandwidth(RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

4.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.







4.5 TEST RESULTS

Temperature :	25 ℃	Relative Humidity:	50%
Pressure :	1012 hPa	Test Voltage :	DC 12V
Test Mode :	N/A		

Note: denotes test is not applicable in this test report.





5. BANDWIDTH TEST

5.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 30KHz, VBW≥RBW, Sweep time = Auto.

5.2 TEST SETUP

EUT SPECTRUM ANALYZER

5.3 EUT OPERATION CONDITIONS

TX mode.




5.4 TEST RESULTS

Temperature :	25 ℃	Relative Humidity:	50%
Pressure :	1012 hPa	Test Voltage :	DC 12V

Test Channel	Frequency	20 dBc Bandwidth	99% Bandwidth
	(MHz)	(MHz)	(MHz)
CH01	2482	0.639	0.848

2482MHz

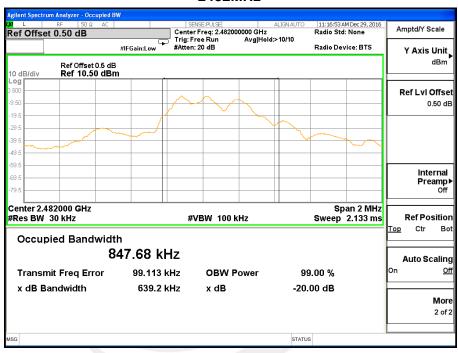



6. ANTENNA REQUIREMENT

6.1 STANDARD REQUIREMENT

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

6.2 EUT ANTENNA


The EUT antenna is Internal PCB Antenna. It conforms to the standard requirements.





APPENDIX- PHOTOS OF TEST SETUP

Radiated Measurement Photos

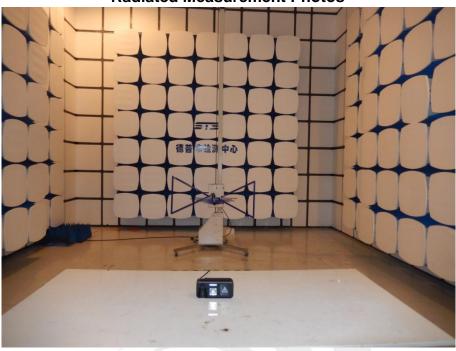



****END OF THE REPORT***