### **ANSI/IEEE Std. C95.1-2005**

in accordance with the requirements of FCC Report and Order: ET Docket 93-62



### **FCC TEST REPORT**

For

360livecam

**Trade Name: Tamaggo** 

Model: 10101

Issued to

Tamaggo Enterprises S.A.
Rue du Mont-Blanc 14, Geneva, CH, 1201, Switzerland

Issued by

**Compliance Certification Services Inc.** 

No.11, Wugong 6th Rd., Wugu Dist.,
New Taipei City 24891,
Taiwan. (R.O.C.)
http://www.ccsrf.com

service@ccsrf.com Issued Date: 2017/6/6



**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.

# **Revision History**

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	2017/6/6	Initial Issue	ALL	Jerry Chuang

Page 2 Rev. 00

# **Table of Contents**

1	Certi	ificate of Compliance (SAR Evaluation)	5
2	Desc	ription of Equipment Under Test	6
	2.1	Summary of Highest SAR Values	7
3	Requ	uirements for Compliance Testing Defined	8
	3.1	Requirements for Compliance Testing Defined by the FCC	8
4	Dosi	metric Assessment System	9
	4.1	Measurement System Diagram	10
	4.2	System Components	11
5	Eval	uation Procedures	14
6	SAR	Measurement Procedures	16
	6.1	Normal SAR Test Procedure	
7	Mea	surement Uncertainty	
8		ce Under Test	
	8.1	Wireless Technologies	
	8.2	Maximum Tune-up Power	
	8.3	Simultaneous Transmission	21
9	Sum	mary of SAR Test Exclusion Configurations	22
	9.1	Standalone SAR Test Exclusion Calculations	
	9.1.1	SAR Exclusion Calculations for Wi-Fi Antenna < 50mm from the User	23
	9.1.2	SAR Exclusion Calculations for Wi-Fi Antenna > 50mm from the User	24
	9.1.3	SAR Required Test Configuration	25
10	Ехро	osure Limit	26
11	Tissu	ue Dielectric Properties	27
	11.1	Test Liquid Confirmation	27
	11.2	Typical Composition of Ingredients for Liquid Tissue Phantoms	28
	11.3	Simulating Liquids Parameter Check Results	29
12	Syste	em Performance Check	30
	12.1	System Performance Check Results	31
13	RF O	output Power Measurement	32
	13.1	Wi-Fi (2.4GHz Band)	33
	13.2	Wi-Fi (5GHz Band)	34
	13.3	Bluetooth	36
14	SAR	Measurements Results	37
15	Simu	ultaneous Transmission SAR Analysis	41
		Estimated SAR for Simultaneous Transmission SAR Analysis	42

### FCC ID: 2AKOR10101

	15.1.1 Estimated SAR for Bluetooth	42
	15.2 Sum of the SAR for Simultaneous Transmission Analysis	43
	15.2.1 Sum of the SAR for Wi-Fi & Bluetooth	43
16	Equipment List & Calibration Status	44
17	Facilities	45
18	Reference	45
19	Attachments	46

Report No: T170215D24-SF

# 1 Certificate of Compliance (SAR Evaluation)

**Applicant** Tamaggo Enterprises S.A.

Rue du Mont-Blanc 14, Geneva, CH, 1201, Switzerland

**Equipment Under Test:** 360livecam

Trade Name: Tamaggo

Model Number: 10101

Date of Test: March 13~14, 2017

Device Category: PORTABLE DEVICES

**Exposure Category:** GENERAL POPULATION/UNCONTROLLED EXPOSURE

	Applicable Standards							
FCC	<ul> <li>IEEE 1528 2013</li> <li>KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04</li> <li>KDB 865664 D02 RF Exposure Reporting v01r02</li> <li>KDB 447498 D01 General RF Exposure Guidance v06</li> <li>KDB 616217 D04 SAR for laptop and tablets v01r02</li> <li>KDB 248227 D01 SAR Meas for 802.11 v02r02</li> </ul>							
	Limit							
	1.6 W/kg							
Test Result								
	Pass							

The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:

Scott Hu

Section Manager

Compliance Certification Services Inc.

Tested by:

Jerry Chuang SAR Engineer

Compliance Certification Services Inc.

Page 5 Rev. 00

# 2 Description of Equipment Under Test

Product	360livecam	60livecam											
Trade Name	Tamaggo												
Model Number	10101	0101											
Wi-Fi Module	AMPAK Model: AP6234												
BT Module	TEXAS		Model:	CC2541									
Transmitters	Wi-Fi & Bluetoc	th		-									
	Bluetooth:8DPS	K for 3Mbps											
Modulation	802.11a: Orthogonal Frequency Division Multiplexing (OFDM)												
	802.11b: Direct Sequence Spread Spectrum(DSSS)												
Technique	802.11g: Orthogonal Frequency Division Multiplexing (OFDM)												
	802.11n: Orthogonal Frequency Division Multiplexing (OFDM)												
Wi-Fi	Brand name	INPAQ	BT	Brand name	INPAQ								
Antenna	Parts Number	WAG-F-LB-00-016	Antenna	Parts Number	WAG-F-LB-00-017								
Specification	Туре	FPC	Specification	Туре	FPC								
Rechargeable Li-polymer Battery–alternate	Brand:FUJI Electronics Model: F112943P Rating: 3.7V/1500mAh												

### Remark:

1. The sample selected for test was prototype that representative to production product and was provided by manufacturer

Page 6 Rev. 00

### 2.1 Summary of Highest SAR Values

Results for highest reported SAR values for each frequency band and mode

Technology/Band	Test configuration	Mode	Highest Reported 1g-SAR (W/kg)
Wi-Fi 2.4 GHz	Edge4	802.11b	0.631
Wi-Fi 5.3 GHz(U-NII 2A)	Edge4	802.11a	0.618
Wi-Fi 5.5 GHz(U-NII 2C)	Edge4	802.11a	1.031
Wi-Fi 5.8 GHz(U-NII 3)	Edge4	802.11a	0.402

Page 7 Rev. 00

### 3 Requirements for Compliance Testing Defined

### 3.1 Requirements for Compliance Testing Defined by the FCC

The US Federal Communications Commission has released the report and order "Guidelines for Evaluating the Environmental Effects of RF Radiation", ET Docket No. 93-62 in August 1996 [1]. The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 W/kg for an uncontrolled environment and 8.0 mW/g for an occupational/controlled environment as recommended by the ANSI/IEEE standard C95.1-1992 [6]


Page 8 Rev. 00

### 4 Dosimetric Assessment System

These measurements were performed with the automated near-field scanning system DASY4/DASY5 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9 m) which positions the probes with a positional repeatability of better than ± 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit. The SAR measurements were conducted with the dosimetric probe EX3DV4-SN: 3554 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure with accuracy of better than ±10%. The spherical isotropy was evaluated with the procedure and found to be better than ±0.25 dB. The phantom used was the SAM Twin Phantom as described in FCC supplement C, IEEE 1528 2013.

Page 9 Rev. 00

### 4.1 Measurement System Diagram

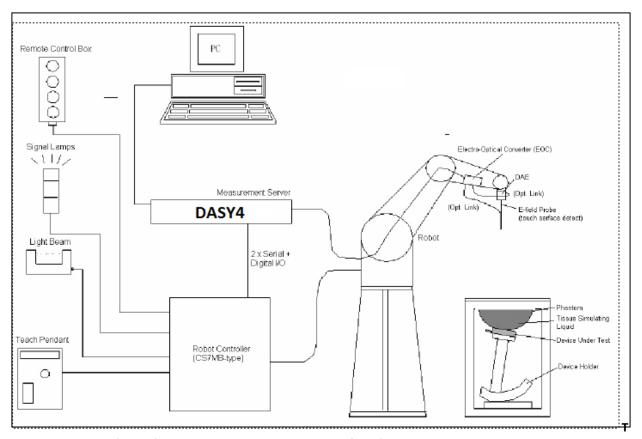

### The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stably RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, ADconversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is
  battery powered with standard or rechargeable batteries. The signal is optically transmitted to the
  EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating system used Windows 7 or Windows XP.
- DASY4 software version: 4.7, Build 80.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing validating the proper functioning of the system.

Page 10 Rev. 00

### 4.2 System Components

### **DASY4/DASY5 Measurement Server**



The DASY4/DASY5 measurement server is based on a PC/104 CPU board with a 166MHz low-power Pentium, 32MB chip disk and 64MB RAM. The necessary circuits for communication with either the DAE3 electronic box as well as the 16-bit AD-converter system for optical detection and digital I/O interface are contained on the DASY4/DASY5 I/O-board, which is directly connected to the PC/104 bus of the CPU board

The measurement server performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.



The PC-operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with two expansion slots which are reserved for future applications. Please note that the expansion slots do not have a standardized pinout and therefore only the expansion cards provided by SPEAG can be inserted. Expansion cards from any other supplier could seriously damage the measurement server. Calibration: No calibration required.

### **Data Acquisition Electronics (DAE)**



The data acquisition electronics (DAE4) consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE4 box is 200MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

Page 11 Rev. 00

### **EX3DV4** Isotropic E-Field Probe for Dosimetric Measurements





**Construction:** Symmetrical design with triangular core

Built-in shielding against static charges

PEEK enclosure material (resistant to organic solvents, e.g.,

DGBE)

**Calibration:** Basic Broad Band Calibration in air: 10-3000 MHz.

Conversion Factors (CF) for HSL 900 and HSL 1800 CF-Calibration for other liquids and frequencies upon

reauest.

Frequency: 10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)

**Directivity:**  $\pm$  0.3 dB in HSL (rotation around probe axis)

 $\pm\ 0.5\ dB$  in HSL (rotation normal to probe axis)

**Dynamic Range:**  $10 \mu W/g \text{ to} > 100 \text{ mW/g}$ ; Linearity:  $\pm 0.2 \text{ dB}$ 

(noise: typically  $< 1 \mu W/g$ )

**Dimensions:** Overall length: 330 mm (Tip: 20 mm)

Tip diameter: 2.5 mm (Body: 12 mm)

Distance from probe tip to dipole centers: 1 mm

Application: High precision dosimetric measurements in any exposure

scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6

GHz with precision of better 30%.

#### SAM Phantom (V4.0)



Construction: The shell corresponds to the specifications of the Specific

Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 2013, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually

teaching three points with the robot.

**Shell Thickness:** 2 ±0.2 mm **Filling Volume:** Approx. 25 liters

Dimensions: Height: 810mm; Length: 1000mm; Width: 500mm

#### SAM Phantom (ELI4)



Construction:

Phantom for compliance testing of handheld and bodymounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209 Part II and all known tissue simulating liquids. ELI4 has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is supported by software version DASY4/DASY5 and higher and is compatible with all SPEAG dosimetric probes and dipoles

**Shell Thickness:**  $2.0 \pm 0.2 \text{ mm (sagging: <1\%)}$ 

Filling Volume: Approx. 25 liters

**Dimensions:** Major ellipse axis: 600 mm

Minor axis: 400 mm 500mm

Page 12 Rev. 00

#### **Device Holder for SAM Twin Phantom**



#### Construction:

In combination with the Twin SAM Phantom V4.0 or Twin SAM, the Mounting Device (made from POM) enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different phantom locations (left head, right head, and flat phantom).

### System Validation Kits for SAM Phantom (V4.0)



**Construction:** 

**Dimensions:** 

Symmetrical dipole with I/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor.

Frequency: 2450, 5300, 5600, 5800 MHz

**Return loss:** > 20 dB at specified validation position **Power capability:** > 100 W (f < 1GHz); > 40 W (f > 1GHz)

D2450V2: dipole length: 51.5 mm; overall height: 290 mm D5GHzV2: dipole length: 20.6 mm; overall height: 300 mm

#### **System Validation Kits for ELI4 phantom**



**Construction:** 

Symmetrical dipole with I/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor.

**Frequency:** 2450, 5300, 5600, 5800 MHz

**Return loss:** > 20 dB at specified validation position **Power capability:** > 100 W (f < 1GHz); > 40 W (f > 1GHz)

**Dimensions:** D2450V2: dipole length: 51.5 mm; overall height: 290 mm D5GHzV2: dipole length: 20.6 mm; overall height: 300 mm

Page 13 Rev. 00

#### 5 **Evaluation Procedures**

#### **Data Evaluation**

Device parameters:

The DASY4/DASY5 post processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters: - Sensitivity Norm<sub>i</sub>,  $a_{i0}$ ,  $a_{i1}$ ,  $a_{i2}$ 

> - Conversion factor ConvF<sub>i</sub> - Diode compression point  $dcp_i$ - Frequency f - Crest factor cf

Media parameters: - Conductivity σ

> - Density ρ

These parameters must be set correctly in the software. They can be found in the component documents or be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DCtransmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

= Compensated signal of channel i with (i = x, y, z)U, = Input signal of channel i (i = x, y, z)

(DASY parameter) cf = Crest factor of exciting field

= Diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

H-field probes:

$$H_i = \sqrt{Vi} \cdot \frac{a_{i10} + a_{i11}f + a_{i12}f^2}{f}$$

= Compensated signal of channel i with (i = x, y, z)

> *Norm*<sub>i</sub> = Sensor sensitivity of channel i (i = x, y, z)

 $\mu V/(V/m)^2$  for E0field Probes

ConvF = Sensitivity enhancement in solution

= Sensor sensitivity factors for H-field probes

f = Carrier frequency (GHz)

Εi = Electric field strength of channel i in V/m

= Magnetic field strength of channel i in A/m Hi

> Page 14 Rev. 00

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in W/kg

 $E_{tot}$  = total field strength in V/m

 $\sigma$  = conductivity in [mho/m] or [Siemens/m]

 $\rho$  = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

The power flow density is calculated assuming the excitation field as a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{377}$$
 or  $P_{pwe} = H_{tot}^2 \cdot 37.7$ 

with  $P_{pwe}$  = Equivalent power density of a plane wave in mW/cm<sup>2</sup>

 $E_{tot}$  = total electric field strength in V/m  $H_{tot}$  = total magnetic field strength in A/m

Page 15 Rev. 00

### **6** SAR Measurement Procedures

### 6.1 Normal SAR Test Procedure

#### • Power Reference Measurement

The reference and drift jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

#### Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in DASY4/DASY5 software can find the maximum locations even in relatively coarse grids. The scan area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom. When the area scan's property sheet is brought-up, the grid resolution has to less than 15 mm by 15 mm at frequency ≤2GHz; the grid resolution has to less than 12mm by 12 mm at frequency between 2GHz to 4GHz; grid resolution has to less than 10 mm by 10 mm at frequency between 4GHz to 6GHz.

According to KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04

	≤ 3 GHz	> 3 GHz	
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	½·δ·ln(2) ± 0.5 mm	
Maximum probe abgle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°	
Maximum area scan spatial resolution: Δxzoom, Δyzoom	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm	
	When the x or y dimension of measurement plane orientati above, the measurement reso corresponding x or y dimension least one measurement point	on, is smaller than the olution must be ≤ the on of the test device with at	

Page 16 Rev. 00

#### Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default zoom scan measures points in accordance with the frequency can be divided into three parts. (1)The zoom scan volume was set to 5x5x7 points at frequency  $\leq$  2GHz. (2) The zoom scan volume was set to 7x7x7 points at frequency between 2GHz to 4GHz (3) The zoom scan volume was set to 7x7x12 points at frequency between 4GHz to 6GHz. The measures points within a cube whose base faces are centered around the maximum found in a preceding area scan job within the same procedure. If the preceding Area Scan job indicates more then one maximum, the number of Zoom Scans has to be enlarged accordingly.

According to KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04

According to NDB 803004 D0	ccording to KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04  ≤ 3 GHz > 3 GHz									
Maximum zoom scan spatia	resolution:	Δxzoom, Δyzoom	≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm	3 – 4 GHz: ≤ 5 mm 4 – 6 GHz: ≤ 4 mm						
	Unifor	rm grid: Δzzoom(n)	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm						
Maximum zoom scan spatial resolution, normal to phantom surface	graded	Δzzoom(1):between 1st two points losest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm						
	grid	Δzzoom(n>1): between subsequent points	≤ 1.5·Δzzoom(n-1)							
Maximum zoom scan volume	х, у, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm							

#### Power Drift Measurement

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. In the properties of the Drift job, the user can specify a limit for the drift and have DASY4/DASY5 software stop the measurements if this limit is exceeded.

#### Z-Scan

The Z Scan job measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. A user can anchor the grid to the current probe location. As with any other grids, the local Z-axis of the anchor location establishes the Z-axis of the grid.

Page 17 Rev. 00

# 7 Measurement Uncertainty

According to KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz section 2.8.2, SAR measurement uncertainty analysis is required in SAR reports only when the highest measured SAR in a frequency band is  $\geq$  1.5 W/kg for 1-g SAR, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approva

Page 18 Rev. 00

# **8** Device Under Test

### 8.1 Wireless Technologies

Wireless technologies	Tx Frequency Bands	Operating mode	Duty Cycle used for testing
MG Fi	2.4GHz Band	802.11b 802.11g 802.11n(HT20) 802.11n(HT40)	100%
Wi-Fi	5GHz Band	802.11a 802.11n(HT20) 802.11n(HT40)	100%
Bluetooth		4.0 LE	N/A

Page 19 Rev. 00

### 8.2 Maximum Tune-up Power

Tolerance (dB): ± 1	.5	RF Output F	ower (dBm)		
Band (GHz)	Mode	Target	Max. tune-up power		
	802.11b	13.5	15.0		
2.4	802.11g	13.5	15.0		
2.4	802.11n HT20	10.5	12.0		
	802.11n HT40	10.5	12.0		
Tolerance (dB): ± 2		RF Output F	ower (dBm)		
Band (GHz)	Mode	Target	Max. tune-up power		
5.2	802.11a	9.0	11.0		
(UNII-1)	802.11n HT20	9.0	11.0		
(01111 1)	802.11n HT40		10.5		
5.3	802.11a	9.0	11.0		
(UNII-2A)	802.11n HT20	9.0	11.0		
(ONII ZA)	802.11n HT40	8.5	10.5		
	802.11a	9.0	11.0		
5.5 (UNII-2C)	802.11n HT20	9.0	11.0		
(OMI Ze)	802.11n HT40	8.5	10.5		
F 0	802.11a	9.0	11.0		
5.8 (UNII-3)	802.11n HT20	9.0	11.0		
(01411-3)	802.11n HT40	8.5	10.5		
	Mode	Max. tune	-up power		
Blue	etooth LE	-1	.0		

Page 20 Rev. 00

#### 8.3 **Simultaneous Transmission**

RF Exposure Condition	Transmit Configurations
	2.4GHz (Chain 0)
	5GHz (Chain 0)
Wi-Fi+BT	Bluetooth(Chain 0)
	2.4GHz(Chain 0)+Bluetooth
	5GHz(Chain 0)+Bluetooth
Note(s):	

- Wi-Fi 2.4GHz and Bluetooth technology can transmit at same time. 1.
- 2. Wi-Fi 5GHz and Bluetooth technology can transmit at same time.
- The ChainO is define as Wi-Fi antenna, and Bluetooth is define as BT antenna. 3.

Page 21 Rev. 00

### 9 Summary of SAR Test Exclusion Configurations

### 9.1 Standalone SAR Test Exclusion Calculations

Since the Dedicated Host Approach is applied, the standalone SAR test exclusion procedure in KDB 447498 section 4.3.1 is applied in conjunction with KDB 616217 section 4.3 to determine the minimum test separation distance:

- 1. According to KDB 447498 Section 4.1 5) if the antenna is at close proximity to user then the outer surface of the DUT should be treated as the radiating surface. The test separation distance is then determined by the smallest distance between the outer surface of the device and the user. For the purposes of this report close proximity has been defined as closer than 50 mm. For antennas <50 mm from the rear or edge the separation distance used for the estimated SAR calculations is 0 mm.
- 2. When the minimum test separation distance is < 5mm, a distance of 5mm is applied to determine SAR test exclusion.
- 3. When the separation distance from the antenna to an adjacent edge is > 5 mm, the actual antenna-to-edge separation distance is applied to determine SAR test exclusion.
- 4. If the antenna to DUT adjacent edge or bottom separation distance >50mm the actual antenna to user separation distance is used to determine SAR exclusion and estimated SAR value.

Refer to Appendix for the specific details on the antenna-to-antenna and antenna-to-edge distances used for test exclusion calculations.

Page 22 Rev. 00

### 9.1.1 SAR Exclusion Calculations for Wi-Fi Antenna < 50mm from the User

According to KDB 447498 v06 in section 4.3.1, if the calculated **threshold value is > 3** then SAR testing is required.

Antenna	Band	Frequency	Output	Power	Separation Distances(mm)			Calculated Threshold Value				Edge2   Edge3   Edge4				
	Dallu	(MHz)	dBm	mW	Rear	Front	Edge1	Edge2	Edge3	Edge4	Rear	Front	Edge1	Edge2	Edge3	Edge4
	2.4GHz	2437	15.0	32	8.8	17.5	40.3	50.3	0.9	0.5	5.7	2.8	1.2	>50mm	55.5	99.9
	5.2GHz	5180	11.0	13	8.8	17.5	40.3	50.3	0.9	0.5	3.4	1.7	0.7	>50mm	32.9	59.2
Wi-Fi Antenna	5.3GHz	5260	11.0	13	8.8	17.5	40.3	50.3	0.9	0.5	3.4	1.7	0.7	>50mm	33.1	59.6
	5.5GHz	5500	11.0	13	8.8	17.5	40.3	50.3	0.9	0.5	3.5	1.7	0.8	>50mm	33.9	61.0
	5.8GHz	5745	11.0	13	8.8	17.5	40.3	50.3	0.9	0.5	3.5	1.8	0.8	>50mm	34.6	62.3
BT Antenna	Bluetooth	2402	-1.0	1	8.8	17.5	31.0	0.8	2.2	54.4	0.2	0.1	0.0	2.1	0.7	>50mm

Page 23 Rev. 00

### 9.1.2 SAR Exclusion Calculations for Wi-Fi Antenna > 50mm from the User

According to KDB 447498 v06, if the calculated Power threshold is less than the output power then SAR testing is required.

Antenna	Band	Frequency	Frequency Output Power			Separation Distances(mm)					Calculated Threshold Value						
Antenna	Barra	7 THE DUTIE	(MHz)	dBm	mW	Rear	Front	Edge1	Edge2	Edge3	Edge4	Rear	Front	Edge1	Edge2	Edge3	Edge4
	2.4GHz	2437	15.0	32	8.8	17.5	40.3	50.3	0.9	5.0	<50mm	<50mm	<50mm	99.1	<50mm	<50mm	
	5.2GHz	5180	11.0	13	8.8	17.5	40.3	50.3	0.9	5.0	<50mm	<50mm	<50mm	68.9	<50mm	<50mm	
Wi-Fi Antenna	5.3GHz	5260	11.0	13	8.8	17.5	40.3	50.3	0.9	5.0	<50mm	<50mm	<50mm	68.4	<50mm	<50mm	
	5.5GHz	5500	11.0	13	8.8	17.5	40.3	50.3	0.9	5.0	<50mm	<50mm	<50mm	67.0	<50mm	<50mm	
	5.8GHz	5745	11.0	13	8.8	17.5	40.3	50.3	0.9	5.0	<50mm	<50mm	<50mm	65.6	<50mm	<50mm	
BT Antenna	Bluetooth	2402	-1.0	1	8.8	17.5	31.0	0.8	2.2	54.4	<50mm	<50mm	<50mm	<50mm	<50mm	140.8	

Page 24 Rev. 00

### 9.1.3 SAR Required Test Configuration

### For Wi-Fi and Bluetooth

Test Configurations	Rear	Edge1	Edge2	Edge3	Edge4
Wi-Fi Main 2.4GHz	YES	No	No	YES	YES
Wi-Fi Main 5.2GHz	YES	No	No	YES	YES
Wi-Fi Main 5.3GHz	YES	No	No	YES	YES
Wi-Fi Main 5.5GHz	YES	No	No	YES	YES
Wi-Fi Main 5.8GHz	YES	No	No	YES	YES
Bluetooth	No	No	No	No	No

### Note(s):

- 1. Yes = SAR is required.
- 2. No = SAR is not required.

Page 25 Rev. 00

### 10 Exposure Limit

(A). Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body Partial-Body Hands, Wrists, Feet and Ankles

0.4 8.0 2.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body Partial-Body Hands, Wrists, Feet and Ankles

0.08 1.6 4.0

NOTE: Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1

gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of

ı cube.

### **Population/Uncontrolled Environments:**

are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

#### **Occupational/Controlled Environments:**

are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

NOTE
GENERAL POPULATION/UNCONTROLLED EXPOSURE
PARTIAL BODY LIMIT
1.6 W/kg

Page 26 Rev. 00

### 11 Tissue Dielectric Properties

### 11.1 Test Liquid Confirmation

#### **Simulating Liquids Parameter Check**

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine of the dielectric parameters are within the tolerances of the specified target values

The relative permittivity and conductivity of the tissue material should be within  $\pm$  5% of the values given in the table below 5% may not be easily achieved at certain frequencies.

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in IEEE 1528 2013 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in IEEE 1528 2013 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in IEEE 1528 2013

Target Frequency	Не	ad	Во	ody
(MHz)	ε <sub>r</sub>	σ(S/m)	ε <sub>r</sub>	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

Page 27 Rev. 00

### 11.2 Typical Composition of Ingredients for Liquid Tissue Phantoms

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients					Frequen	cy (MHz)				
(% by weight)	4!	50	83	835		915		00	2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

alt:  $99^+\%$  Pure Sodium Chloride Sugar:  $98^+\%$  Pure Sucrose Water: De-ionized,  $16~\text{M}\Omega^+$  resistivity HEC: Hydroxy thyl Cellulose DGBE:  $99^+\%$  Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra-pure): Polyethylene glycol mono [4-(1, 1, 3, 3-tetramethylbutyl)phenyl]ether

### Simulating Liquids for 5 GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	78
Mineral oil	11
Emulsifiers	9
Additives and Salt	2

Page 28 Rev. 00

### 11.3 Simulating Liquids Parameter Check Results

Date	Band	Freq(MHz)		Measured		Stan	dard	1	7	Limit(%)
Date	Ballu	rieq(ivinz)	e' (εr)	e''	σ	e' (εr)	σ	e' (εr)	σ	±5
		5180	48.78	17.62	5.07	49.02	5.28	-0.49%	-3.90%	±5
		5200	48.78	17.60	5.09	49.00	5.30	-0.44%	-4.05%	±5
		5220	48.72	17.65	5.12	48.98	5.32	-0.54%	-3.88%	±5
		5240	48.67	17.65	5.14	48.96	5.35	-0.60%	-3.92%	±5
		5260	48.65	17.67	5.16	48.94	5.37	-0.60%	-3.87%	±5
		5280	48.61	17.70	5.19	48.92	5.40	-0.63%	-3.78%	±5
		5300	48.59	17.71	5.21	48.90	5.42	-0.63%	-3.78%	±5
		5320	48.56	17.74	5.24	48.86	5.44	-0.62%	-3.67%	±5
		5500	48.24	17.85	5.45	48.60	5.65	-0.74%	-3.48%	±5
		5520	48.23	17.87	5.48	48.58	5.67	-0.71%	-3.42%	±5
		5540	48.20	17.89	5.51	48.56	5.70	-0.75%	-3.37%	±5
2017/3/13	Body 5000	5560	48.17	17.93	5.54	48.54	5.72	-0.76%	-3.21%	±5
2017/3/13	воау эооо	5580	48.12	17.95	5.57	48.52	5.75	-0.83%	-3.15%	±5
		5600	48.08	17.95	5.58	48.50	5.77	-0.87%	-3.21%	±5
		5620	48.05	17.97	5.61	48.46	5.79	-0.85%	-3.12%	±5
		5640	48.04	17.95	5.62	48.42	5.81	-0.78%	-3.25%	±5
		5660	48.00	17.99	5.66	48.38	5.84	-0.79%	-3.09%	±5
		5680	47.96	18.00	5.68	48.34	5.86	-0.79%	-3.01%	±5
		5700	47.93	18.03	5.71	48.30	5.88	-0.78%	-2.91%	±5
		5745	47.86	18.05	5.76	48.26	5.93	-0.82%	-2.93%	±5
		5765	47.82	18.07	5.79	48.24	5.96	-0.86%	-2.86%	±5
		5785	47.78	18.09	5.81	48.22	5.98	-0.91%	-2.82%	±5
		5805	47.76	18.10	5.84	48.19	6.01	-0.89%	-2.81%	±5
		5825	47.73	18.11	5.86	48.15	6.03	-0.87%	-2.82%	±5
		2412	54.03	14.26	1.91	52.75	1.91	2.42%	-0.17%	±5
		2437	53.92	14.40	1.95	52.72	1.94	2.29%	0.60%	±5
2017/3/14	Body 2450	2442	53.91	14.42	1.96	52.71	1.94	2.28%	0.71%	±5
2017/3/14	50uy 2430	2450	53.90	14.45	1.97	52.70	1.95	2.27%	0.89%	±5
		2462	53.88	14.51	1.98	52.68	1.97	2.27%	0.90%	±5
		2472	53.86	14.54	2.00	52.67	1.98	2.26%	0.82%	±5

Page 29 Rev. 00

## 12 System Performance Check

The system performance check is performed prior to any usage of the system in order to guarantee reproducible results. The system performance check verifies that the system operates within its specifications. The system performance check results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

#### **System Performance Check Measurement Conditions**

- The measurements were performed in the flat section of the SAM twin phantom filled with Body simulating liquid of the following parameters.
- The DASY4/DASY5 system with an E-fileld probe EX3DV4 SN: 3665 was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center
  marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the
  phantom). The standard measuring distance was 15 mm (below 1 GHz) and 10 mm (above 1 GHz) from dipole
  center to the simulating liquid surface.
- The coarse grid with a grid spacing of 10mm was aligned with the dipole.
- Special 7x7x7 fine cube was chosen for cube integration (dx=dy= 5 mm, dz= 5 mm).
- Distance between probe sensors and phantom surface was set to 3.0 mm.
- The dipole input power (forward power) was 100 mW±3%.
- The results are normalized to 1 W input power.

#### **Reference SAR Values for System Performance Check**

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System	Serial No.	Cal. Date	Freq. (MHz)	Target	Target SAR Values (W/kg)				
Dipole	Serial No.	Cal. Date	1164. (171112)	1g/10g	Head	Body			
D2450V2	728	2016/05/24	2450	1g	50.5	50.3			
D2430V2	728	2010/03/24	2430	10g	23.7	23.7			
D5GHzV2	1004	2016/11/18	5300	1g	84.6	79.0			
D3GH2V2	1004	2010/11/18	3300	10g	24.2	22.2			
D5GHzV2	1004	2016/11/18	5600	1g	84.0	78.7			
D3GH2V2	1004	2010/11/18	3000	10g	23.9	22.0			
D5GHzV2	1004	2016/11/18	5800	1g	79.1	75.4			
DOGITZVZ	1004	2010/11/18	3800	10g	22.5	20.8			

Page 30 Rev. 00

### 12.1 System Performance Check Results

Date	9	System Dipol	e	Parameters	Target[M//kg]	Management [M//kg]	Deviation[%]	Limited[%]	
Date	Туре	Serial No.	Liquid	Parameters	Target[W/kg]	Measured [W/kg]	Deviation[%]	Lillitea[/6]	
2017/3/13	D5GHzV2	1004	Body	1g SAR:	79.0	76.4	-3.29	± 5	
2017/3/13	(5.3GHz)	1004	ьоцу	10g SAR:	22.2	22.1	-0.45	± 5	
2017/2/12	D5GHzV2	1004	Body	1g SAR:	78.7	80.9	2.80	± 5	
2017/3/13	(5.6GHz)	1004	войу	10g SAR:	22.0	22.3	1.36	± 5	
2017/3/13	D5GHzV2	1004	Body	1g SAR:	75.4	78.0	3.45	± 5	
2017/3/13	(5.8GHz)	1004	ьоцу	10g SAR:	20.8	21.7	4.33	± 5	
2017/3/14	D2450V2	720	Body	1g SAR:	50.3	52.0	3.38	± 5	
2017/3/14	D243UV2	2450V2 728		10g SAR:	23.7	24.5	3.38	± 5	

Page 31 Rev. 00

### 13 RF Output Power Measurement

According to KDB248227D01 802.11 Wi-Fi SAR V02r02 section 4, the default power measurement procedures are:

- 1) Power must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band.
- 2) Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.
- a) When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.
- b) When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.
- 3) For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured.

Page 32 Rev. 00

### 13.1 Wi-Fi (2.4GHz Band)

Band (GHz)	Mode	Data rate (Mbps)	Ch#	Freq. (MHz)	Avg. Pwr (dBm)	Maximum Tune-up Pwr (dBm)	SAR Test (Yes/No)	Note
			1	2412	14.8	15.0		
	802.11b	1	6	2437	14.8	15.0	Yes	
			11	2462	14.8	15.0		
		1	2412		15.0			
	802.11g	6	6	2437		15.0	No	1
2.4			11	2462		15.0		
2.4	802.11n		1	2412		12.0		
	802.11n HT20	MCS0	6	2437	Not Required	12.0	No	1
	H120		11	2462		12.0		
802.11n		3	2422		12.0			
	MCS0	6	2437		12.0	No	1	
	HT40		9	2452		12.0		

#### Note(s):

Page 33 Rev. 00

<sup>1.</sup> Output Power and SAR is not required for 802.11g/n HT20 HT40 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

### 13.2 Wi-Fi (5GHz Band)

Band	,	Data rate		Freq.	Avg.Pwr	Maximum Tune-up	SAR Test	
(GHz)	Mode	(Mbps)	Ch#	(MHz)	(dBm)	Pwr (dBm)	(Yes/No)	Note
	802.11a	6	36-48	5180-5240	Not Required	11.0	No	2
5.2 (U-NII 1)	802.11n (HT20)	MCS0	36-48	5180-5240	Not Required	11.0	No	2
	802.11n (HT40)	MCS0	38~46	5190~5230	Not Required	10.5	No	2
	802.11a		52	5260	10.7	11.0	Yes	
		6	6	56	5280	10.8	11.0	Yes
5.3	502.11a		60	5300	10.6	11.0	Yes	
(U-NII 2A)			64	5320	10.5	11.0	Yes	
	802.11n (HT20)	MCS0	52-64	5260-5320	Not Required	11.0	No	1
	802.11n (HT40)	MCS0	54~62	5270~5310	Not Required	10.5	No	1

### Note(s):

- 1. Output Power and SAR measurement is not required for 802.11a/n HT20 channels when the specified maximum tune-up powers are the same in 802.11a/n HT20 and the measured SAR is ≤ 1.2 W/Kg.
- 2. When the specified maximum output power is the same for both UNII band I and UNII band 2A, begin SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is
  - 2.1.  $\leq$  1.2 W/kg, SAR is not required for UNII band I.
  - 2.2. > 1.2 W/kg, both bands should be tested independently for SAR.

Page 34 Rev. 00

FCC ID: 2AKOR10101

						Maximum		
Band (GHz)	Mode	Data rate (Mbps)	Ch#	Freq. (MHz)	Avg.Pwr (dBm)	Tune-up Pwr (dBm)	SAR Test (Yes/No)	Note
			100	5500	10.5	11.0	Yes	
			104	5520	10.4	11.0	Yes	
			108	5540	10.4	11.0	Yes	
			112	5560	10.6	11.0	Yes	
			116	5580	10.8	11.0	Yes	
	002.44-		120	5600	10.6	11.0	Yes	
5.5	802.11a	6	124	5620	10.7	11.0	Yes	
(U-NII-2C)			128	5640	10.7	11.0	Yes	
			132	5660 10.7 11.0		11.0	Yes	
			136	5680	10.6	11.0	Yes	
			140	5700	10.7	11.0	Yes	
			144	5720	10.5	11.0	Yes	
	802.11n (HT20)	MCS0	100-144	5500-5720	Not Required	11.0	No	1
	802.11n (HT40)	MCS0	102~134	5510~5670	Not Required	10.5	No	1
			149	5745	10.8	11.0	Yes	1
			153	5765	10.5	11.0	Yes	
	802.11a	6	157	5785	10.6	11.0	Yes	
5.8 (U-NII-3)			161	5805	10.6	11.0	Yes	
			165	5825	10.6	11.0	Yes	
	802.11n (HT20)	MCS0	149-165	5745-5825	Not Required	11.0	No	1
	802.11n (HT40)	MCS0	151~159	5755~5795	Not Required	10.5	No	1

### Note(s):

Page 35 Rev. 00

Report No: T170215D24-SF

<sup>1.</sup> Output Power and SAR measurement is not required for 802.11a/n HT20 channels when the specified maximum tune-up powers are the same in 802.11a/n HT20 and the measured SAR is ≤ 1.2 W/Kg.

### 13.3 Bluetooth

Per exclusion calculations in Section 9, SAR testing for Bluetooth is not required.

Page 36 Rev. 00

### 14 SAR Measurements Results

According to KDB248227D01 802.11 Wi-Fi SAR v02r01, the SAR test reduction procedures are:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ➤ ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is  $\leq$  0.8 W/kg or all required test positions are tested.
  - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
  - When it is unclear, all equivalent conditions must be tested.
- ➤ For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
  - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the Maximum Value of SAR (measured). The position that produced the highest Maximum Value of SAR is considered the worst case position; thus used as the initial test position

Page 37 Rev. 00

### Wi-Fi (2.4GHz Band):

Band		Dist.	Test		Freq.		Power		Zoom Scan	Reported		Plot
(GHz)	Mode	(mm)	Position	Ch#	(MHz)	Chain	Tune up limit	Meas.	1g SAR (W/kg)	SAR (W/kg)	Note	No.
		0	Rear	1	2412	0	15.0	14.8	0.095	0.099	1	
2.4GHz	802.11b	0	Edge3	1	2412	0	15.0	14.8	0.011	0.011	1	
		0	Edge4	1	2412	0	15.0	14.8	0.603	0.631		1

#### Note(s)

Page 38 Rev. 00

<sup>1.</sup> Highest reported SAR is > 0.4 W/kg. Due to the highest reported SAR for this test position, other test positions in this exposure condition were evaluated until a SAR ≤ 0.8 W/kg was reported.

### Wi-Fi (5 GHz Band):

Band		Dist.	Test	Ch#	Freq. (MHz)	Chain	Power (dBm)		Peak SAR
(GHz)	Mode	(mm)					Tune up limit	Meas.	of Area Scan
5.3 (U-NII-2A)	802.11a	0	Edge3	56	5280	0	11.0	10.8	0.049
5.8 (U-NII-3)	802.11a	0	Edge3	149	5745	0	11.0	10.8	0.013

### Note(s):

The maximum Peak SAR location of the Area Scan was chosen to perform the Zoom Scan in accordance with KDB 248227 D01. The Reported SAR value was used to determine whether other channels needed testing.

Page 39 Rev. 00

Band		Dist.	Test		Freq.		Power	(dBm)	Meas.	Reported		Plot
(GHz)	Mode	(mm)	Position	Ch#	Ch# (MHz) C		Tune up limit	Meas.	1g SAR (W/kg)	SAR (W/kg)	Note	No.
5.3		0	Rear	56	5280	0	11.0	10.8	0.168	0.178	1	
(U-NII-2A)		0	Edge 4	56	5280	0	11.0	10.8	0.590	0.618		2
	802.11a	0	Rear	116	5580	0	11.0	10.8	0.354	0.371	1	
		0	Edge3	116	5580	0	11.0	10.8	0.018	0.018	1	
5.5 (U-NII-2C)		0	Edge 4	116	5580	0	11.0	10.8	0.909	0.952		
		0	Edge 4	140	5700	0	11.0	10.7	0.524	0.561	2	
		0	Edge 4	116	5580	0	11.0	10.8	0.985	1.031	3	3
5.8		0	Rear	149	5745	0	11.0	10.8	0.138	0.145	1	
(U-NII-3)		0	Edge 4	149	5745	0	11.0	10.8	0.384	0.402		4

#### Note(s)

- 1. Highest reported SAR is > 0.4 W/kg. Due to the highest reported SAR for this test position, other test positions in this exposure condition were evaluated until a SAR ≤ 0.8 W/kg was reported.
- 2. Highest reported SAR is > 0.8 W/kg. Added second highest power channel for this test position
- 3. Repeated measurements are required only when the measured SAR is ≥0.80 W/kg. If the measured SAR values are < 1.45 W/kg with ≤20% variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. (Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04)
  - 3.1 Original SAR = 0.909 W/kg, therefore second times repeat SAR is required.
  - 3.2 Repeat SAR = 0.985 W/kg < 1.45W/kg
  - 3.3 SAR variation= -8.36% < 20%

Page 40 Rev. 00

### 15 Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance v06, introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / R_i$$

Where:

**SAR**<sub>1</sub> is the highest Reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

**SAR<sub>2</sub>** is the highest Reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

 $\mathbf{R}_i$  is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of  $[(x_1-x_2)^2+(y_1-y_2)^2+(z_1-z_2)^2]$ 

A new threshold of 0.04 is also introduced in the KDB. Thus, in order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / R_i \le 0.04$$

Page 41 Rev. 00

### 15.1 Estimated SAR for Simultaneous Transmission SAR Analysis

#### **Considerations for SAR estimation**

- 1. When standalone SAR test exclusion applies, standalone SAR must also be estimated to determine simultaneous transmission SAR test exclusion.
- 2. Dedicated Host Approach criteria for SAR test exclusion is likewise applied to SAR estimation, with certain distinctions between test exclusion and SAR estimation:
  - When the separation distance from the antenna to an adjacent edge is ≤ 5 mm, a distance of 5 mm is applied for SAR estimation; this is the same between test exclusion and SAR estimation calculations.
  - When the separation distance from the antenna to an adjacent edge is > 5 mm but ≤ 50 mm, the actual antenna-to-edge separation distance is applied for SAR estimation.
  - When the minimum test separation distance is > 50 mm, the estimated SAR value is 0.4 W/kg

#### 15.1.1 Estimated SAR for Bluetooth

According to section 9, the Bluetooth must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- (max. power of channel, including tune-up tolerance, mW) / (min. test separation distance, mm)]·[Vf<sub>(GHz)</sub>/x] W/kg for test separation distances ≤ 50 mm; where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Band	Frequency	Output	Power	Separation Distances(mm)					Estimated 1-g SAR (W/Kg)						
Ballu	(MHz)	dBm	mW	Rear	Bottom	Edge1	Edge2	Edge3	Edge4	Rear	Bottom	Edge1	Edge2	Edge3	Edge4
2.4GHz	2437	15.0	32	8.8	17.5	40.3	50.3	0.9	0.5	Measure	0.381	0.165	0.400	Measure	Measure
5.3GHz	5290	11.0	13	8.8	17.5	40.3	50.3	0.9	0.5	Measure	0.228	0.099	0.400	Measure	Measure
5.5GHz	5690	11.0	13	8.8	17.5	40.3	50.3	0.9	0.5	Measure	0.236	0.103	0.400	Measure	Measure
5.8GHz	5755	11.0	13	8.8	17.5	40.3	50.3	0.9	0.5	Measure	0.238	0.103	0.400	Measure	Measure
Bluetooth	2402	-1.0	1	8.8	17.5	31.0	0.8	2.2	54.4	0.023	0.012	0.007	0.258	0.094	0.400

Page 42 Rev. 00

### 15.2 Sum of the SAR for Simultaneous Transmission Analysis

### 15.2.1 Sum of the SAR for Wi-Fi & Bluetooth

. Test		Simulataneous Tra	∑ 1-g SAR	SPLSR		
Band	Position	Wi-Fi Bluetooth		(W/kg)	(Yes/No)	
2.4GHz	Rear	0.099	0.023	0.122	No	
2.4GHz	Edge3	0.011	0.094	0.105	No	
2.4GHz	Edge4	0.631	0.400	1.031	No	

### Note(s):

As the Sum of the SAR is less than 1.6W/Kg, so SPLSR is not required.

. Test		Simulataneous Tra	∑ 1-g SAR	SPLSR		
Band	Position	Wi-Fi Bluetooth		(W/kg)	(Yes/No)	
5GHz	Rear	0.371	0.023	0.394	No	
5GHz	Edge3	0.018	0.094	0.112	No	
5GHz	Edge4	1.031	0.400	1.431	No	

### Note(s):

As the Sum of the SAR is less than 1.6W/Kg, so SPLSR is not required.

Page 43 Rev. 00

# 16 Equipment List & Calibration Status

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Cycle(year)	Calibration Due
S-Parameter Network Analyzer	Agilent	E5071C	MY46107234	1	2017/10/18
Electronic Probe kit	Hewlett Packard	85070D	N/A	N/A	N/A
Power Meter	Agilent	4416	GB41291611	1	2017/08/30
Power Sensor	Agilent	8481H	MY41091956	1	2017/08/30
Data Acquisition Electronics (DAE)	SPEAG	DAE4	558	1	2017/07/21
Dosimetric E-Field Probe	SPEAG	EX3DV4	3554	1	2017/09/28
2450 MHz System Validation Dipole	SPEAG	D2450V2	728	1	2017/05/23
5GHz System Validation Dipole	SPEAG	D5GHzV2	1004	1	2017/11/17
Robot	Staubli	RX90L	F02/5T69A1/A/01	N/A	N/A
Amplifier	Mini-Circuit	ZVE-8G	665500309	N/A	N/A
Amplifier	Mini-Circuit	ZHL-1724HLN	D072602#2	N/A	N/A
Thermometer	Comet	\$3120	12932714	1	2018/02/23

Page 44 Rev. 00

### 17 Facilities

All measurement facilities used to collect the measurement data are located at
No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang, Taoyuan Hsien, Taiwan, R.O.C
No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)
No. 199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

### 18 Reference

- [1] Federal Communications Commission, \Report and order: Guidelines for evaluating the environ-mental effects of radiofrequency radiation", Tech. Rep. FCC 96-326, FCC, Washington, D.C. 20554, 1996.
- [2] David L. Means Kwok Chan, Robert F. Cleveland, \Evaluating compliance with FCC guidelines for human exposure to radiofrequency electromagnetic fields", Tech. Rep., Federal Communication Commission, O\_ce of Engineering & Technology, Washington, DC, 1997.
- [3] Thomas Schmid, Oliver Egger, and Niels Kuster, \Automated E-\_eld scanning system for dosimetric assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp. 105{113, Jan. 1996.
- [4] Niels Kuster, Ralph K.astle, and Thomas Schmid, \Dosimetric evaluation of mobile communications equipment with known precision", IEICE Transactions on Communications, vol. E80-B, no. 5, pp. 645{652, May 1997.
- [5] CENELEC, \Considerations for evaluating of human exposure to electromagnetic fields (EMFs) from mobile telecommunication equipment (MTE) in the frequency range 30MHz 6GHz", Tech. Rep., CENELEC, European Committee for Electrotechnical Standardization, Brussels, 1997.
- [6] ANSI, ANSI/IEEE C95.1-2005: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.
- [7] Katja Pokovic, Thomas Schmid, and Niels Kuster, \Robust setup for precise calibration of E-\_eld probes in tissue simulating liquids at mobile communications frequencies", in ICECOM \_ 97, Dubrovnik, October 15{17, 1997, pp. 120{124.
- [8] Katja Pokovic, Thomas Schmid, and Niels Kuster, \E-\_eld probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23{25 June, 1996, pp. 172{175.
- [9] Volker Hombach, Klaus Meier, Michael Burkhardt, Eberhard K. uhn, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 900 MHz", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1865{1873, Oct. 1996.
- [10] Klaus Meier, Ralf Kastle, Volker Hombach, Roger Tay, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 1800 MHz", IEEE Transactions on Microwave Theory and Techniques, Oct. 1997, in press.
- [11] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [12] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recepies in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992. Dosimetric Evaluation of Sample device, month 1998 9
- [13] NIS81 NAMAS, \The treatment of uncertainty in EMC measurement", Tech. Rep., NAMAS Executive, National Physical Laboratory, Teddington, Middlesex, England, 1994.
- [14] Barry N. Taylor and Christ E. Kuyatt, \Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994. Dosimetric Evaluation of Sample device, month 1998 10

Page 45 Rev. 00

### 19 Attachments

Exhibit	Content			
1	System Performance Check Plots			
2	AR Test Data Plots			
3	SAR Equipment calibration report			
4	T170215D24-SF PHOTOs			

**END OF REPORT** 

Page 46 Rev. 00