

FCC Measurement/Technical Report on

LC8 DASHBOARD

FCC ID: 2AKP9-LC8CLUSTER1

IC: 22273-LC8CLUSTER1

Test Report Reference: MDE_BOSCH_1629_FCCa_rev1

Test Laboratory:

7layers GmbH
Borsigstrasse 11
40880 Ratingen
Germany



Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7layers GmbH

Borsigstraße 11
40880 Ratingen, Germany
T +49 (0) 2102 749 0
F +49 (0) 2102 749 350

Geschäftsführer/

Managing Directors:
Frank Spiller
Bernhard Retka
Alexandre Norré-Oudard

Registergericht/registered:

Düsseldorf HRB 75554
USt-Id.-Nr./VAT-No. DE203159652
Steuer-Nr./TAX-No. 147/5869/0385

a Bureau Veritas
Group Company

www.7layers.com

Table of Contents

1.1	Applied Standards	3
1.2	FCC-IC Correlation Table	4
1.3	Measurement Summary / Signatures	5
2	Administrative Data	10
2.1	Testing Laboratory	10
2.2	Project Data	10
2.3	Applicant Data	10
2.4	Manufacturer Data	10
3	Test object Data	11
3.1	General EUT Description	11
3.2	EUT Main components	12
3.3	Ancillary Equipment	13
3.4	Auxiliary Equipment	13
3.5	EUT Setups	13
3.6	Operating Modes	14
3.7	Product labelling	14
4	Test Results	15
4.1	Occupied Bandwidth (6 dB)	15
4.2	Occupied Bandwidth (99%)	18
4.3	Peak Power Output	20
4.4	Spurious RF Conducted Emissions	25
4.5	Transmitter Spurious Radiated Emissions	27
4.6	Band Edge Compliance Conducted	35
4.7	Band Edge Compliance Radiated	38
4.8	Power Density	41
5	Test Equipment	43
6	Antenna Factors, Cable Loss and Sample Calculations	46
6.1	LISN R&S ESH3-Z5 (150 kHz – 30 MHz)	46
6.2	Antenna R&S HFH2-Z2 (9 kHz – 30 MHz)	47
6.3	Antenna R&S HL562 (30 MHz – 1 GHz)	48
6.4	Antenna R&S HF907 (1 GHz – 18 GHz)	49
6.5	Antenna EMCO 3160-09 (18 GHz – 26.5 GHz)	50
7	Setup Drawings	51
8	Measurement Uncertainties	52
9	Photo Report	52

Applied Standards and Test Summary

1.1 APPLIED STANDARDS

Type of Authorization

Certification for an Intentional Radiator.

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15 (10-1-15 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz

Note 1: (DTS Equipment)

The tests were selected and performed with reference to the FCC Public Notice "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247, 558074 D01 DTS Meas Guidance v03r05, 2016-04-08". ANSI C63.10-2013 is applied.

Summary Test Results:

The EUT complied with all performed tests as listed in chapter 1.3 Measurement Summary / Signatures.

1.2 FCC-IC CORRELATION TABLE

**Correlation of measurement requirements for
DTS (e.g. WLAN 2.4 GHz, BT LE) equipment
from
FCC and IC**

DTS equipment

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§ 15.207	RSS-Gen Issue 4: 8.8
Occupied bandwidth	§ 15.247 (a) (2)	RSS-247 Issue 1: 5.2 (1)
Peak conducted output power	§ 15.247 (b) (3), (4)	RSS-247 Issue 1: 5.4 (4)
Transmitter spurious RF conducted emissions	§ 15.247 (d)	RSS-Gen Issue 4: 6.13 / 8.9/8.10; RSS-247 Issue 1: 5.5
Transmitter spurious radiated emissions	§ 15.247 (d); § 15.209 (a)	RSS-Gen Issue 4: 6.13 / 8.9/8.10; RSS-247 Issue 1: 5.5
Band edge compliance	§ 15.247 (d)	RSS-247 Issue 1: 5.5
Power density	§ 15.247 (e)	RSS-247 Issue 1: 5.2 (2)
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 4: 8.3
Receiver spurious emissions	-	-

1.3 MEASUREMENT SUMMARY / SIGNATURES

47 CFR CHAPTER I FCC PART 15 Subpart C §15.247

§ 15.247 (a) (2)

Occupied Bandwidth (6 dB)

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode

Radio Technology, Operating Frequency

	Setup	FCC	IC
WLAN b, high	S01_AD01	Passed	Passed
WLAN b, low	S01_AD01	Passed	Passed
WLAN b, mid	S01_AD01	Passed	Passed
WLAN g, high	S01_AD01	Passed	Passed
WLAN g, low	S01_AD01	Passed	Passed
WLAN g, mid	S01_AD01	Passed	Passed
WLAN n 20 MHz, high	S01_AD01	Passed	Passed
WLAN n 20 MHz, low	S01_AD01	Passed	Passed
WLAN n 20 MHz, mid	S01_AD01	Passed	Passed

47 CFR CHAPTER I FCC PART 15 Subpart C §15.247

-

Occupied Bandwidth (99%)

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode

Radio Technology, Operating Frequency

	Setup	FCC	IC
WLAN b, high	S01_AD01	N/A	Passed
WLAN b, low	S01_AD01	N/A	Passed
WLAN b, mid	S01_AD01	N/A	Passed
WLAN g, high	S01_AD01	N/A	Passed
WLAN g, low	S01_AD01	N/A	Passed
WLAN g, mid	S01_AD01	N/A	Passed
WLAN n 20 MHz, high	S01_AD01	N/A	Passed
WLAN n 20 MHz, low	S01_AD01	N/A	Passed
WLAN n 20 MHz, mid	S01_AD01	N/A	Passed

47 CFR CHAPTER I FCC PART 15 Subpart C
§15.247
§ 15.247 (b) (3)
Peak Power Output

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode	Setup	FCC	IC
Radio Technology, Operating Frequency, Measurement method			
WLAN b, high, conducted	S01_AD01	Passed	Passed
	S01_AO01	Passed	Passed
WLAN b, low, conducted	S01_AD01	Passed	Passed
	S01_AO01	Passed	Passed
WLAN b, mid, conducted	S01_AD01	Passed	Passed
	S01_AO01	Passed	Passed
WLAN g, high, conducted	S01_AD01	Passed	Passed
	S01_AO01	Passed	Passed
WLAN g, low, conducted	S01_AD01	Passed	Passed
	S01_AO01	Passed	Passed
WLAN g, mid, conducted	S01_AD01	Passed	Passed
	S01_AO01	Passed	Passed
WLAN n 20 MHz, high, conducted	S01_AD01	Passed	Passed
	S01_AO01	Passed	Passed
WLAN n 20 MHz, low, conducted	S01_AD01	Passed	Passed
	S01_AO01	Passed	Passed
WLAN n 20 MHz, mid, conducted	S01_AD01	Passed	Passed
	S01_AO01	Passed	Passed

47 CFR CHAPTER I FCC PART 15 Subpart C
§15.247
§ 15.247 (d)
Spurious RF Conducted Emissions

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode	Setup	FCC	IC
Radio Technology, Operating Frequency			
WLAN b, high	S01_AD01	Passed	Passed
WLAN b, low	S01_AD01	Passed	Passed
WLAN b, mid	S01_AD01	Passed	Passed
WLAN g, high	S01_AD01	Passed	Passed
WLAN g, low	S01_AD01	Passed	Passed
WLAN g, mid	S01_AD01	Passed	Passed
WLAN n 20 MHz, high	S01_AD01	Passed	Passed
WLAN n 20 MHz, low	S01_AD01	Passed	Passed
WLAN n 20 MHz, mid	S01_AD01	Passed	Passed

47 CFR CHAPTER I FCC PART 15 Subpart C
§15.247
§ 15.247 (d)

Transmitter Spurious Radiated Emissions

The measurement was performed according to ANSI C63.10

Final Result
OP-Mode

Radio Technology, Operating Frequency, Measurement range

WLAN b, high, 1 GHz - 26 GHz

Setup
FCC
IC

S01_AF01

Passed

Passed

WLAN b, high, 30 MHz - 1 GHz

S01_AN01

Passed

Passed

WLAN b, low, 1 GHz - 26 GHz

S01_AB01

Passed

Passed

WLAN b, low, 30 MHz - 1 GHz

S01_AN01

Passed

Passed

WLAN b, mid, 1 GHz - 26 GHz

S01_AF01

Passed

Passed

WLAN b, mid, 30 MHz - 1 GHz

S01_AB01

Passed

Passed

WLAN b, mid, 9 kHz - 30 MHz

S01_AB01

Passed

Passed

WLAN g, high, 1 GHz - 26 GHz

S01_AB01

Passed

Passed

WLAN g, low, 1 GHz - 26 GHz

S01_AB01

Passed

Passed

WLAN g, mid, 1 GHz - 26 GHz

S01_AB01

Passed

Passed

WLAN n 20 MHz, high, 1 GHz - 26 GHz

S01_AB01

Passed

Passed

WLAN n 20 MHz, low, 1 GHz - 26 GHz

S01_AB01

Passed

Passed

WLAN n 20 MHz, mid, 1 GHz - 26 GHz

S01_AB01

Passed

Passed

47 CFR CHAPTER I FCC PART 15 Subpart C
§ 15.247 (d)
§15.247

Band Edge Compliance Conducted

The measurement was performed according to ANSI C63.10

Final Result
OP-Mode

Radio Technology, Operating Frequency, Band Edge

WLAN b, high, high

Setup
FCC
IC

S01_AD01

Passed

Passed

WLAN b, low, low

S01_AD01

Passed

Passed

WLAN g, high, high

S01_AD01

Passed

Passed

WLAN g, low, low

S01_AD01

Passed

Passed

WLAN n 20 MHz, high, high

S01_AD01

Passed

Passed

WLAN n 20 MHz, low, low

S01_AD01

Passed

Passed

47 CFR CHAPTER I FCC PART 15 Subpart C
§15.247
§ 15.247 (d)

Band Edge Compliance Radiated

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode	Setup	FCC	IC
Radio Technology, Operating Frequency, Band Edge			
WLAN b, high, high	S01_AF01	Passed	Passed
WLAN g, high, high	S01_AN01	Passed	Passed
WLAN n 20 MHz, high, high	S01_AF01	Passed	Passed
	S01_AN01	Passed	Passed
	S01_AF01	Passed	Passed
	S01_AN01	Passed	Passed

47 CFR CHAPTER I FCC PART 15 Subpart C
§15.247
§ 15.247 (e)

Power Density

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode	Setup	FCC	IC
Radio Technology, Operating Frequency			
WLAN b, high	S01_AD01	Passed	Passed
WLAN b, low	S01_AD01	Passed	Passed
WLAN b, mid	S01_AD01	Passed	Passed
WLAN g, high	S01_AD01	Passed	Passed
WLAN g, low	S01_AD01	Passed	Passed
WLAN g, mid	S01_AD01	Passed	Passed
WLAN n 20 MHz, high	S01_AD01	Passed	Passed
WLAN n 20 MHz, low	S01_AD01	Passed	Passed
WLAN n 20 MHz, mid	S01_AD01	Passed	Passed

N/A: Not applicable

N/P: Not performed

After initial testing was complete, the Hard- and Software of the EUT was modified by the applicant. According to the applicant, there were no changes in relation to the transmitter hardware. See additional document "LC8 DASHBOARD HW502toHW602.pdf" for changes made.

Due to this only Spot Checks have been performed with the modified version of the EUT for test cases Peak Power Output, Transmitter Spurious Radiated Emissions and Band Edge Compliance Radiated. Since the conducted Peak Power results showed similar signal shape and lower power, no further conducted testing was performed.

Revision History

Report version control			
Version	Release date	Change Description	Version validity
initial	2017-01-23	--	invalid
rev1	2017-02-08	Changed name and type of EUT, corrected postcode of applicant, corrected test period, changed product description, changed note in regards to HW change	valid

(responsible for accreditation scope)
Dipl.-Ing. Marco Kullik

(responsible for testing and report)
Dipl.-Ing. Daniel Gall

2 ADMINISTRATIVE DATA

2.1 TESTING LABORATORY

Company Name: 7layers GmbH

Address: Borsigstr. 11
40880 Ratingen
Germany

This facility has been fully described in a report submitted to the FCC and accepted under the registration number 96716.

This facility has been fully described in a report submitted to the IC and accepted under the registration number: Site# 3699A-1.

The test facility is also accredited by the following accreditation organisation:

Laboratory accreditation no: DAkkS D-PL-12140-01-00

Responsible for accreditation scope: Dipl.-Ing. Marco Kullik

Report Template Version: 2016-06-07

2.2 PROJECT DATA

Responsible for testing and report: Dipl.-Ing. Daniel Gall

Employees who performed the tests: documented internally at 7Layers

Date of Report: 2017-02-08

Testing Period: 2016-11-15 to 2017-01-18

2.3 APPLICANT DATA

Company Name: Robert Bosch GmbH

Address: Daimlerstraße 6
71229 Leonberg
Germany

Contact Person: Mr. Daniel Beurer

2.4 MANUFACTURER DATA

Company Name: KTM AG

Address: Stallhofner Straße 3
5230 Mattighofen
Austria

Contact Person: Mr. Roeck Vitalis

3 TEST OBJECT DATA

3.1 GENERAL EUT DESCRIPTION

Kind of Device product description	Motorbike dashboard with integrated WLAN and Bluetooth.
Product name	LC8 DASHBOARD
Type	LC8 DASHBOARD
Declared EUT data by the supplier	
Voltage Type	DC
Voltage Level	DC 13.0 V
Tested Modulation Type	WLAN: DBPSK; OFDM:BPSK; OFDM:64-QAM
General product description	The EUT is a motorbike dashboard with integrated BT and WLAN
Specific product description for the EUT	<p>The EUT is equipped with two modules. One module with Bluetooth technology only and one with Bluetooth and WLAN technology.</p> <p>The device will support WLAN modes b/g/n 20MHz bandwidth on channels 1 to 11 and Bluetooth classic.</p> <p>There are no changes in this regard between the two tested HW and SW versions.</p>
The EUT provides the following ports:	<p>Enclosure</p> <p>Cable Harness consisting of:</p> <p>USB shielded,</p> <p>Handlebar switch unshielded,</p> <p>ELOCK LED unshielded,</p> <p>DC supply unshielded,</p> <p>CAN unshielded,</p> <p>Ignition switch unshielded,</p> <p>Security alarm unshielded,</p> <p>MIL indicator unshielded,</p> <p>Ambient temperature sensor unshielded.</p> <p>length during testing: 1.92 m</p>
Tested datarates	<p>WLAN: mode b 1Mbps, mode g 6 Mbps, mode n 72.2 Mbps</p> <p>All tests were performed in local TX mode, set with special software provided by the applicant.</p>

The main components of the EUT are listed and described in chapter 3.2 EUT Main components.

3.2 EUT MAIN COMPONENTS

Sample Name	Sample Code	Description
DE1050009ad01	ad01	Sample for conducted testing
Sample Parameter	Value	
Integral Antenna	deactivated	
Serial No.	#004	
HW Version	HW 502	
SW Version	SWP 032.33	
Comment		

Sample Name	Sample Code	Description
DE1050009ab01	ab01	Sample for radiated testing
Sample Parameter	Value	
Integral Antenna	BT only module: 3.01 dBi, BT+WLAN module: 2.42 dBi	
Serial No.	#002	
HW Version	HW 502	
SW Version	SWP 032.33	
Comment		

Sample Name	Sample Code	Description
DE1050009af01	af01	Sample for radiated testing
Sample Parameter	Value	
Integral Antenna	BT only module: 3.01 dBi, BT+WLAN module: 2.42 dBi	
Serial No.	#006	
HW Version	HW 502	
SW Version	SWP 032.33	
Comment		

Sample Name	Sample Code	Description
DE1050009an02	an02	Sample modified Hard- and Software for radiated testing
Sample Parameter	Value	
Integral Antenna	BT only module: 3.01 dBi, BT+WLAN module: 2.42 dBi	
Serial No.	#011	
HW Version	HW 602	
SW Version	SWP 033.33	
Comment		

Sample Name	Sample Code	Description
DE1050009ao02	ao02	Sample modified Hard- and Software for conducted testing
Sample Parameter	Value	
Integral Antenna	deactivated	
Serial No.	#010	
HW Version	HW 602	
SW Version	SWP 033.33	
Comment		

NOTE: The short description is used to simplify the identification of the EUT in this test report.

3.3 ANCILLARY EQUIPMENT

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Device	Details (Manufacturer, Type Model, OUT Code)	Description
-	-	-

3.4 AUXILIARY EQUIPMENT

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it.

But nevertheless Auxiliary Equipment can influence the test results.

Device	Details (Manufacturer, HW, SW, S/N)	Description
DE1050009AE01	Drew Technologies, -, -, 002241	USB - CAN Adapter
DE1050009AE04	Robert Bosch Elektronik GmbH, -, -, 3217	Control Box KTM

3.5 EUT SETUPS

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup	Combination of EUTs	Description and Rationale
S01_AD01	DE1050009ad01, DE1050009AE04, DE1050009AE01,	Conducted Setup #01
S01_AB01	DE1050009ab01, DE1050009AE04, DE1050009AE01,	Radiated Setup #01
S01_AF01	DE1050009af01, DE1050009AE04, DE1050009AE01,	Radiated Setup #02
S01_AN01	DE1050009an02, DE1050009AE04	Radiated Setup for changed HW / SW
S01_AO01	DE1050009ao02, DE1050009AE04, DE1050009AE01	Conducted Setup for changed HW / SW

3.6 OPERATING MODES

This chapter describes the operating modes of the EUTs used for testing.

3.6.1 TEST CHANNELS

20 MHz Test Channels:
Channel:
Frequency [MHz]

Band:		
2.4 GHz ISM		
2400 - 2483.5 MHz		
low	mid	high
1	6	11
2412	2437	2462

3.7 PRODUCT LABELLING

3.7.1 FCC ID LABEL

Please refer to the documentation of the applicant.

3.7.2 LOCATION OF THE LABEL ON THE EUT

Please refer to the documentation of the applicant.

4 TEST RESULTS

4.1 OCCUPIED BANDWIDTH (6 DB)

Standard **FCC Part 15 Subpart C**

The test was performed according to:

ANSI C63.10

4.1.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (smallest) emission bandwidth.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Span: 30 / 50 MHz (for 20 / 40 MHz nominal bandwidth)
- Trace: Maxhold
- Sweeps: 2000
- Sweptime: 7.5 ms
- Detector: Peak

4.1.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (a) (2)

Systems using digital modulation techniques may operate in the 902-928 MHz and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

4.1.3 TEST PROTOCOL

Ambient temperature: 23°C
 Air Pressure: 1017hPa
 Humidity: 43%
 WLAN b-Mode; 20 MHz; 1 Mbit/s

Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	10.1	0.5	9.6
	6	2437	10.2	0.5	9.7
	11	2462	10.1	0.5	9.6

WLAN g-Mode; 20 MHz; 6 Mbit/s

Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	16.4	0.5	15.9
	6	2437	16.2	0.5	15.7
	11	2462	16.4	0.5	15.9


WLAN n-Mode; 20 MHz; 72.2 Mbit/s

Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	17.2	0.5	16.7
	6	2437	17.1	0.5	16.6
	11	2462	17.4	0.5	16.9

Remark: Please see next sub-clause for the measurement plot.

4.1.4MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = WLAN b, Operating Frequency = low

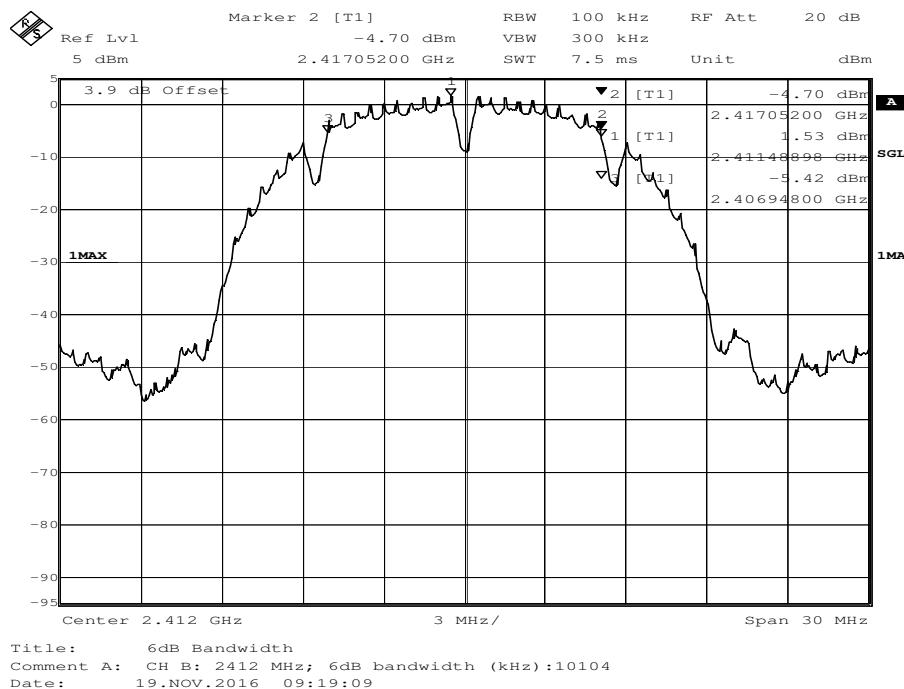

4.1.5TEST EQUIPMENT USED

Regulatory Bluetooth RF Test Solution

4.2 OCCUPIED BANDWIDTH (99%)

Standard **FCC Part 15 Subpart C**

The test was performed according to:
 ANSI C63.10

4.2.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.
 Analyzer settings:

- Resolution Bandwidth (RBW): 500 kHz
- Video Bandwidth (VBW): 2000 kHz
- Span: 50 MHz
- Trace: Maxhold
- Sweeps: 2000
- Sweptime: 20 ms
- Detector: Sample

The 99 % measurement function of the spectrum analyser function was used to determine the 99 % bandwidth.

4.2.2 TEST REQUIREMENTS / LIMITS

No applicable limit.

4.2.3 TEST PROTOCOL

Ambient temperature: 23°C
 Air Pressure: 1017hPa
 Humidity: 43%
 WLAN b-Mode; 20 MHz; 1 Mbit/s

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	1	2412	13.427
	6	2437	13.427
	11	2462	13.427

WLAN g-Mode; 20 MHz; 6 Mbit/s

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	1	2412	17.134
	6	2437	17.134
	11	2462	17.134


WLAN n-Mode; 20 MHz; 72.2 Mbit/s

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	1	2412	17.936
	6	2437	17.936
	11	2462	17.936

Remark: Please see next sub-clause for the measurement plot.

4.2.4MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = WLAN n 20 MHz, Operating Frequency = mid

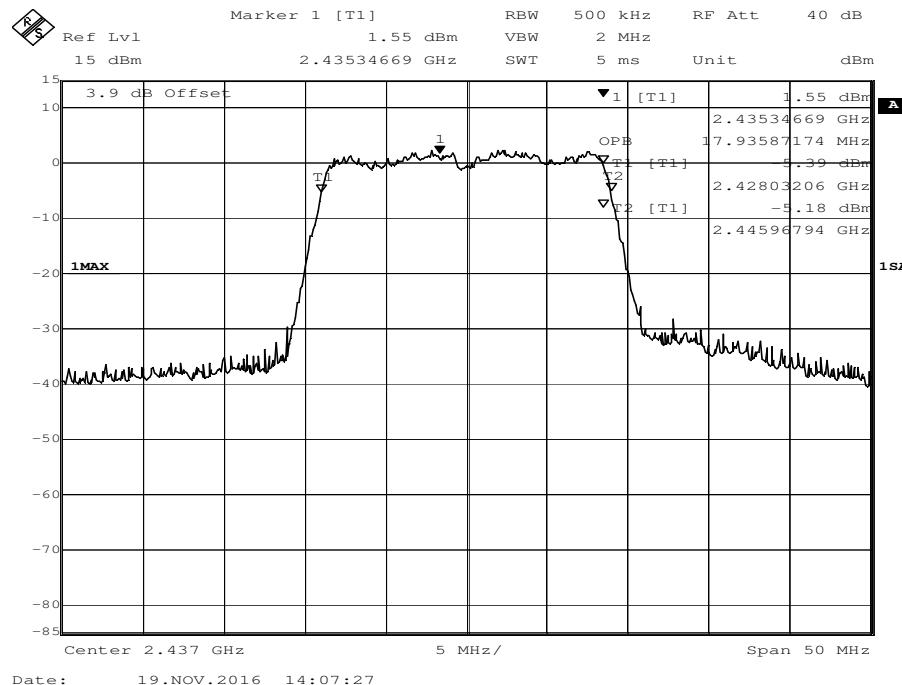

4.2.5TEST EQUIPMENT USED

Regulatory Bluetooth RF Test Solution

4.3 PEAK POWER OUTPUT

Standard **FCC Part 15 Subpart C**

The test was performed according to:
ANSI C63.10

4.3.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the output power measurements. The results recorded were measured with the modulation which produces the worst-case (highest) output power. The reference level of the spectrum analyzer was set higher than the output power of the EUT.

The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 1 MHz
- Video Bandwidth (VBW): 3 MHz
- Trace: Maxhold
- Sweptime: coupled
- Detector: Peak

The channel power function of the spectrum analyser was used (Used channel bandwidth = DTS bandwidth)

4.3.2 TEST REQUIREMENTS / LIMITS

DTS devices:

FCC Part 15, Subpart C, §15.247 (b) (3)

For systems using digital modulation techniques in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands: 1 watt.

==> Maximum conducted peak output power: 30 dBm (excluding antenna gain, if antennas with directional gains that do not exceed 6 dBi are used).

Frequency Hopping Systems:

FCC Part 15, Subpart C, §15.247 (b) (1)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

FCC Part 15, Subpart C, §15.247 (b) (2)

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW)

4.3.3 TEST PROTOCOL

Ambient temperature: 23°C
 Air Pressure: 1017hPa
 Humidity: 43%

Results Setup S01_AD01
 WLAN b-Mode; 20 MHz; 1 Mbit/s

Channel No.	Frequency [MHz]	Peak Power Hardware HW 502[dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	15.2	30.0	14.8
6	2437	15.2	30.0	14.8
11	2462	14.3	30.0	15.7

Results Setup S01_AO01

Peak Power Hardware HW 602[dBm]	Margin to Limit [dB]
14.2	15.8
13.6	16.4
13.8	16.2

WLAN g-Mode; 20 MHz; 6 Mbit/s

Channel No.	Frequency [MHz]	Peak Power Hardware HW 502[dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	17.6	30.0	12.4
6	2437	17.5	30.0	12.5
11	2462	16.9	30.0	13.1

Peak Power Hardware HW 602[dBm]	Margin to Limit [dB]
16.0	14.0
16.2	13.8
16.3	13.7

WLAN n-Mode; 20 MHz; 72.2 Mbit/s



Channel No.	Frequency [MHz]	Peak Power Hardware HW 502[dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	17.5	30.0	12.5
6	2437	17.5	30.0	12.5
11	2462	17.1	30.0	12.9

Peak Power Hardware HW 602[dBm]	Margin to Limit [dB]
16.2	13.8
15.9	14.1
16.1	13.9

Remark: Please see next sub-clause for the measurement plot.


4.3.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = WLAN b, Operating Frequency = low, Measurement method = conducted

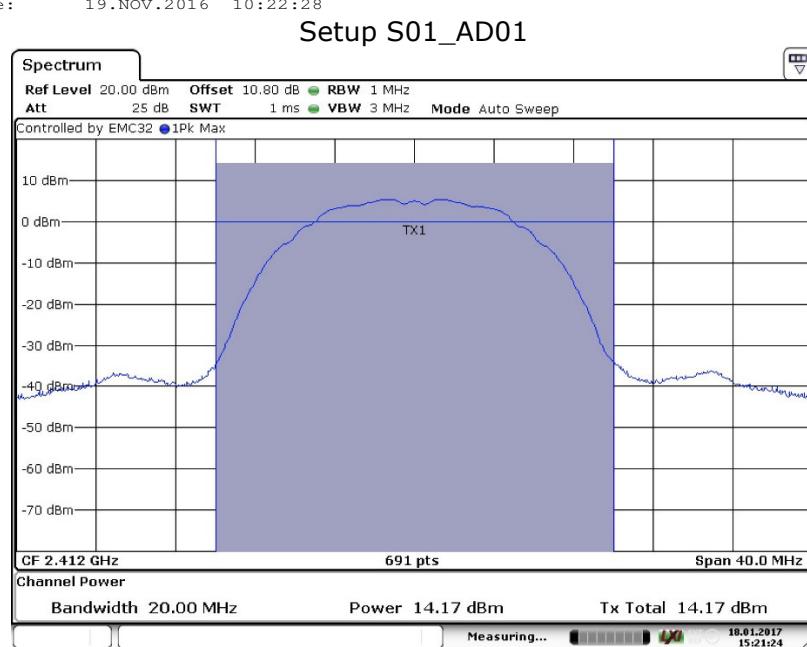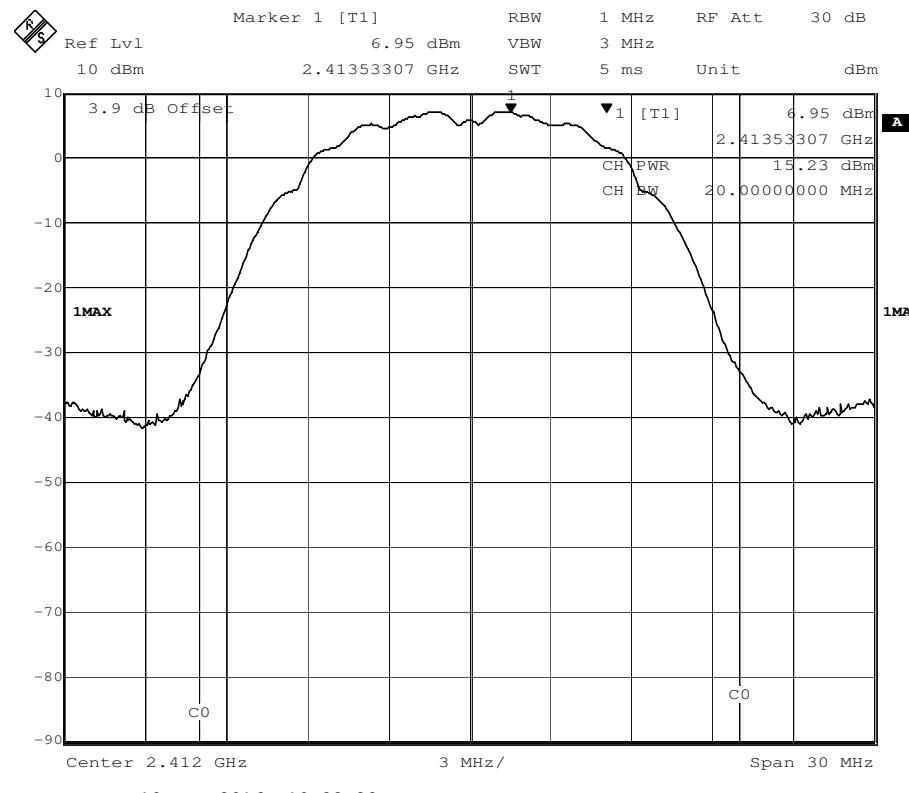


Setup S01_AO01

Radio Technology = WLAN g, Measurement method = conducted

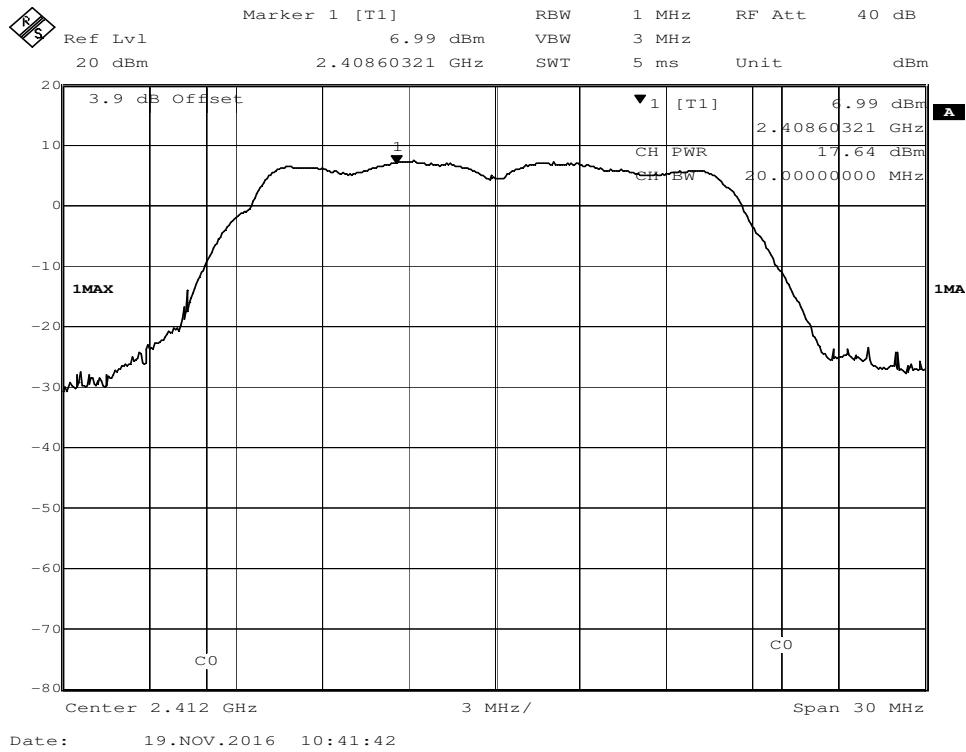


Operating Frequency = low, Setup S01_AD01

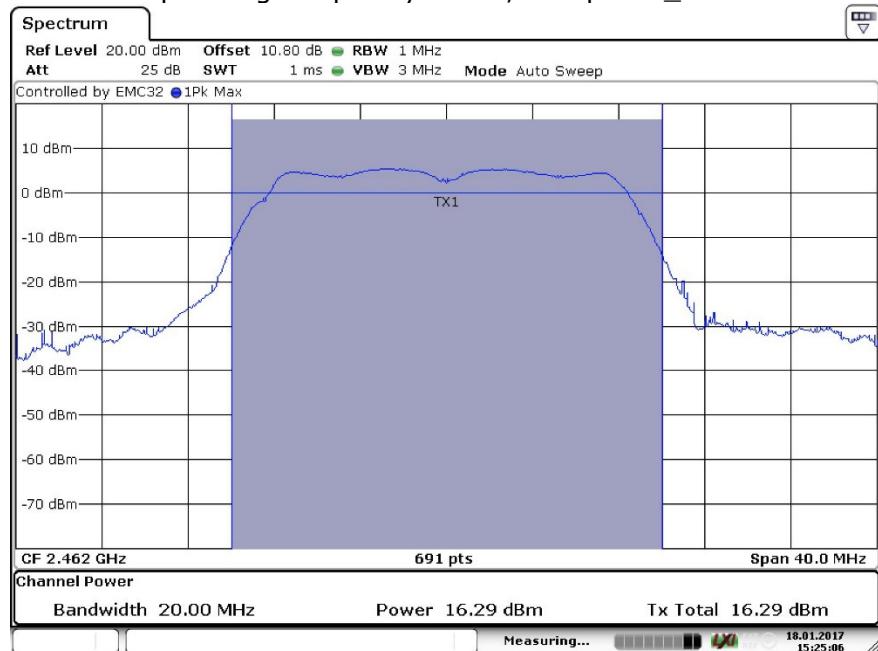


Operating Frequency = high, Setup S01_A001

Radio Technology = WLAN n, Operating Frequency = low, Measurement method = conducted

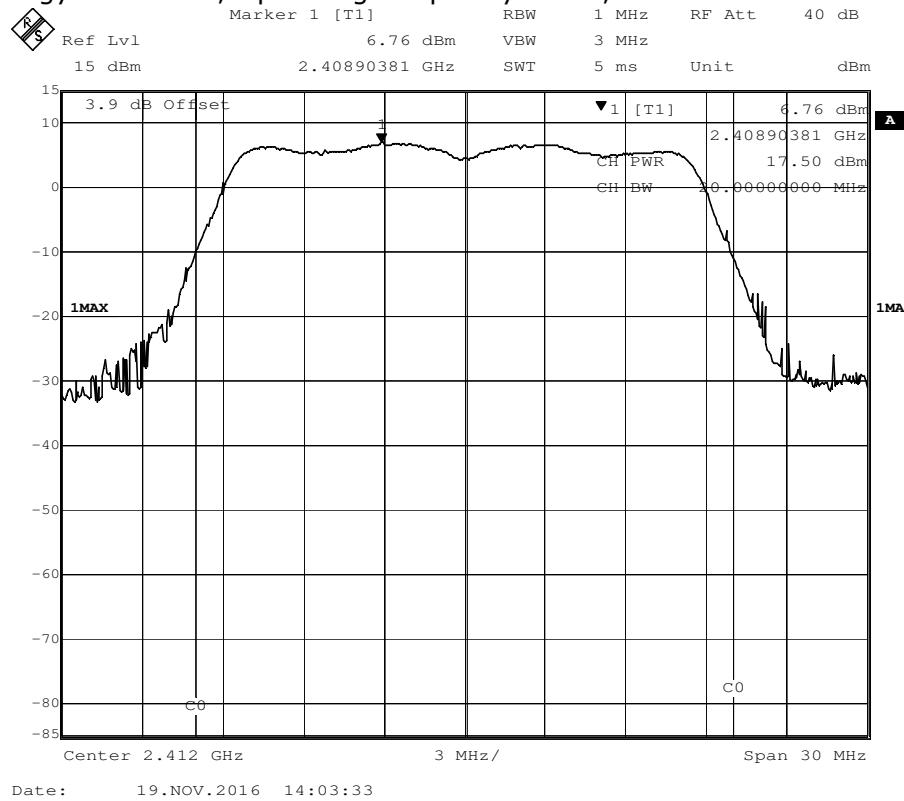

Date: 19.NOV.2016 14:03:33

Setup S01_AD01

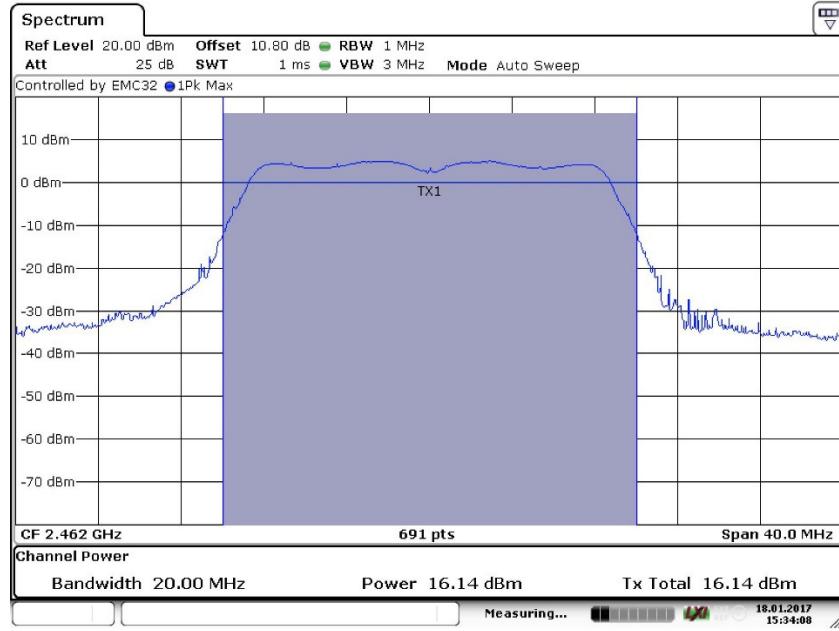

Date: 18.JAN.2017 15:34:09

Setup S01_AO01

4.3.5 TEST EQUIPMENT USED

Regulatory Bluetooth RF Test Solution

4.4 SPURIOUS RF CONDUCTED EMISSIONS

Standard **FCC Part 15 Subpart C**

The test was performed according to:
ANSI C63.10

4.4.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements. The EUT was connected to spectrum analyzer via a short coax cable with a known loss. Analyzer settings:

- Frequency range: 30 – 25000 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Trace: Maxhold
- Sweeps: 2
- Sweep Time: 8.4 s
- Detector: Peak

The reference value for the measurement of the spurious RF conducted emissions is determined during the test "band edge compliance conducted". This value is used to calculate the 20 dBc limit.

4.4.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

4.4.3 TEST PROTOCOL

Ambient temperature: 23°C
 Air Pressure: 1017hPa
 Humidity: 43%
 WLAN b-Mode; 20 MHz; 1 Mbit/s

Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	---	---	PEAK	100	1.5	-18.5	>20
6	2437	---	---	PEAK	100	1.4	-18.6	>20
11	2462	---	---	PEAK	100	0.4	-19.6	>20

WLAN g-Mode; 20 MHz; 6 Mbit/s

Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	---	---	PEAK	100	-2.6	-22.6	>20
6	2437	---	---	PEAK	100	-2.7	-22.7	>20
11	2462	---	---	PEAK	100	-1.9	-21.9	>20

WLAN n-Mode; 20 MHz; 72.2 Mbit/s


Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	---	---	PEAK	100	-2.2	-22.2	>20
6	2437	---	---	PEAK	100	-3.3	-23.3	>20
11	2462	---	---	PEAK	100	-2.7	-22.7	>20

Remark: No peaks closer 20 dB to the limit found.

Please see next sub-clause for the measurement plot.

4.4.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = WLAN b, Operating Frequency = mid

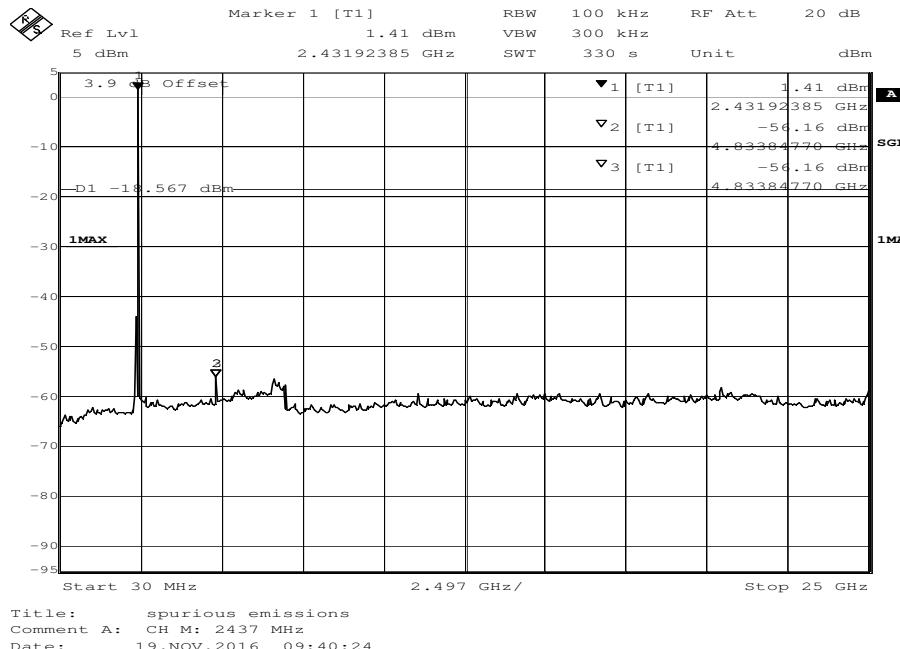

4.4.5 TEST EQUIPMENT USED

Regulatory Bluetooth RF Test Solution

4.5 TRANSMITTER SPURIOUS RADIATED EMISSIONS

Standard **FCC Part 15 Subpart C**

The test was performed according to:
ANSI C63.10

4.5.1 TEST DESCRIPTION

The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m² in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The measurement procedure is implemented into the EMI test software EMC32 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is also performed at 3 axes. A pre-check is performed while the EUT is powered from a DC power source.

1. Measurement up to 30 MHz

The Loop antenna HFH2-Z2 is used.

Step 1: pre measurement

- Anechoic chamber
- Antenna distance: 3 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 MHz and 0.15 – 30 MHz
- Frequency steps: 0.05 kHz and 2.25 kHz
- IF-Bandwidth: 0.2 kHz and 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 0.2 - 10 kHz
- Measuring time / Frequency step: 1 s

2. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold / Quasipeak (FFT-based)
- Frequency range: 30 – 1000 MHz

- Frequency steps: 30 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 ms
- Turntable angle range: -180° to 90°
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: Adjustment measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by ± 45° around this value. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary by ± 100 cm around the antenna height determined. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: ± 45 ° around the determined value
- Height variation range: ± 100 cm around the determined value
- Antenna Polarisation: max. value determined in step 1

Step 3: Final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

Step 1:

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only.

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of 90 °.

The turn table step size (azimuth angle) for the preliminary measurement is 45 °.

Step 2:

Due to the fact, that in this frequency range the test is performed in a fully anechoic room, the height scan of the receiving antenna instep 2 is omitted. Instead of this, a maximum search with a step size ± 45° for the elevation axis is performed.

The turn table azimuth will slowly vary by $\pm 22.5^\circ$.

The elevation angle will slowly vary by $\pm 45^\circ$

EMI receiver settings (for all steps):

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

Step 3:

Spectrum analyser settings for step 3:

- Detector: Peak / Average
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 1 MHz
- Measuring time: 1 s

4.5.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (μ V/m)	Measurement distance (m)	Limits ($\text{dB}\mu$ V/m)
0.009 - 0.49	2400/F(kHz)@300m	3	(48.5 - 13.8)@300m
0.49 - 1.705	24000/F(kHz)@30m	3	(33.8 - 23.0)@30m
1.705 - 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit (μ V/m)	Measurement distance (m)	Limits ($\text{dB}\mu$ V/m)
30 - 88	100@3m	3	40.0@3m
88 - 216	150@3m	3	43.5@3m
216 - 960	200@3m	3	46.0@3m
960 - 26000	500@3m	3	54.0@3m
26000 - 40000	500@3m	1	54.0@3m

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b), there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit ($\text{dB}\mu$ V/m) = 20 log (Limit (μ V/m)/1 μ V/m)

4.5.3 TEST PROTOCOL

Ambient temperature: 21-24 °C
 Air Pressure: 999-1009 hPa
 Humidity: 41-44 %
 WLAN b-Mode; 20 MHz; 1 Mbit/s

Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dB μ V/m]	Detector	RBW [kHz]	Limit [dB μ V/m]	Margin to Limit [dB]	Limit Type
Setup S01_AF01 (Hardware HW 502)								
1	2412	38.0	28.3	QP	120	40.0	11.7	RB
1	2412	4824.0	56.6	PEAK	1000	74.0	17.4	RB
1	2412	4824.0	46.9	AV	1000	54.0	7.1	RB
6	2437	38.0	28.3	QP	120	40.0	11.7	RB
6	2437	4873.9	55.4	PEAK	1000	74.0	18.6	RB
6	2437	4873.9	45.2	AV	1000	54.0	8.8	RB
11	2462	38.0	29.1	QP	120	40.0	10.9	RB
11	2462	4924.0	55.5	PEAK	1000	74.0	18.5	RB
11	2462	4924.0	42.5	AV	1000	54.0	11.5	RB
Setup S01_AN01 (Hardware HW 602)								
11	2462	4924.0	53.3	PEAK	1000	74.0	20.7	RB
11	2462	4924.0	47.0	AV	1000	54.0	7.0	RB

WLAN g-Mode; 20 MHz; 6 Mbit/s

Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dB μ V/m]	Detector	RBW [kHz]	Limit [dB μ V/m]	Margin to Limit [dB]	Limit Type
Setup S01_AF01 (Hardware HW 502)								
1	2412	---	---	---	---	---	---	RB
6	2437	---	---	---	---	---	---	RB
11	2462	---	---	---	---	---	---	RB

WLAN n-Mode; 20 MHz; 72.2 Mbit/s


Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dB μ V/m]	Detector	RBW [kHz]	Limit [dB μ V/m]	Margin to Limit [dB]	Limit Type
Setup S01_AF01 (Hardware HW 502)								
1	2412	---	---	---	---	---	---	RB
6	2437	---	---	---	---	---	---	RB
11	2462	---	---	---	---	---	---	RB

Remark: Peaks with a peak detector value more than 20dB from the limit (10 dB for range up to 1GHz) may not be listed in the table above.

Please see next sub-clause for the measurement plot.


4.5.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = WLAN b, Operating Frequency = mid, Measurement range = 9 kHz - 30 MHz

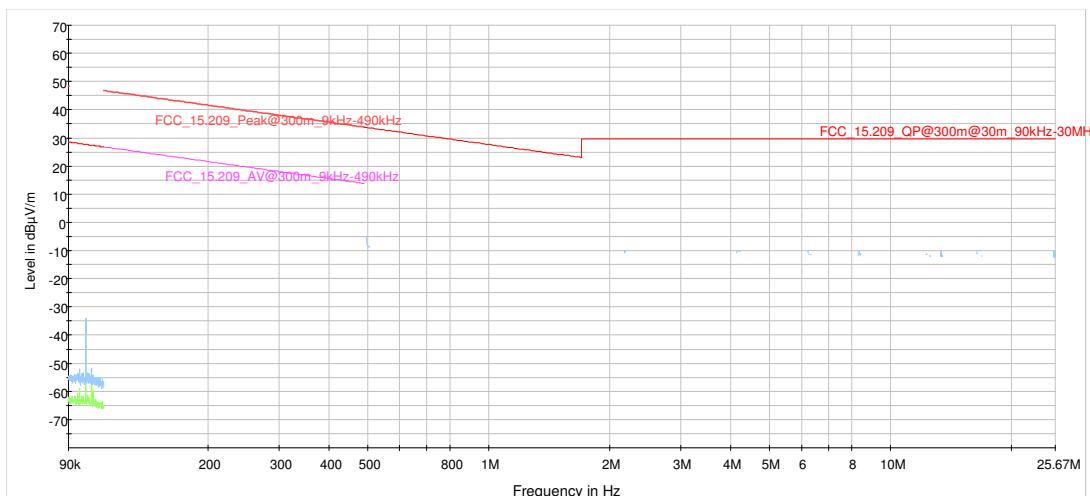

Radio Technology = WLAN b, Operating Frequency = high, Measurement range = 30 MHz - 1 GHz


Setup S01_AB01:

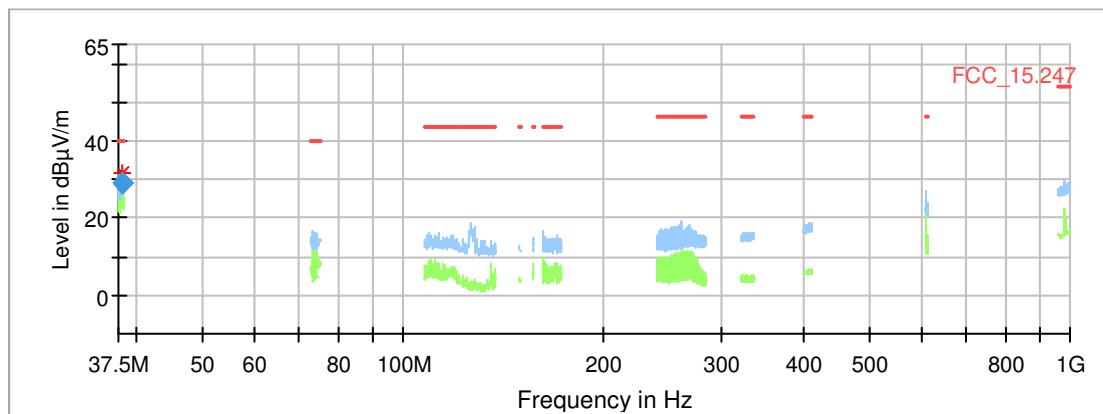

Final Result


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
38.010000	29.08	40.00	10.92	1000.0	120.000	105.0	V	-47.0	15.0

Setup S01_AN01:

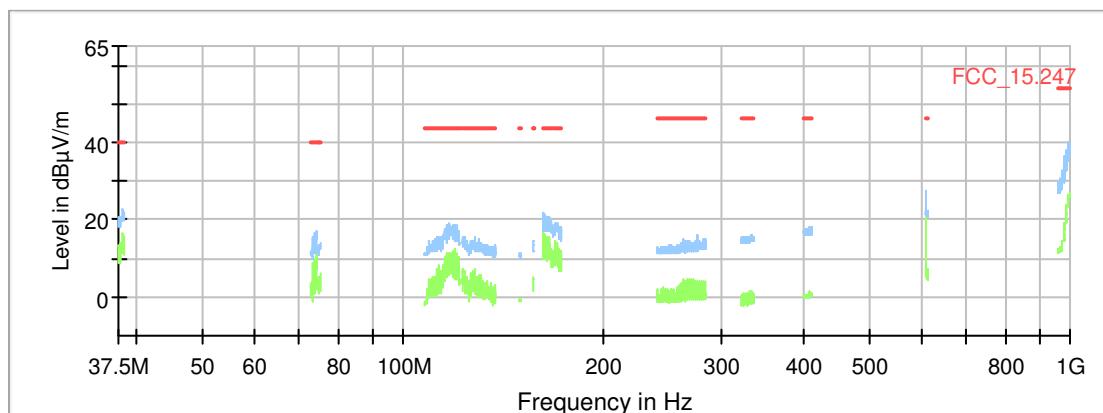

Radio Technology = WLAN b, Operating Frequency = high, Measurement range = 1 GHz - 26 GHz


Setup S01_AF01:

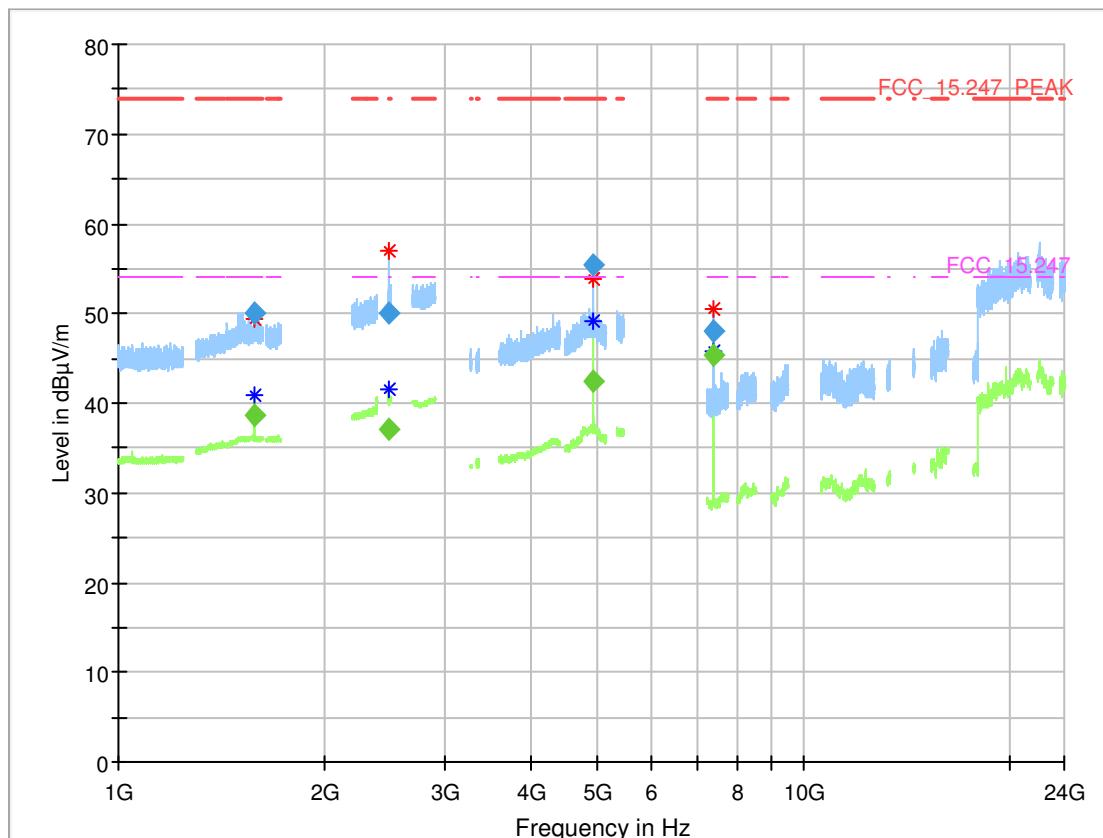

Final_Result

Frequency (MHz)	MaxPeak (dB μ V/m)	CAverage (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
1583.987000	---	38.63	54.00	15.37	1000.0	1000.000	150.0	V	-191.0	89.9
1583.987000	49.96	---	74.00	24.04	1000.0	1000.000	150.0	V	-190.0	84.9
2484.160000	50.05	---	74.00	23.95	1000.0	1000.000	150.0	H	82.0	12.1
2487.460000	---	37.05	54.00	16.95	1000.0	1000.000	150.0	V	-71.0	-14.9
4923.962500	55.49	---	74.00	18.51	1000.0	1000.000	150.0	H	131.0	83.8
4923.962500	---	42.49	54.00	11.51	1000.0	1000.000	150.0	V	-154.0	100.8
7386.750000	---	45.39	54.00	8.61	1000.0	1000.000	150.0	V	-186.0	97.2
7387.000000	48.15	---	74.00	25.85	1000.0	1000.000	150.0	V	-172.0	94.0

Setup S01_AN01:

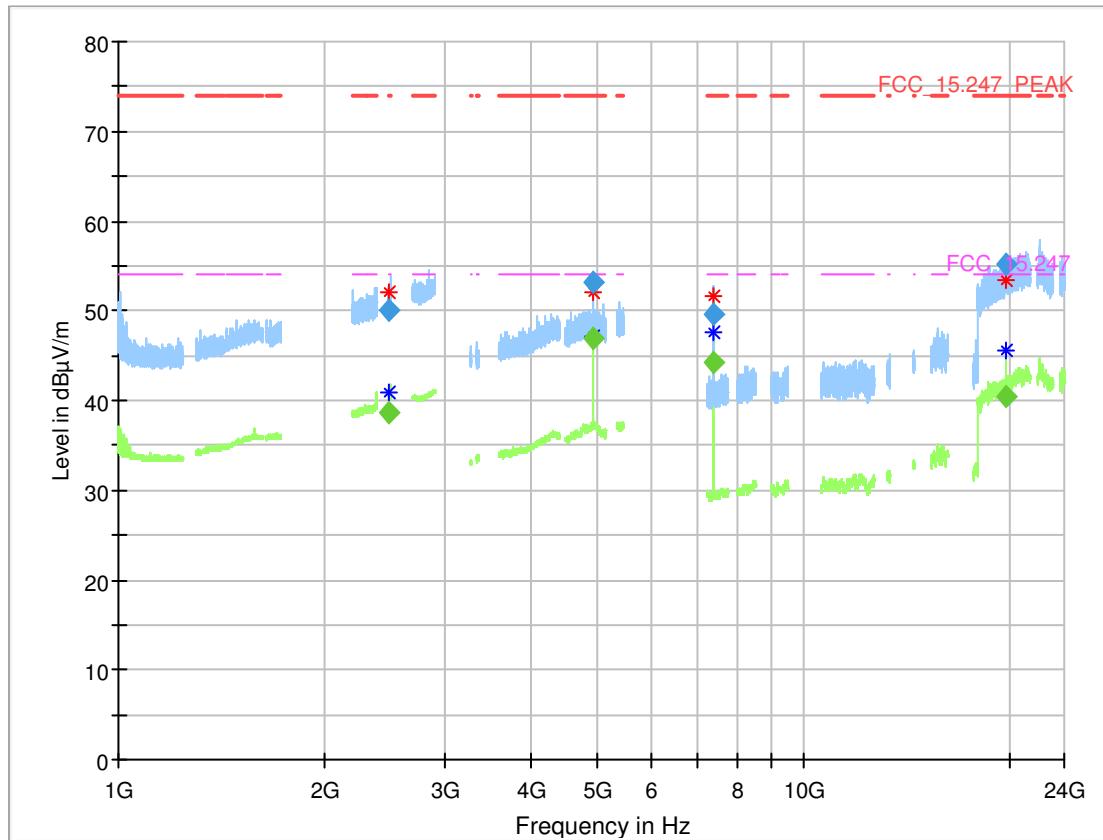

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
2483.665000	--	38.72	54.00	15.28	1000.0	1000.000	150.0	H	-41.0	-12.2
2483.665000	50.13	---	74.00	23.87	1000.0	1000.000	150.0	H	-49.0	93.9
4923.962500	--	46.96	54.00	7.04	1000.0	1000.000	150.0	H	-158.0	77.9
4923.962500	53.27	---	74.00	20.73	1000.0	1000.000	150.0	H	-158.0	79.9
7385.000000	49.54	---	74.00	24.46	1000.0	1000.000	150.0	V	161.0	96.8
7385.000000	--	44.32	54.00	9.68	1000.0	1000.000	150.0	V	161.0	104.8
19695.750000	--	40.53	54.00	13.47	1000.0	1000.000	150.0	V	109.0	105.2
19695.750000	55.30	---	74.00	18.70	1000.0	1000.000	150.0	H	109.0	80.9

4.5.5 TEST EQUIPMENT USED

Radiated Emissions

4.6 BAND EDGE COMPLIANCE CONDUCTED

Standard **FCC Part 15 Subpart C**

The test was performed according to:
ANSI C63.10

4.6.1 TEST DESCRIPTION

For the conducted measurement, the Equipment Under Test (EUT) is placed in a shielded room. The reference power was measured in the test case "Spurious RF Conducted Emissions". The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Frequency Range 2397 MHz – 2425 MHz and 2450 MHz – 2485 MHz
- Detector: Peak
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweptime: coupled
- Trace: Maxhold

4.6.2 TEST REQUIREMENTS / LIMITS

FCC Part 15.247 (d)

"In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. ...

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c))."

For the conducted measurement the RF power at the band edge shall be "at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power..."

4.6.3 TEST PROTOCOL

Ambient temperature: 23°C
 Air Pressure: 1017hPa
 Humidity: 43%

WLAN b-Mode; 20 MHz; 1 Mbit/s

Channel No.	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	2400.0	-53.7	PEAK	100	1.5	-18.5	35.2
11	2462	2483.5	-60.9	PEAK	100	1.0	-19.0	42.0

WLAN g-Mode; 20 MHz; 6 Mbit/s

Channel No.	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	2400.0	-44.1	PEAK	100	-1.0	-21.0	23.0
11	2462	2483.5	-54.4	PEAK	100	-2.1	-22.1	32.4


WLAN n-Mode; 20 MHz; 72.2 Mbit/s

Channel No.	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	2400.0	-44.6	PEAK	100	-1.5	-21.5	23.1
11	2462	2483.5	-52.9	PEAK	100	-2.1	-22.1	30.8


Remark: Please see next sub-clause for the measurement plot.

4.6.4MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = WLAN n 20 MHz, Operating Frequency = high, Band Edge = high

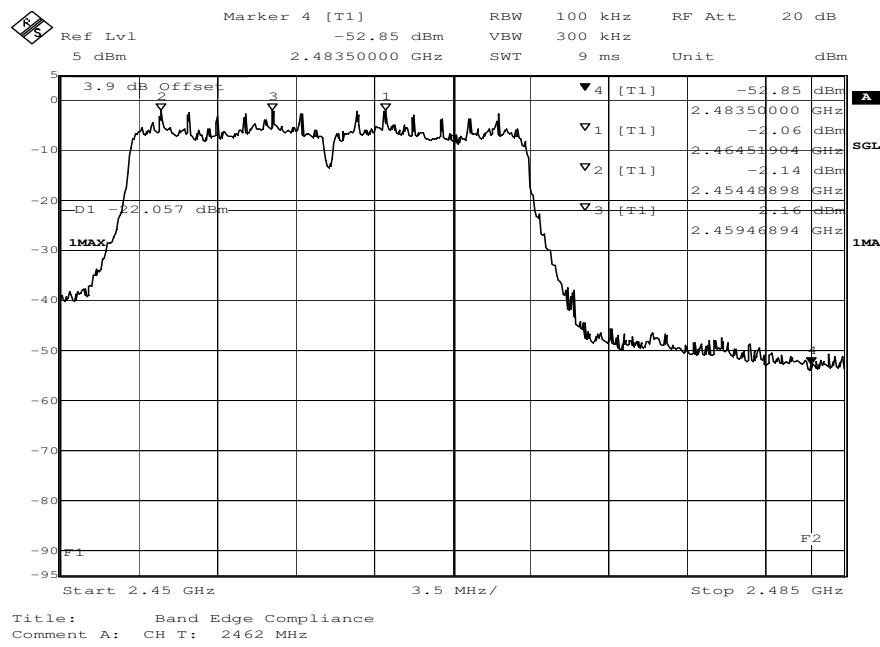

Radio Technology = WLAN g, Operating Frequency = low, Band Edge = low

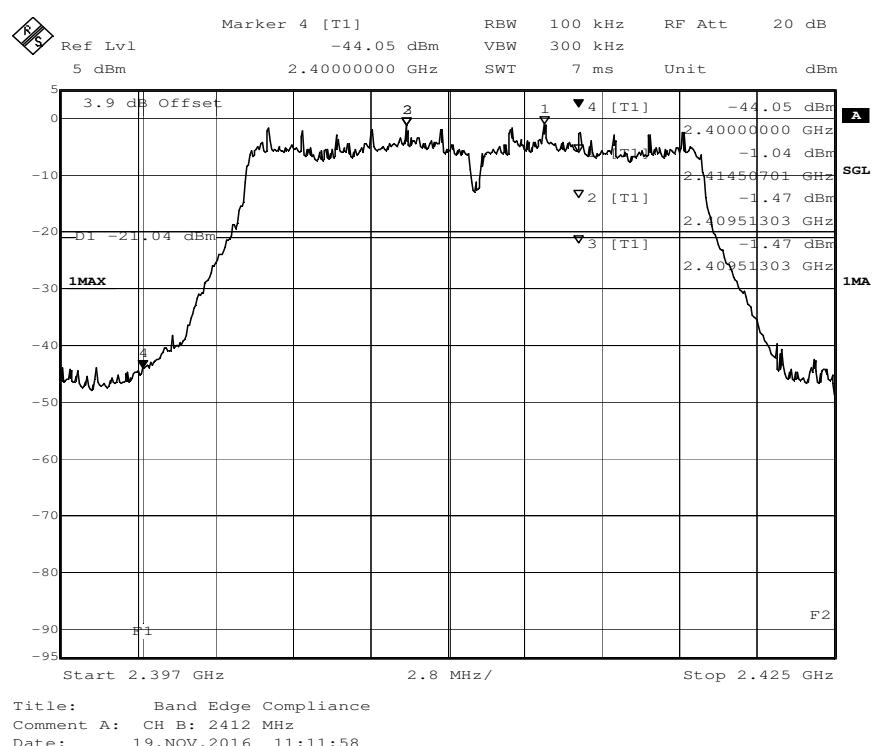

4.6.5TEST EQUIPMENT USED

Regulatory Bluetooth RF Test Solution

4.7 BAND EDGE COMPLIANCE RADIATED

Standard **FCC Part 15 Subpart C**

The test was performed according to:
 ANSI C63.10

4.7.1 TEST DESCRIPTION

Please see test description for the test case "Spurious Radiated Emissions"

4.7.2 TEST REQUIREMENTS / LIMITS

For band edges connected to a restricted band, the limits are specified in Section 15.209(a)

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (μ V/m)	Measurement distance (m)	Limits ($\text{dB}\mu$ V/m)
0.009 – 0.49	2400/F(kHz)@300m	3	(48.5 – 13.8)@300m
0.49 – 1.705	24000/F(kHz)@30m	3	(33.8 – 23.0)@30m
1.705 – 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit (μ V/m)	Measurement distance (m)	Limits ($\text{dB}\mu$ V/m)
30 – 88	100@3m	3	40.0@3m
88 – 216	150@3m	3	43.5@3m
216 – 960	200@3m	3	46.0@3m
960 – 26000	500@3m	3	54.0@3m
26000 – 40000	500@3m	1	54.0@3m

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit ($\text{dB}\mu$ V/m) = 20 log (Limit (μ V/m)/1 μ V/m)

4.7.3 TEST PROTOCOL

Ambient temperature: 21-24 °C
 Air Pressure: 999-1009 hPa
 Humidity: 41-44 %

WLAN b-Mode; 20 MHz; 1 Mbit/s

Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dB μ V/m]	Detector	RBW [kHz]	Limit [dB μ V/m]	Margin to Limit [dB]	Limit Type
Setup S01_AF01 (Hardware HW 502)								
11	2462	2483.5	50.1	PEAK	1000	74.0	23.9	BE
11	2462	2483.5	37.1	AV	1000	54.0	16.9	BE
Setup S01_AN01 (Hardware HW 602)								
11	2462	2483.5	50.1	PEAK	1000	74.0	23.9	BE
11	2462	2483.5	38.7	AV	1000	54.0	15.3	BE

WLAN g-Mode; 20 MHz; 6 Mbit/s

Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dB μ V/m]	Detector	RBW [kHz]	Limit [dB μ V/m]	Margin to Limit [dB]	Limit Type
Setup S01_AF01 (Hardware HW 502)								
11	2462	2483.5	49.8	PEAK	1000	74.0	24.2	BE
11	2462	2483.5	36.7	AV	1000	54.0	17.4	BE
Setup S01_AN01 (Hardware HW 602)								
11	2462	2483.5	55.3	PEAK	1000	74.0	18.7	BE
11	2462	2483.5	39.7	AV	1000	54.0	14.3	BE

WLAN n-Mode; 20 MHz; 72.2 Mbit/s


Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dB μ V/m]	Detector	RBW [kHz]	Limit [dB μ V/m]	Margin to Limit [dB]	Limit Type
Setup S01_AF01 (Hardware HW 502)								
11	2462	2483.5	58.5	PEAK	1000	74.0	15.5	BE
11	2462	2483.5	37.0	AV	1000	54.0	17.0	BE
Setup S01_AN01 (Hardware HW 602)								
11	2462	2483.5	55.9	PEAK	1000	74.0	18.1	BE
11	2462	2483.5	41.5	AV	1000	54.0	12.5	BE

Remark: For the "lower band edge" (nearest, lower restricted band to the 2.4 GHz ISM band) the measurement values are reported in section 4.5 "TRANSMITTER SPURIOUS RADIATED EMISSIONS" in case that the margin to the compliance limit is less than 20 dB.

Please see next sub-clause for the measurement plot.

4.7.4MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")


Radio Technology = WLAN n 20 MHz, Operating Frequency = high, Band Edge = high
 Setup S01_AF01:

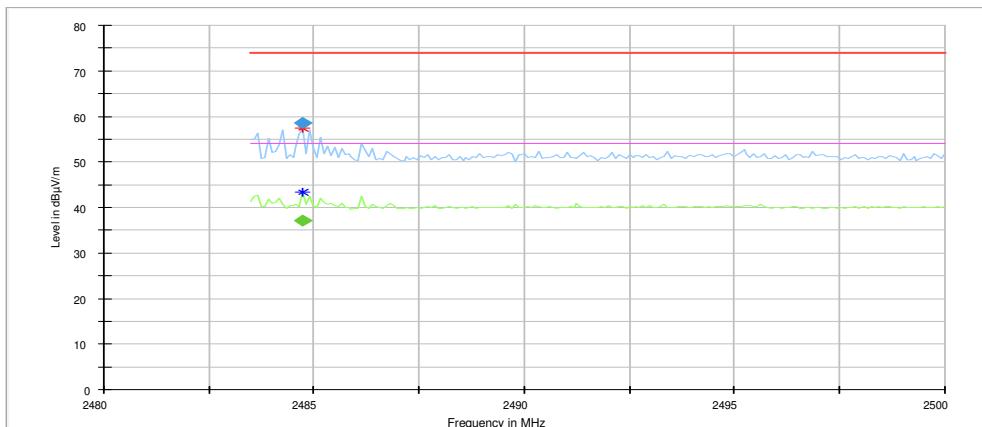

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
2484.737500	---	37.04	54.00	16.96	1000.0	1000.000	150.0	H	-49.0	2.0
2484.737500	58.46	---	74.00	15.54	1000.0	1000.000	150.0	H	-38.0	-7.0

Setup S01_AF01:

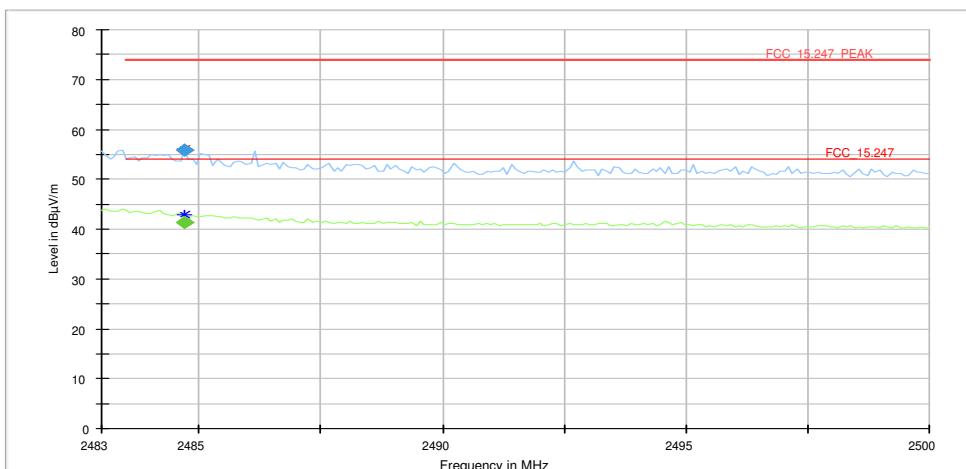

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
2484.700000	---	41.45	---	---	1000.0	1000.000	150.0	H	-49.0	-11.2
2484.700000	55.90	---	74.00	18.10	1000.0	1000.000	150.0	H	-51.0	-9.9

4.7.5TEST EQUIPMENT USED

Radiated Emissions

4.8 POWER DENSITY

Standard **FCC Part 15 Subpart C**

The test was performed according to:
ANSI C63.10

4.8.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up in a shielded room to perform the Power Density measurements.

The results recorded were measured with the modulation which produces the worst-case (highest) power density.

The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 3 kHz
- Video Bandwidth (VBW): 30 kHz
- Trace: Maxhold
- Sweeps: 2000
- Sweptime: 5 ms
- Detector: Peak

4.8.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (e)

For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

...
The same method of determining the conducted output power shall be used to determine the power spectral density.

4.8.3 TEST PROTOCOL

Ambient temperature: 23°C
 Air Pressure: 1017hPa
 Humidity: 43%
 WLAN b-Mode; 20 MHz; 1 Mbit/s

Band	Channel No.	Frequency [MHz]	Power Density [dBm/3kHz]	Limit [dBm/3kHz]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	-14.3	8.0	22.3
	6	2437	-14.3	8.0	22.3
	11	2462	-14.7	8.0	22.7

WLAN g-Mode; 20 MHz;
 6 Mbit/s

Band	Channel No.	Frequency [MHz]	Power Density [dBm/3kHz]	Limit [dBm/3kHz]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	-17.1	8.0	25.1
	6	2437	-16.5	8.0	24.5
	11	2462	-16.8	8.0	24.8


WLAN n-Mode; 20 MHz; 72.2 Mbit/s

Band	Channel No.	Frequency [MHz]	Power Density [dBm/3kHz]	Limit [dBm/3kHz]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	-17.4	8.0	25.4
	6	2437	-17.7	8.0	25.7
	11	2462	-17.9	8.0	25.9

Remark: Please see next sub-clause for the measurement plot.

4.8.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = WLAN b, Operating Frequency = mid

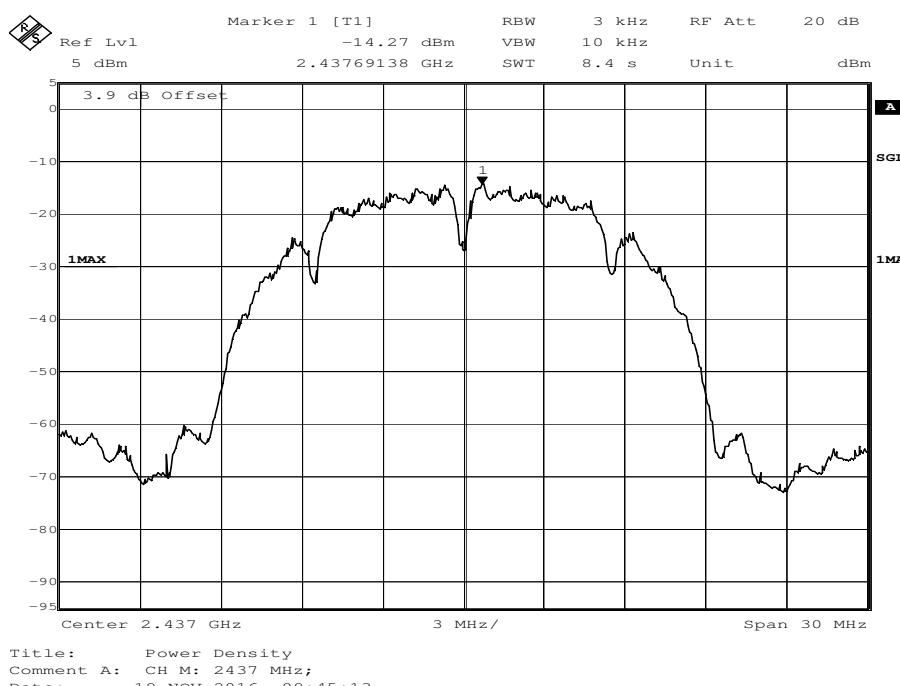

4.8.5 TEST EQUIPMENT USED

Regulatory Bluetooth RF Test Solution

5 TEST EQUIPMENT

- 1 Radiated Emissions
 Lab to perform radiated emission tests

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
1.1	3160-09	Standard Gain / Pyramidal Horn Antenna 26.5 GHz	EMCO Elektronic GmbH	00083069		
1.2	WHKX 7.0/18G-8SS	High Pass Filter	Wainwright	09		
1.3	5HC3500/1800 0-1.2-KK	High Pass Filter	Trilithic	200035008		
1.4	Datum MFS	Rubidium Frequency Normal MFS	Datum GmbH	002	2016-09	2017-09
1.5	Fully Anechoic Room	8.80m x 4.60m x 4.05m (l x w x h)	Albatross Projects	P26971-647-001-PRB		
1.6	AM 4.0	Antenna mast	Maturo GmbH	AM4.0/180/1192 0513		
1.7	ESR 7	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz	101424	2016-11	2018-11
1.8	TT 1.5 WI	Turn Table	Maturo GmbH	-		
1.9	Anechoic Chamber	10.58 x 6.38 x 6.00 m ³	Frankonia	none	2014-01	2017-01
1.10	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2016-02	2018-02
1.11	ESIB 26	Spectrum Analyzer	Rohde & Schwarz	830482/004	2015-12	2017-12
1.12	Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	Maturo GmbH	TD1.5-10kg/024/37907 09		
1.13	5HC2700/1275 0-1.5-KK	High Pass Filter	Trilithic	9942012		
1.14	AS 620 P	Antenna mast	HD GmbH	620/37		
1.15	NRV-Z1	Sensor Head A	Rohde & Schwarz	827753/005	2016-05	2017-05
1.16	4HC1600/1275 0-1.5-KK	High Pass Filter	Trilithic	9942011		
1.17	ASP 1.2/1.8-10 kg	Antenna Mast	Maturo GmbH	-		

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
1.18	JS4-18002600-32-5P	Broadband Amplifier 18 GHz - 26 GHz	Miteq	849785		
1.19	JS4-00101800-35-5P	Broadband Amplifier 30 MHz - 18 GHz	Miteq	896037		
1.20	HL 562	Ultralog new biconicals	Rohde & Schwarz	830547/003	2015-06	2018-06
1.21	Opus10 THI (8152.00)	ThermoHygro Datalogger 12 (Environ)	Lufft Mess- und Regeltechnik GmbH	12482	2015-03	2017-03
1.22	JS4-00102600-42-5A	Broadband Amplifier 30 MHz - 26 GHz	Miteq	619368		
1.23	HFH2-Z2	Loop Antenna	Rohde & Schwarz	829324/006	2014-11	2017-11
1.24	FSW 43	Spectrum Analyzer	Rohde & Schwarz	103779	2016-11	2018-11
1.25	Opus10 TPR (8253.00)	ThermoAirpressure Datalogger 13 (Environ)	Lufft Mess- und Regeltechnik GmbH	13936	2015-02	2017-02
1.26	Chroma 6404	AC Power Source	Chroma ATE INC.	64040001304		
1.27	3160-10	Standard Gain / Pyramidal Horn Antenna 40 GHz	EMCO Elektronic GmbH	00086675		
1.28	HL 562 Ultralog	Log.-per. Antenna	Rohde & Schwarz	100609	2016-04	2019-04
1.29	PAS 2.5 - 10 kg	Antenna Mast	Maturo GmbH	-		
1.30	HF 907	Double-ridged horn	Rohde & Schwarz	102444	2015-05	2018-05

2 Regulatory Bluetooth RF Test Solution
 Regulatory Bluetooth RF Tests

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
2.1	CBT	IL BT RF Test Solution	Rohde & Schwarz	100302	2016-02	2017-02
2.2	EX520	Digital Multimeter 12 (Multimeter)	Extech Instruments Corp	05157876	2016-02	2018-02
2.3	SMIQ03B	Signal Generator	Rohde & Schwarz	832870/017	2016-06	2019-06
2.4	Datum MFS	Rubidium Frequency Normal MFS	Datum GmbH	002	2016-09	2017-09
2.5	FSIQ26	Signal Analyser	Rohde & Schwarz	832695/007	2016-09	2018-09
2.6	NRVD	Powermeter	Rohde & Schwarz	832025/059	2016-08	2017-08
2.7	TOCT Switching Unit		7layers, Inc.	040107		
2.8	SMP03	Signal Generator 2 GHz - 27 GHz	Rohde & Schwarz	833680/003		
2.9	Opus10 THI (8152.00)	T/H Logger 15	Lufft Mess- und Regeltechnik GmbH	13985	2015-03	2017-03
2.10	NRV Z1 A	Power Sensor	Rohde & Schwarz	832279/013	2016-09	2017-08
2.11	ADU 200 Relay Box 7	used for automated testing (EMMI) only	Ontrak Control Systems Inc	A04380		
2.12	R&S CBT	Bluetooth Signalling Unit	Rohde & Schwarz	100589	2015-01	2018-01
2.13	KWP 120/70	Temperature Chamber Weiss 01	Weiss	59226012190010	2016-03	2018-03
2.14	NGSM 32/10	Power Supply	Rohde & Schwarz	2725	2015-06	2017-06
2.15	SMP02	Signal Generator SMP	Rohde & Schwarz	833286/0014	2016-05	2019-05

The calibration interval is the time interval between "Last Calibration" and "Calibration Due"

6 ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATIONS

This chapter contains the antenna factors with their corresponding path loss of the used measurement path for all antennas as well as the insertion loss of the LISN.

6.1 LISN R&S ESH3-Z5 (150 KHZ – 30 MHZ)

Frequency		Corr.	LISN insertion loss ESH3-Z5	cable loss (incl. 10 dB attenuator)
MHz		dB	dB	dB
0.15		10.1	0.1	10.0
5		10.3	0.1	10.2
7		10.5	0.2	10.3
10		10.5	0.2	10.3
12		10.7	0.3	10.4
14		10.7	0.3	10.4
16		10.8	0.4	10.4
18		10.9	0.4	10.5
20		10.9	0.4	10.5
22		11.1	0.5	10.6
24		11.1	0.5	10.6
26		11.2	0.5	10.7
28		11.2	0.5	10.7
30		11.3	0.5	10.8

Sample calculation

$$U_{\text{LISN}} (\text{dB } \mu\text{V}) = U (\text{dB } \mu\text{V}) + \text{Corr. (dB)}$$

U = Receiver reading

LISN Insertion loss = Voltage Division Factor of LISN

Corr. = sum of single correction factors of used LISN, cables, switch units (if used)

Linear interpolation will be used for frequencies in between the values in the table.

6.2 ANTENNA R&S HFH2-Z2 (9 KHZ – 30 MHZ)

Frequency	AF HFH-Z2)	Corr.	cable loss 1 (inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit)	cable loss 4 (to receiver)	distance corr. (-40 dB/ decade)	d_{Limit} (meas. distance (limit))	d_{used} (meas. distance (used))
			dB	dB	dB	dB	dB	m	m
0.009	20.50	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.01	20.45	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.015	20.37	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.02	20.36	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.025	20.38	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.03	20.32	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.05	20.35	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.08	20.30	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.1	20.20	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.2	20.17	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.3	20.14	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.49	20.12	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.490001	20.12	-39.6	0.1	0.1	0.1	0.1	-40	30	3
0.5	20.11	-39.6	0.1	0.1	0.1	0.1	-40	30	3
0.8	20.10	-39.6	0.1	0.1	0.1	0.1	-40	30	3
1	20.09	-39.6	0.1	0.1	0.1	0.1	-40	30	3
2	20.08	-39.6	0.1	0.1	0.1	0.1	-40	30	3
3	20.06	-39.6	0.1	0.1	0.1	0.1	-40	30	3
4	20.05	-39.5	0.2	0.1	0.1	0.1	-40	30	3
5	20.05	-39.5	0.2	0.1	0.1	0.1	-40	30	3
6	20.02	-39.5	0.2	0.1	0.1	0.1	-40	30	3
8	19.95	-39.5	0.2	0.1	0.1	0.1	-40	30	3
10	19.83	-39.4	0.2	0.1	0.2	0.1	-40	30	3
12	19.71	-39.4	0.2	0.1	0.2	0.1	-40	30	3
14	19.54	-39.4	0.2	0.1	0.2	0.1	-40	30	3
16	19.53	-39.3	0.3	0.1	0.2	0.1	-40	30	3
18	19.50	-39.3	0.3	0.1	0.2	0.1	-40	30	3
20	19.57	-39.3	0.3	0.1	0.2	0.1	-40	30	3
22	19.61	-39.3	0.3	0.1	0.2	0.1	-40	30	3
24	19.61	-39.3	0.3	0.1	0.2	0.1	-40	30	3
26	19.54	-39.3	0.3	0.1	0.2	0.1	-40	30	3
28	19.46	-39.2	0.3	0.1	0.3	0.1	-40	30	3
30	19.73	-39.1	0.4	0.1	0.3	0.1	-40	30	3

Sample calculation

$$E (\text{dB } \mu\text{V}/\text{m}) = U (\text{dB } \mu\text{V}) + AF (\text{dB } 1/\text{m}) + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-40 * \text{LOG} (d_{\text{Limit}}/ d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values

6.3 ANTENNA R&S HL562 (30 MHZ – 1 GHZ)

($d_{\text{Limit}} = 3 \text{ m}$)

Frequency	AF R&S HL562	Corr.
MHz	dB (1/m)	dB
30	18.6	0.6
50	6.0	0.9
100	9.7	1.2
150	7.9	1.6
200	7.6	1.9
250	9.5	2.1
300	11.0	2.3
350	12.4	2.6
400	13.6	2.9
450	14.7	3.1
500	15.6	3.2
550	16.3	3.5
600	17.2	3.5
650	18.1	3.6
700	18.5	3.6
750	19.1	4.1
800	19.6	4.1
850	20.1	4.4
900	20.8	4.7
950	21.1	4.8
1000	21.6	4.9

cable loss 1 (inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit)	cable loss 4 (to receiver)	distance corr. (-20 dB/ decade)	d_{Limit} (meas. distance (limit))	d_{used} (meas. distance (used))
dB	dB	dB	dB	dB	m	m
0.29	0.04	0.23	0.02	0.0	3	3
0.39	0.09	0.32	0.08	0.0	3	3
0.56	0.14	0.47	0.08	0.0	3	3
0.73	0.20	0.59	0.12	0.0	3	3
0.84	0.21	0.70	0.11	0.0	3	3
0.98	0.24	0.80	0.13	0.0	3	3
1.04	0.26	0.89	0.15	0.0	3	3
1.18	0.31	0.96	0.13	0.0	3	3
1.28	0.35	1.03	0.19	0.0	3	3
1.39	0.38	1.11	0.22	0.0	3	3
1.44	0.39	1.20	0.19	0.0	3	3
1.55	0.46	1.24	0.23	0.0	3	3
1.59	0.43	1.29	0.23	0.0	3	3
1.67	0.34	1.35	0.22	0.0	3	3
1.67	0.42	1.41	0.15	0.0	3	3
1.87	0.54	1.46	0.25	0.0	3	3
1.90	0.46	1.51	0.25	0.0	3	3
1.99	0.60	1.56	0.27	0.0	3	3
2.14	0.60	1.63	0.29	0.0	3	3
2.22	0.60	1.66	0.33	0.0	3	3
2.23	0.61	1.71	0.30	0.0	3	3

($d_{\text{Limit}} = 10 \text{ m}$)

30	18.6	-9.9
50	6.0	-9.6
100	9.7	-9.2
150	7.9	-8.8
200	7.6	-8.6
250	9.5	-8.3
300	11.0	-8.1
350	12.4	-7.9
400	13.6	-7.6
450	14.7	-7.4
500	15.6	-7.2
550	16.3	-7.0
600	17.2	-6.9
650	18.1	-6.9
700	18.5	-6.8
750	19.1	-6.3
800	19.6	-6.3
850	20.1	-6.0
900	20.8	-5.8
950	21.1	-5.6
1000	21.6	-5.6

0.29	0.04	0.23	0.02	-10.5	10	3
0.39	0.09	0.32	0.08	-10.5	10	3
0.56	0.14	0.47	0.08	-10.5	10	3
0.73	0.20	0.59	0.12	-10.5	10	3
0.84	0.21	0.70	0.11	-10.5	10	3
0.98	0.24	0.80	0.13	-10.5	10	3
1.04	0.26	0.89	0.15	-10.5	10	3
1.18	0.31	0.96	0.13	-10.5	10	3
1.28	0.35	1.03	0.19	-10.5	10	3
1.39	0.38	1.11	0.22	-10.5	10	3
1.44	0.39	1.20	0.19	-10.5	10	3
1.55	0.46	1.24	0.23	-10.5	10	3
1.59	0.43	1.29	0.23	-10.5	10	3
1.67	0.34	1.35	0.22	-10.5	10	3
1.67	0.42	1.41	0.15	-10.5	10	3
1.87	0.54	1.46	0.25	-10.5	10	3
1.90	0.46	1.51	0.25	-10.5	10	3
1.99	0.60	1.56	0.27	-10.5	10	3
2.14	0.60	1.63	0.29	-10.5	10	3
2.22	0.60	1.66	0.33	-10.5	10	3
2.23	0.61	1.71	0.30	-10.5	10	3

Sample calculation

$$E (\text{dB } \mu\text{V}/\text{m}) = U (\text{dB } \mu\text{V}) + AF (\text{dB } 1/\text{m}) + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-20 * \text{LOG} (d_{\text{Limit}}/d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

6.4 ANTENNA R&S HF907 (1 GHZ – 18 GHZ)

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
1000	24.4	-19.4
2000	28.5	-17.4
3000	31.0	-16.1
4000	33.1	-14.7
5000	34.4	-13.7
6000	34.7	-12.7
7000	35.6	-11.0

cable loss 1 (relay + cable inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit, attenuator & pre-amp)	cable loss 4 (to receiver)		
dB	dB	dB	dB		
0.99	0.31	-21.51	0.79		
1.44	0.44	-20.63	1.38		
1.87	0.53	-19.85	1.33		
2.41	0.67	-19.13	1.31		
2.78	0.86	-18.71	1.40		
2.74	0.90	-17.83	1.47		
2.82	0.86	-16.19	1.46		

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
3000	31.0	-23.4
4000	33.1	-23.3
5000	34.4	-21.7
6000	34.7	-21.2
7000	35.6	-19.8

cable loss 1 (relay inside chamber)	cable loss 2 (inside chamber)	cable loss 3 (outside chamber)	cable loss 4 (switch unit, attenuator & pre-amp)	cable loss 5 (to receiver)	used for FCC 15.247
dB	dB	dB	dB	dB	
0.47	1.87	0.53	-27.58	1.33	
0.56	2.41	0.67	-28.23	1.31	
0.61	2.78	0.86	-27.35	1.40	
0.58	2.74	0.90	-26.89	1.47	
0.66	2.82	0.86	-25.58	1.46	

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
7000	35.6	-57.3
8000	36.3	-56.3
9000	37.1	-55.3
10000	37.5	-56.2
11000	37.5	-55.3
12000	37.6	-53.7
13000	38.2	-53.5
14000	39.9	-56.3
15000	40.9	-54.1
16000	41.3	-54.1
17000	42.8	-54.4
18000	44.2	-54.7

cable loss 1 (relay inside chamber)	cable loss 2 (High Pass)	cable loss 3 (pre-amp)	cable loss 4 (inside chamber)	cable loss 5 (outside chamber)	cable loss 6 (to receiver)
dB	dB	dB	dB	dB	dB
0.56	1.28	-62.72	2.66	0.94	1.46
0.69	0.71	-61.49	2.84	1.00	1.53
0.68	0.65	-60.80	3.06	1.09	1.60
0.70	0.54	-61.91	3.28	1.20	1.67
0.80	0.61	-61.40	3.43	1.27	1.70
0.84	0.42	-59.70	3.53	1.26	1.73
0.83	0.44	-59.81	3.75	1.32	1.83
0.91	0.53	-63.03	3.91	1.40	1.77
0.98	0.54	-61.05	4.02	1.44	1.83
1.23	0.49	-61.51	4.17	1.51	1.85
1.36	0.76	-62.36	4.34	1.53	2.00
1.70	0.53	-62.88	4.41	1.55	1.91

Sample calculation

$$E (\text{dB } \mu\text{V/m}) = U (\text{dB } \mu\text{V}) + \text{AF (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)
 Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

6.5 ANTENNA EMCO 3160-09 (18 GHZ – 26.5 GHZ)

Frequency	AF EMCO 3160-09	Corr.	cable	cable	cable	cable	cable
			loss 1 (inside chamber)	loss 2 (pre- amp)	loss 3 (inside chamber)	loss 4 (switch unit)	loss 5 (to receiver)
MHz	dB (1/m)	dB	dB	dB	dB	dB	dB
18000	40.2	-23.5	0.72	-35.85	6.20	2.81	2.65
18500	40.2	-23.2	0.69	-35.71	6.46	2.76	2.59
19000	40.2	-22.0	0.76	-35.44	6.69	3.15	2.79
19500	40.3	-21.3	0.74	-35.07	7.04	3.11	2.91
20000	40.3	-20.3	0.72	-34.49	7.30	3.07	3.05
20500	40.3	-19.9	0.78	-34.46	7.48	3.12	3.15
21000	40.3	-19.1	0.87	-34.07	7.61	3.20	3.33
21500	40.3	-19.1	0.90	-33.96	7.47	3.28	3.19
22000	40.3	-18.7	0.89	-33.57	7.34	3.35	3.28
22500	40.4	-19.0	0.87	-33.66	7.06	3.75	2.94
23000	40.4	-19.5	0.88	-33.75	6.92	3.77	2.70
23500	40.4	-19.3	0.90	-33.35	6.99	3.52	2.66
24000	40.4	-19.8	0.88	-33.99	6.88	3.88	2.58
24500	40.4	-19.5	0.91	-33.89	7.01	3.93	2.51
25000	40.4	-19.3	0.88	-33.00	6.72	3.96	2.14
25500	40.5	-20.4	0.89	-34.07	6.90	3.66	2.22
26000	40.5	-21.3	0.86	-35.11	7.02	3.69	2.28
26500	40.5	-21.1	0.90	-35.20	7.15	3.91	2.36

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB } 1/\text{m)} + \text{Corr. (dB)}$$

U = Receiver reading


AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.


Table shows an extract of values.

7 SETUP DRAWINGS

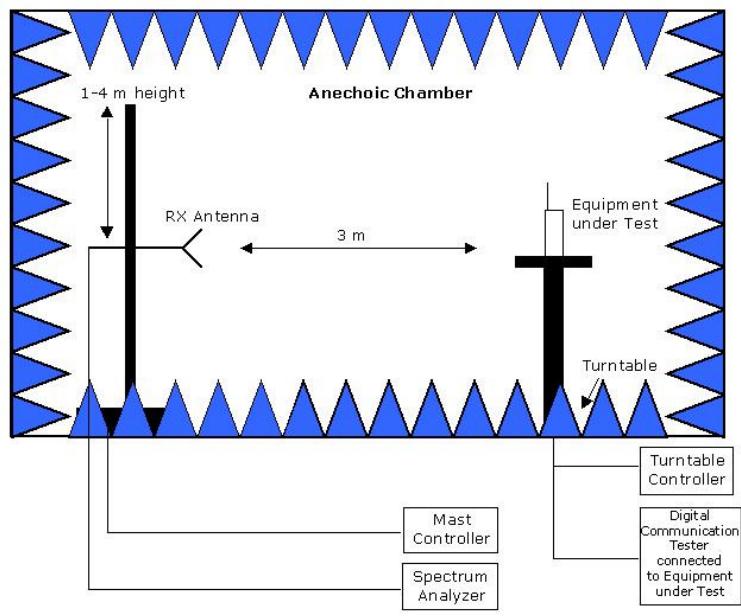

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Drawing 1: Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting groundplane.

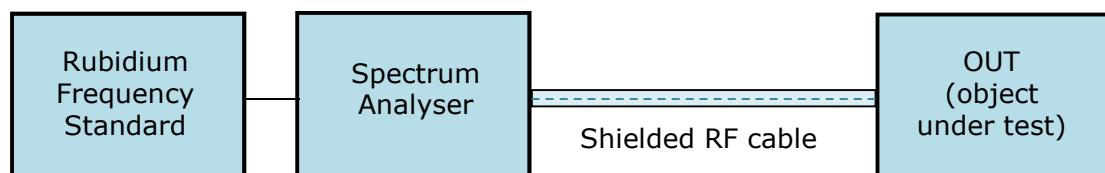

Drawing 2: Setup for conducted radio tests.

8 MEASUREMENT UNCERTAINTIES

Test Case	Parameter	Uncertainty
AC Power Line	Power	± 3.4 dB
Field Strength of spurious radiation	Power	± 5.5 dB
6 dB / 26 dB / 99% Bandwidth	Power Frequency	± 2.9 dB ± 11.2 kHz
Conducted Output Power	Power	± 2.2 dB
Band Edge Compliance	Power Frequency	± 2.2 dB ± 11.2 kHz
Frequency Stability	Frequency	± 25 Hz
Power Spectral Density	Power	± 2.2 dB

9 PHOTO REPORT

Please see separate photo report.