



No. 1 Workshop, M-10, Middle section, Science & Technology Park,  
 Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053  
 Fax: +86 (0) 755 2671 0594  
 Email: ee.shenzhen@sgs.com


Report No.: HR/2018/9000301  
 Page: 1 of 46

# FCC & IC TEST REPORT

**Application No:** HR/2018/90003  
**Applicant:** Anima AB  
**Address of Applicant:** Vastra Varvsgatan 19  
 ATT: Mikael Henning  
 Malm, S21177  
 Sweden  
**Manufacturer:** Anima AB  
**Address of Manufacturer:** Vastra Varvsgatan 19  
 ATT: Mikael Henning  
 Malm, S21177  
 Sweden  
**Factory:** GoerTek Inc.  
**Address of Factory:** No.8877 Yingqian Street,High-Tech Industrial Development  
 District,Weifang,Shandong,261031, P.R.China  
**Product Name:** Wireless connected hybrid smart watch movement  
**Model No:** BT003NFC  
**Trade Mark:** Kronaby  
**FCC ID:** 2AKPL-BT003NFC  
**IC ID:** 22272-BT003NFC  
**Standards:** 47 CFR FCC Part 2, Subpart J  
 47 CFR Part 15, Subpart C  
 IC RSS-Gen (Issue 5, April 2018)  
 IC RSS-247 (Issue 2, February 2017)  
**Test Method:** KDB 558074 D01 DTS Meas Guidance v04  
 ANSI C63.10 (2013)  
**Date of Receipt:** 2018-09-01  
**Date of Test:** 2018-09-02 to 2018-09-30  
**Date of Issue:** 2018-10-16

<b>Test Result:</b>	<b>PASS *</b>
---------------------	---------------

Authorized Signature:



Derek Yang  
 Wireless Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



\* In the configuration tested, the EUT complied with the standards specified above.



# 1 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2018-10-16		Original

Authorized for issue by:			
Tested By		<i>Mike Hu</i>	2018-10-16
		<hr/> <b>(Mike Hu) /Project Engineer</b>	<hr/> <b>Date</b>
Checked By		<i>David Chen</i>	2018-10-16
		<hr/> <b>(David Chen) /Reviewer</b>	<hr/> <b>Date</b>



## 2 Test Summary

Test Item	Test Requirement	Test method	Test Result	Result
<b>Conducted Peak Output Power</b>	15.247 (b)(3) RSS-247, 5.4	ANSI C63.10 2013	Clause 4.2	PASS
<b>DTS (6 dB) Bandwidth &amp; OBW</b>	15.247 (a)(2) RSS-247, 5.2 RSS-Gen, 6.6	ANSI C63.10 2013	Clause 4.3	PASS
<b>Power Spectral Density</b>	15.247 (e) RSS-247, 5.2	ANSI C63.10 2013	Clause 4.4	PASS
<b>Band-edge for RF Conducted Emissions</b>	15.247(d) RSS-247, 5.5	ANSI C63.10 2013	Clause 4.5	PASS
<b>RF Conducted Spurious Emissions</b>	15.247(d) RSS-247, 5.5	ANSI C63.10 2013	Clause 4.6	PASS
<b>Radiated Spurious Emissions</b>	15.205/15.209 RSS-247, 5.5 RSS-Gen, 6.13	ANSI C63.10 2013	Clause 4.7	PASS
<b>Restricted bands around fundamental frequency (Radiated Emission)</b>	15.205/15.209 RSS-247, 5.5 RSS-Gen, 6.13	ANSI C63.10 2013	Clause 4.8	PASS



## Contents

	Page
<b>1 VERSION .....</b>	<b>3</b>
<b>2 TEST SUMMARY .....</b>	<b>4</b>
<b>CONTENTS.....</b>	<b>5</b>
<b>3 GENERAL INFORMATION .....</b>	<b>6</b>
3.1 CLIENT INFORMATION .....	6
3.2 GENERAL DESCRIPTION OF EUT .....	6
3.3 TEST ENVIRONMENT .....	8
3.4 DESCRIPTION OF SUPPORT UNITS .....	8
3.5 TEST LOCATION .....	8
3.6 TEST FACILITY .....	8
3.7 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2) .....	9
3.8 EQUIPMENT LIST .....	10
<b>4 TEST RESULTS AND MEASUREMENT DATA .....</b>	<b>12</b>
4.1 ANTENNA REQUIREMENT .....	12
4.2 CONDUCTED PEAK OUTPUT POWER .....	13
4.2.1 <i>Test plots:</i> .....	14
4.3 DTS (6 DB) BANDWIDTH & OBW .....	16
4.3.1 <i>Test plots</i> .....	17
4.4 POWER SPECTRAL DENSITY .....	20
4.4.1 <i>Test plots</i> .....	21
4.5 BAND-EDGE FOR RF CONDUCTED EMISSIONS .....	23
4.5.1 <i>Test plots</i> .....	24
4.6 SPURIOUS RF CONDUCTED EMISSIONS .....	25
4.6.1 <i>Test plots:</i> .....	26
4.7 RADIATED SPURIOUS EMISSION .....	28
4.7.1 <i>Radiated Emission below 1GHz</i> .....	31
4.7.2 <i>Transmitter Emission above 1GHz</i> .....	34
4.8 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY .....	40
4.8.1 <i>Test plots</i> .....	42
<b>5 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS .....</b>	<b>46</b>



### 3 General Information

#### 3.1 Client Information

Applicant:	Anima AB
Address of Applicant:	Vastra Varvsgatan 19 ATT: Mikael Henning Malm, S21177 Sweden
Manufacturer:	Anima AB
Address of Manufacturer:	Vastra Varvsgatan 19 ATT: Mikael Henning Malm, S21177 Sweden
Factory:	GoerTek Inc.
Address of Factory:	No.8877 Yingqian Street,High-Tech Industrial Development District,Weifang,Shandong,261031, P.R.China

#### 3.2 General Description of EUT

Product Name:	Wireless connected hybrid smart watch movement
Model No.:	BT003NFC
Trade Mark:	Kronaby
Hardware Version:	A1000-3005_C
Software Version:	20180731.01.03
Operation Frequency:	2402MHz~2480MHz fc = 2402 MHz + N * 2 MHz, where: -fc = "Operating Frequency" in MHz, -N = "Channel Number" with the range from 0 to 39.
Bluetooth Version:	5.0 BT Signal mode (This report is for BLE mode.)
Modulation Type:	GFSK
Number of Channel:	40
Sample Type:	<input checked="" type="checkbox"/> Portable Device, <input type="checkbox"/> Module
Antenna Type:	<input type="checkbox"/> External, <input checked="" type="checkbox"/> Integrated
Antenna Gain:	-4.5dBi
Power Supply	<input type="checkbox"/> AC/DC Adapter; <input checked="" type="checkbox"/> Battery; <input type="checkbox"/> PoE; <input type="checkbox"/> Other;



Operation Frequency of each channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
2	2406MHz	12	2426MHz	22	2446MHz	32	2466MHz
3	2408MHz	13	2428MHz	23	2448MHz	33	2468MHz
4	2410MHz	14	2430MHz	24	2450MHz	34	2470MHz
5	2412MHz	15	2432MHz	25	2452MHz	35	2472MHz
6	2414MHz	16	2434MHz	26	2454MHz	36	2474MHz
7	2416MHz	17	2436MHz	27	2456MHz	37	2476MHz
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

Remark:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel (CH0)	2402MHz
The middle channel (CH19)	2440MHz
The highest channel (CH39)	2480MHz



### 3.3 Test Environment

Operating Environment	
Temperature:	25.0 °C
Humidity:	50 % RH
Atmospheric Pressure:	101.32 KPa

### 3.4 Description of Support Units

The EUT has been tested independent unit.

### 3.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.  
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

### 3.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• **VCCI**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

• **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.



### 3.7 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	±0.75dB
2	RF power density, conducted	±2.84dB
3	Spurious emissions, conducted	±0.75dB
4	Radiated Spurious emission test	±4.5dB (30MHz-1GHz)
		±4.8dB (1GHz-25GHz)
5	Conduct emission test	±3.12 dB(9KHz- 30MHz)
6	Temperature test	±1°C
7	Humidity test	±3%
8	DC and low frequency voltages	±0.5%



### 3.8 Equipment List

Conducted Emission					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal. Due date
				(yyyy-mm-dd)	(yyyy-mm-dd)
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2017/5/10	2020/5/9
LISN	Rohde & Schwarz	ENV216	SEM007-01	2018/9/2	2019/9/2
LISN	ETS-LINDGREN	Feb-16	SEM007-02	2018/4/2	2019/4/1
Measurement Software	AUDIX	e3 V5.4.1221d	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2018/7/12	2019/7/11
2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T2-02	EMC0122	2018/2/14	2019/2/13
EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2018/4/2	2019/4/1
RF conducted test					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal. Due date
				(yyyy-mm-dd)	(yyyy-mm-dd)
DC Power Supply	Agilent Technologies Inc	66311B	W009-09	2018/9/15	2019/9/15
Signal Analyzer	Rohde & Schwarz	FSV	W025-05	2018/3/13	2019/3/12
Coaxial Cable	SGS	N/A	SEM031-01	2018/7/13	2019/7/12
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2018/9/2	2019/9/2
Temperature Chamber	GIANT FORCE	ICT-150-40-CP-AR	W027-03	2018/11/27	2019/11/27
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2018/9/2	2019/9/2

RE in Chamber					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal. Due date
				(yyyy-mm-dd)	(yyyy-mm-dd)
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2017/8/5	2020/8/4
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM025-01	2018/7/12	2019/7/11
MXE EMI Receiver (20Hz-8.4GHz)	Agilent Technologies	N9038A	SEM004-05	2018/9/2	2019/9/2
BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEM003-01	2017/6/27	2020/6/26
Pre-amplifier (0.1-1.3GHz)	Agilent Technologies	8447D	SEM005-01	2018/4/2	2019/4/1



RE in Chamber					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2018/3/31	2021/3/30
EMI Test Receiver (9k-7GHz)	Rohde & Schwarz	ESR	SEM004-03	2018/4/2	2019/4/1
Trilog-Broadband Antenna(25M-2GHz)	Schwarzbeck	VULB9168	SEM003-18	2016/6/29	2019/6/28
Pre-amplifier (9k-1GHz)	Sonoma	310N	SEM005-03	2018/4/13	2019/4/12
Loop Antenna (9kHz-30MHz)	ETS-Lindgren	6502	SEM003-08	2017/8/22	2020/8/21
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM029-01	2018/7/12	2019/7/11

RE in Chamber					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal. Due date
				(yyyy-mm-dd)	(yyyy-mm-dd)
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018/3/13	2021/3/12
Measurement Software	AUDIX	e3V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2018/7/12	2019/7/11
EXA Signal Analyzer (10Hz-26.5GHz)	Agilent Technologies Inc	N9010A	SEM004-09	2018/4/13	2019/4/12
BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-01	2017/6/27	2020/6/26
Horn Antenna (0.8-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2018/4/13	2021/4/12
Pre-amplifier(0.1-1.3GHz)	HP	8447D	SEM005-02	2018/9/2	2019/9/2
Low Noise Amplifier(100MHz-18GHz)	Black Diamond Series	BDLNA-0118-352810	SEM005-05	2018/9/27	2019/9/27
Pre-amplifier(18-26GHz)	Rohde & Schwarz	CH14-H052	SEM005-17	2018/4/2	2019/4/1
Band filter	N/A	N/A	SEM023-01	N/A	N/A




## 4 Test results and Measurement Data

### 4.1 Antenna Requirement

<b>Standard requirement:</b>	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -4.5dBi.	

## 4.2 Conducted Peak Output Power

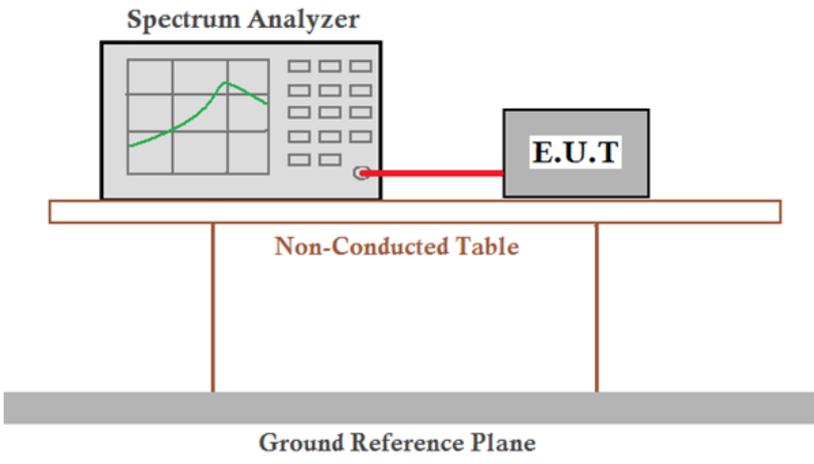Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10 :2013 Section 11.9.1.1
Test Setup:	
Limit:	30dBm
Test Mode:	Transmitting with GFSK modulation.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass

### Measurement Data

GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	4.29	30.00	Pass
Middle	4.24	30.00	Pass
Highest	4.22	30.00	Pass

**4.2.1 Test plots:**

**4.2.1.1 GFSK\_Lowest Channel**



Date: 13.SEP.2018 06:00:07

**4.2.1.2 GFSK\_Middle Channel**



Date: 13.SEP.2018 05:59:41




### 4.2.1.3 GFSK\_Highest Channel



Date: 13.SEP.2018 05:59:03


### 4.3 DTS (6 dB) Bandwidth & OBW

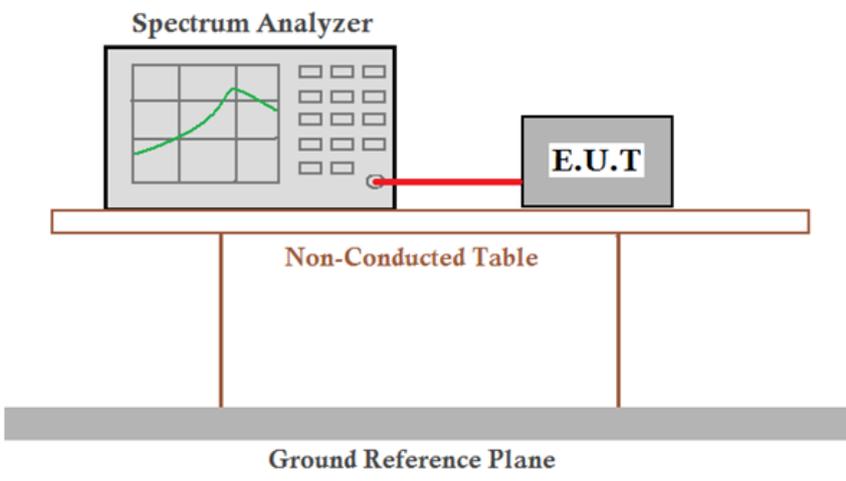Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10: 2013 Section 11.8 Option 2
Test Setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Limit:	≥ 500 kHz
Test Mode:	Transmitting with GFSK modulation.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass


Mode	Test Channel	Occupied Bandwidth (MHz)	6dB Emission Bandwidth (MHz)	Limit (kHz)	Result
GFSK	Lowest	1.06	0.70	≥500	Pass
	Middle	1.06	0.69	≥500	Pass
	Highest	1.06	0.69	≥500	Pass

**4.3.1 Test plots**

**4.3.1.1 GFSK\_Lowest Channel**

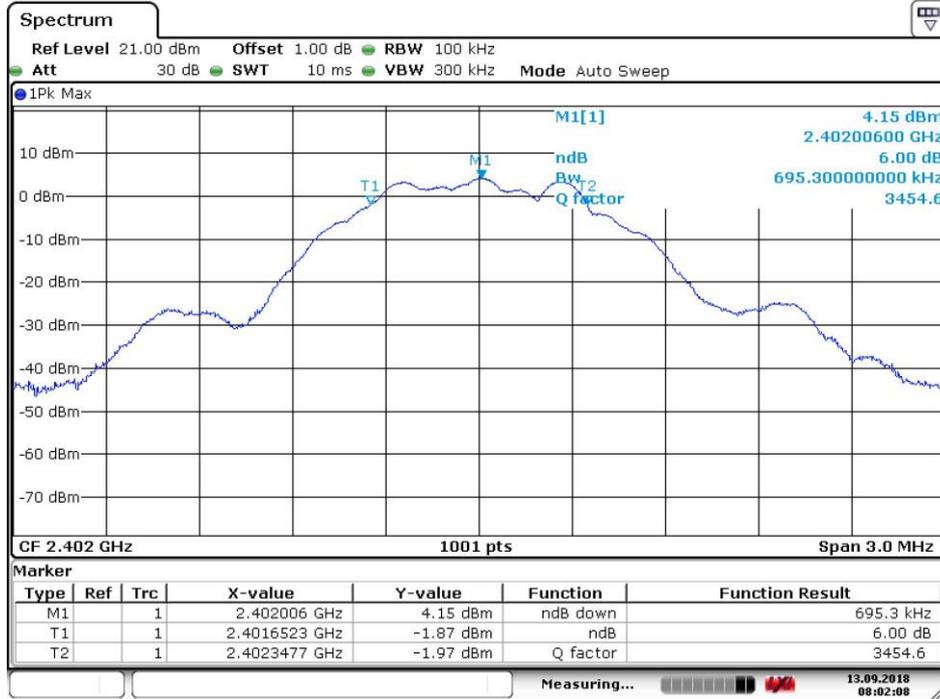


Date: 13.SEP.2018 08:02:09

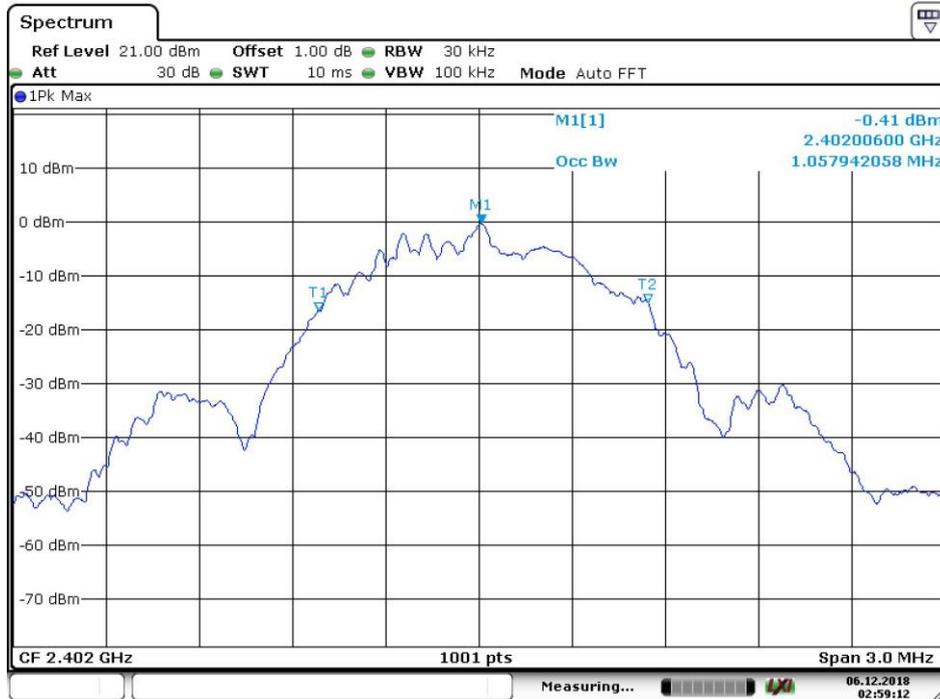

Date: 6.DEC.2018 02:59:12

**4.3.1.2 GFSK\_Middle Channel**

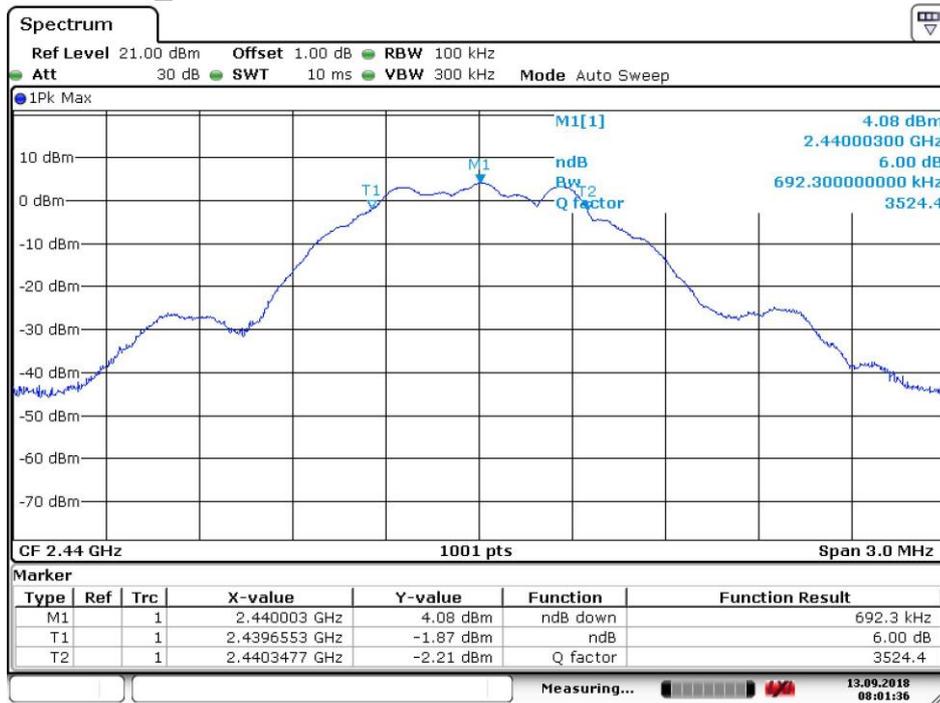


Date: 13.SEP.2018 08:01:37



Date: 6.DEC.2018 02:59:59

**4.3.1.3 GFSK\_Highest Channel**

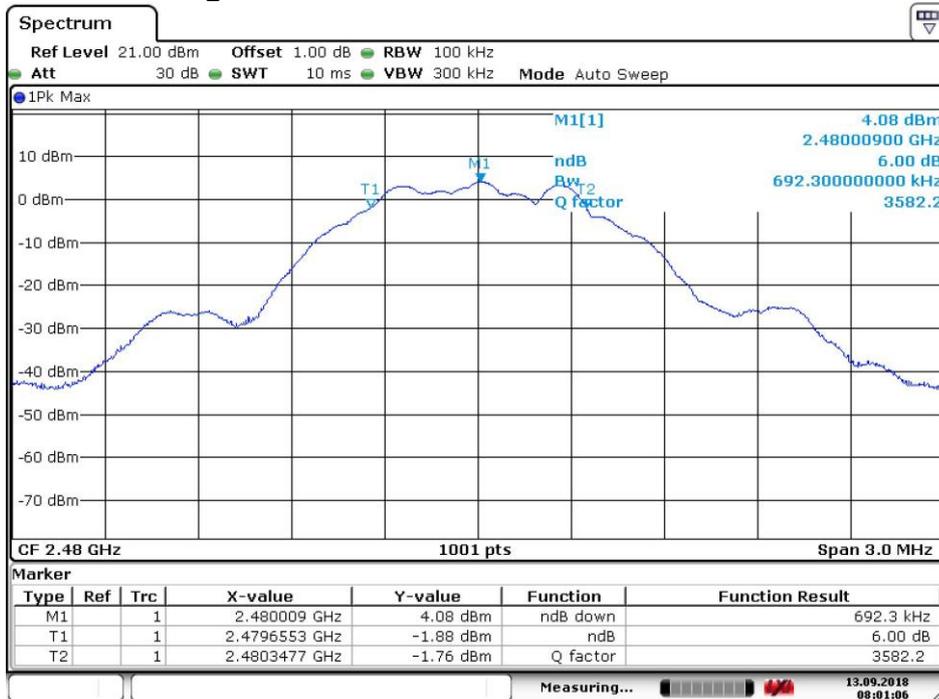


Date: 13.SEP.2018 08:01:06



Date: 6.DEC.2018 03:00:16


### 4.4 Power Spectral Density

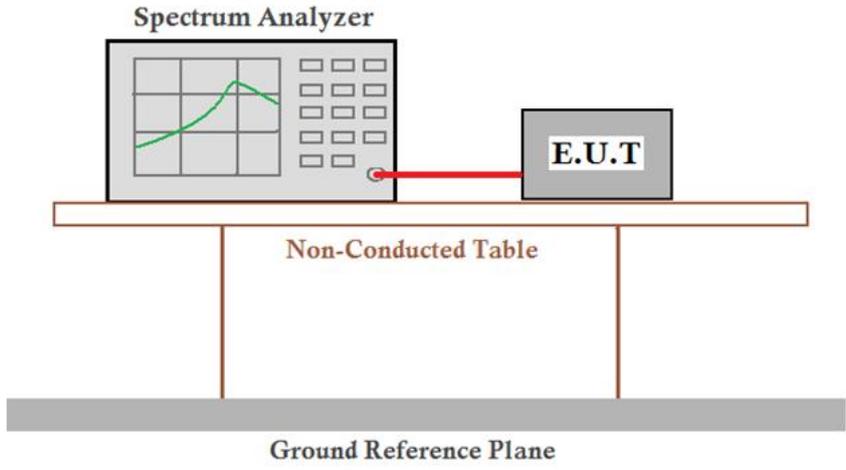Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10 :2013 Section 11.10.2
Test Setup:	
Limit:	$\leq 8.00 \text{ dBm/3kHz}$
Test Mode:	Transmitting with GFSK modulation.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass

Mode	Test Channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
GFSK	Lowest	-13.88	$\leq 8.00$	Pass
	Middle	-13.88	$\leq 8.00$	Pass
	Highest	-13.68	$\leq 8.00$	Pass


#### 4.4.1 Test plots

##### 4.4.1.1 GFSK\_Lowest Channel

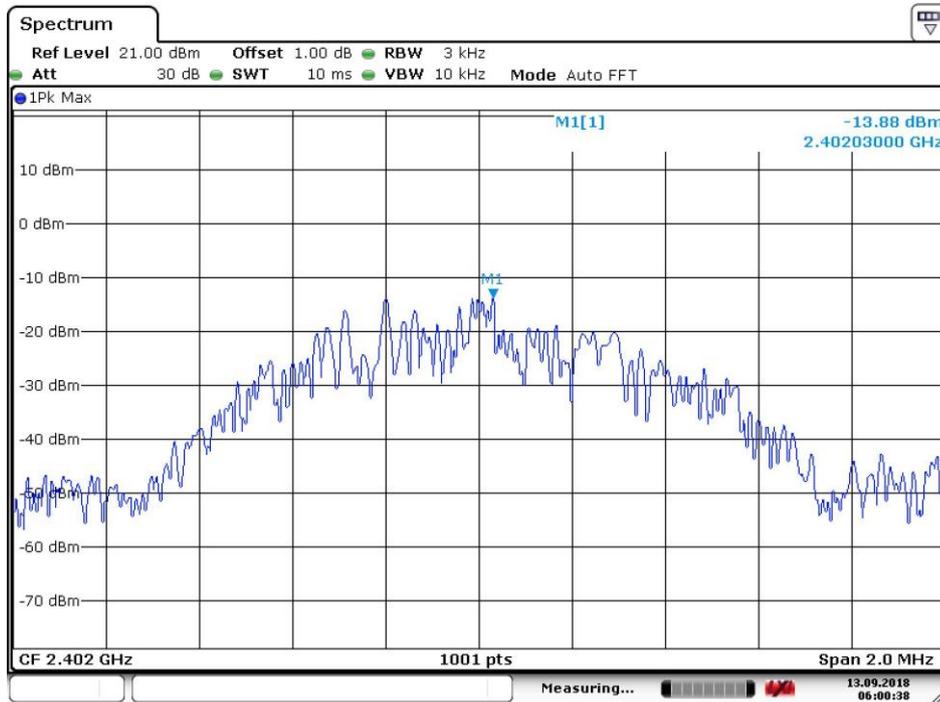

Date: 13.SEP.2018 06:00:38


##### 4.4.1.2 GFSK\_Middle Channel

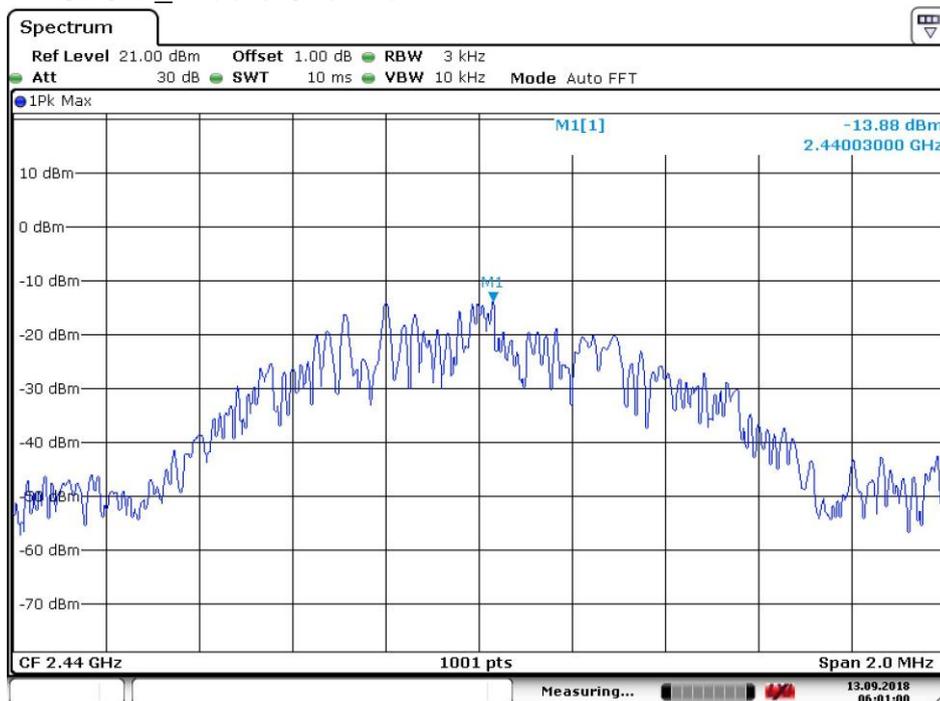

Date: 13.SEP.2018 06:01:01




4.4.1.3 GFSK\_Highest Channel

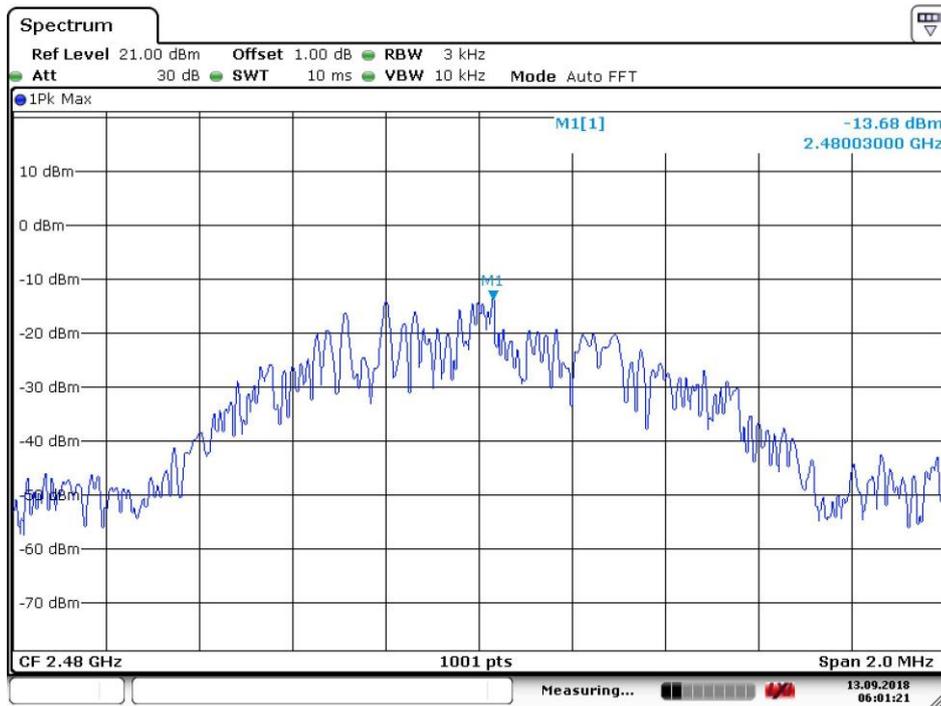


Date: 13.SEP.2018 06:01:21

### 4.5 Band-edge for RF Conducted Emissions

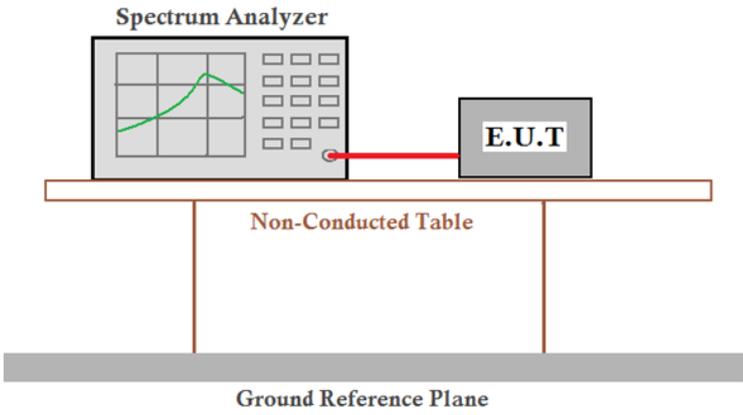Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013 Section 11.13
Test Setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The Non-Conducted Table is supported by two vertical legs and sits on a Ground Reference Plane.</p>
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Transmitting with GFSK modulation.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass


### 4.5.1 Test plots

#### 4.5.1.1 GFSK \_Lowest Channel

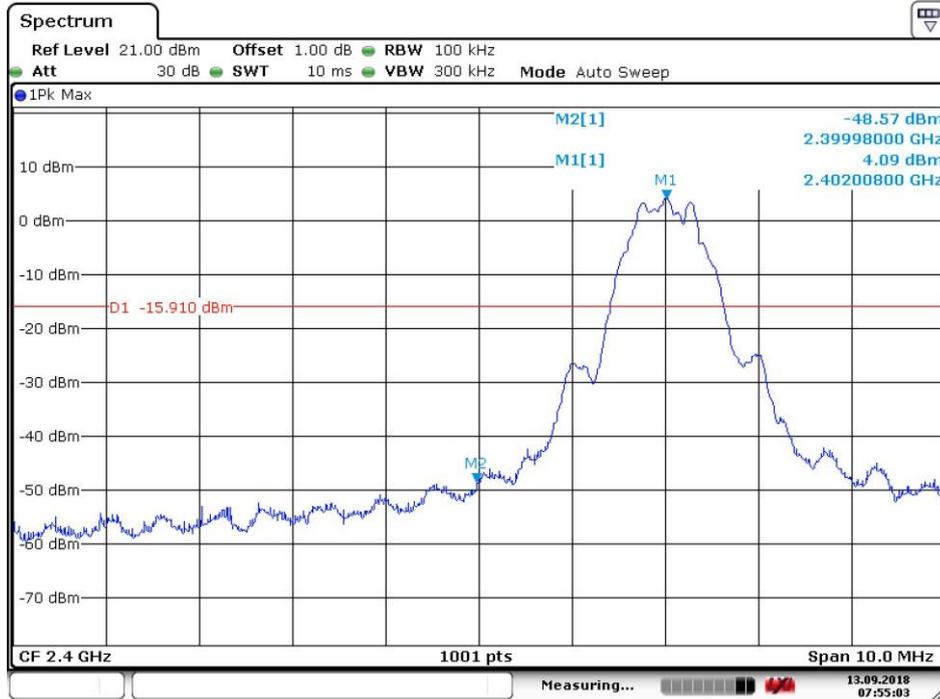


Date: 13.SEP.2018 07:55:02

#### 4.5.1.2 GFSK \_Highest Channel

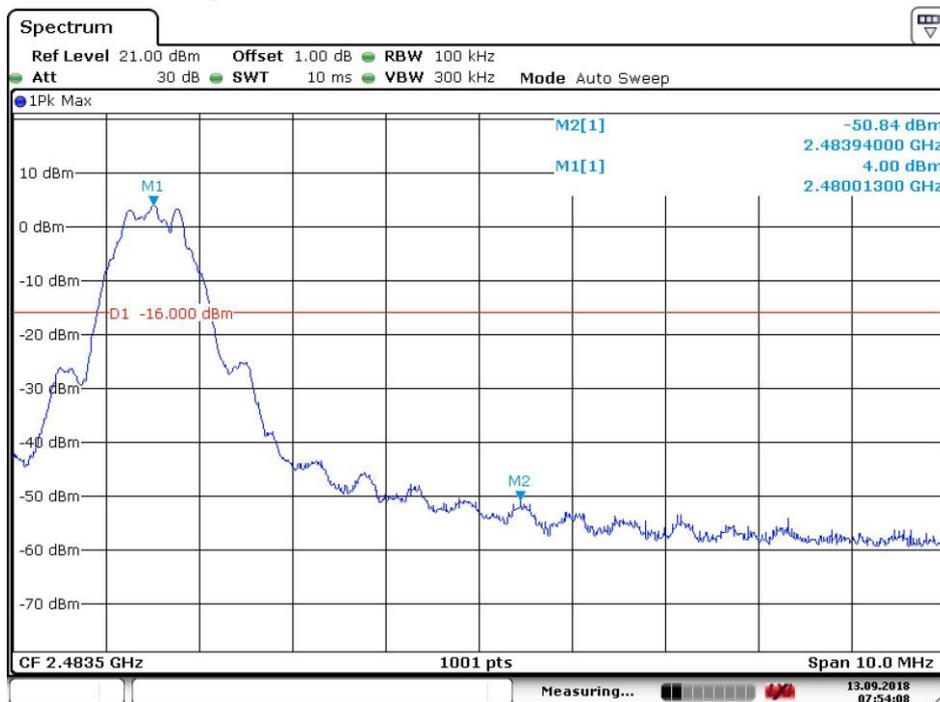


Date: 13.SEP.2018 07:54:08

### 4.6 Spurious RF Conducted Emissions

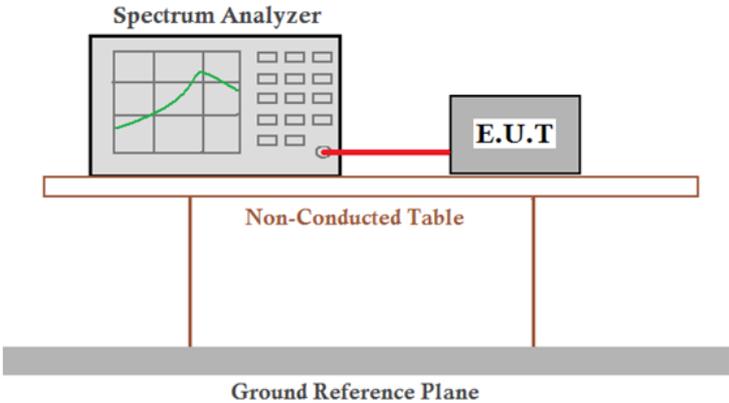Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013 Section 11.11
Test Setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.</p>
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Transmitting with GFSK modulation.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass


**4.6.1 Test plots:**

**4.6.1.1 GFSK\_Lowest Channel**

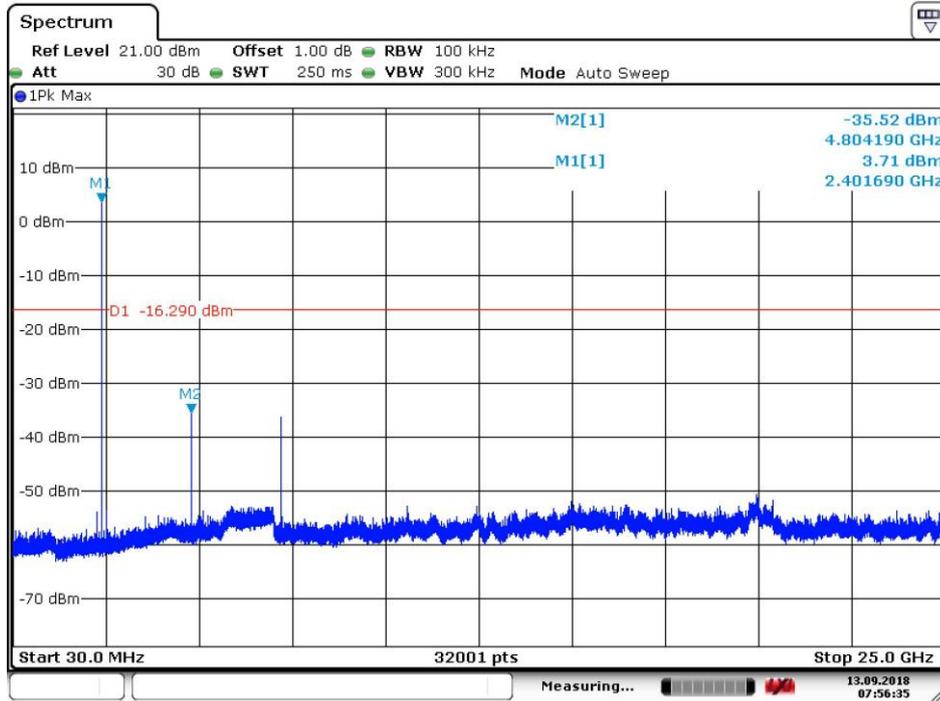


Date: 13.SEP.2018 07:56:35

**4.6.1.2 GFSK\_Middle Channel**

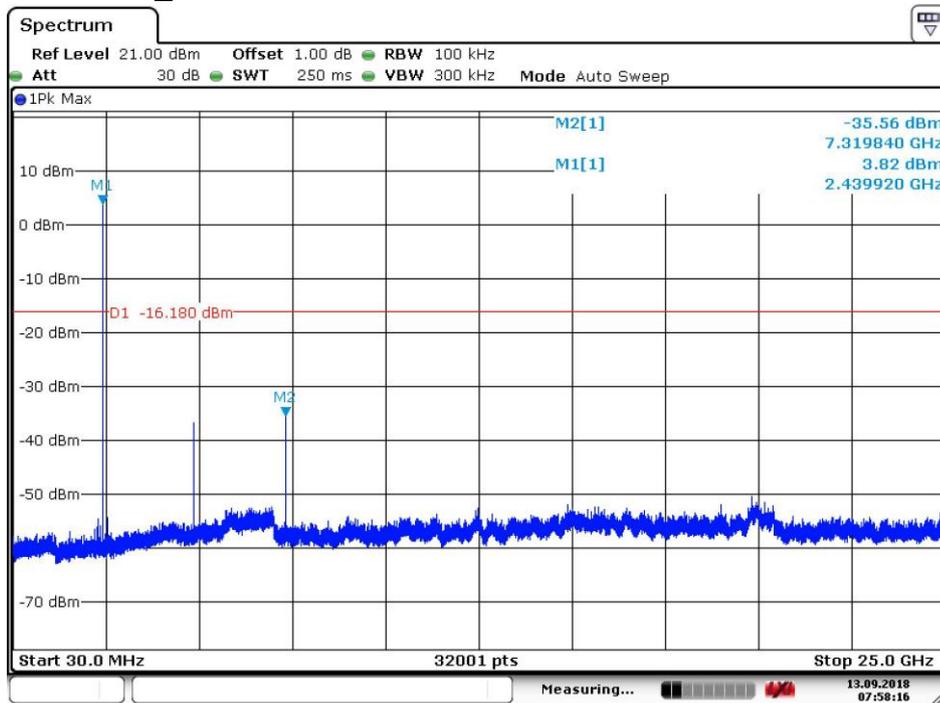

Date: 13.SEP.2018 07:58:17

**4.6.1.3 GFSK\_Highest Channel**

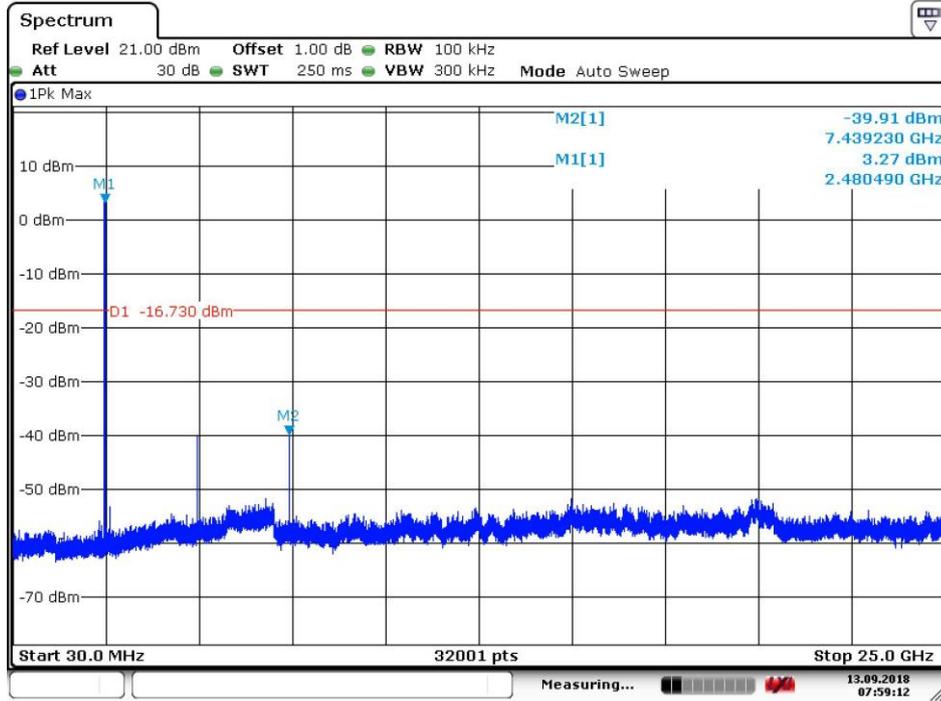

Date: 13.SEP.2018 07:59:13

**Remark:**

Scan from 9kHz to 25GHz, the disturbance between 9KHz to 30MHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.



### 4.7 Radiated Spurious Emission

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 :2013 Section 11.12				
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Remark: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

**Test Setup:**

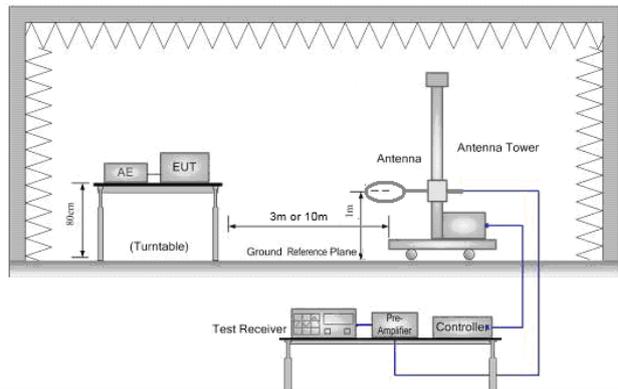


Figure 1. Below 30MHz

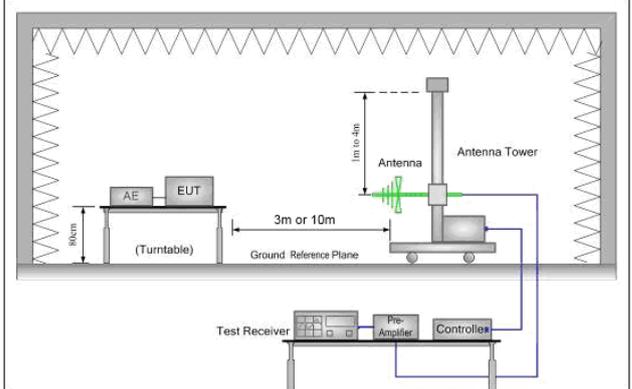


Figure 2. 30MHz to 1GHz

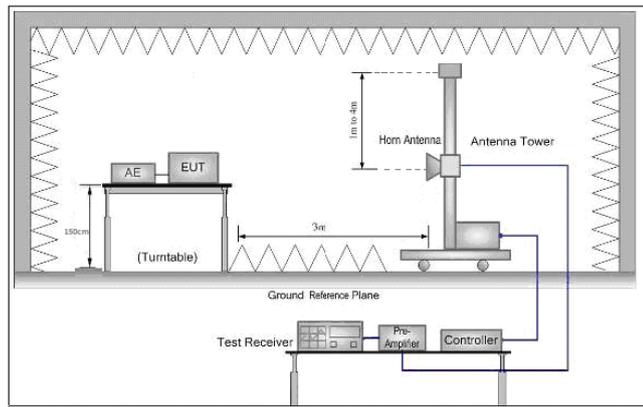


Figure 3. Above 1 GHz

**Test Procedure:**

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the



	<p>EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>h. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz)</p> <p>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>j. Repeat above procedures until all frequencies measured was complete.</p>
Exploratory Test Mode:	Transmitting with GFSK modulation. Charge + Transmitting mode.
Final Test Mode:	Transmitting with GFSK modulation. Pretest the EUT at Charge + Transmitting mode, For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass



#### 4.7.1 Radiated Emission below 1GHz

The test was performed at a 10m test site. According to below formulate and the test data at 10m test distance,

$$L_3 / L_{10} = D_{10} / D_3$$

Remark:

L<sub>3</sub>: Level @ 3m distance. Unit: uV/m;

L<sub>10</sub>: Level @ 10m distance. Unit: uV/m;


D<sub>3</sub>: 3m distance. Unit: m

D<sub>10</sub>: 10m distance. Unit: m

The level at 3m test distance is below:

Frequency (MHz)	Level @ 10m (dBuV/m)	Level @ 10m (uV/m)	Level @ 3m (uV/m)	Level @ 3m (dBuV/m)	Limit @ 3m (dBuV/m)	Over Limit (dB)	Ant. Polarization
55.22	13.91	4.96	16.53	24.37	40	-15.63	V
154.82	15.56	6.00	19.99	26.02	40	-13.98	V
246.81	15.14	5.71	19.05	25.60	40	-14.40	V
400.43	18.62	8.53	28.44	29.08	40	-10.92	V
601.43	23.07	14.24	47.47	33.53	43.5	-9.97	V
842.13	27.66	24.15	80.52	38.12	43.5	-5.38	V
59.65	13.88	4.94	16.48	24.34	40	-15.66	H
159.23	14.04	5.04	16.78	24.50	43.5	-19.00	H
280.02	14.47	5.29	17.64	24.93	43.5	-18.57	H
399.03	17.42	7.43	24.77	27.88	43.5	-15.62	H
549.02	21.9	12.45	41.48	32.36	46	-13.64	H
821.71	26.21	20.44	68.14	36.67	46	-9.33	H

**4.7.1.1 Charge + Transmitting, Vertical**

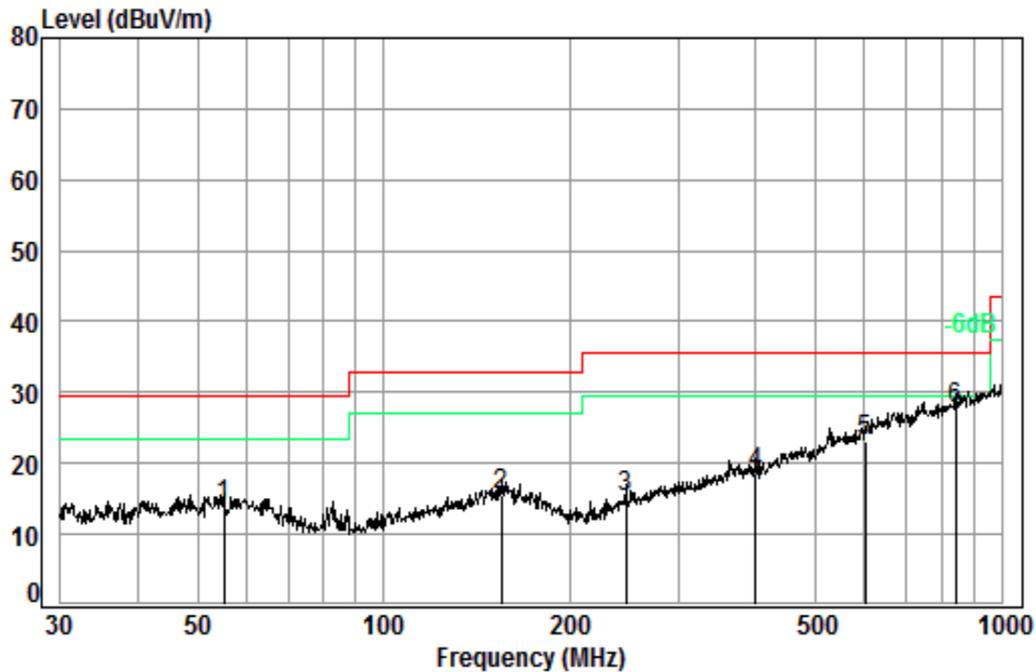


Condition: 10m VERTICAL

Job No. : 90003

Test Mode: b

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	55.22	7.00	12.40	32.45	26.96	13.91	29.50	-15.59
2	154.82	7.48	13.00	32.43	27.51	15.56	33.00	-17.44
3	246.81	7.84	11.34	32.38	28.34	15.14	35.60	-20.46
4	400.43	8.30	15.30	32.34	27.36	18.62	35.60	-16.98
5	601.43	8.90	20.04	32.37	26.50	23.07	35.60	-12.53
6 pp	842.13	9.31	22.52	31.91	27.74	27.66	35.60	-7.94

**4.7.1.2 Charge + Transmitting, Horizontal**

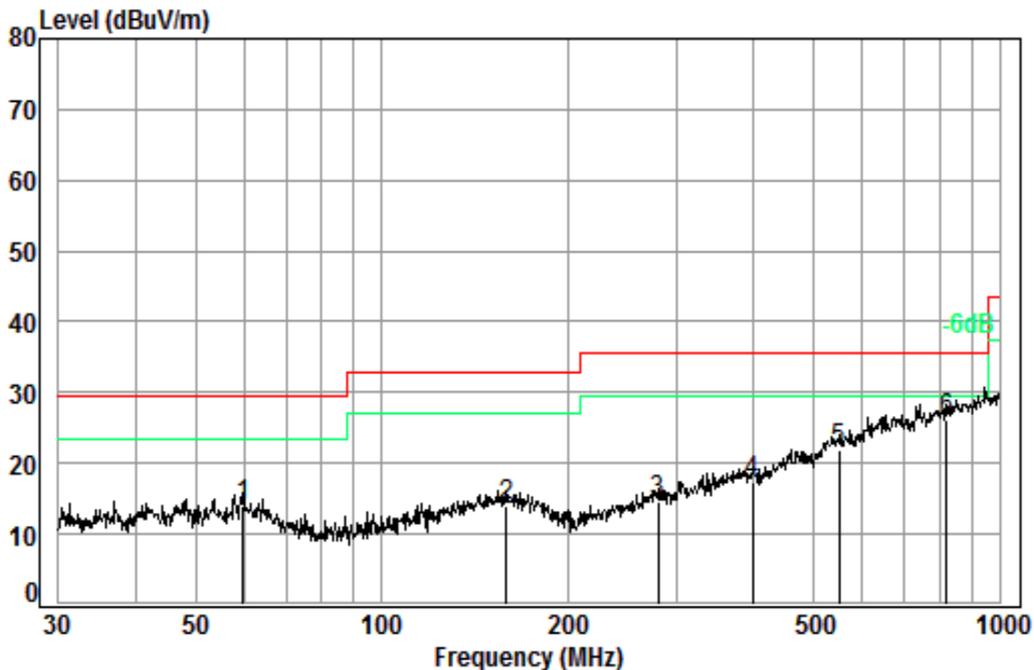

Condition: 10m HORIZONTAL


Job No. : 90003

Test Mode: b

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	59.65	7.00	12.47	32.46	26.87	13.88	29.50	-15.62
2	159.23	7.50	13.00	32.42	25.96	14.04	33.00	-18.96
3	280.02	8.00	12.40	32.37	26.44	14.47	35.60	-21.13
4	399.03	8.30	15.28	32.34	26.18	17.42	35.60	-18.18
5	549.02	8.77	18.49	32.36	27.00	21.90	35.60	-13.70
6 pp	821.71	9.30	22.12	32.03	26.82	26.21	35.60	-9.39

**4.7.2 Transmitter Emission above 1GHz**

**4.7.2.1 GFSK \_Lowest Channel\_ Peak\_ Vertical**

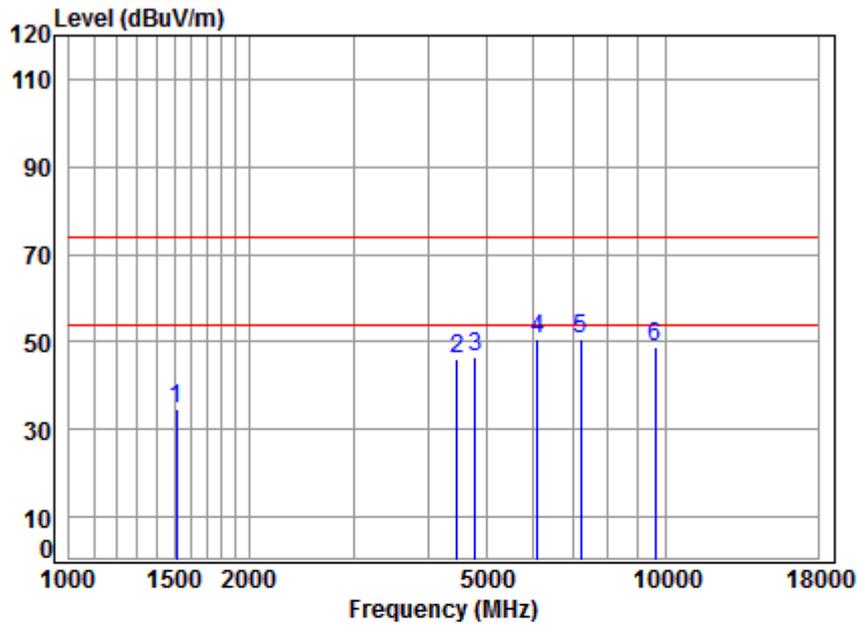


Site : chamber  
 Condition: 3m VERTICAL  
 Job No : 08632CR  
 Mode : 2402 TX RSE  
 Note : BLE

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1511.833	5.46	25.85	41.41	44.61	34.51	74.00	-39.49	peak
2	4469.214	7.53	33.55	42.41	47.19	45.86	74.00	-28.14	peak
3	4804.000	7.89	33.97	42.47	46.97	46.36	74.00	-27.64	peak
4	6088.991	10.75	35.19	41.54	46.20	50.60	74.00	-23.40	peak
5 pp	7206.000	10.08	36.07	40.71	45.17	50.61	74.00	-23.39	peak
6	9608.000	10.75	37.67	37.74	38.13	48.81	74.00	-25.19	peak



4.7.2.2 GFSK \_Middle Channel\_ Peak\_ Vertical

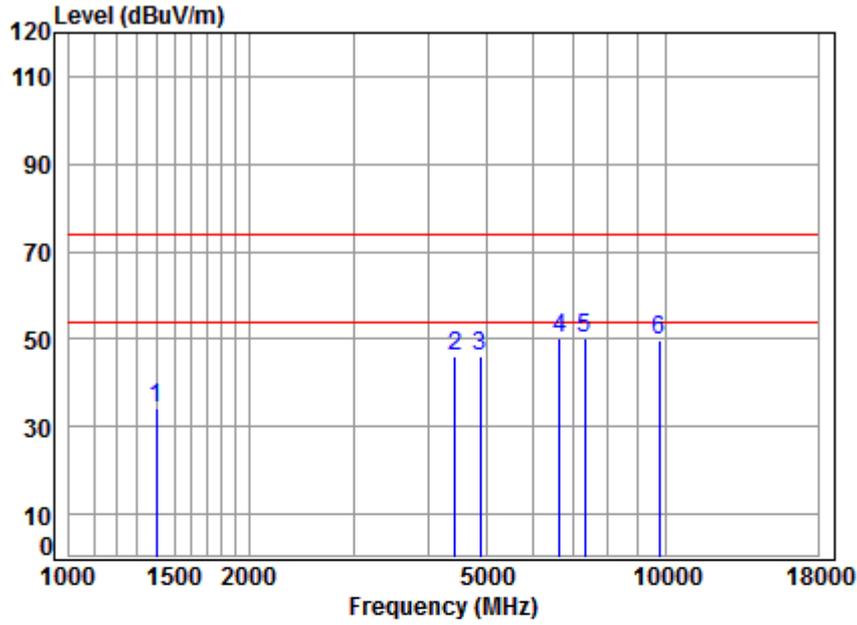


Site : chamber  
Condition: 3m VERTICAL  
Job No : 08632CR  
Mode : 2440 TX RSE  
Note : BLE

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1402.384	5.16	25.43	41.34	44.91	34.16	74.00	-39.84 peak
2	4443.453	7.50	33.50	42.41	47.59	46.18	74.00	-27.82 peak
3	4880.000	7.97	34.06	42.48	46.31	45.86	74.00	-28.14 peak
4 pp	6640.542	11.13	35.69	41.11	44.65	50.36	74.00	-23.64 peak
5	7320.000	10.05	36.16	40.63	44.58	50.16	74.00	-23.84 peak
6	9760.000	10.82	37.76	37.53	38.88	49.93	74.00	-24.07 peak




4.7.2.3 GFSK\_High Channel\_Peak\_Vertical

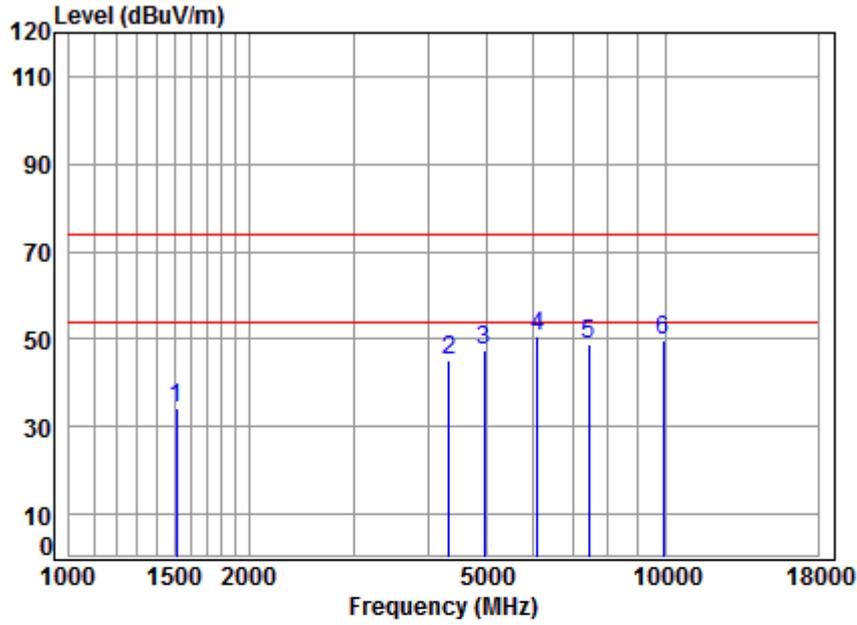

Site : chamber  
Condition: 3m VERTICAL  
Job No : 08632CR  
Mode : 2480 TX RSE  
Note : BLE

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1511.833	5.46	25.85	41.41	44.47	34.37	74.00 -39.63	peak
2	4329.354	7.37	33.30	42.39	46.76	45.04	74.00 -28.96	peak
3	4960.000	8.05	34.15	42.49	47.64	47.35	74.00 -26.65	peak
4 pp	6106.616	10.78	35.21	41.52	46.04	50.51	74.00 -23.49	peak
5	7440.000	10.02	36.25	40.56	43.29	49.00	74.00 -25.00	peak
6	9920.000	10.90	37.85	37.31	38.32	49.76	74.00 -24.24	peak

**4.7.2.4 GFSK \_Lowest Channel\_ Peak\_ Horizontal**

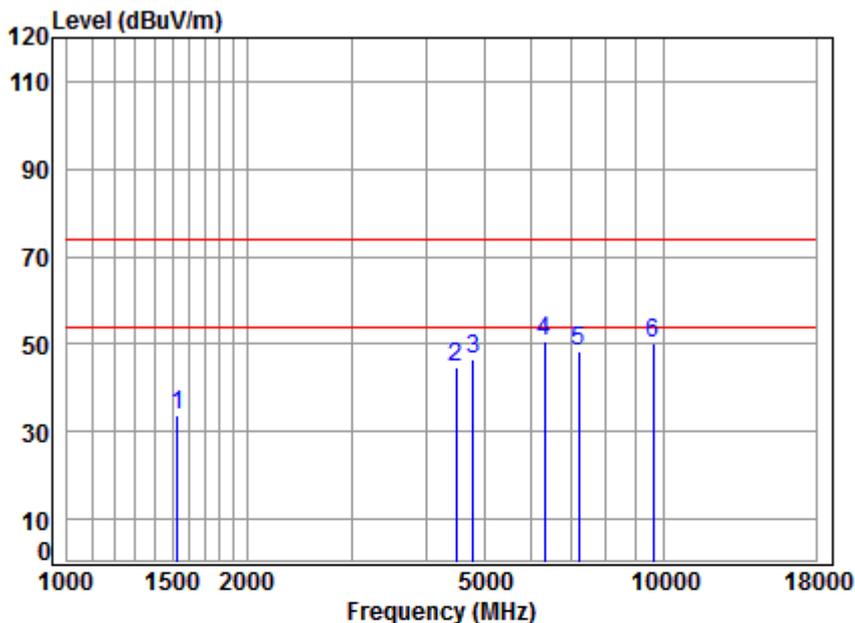


Site : chamber  
 Condition: 3m HORIZONTAL  
 Job No : 08632CR  
 Mode : 2402 TX RSE  
 Note : BLE

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1529.414	5.44	25.94	41.43	43.91	33.86	74.00	-40.14	peak
2	4482.150	7.54	33.57	42.41	46.16	44.86	74.00	-29.14	peak
3	4804.000	7.89	33.97	42.47	47.08	46.47	74.00	-27.53	peak
4	6322.136	11.20	35.43	41.35	45.46	50.74	74.00	-23.26	peak
5	7206.000	10.08	36.07	40.71	42.72	48.16	74.00	-25.84	peak
6	9608.000	10.75	37.67	37.74	39.70	50.38	74.00	-23.62	peak



4.7.2.5 GFSK \_Middle Channel\_ Peak\_ Horizontal

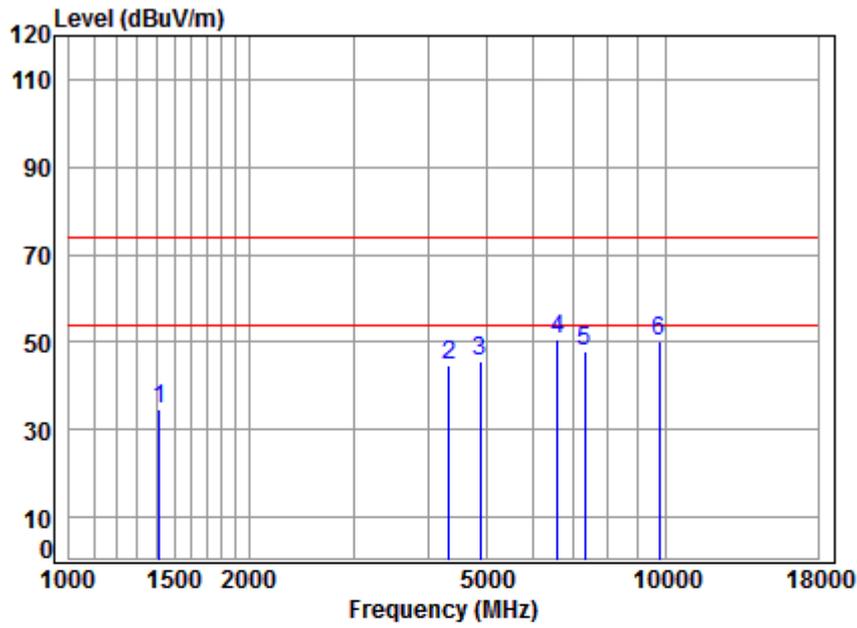


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 08632CR  
Mode : 2440 TX RSE  
Note : BLE

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1414.597	5.20	25.48	41.35	45.15	34.48	74.00	-39.52 peak
2	4329.354	7.37	33.30	42.39	46.64	44.92	74.00	-29.08 peak
3	4880.000	7.97	34.06	42.48	45.99	45.54	74.00	-28.46 peak
4	pp 6602.265	11.24	35.66	41.14	44.80	50.56	74.00	-23.44 peak
5	7320.000	10.05	36.16	40.63	42.46	48.04	74.00	-25.96 peak
6	9760.000	10.82	37.76	37.53	39.01	50.06	74.00	-23.94 peak



4.7.2.6 GFSK\_High Channel\_Peak\_Horizontal

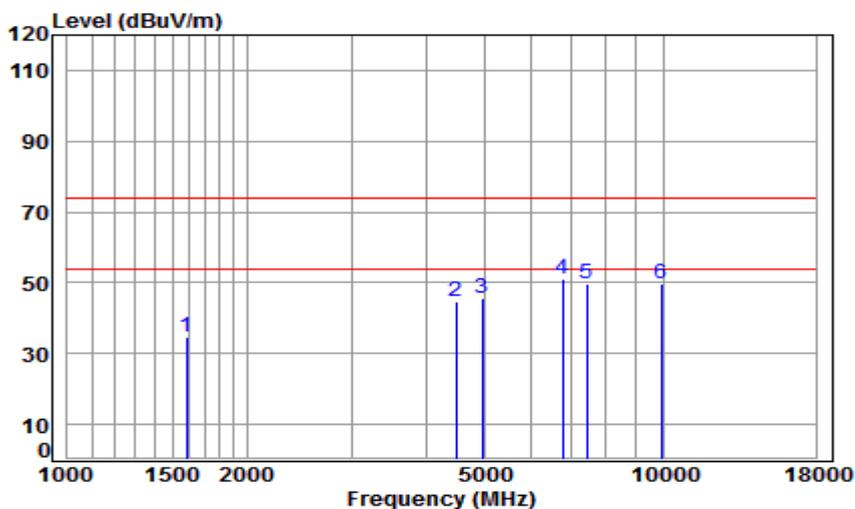

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 08632CR  
Mode : 2480 TX RSE  
Note : BLE

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1587.975	5.37	26.20	41.46	44.75	34.86	74.00	-39.14	peak
2	4482.150	7.54	33.57	42.41	45.96	44.66	74.00	-29.34	peak
3	4960.000	8.05	34.15	42.49	46.12	45.83	74.00	-28.17	peak
4 pp	6776.265	10.75	35.77	41.01	45.55	51.06	74.00	-22.94	peak
5	7440.000	10.02	36.25	40.56	44.15	49.86	74.00	-24.14	peak
6	9920.000	10.90	37.85	37.31	38.21	49.65	74.00	-24.35	peak

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance between 9KHz to 30MHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.
- 4) All Modes have been tested, but only the worst case data displayed in this report.

### 4.8 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10: 2013 Section 11.12		
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:			

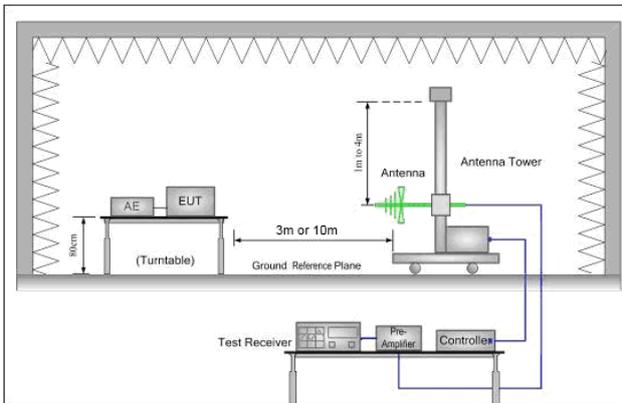


Figure 1. 30MHz to 1GHz

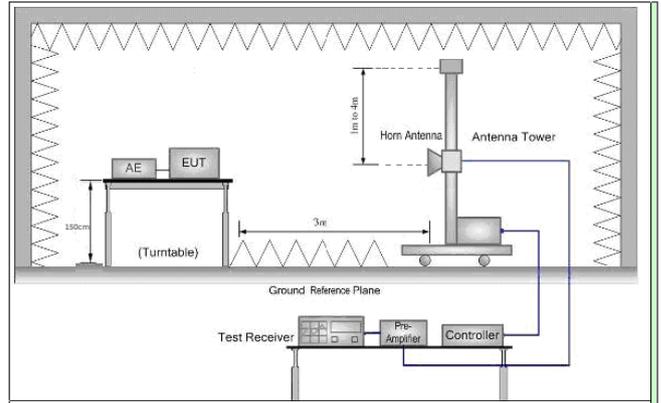


Figure 2. Above 1 GHz

Test Procedure:	<ol style="list-style-type: none"> <li>For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> <li>Test the EUT in the lowest channel, the Highest channel</li> <li>The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</li> <li>Repeat above procedures until all frequencies measured was complete.</li> </ol>
-----------------	---



**SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch**

Report No.: HR/2018/9000301


Page: 41 of 46

Exploratory Test Mode:	Transmitting with GFSK modulation. Charge + Transmitting mode.
Final Test Mode:	Transmitting with GFSK modulation. Pretest the EUT at Charge + Transmitting mode. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass



4.8.1 Test plots

4.8.1.1 Worst Case Mode(GFSK) Lowest Channel\_ Peak\_ Vertical

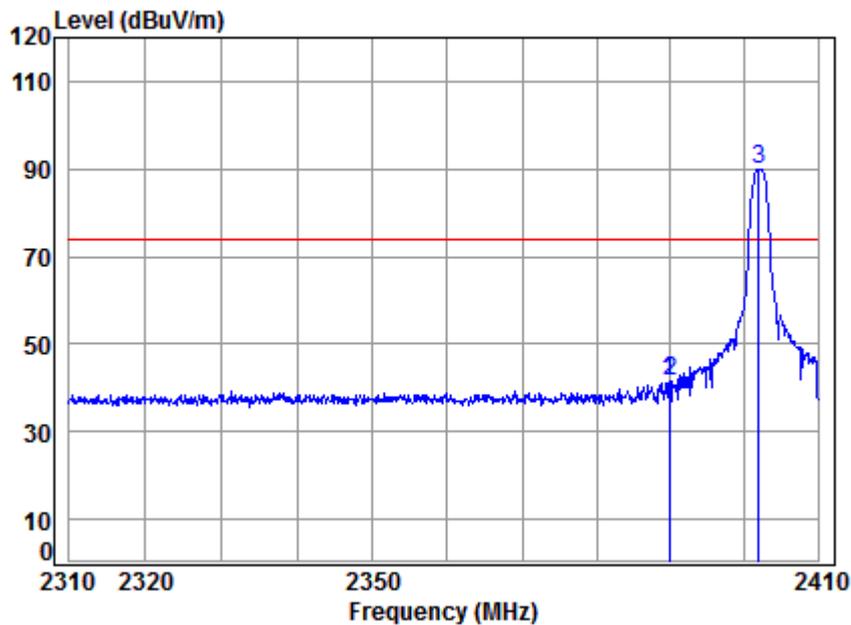


Site : chamber  
Condition: 3m VERTICAL  
Job No : 08632CR  
Mode : 2402 Band edge  
Note : BLE

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.761	5.47	28.52	41.87	49.46	41.58	74.00	-32.42	peak
2	2390.000	5.47	28.52	41.87	49.42	41.54	74.00	-32.46	peak
3 pp	2402.000	5.49	28.54	41.88	97.77	89.92	74.00	15.92	peak



4.8.1.2 Worst Case Mode(GFSK) Highest Channel\_ Peak\_ Vertical

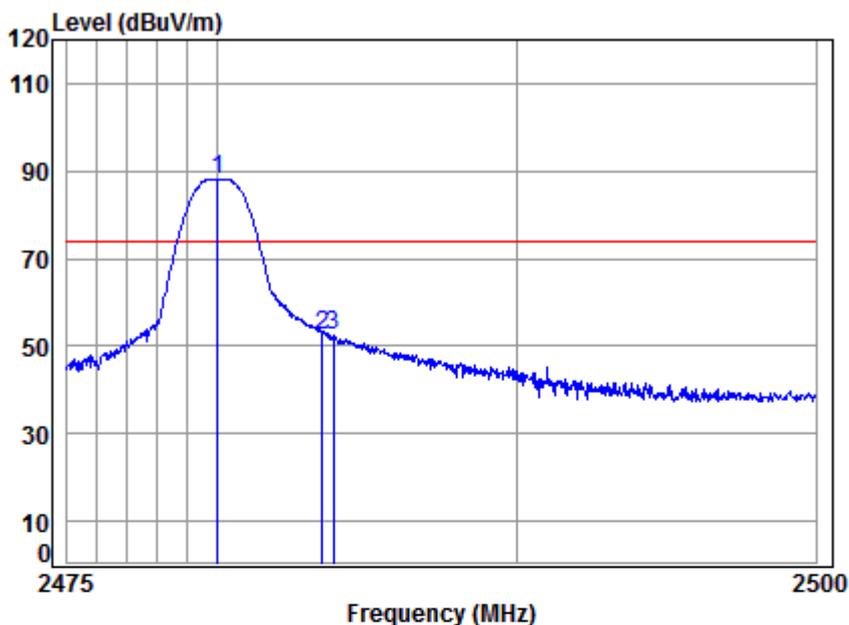


Site : chamber  
Condition: 3m VERTICAL  
Job No : 08632CR  
Mode : 2480 Band edge  
Note : BLE

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 2480.000	5.59	28.67	41.91	95.79	88.14	74.00	14.14	peak
2	2483.500	5.60	28.67	41.91	60.32	52.68	74.00	-21.32	peak
3	2483.846	5.60	28.67	41.91	60.14	52.50	74.00	-21.50	peak



4.8.1.3 Worst Case Mode(GFSK) Lowest Channel\_ Peak\_ Horizontal

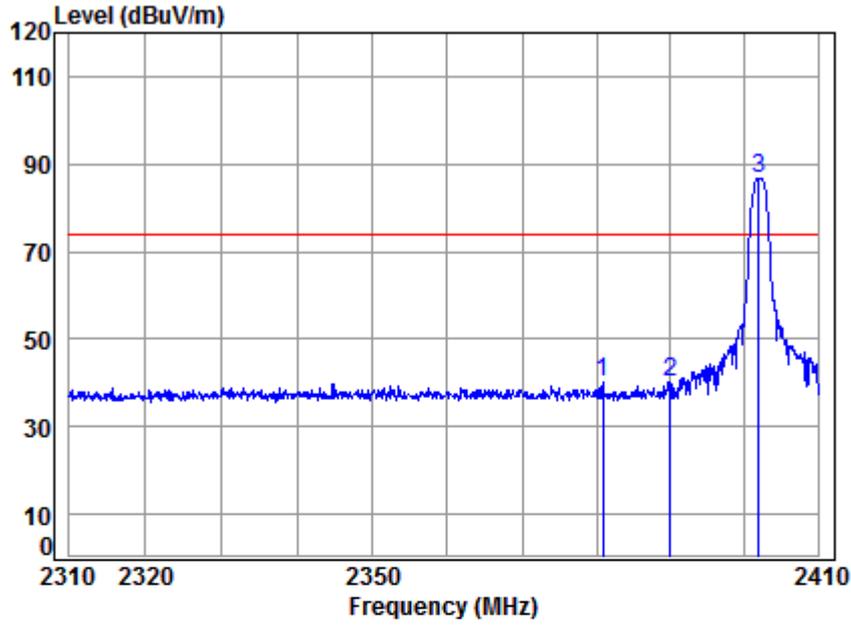


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 08632CR  
Mode : 2402 Band edge  
Note : BLE

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2380.865	5.46	28.50	41.87	47.88	39.97	74.00	-34.03 peak
2	2390.000	5.47	28.52	41.87	48.18	40.30	74.00	-33.70 peak
3	pp 2402.000	5.49	28.54	41.88	94.51	86.66	74.00	12.66 peak



4.8.1.4 Worst Case Mode(GFSK) Highest Channel\_ Peak\_ Horizontal

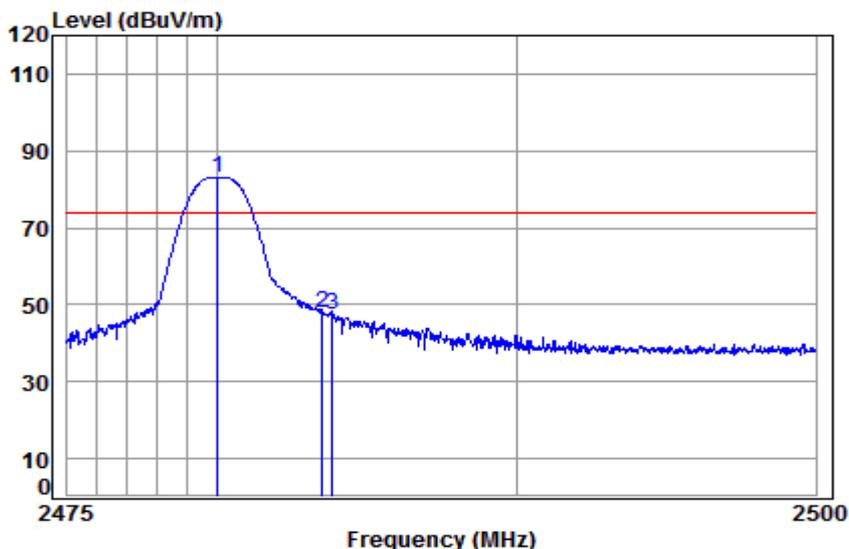

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 08632CR  
Mode : 2480 Band edge  
Note : BLE

		Cable	Ant	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 2480.000	5.59	28.67	41.91	90.68	83.03	74.00	9.03	peak
2	2483.500	5.60	28.67	41.91	55.39	47.75	74.00	-26.25	peak
3	2483.821	5.60	28.67	41.91	55.28	47.64	74.00	-26.36	peak

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$

For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

All Modes have been tested, but only the worst case data displayed in this report.



## **5 Photographs - EUT Constructional Details**

Refer to Appendix A - Photographs of EUT Constructional Details for HR/2018/90003.

---

The End