

EMC TEST REPORT



Report No.: Q181101S007-FCC-E

Supersede Report No: N/A

Applicant	Cedar Kingdom Corporation Limited
Product Name	Tablet
Model No.	VT701
Serial No.	N/A
Test Standard	FCC Part 15 Subpart B Class B, ANSI C63.4: 2014
Test Date	November 06 to December 05, 2018
Issue Date	December 06, 2018
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Equipment complied with the specification

Equipment did not comply with the specification

<i>Evans He</i>	<i>David Huang</i>	
Evans He Test Engineer	Checked By	

This test report may be reproduced in full only

Test result presented in this test report is applicable to the tested sample only

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY.....	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	8
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
6.1 AC POWER LINE CONDUCTED EMISSIONS.....	9
6.2 RADIATED EMISSIONS.....	15
ANNEX A. TEST INSTRUMENT.....	20
ANNEX B. TEST SETUP AND SUPPORTING EQUIPMENT.....	21
ANNEX C. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST/ DECLARATION OF SIMILARITY.....	24

1. Report Revision History

Report No.	Report Version	Description	Issue Date
Q181101S007-FCC-E	NONE	Original	December 06, 2018

2. Customer information

Applicant Name	Cedar Kingdom Corporation Limited
Applicant Add	11/F, AXA Centre 151 Gloucester Road, Wanchai, Hong Kong
Manufacturer	Cedar Kingdom Corporation Limited
Manufacturer Add	11/F, AXA Centre 151 Gloucester Road, Wanchai, Hong Kong

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	535293
IC Test Site No.	4842E-1
Test Software of Radiated Emission	Radiated Emission Program-To Shenzhen v2.0
Test Software of Conducted Emission	EZ-EMC(ver.lcp-03A1)

4. Equipment under Test (EUT) Information

Description of EUT: Tablet

Main Model: VT701

Serial Model: N/A

GSM850: -0.86dBi

PCS1900: 1.42dBi

UMTS-FDD Band V: -0.86dBi

Antenna Gain: UMTS-FDD Band II: 1.42dBi

WIFI: 1.5dBi

Bluetooth/BLE: 1.5dBi

GPS: 0.68dBi

Antenna Type: PIFA antenna

Adapter :

Model: VT701

Input Power: Input: AC100-240V~50/60Hz,0.5A

Output: DC 5.0V, 2A

Battery :

Spec: 3.7V, 2500mAh/9.25Wh

Equipment Category : JBC

GSM / GPRS: GMSK

UMTS-FDD: QPSK

802.11b/g/n: DSSS, OFDM

Type of Modulation: Bluetooth: GFSK, π /4DQPSK, 8DPSK

BLE: GFSK

GPS:BPSK

Test Report	Q181101S007-FCC-E
Page	7 of 24

RF Operating Frequency (ies):

GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz
PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz
UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz
UMTS-FDD Band II TX: 1852.4 ~ 1907.6 MHz;
RX: 1932.4 ~ 1987.6 MHz
WIFI: 802.11b/g/n(20M): 2412-2462 MHz
Bluetooth& BLE: 2402-2480 MHz
GPS: 1575.42 MHz

Number of Channels:

GSM 850: 124CH
PCS1900: 299CH
UMTS-FDD Band V: 102CH
UMTS-FDD Band II: 277CH
WIFI :802.11b/g/n(20M): 11CH
Bluetooth: 79CH
BLE: 40CH
GPS:1CH

Port: Please refer to the user's manual

Trade Name : VIRZO

FCC ID: 2AKQUVZCKVT701

GPRS Multi-slot class 8/10/11/12

Date EUT received: November 05, 2018

Test Date(s): November 06 to December 05, 2018

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.107; ANSI C63.4: 2014	AC Power Line Conducted Emissions	Compliance
§15.109; ANSI C63.4: 2014	Radiated Emissions	Compliance

Measurement Uncertainty


Parameter	Uncertainty
AC Power Line Conducted Emissions (150kHz~30MHz)	±3.11dB
Radiated Emission(30MHz~1GHz)	±5.12dB
Radiated Emission(1GHz~6GHz)	±5.34dB

6. Measurements, Examination And Derived Results

6.1 AC Power Line Conducted Emissions

Temperature	26°C
Relative Humidity	56%
Atmospheric Pressure	1023mbar
Test date :	November 22, 2018
Tested By :	Evans He

Requirement(s):

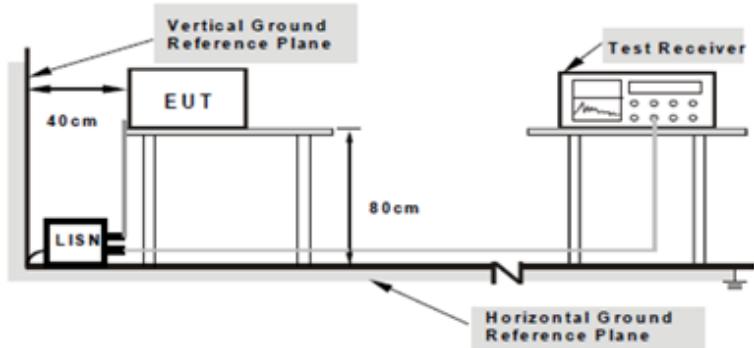Spec	Item	Requirement	Applicable														
47CFR§15.107	a)	<p>For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu] H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.</p> <table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency ranges (MHz)	Limit (dB μ V)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50	<input checked="" type="checkbox"/>
Frequency ranges (MHz)	Limit (dB μ V)																
	QP	Average															
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															
Test Setup	 <p>The diagram illustrates the test setup. A 'Vertical Ground Reference Plane' is shown as a horizontal line. A 'Horizontal Ground Reference Plane' is shown as a horizontal line at the bottom. An 'EUT' (Equipment Under Test) is a rectangular box connected to a 'LISN' (Line Impedance Stabilization Network) at the bottom. The LISN is connected to a 'Test Receiver' which is also connected to the ground reference plane. A '40cm' dimension is shown between the LISN and the EUT. A '80cm' dimension is shown between the LISN and the Test Receiver. Arrows point from the text labels to their respective components in the diagram.</p> <p>Note:</p> <ol style="list-style-type: none"> 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units. 																
Procedure	<ol style="list-style-type: none"> 1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. 2. The power supply for the EUT was fed through a 50Ω /50mH EUT LISN, connected to filtered mains. 																

	<ol style="list-style-type: none"> 3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode 1: USB Mode


Test Mode 2: MP4 Mode

Test Mode 3: Camera Mode

Test Mode 4: FM Mode

Note: All modes were investigated, the results below show only the worst case.(USB mode).


Test Mode 1: USB Mode

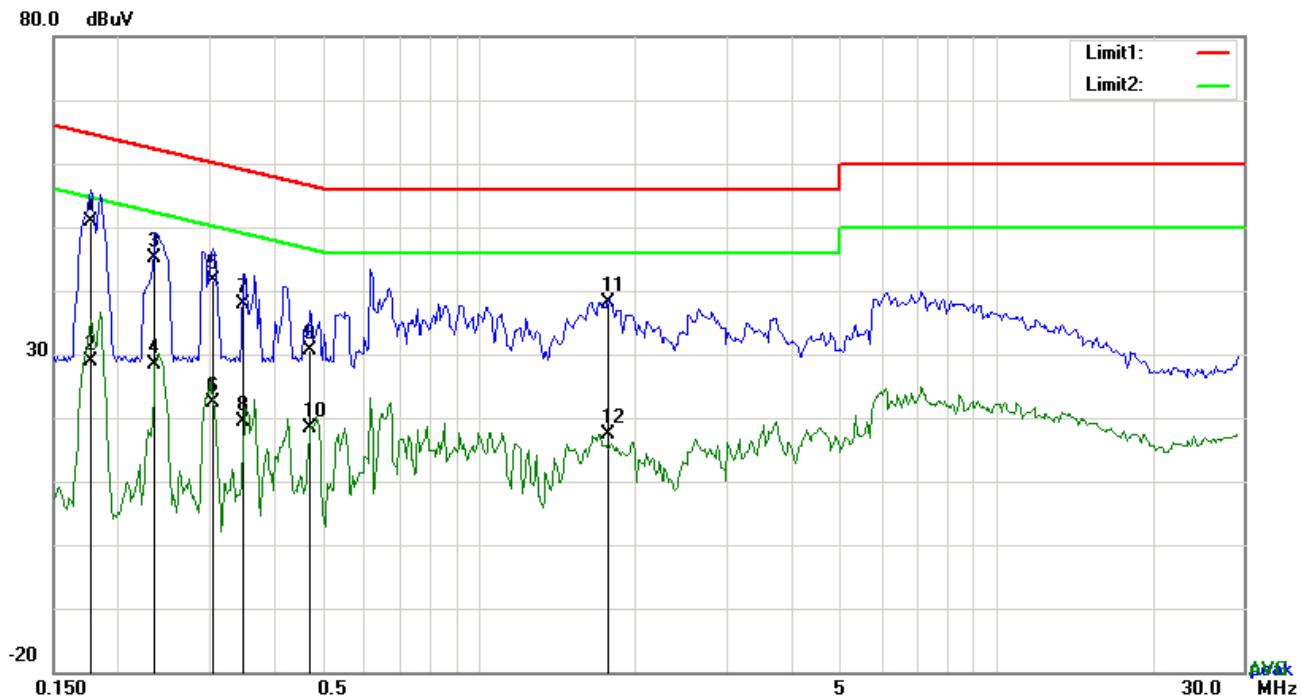

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	L1	0.1773	40.85	QP	10.03	50.88	64.61	-13.73
2	L1	0.1773	18.91	AVG	10.03	28.94	54.61	-25.67
3	L1	0.2358	35.07	QP	10.03	45.10	62.24	-17.14
4	L1	0.2358	18.33	AVG	10.03	28.36	52.24	-23.88
5	L1	0.3060	31.57	QP	10.03	41.60	60.08	-18.48
6	L1	0.3060	12.29	AVG	10.03	22.32	50.08	-27.76
7	L1	0.3489	27.95	QP	10.03	37.98	58.99	-21.01
8	L1	0.3489	9.45	AVG	10.03	19.48	48.99	-29.51
9	L1	0.4698	20.68	QP	10.03	30.71	56.52	-25.81
10	L1	0.4698	8.36	AVG	10.03	18.39	46.52	-28.13
11	L1	1.7763	28.12	QP	10.04	38.16	56.00	-17.84
12	L1	1.7763	7.24	AVG	10.04	17.28	46.00	-28.72

Test Mode 1: USB Mode

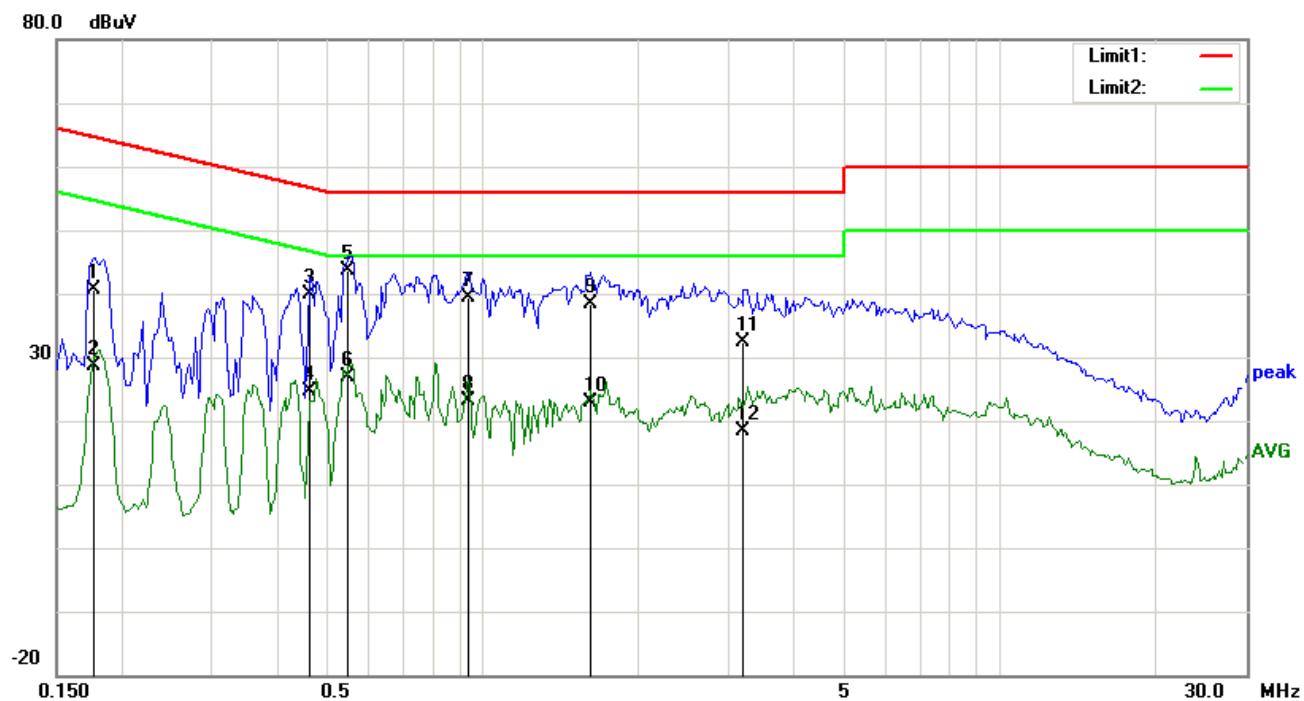


Test Data

Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	N	0.1773	30.73	QP	10.02	40.75	64.61	-23.86
2	N	0.1773	18.66	AVG	10.02	28.68	54.61	-25.93
3	N	0.4659	29.92	QP	10.02	39.94	56.59	-16.65
4	N	0.4659	14.68	AVG	10.02	24.70	46.59	-21.89
5	N	0.5517	33.50	QP	10.02	43.52	56.00	-12.48
6	N	0.5517	16.81	AVG	10.02	26.83	46.00	-19.17
7	N	0.9417	29.37	QP	10.03	39.40	56.00	-16.60
8	N	0.9417	13.02	AVG	10.03	23.05	46.00	-22.95
9	N	1.6242	28.34	QP	10.04	38.38	56.00	-17.62
10	N	1.6242	12.79	AVG	10.04	22.83	46.00	-23.17
11	N	3.2067	22.42	QP	10.05	32.47	56.00	-23.53
12	N	3.2067	8.24	AVG	10.05	18.29	46.00	-27.71


Test Mode 1: USB Mode

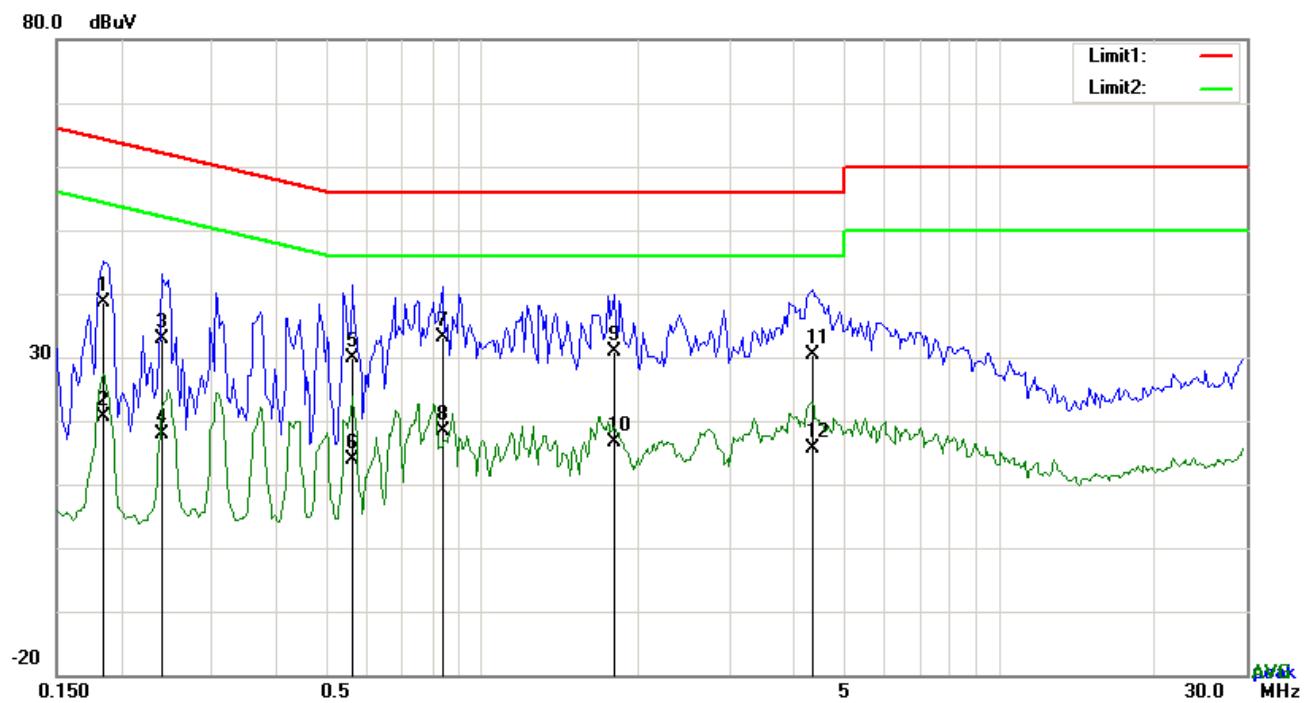

Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	L1	0.1851	28.51	QP	10.03	38.54	64.25	-25.71
2	L1	0.1851	10.57	AVG	10.03	20.60	54.25	-33.65
3	L1	0.2397	22.86	QP	10.03	32.89	62.11	-29.22
4	L1	0.2397	7.94	AVG	10.03	17.97	52.11	-34.14
5	L1	0.5595	19.96	QP	10.03	29.99	56.00	-26.01
6	L1	0.5595	3.83	AVG	10.03	13.86	46.00	-32.14
7	L1	0.8364	23.04	QP	10.03	33.07	56.00	-22.93
8	L1	0.8364	8.33	AVG	10.03	18.36	46.00	-27.64
9	L1	1.7919	20.94	QP	10.04	30.98	56.00	-25.02
10	L1	1.7919	6.67	AVG	10.04	16.71	46.00	-29.29
11	L1	4.3377	20.21	QP	10.07	30.28	56.00	-25.72
12	L1	4.3377	5.54	AVG	10.07	15.61	46.00	-30.39

Test Mode 1: USB Mode

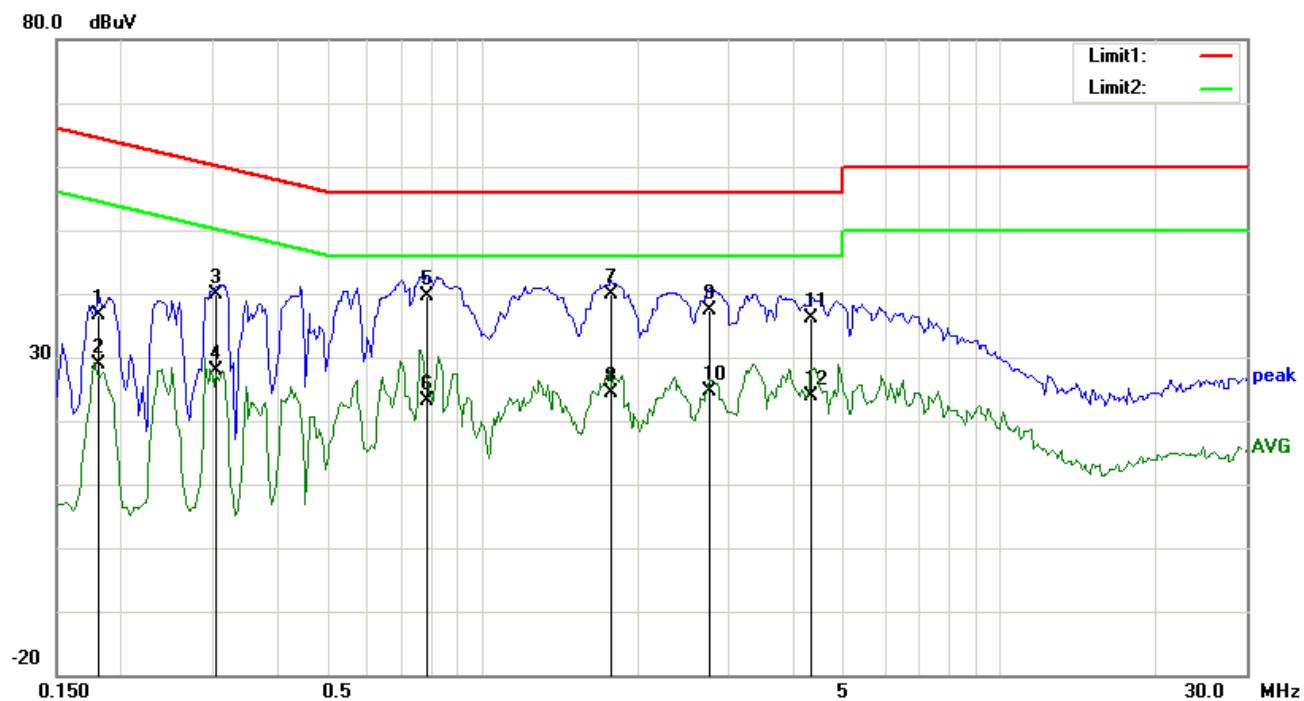

Test Data


Phase Neutral Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	N	0.1812	26.65	QP	10.02	36.67	64.43	-27.76
2	N	0.1812	18.83	AVG	10.02	28.85	54.43	-25.58
3	N	0.3060	29.74	QP	10.02	39.76	60.08	-20.32
4	N	0.3060	17.87	AVG	10.02	27.89	50.08	-22.19
5	N	0.7818	29.65	QP	10.03	39.68	56.00	-16.32
6	N	0.7818	13.13	AVG	10.03	23.16	46.00	-22.84
7	N	1.7802	29.88	QP	10.04	39.92	56.00	-16.08
8	N	1.7802	14.37	AVG	10.04	24.41	46.00	-21.59
9	N	2.7396	27.30	QP	10.05	37.35	56.00	-18.65
10	N	2.7396	14.66	AVG	10.05	24.71	46.00	-21.29
11	N	4.3182	26.16	QP	10.06	36.22	56.00	-19.78
12	N	4.3182	13.74	AVG	10.06	23.80	46.00	-22.20

6.2 Radiated Emissions

Temperature	26°C
Relative Humidity	56%
Atmospheric Pressure	1023mbar
Test date :	November 22, 2018
Tested By :	Evans He

Requirement(s):

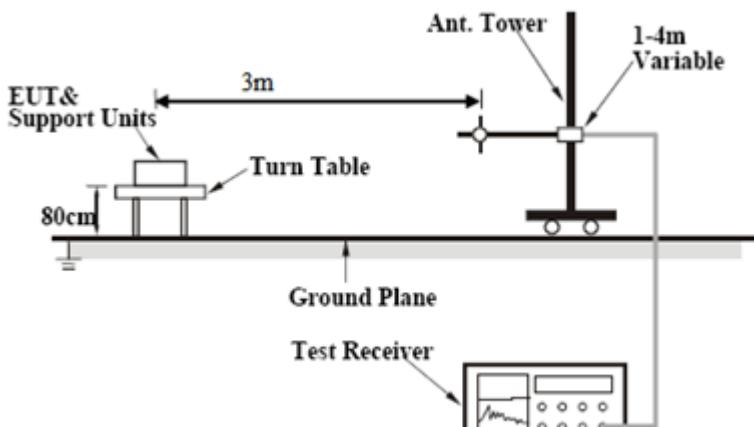Spec	Item	Requirement	Applicable										
47CFR§15.109(d)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (μV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 - 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength (μ V/m)	30 – 88	100	88 – 216	150	216 - 960	200	Above 960	500	<input checked="" type="checkbox"/>
Frequency range (MHz)	Field Strength (μ V/m)												
30 – 88	100												
88 – 216	150												
216 - 960	200												
Above 960	500												
Test Setup		 <p>The diagram illustrates the test setup. A 'Turn Table' is positioned on a 'Ground Plane'. An 'EUT & Support Units' is mounted on the turn table. A vertical 'Ant. Tower' is connected to the turn table. The distance between the EUT and the Ant. Tower is 3m. The height of the EUT is 80cm. The height of the Ant. Tower is adjustable, indicated as '1-4m Variable'. A 'Test Receiver' is connected to the Ant. Tower.</p>											
Procedure		<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> Vertical or horizontal polarization (whichever gave the higher emission level) 											

	<p>over a full rotation of the EUT) was chosen.</p> <p>b. The EUT was then rotated to the direction that gave the maximum emission.</p> <p>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</p> <p>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</p> <p>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.</p> <p>The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth with Peak detection for Average Measurement as below at frequency above 1GHz.</p> <ul style="list-style-type: none"> ■ 1 kHz (Duty cycle < 98%) <input type="checkbox"/> 10 Hz (Duty cycle > 98%) <p>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A


Test Mode 1: USB Mode

Test Mode 2: MP4 Mode

Test Mode 3: Camera Mode

Test Mode 4: FM Mode

Note: All modes were investigated, the results below show only the worst case.(USB mode).

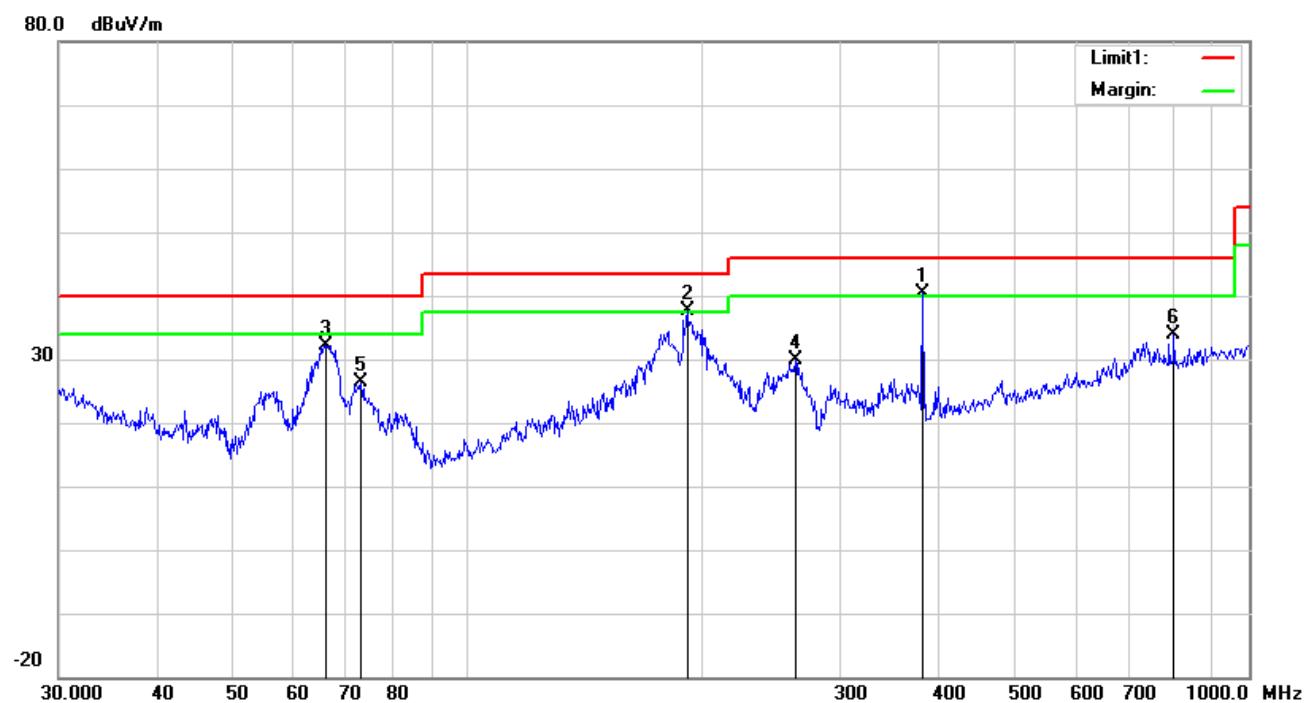Test Mode 1: USB Mode
Below 1GHz

Test Data
Horizontal Polarity Plot @3m

No.	P/L	Frequency (MHz)	Reading (dBuV/m)	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree
1	H	382.5879	45.07	15.33	22.06	2.02	40.36	46.00	-5.64	100	6
2	H	191.0738	46.90	11.61	22.32	1.54	37.73	43.50	-5.77	100	224
3	H	65.8031	46.10	7.59	22.39	0.90	32.20	40.00	-7.80	200	246
4	H	262.8955	38.45	11.97	22.29	1.72	29.85	46.00	-16.15	100	143
5	H	73.1025	40.07	7.74	22.39	0.97	26.39	40.00	-13.61	100	7
6	H	801.7863	30.69	21.42	21.15	2.96	33.92	46.00	-12.08	100	223

Below 1GHz



Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency	Reading	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/m)	(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)
1	V	192.4186	49.14	11.68	22.33	1.54	40.03	43.50	-3.47	100	122
2	V	65.8031	51.23	7.59	22.39	0.90	37.33	40.00	-2.67	100	355
3	V	56.9912	44.17	7.63	22.40	0.77	30.17	40.00	-9.83	100	46
4	V	382.5879	38.67	15.33	22.06	2.02	33.96	46.00	-12.04	100	131
5	V	260.1444	37.40	11.85	22.29	1.72	28.68	46.00	-17.32	100	216
6	V	72.3376	42.60	7.75	22.39	0.97	28.93	40.00	-11.07	100	46

Above 1GHz

Frequency (MHz)	Read_level (dB μ V/m)	Azimuth	Height (cm)	Polarity (H/V)	Factors (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector (PK/AV)
2608.44	67.22	104	100	V	-13.85	48.83	74	-25.17	PK
2308.44	69.97	90	100	V	-13.87	48.19	74	-25.81	PK
1960.67	65.54	264	100	V	-14.93	49.25	74	-24.75	PK
1764.03	64.49	114	100	H	-16.32	43.73	74	-30.27	PK
3874.45	63.13	237	100	H	-10.74	47.32	74	-26.68	PK
1316.55	61.44	249	100	H	-18.65	46.6	74	-27.4	PK

*Note1: The highest frequency of the EUT is 2480 MHz, so the testing has been conformed to 5*2480MHz=12,400MHz.*

Note2: The frequency that above 3GHz is mainly from the environment noise.

Note3: The AV measurement performed, more than 20dB below limit so AV test data was not presented.


Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due
AC Line Conducted Emissions				
EMI test receiver	ESCS30	8471241027	01/05/2018	01/04/2019
Artificial Mains Network	8127	8127713	01/05/2018	01/04/2019
ISN	ISN T800	34373	01/05/2018	01/04/2019
Radiated Emissions				
EMI test receiver	ESL6	1300.5001K06-100262-eQ	01/05/2018	01/04/2019
Active Antenna	AL-130	121031	02/08/2018	02/07/2019
3m Semi-anechoic Chamber	9m*6m*6m	N/A	10/18/2018	10/17/2019
Signal Amplifier	8447E	443008	01/25/2018	01/24/2019
MXA signal analyzer	N9020A	MY49100060	01/05/2018	01/04/2019
Horn Antenna	HAH-118	71259	01/26/2018	01/25/2019
Horn Antenna	HAH-118	71283	02/02/2018	02/01/2019
AMPLIFIER	EM01G26G	60613	01/25/2018	01/24/2019
AMPLIFIER	Emc012645	980077	01/05/2018	01/04/2019
Bilog Antenna (30MHz~6GHz)	JB6	A110712	02/08/2018	02/07/2019


Annex B. TEST SETUP AND SUPPORTING EQUIPMENT

Annex B.ii. TEST SET UP BLOCK

Block Configuration Diagram for Conducted Emissions

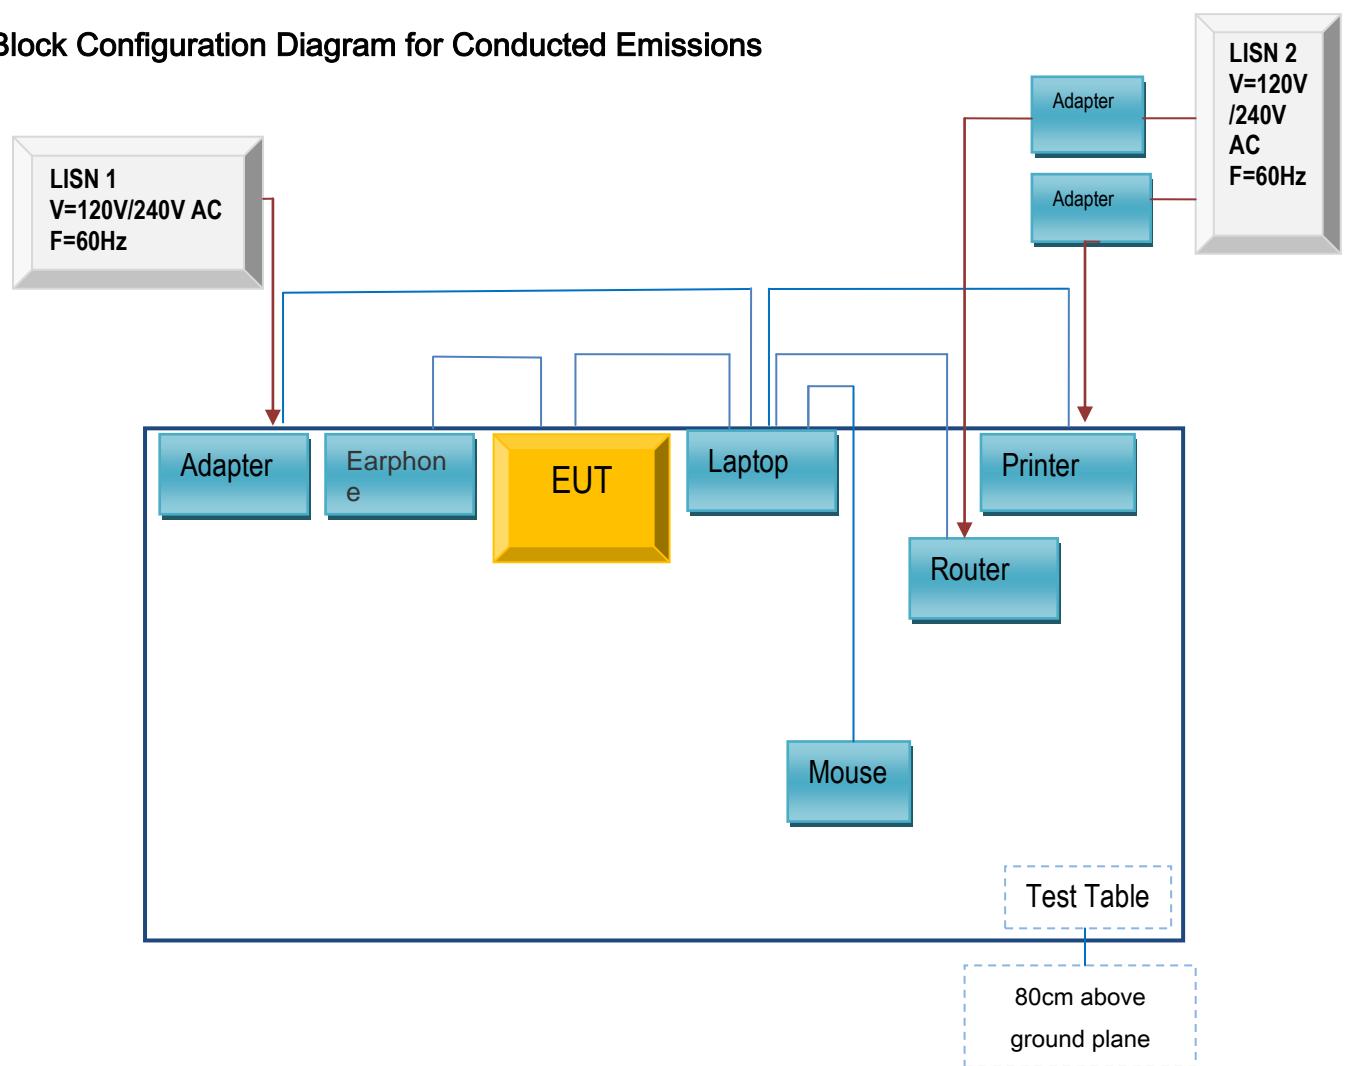

Block Configuration Diagram for Radiated Emissions

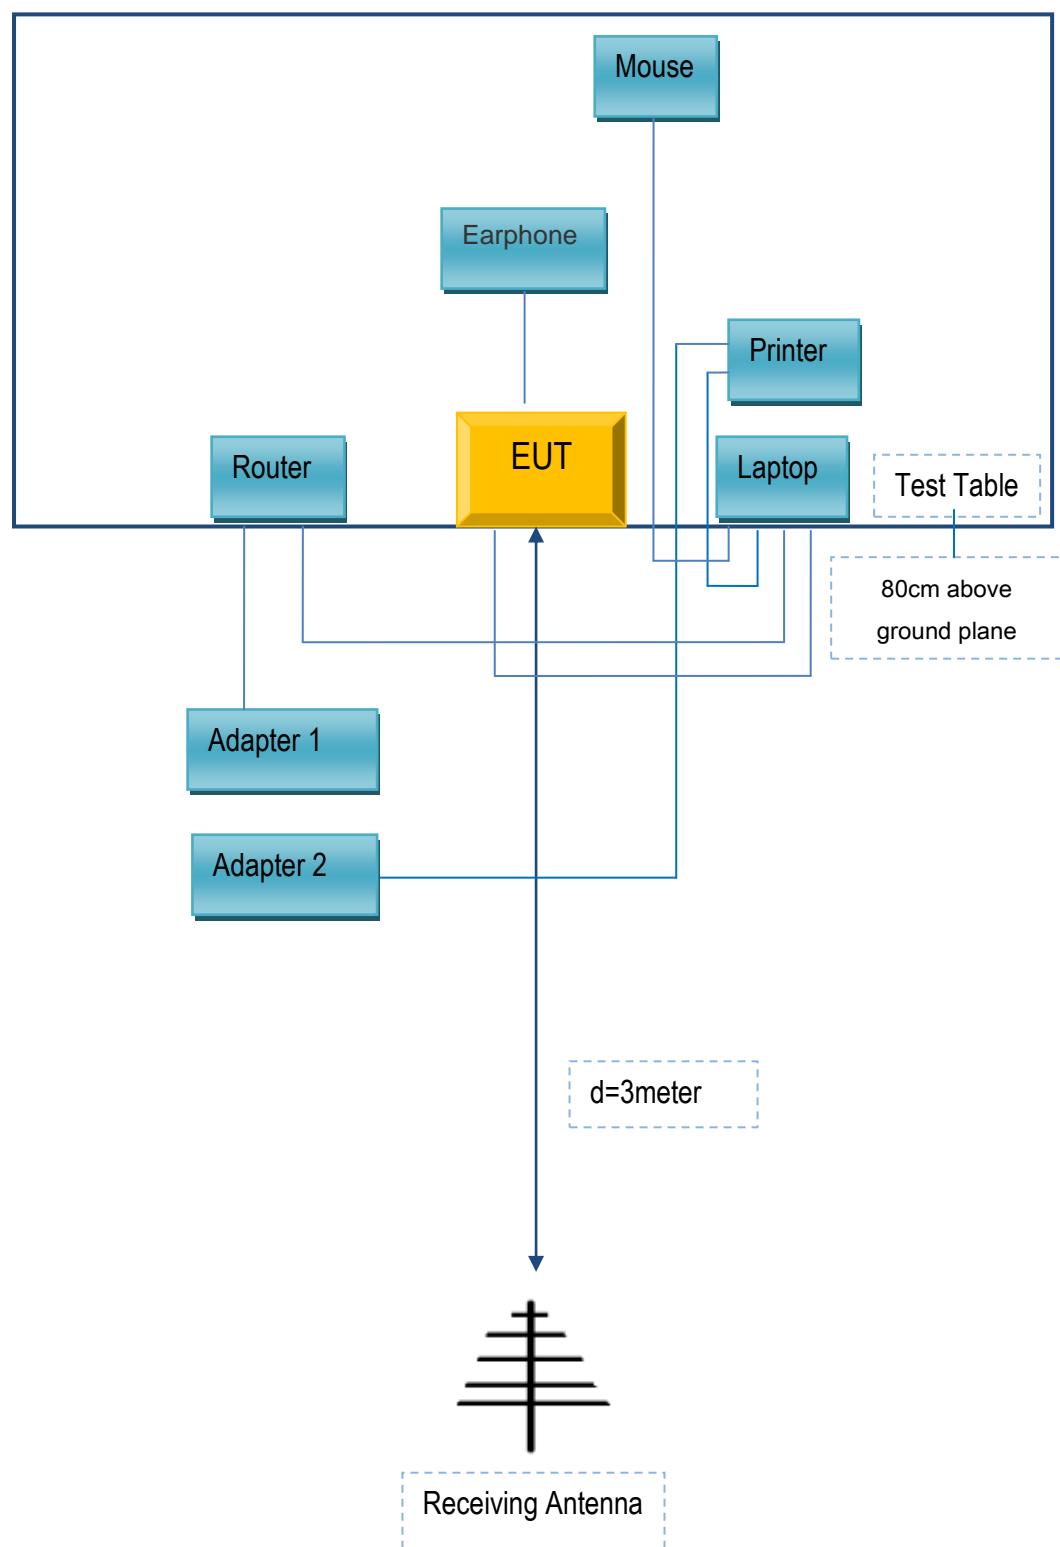

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
Lenovo	Laptop	E40	LR-1EHRX
GOLDWEB	Router	R102	1202032094
HP	Printer	VCVRA-1003	CN36M19JWX
DELL	Mouse	E100	912NMTUT41481
SAMSUNG	headset	HS330	N/A

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	2m	JX120051274
USB Cable	Un-shielding	No	2m	CBA3000AH0C1
RJ45 Cable	Un-shielding	No	2m	KX156327541
Router Power cable	Un-shielding	No	2m	13274630Z
Printer Power cable	Un-shielding	No	2m	127581031
Power Cable	Un-shielding	No	0.8m	GT211032

Annex C. User Manual / Block Diagram / Schematics / Partlist/ DECLARATION OF SIMILARITY

Please see the attachment